



# FCC Test Report

Report No: FCS202304099W01

Issued for

Applicant:	Bytech NY Inc.
Address:	2585 West 13 Street, Brooklyn, NY 11223
Product Name:	TWS Neutral Flip Top Earbud
Brand Name:	iHome
Model Name:	HM-AU-BE-228
Series Model:	iHome XT-94
FCC ID:	2AHN6-AUBE228
<p>Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 <a href="http://www.FCS-lab.com">http://www.FCS-lab.com</a></p>	

**TEST RESULT CERTIFICATION**

Applicant's Name.....: Bytech NY Inc.  
Address.....: 2585 West 13 Street, Brooklyn, NY 11223  
Manufacture's Name.....: Bytech NY Inc.  
Address.....: 2585 West 13 Street, Brooklyn, NY 11223

**Product Description**

Product Name.....: TWS Neutral Flip Top Earbud  
Brand Name.....: iHome  
Model Name.....: HM-AU-BE-228  
Series Model.....: iHome XT-94  
Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 247  
Test Procedure.....: ANSI C63.10:2013

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

**Date of Test.....:**

Date (s) of performance of tests. : Apr 14, 2023 ~ Apr 18, 2023

Date of Issue.....: Apr 18 , 2023

Test Result.....: Pass

Tested by : Scott shen  
(Scott Shen)  
Reviewed by : Duke Qian  
(Duke Qian)  
Approved by : Jack Wang  
(Jack Wang)



Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
1.1 TEST FACTORY .....	7
1.2 MEASUREMENT UNCERTAINTY .....	7
<b>2. GENERAL INFORMATION .....</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF THE EUT .....	8
2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED .....	10
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS .....	11
2.4 EQUIPMENTS LIST .....	12
<b>3 CONDUCTED EMISSION MEASUREMENT .....</b>	<b>13</b>
<b>4. 20 DB BANDWIDTH .....</b>	<b>17</b>
4.1 Limit .....	17
4.2 Test Procedure .....	17
4.3 Test setup .....	17
4.4 Test results .....	17
4.5 Original Test Data .....	18
<b>5. CONDUCTED OUTPUT POWER .....</b>	<b>19</b>
5.1 LIMIT .....	19
§§ .....	19
5.3 TEST SETUP .....	19
5.5 TEST RESULTS .....	19
<b>6 NUMBER OF HOPPING CHANNEL .....</b>	<b>22</b>
6.1 LIMIT .....	22
6.2 TEST PROCEDURE .....	22
5.3 TEST SETUP .....	22
6.4 EUT OPERATION CONDITIONS .....	22
6.5 TEST RESULTS .....	23
<b>7. BAND EDGE AND SPURIOUS(CONDUCTED) .....</b>	<b>24</b>
7.1 LIMIT .....	24
7.2 TEST PROCEDURE .....	24
7.3 TEST SETUP .....	24
7.4 TEST RESULTS .....	25

Table of Contents	Page
7.5 Original test data .....	25
7.6 For Hopping Band edge .....	28
<b>8. RADIATED EMISSION MEASUREMENT .....</b>	<b>29</b>
8.1 RADIATED EMISSION LIMITS .....	29
8.2 TEST PROCEDURE .....	30
8.3 TESTSETUP .....	31
8.4. TEST RESULTS .....	33
8.5 (30MHZ-1000MHZ) .....	34
■ 8.6 ABOVE 1GHZ .....	38
8.7 RADIATED BAND EDGE DATA .....	44
<b>9. AVERAGE TIME OF OCCUPANCY .....</b>	<b>46</b>
9.1 LIMIT .....	46
9.2 TEST PROCEDURE .....	46
9.3 TEST SETUP .....	46
9.4 TEST RESULTS .....	47
9.5 ORIGINAL TEST DATA .....	47
<b>10. HOPPING CHANNEL SEPARATION MEASUREMENT .....</b>	<b>49</b>
10.1 LIMIT .....	49
10.2 TEST PROCEDURE .....	49
10.3 TEST SETUP .....	49
10.4 EUT OPERATION CONDITIONS .....	50
10.5 TEST RESULTS .....	50
<b>11. ANTENNA REQUIREMENT .....</b>	<b>51</b>
11.1 STANDARD REQUIREMENT .....	51
11.2 RESULT .....	51

**Revision History**

Rev.	Issue Date	Effect Page	Contents
00	Apr 18 , 2023	N/A	N/A

### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247(a)(1)	Hopping Channel Separation	PASS	--
15.247 (b)(1)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247(d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247(a)(1)(i)	Number of Hopping Frequency	PASS	--
15.247(a)(1)(i)	Dwell Time	PASS	--
15.247(a)(1)	20dB Bandwidth 99% Bandwidth	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

**NOTE:**

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

### 1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
Laboray Accreditations	
FCC Test Firm Registration Number: 514908 CNAS Number: L15566 Designation number: CN0127 A2LA accreditation number: 5545.01 ISED Number: 25801	

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71$ dB
2	Unwanted Emissions, conducted	$\pm 2.988$ dB
3	Conducted Emission (9KHz-150KHz)	$\pm 4.13$ dB
4	All emissions radiated (9KHz -30MHz)	$\pm 3.1$ dB
5	Conducted Emission (150KHz-30MHz)	$\pm 4.74$ dB
6	All emissions,radiated(<1G) 30MHz-1000MHz	$\pm 5.2$ dB
7	All emissions,radiated 1GHz -18GHz	$\pm 4.66$ dB
8	All emissions,radiated 18GHz -40GHz	$\pm 4.31$ dB

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	TWS Neutral Flip Top Earbud
Trade Name	iHome
Model Name	HM-AU-BE-228
Series Model	iHome XT-94
Model Difference	The above product with same circuit, PCB layout, electrical parts, materials and wiring structures, the materials of decorative accessories is same, For the product appearance difference, the size is the same, but the color of the product is different
Channel List	Please refer to the Note 2.
Operation frequency	2402MHz-2480MHz
Modulation:	GFSK
Channel number	79 CH
Transmitter rate:	1MHz
Power Supply	Input:(USB):5V DC 1A
Battery	DC 3.7V
Report number	FCS202304099W01
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	NA	N/A	Chip Antenna	N/A	2.7	Antenna

## 2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Block diagram of EUT configuration for test



Test software: the BT\_Tool V1.0.9.exe

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

No.	Test model descrption
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Hopping GFSK

Note:

1. All the test modes can be supply by battery, only the result of the worst case recorded in the report. GFSK mode is worst mode.
2. For radiated emission, 3 axis were chosen for testing for each applicable mode.
3. The EUT used fully charge battery when tested.
4. During the test, the dutycycle>98%, the test voltage was tuned from 85% to 115% of the Nominal rate supply votage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data

### 2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Adapter	XIOAMI	MDY-11-EB	N/A	this adapter is for testing only in repor

#### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note	Manufacturer
2	Earphone charging case	iHome	XT-94	N/A	N/A	Bytech NY Inc.

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

## 2.4 EQUIPMENTS LIST

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2022.08.30	2023.08.29
Signal Analyzer	R&S	FSV40-N	FCS-E012	2022.08.30	2023.08.29
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2022.08.30	2023.08.29
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2022.08.30	2023.08.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2022.08.30	2023.08.29
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2022.08.30	2023.08.29
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2022.08.30	2023.08.29
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2022.08.30	2023.08.29
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2022.08.30	2023.08.29
Temperature & Humidity	HTC-1	victor	FCS-E005	2022.08.30	2023.08.29
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

### Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2022.08.30	2023.08.29
LISN	R&S	ENV216	FCS-E007	2022.08.30	2023.08.29
LISN	ETS	3810/2NM	FCS-E009	2022.08.30	2023.08.29
Temperature & Humidity	HTC-1	victor	FCS-E008	2022.08.30	2023.08.29
Testing Software	EZ-EMC(Ver.EMC-CON 3A1.1)				

### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2022.08.30	2023.08.29
Spectrum Analyzer	Agilent	E4447A	MY50180039	2022.08.30	2023.08.29
Spectrum Analyzer	R&S	FSV-40	101499	2022.08.30	2023.08.29
Power Sensor	Agilent	UX2021XA	FCS-E021	2022.08.30	2023.08.29
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

### 3 CONDUCTED EMISSION MEASUREMENT

#### 3.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


#### 3.2 TEST PROCEDURE

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


### 3.3 TEST SETUP

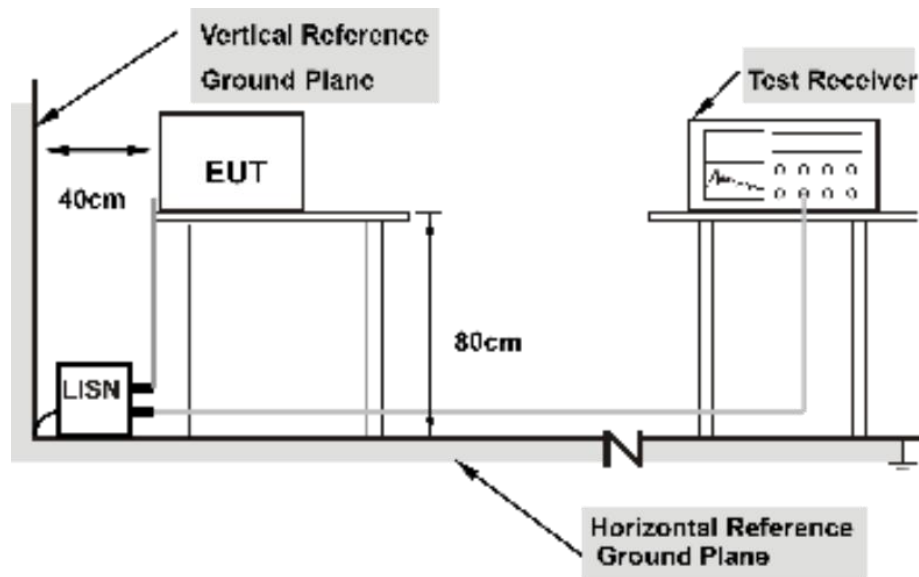

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


### 3.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK(worst mode)	Test Voltage:	DC 5V by adapter
Result:	L	Result:	Pass

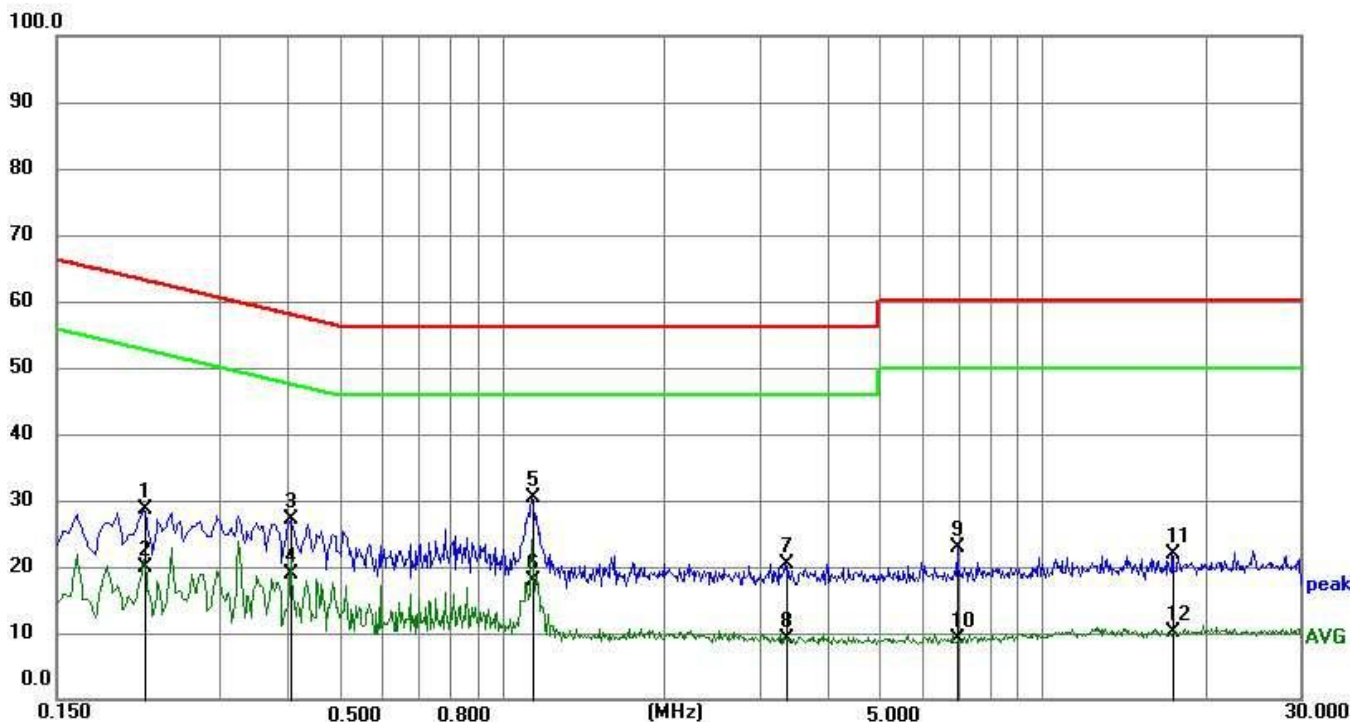

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2175	18.63	10.05	28.68	62.91	34.23	QP
2	0.2175	9.92	10.05	19.97	52.91	32.94	AVG
3	0.4065	17.02	10.00	27.02	57.72	30.70	QP
4	0.4065	8.85	10.00	18.85	47.72	28.87	AVG
5	1.1355	20.42	9.99	30.41	56.00	25.59	QP
6	1.1355	7.87	9.99	17.86	46.00	28.14	AVG
7	3.3540	10.54	9.93	20.47	56.00	35.53	QP
8	3.3540	-0.70	9.93	9.23	46.00	36.77	AVG
9	6.9810	13.09	9.83	22.92	60.00	37.08	QP
10	6.9810	-0.80	9.83	9.03	50.00	40.97	AVG
11	17.4165	12.07	9.91	21.98	60.00	38.02	QP
12	17.4165	0.19	9.91	10.10	50.00	39.90	AVG

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK(worst mode)	Test Voltage:	DC 5V by adapter
Result:	N	Result:	Pass

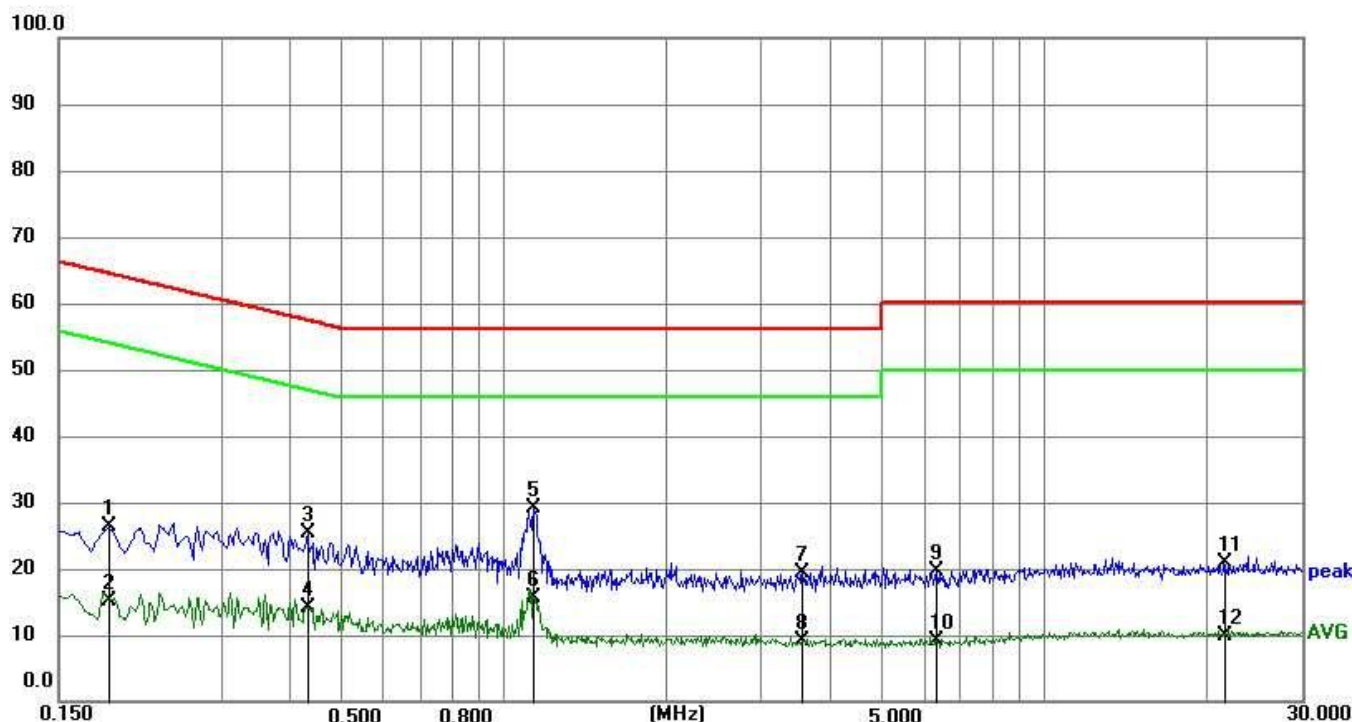

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1860	16.23	10.10	26.33	64.21	37.88	QP
2	0.1860	5.12	10.10	15.22	54.21	38.99	AVG
3	0.4335	15.45	10.02	25.47	57.19	31.72	QP
4	0.4335	4.15	10.02	14.17	47.19	33.02	AVG
5	1.1400	19.06	10.00	29.06	56.00	26.94	QP
6	1.1400	5.56	10.00	15.56	46.00	30.44	AVG
7	3.5700	9.53	9.92	19.45	56.00	36.55	QP
8	3.5700	-0.77	9.92	9.15	46.00	36.85	AVG
9	6.3285	9.88	9.85	19.73	60.00	40.27	QP
10	6.3285	-0.65	9.85	9.20	50.00	40.80	AVG
11	21.5295	10.87	9.94	20.81	60.00	39.19	QP
12	21.5295	0.06	9.94	10.00	50.00	40.00	AVG

Remark:

1. All readings are Quasi-Peak and Average values



## 4. 20 DB BANDWIDTH

### 4.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247a(1)	20dB bandwidth	N/A	2400-2483.5

### 4.2 Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth :30KHz For 99% Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 20dB Bandwidth : $\geq 3 \times$ RBW For 99% Bandwidth : approximately $3 \times$ RBW
Trace	Max hold
Sweep	Auto

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

### 4.3 Test setup




### 4.4 Test results


TestMode	Channel (MHz)	99%OBW(MHz)	20dB Bandwidth (MHz)	Verdict
Lowest	2402MHz	0.783	0.816	Pass
Middle	2441MHz	0.781	0.818	Pass
Highest	2480MHz	0.780	0.786	Pass

### 4.5 Original Test Data


#### 20BW, 1DH1, LOWEST

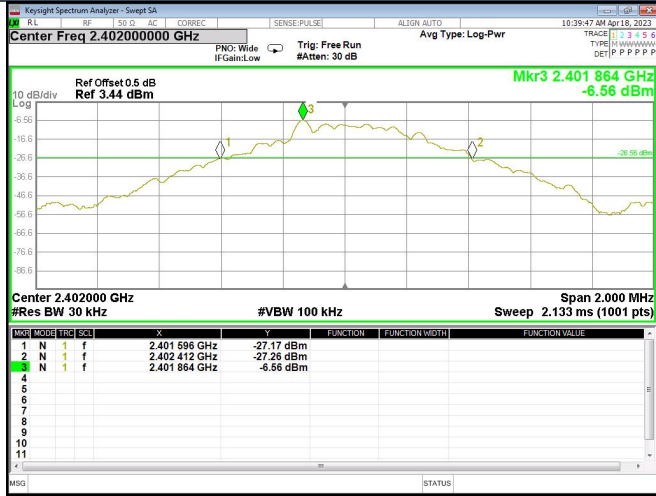


#### OCB, 1DH1, LOWEST

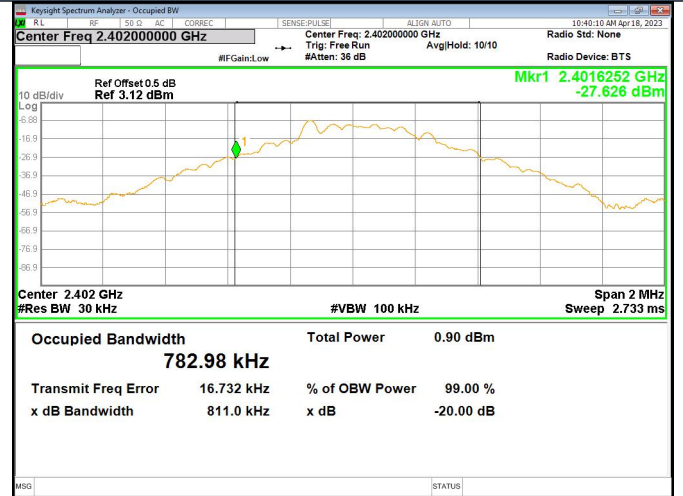


#### 20BW, 1DH1, MIDDLE

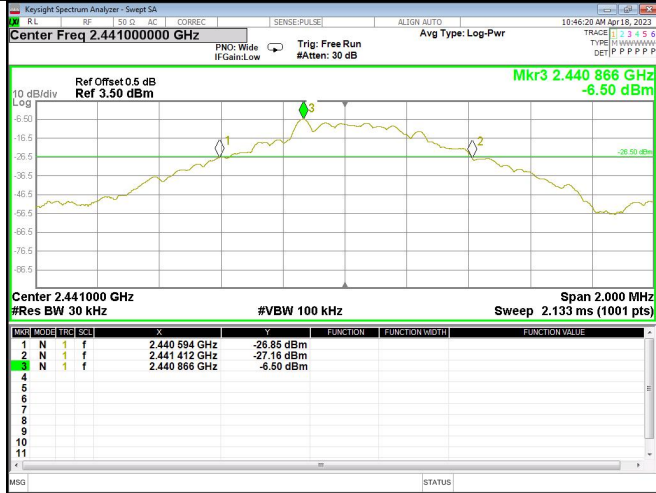


#### 20BW, 1DH1, MIDDLE

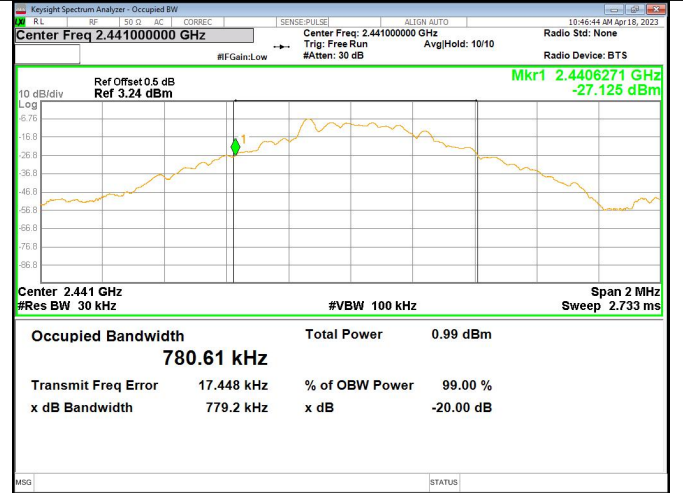

#### 20BW, 1DH1, HIGHEST

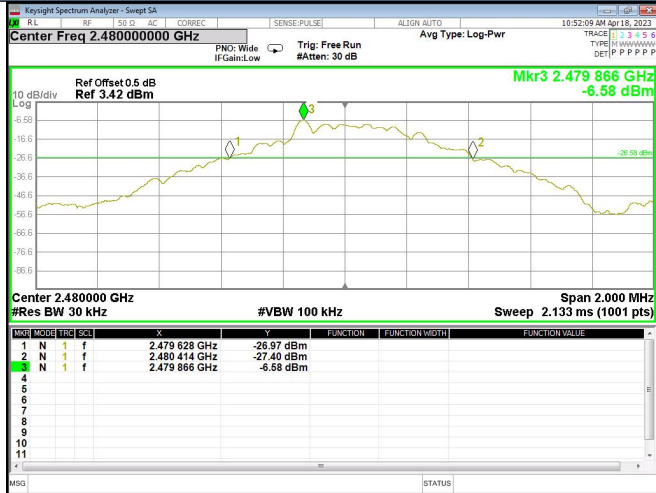

#### OCB, 1DH1, HIGHEST

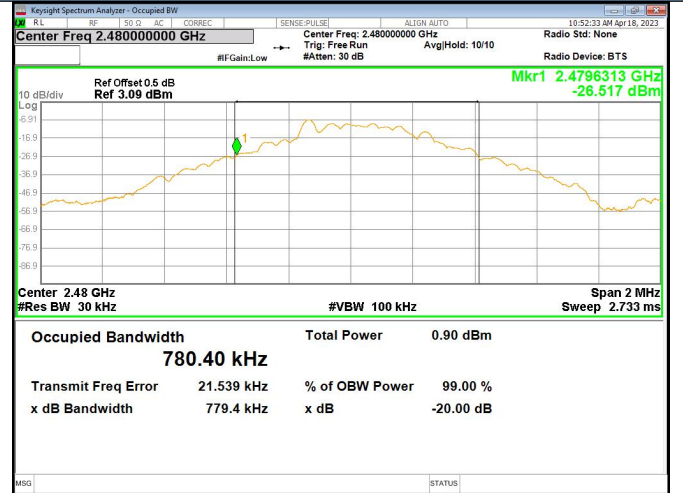

## 5. CONDUCTED OUTPUT POWER

### 5.1 LIMIT

FCC Part 15 Subpart C			
Section	Test Item	Limit	Frequency Range
15.247(b)(1)	Peak output power	Power <1W(30dBm)	2400-2483.5

### §§

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
 RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW ≤1 MHz)  
 RBW=3MHz, VBW=8MHz, Detector=Peak (If 20dB BW > 1 MHz)
- (3) The EUT was set to continuously transmitting in the max power during the test.


### 5.3 TEST SETUP




### 5.5 TEST RESULTS

TestMode	Channel (MHz)	Result (dBm)	Limit (dBm)	Verdict
Lowest	2402MHz	-5.79	30	Pass
Middle	2441MHz	-5.62	30	Pass
Highest	2480MHz	-5.73	30	Pass


Low

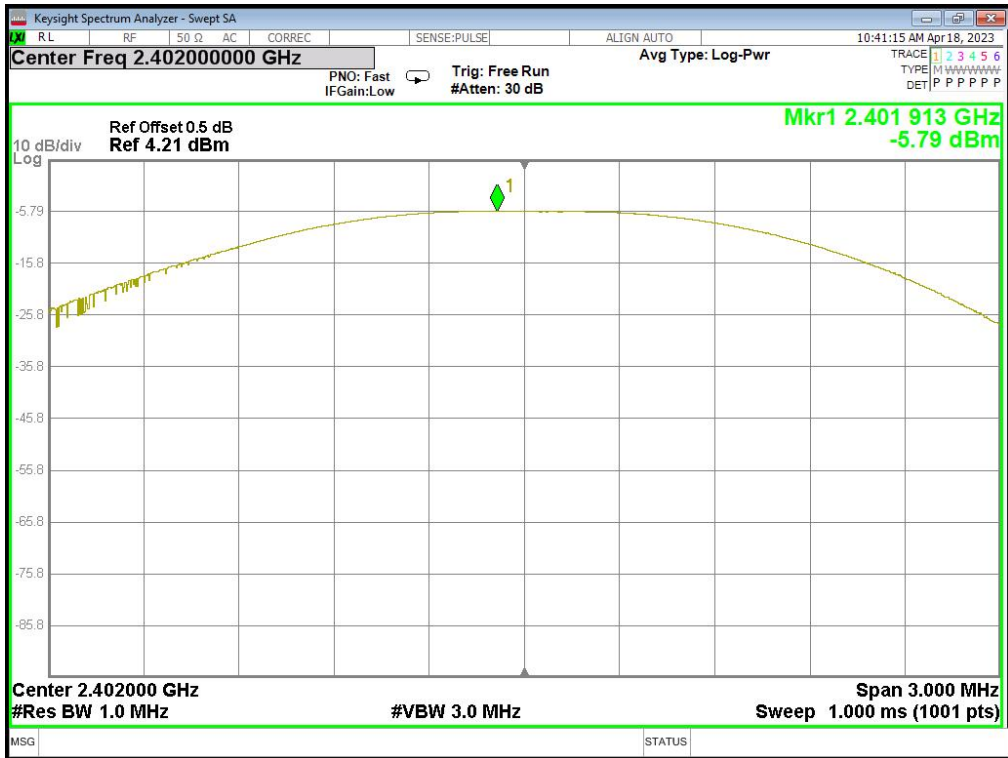

Middle

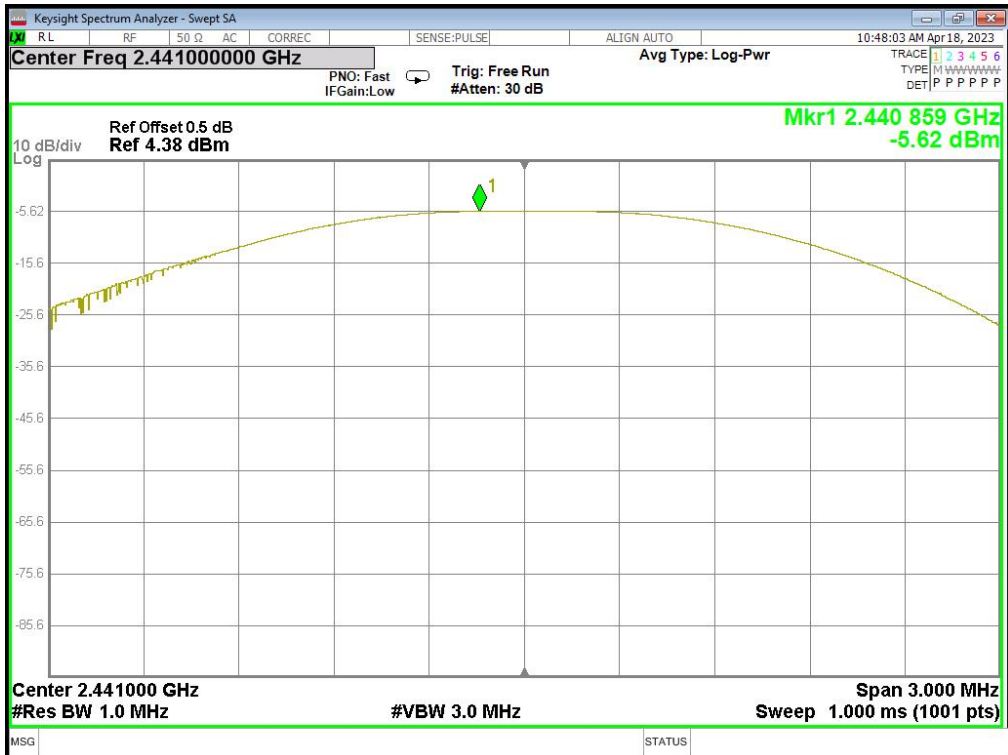

### High

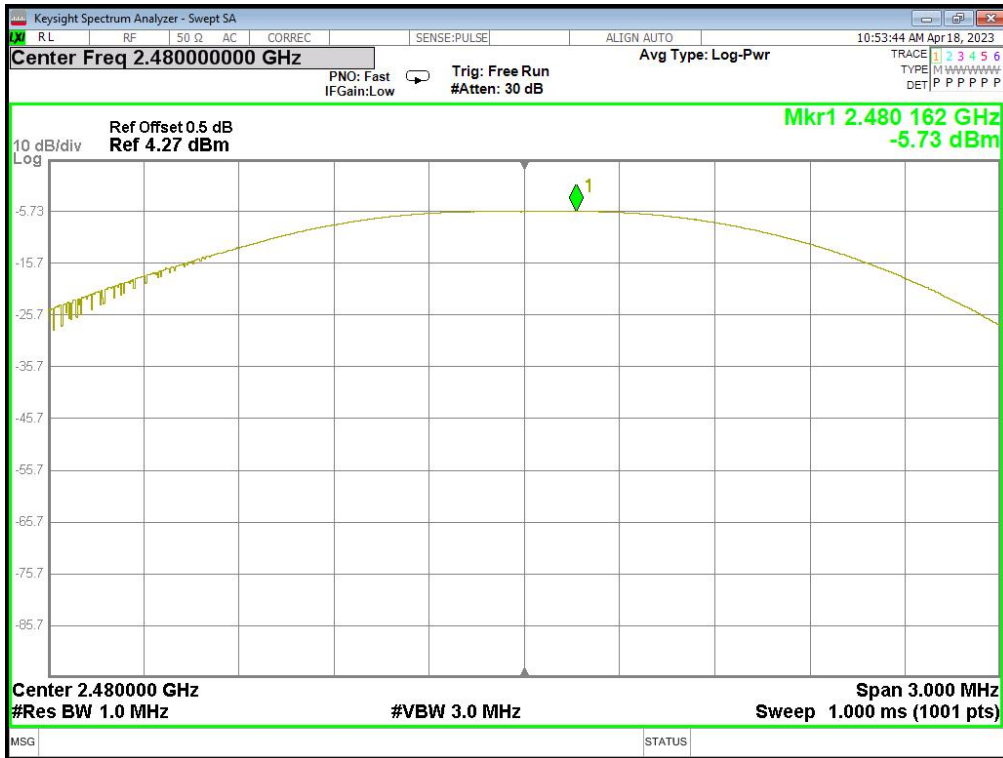

## 6 NUMBER OF HOPPING CHANNEL

### 6.1 LIMIT


FCC Part 15.247, Subpart C RSS-247 Issue 2				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii) RSS-247	Number of Hopping Channel	>15	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

a The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto

### 5.3 TEST SETUP

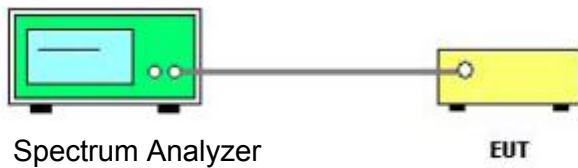

### 6.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 6.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	Hopping Mode -GFSK Mode	Test Voltage:	DC 3.7V



## 7. BAND EDGE AND SPURIOUS(CONDUCTED)

### 7.1 LIMIT

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 7.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100kHz
VBW:	300kHz
Span	1.5times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(3) Establish Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100kHz
VBW:	300kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

### 7.3 TEST SETUP

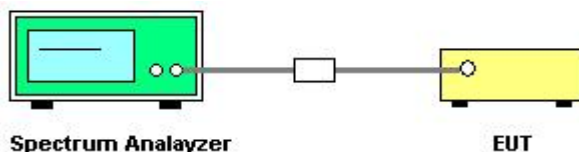



### 7.4 TEST RESULTS


Eut set mode	CH or Frequency	Result
GFSK	CH1	Pass
	CH79	Pass

### 7.5 Original test data

CH1 2402MHZ




CH79 2480MHZ

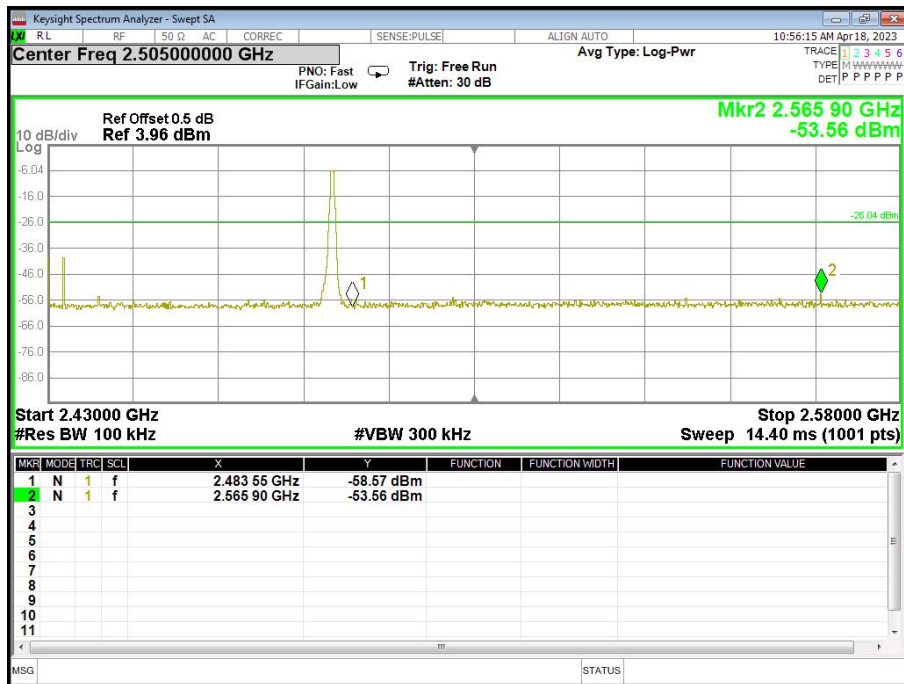


Spurious emissions


Low Channel 30MHz-25GHz

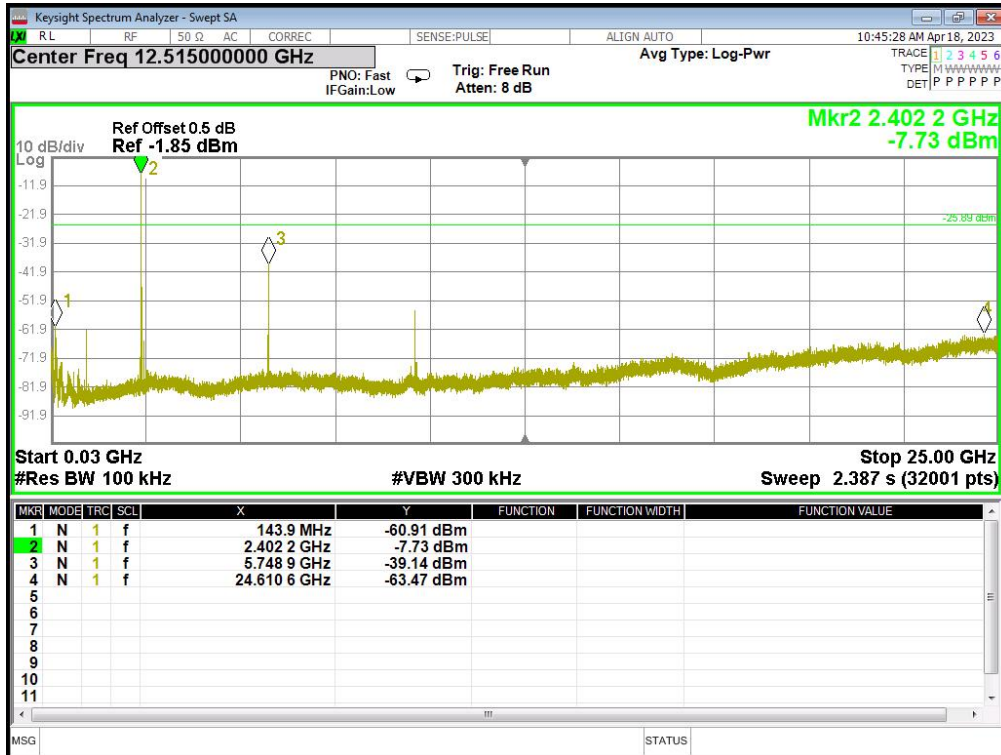


Middle Channel 30MHz-25GHz

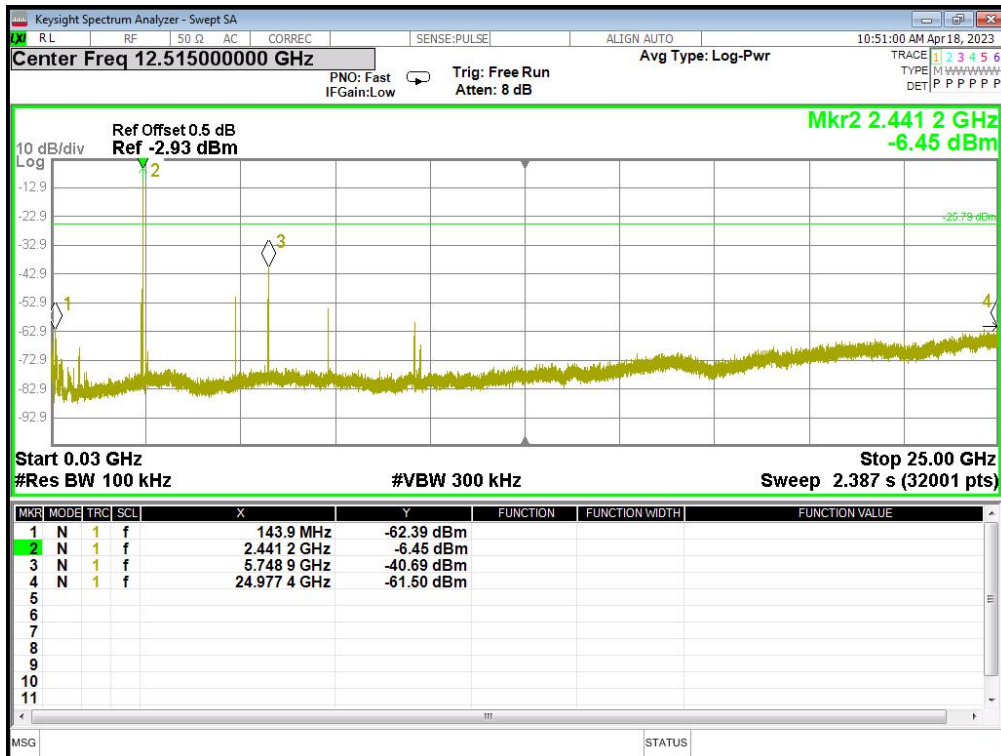

### High Channel 30MHz-25GHz

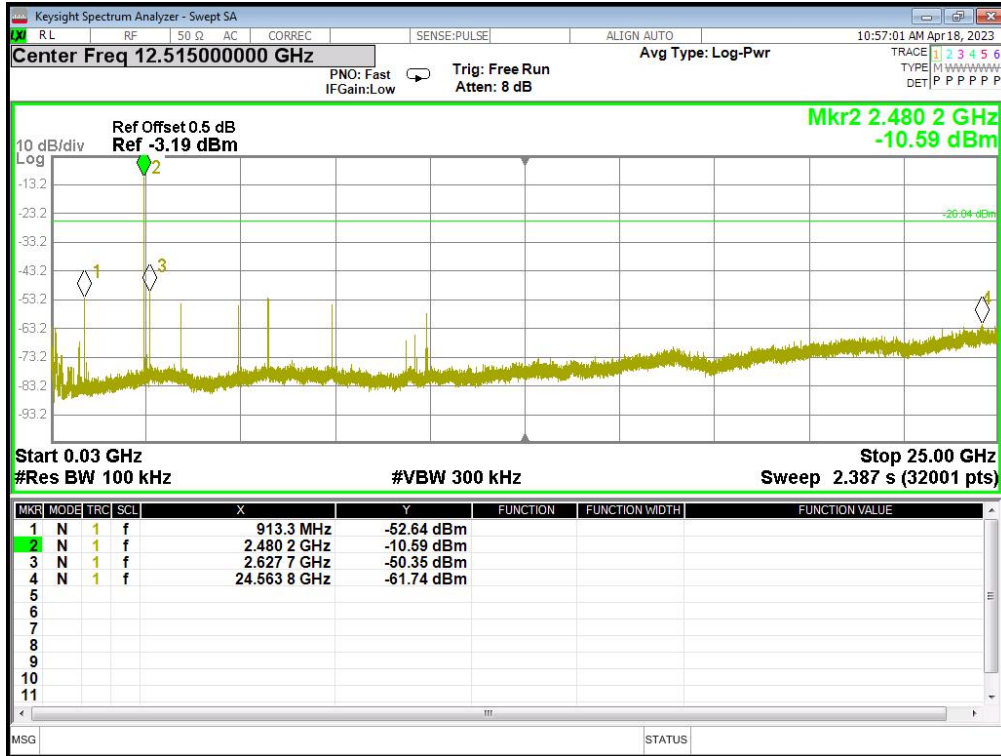

7.6 For Hopping Band edge

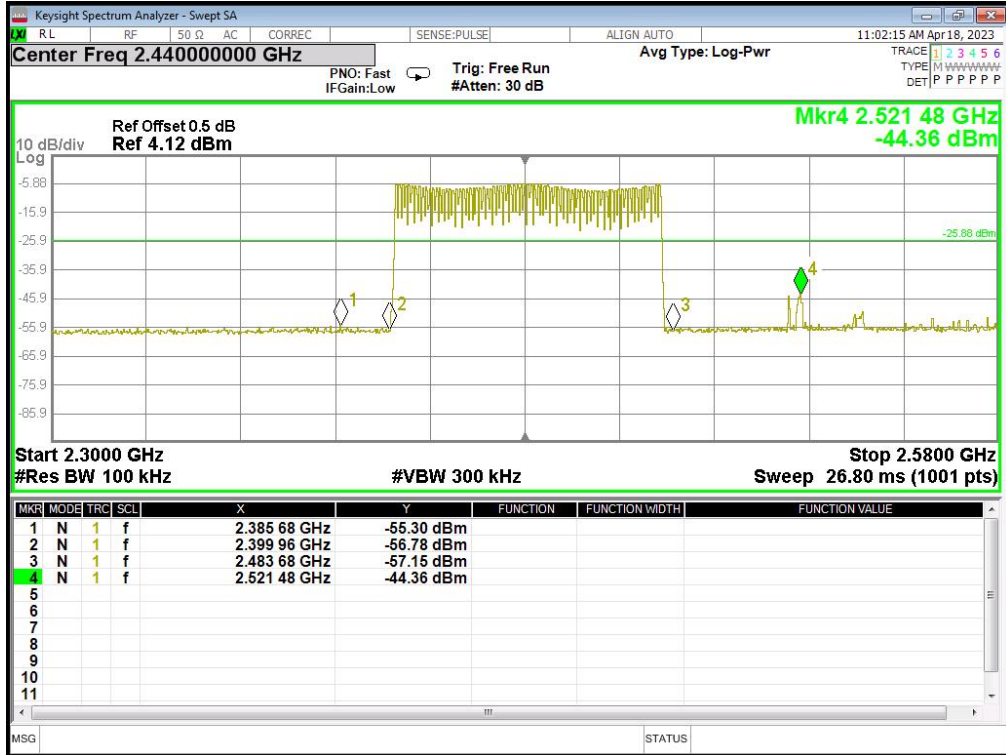

## 8. RADIATED EMISSION MEASUREMENT

### 8.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

#### LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz

For Band edge

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz / 10 Hz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

## 8.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 8.3 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

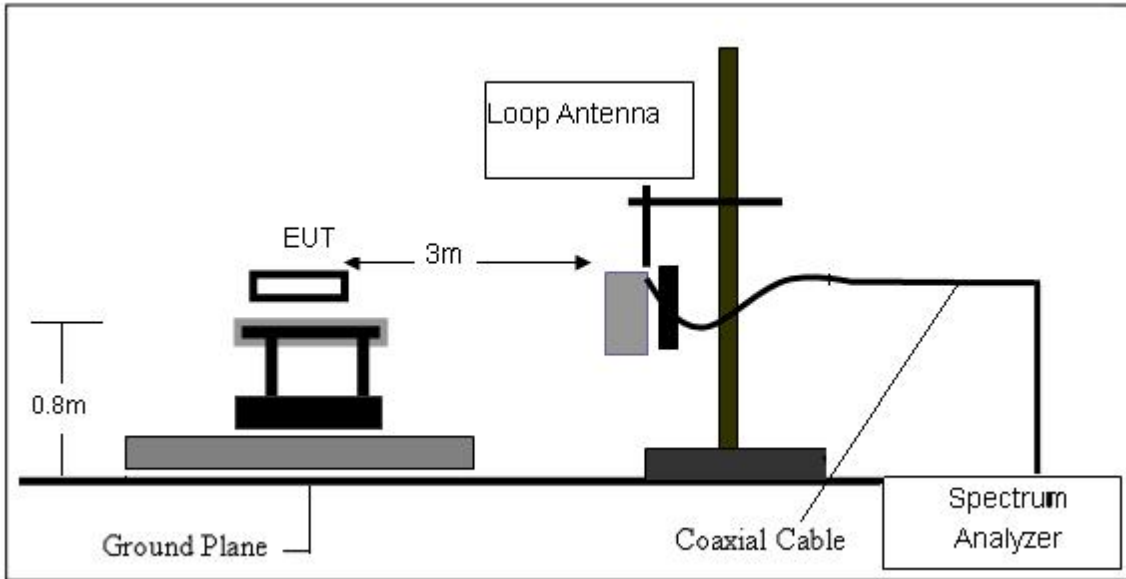

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

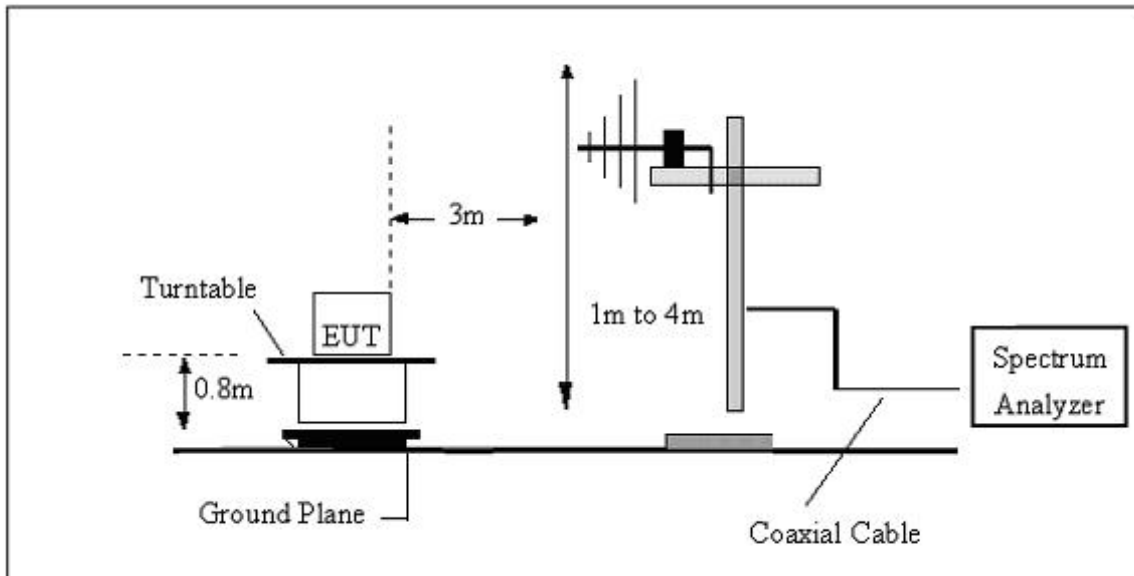

(C) Radiated Emission Test-Up Frequency Above 1GHz

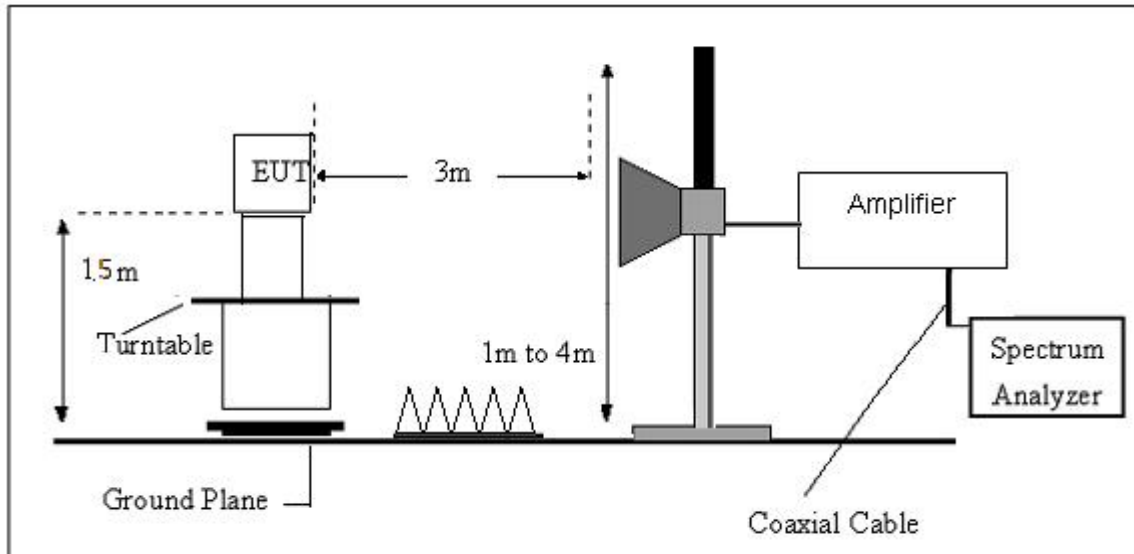



### 8.4. TEST RESULTS

(9KHz-30MHz)

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Test Mode:	GFSK(worst mode)

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

8.5 (30MHZ-1000MHZ)

Temperature:	24.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	left ear(worst mode)		

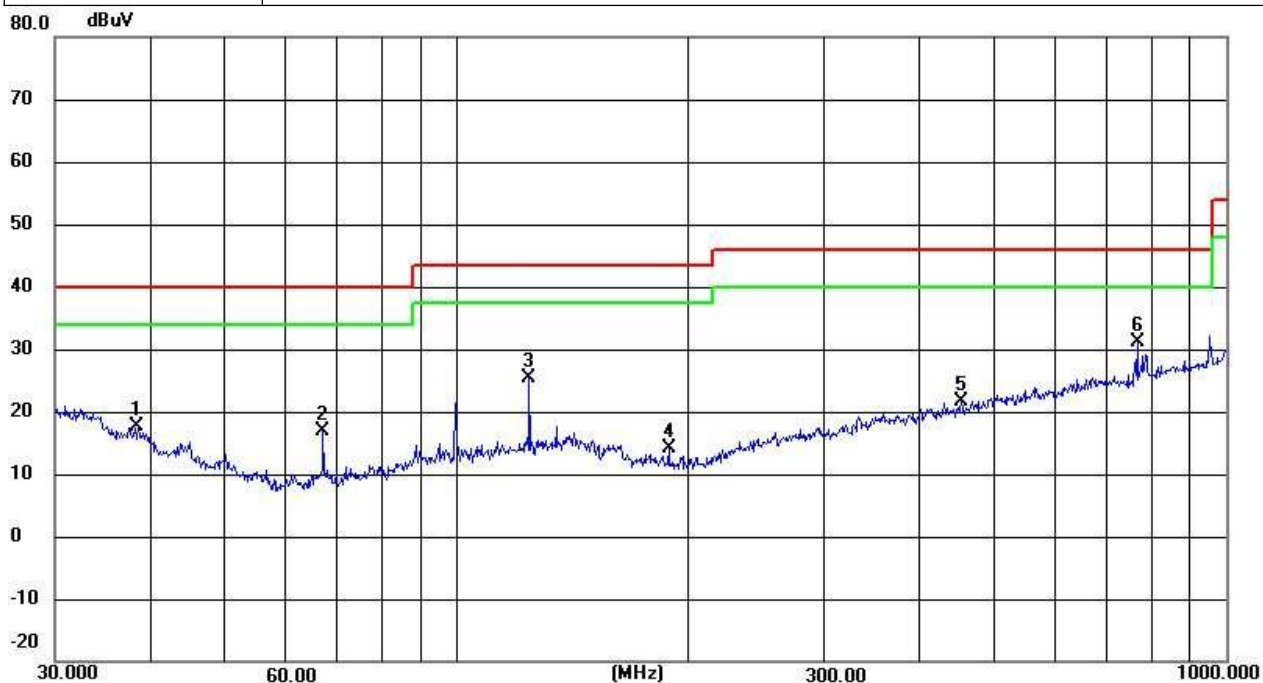


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.4809	30.41	-12.87	17.54	40.00	-22.46	QP
2	66.9669	36.93	-20.12	16.81	40.00	-23.19	QP
3	124.1330	57.59	-32.28	25.31	43.50	-18.19	QP
4	188.4125	46.42	-32.21	14.21	43.50	-29.29	QP
5	452.7197	53.61	-31.95	21.66	46.00	-24.34	QP
6	766.0571	62.73	-31.55	31.18	46.00	-14.82	QP

Note: 1. Margin = Result (Result =Reading + Factor )–Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.


Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	left ear(worst mode)		

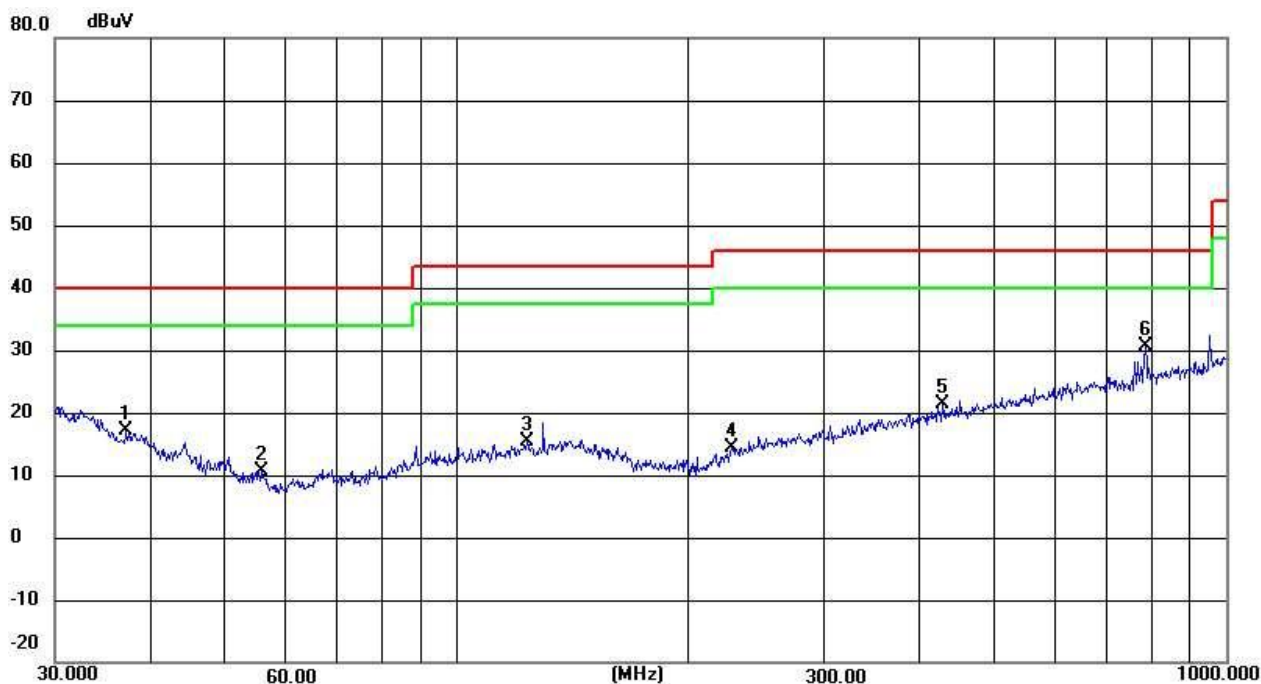

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.1550	29.18	-12.01	17.17	40.00	-22.83	QP
2	55.8047	30.39	-19.71	10.68	40.00	-29.32	QP
3	123.2655	47.72	-32.28	15.44	43.50	-28.06	QP
4	227.6906	46.57	-32.17	14.40	46.00	-31.60	QP
5	428.0193	53.46	-31.97	21.49	46.00	-24.51	QP
6	785.0935	62.10	-31.52	30.58	46.00	-15.42	QP

- Note: 1. Margin = Result (Result =Reading + Factor )–Limit  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Temperature:	24.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	right ear(worst mode)		

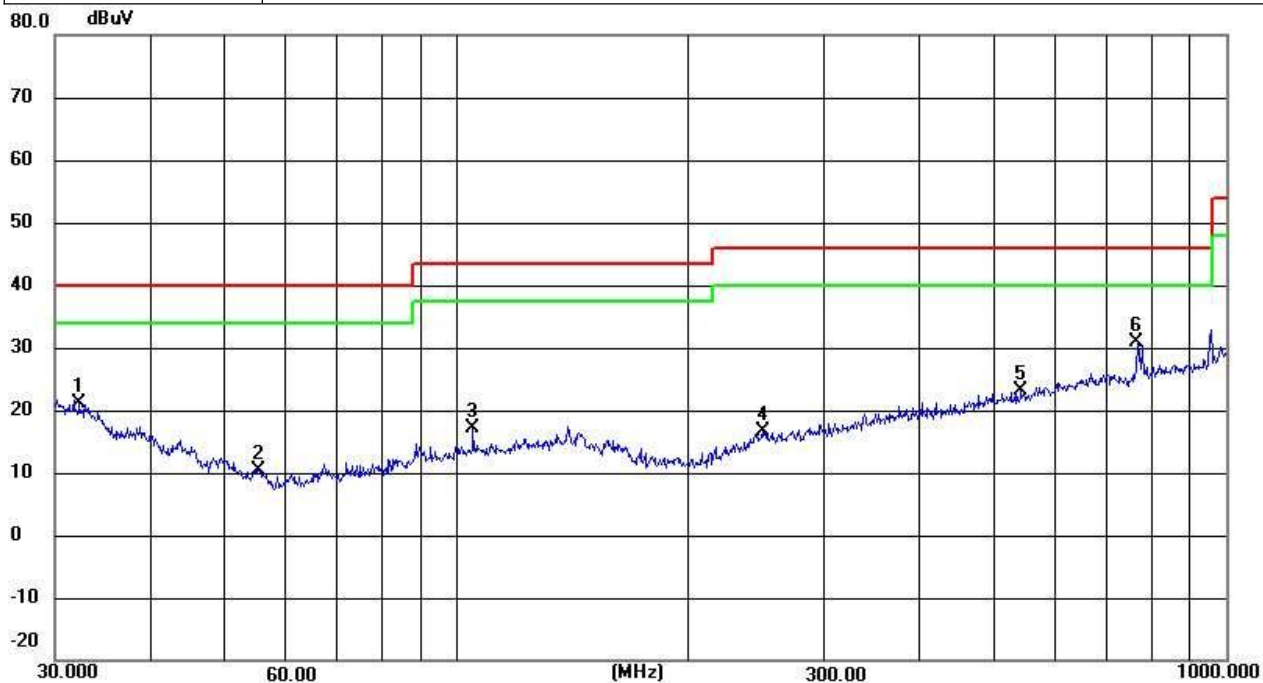


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.2925	30.06	-8.83	21.23	40.00	- 18.77	QP
2	55.2207	29.99	- 19.53	10.46	40.00	-29.54	QP
3	104.9033	49.31	-32.29	17.02	43.50	-26.48	QP
4	249.4250	48.83	-32. 15	16.68	46.00	-29.32	QP
5	541.3725	54.94	-31.84	23.10	46.00	-22.90	QP
6	766.0571	62.52	-31.55	30.97	46.00	-15.03	QP

Note: 1. Margin = Result (Result =Reading + Factor )–Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	right ear(worst mode)		

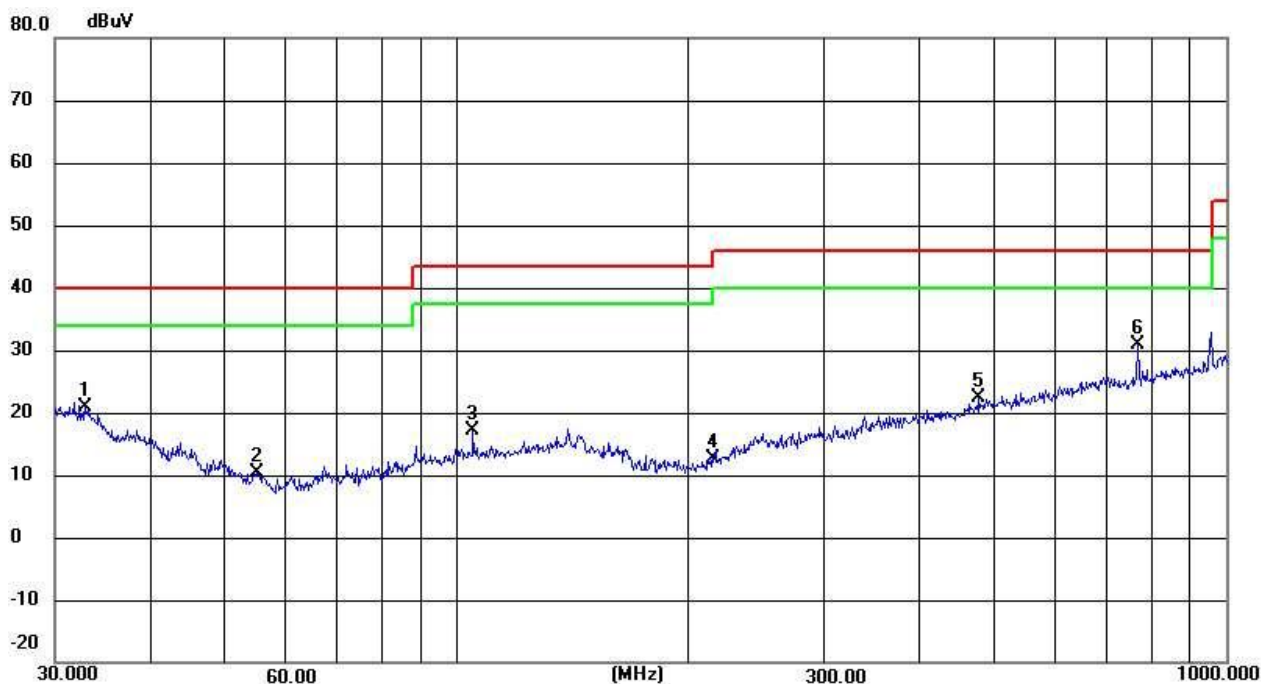

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.8637	30.13	-9.20	20.93	40.00	-19.07	QP
2	55.0274	29.86	- 19.47	10.39	40.00	-29.61	QP
3	104.9033	49.31	-32.29	17.02	43.50	-26.48	QP
4	215.2678	44.77	-32. 18	12.59	43.50	-30.91	QP
5	477.1694	54.40	-31.92	22.48	46.00	-23.52	QP
6	768.7481	62.45	-31.54	30.91	46.00	-15.09	QP

Note: 1. Margin = Result (Result =Reading + Factor )–Limit  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

■ 8.6 ABOVE 1GHZ

left ear Low CH (GFSK)

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	41.66	31.78	8.60	32.09	49.95	74.00	-24.05	Vertical
7206.00	33.94	36.15	11.65	32.00	49.74	74.00	-24.26	Vertical
9608.00	31.52	37.95	14.14	31.62	51.99	74.00	-22.01	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	45.42	31.78	8.60	32.09	53.71	74.00	-20.29	Horizontal
7206.00	37.54	36.15	11.65	32.00	53.34	74.00	-20.66	Horizontal
9608.00	34.08	37.95	14.14	31.62	54.55	74.00	-19.45	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	28.57	31.78	8.60	32.09	36.86	54.00	-17.14	Vertical
7206.00	22.93	36.15	11.65	32.00	38.73	54.00	-15.27	Vertical
9608.00	23.63	37.95	14.14	31.62	44.10	54.00	-9.90	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	32.34	31.78	8.60	32.09	40.63	54.00	-13.37	Horizontal
7206.00	23.49	36.15	11.65	32.00	39.29	54.00	-14.71	Horizontal
9608.00	23.20	37.95	14.14	31.62	43.67	54.00	-10.33	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

left ear Middle CH (GFSK)

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	36.68	31.85	8.67	32.12	45.08	74.00	-28.92	Vertical
7323.00	31.41	36.37	11.72	31.89	47.61	74.00	-26.39	Vertical
9764.00	28.76	38.35	14.25	31.62	49.74	74.00	-24.26	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	37.88	31.85	8.67	32.12	46.28	74.00	-27.72	Horizontal
7323.00	30.99	36.37	11.72	31.89	47.19	74.00	-26.81	Horizontal
9764.00	27.07	38.35	14.25	31.62	48.05	74.00	-25.95	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	25.79	31.85	8.67	32.12	34.19	54.00	-19.81	Vertical
7323.00	21.62	36.37	11.72	31.89	37.82	54.00	-16.18	Vertical
9764.00	20.36	38.35	14.25	31.62	41.34	54.00	-12.66	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	32.77	31.85	8.67	32.12	41.17	54.00	-12.83	Horizontal
7323.00	23.82	36.37	11.72	31.89	40.02	54.00	-13.98	Horizontal
9764.00	20.24	38.35	14.25	31.62	41.22	54.00	-12.78	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

left ear High CH(GFSK)

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	36.30	31.93	8.73	32.16	44.80	74.00	-29.20	Vertical
7440.00	32.66	36.59	11.79	31.78	49.26	74.00	-24.74	Vertical
9920.00	29.25	38.81	14.38	31.88	50.56	74.00	-23.44	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	37.89	31.93	8.73	32.16	46.39	74.00	-27.61	Horizontal
7440.00	30.52	36.59	11.79	31.78	47.12	74.00	-26.88	Horizontal
9920.00	30.14	38.81	14.38	31.88	51.45	74.00	-22.55	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	30.50	31.93	8.73	32.16	39.00	54.00	-15.00	Vertical
7440.00	24.84	36.59	11.79	31.78	41.44	54.00	-12.56	Vertical
9920.00	22.36	38.81	14.38	31.88	43.67	54.00	-10.33	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	33.09	31.93	8.73	32.16	41.59	54.00	-12.41	Horizontal
7440.00	24.42	36.59	11.79	31.78	41.02	54.00	-12.98	Horizontal
9920.00	24.57	38.81	14.38	31.88	45.88	54.00	-8.12	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.



right ear Low CH (GFSK)

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	35.32	31.78	8.60	32.09	43.61	74.00	-30.39	Vertical
7206.00	30.52	36.15	11.65	32.00	46.32	74.00	-27.68	Vertical
9608.00	30.30	37.95	14.14	31.62	50.77	74.00	-23.23	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	39.20	31.78	8.60	32.09	47.49	74.00	-26.51	Horizontal
7206.00	32.10	36.15	11.65	32.00	47.90	74.00	-26.10	Horizontal
9608.00	29.53	37.95	14.14	31.62	50.00	74.00	-24.00	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.51	31.78	8.60	32.09	32.80	54.00	-21.20	Vertical
7206.00	19.43	36.15	11.65	32.00	35.23	54.00	-18.77	Vertical
9608.00	18.63	37.95	14.14	31.62	39.10	54.00	-14.90	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	28.52	31.78	8.60	32.09	36.81	54.00	-17.19	Horizontal
7206.00	21.47	36.15	11.65	32.00	37.27	54.00	-16.73	Horizontal
9608.00	18.19	37.95	14.14	31.62	38.66	54.00	-15.34	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

right ear Middle CH (GFSK)

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	35.19	31.85	8.67	32.12	43.59	74.00	-30.41	Vertical
7323.00	30.43	36.37	11.72	31.89	46.63	74.00	-27.37	Vertical
9764.00	30.22	38.35	14.25	31.62	51.20	74.00	-22.80	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	39.05	31.85	8.67	32.12	47.45	74.00	-26.55	Horizontal
7323.00	32.00	36.37	11.72	31.89	48.20	74.00	-25.80	Horizontal
9764.00	29.44	38.35	14.25	31.62	50.42	74.00	-23.58	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	24.41	31.85	8.67	32.12	32.81	54.00	-21.19	Vertical
7323.00	19.36	36.37	11.72	31.89	35.56	54.00	-18.44	Vertical
9764.00	18.56	38.35	14.25	31.62	39.54	54.00	-14.46	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	28.40	31.85	8.67	32.12	36.80	54.00	-17.20	Horizontal
7323.00	21.39	36.37	11.72	31.89	37.59	54.00	-16.41	Horizontal
9764.00	18.12	38.35	14.25	31.62	39.10	54.00	-14.90	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

right ear High CH(GFSK)

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	34.74	31.93	8.73	32.16	43.24	74.00	-30.76	Vertical
7440.00	30.13	36.59	11.79	31.78	46.73	74.00	-27.27	Vertical
9920.00	29.96	38.81	14.38	31.88	51.27	74.00	-22.73	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	38.51	31.93	8.73	32.16	47.01	74.00	-26.99	Horizontal
7440.00	31.66	36.59	11.79	31.78	48.26	74.00	-25.74	Horizontal
9920.00	29.14	38.81	14.38	31.88	50.45	74.00	-23.55	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.05	31.93	8.73	32.16	32.55	54.00	-21.45	Vertical
7440.00	19.11	36.59	11.79	31.78	35.71	54.00	-18.29	Vertical
9920.00	18.35	38.81	14.38	31.88	39.66	54.00	-14.34	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	27.99	31.93	8.73	32.16	36.49	54.00	-17.51	Horizontal
7440.00	21.12	36.59	11.79	31.78	37.72	54.00	-16.28	Horizontal
9920.00	17.87	38.81	14.38	31.88	39.18	54.00	-14.82	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

### 8.7 RADIATED BAND EDGE DATA

Remark: All restriction band have been tested, and only the worst case is shown in report

left ear Low CH (GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	39.25	27.59	5.38	30.18	42.04	74.00	-31.96	Horizontal
2400.00	52.93	27.58	5.39	30.18	55.72	74.00	-18.28	Horizontal
2390.00	38.89	27.59	5.38	30.18	41.68	74.00	-32.32	Vertical
2400.00	52.07	27.58	5.39	30.18	54.86	74.00	-19.14	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	31.79	27.59	5.38	30.18	34.58	54.00	-19.42	Horizontal
2400.00	39.60	27.58	5.39	30.18	42.39	54.00	-11.61	Horizontal
2390.00	31.57	27.59	5.38	30.18	34.36	54.00	-19.64	Vertical
2400.00	41.24	27.58	5.39	30.18	44.03	54.00	-9.97	Vertical

left ear High CH(GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	42.49	27.53	5.47	29.93	45.56	74.00	-28.44	Horizontal
2500.00	43.75	27.55	5.49	29.93	46.86	74.00	-27.14	Horizontal
2483.50	42.07	27.53	5.47	29.93	45.14	74.00	-28.86	Vertical
2500.00	40.90	27.55	5.49	29.93	44.01	74.00	-29.99	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.27	27.53	5.47	29.93	36.34	54.00	-17.66	Horizontal
2500.00	32.65	27.55	5.49	29.93	35.76	54.00	-18.24	Horizontal
2483.50	33.81	27.53	5.47	29.93	36.88	54.00	-17.12	Vertical
2500.00	34.43	27.55	5.49	29.93	37.54	54.00	-16.46	Vertical

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

right ear Low CH (GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	37.16	27.61	5.36	30.18	39.95	74.00	-34.05	Horizontal
2390.00	37.32	27.59	5.38	30.18	40.11	74.00	-33.89	Horizontal
2400.00	53.32	27.58	5.39	30.18	56.11	74.00	-17.89	Horizontal
2310.00	37.65	27.61	5.36	30.18	40.44	74.00	-33.56	Vertical
2390.00	37.34	27.59	5.38	30.18	40.13	74.00	-33.87	Vertical
2400.00	54.76	27.58	5.39	30.18	57.55	74.00	-16.45	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	29.65	27.61	5.36	30.18	32.44	54.00	-21.56	Horizontal
2390.00	29.13	27.59	5.38	30.18	31.92	54.00	-22.08	Horizontal
2400.00	40.03	27.58	5.39	30.18	42.82	54.00	-11.18	Horizontal
2310.00	28.34	27.61	5.36	30.18	31.13	54.00	-22.87	Vertical
2390.00	28.68	27.59	5.38	30.18	31.47	54.00	-22.53	Vertical
2400.00	41.15	27.58	5.39	30.18	43.94	54.00	-10.06	Vertical

right ear High CH(GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.76	27.53	5.47	29.93	41.83	74.00	-32.17	Horizontal
2500.00	38.99	27.55	5.49	29.93	42.10	74.00	-31.90	Horizontal
2483.50	38.68	27.53	5.47	29.93	41.75	74.00	-32.25	Vertical
2500.00	39.46	27.55	5.49	29.93	42.57	74.00	-31.43	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	31.89	27.53	5.47	29.93	34.96	54.00	-19.04	Horizontal
2500.00	30.68	27.55	5.49	29.93	33.79	54.00	-20.21	Horizontal
2483.50	32.64	27.53	5.47	29.93	35.71	54.00	-18.29	Vertical
2500.00	30.14	27.55	5.49	29.93	33.25	54.00	-20.75	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

## 9. AVERAGE TIME OF OCCUPANCY


### 9.1 LIMIT

FCC Part 5 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(1)	Average Time of Occupancy	0.4 sec	2400-2483.5

### 9.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set RBW =1MHz/VBW =3MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is  $3.37 \times 31.6 = 106.6$ .
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is  $5.06 \times 31.6 = 160$ .
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is  $10.12 \times 31.6 = 320$ .


### 9.3 TEST SETUP

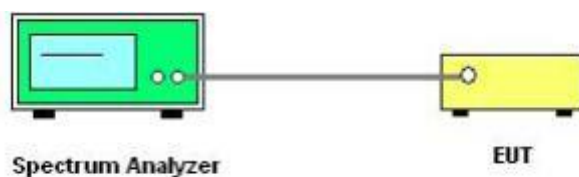


### 9.4 TEST RESULTS

AVERAGE TIME OF OCCUPANCY							
CONDITION	MODE	FREQUENCY (MHZ)	PULSE TIME (MS)	AVERAGE TIME OF OCCUPANCY (MS)	LIMIT (MS)	BURST NUMBER	RESULTS
NVNT	1DH1	2402	0.415	130.662	400	318	PASS
NVNT	1DH3	2480	1.676	259.842	400	160	PASS
NVNT	1DH5	2480	2.908	305.340	400	171	PASS

### 9.5 ORIGINAL TEST DATA

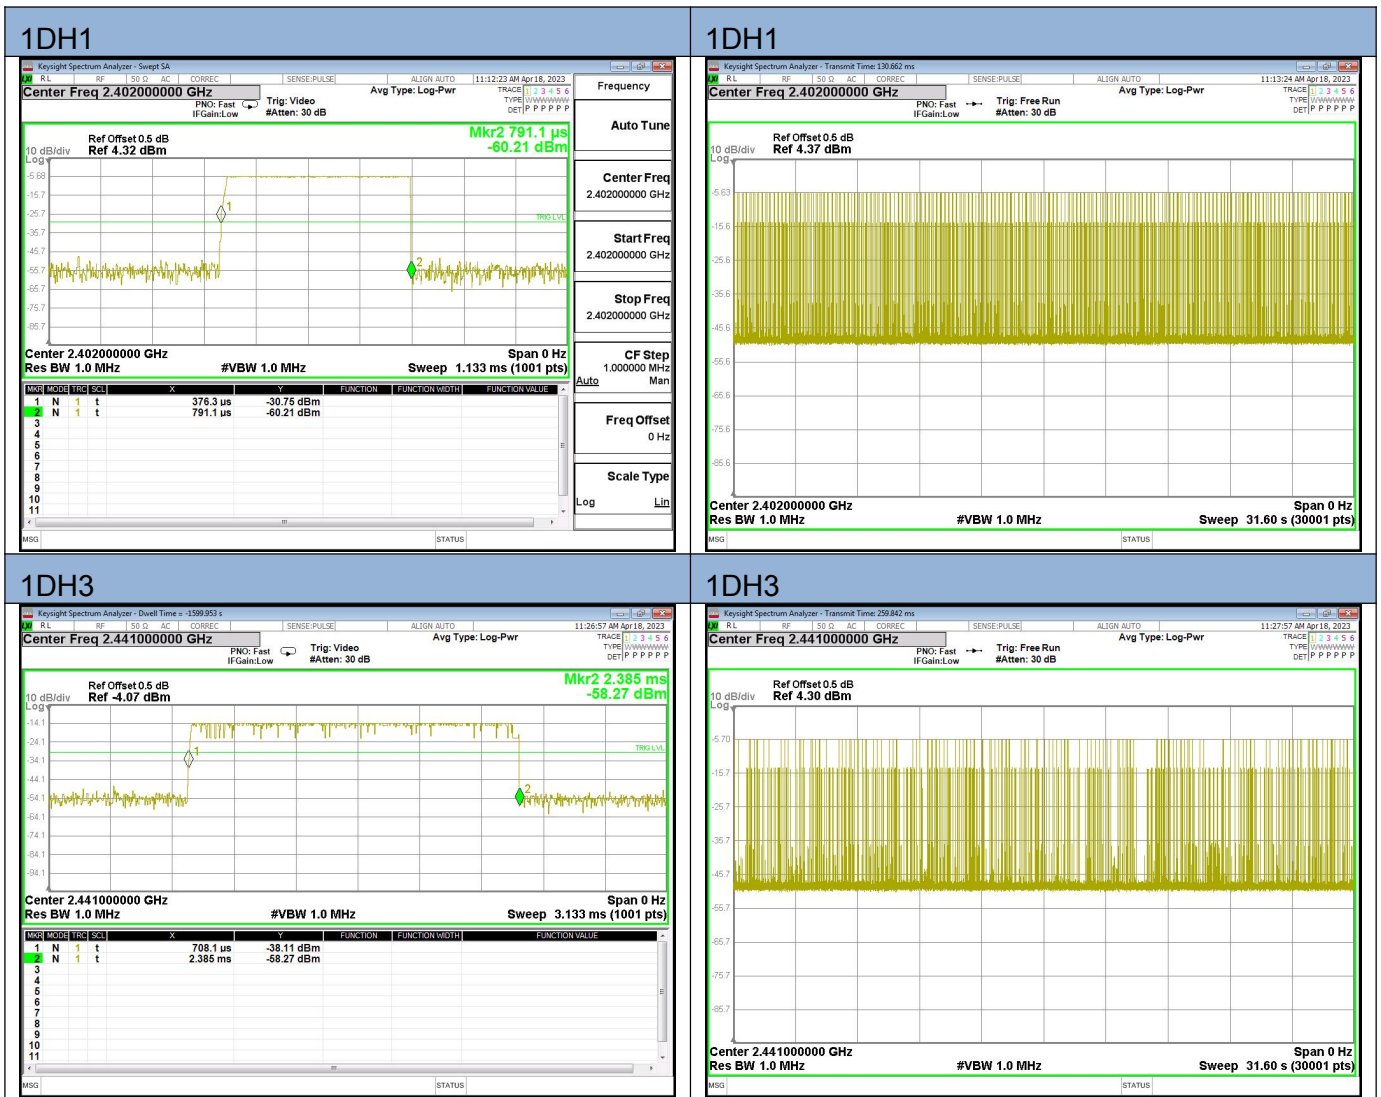

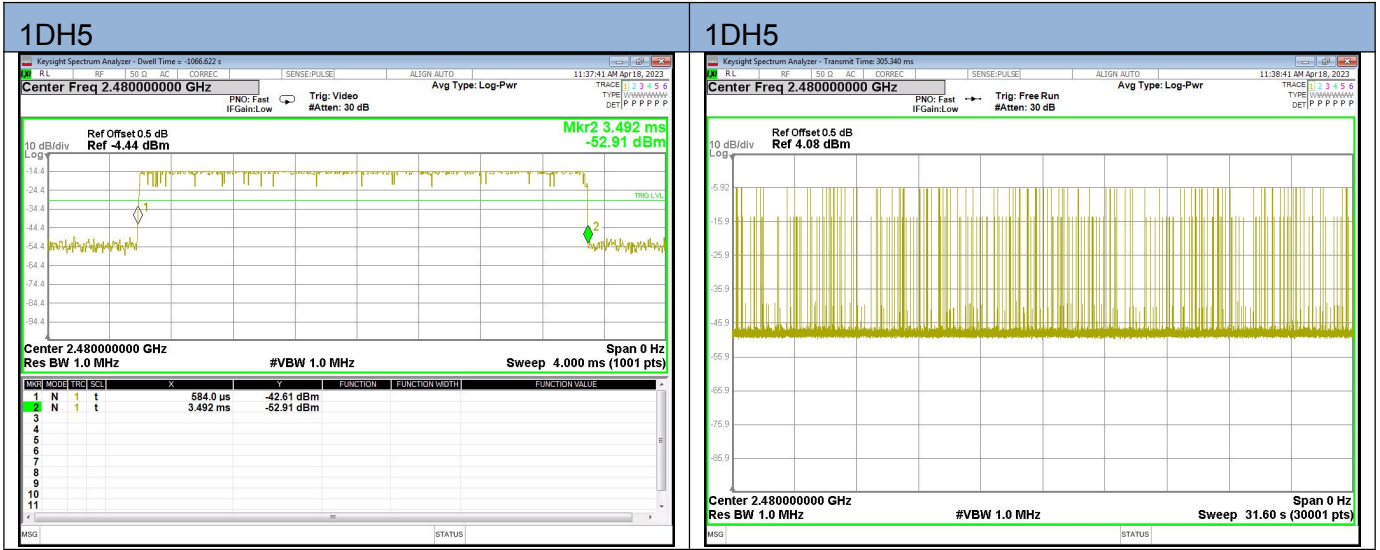



## 10. HOPPING CHANNEL SEPARATION MEASUREMENT

### 10.1 LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 20 dB Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 10.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement

### 10.3 TEST SETUP

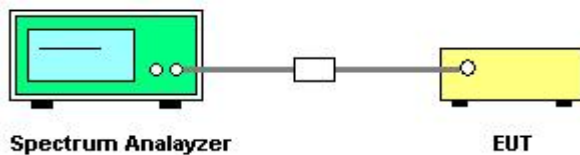


### 10.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 10.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	GFSK Mode	Test Voltage:	DC 3.7V

Modulation	Frequency (MHz)	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
GFSK	1DH1	2402	1.000	0.54	Pass
	1DH3	2441	1.002	0.55	Pass
	1DH5	2480	1.006	0.52	Pass

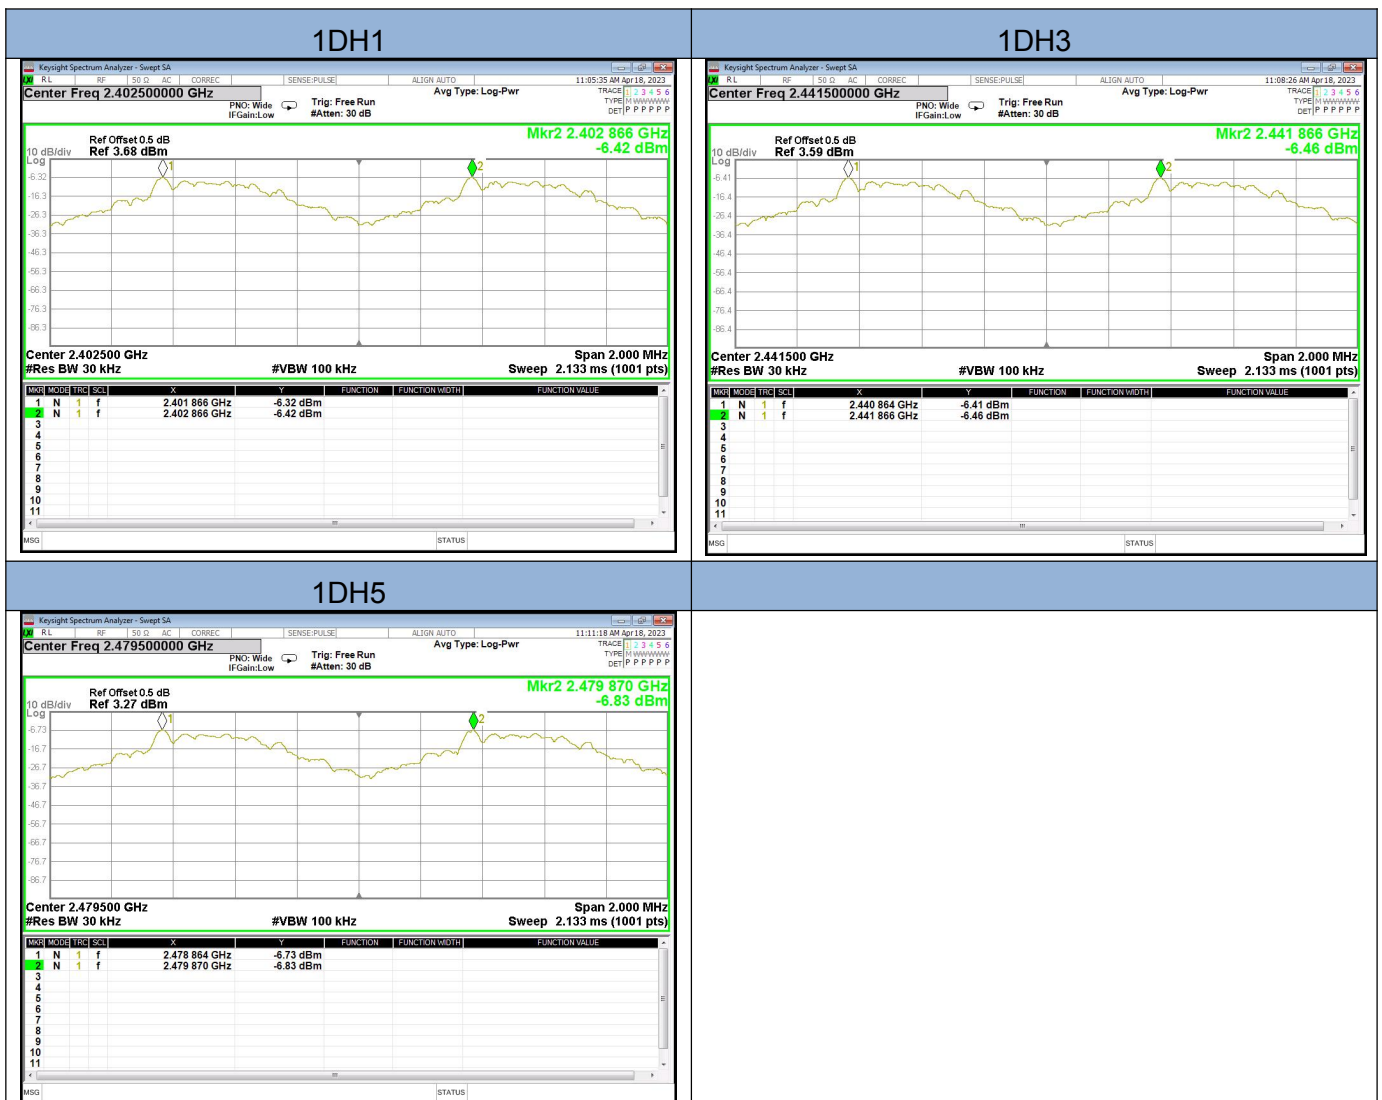

## 11. ANTENNA REQUIREMENT

### 11.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 11.2 RESULT

The antennas used for this product are Chip antenna and no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.7.dBi.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*