

TEST REPORT

Applicant Name: Bytech NY Inc.
Address: 2585 West 13th Street, Brooklyn NY 11223.USA
Report Number: 2401U34583E-RF-00A
FCC ID: 2AHN6-AUBS167

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: LED Infinity Bluetooth FM SPKR
Model No.: BY-AU-BS-167-BK
Multiple Model(s) No.: N/A
Trade Mark: BYTECH
Date Received: 2024-06-12
Issue Date: 2024-07-16

Test Result:	Pass [▲]
--------------	-------------------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Eric Huang

Eric Huang
RF Engineer

Approved By:

Michelle Zeng

Michelle Zeng
RF Supervisor

Note: The information marked[#] is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY3

GENERAL INFORMATION.....4

PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

OBJECTIVE4

TEST METHODOLOGY4

MEASUREMENT UNCERTAINTY5

TEST FACILITY5

SYSTEM TEST CONFIGURATION6

SUMMARY OF TEST RESULTS9

TEST EQUIPMENT LIST10

REQUIREMENTS AND TEST PROCEDURES11

AC LINE CONDUCTED EMISSIONS11

RADIATED EMISSIONS13

20 dB EMISSION BANDWIDTH16

CHANNEL SEPARATION TEST18

QUANTITY OF HOPPING CHANNEL TEST19

TIME OF OCCUPANCY (DWELL TIME)20

PEAK OUTPUT POWER MEASUREMENT21

BAND EDGES22

ANTENNA REQUIREMENT23

TEST DATA AND RESULTS24

AC LINE CONDUCTED EMISSIONS24

RADIATED EMISSIONS27

20 dB EMISSION BANDWIDTH41

CHANNEL SEPARATION44

NUMBER OF HOPPING FREQUENCY47

TIME OF OCCUPANCY (DWELL TIME)49

MAXIMUM CONDUCTED OUTPUT POWER52

100 kHz BANDWIDTH OF FREQUENCY BAND EDGE55

RF EXPOSURE EVALUATION58

EUT PHOTOGRAPHS59

TEST SETUP PHOTOGRAPHS60

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401U34583E-RF-00A	Original Report	2024-07-16

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

UPC number	805112128914
SKU number	9150698
Lot number	BY062024
Frequency Range	2402~2480MHz
Transmit Peak Power	2.51 dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification[#]	-0.68dBi (provided by the applicant)
Voltage Range	DC 3.7V from battery or DC 5V from USB port
Sample serial number	2MVI-1 for CE Test 2MVI-2 for Radiated Emissions Test 2MVI-3 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.207, 15.205, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.94dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)	
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 715558, the FCC Designation No.: CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
2	2404	42	2444
...
...
36	2438	75	2477
37	2439	76	2478
38	2440	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

Exercise Software [#]	sscom v5.13.1/RTL BT APP
Power Level [#]	6

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Bull	Receptacle	Unknown	Unknown
Unknown	microphone	Unknown	Unknown
Redmi	mobile phone	Unknown	Unknown
Unknown	memory card	Unknown	Unknown
Unknown	Adapter	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable DC Cable	1.0	EUT	Adapter
Detachable USB Cable	0.8	EUT	mobile phone
Detachable data cable	1.5	EUT	microphone
Un-shielding Detachable DC Cable	1.0	Receptacle	LISN/AC Mains

Block Diagram of Test Setup


For Conducted Emissions:

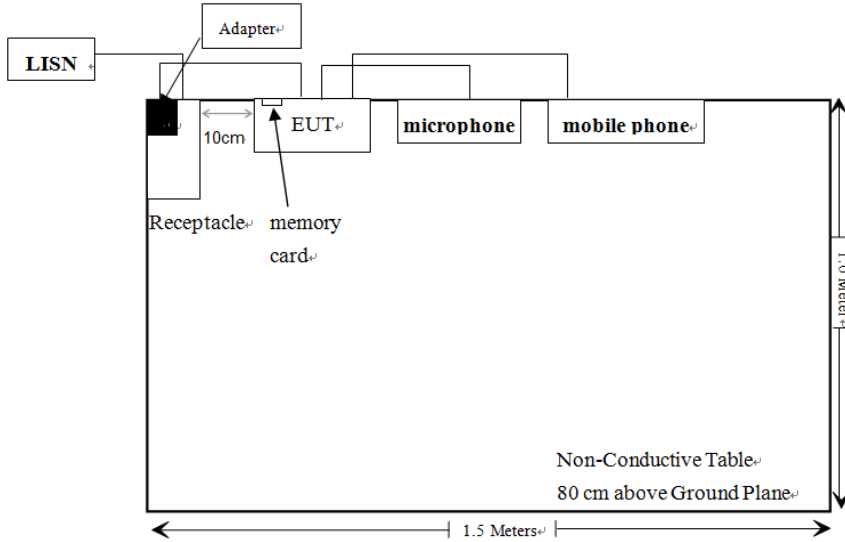

For Radiated Emissions below 1GHz:

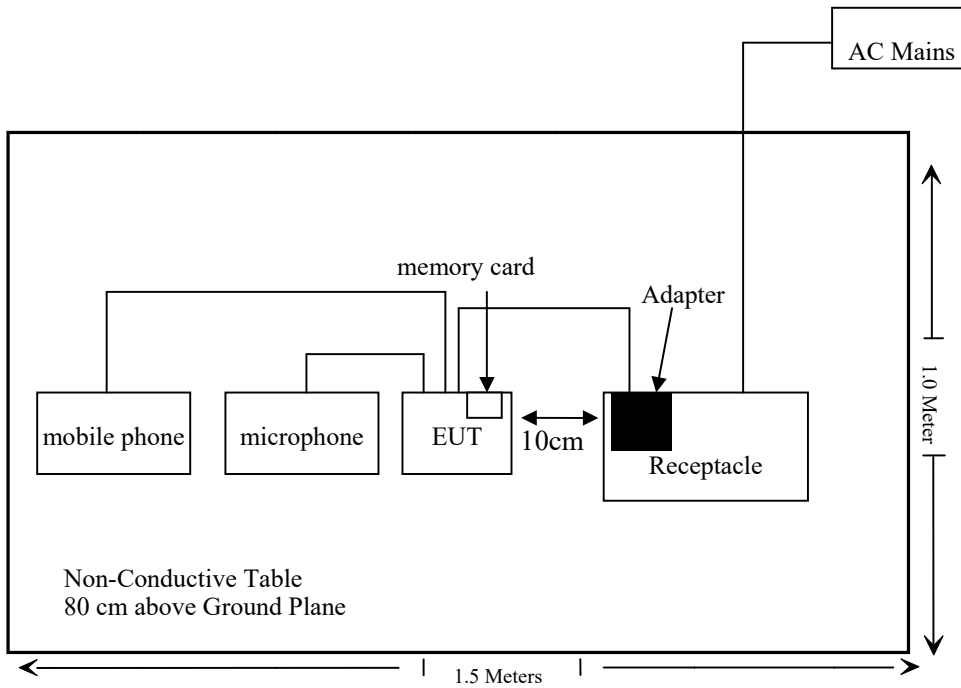

For Radiated Emissions above 1GHz:

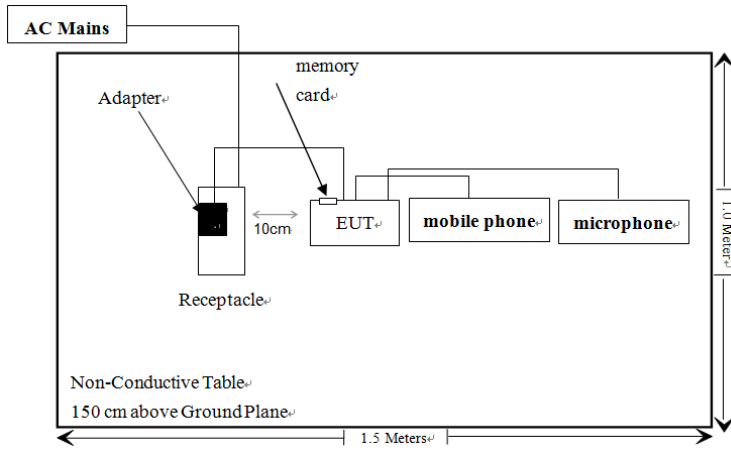

Note: the space between the Peripheral equipment is 10 cm

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	PASS
FCC §15.207(a)	AC Line Conducted Emissions	PASS
FCC §15.205, §15.209, §15.247(d)	Radiated Spurious Emission	PASS
FCC §15.247(a)(1)	20 dB Emission Bandwidth	PASS
FCC §15.247(a)(1)	Channel Separation	PASS
FCC §15.247(a)(1)(iii)	Number of Hopping Frequency	PASS
FCC §15.247(a)(1)(iii)	Time of Occupancy (dwell time)	PASS
FCC §15.247(b)(1)	Maximum Conducted Output Power	PASS
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	PASS
FCC §1.1307&§2.1091&§15.247 (i)	RF Exposure	PASS

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	XH500C	J-10M-A	2024/05/21	2025/05/20
Unknown	Cable	Chamber Cable 1	F-03-EM236	2024/05/21	2025/05/20
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	NCR	NCR
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
A.H.System	Pre-amplifier	PAM-1840VH	190	2023/08/02	2024/08/01
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyze	FSU26	200982	2023/12/18	2024/12/17
MARCONI	10dB Attenuator	6534/3	2942	2023/07/04	2024/07/03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC §15.207(a)

EUT Setup

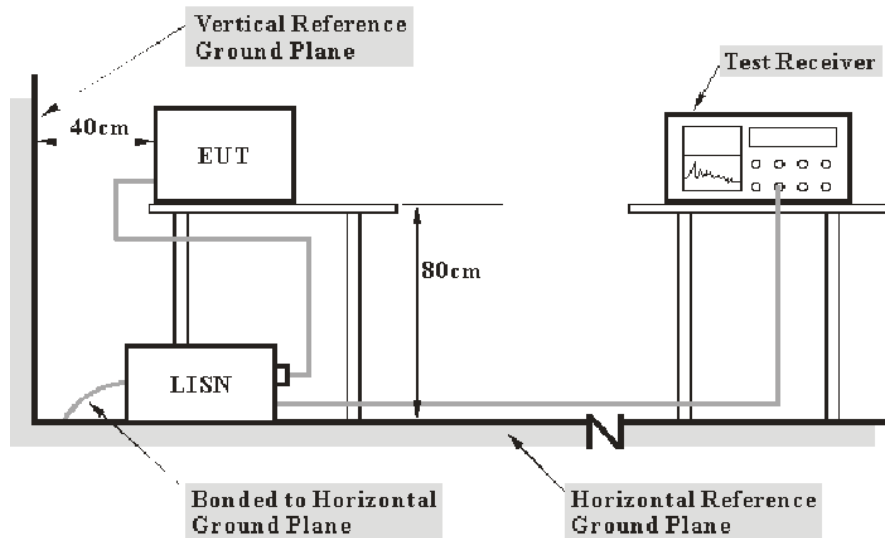

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Radiated Emissions

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup


9 kHz-30MHz:

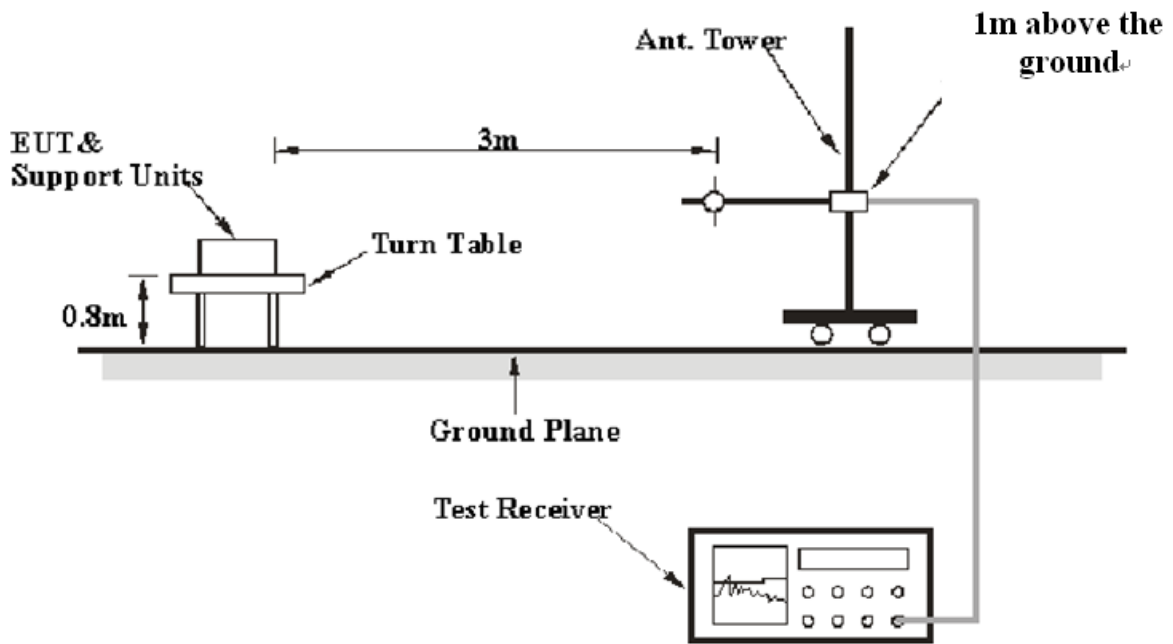

30MHz-1GHz:

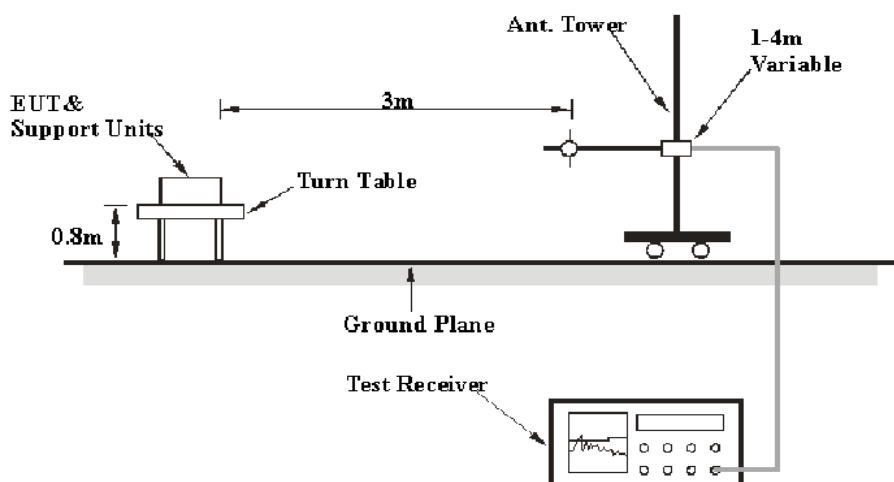

Above 1GHz:

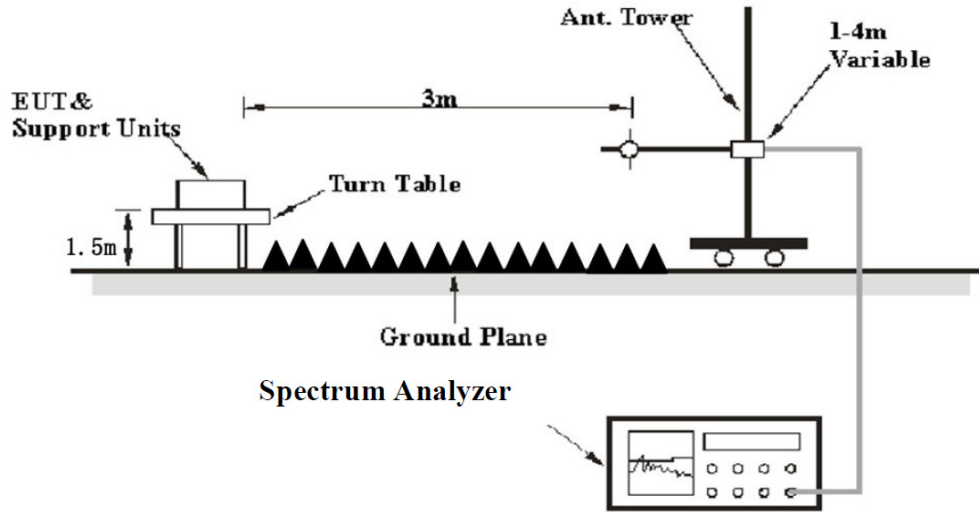

The radiated emission tests were performed in the 3meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200Hz	QP
	300Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30MHz – 1000 MHz	/	/	120kHz	QP
	100 kHz	300 kHz	/	PK
Above 1 GHz	Harmonics & Band Edge			
	1MHz	3 MHz	/	PK
	Average Emission Level=Peak Emission Level+20*log(Duty cycle)			
	Other Emissions			
	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Average

For Duty cycle measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$,

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulse, etc.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

20 dB Emission Bandwidth

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “–xx dB down” requirement; that is, if the requirement calls for measuring the –20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an un-modulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “–xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an un-modulated carrier, then turn the EUT modulation on, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

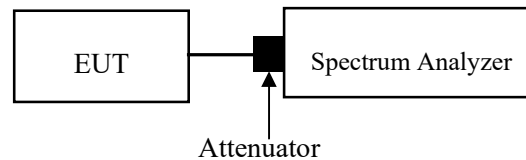

Channel Separation Test

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined.

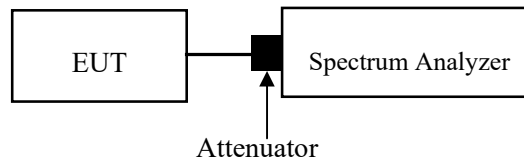

Note: The limit is $2/3 * 20$ dB bandwidth

Quantity of Hopping Channel Test

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.

It might prove necessary to break the span up into sub ranges to show clearly all of the hopping frequencies.

Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels.

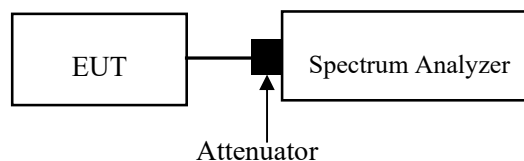

Time of Occupancy (Dwell Time)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.


Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned} & \text{(Number of hops in the period specified in the requirements)} = (\text{number of hops on spectrum analyzer}) \\ & \times (\text{period specified in the requirements} / \text{analyzer sweep time}) \end{aligned}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

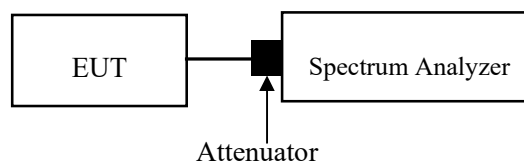

Peak Output Power Measurement

Applicable Standard


According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.

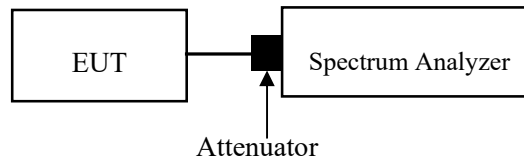

Band Edges


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

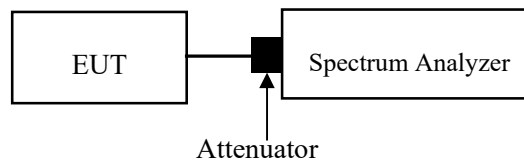

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached, the antenna gain[#] is -0.68dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

TEST DATA AND RESULTS

AC Line Conducted Emissions


Environmental Conditions

Temperature (°C)	26	Relative Humidity (%)	71
ATM Pressure (kPa)	101	Test engineer	Macy.shi
Test date	2024.6.19		
EUT operation mode	Transmitting(Maximum output power mode, EDR (8DPSK) Low Channel)		

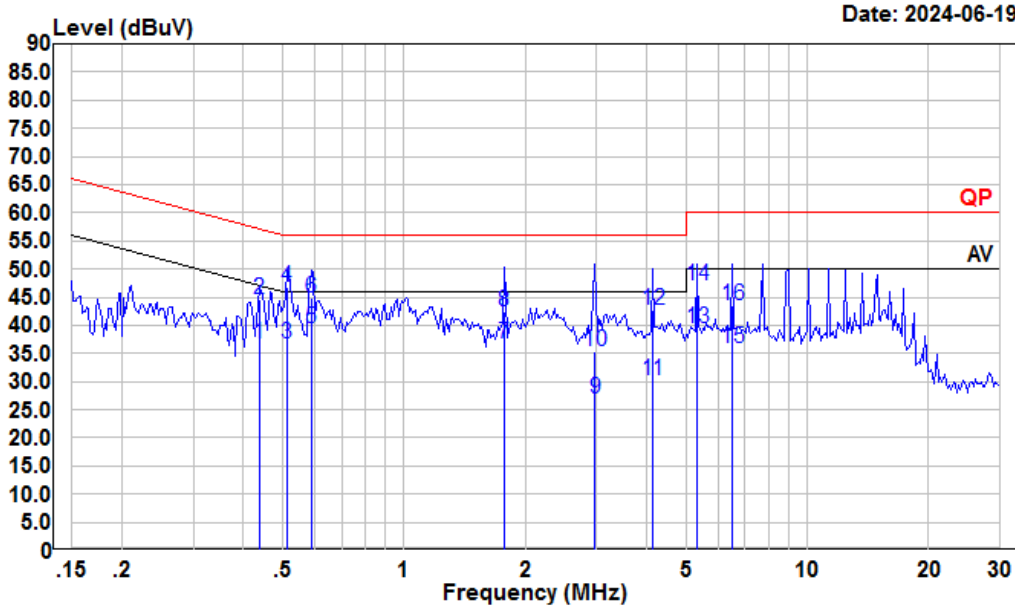

Condition: Line
 Project : 2401U34583E-RF
 tester : Macy.shi
 Note : BT

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.44	16.07	36.72	10.54	10.11	47.11	-10.39	Average
2	0.44	24.02	44.67	10.54	10.11	57.11	-12.44	QP
3	0.51	16.20	36.84	10.50	10.14	46.00	-9.16	Average
4	0.51	26.20	46.84	10.50	10.14	56.00	-9.16	QP
5	0.59	18.70	39.32	10.50	10.12	46.00	-6.68	Average
6	0.59	24.20	44.82	10.50	10.12	56.00	-11.18	QP
7	1.77	16.01	36.76	10.57	10.18	46.00	-9.24	Average
8	1.77	21.75	42.50	10.57	10.18	56.00	-13.50	QP
9	2.98	6.32	26.93	10.43	10.18	46.00	-19.07	Average
10	2.98	14.65	35.26	10.43	10.18	56.00	-20.74	QP
11	4.14	9.70	30.22	10.31	10.21	46.00	-15.78	Average
12	4.14	22.10	42.62	10.31	10.21	56.00	-13.38	QP
13	5.33	18.90	39.48	10.40	10.18	50.00	-10.52	Average
14	5.33	26.60	47.18	10.40	10.18	60.00	-12.82	QP
15	6.52	15.19	35.85	10.47	10.19	50.00	-14.15	Average
16	6.52	22.94	43.60	10.47	10.19	60.00	-16.40	QP

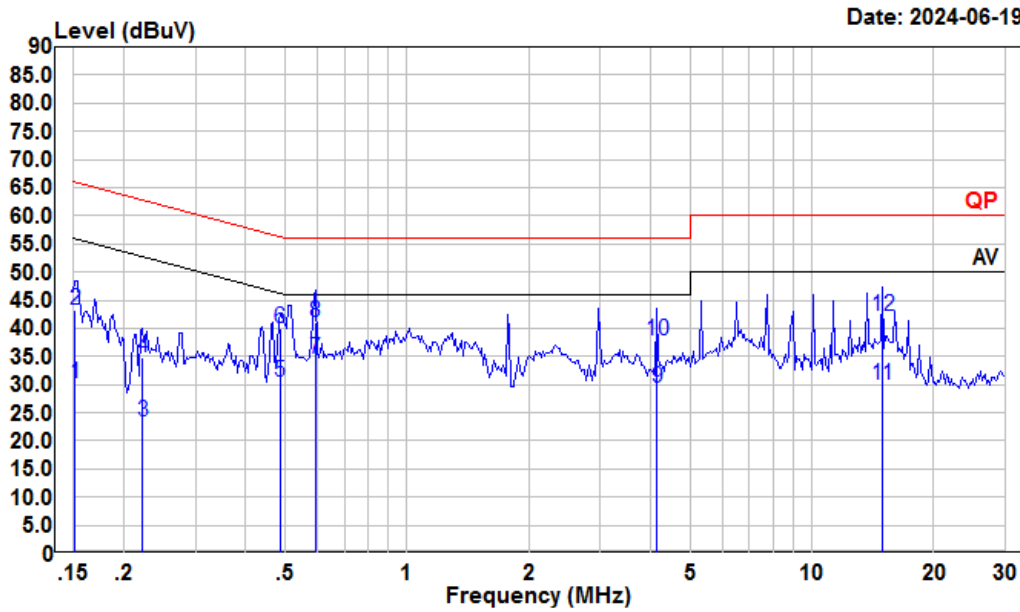

Date: 2024-06-19

Condition: Neutral
 Project : 2401U34583E-RF
 tester : Macy.shi
 Note : BT


	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	9.44	30.16	10.59	10.13	55.91	-25.75	Average
2	0.15	22.44	43.16	10.59	10.13	65.91	-22.75	QP
3	0.22	2.83	23.35	10.43	10.09	52.74	-29.39	Average
4	0.22	14.28	34.80	10.43	10.09	62.74	-27.94	QP
5	0.49	9.71	30.53	10.69	10.13	46.23	-15.70	Average
6	0.49	19.29	40.11	10.69	10.13	56.23	-16.12	QP
7	0.59	13.72	34.54	10.70	10.12	46.00	-11.46	Average
8	0.59	20.36	41.18	10.70	10.12	56.00	-14.82	QP
9	4.14	8.63	29.26	10.42	10.21	46.00	-16.74	Average
10	4.14	17.18	37.81	10.42	10.21	56.00	-18.19	QP
11	14.91	8.80	29.82	10.80	10.22	50.00	-20.18	Average
12	14.91	21.04	42.06	10.80	10.22	60.00	-17.94	QP

Radiated Emissions

Environmental Conditions


Temperature (°C)	22~25.6	Relative Humidity (%)	50~54
ATM Pressure (kPa):	101	Test engineer:	Anson Su, Sadow Tan
Test date:	2024.06.24~2024.07.03		
EUT operation mode:	Below 1GHz: Transmitting (Maximum output power mode, EDR(8DPSK), Low channel) Above 1GHz: Transmitting (Maximum output power mode, EDR(8DPSK))		
Note:	1. For the radiated spurious emission below 30MHz, the emissions are 20dB below the limit or the noise floor which are not recorded. 2. After pre-scan in the X, Y and Z axes of orientation, the worst case Z axis was recorded.		

Below 1GHz:

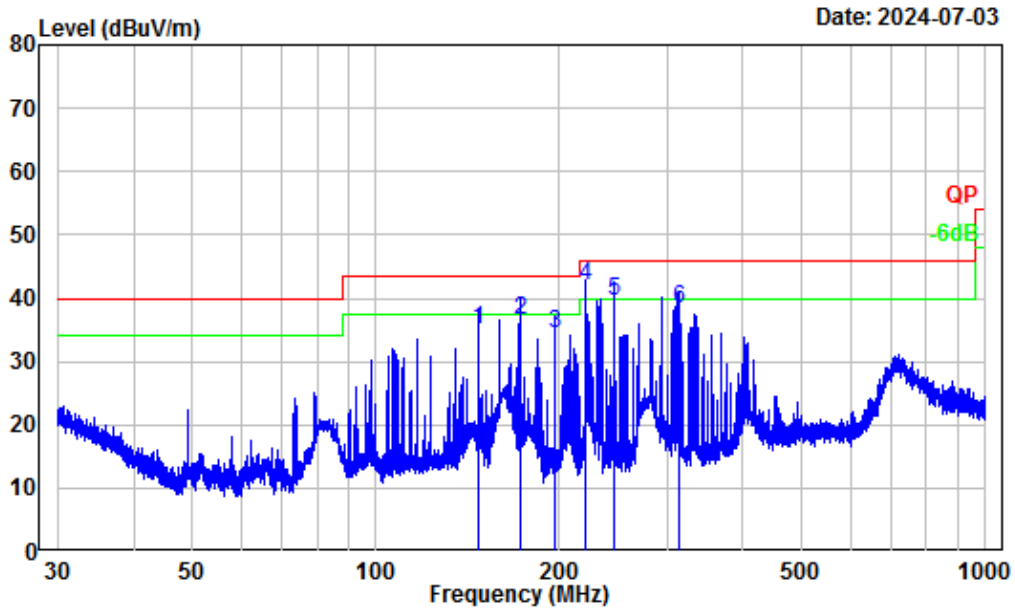

Site : Chamber A
 Condition : 3m Horizontal
 Project Number: 2401U34583E-RF
 Test Mode : BT
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	147.468	-13.34	48.36	35.02	43.50	-8.48	QP
2	172.070	-14.38	50.90	36.52	43.50	-6.98	QP
3	196.596	-13.90	48.40	34.50	43.50	-9.00	QP
4	221.198	-13.93	55.80	41.87	46.00	-4.13	QP
5	245.735	-14.44	54.10	39.66	46.00	-6.34	QP
6	314.928	-12.54	50.90	38.36	46.00	-7.64	QP

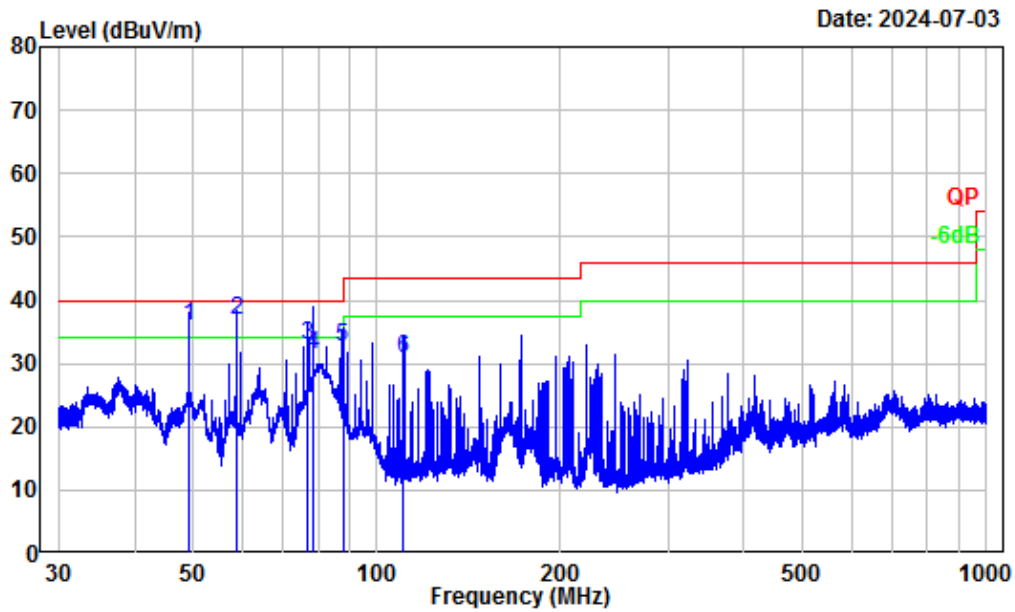

Site : Chamber A
 Condition : 3m Vertical
 Project Number: 2401U34583E-RF
 Test Mode : BT
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	49.144	-18.14	54.20	36.06	40.00	-3.94	QP
2	58.870	-18.83	55.80	36.97	40.00	-3.03	QP
3	76.781	-18.70	51.60	32.90	40.00	-7.10	QP
4	78.517	-18.71	50.10	31.39	40.00	-8.61	QP
5	87.879	-18.86	51.60	32.74	40.00	-7.26	QP
6	110.085	-14.26	45.20	30.94	43.50	-12.56	QP

Above 1GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	PK/Ave					
8DPSK							
Low Channel							
2386.24	54.32	PK	H	-2.93	51.39	74	-22.61
2354.17	54.15	PK	V	-2.93	51.22	74	-22.78
4804.00	63.23	PK	H	1.69	64.92	74	-9.08
4804.00	61.63	PK	V	1.69	63.32	74	-10.68
Middle Channel							
4882.00	67.72	PK	H	1.69	69.41	74	-4.59
4882.00	66.40	PK	V	1.69	68.09	74	-5.91
High Channel							
2483.66	61.37	PK	H	-3.17	58.20	74	-15.80
2483.60	55.27	PK	V	-3.17	52.10	74	-21.90
4960.00	69.84	PK	H	2.77	72.61	74	-1.39
4960.00	68.40	PK	V	2.77	71.17	74	-2.83

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude/Level = Factor + Reading

Margin = Corrected Amplitude/Level - Limit

The other spurious emission which is in the noise floor level was not recorded.

Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dBµV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Average Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
Low Channel							
2386.24	51.39	H	-24.73	26.66	54	-27.34	Bandedge
2354.17	51.22	V	-24.73	26.49	54	-27.51	Bandedge
4804.00	64.92	H	-24.73	40.19	54	-13.81	Harmonic
4804.00	63.32	V	-24.73	38.59	54	-15.41	Harmonic
Middle Channel							
4882.00	69.41	H	-24.73	44.68	54	-9.32	Harmonic
4882.00	68.09	V	-24.73	43.36	54	-10.64	Harmonic
High Channel							
2483.66	58.20	H	-24.73	33.47	54	-20.53	Bandedge
2483.60	52.10	V	-24.73	27.37	54	-26.63	Bandedge
4960.00	72.61	H	-24.73	47.88	54	-6.12	Harmonic
4960.00	71.17	V	-24.73	46.44	54	-7.56	Harmonic


Note: Average level= Peak level + Duty Cycle Corrected Factor
 Margin = Average level- Limit

Worst case duty cycle:


Duty cycle = Ton/100ms = 2.899*2/100=0.05798

Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.05798 = -24.73


**Duty Cycle
(100ms)**

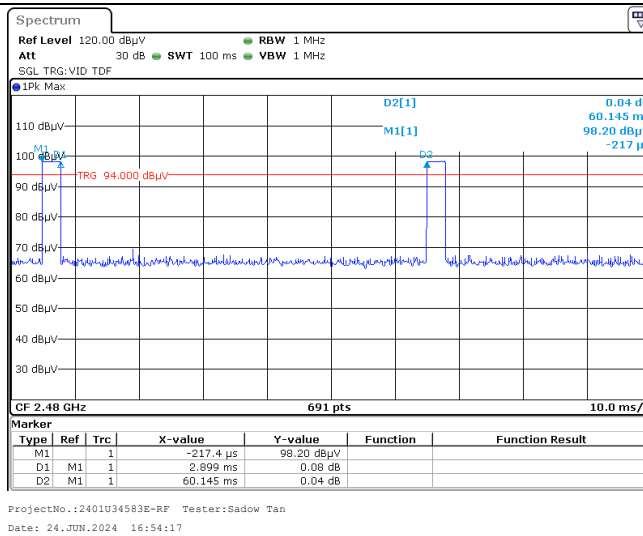

**Duty Cycle
(1s)**

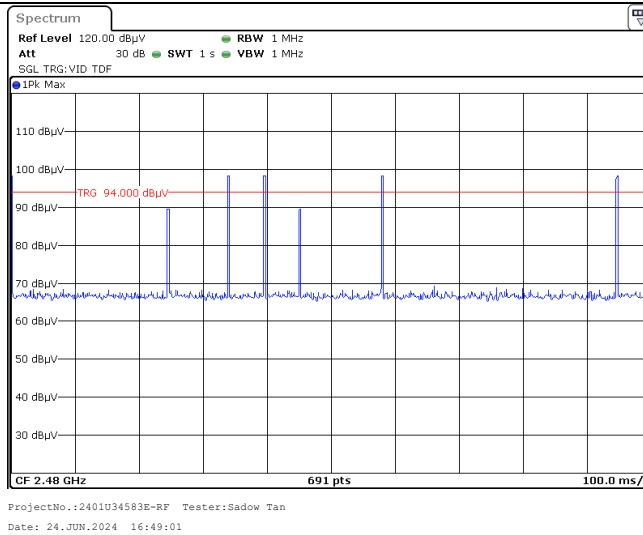


Test plots

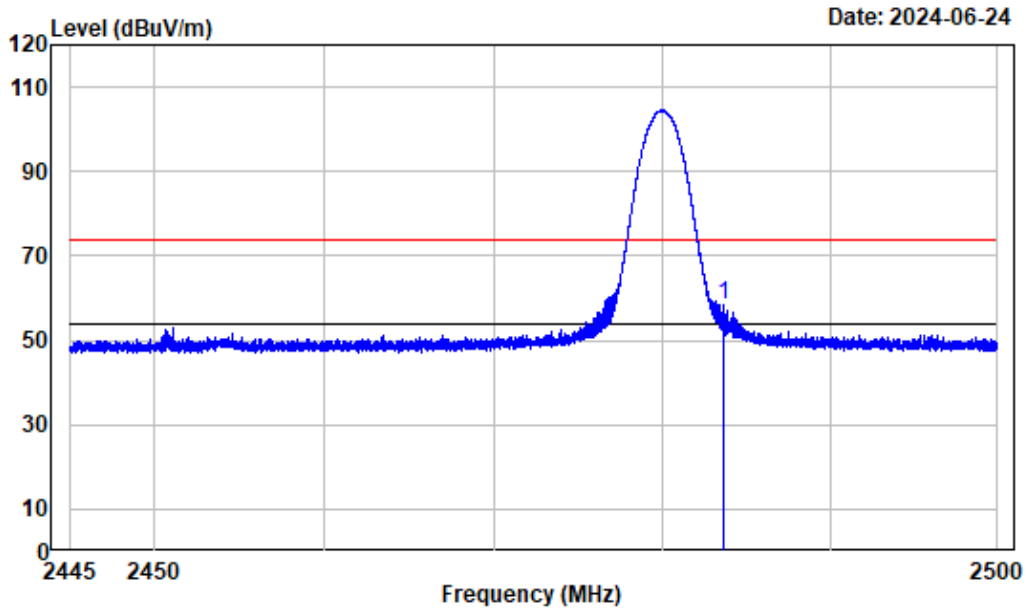


Condition : Horizontal
 Project No.: 2401U34583E-RF
 Tester : Sadow Tan
 Note : BT_2480

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.658	-3.17	61.37	58.20	74.00	-15.80	peak

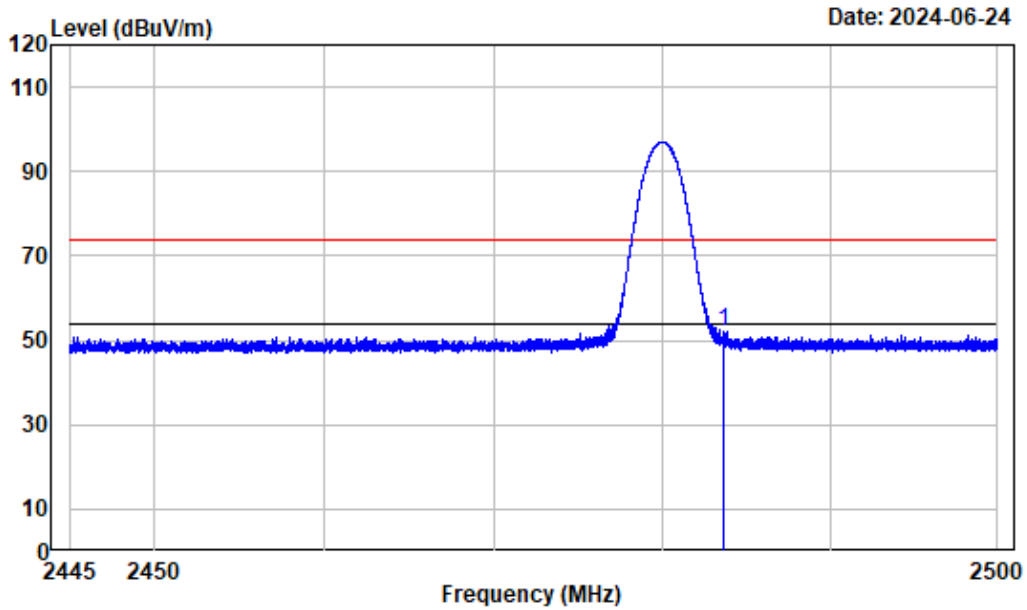


Condition : Vertical
 Project No.: 2401U34583E-RF
 Tester : Sadow Tan
 Note : BT_2480

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2483.603	-3.17	55.27	52.10	74.00	-21.90 peak

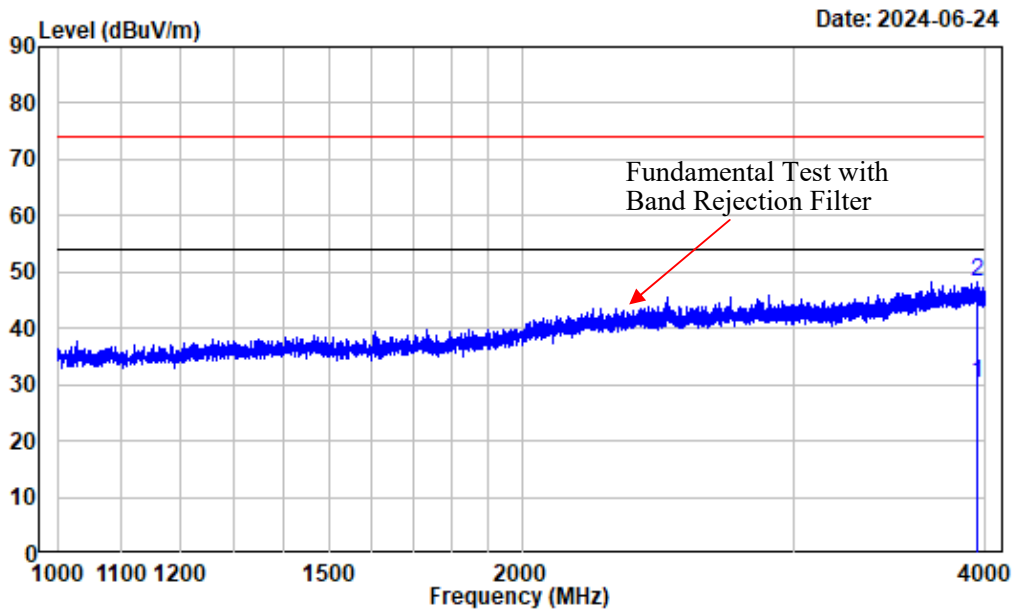


Condition : Horizontal
 Project No.: 2401U34583E-RF
 Tester : Sadow Tan
 Note : BT_2480

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	3947.500	-0.20	30.59	30.39	54.00	-23.61 Average
2	3947.500	-0.20	48.33	48.13	74.00	-25.87 Peak

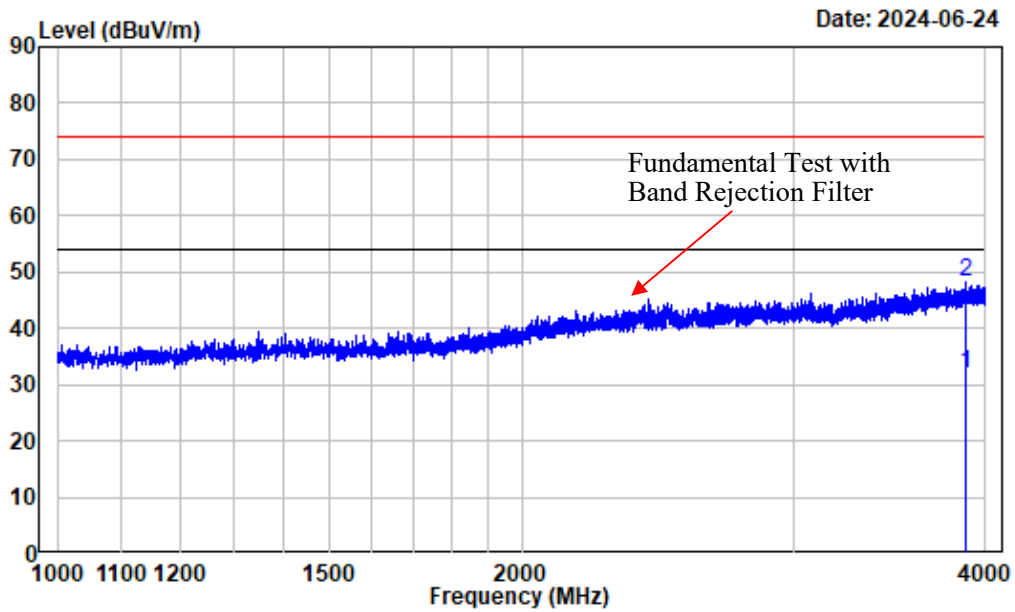


Condition : Vertical
 Project No.: 2401U34583E-RF
 Tester : Sadow Tan
 Note : BT_2480

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3888.250	-0.59	32.47	31.88	54.00	-22.12	Average
2	3888.250	-0.59	48.92	48.33	74.00	-25.67	Peak

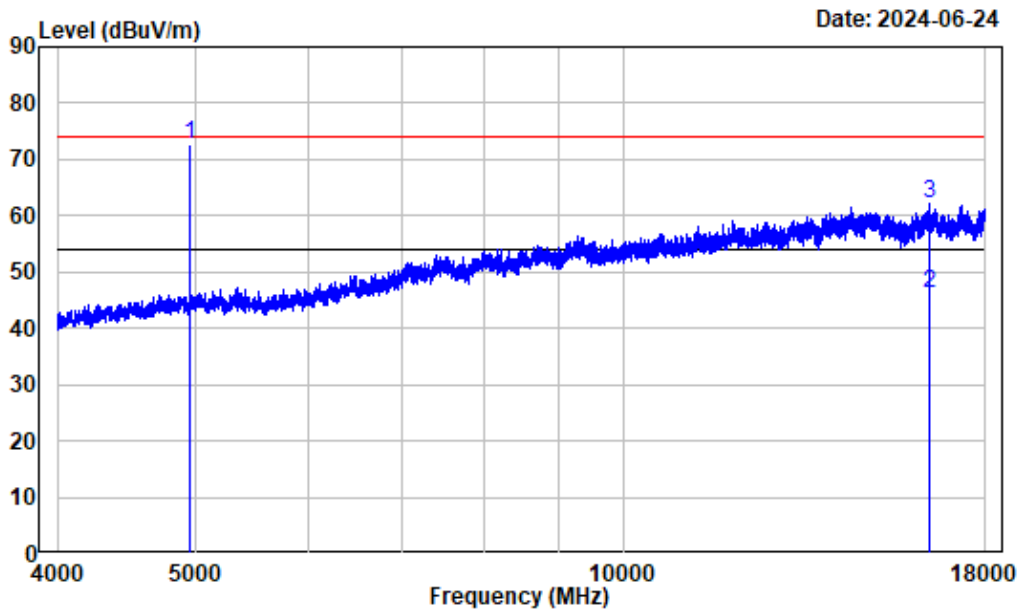


Condition : Horizontal
 Project No.: 2401U34583E-RF
 Tester : Sadow Tan
 Note : BT_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4960.000	2.77	69.84	72.61	74.00	-1.39	Peak
2	16454.750	15.59	30.46	46.05	54.00	-7.95	Average
3	16454.750	15.59	46.57	62.16	74.00	-11.84	Peak

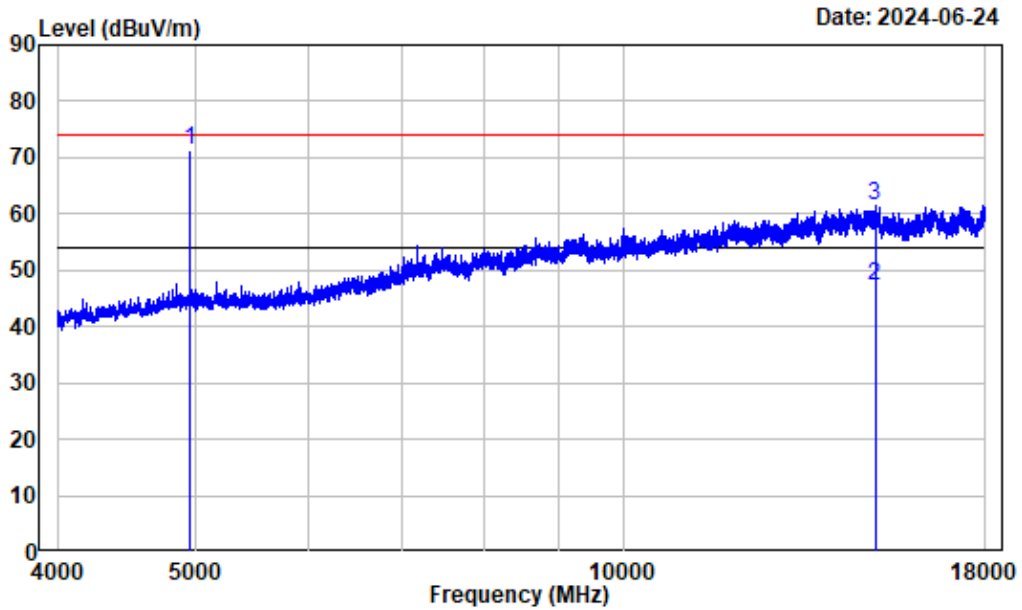


Condition : Vertical
 Project No.: 2401U34583E-RF
 Tester : Sadow Tan
 Note : BT_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4960.000	2.77	68.40	71.17	74.00	-2.83	Peak
2	15051.250	16.08	31.04	47.12	54.00	-6.88	Average
3	15051.250	16.08	45.38	61.46	74.00	-12.54	Peak

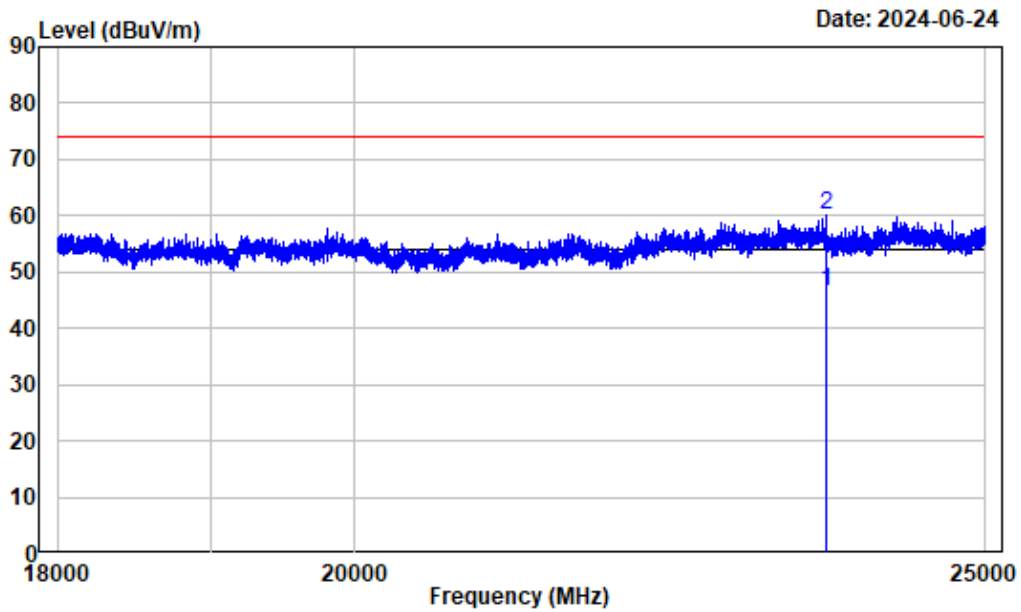

Condition : Horizontal
 Project No.: 2401U34583E-RF
 Tester : Sadow Tan
 Note : BT_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	23631.500	17.55	29.02	46.57	54.00	-7.43	Average
2	23631.500	17.55	42.49	60.04	74.00	-13.96	peak

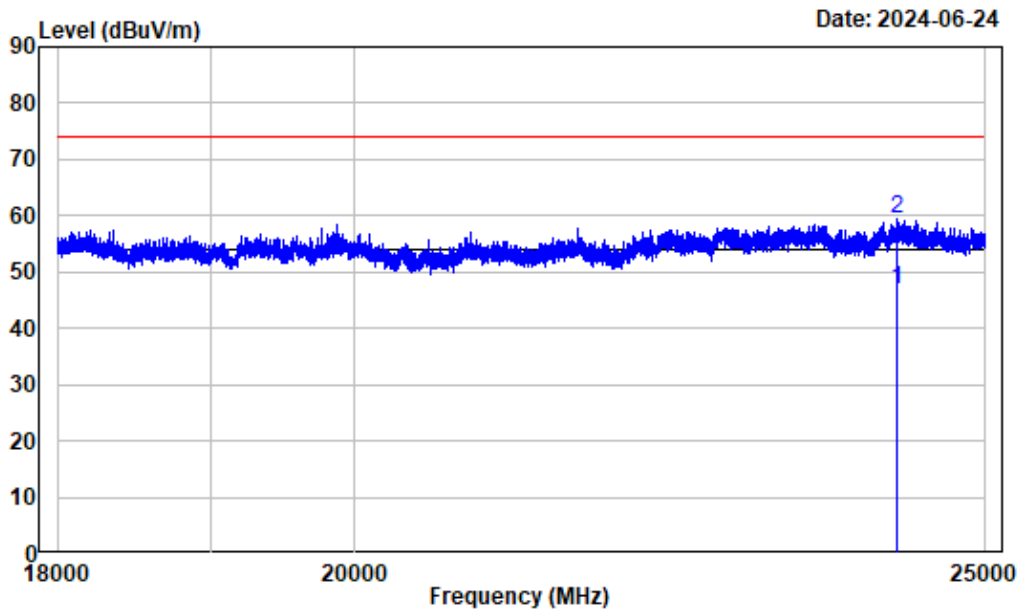

Condition : Vertical
 Project No.: 2401U34583E-RF
 Tester : Sadow Tan
 Note : BT_2480

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	24234.380	18.37	28.41	46.78	54.00	-7.22	Average
2	24234.380	18.37	41.05	59.42	74.00	-14.58	peak

20 dB Emission Bandwidth

Test Information:

Serial No.:	2MVI-1	Test Date:	2024/06/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rainbow Zhu	Test Result:	N/A

Environmental Conditions:

Temperature: (°C):	26	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101
------------------------------	----	----------------------------------	----	-------------------------------	-----

BDR


Mode	Value (MHz)
GFSK_Low	0.902
GFSK_Middle	0.902
GFSK_High	0.902

EDR

Mode	Value (MHz)
$\pi/4$ -DQPSK_Low	1.280
$\pi/4$ -DQPSK_Middle	1.289
$\pi/4$ -DQPSK_High	1.295
8DPSK_Low	1.271
8DPSK_Middle	1.277
8DPSK_High	1.277


BDR

GFSK_Low 0.902MHz

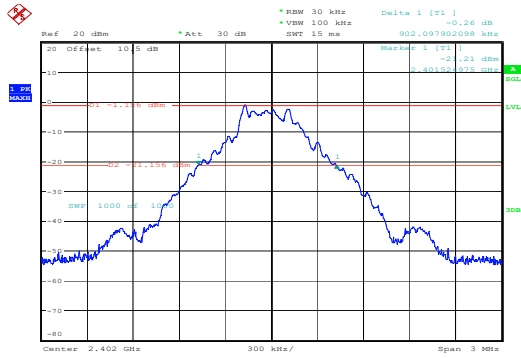

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:02:52


GFSK_Middle 0.902MHz

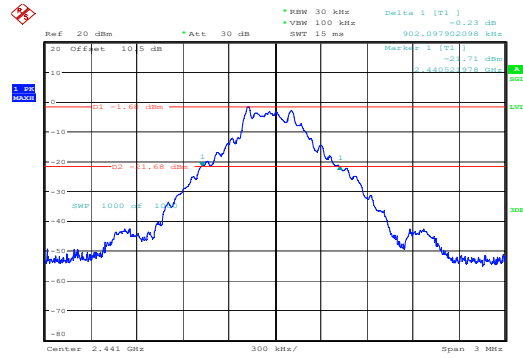

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:03:42


EDR

GFSK_High 0.902MHz

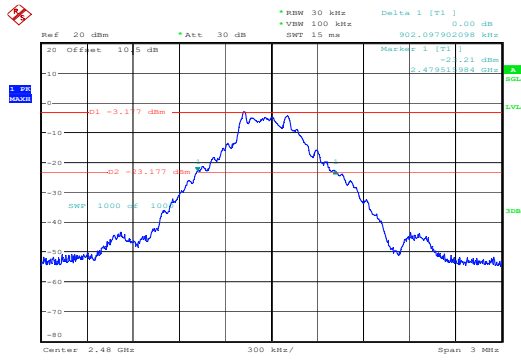


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:04:28

$\pi/4$ -DQPSK_Low 1.280MHz

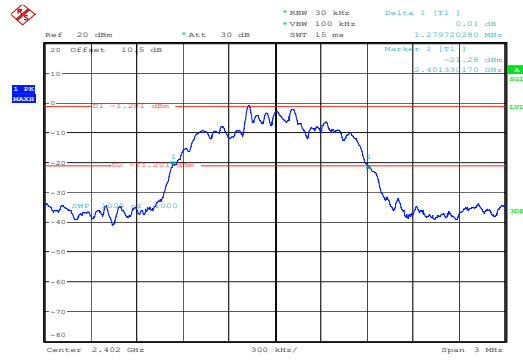


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:05:25

$\pi/4$ -DQPSK_Middle 1.289MHz

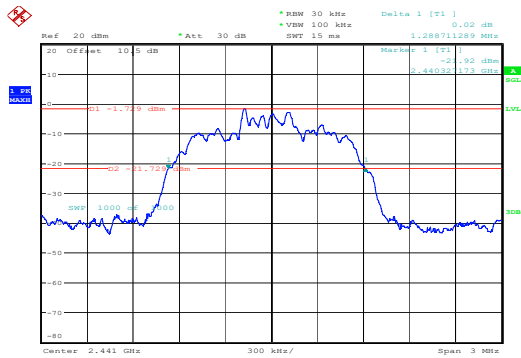


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:06:17

$\pi/4$ -DQPSK_High 1.295MHz

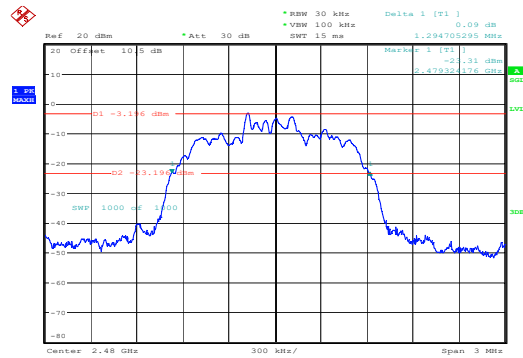


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:07:04

8DPSK_Low 1.271MHz

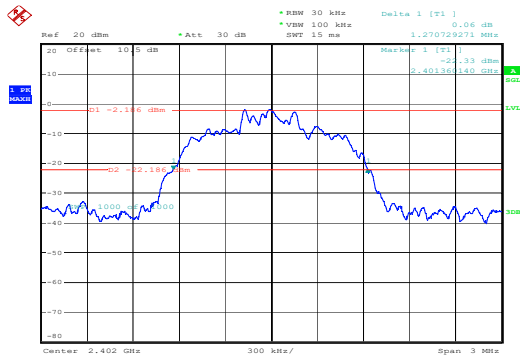


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:07:59

8DPSK_Middle 1.277MHz

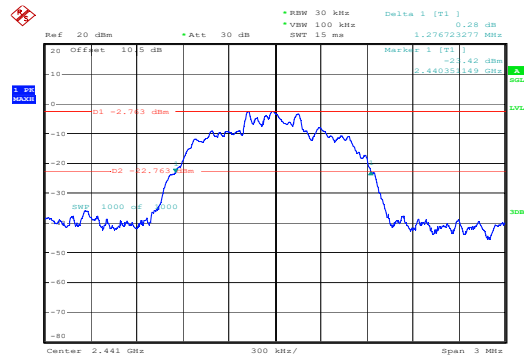

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:08:10

8DPSK_High 1.277MHz

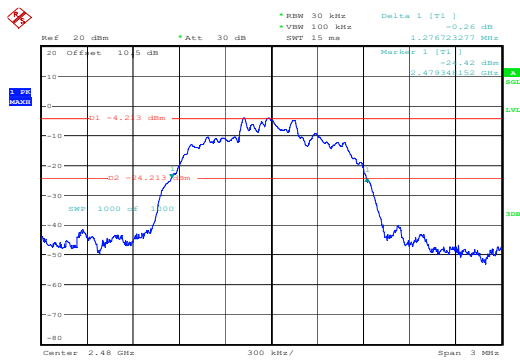

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:09:42

Channel Separation

Test Information:

Serial No.:	2MVI-1	Test Date:	2024/06/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rainbow Zhu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	26	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101
------------------------------	----	----------------------------------	----	-------------------------------	-----

BDR


Mode	Value (MHz)	Limit (MHz)	Result
GFSK_Low	1.001	0.601	Pass
GFSK_Middle	1.001	0.601	Pass
GFSK_High	1.004	0.601	Pass

EDR

Mode	Value (MHz)	Limit (MHz)	Result
$\pi/4$ -DQPSK_Low	1.001	0.853	Pass
$\pi/4$ -DQPSK_Middle	1.004	0.859	Pass
$\pi/4$ -DQPSK_High	1.001	0.863	Pass
8DPSK_Low	1.001	0.847	Pass
8DPSK_Middle	1.004	0.851	Pass
8DPSK_High	1.004	0.851	Pass


BDR

GFSK_Low 1.001MHz

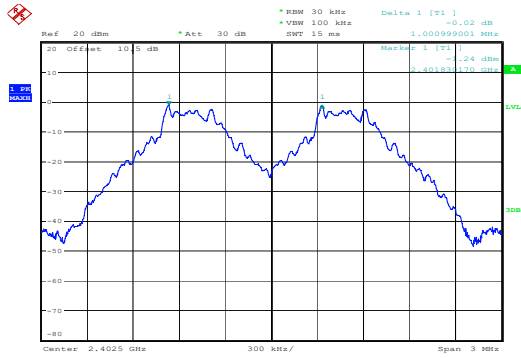

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:23:25


GFSK_Middle 1.001MHz

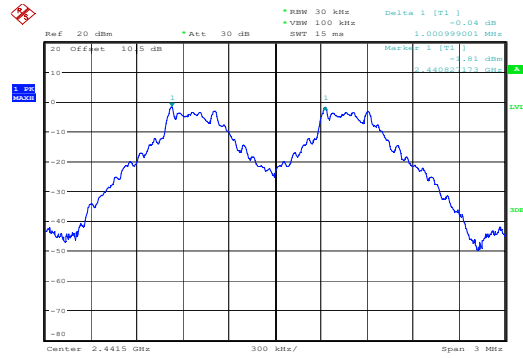

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:24:55


EDR

GFSK_High 1.004MHz

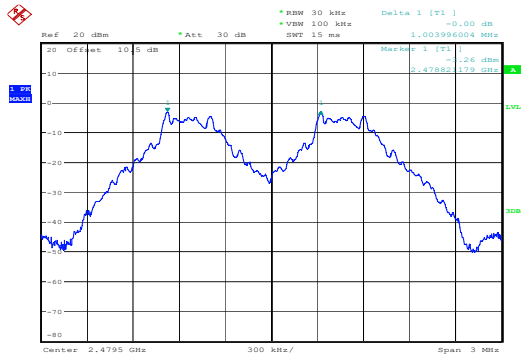


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:26:29

$\pi/4$ -DQPSK_Low 1.001MHz

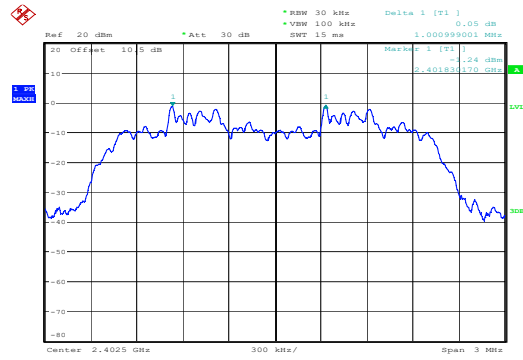


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:27:33

$\pi/4$ -DQPSK_Middle 1.004MHz

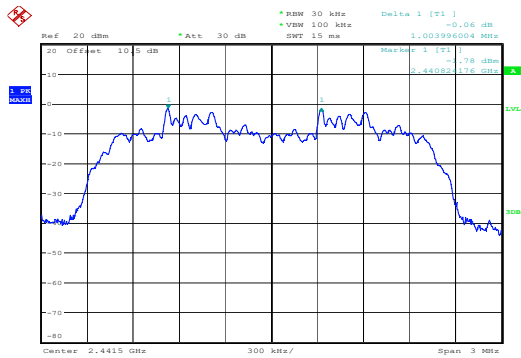


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:28:35

$\pi/4$ -DQPSK_High 1.001MHz

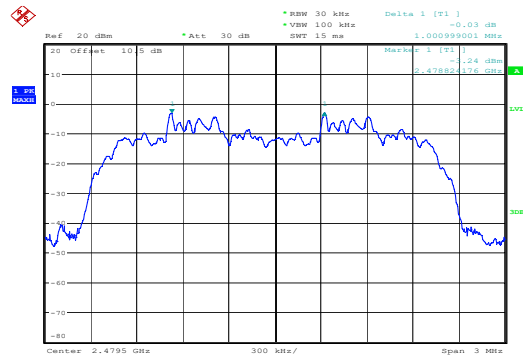


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 14:29:51

8DPSK_Low 1.001MHz

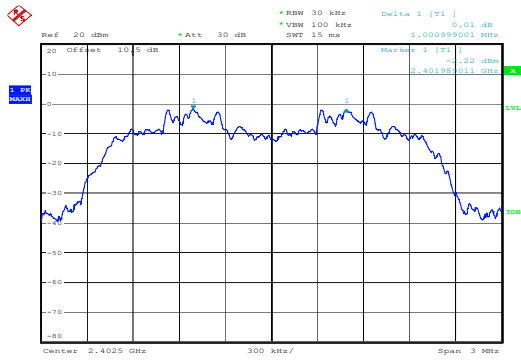


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:30:50

8DPSK_Middle 1.004MHz

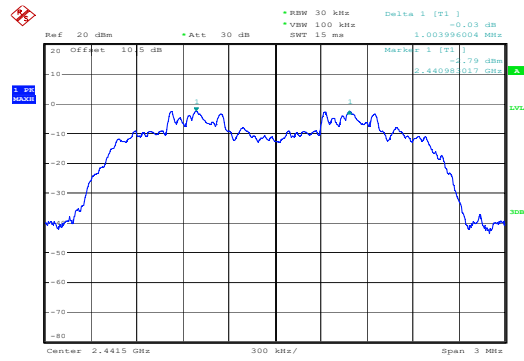

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:32:21

8DPSK_High 1.004MHz

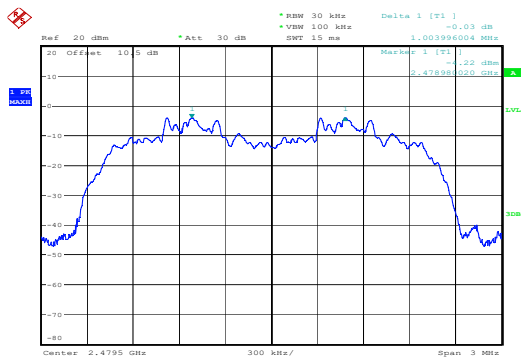

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:34:48

Number of Hopping Frequency

Test Information:

Serial No.:	2MVI-1	Test Date:	2024/06/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rainbow Zhu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	26	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101
------------------------------	----	----------------------------------	----	-------------------------------	-----

BDR


Mode	Value	Limit	Result
GFSK_Hopping	79	15	Pass

EDR

Mode	Value	Limit	Result
$\pi/4$ -DQPSK_Hopping	79	15	Pass
8DPSK_Hopping	79	15	Pass

BDR


GFSK_Hopping 79

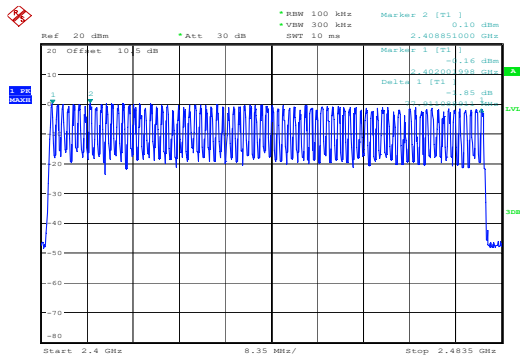

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:38:32


EDR

$\pi/4$ -DQPSK_Hopping 79

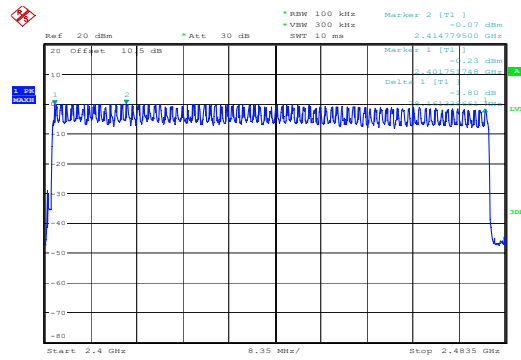

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:45:26

8DPSK_Hopping 79

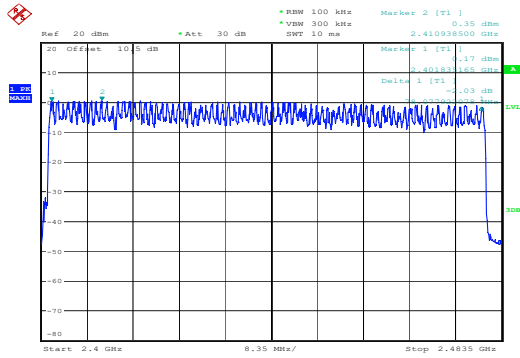

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:49:06

Time of Occupancy (dwell time)

Test Information:

Serial No.:	2MVI-1	Test Date:	2024/06/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rainbow Zhu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	26	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101
------------------------------	----	----------------------------------	----	-------------------------------	-----

BDR

Mode	Pulse time (ms)	Dwell time (s)	Limit (s)	Result
GFSK_Hopping_DH1	0.422	0.135	0.400	Pass
GFSK_Hopping_DH3	1.684	0.269	0.400	Pass
GFSK_Hopping_DH5	2.957	0.315	0.400	Pass

EDR


Mode	Pulse time (ms)	Dwell time (s)	Limit (s)	Result
$\pi/4$ -DQPSK_Hopping_2DH1	0.431	0.138	0.400	Pass
$\pi/4$ -DQPSK_Hopping_2DH3	1.693	0.271	0.400	Pass
$\pi/4$ -DQPSK_Hopping_2DH5	2.962	0.316	0.400	Pass
8DPSK_Hopping_3DH1	0.433	0.139	0.400	Pass
8DPSK_Hopping_3DH3	1.690	0.270	0.400	Pass
8DPSK_Hopping_3DH5	2.962	0.316	0.400	Pass

Note:

- DH1: Dwell time = Pulse time (ms) × (1600/2/79) × 31.6 s
- DH3: Dwell time = Pulse time (ms) × (1600/4/79) × 31.6 s
- DH5: Dwell time = Pulse time (ms) × (1600/6/79) × 31.6 s
- 2DH1: Dwell time = Pulse time (ms) × (1600/2/79) × 31.6 s
- 2DH3: Dwell time = Pulse time (ms) × (1600/4/79) × 31.6 s
- 2DH5: Dwell time = Pulse time (ms) × (1600/6/79) × 31.6 s
- 3DH1: Dwell time = Pulse time (ms) × (1600/2/79) × 31.6 s
- 3DH3: Dwell time = Pulse time (ms) × (1600/4/79) × 31.6 s
- 3DH5: Dwell time = Pulse time (ms) × (1600/6/79) × 31.6 s


BDR

GFSK_Hopping_DH1 0.422ms

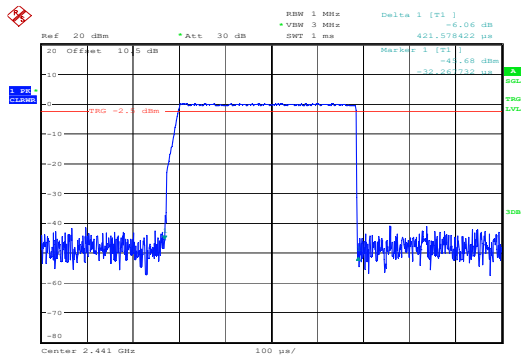

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:56:15


GFSK_Hopping_DH3 1.684ms

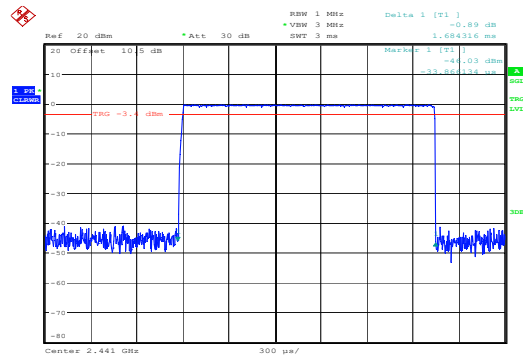

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:57:05


EDR

GFSK_Hopping_DH5 2.957ms

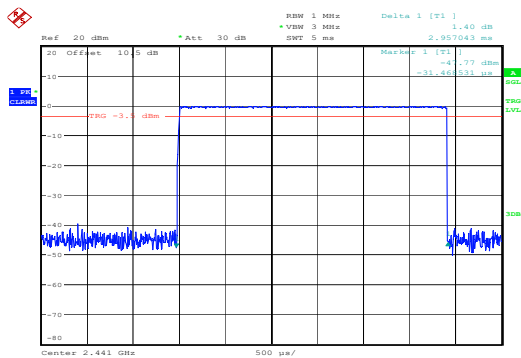


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:57:12

$\pi/4$ -DQPSK_Hopping_2DH1 0.431ms

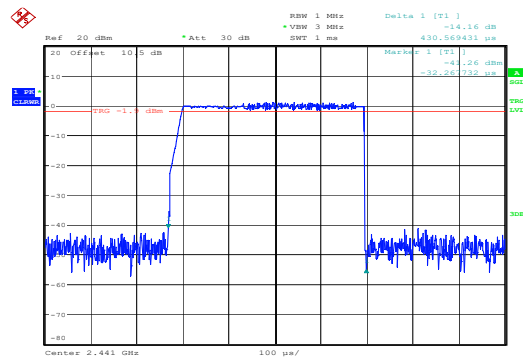


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:58:40

$\pi/4$ -DQPSK_Hopping_2DH3 1.693ms

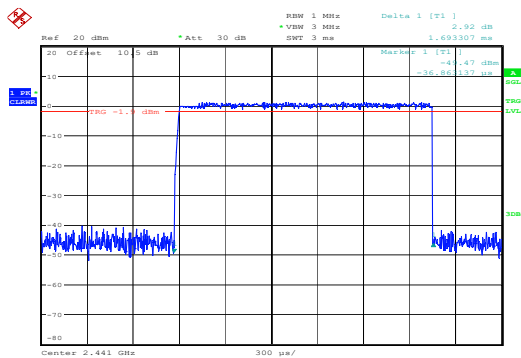


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 14:59:29

$\pi/4$ -DQPSK_Hopping_2DH5 2.962ms

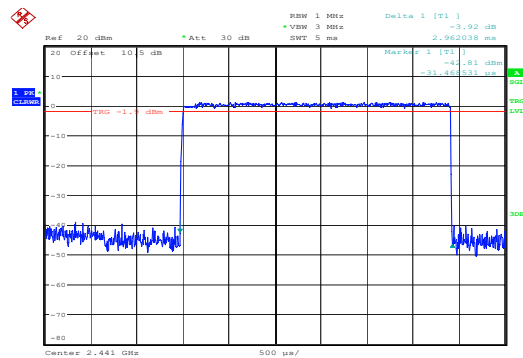


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 15:00:14

8DPSK_Hopping_3DH1 0.433ms

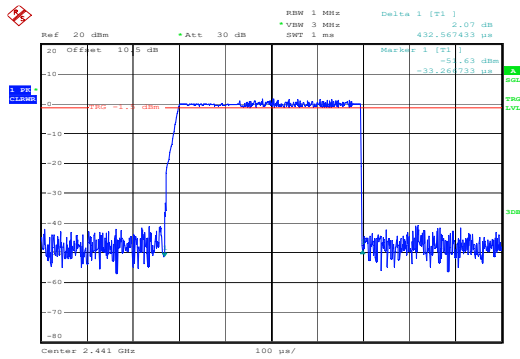


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 15:00:59

8DPSK_Hopping_3DH3 1.690ms

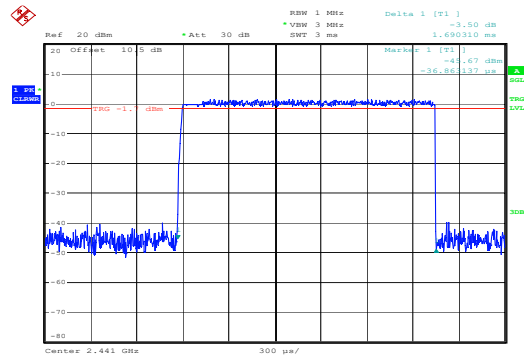

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 15:06:33

8DPSK_Hopping_3DH5 2.962ms

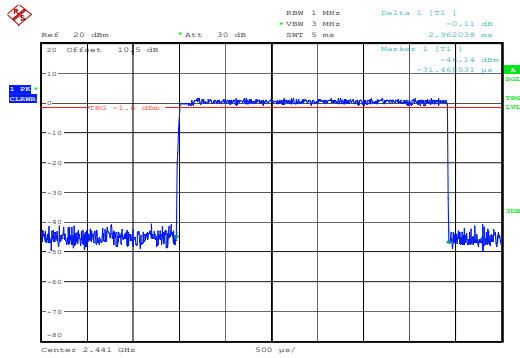

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 15:02:32

Maximum Conducted Output Power

Test Information:

Serial No.:	2MVI-1	Test Date:	2024/06/19~2024/07/09
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rainbow Zhu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	24~26	Relative Humidity: (%)	55~56	ATM Pressure: (kPa)	101
------------------------------	-------	----------------------------------	-------	-------------------------------	-----

BDR


Mode	Value (dBm)	Limit (dBm)	Result
GFSK_Low	2.10	21.00	Pass
GFSK_Middle	0.84	21.00	Pass
GFSK_High	-0.86	21.00	Pass

EDR

Mode	Value (dBm)	Limit (dBm)	Result
$\pi/4$ -DQPSK_Low	1.98	21.00	Pass
$\pi/4$ -DQPSK_Middle	1.54	21.00	Pass
$\pi/4$ -DQPSK_High	0.41	21.00	Pass
8DPSK_Low	2.51	21.00	Pass
8DPSK_Middle	2.37	21.00	Pass
8DPSK_High	1.56	21.00	Pass


BDR

GFSK_Low2.10dBm

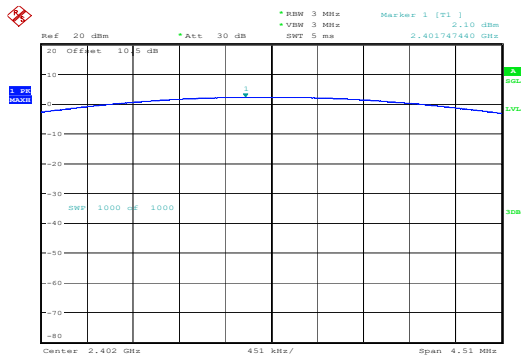

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 9.JUL.2024 10:52:55


GFSK_Middle0.84dBm

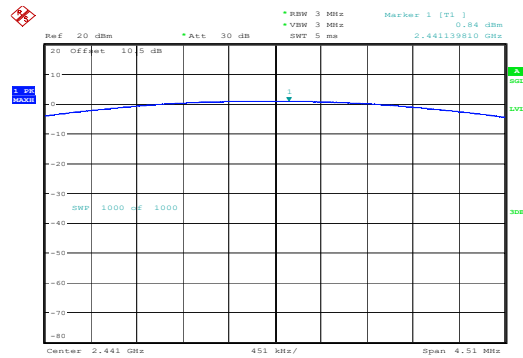

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 9.JUL.2024 10:53:39


EDR

GFSK_High -0.86dBm

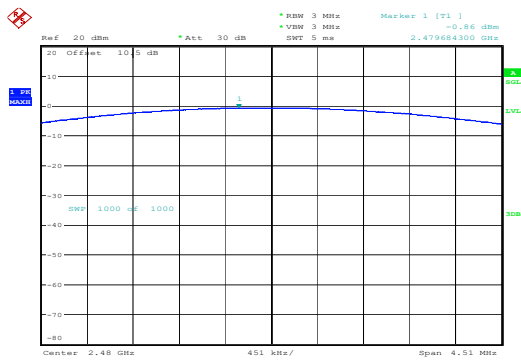


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 9.JUL.2024 10:54:10

$\pi/4$ -DQPSK_Low 1.98dBm

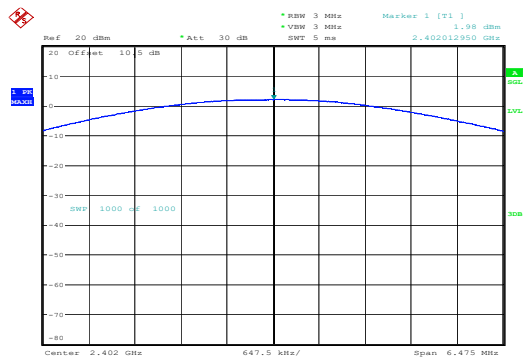


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 15:10:53

$\pi/4$ -DQPSK_Middle 1.54dBm

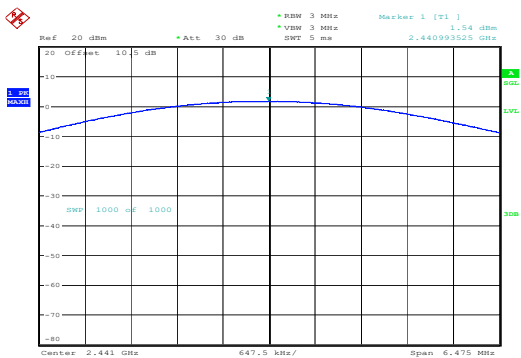


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 15:11:34

$\pi/4$ -DQPSK_High 0.41dBm

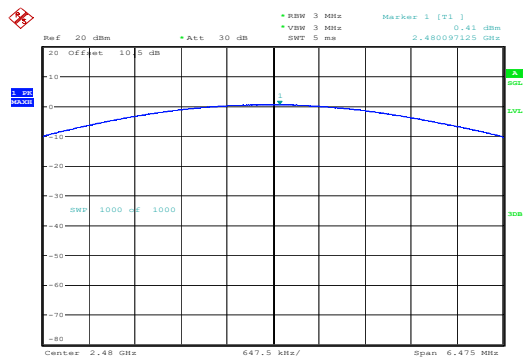


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 15:12:12

8DPSK_Low 2.51dBm

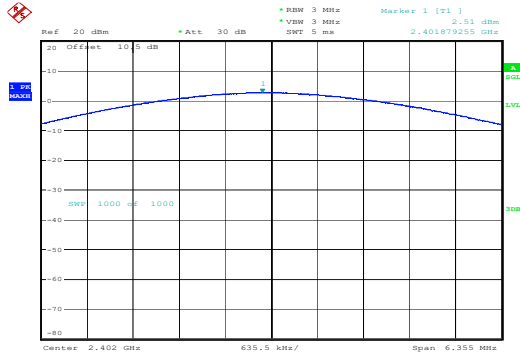


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 15:12:53

8DPSK_Middle 2.37dBm

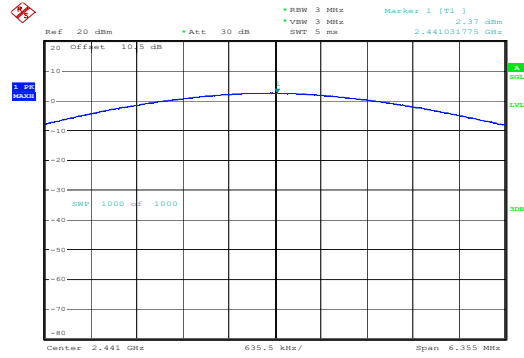

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 15:13:35

8DPSK_High 1.56dBm

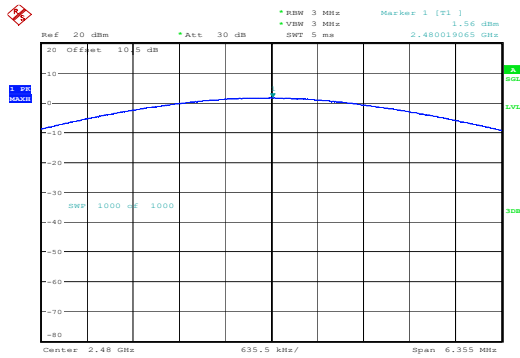

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19.JUN.2024 15:14:15

100 kHz Bandwidth of Frequency Band Edge**Test Information:**


Serial No.:	2MVI-1	Test Date:	2024/06/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rainbow Zhu	Test Result:	Pass

Environmental Conditions:


Temperature: (°C):	26	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101
------------------------------	----	----------------------------------	----	-------------------------------	-----

BDR

GFSK_Low

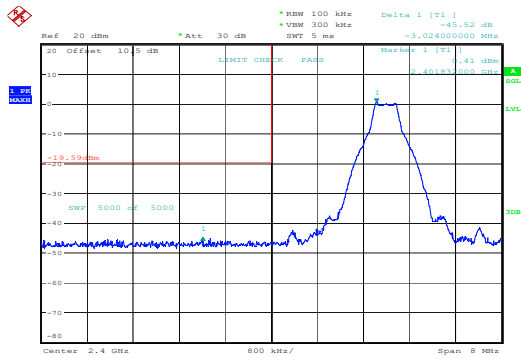


GFSK_High

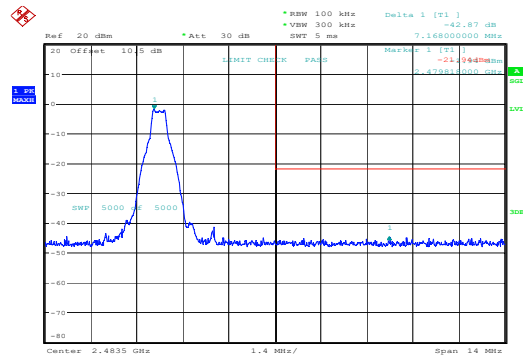


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 15:21:05

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 15:48:10

GFSK_Hopping_Lower

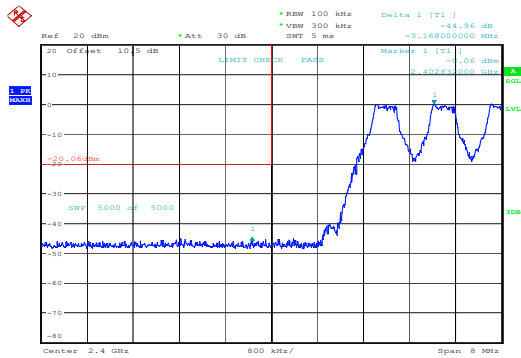

GFSK_Hopping_Upper

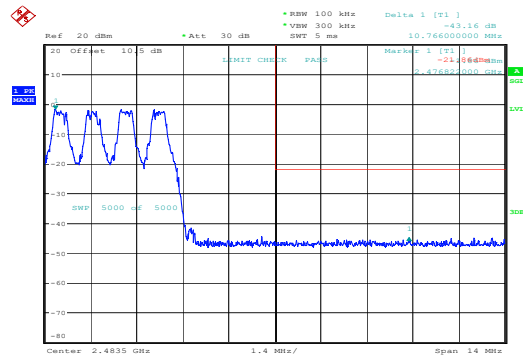


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 15:34:49


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 15:41:23

EDR

$\pi/4$ -DQPSK_Low

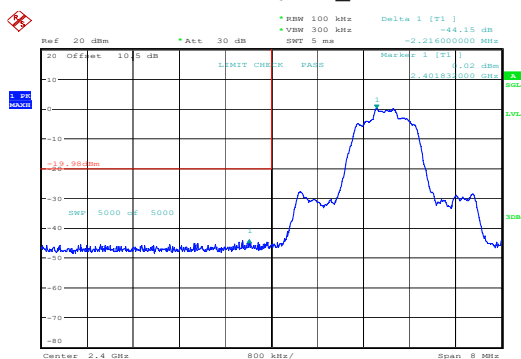


$\pi/4$ -DQPSK_High

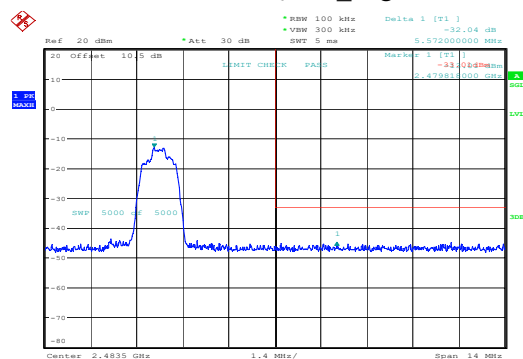

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 15:52:37


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 16:15:52

$\pi/4$ -DQPSK_Hopping_Lower

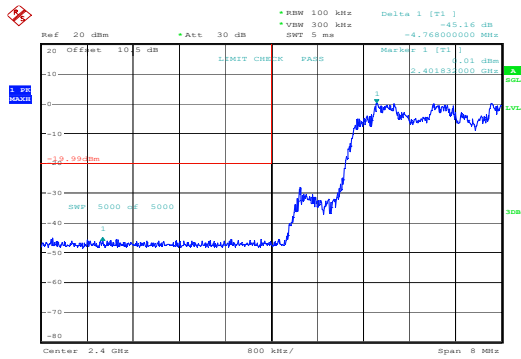


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 15:56:59

$\pi/4$ -DQPSK_Hopping_Upper

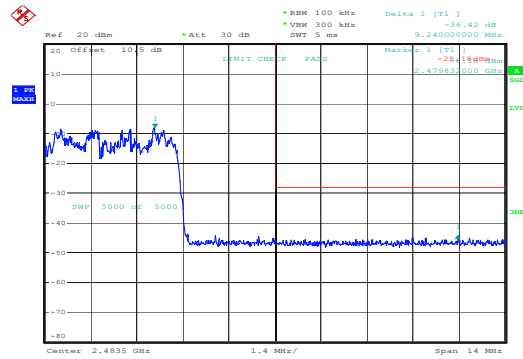


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 16:07:10

8DPSK_Low

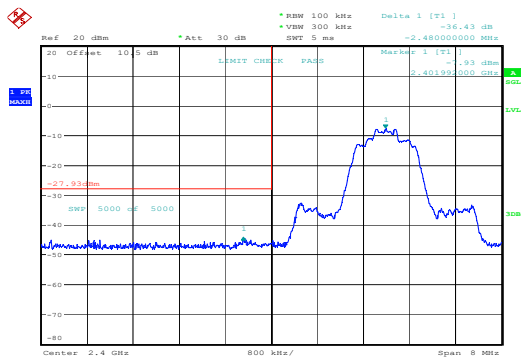


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 16:22:09

8DPSK_High

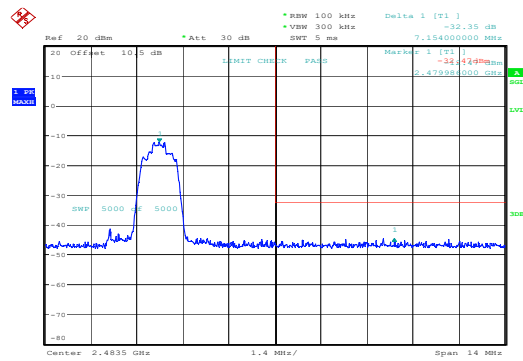


ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 16:46:40

8DPSK_Hopping_Lower

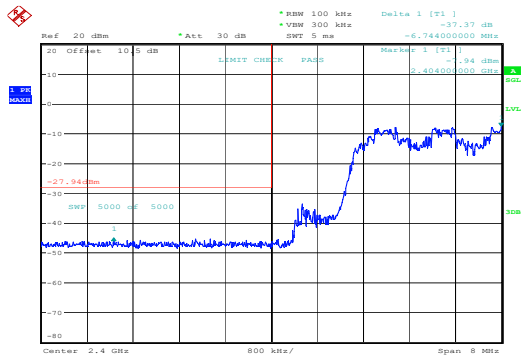

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 16:26:22

8DPSK_Hopping_Upper

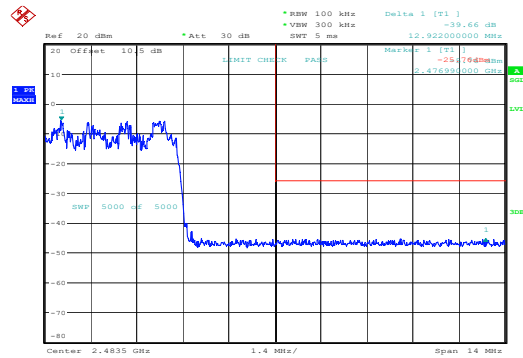

ProjectNo.:2401U34583E-RF Tester:Rainbow Zhu
Date: 19 JUN.2024 16:34:40

RF EXPOSURE EVALUATION

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

Result

Mode	Frequency (MHz)	Tune up conducted power#(dBm)	Antenna Gain#		ERP		Evaluation Distance (m)	ERP Limit (W)
			(dBi)	(dBd)	(dBm)	(W)		
BT	2402-2480	3	-0.68	-2.83	0.17	0.001	0.2	0.768

Note: The tune up conducted power and antenna gain was declared by the applicant.

To maintain compliance with the FCC’s RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

EUT PHOTOGRAPHS

Please refer to the attachment 2401U34583E-RF External photo and 2401U34583E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401U34583E-RF-00A Test Setup photo.

******* END OF REPORT *******