

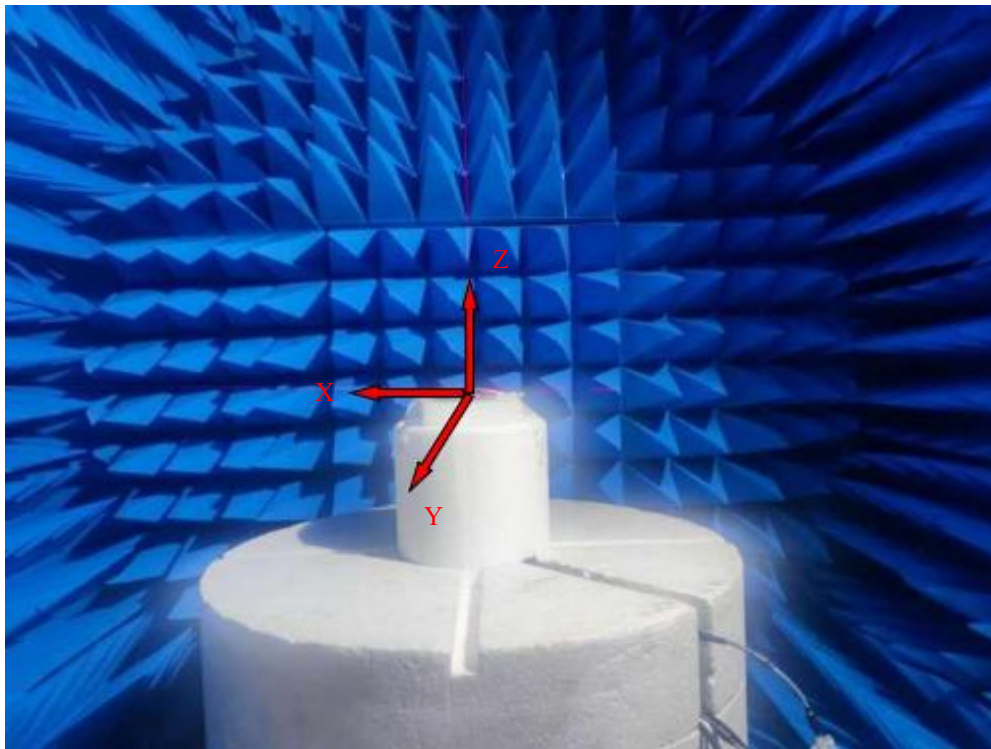


2.4G-2.48G PCB Antenna Specifications

SPECIFICATIONS	
Frequency (MHz)	2400-2480
Peak Gain (dBi)	2.499
Average Gain (dBi)	> -4
VSWR	< 3.2
Impedance (Ω)	50 Ω
Antenna Type	PCB Antenna
Polarization	Linear
Model	BT ANT
Manufacturer	JIANGXI XINGSHENGJIE CIRCUIT CO.,LTD
address	Building 2, Fuxiang Industrial Park, West Xinfeng Industrial Park, Ganzhou City, Jiangxi Province

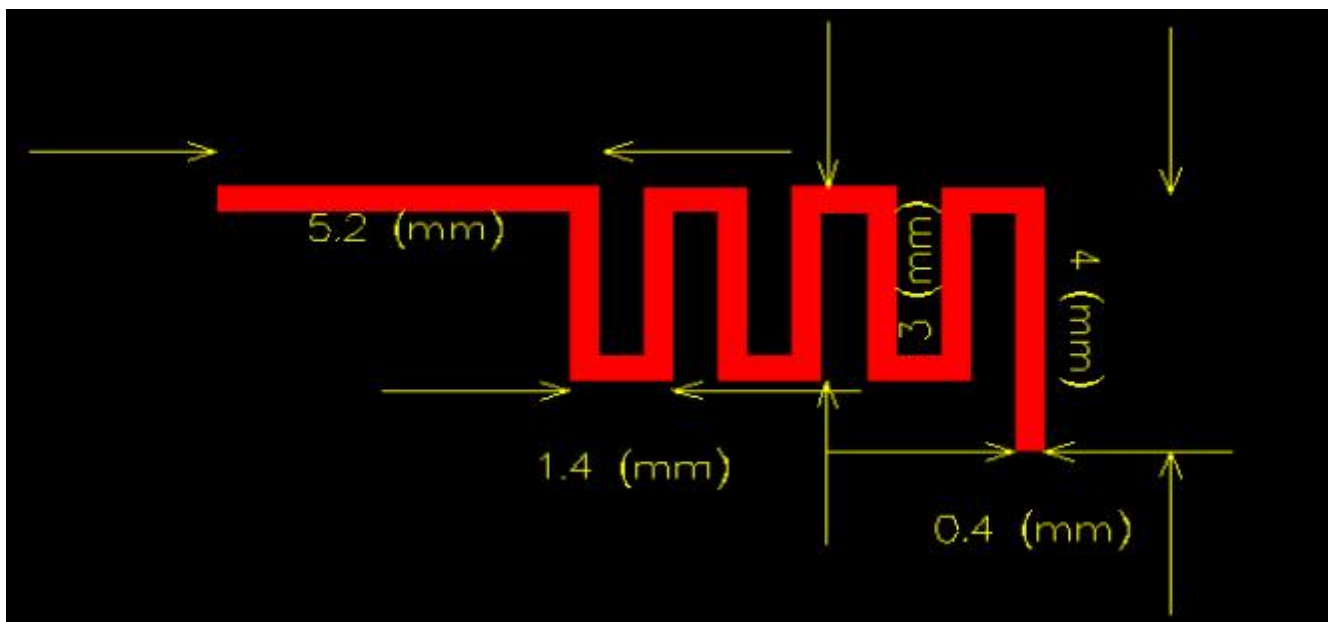

Antenna size

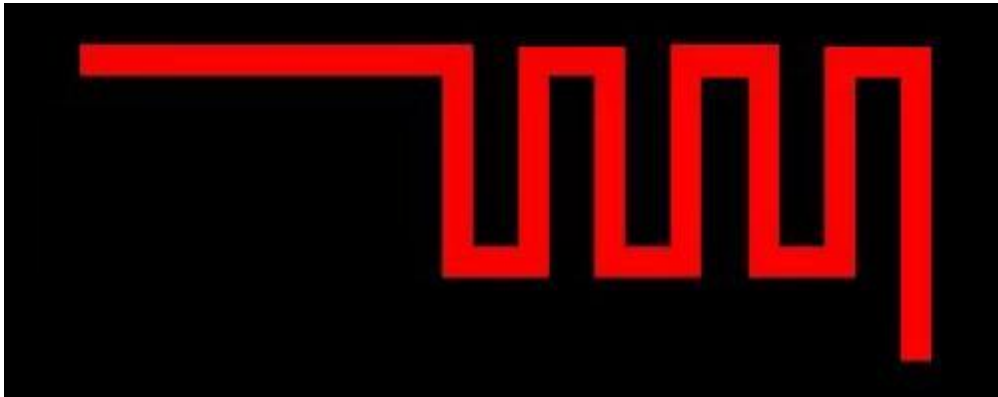


Antenna Passive S Parameters VSWR , Return Loss and Smith Chart




Antenna efficiency and gain

Frequency (MHz)	Gain (dBi)	Efficiency (%)	AverageGain (dBi)	Efficiency (dB)
2400	1.433	59.329%	-2.717	-2.267
2410	0.927	51.861%	-3.416	-2.852
2420	0.829	52.112%	-3.166	-2.831
2430	0.881	49.299%	-3.258	-3.072
2440	1.192	50.672%	-3.144	-2.952
2450	1.688	53.067%	-2.735	-2.752
2460	2.194	59.423%	-2.276	-2.260
2470	2.118	56.680%	-2.438	-2.466
2480	2.499	61.727%	-2.112	-2.095
Average	1.529	54.908%	-2.806	-2.616
Peak	2.499	61.727%	-2.112	-2.095

Antenna 2440MHz 3D-Horizontal Pattern

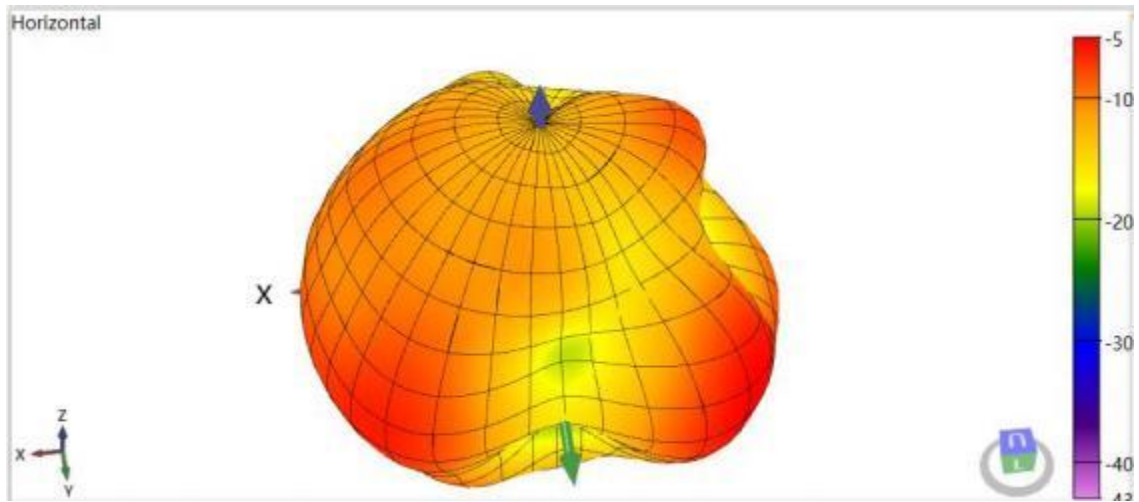

Antenna 2440MHz 3D-Vertical Pattern

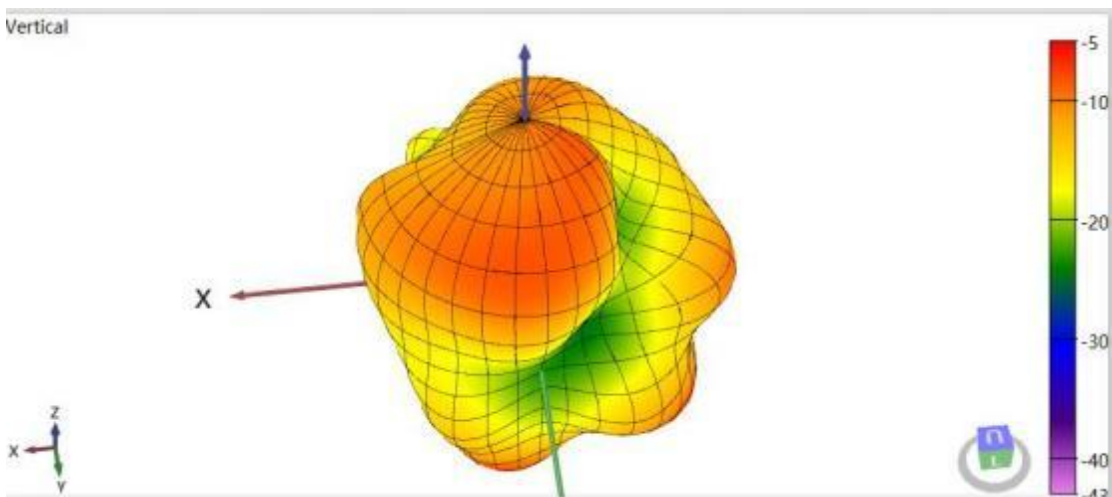

2440MHz 3D-Total Pattern

