

FCC / ISED RF Test Report

Report No.: FCC_IC_RF_SL21022601-HAR-283_R1 EXT NA 3B_2.4G

FCC ID: 2AHPN-BE2857

ISED ID: 6434C-BE2857

Model: R1 EXT NA 3B MY22

Received Date: 3/15/2021

Test Date: 4/15/2021-5/23/2021

Issued Date: 6/14/2021

Applicant: HARMAN INTERNATIONAL

Address: 30001 Cabot Drive, Novi, MI 48377, USA

Manufacturer: HARMAN INTERNATIONAL

Address: 30001 Cabot Drive, Novi, MI 48377, USA

Issued By: Bureau Veritas Consumer Products Services, Inc.

Lab Address: 775 Montague Expressway, Milpitas, CA 95035

**FCC Registration /
Designation Number:** 540430

ISED# / CAB identifier: 4842D



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Description of Support Units.....	10
3.3.1 Configuration of System under Test.....	10
3.4 General Description of Applied Standards	11
4 Test Types and Results	12
4.1 Radiated Emission and Bandedge Measurement	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	12
4.1.2 Test Instruments.....	13
4.1.3 Test Procedures	14
4.1.4 Deviation from Test Standard.....	14
4.1.5 Test Setup.....	15
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results	17
4.2 6dB Bandwidth & 99% Bandwidth Measurement	27
4.2.1 Limits of 6dB Bandwidth Measurement.....	27
4.2.2 Test Setup.....	27
4.2.3 Test Instruments.....	27
4.2.4 Test Procedure.....	27
4.2.5 Deviation from Test Standard	27
4.2.6 EUT Operating Conditions.....	27
4.2.7 Test Result	28
4.3 Conducted Output Power Measurement.....	34
4.3.1 Limits of Conducted Output Power Measurement	34
4.3.2 Test Setup.....	34
4.3.3 Test Instruments.....	34
4.3.4 Test Procedures	34
4.3.5 Deviation from Test Standard.....	34
4.3.6 EUT Operating Conditions.....	34
4.3.7 Test Results	35
4.4 Power Spectral Density Measurement.....	41
4.4.1 Limits of Power Spectral Density Measurement	41
4.4.2 Test Setup.....	41
4.4.3 Test Instruments.....	41
4.4.4 Test Procedure.....	41
4.4.5 Deviation from Test Standard.....	41
4.4.6 EUT Operating Condition	41
4.4.7 Test Results	42
4.5 Conducted Out of Band Emission Measurement	48
4.5.1 Limits of Conducted Out of Band Emission Measurement.....	48
4.5.2 Test Setup.....	48
4.5.3 Test Instruments.....	48
4.5.4 Test Procedure.....	48
4.5.5 Deviation from Test Standard.....	48
4.5.6 EUT Operating Condition	48
4.5.7 Test Results	49

5	Pictures of Test Arrangements	52
	Appendix – Information on the Testing Laboratories.....	53



Release Control Record

Issue No.	Description	Date Issued
FCC_IC_RF_SL21022601-HAR-283_R1 EXT NA 3B_2.4G	Original Release	6/14/2021

1 Certificate of Conformity

Product: Automotive Infotainment Unit

Brand: HARMAN

Model: R1 EXT NA 3B MY22


Sample Status: Final Product

Applicant: Harman International

Test Date: 4/15/2021-5/23/2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
RSS 247 Issue 2, February 2017
ANSI C63.10: 2013
RSS Gen Issue 5, March 2019
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services, Inc., Milpitas Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** 5/24/2021
Jude Semana / Test Engineer

Approved by : Gary Chou , **Date:** 6/14/2021
Gary Chou/ Engineer Reviewer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247) / ISED RSS-247				
FCC Clause	RSS Section(s)	Test Item	Result	Remarks
15.207	RSS-Gen [8.8]	AC Power Conducted Emission	N/A	N/A
15.205 & 15.209 & 15.247(d)	RSS-Gen [8.9] RSS-247 [5.5]	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(d)	RSS-247[5.5]	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	RSS-247[5.2]	6dB Bandwidth & 99% Bandwidth	PASS	Meet the requirement of limit.
15.247(b)	RSS-247 [5.4(4)]	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	RSS-247 [5.2]	Power Spectral Density	PASS	Meet the requirement of limit.
15.203		Antenna Requirement	PASS	Antenna connector is FAKRA. (The device is professionally installed)

Note: The EUT is DC powered.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.51dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.73dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.64dB
	6GHz ~ 18GHz	4.82dB
	18GHz ~ 40GHz	4.91dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Automotive Infotainment Unit
Brand	HARMAN
Model	R1 EXT NA 3B MY22
Status of EUT	Final Product
Power Supply Rating	12V, 20A
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 300Mbps
Operating Frequency	2412~2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n(HT20)
Output Power	101.57 mW (20.05dBm)
Antenna Type	External PCB Antenna, 1.43dBi
Antenna Connector	FAKRA

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Power Settings:

MODE	CHANNEL	FREQUENCY	POWER SETTING
11b	1	2412MHz	1
	6	2437MHz	1
	11	2462MHz	1
11g	1	2412MHz	1
	6	2437MHz	1
	11	2462MHz	1
11n	1	2412MHz	1
	6	2437MHz	1
	11	2462MHz	1

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
-	√	√	N/A	√	-

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE $<$ 1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.
NOTE: "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 65%RH	12VDC	Jude Semana
RE $<$ 1G	25deg. C, 65%RH	12VDC	Jude Semana
PLC	25deg. C, 68%RH	12VDC	Jude Semana
APCM	21deg. C, 60%RH	12VDC	Jude Semana


3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Acer	Aspire 3	N/A	N/A	Provided by Lab

Note: The core(s) is (are) originally attached to the cable(s).

3.3.1 Configuration of System under Test

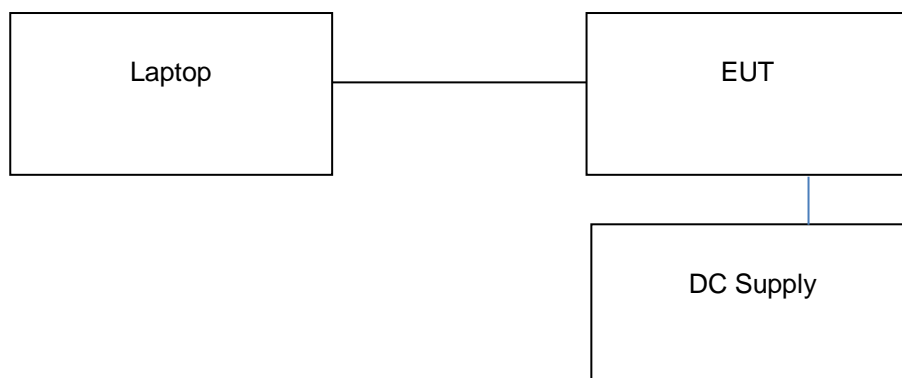

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR FCC Part 15, Subpart C (Section 15.247)
RSS 247 Issue2, February 2017
ANSI C63.10: 2013
RSS Gen Issue5, March 2019
558074 D01 15.247 Meas Guidance v05r02

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
EMI Receiver , Rohde and Schwarz	ESW44	1328.4100K-101662-MH	10/23/2020	10/23/2021
Biconilog Antenna , Sunol	JB6	A111717	9/4/2020	9/4/2021
Horn Antenna , ETS-Lindgren	3117	218554	7/24/2020	7/24/2021
Pre-Amplifier , RF-Lambda	RAMP00M50GA	18040300055	10/1/2020	10/1/2021
Spectrum Analyzer, Keysight	N9030B	MY57140597	06/15/2020	06/15/2021

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

For Radiated emission 30MHz to 1GHz

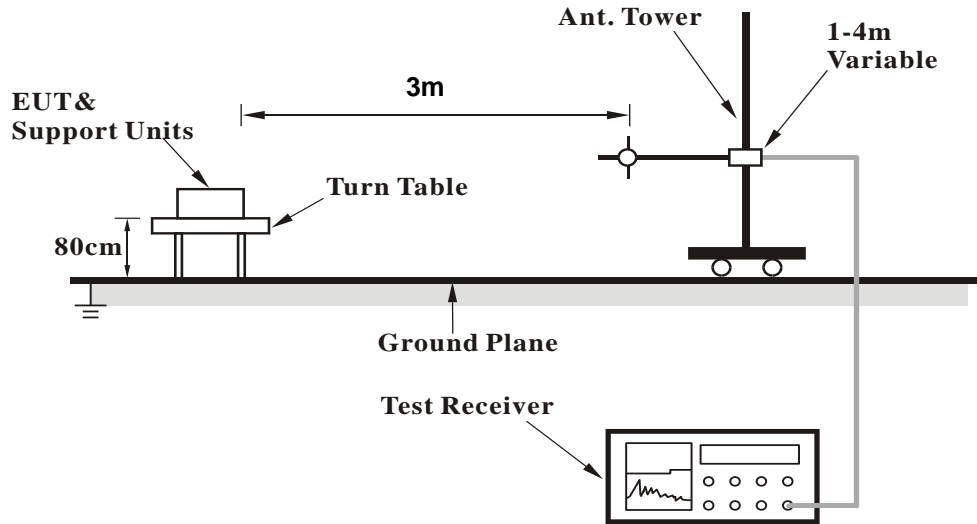

For Radiated emission above 1GHz

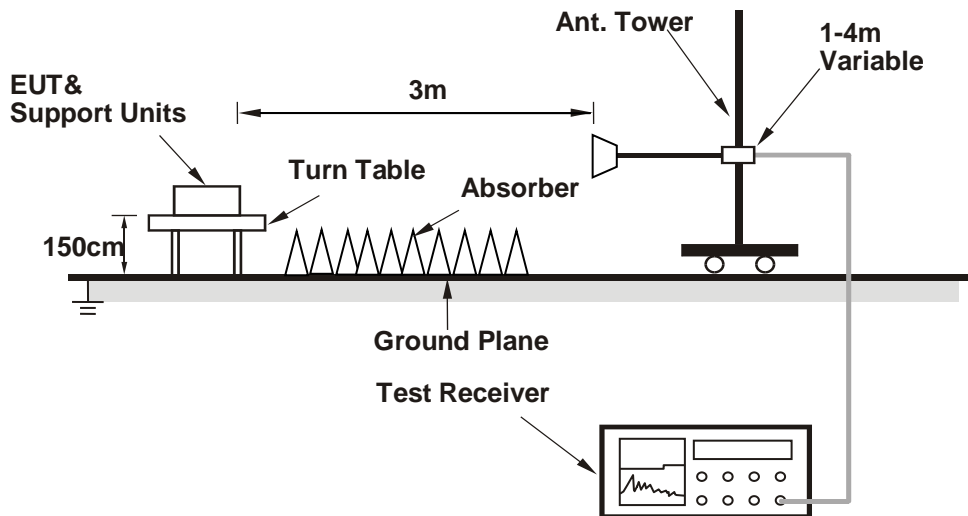

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Notebook Computer which is placed on remote site.
- b. Controlling software has been activated to set the EUT on specific status.

4.1.7 Test Results


BELOW 1GHz WORST-CASE DATA:

CHANNEL	802.11n Channel 6	DETECTOR FUNCTION	Quasi Peak
FREQUENCY RANGE	30MHz – 1GHz		

Antenna Polarity & Test Distance: Vertical and Horizontal at 3m										
No.	Frequency (MHz)	Polarization (H/V)	Reading QP [dB(uV)]	Factor [dB(1/m)]	Level QP [dB(uV/m)]	Limit\QP dB(uV/m)	Margin QP [dB]	Height (cm)	Angle (Deg)	Pass/Fail
1	46.868	V	10.7	14.3	25	40	-15	107.1	239.5	Pass
2	110.928	V	21.6	18.7	40.3	43.5	-3.2	100.3	119.6	Pass
3	252.487	H	14.6	18.3	32.9	46	-13.1	134	64.5	Pass
4	407.989	V	14.7	22.8	37.5	46	-8.5	101.9	38.2	Pass
5	533.145	V	4.7	25.1	29.8	46	-16.2	102.8	33.1	Pass
6	714.254	V	-3.4	28.1	24.7	46	-21.3	111.6	71.8	Pass

REMARKS:

1. Emission level (dBuV/m) = Reading Value (dBuV) + Factor (dB)
2. AF (dB/m) = Antenna Factor (dB/m) – Preamplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

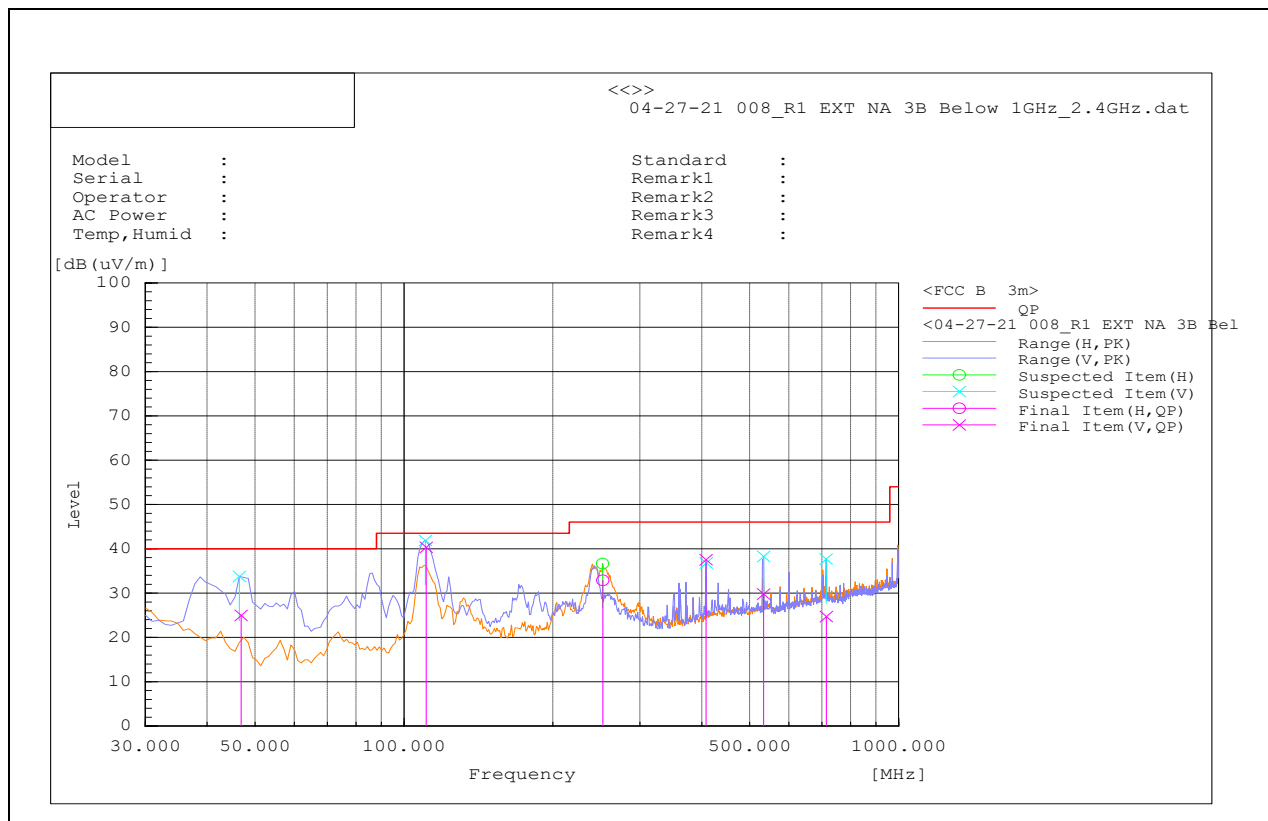

ABOVE 1GHz TEST DATA:
WLAN 2.4GHz
802.11b
Above 1GHz-25GHz – 802.11b – 2412MHz

ANTENNA POLARITY & test distance: HORIZONTAL& Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
3188.172	H	40.1	-9.4	Average	30.7	54	-23.3	111.8	234.2
1246.605	H	46.1	-16.5	Average	29.6	54	-24.4	116.1	173.6
6380.258	H	33.2	-2.5	Average	30.7	54	-23.3	400	127.9
3188.172	H	56.8	-9.4	Peak	47.4	74	-26.6	111.8	234.2
1246.605	H	65.8	-16.5	Peak	49.3	74	-24.7	116.1	173.6
6380.258	H	45.5	-2.5	Peak	43	74	-31	400	127.9

Above 1GHz-25GHz- 802.11b - 2437MHz

ANTENNA POLARITY & test distance: HORIZONTAL& Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
6986.8	H	33.1	-1.3	Average	31.8	54	-22.2	100.5	202.4
3186.712	V	40.2	-9.4	Average	30.8	54	-23.2	183.7	111.6
4262.091	H	38.5	-7.3	Average	31.2	54	-22.8	104.6	250.8
6986.8	H	48.4	-1.3	Peak	47.1	74	-26.9	100.5	202.4
3186.712	V	53.4	-9.4	Peak	44	74	-30	183.7	111.6
4262.091	H	54.4	-7.3	Peak	47.1	74	-26.9	104.6	250.8

Above 1GHz-25GHz – 802.11b – 2462MHz

ANTENNA POLARITY & test distance: HORIZONTAL& Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
6975.534	H	33.1	-1.3	Average	31.8	54	-22.2	194.8	186.4
4988.645	V	36.3	-5.8	Average	30.5	54	-23.5	102.1	99.9
3185.41	H	39.5	-9.4	Average	30.1	54	-23.9	104.4	107.9
6975.534	H	45.9	-1.3	Peak	44.6	74	-29.4	194.8	186.4
4988.645	V	54.9	-5.8	Peak	49.1	74	-24.9	102.1	99.9
3185.41	H	57.2	-9.4	Peak	47.8	74	-26.2	104.4	107.9

802.11g

Above 1GHz-25GHz- 802.11g - 2412MHz

ANTENNA POLARITY & test distance: HORIZONTAL& Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
4986.331	V	36.1	-5.8	Average	30.3	54	-23.7	195	355.8
3195.332	H	40	-9.4	Average	30.6	54	-23.4	162.9	91.5
4244.694	H	37.5	-7.4	Average	30.1	54	-23.9	178.5	100.9
4986.331	V	51.1	-5.8	Peak	45.3	74	-28.7	195	355.8
3195.332	H	61.3	-9.4	Peak	51.9	74	-22.1	162.9	91.5
4244.694	H	49.3	-7.4	Peak	41.9	74	-32.1	178.5	100.9

Above 1GHz-25GHz – 802.11g – 2437MHz

ANTENNA POLARITY & test distance: HORIZONTAL& Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
4990.824	V	35.6	-5.8	Average	29.8	54	-24.2	136	33.1
4248.039	H	37.7	-7.4	Average	30.3	54	-23.7	98.1	151.2
3187.572	H	39.2	-9.4	Average	29.8	54	-24.2	213.6	123.3
4990.824	V	51.5	-5.8	Peak	45.7	74	-28.3	28.3	136
4248.039	H	55.2	-7.4	Peak	47.8	74	-26.2	26.2	98.1
3187.572	H	58	-9.4	Peak	48.6	74	-25.4	25.4	213.6

Above 1GHz-25GHz- 802.11g - 2462MHz

ANTENNA POLARITY & test distance: HORIZONTAL& Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
6970.671	H	32.1	-1.3	Average	30.8	54	-23.2	129.3	349.4
4263.35	H	36.9	-7.3	Average	29.6	54	-24.4	116.5	80.4
4988.676	V	35.8	-5.8	Average	30	54	-24	96.9	46.2
6970.671	H	50.6	-1.3	Peak	49.3	74	-24.7	129.3	349.4
4263.35	H	50.9	-7.3	Peak	43.6	74	-30.4	116.5	80.4
4988.676	V	47.9	-5.8	Peak	42.1	74	-31.9	96.9	46.2

802.11n-HT20

Above 1GHz-25GHz- 802.11n20 - 2412MHz

ANTENNA POLARITY & test distance: HORIZONTAL& Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
4990.04	H	37.4	-5.8	Average	31.6	54	-22.4	108.7	337.4
3195.251	H	40.5	-9.4	Average	31.1	54	-22.9	170.8	275.8
4258.011	H	36.8	-7.4	Average	29.4	54	-24.6	183.4	318.6
4990.04	H	59.3	-5.8	Peak	53.5	74	-20.5	108.7	337.4
3195.251	H	54.7	-9.4	Peak	45.3	74	-28.7	170.8	275.8
4258.011	H	50.1	-7.4	Peak	42.7	74	-31.3	183.4	318.6


Above 1GHz-25GHz – 802.11n20 – 2437MHz

ANTENNA POLARITY & test distance: HORIZONTAL& Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
4257.074	H	38.3	-7.4	Average	30.9	54	-23.1	152.6	194.4
3198.59	V	40.1	-9.4	Average	30.7	54	-23.3	146.8	160.3
1248.678	H	43.8	-16.5	Average	27.3	54	-26.7	100.1	314
4257.074	H	52.2	-7.4	Peak	44.8	74	-29.2	152.6	194.4
3198.59	V	56.9	-9.4	Peak	47.5	74	-26.5	146.8	160.3
1248.678	H	61.6	-16.5	Peak	45.1	74	-28.9	100.1	314

Above 1GHz-25GHz- 802.11n20 - 2462MHz


ANTENNA POLARITY & test distance: HORIZONTAL& Vertical at 3 m									
Frequency [MHz]	Pol	Reading [dB(uV)]	Factor [dB(1/m)]	Measurement Type	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
3196.508	H	43	-9.4	Average	33.6	54	-20.4	92.6	240.7
4258.878	H	37.6	-7.4	Average	30.2	54	-23.8	162.4	305.9
6991.593	H	32.3	-1.3	Average	31	54	-23	162.6	247.6
3196.508	H	54.8	-9.4	Peak	45.4	74	-28.6	92.6	240.7
4258.878	H	51.9	-7.4	Peak	44.6	74	-29.4	162.4	305.9
6991.593	H	44.2	-1.3	Peak	42.9	74	-31.1	162.6	247.6

RESTRICTED BAND (802.11b LOW CHANNEL)

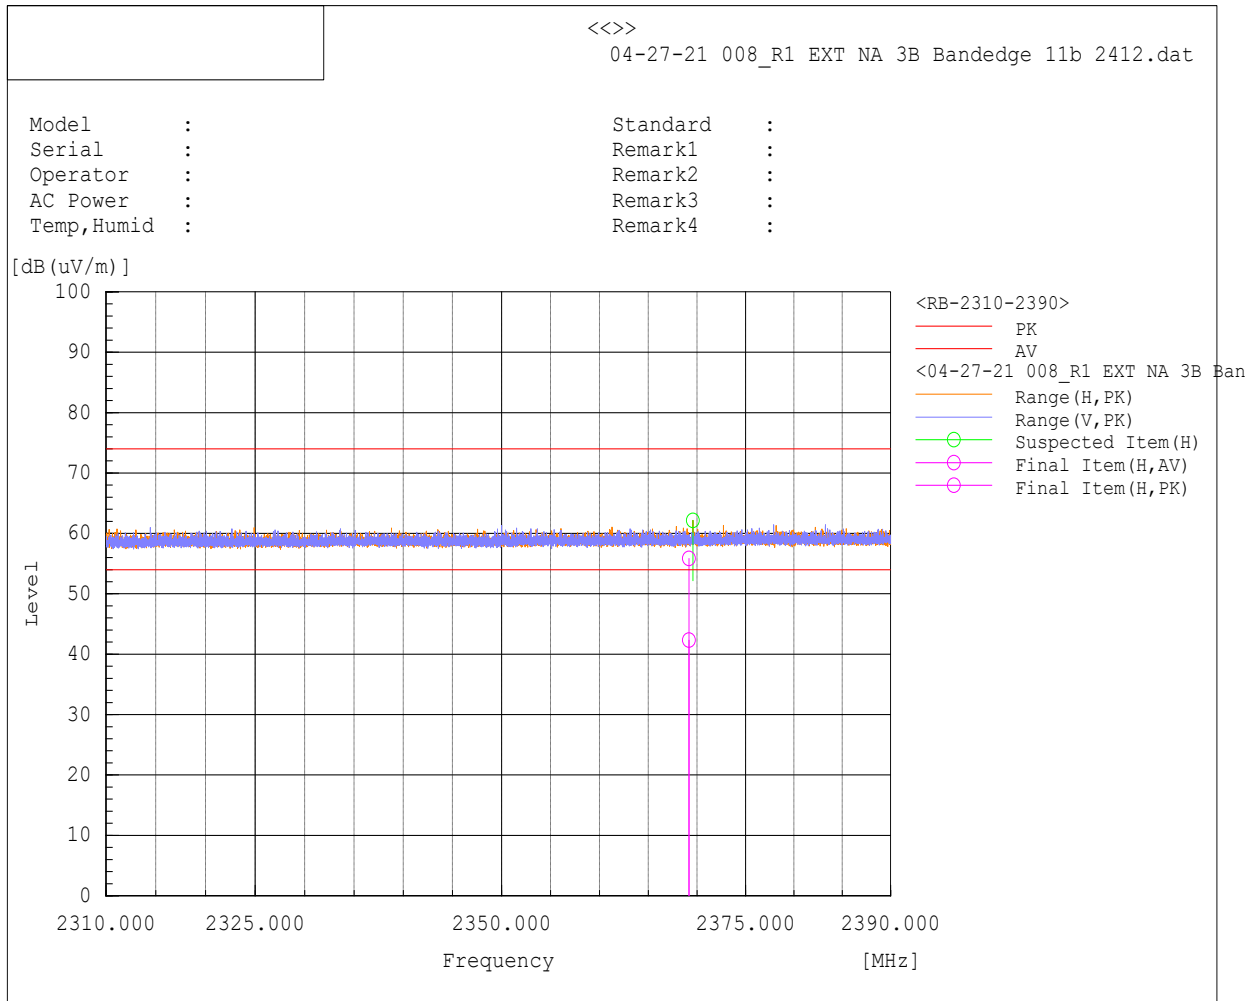


Frequency [MHz]	Pol	Reading [dB(uV)]	Measurement Type	Factor [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
2369.176	H	7.4	Average	34.9	42.3	54	-11.7	98.1	152.3
2369.176	H	20.9	Peak	34.9	55.8	74	-18.2	98.1	152.3

RESTRICTED BAND (802.11b High CHANNEL)

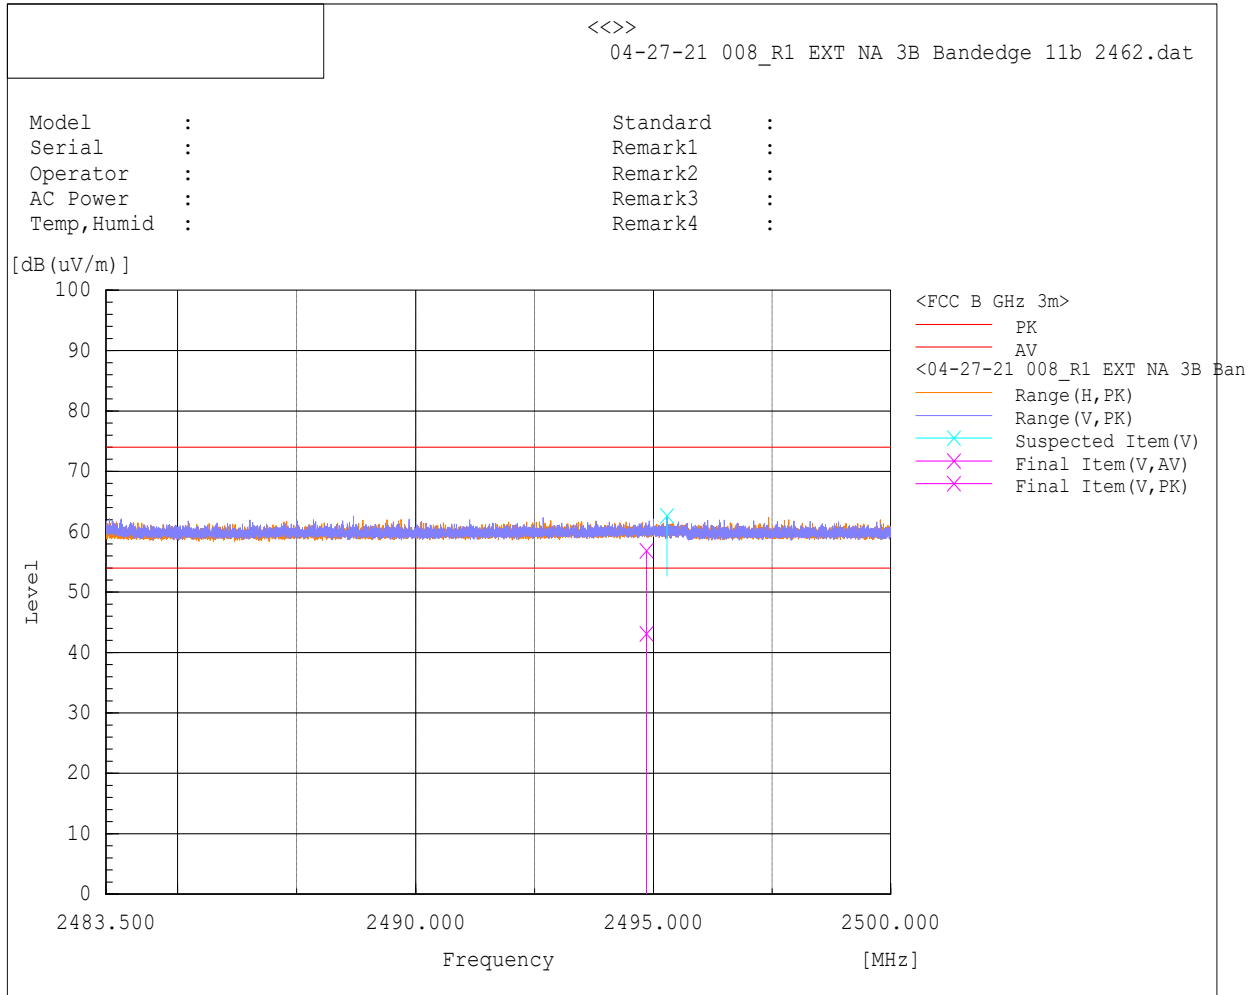


Frequency [MHz]	Pol	Reading [dB(uV)]	Measurement Type	Factor [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
2494.854	V	7.6	Average	35.5	43.1	54	-10.9	127.6	337.5
2494.854	V	21.4	Peak	35.5	56.9	74	-17.1	127.6	337.5

RESTRICTED BAND (802.11g LOW CHANNEL)

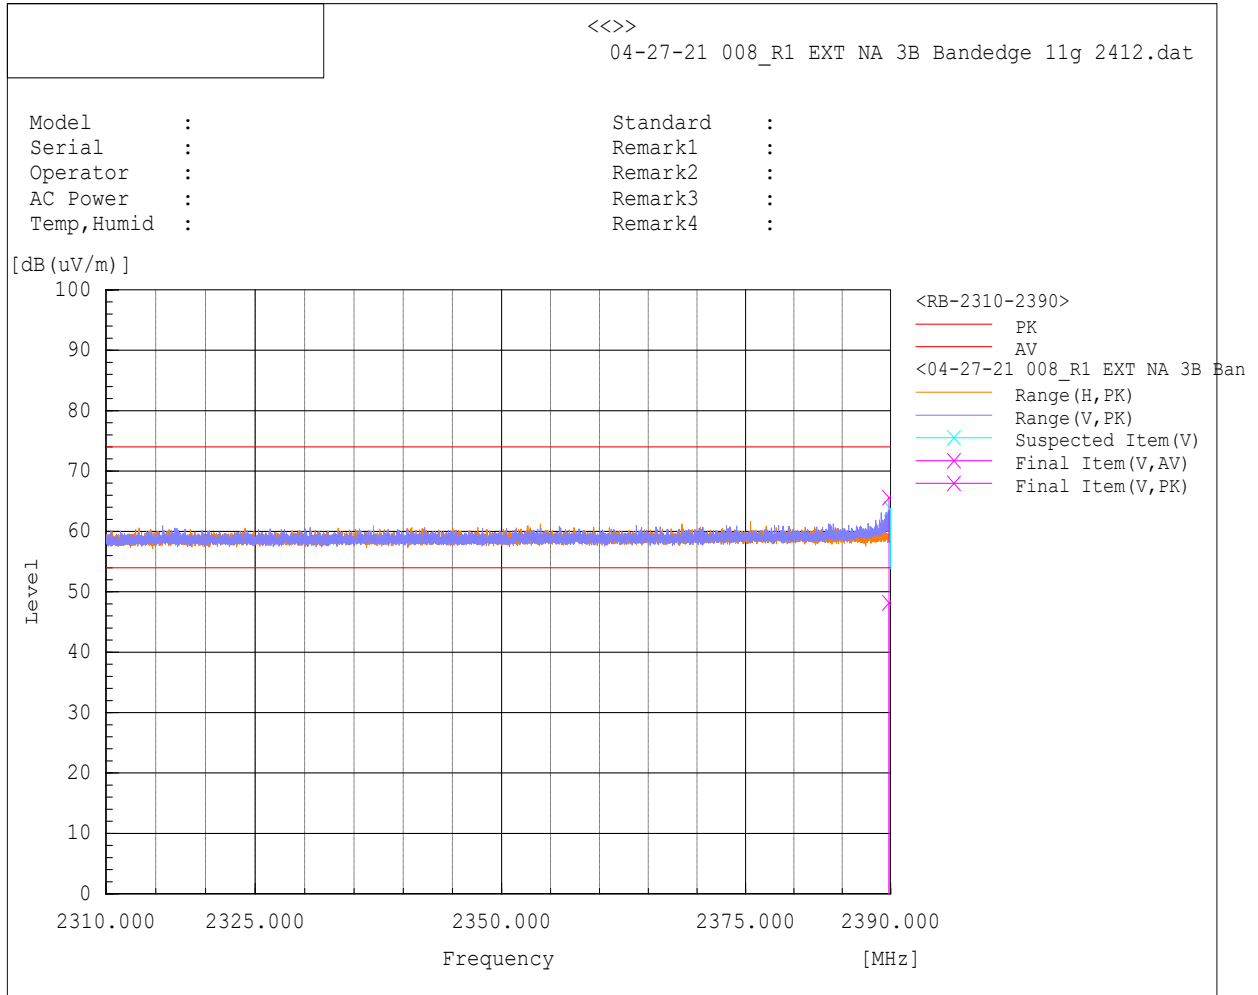


Frequency [MHz]	Pol	Reading [dB(uV)]	Measurement Type	Factor [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
2389.825	V	13.2	Average	35	48.2	54	-5.8	166.6	6.5
2389.825	V	30.6	Peak	35	65.6	74	-8.4	166.6	6.5

RESTRICTED BAND (802.11g High CHANNEL)

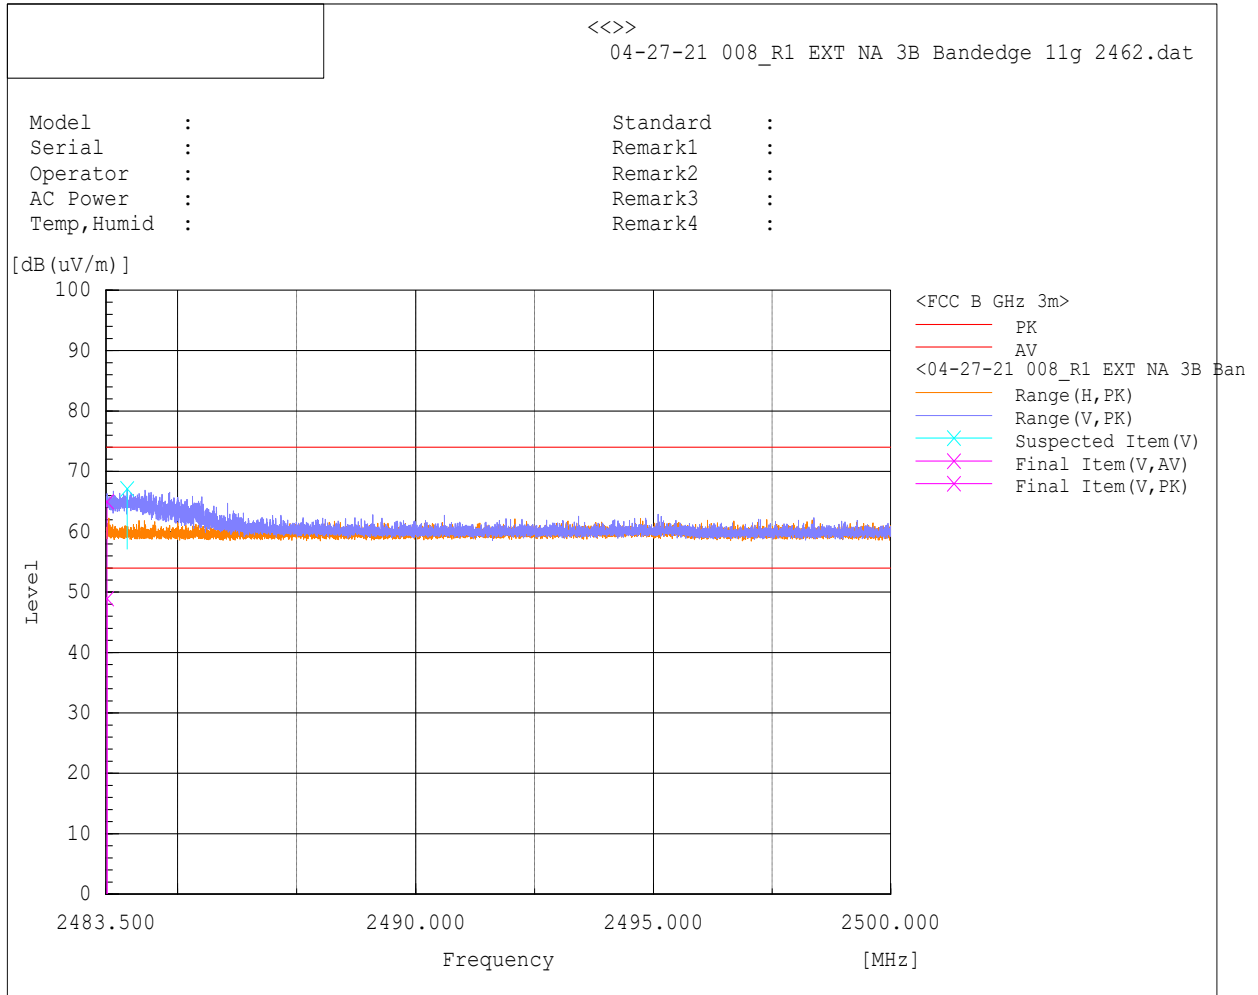


Frequency [MHz]	Pol	Reading [dB(uV)]	Measurement Type	Factor [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
2483.52	V	13.5	Average	35.4	48.9	54	-5.1	318.9	0
2483.52	V	29.6	Peak	35.4	65	74	-9	318.9	0

RESTRICTED BAND (802.11n LOW CHANNEL)

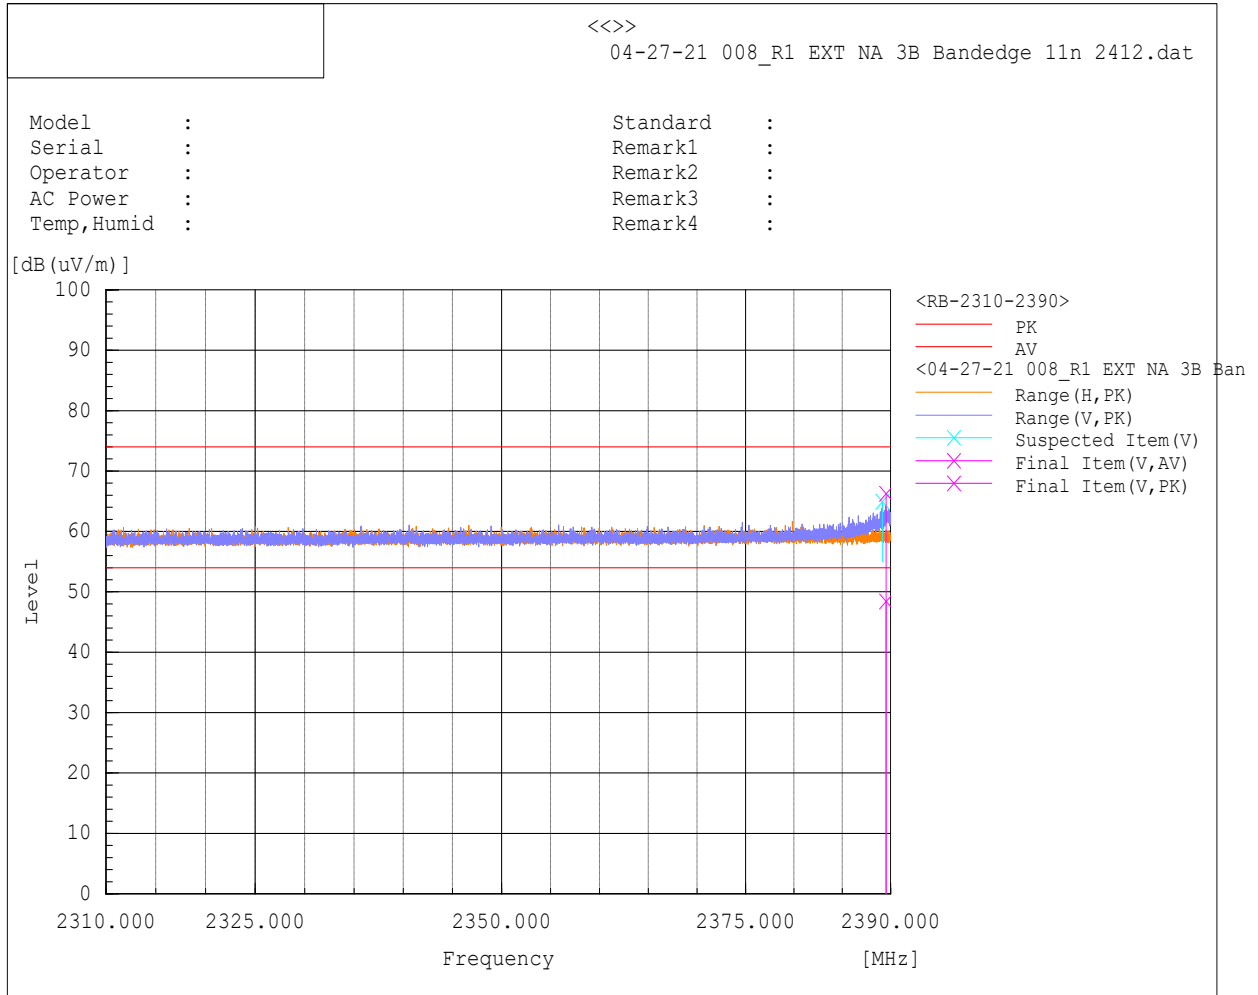

Frequency [MHz]	Pol	Reading [dB(uV)]	Measurement Type	Factor [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
2389.526	V	13.4	Average	35	48.4	54	-5.6	163.1	3.2
2389.526	V	31.2	Peak	35	66.2	74	-7.8	163.1	3.2

RESTRICTED BAND (802.11n High CHANNEL)

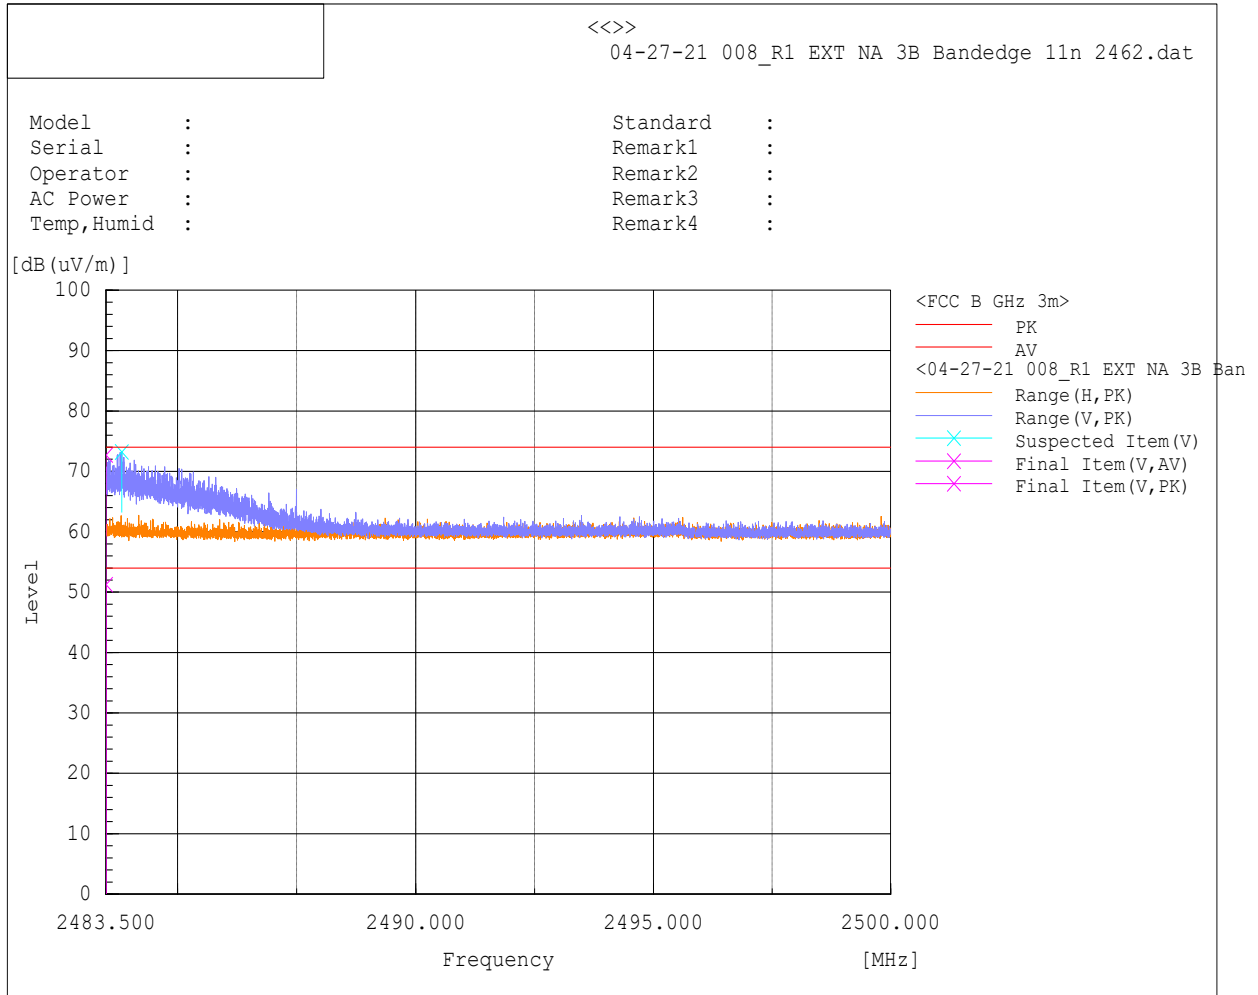


Frequency [MHz]	Pol	Reading [dB(uV)]	Measurement Type	Factor [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	Height [cm]	Angle [deg]
2483.498	V	15.9	Average	35.4	51.3	54	-2.7	113.6	11.3
2483.498	V	37.3	Peak	35.4	72.7	74	-1.3	113.6	11.3

4.2 6dB Bandwidth & 99% Bandwidth Measurement

4.2.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 Test Setup



4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.2.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	9.070	11.209	0.5	PASS
6	2437	9.092	11.607	0.5	PASS
11	2462	9.074	11.587	0.5	PASS

Test Plots:


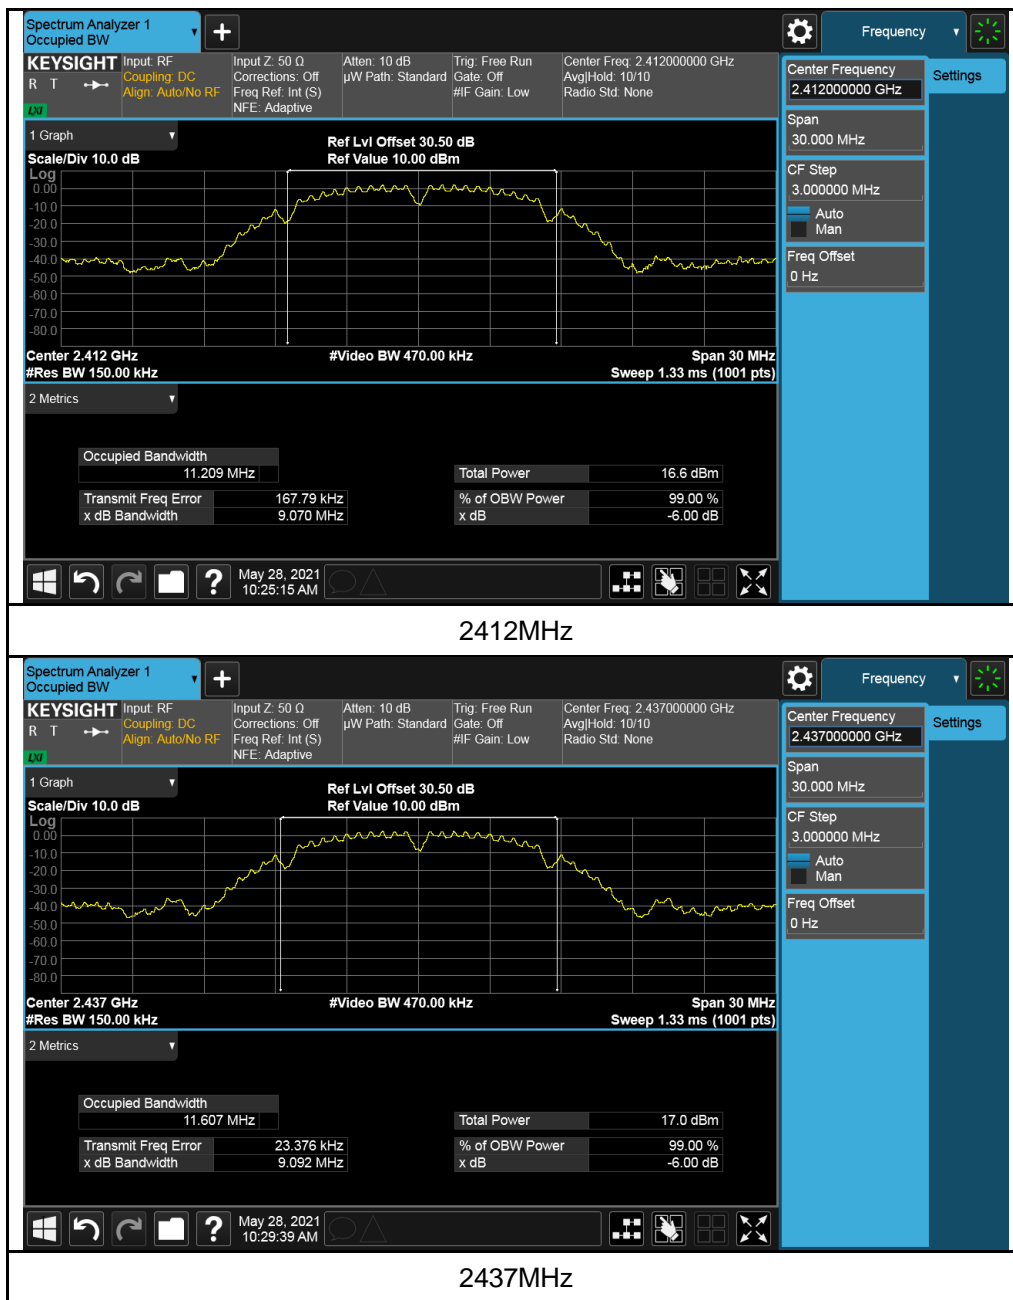


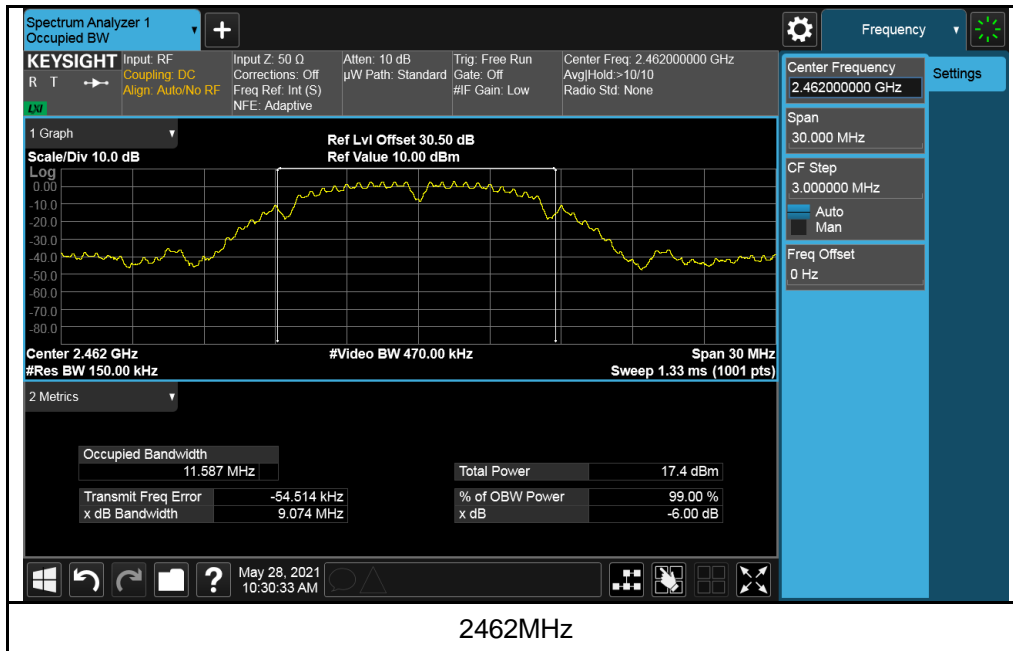


802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth	Minimum Limit (MHz)	Pass / Fail
1	2412	16.06	16.675	0.5	PASS
6	2437	16.01	16.666	0.5	PASS
11	2462	15.88	16.677	0.5	PASS

Test Plots:

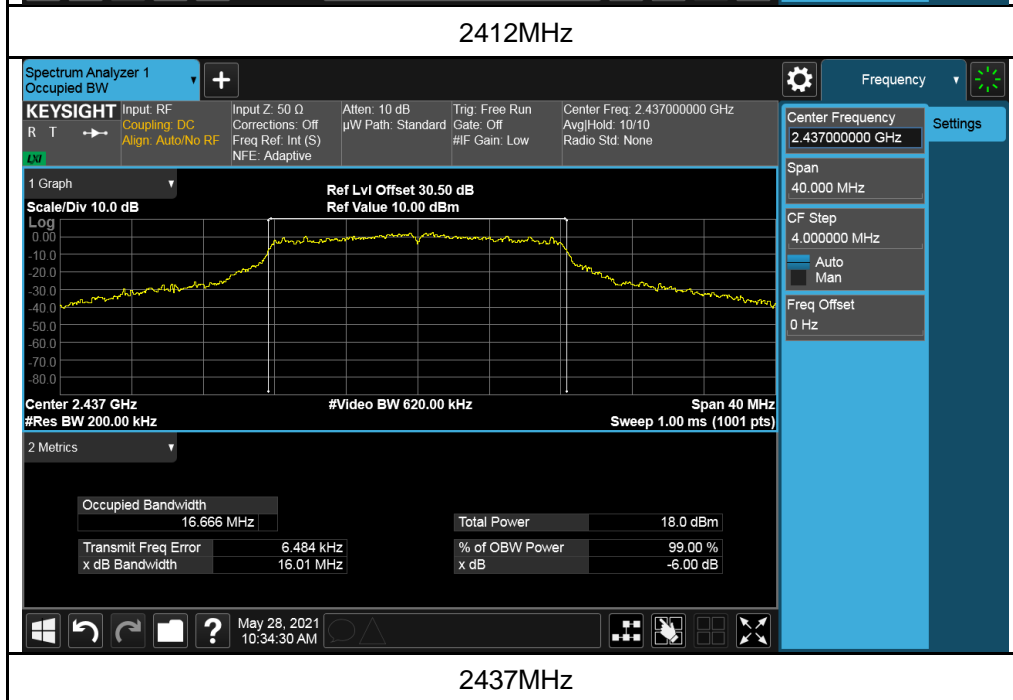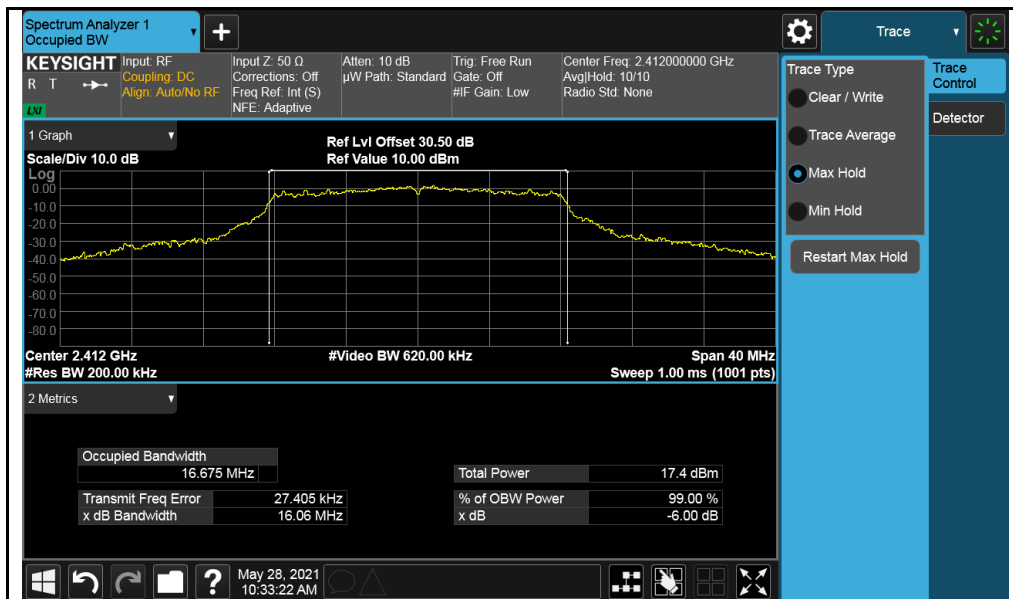


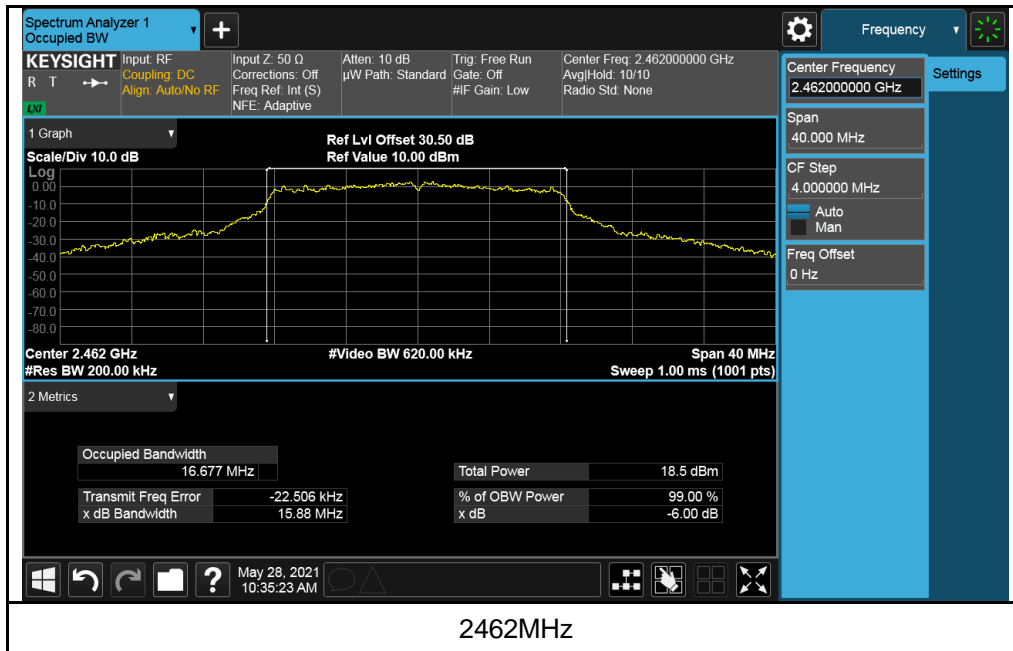

802.11n-HT20

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth	Minimum Limit (MHz)	Pass / Fail
1	2412	17.28	17.779	0.5	PASS
6	2437	17.27	17.825	0.5	PASS
11	2462	17.15	17.796	0.5	PASS

Test Plots:

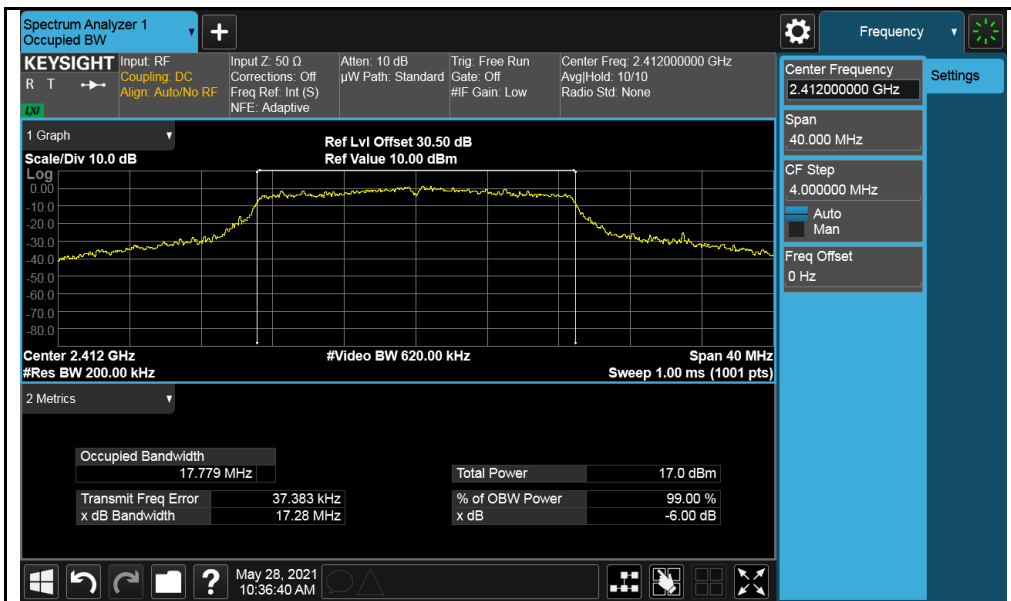

2412MHz



2437MHz




4.3 Conducted Output Power Measurement

4.3.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

- a. Set the RBW \geq DTS bandwidth.
- b. Set VBW $\geq 3 \times$ RBW.
- c. Set span $\geq 3 \times$ RBW
- d. Sweep time = auto couple.
- e. Detector = peak.
- f. Trace mode = max hold.
- g. Allow trace to fully stabilize.
- h. Use peak marker function to determine the peak amplitude level.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions


Same as Item 4.3.6.

4.3.7 Test Results


802.11b

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	14.33	30	Pass
6	2437	14.55	30	Pass
11	2462	14.75	30	Pass


Test Plots:

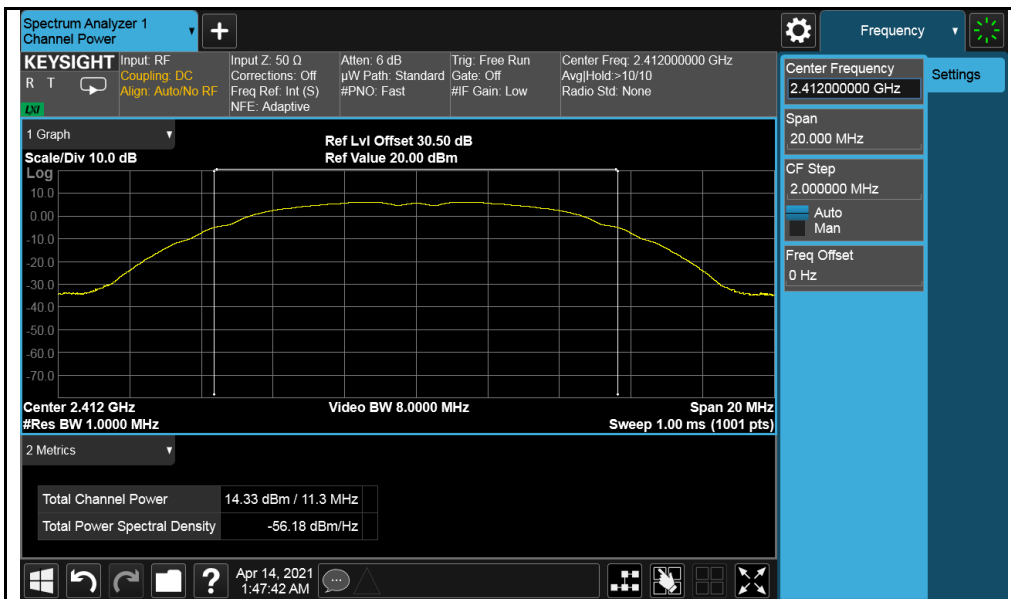

2412MHz

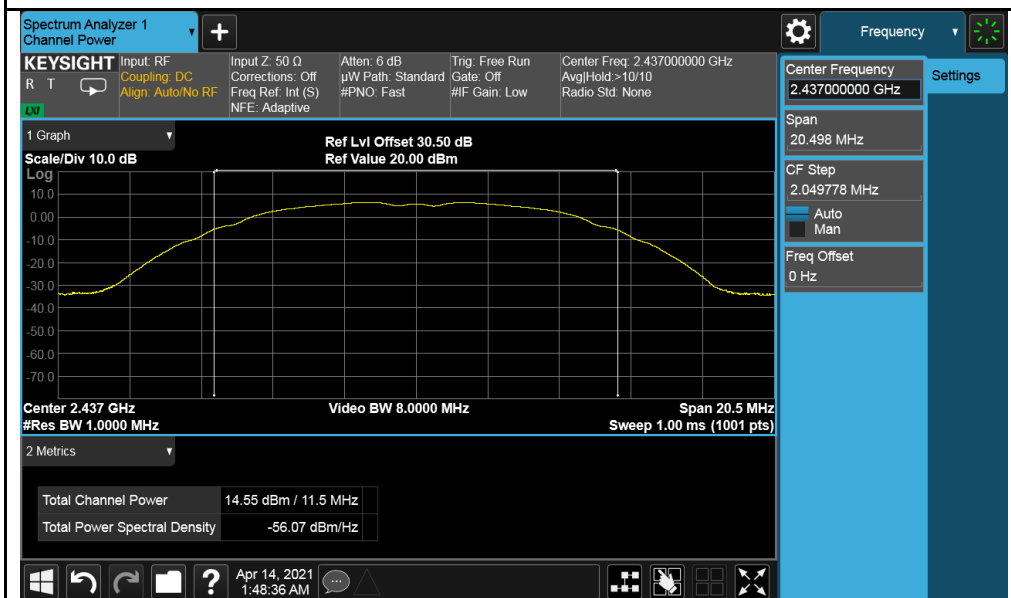


2437MHz

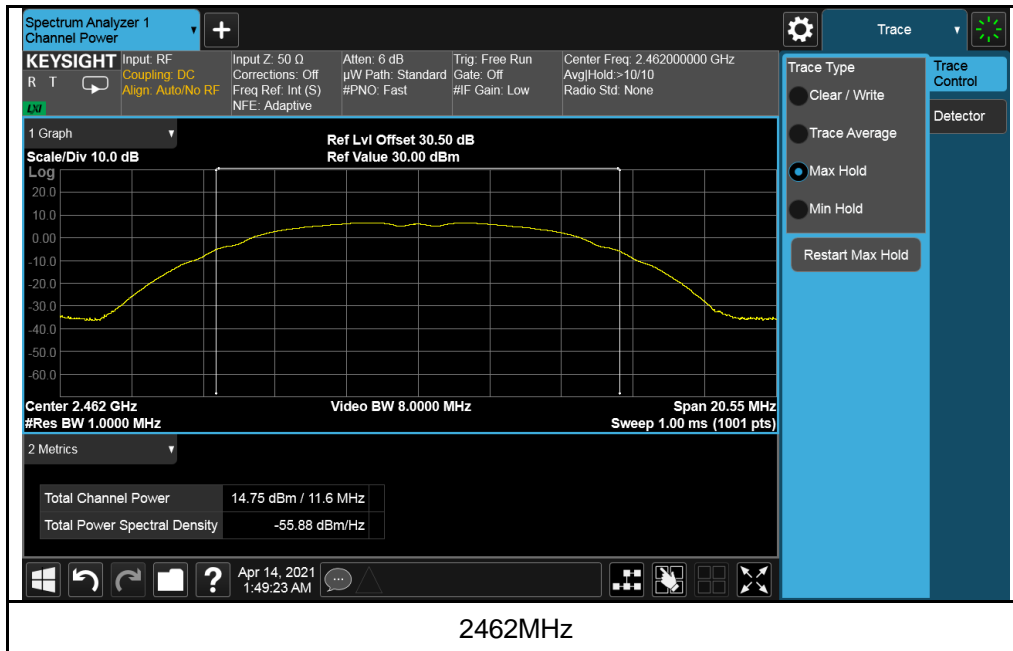


802.11g

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	19.04	30	Pass
6	2437	19.59	30	Pass
11	2462	19.86	30	Pass


Test Plots:

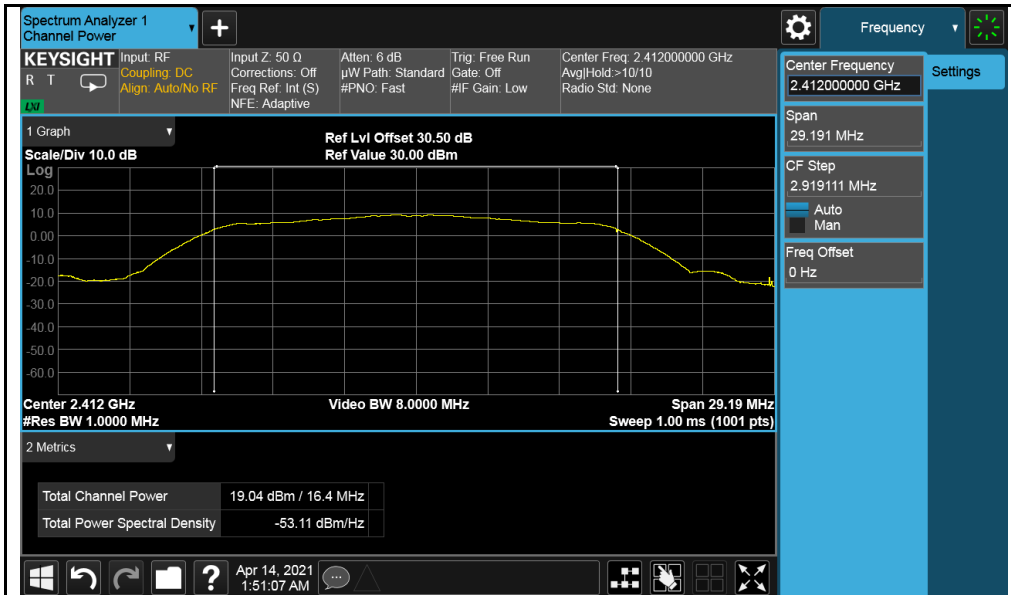

2412MHz

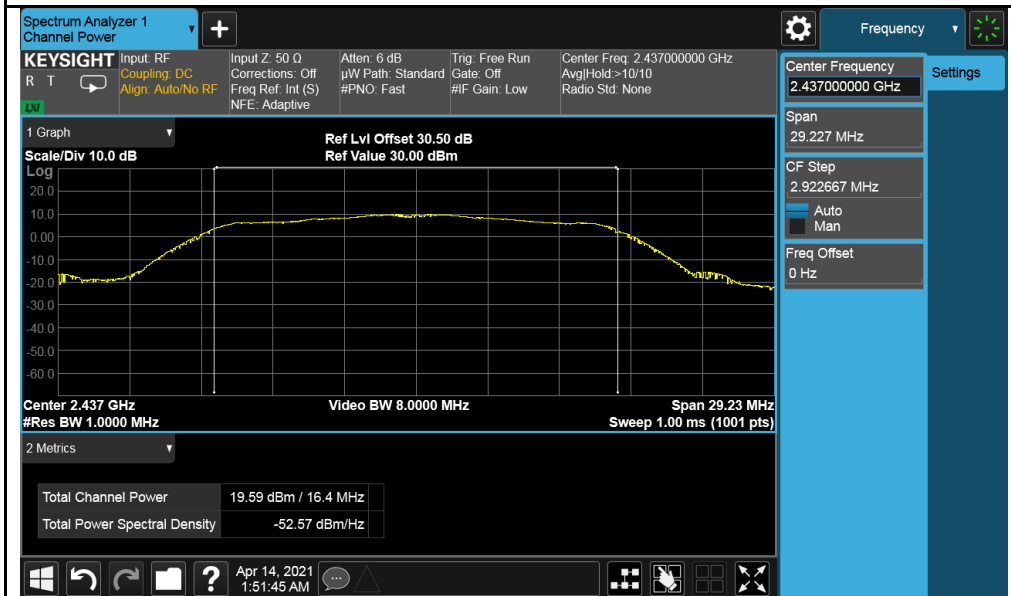



2437MHz

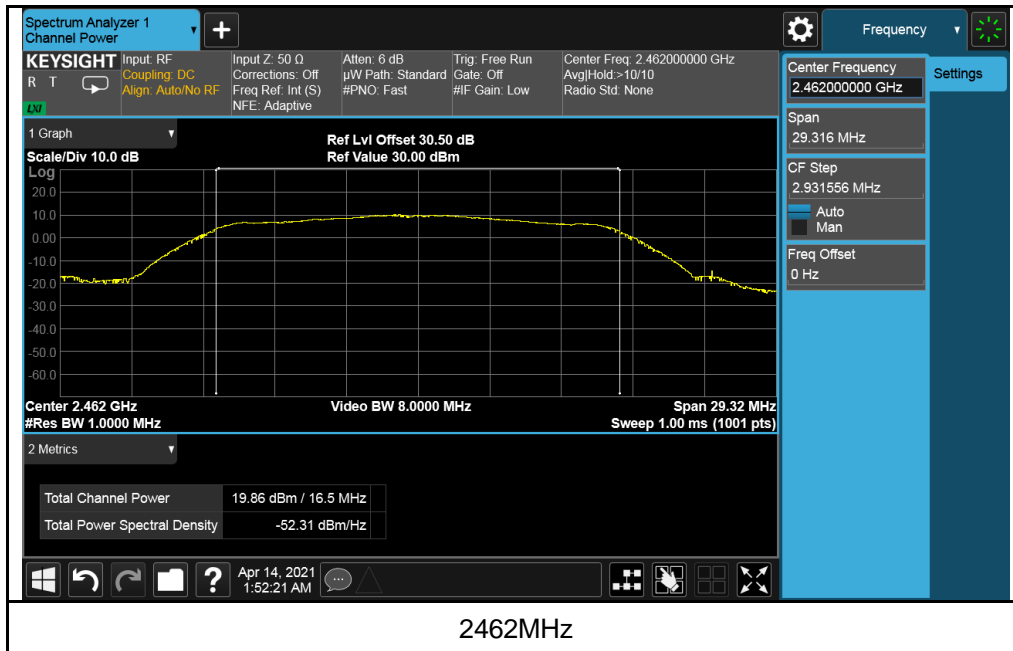


802.11n-HT20

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	19.00	30	Pass
6	2437	19.59	30	Pass
11	2462	20.05	30	Pass

Test Plots:

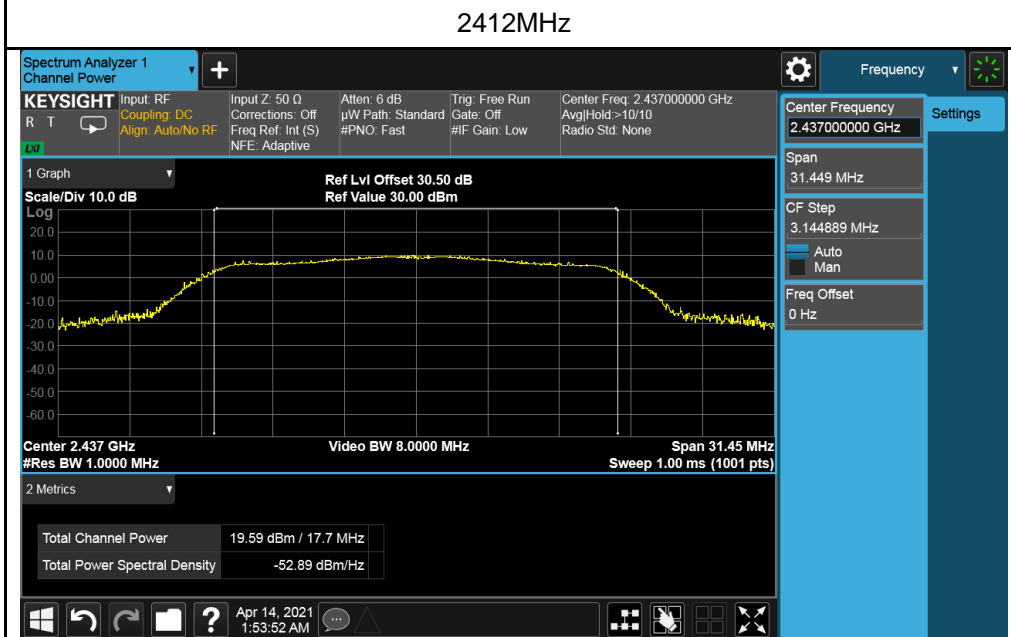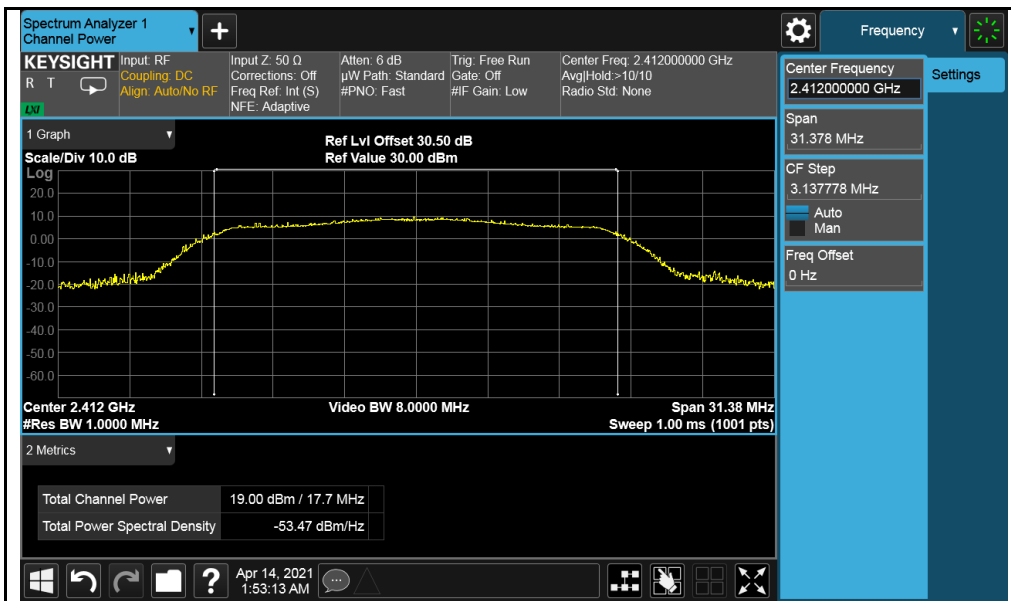

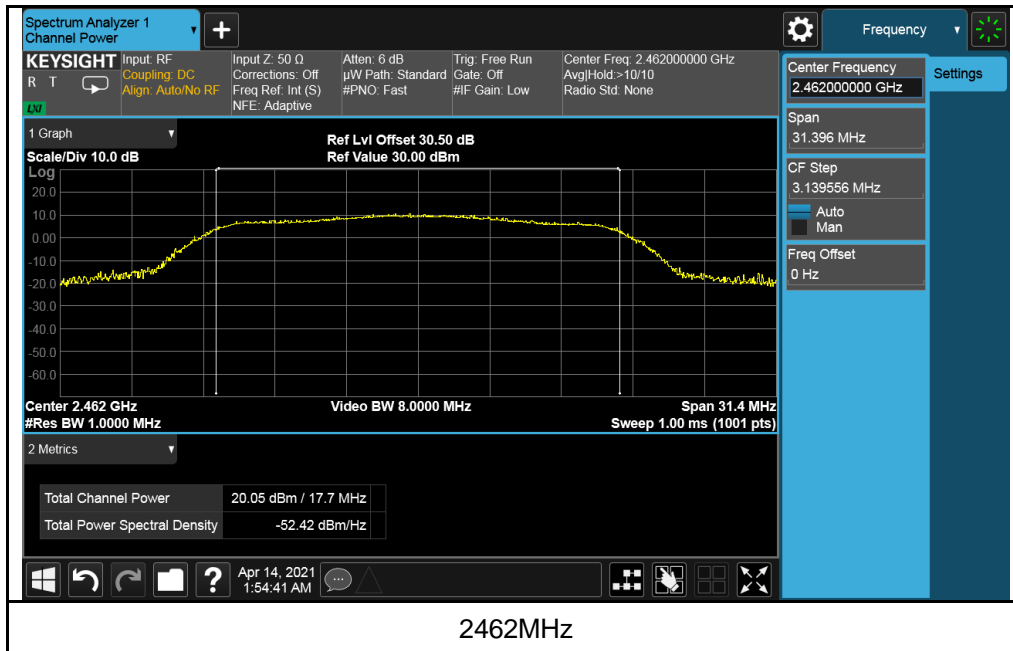


4.4 Power Spectral Density Measurement

4.4.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Condition


Same as Item 4.3.6

4.4.7 Test Results

802.11b

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
1	2412	-9.47	8	Pass
6	2437	-9.14	8	Pass
11	2462	-8.49	8	Pass


Test Plots:

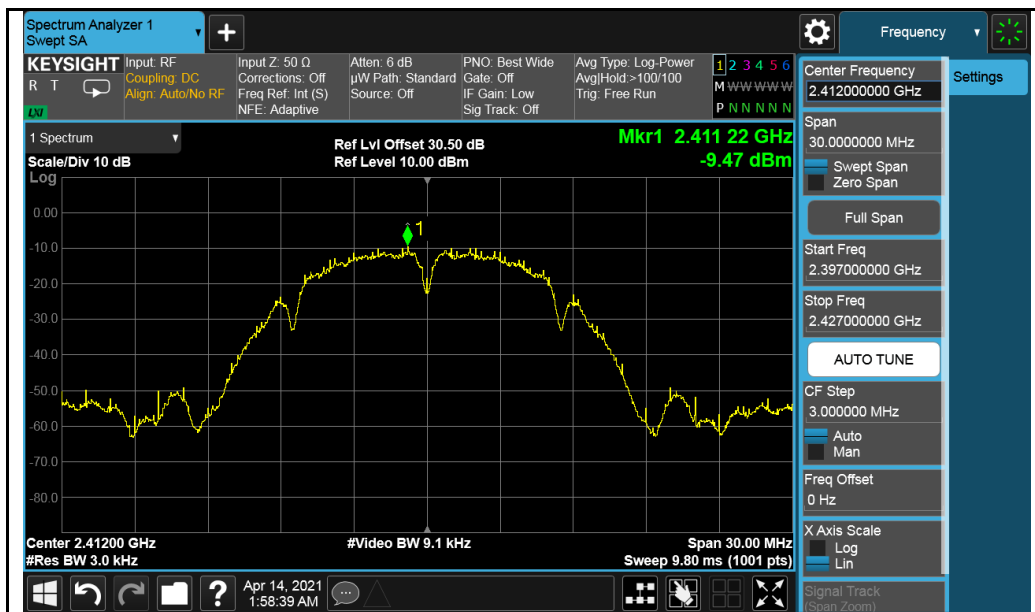

2412MHz




2437MHz

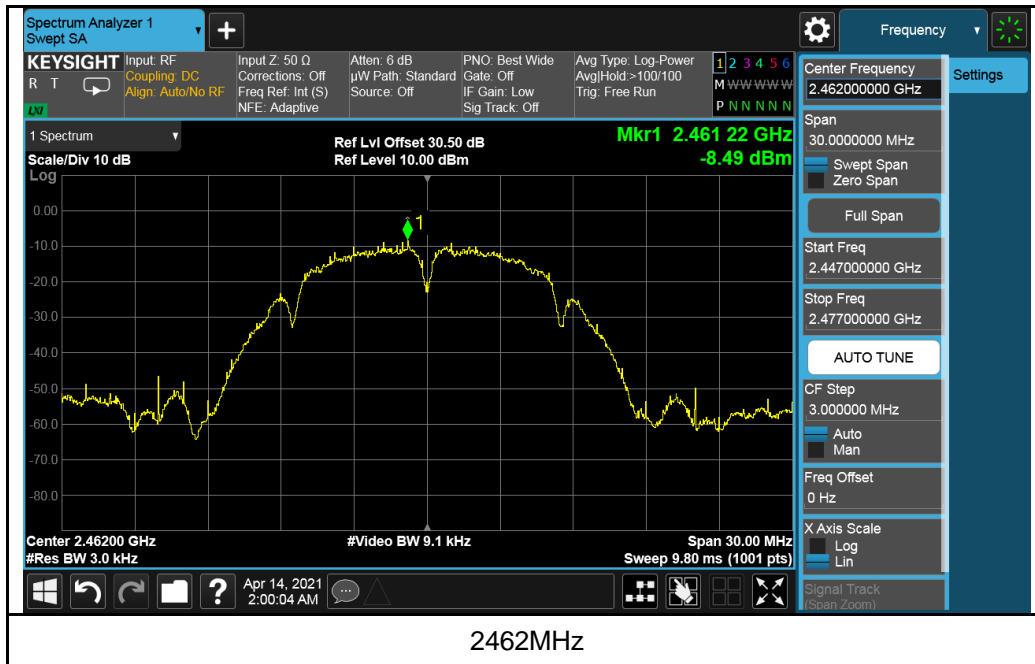


802.11g

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
1	2412	-11.40	8	Pass
6	2437	-10.79	8	Pass
11	2462	-10.64	8	Pass


Test Plots:

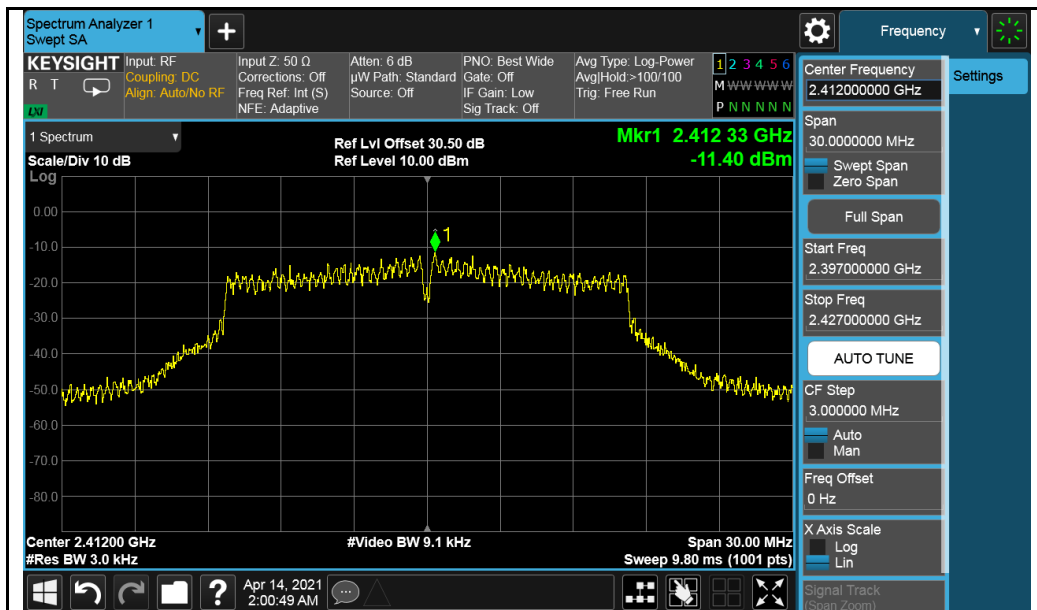

2412MHz

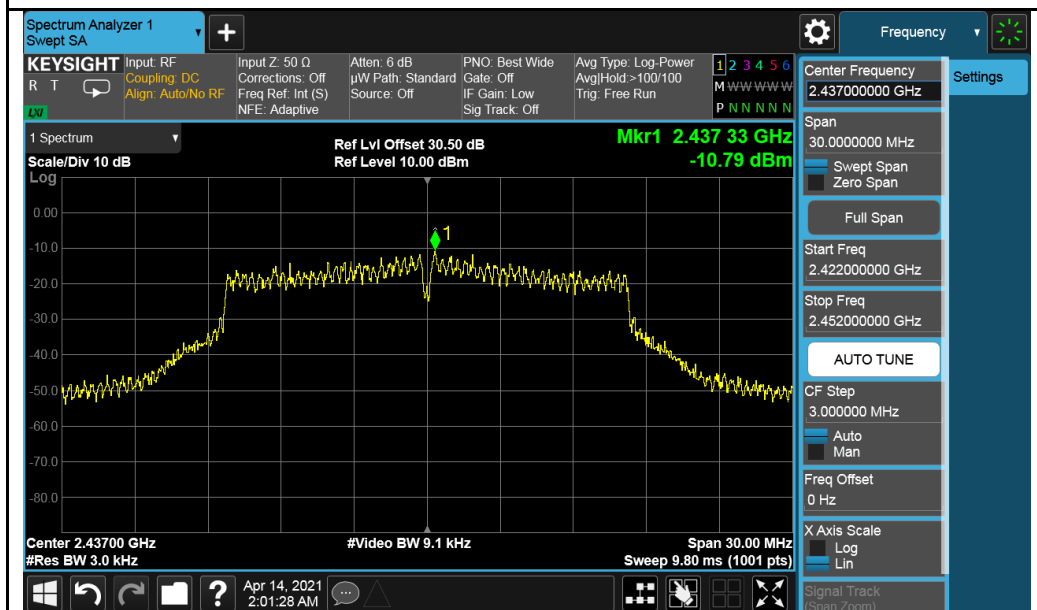



2437MHz

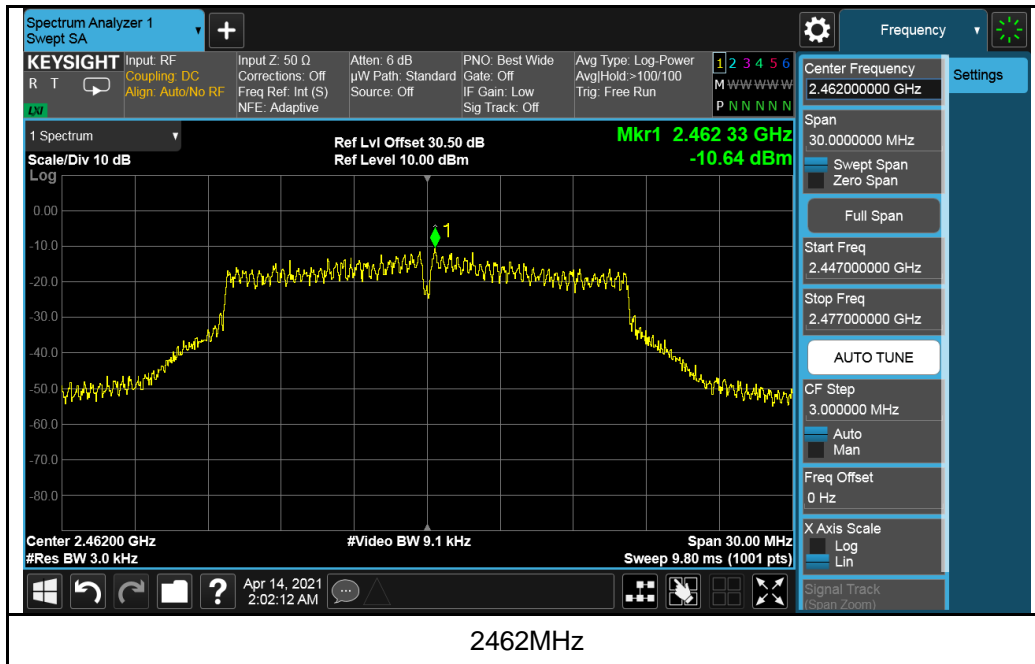


802.11n-HT20

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
1	2412	-11.11	8	Pass
6	2437	-10.42	8	Pass
11	2462	-10.24	8	Pass

Test Plots:

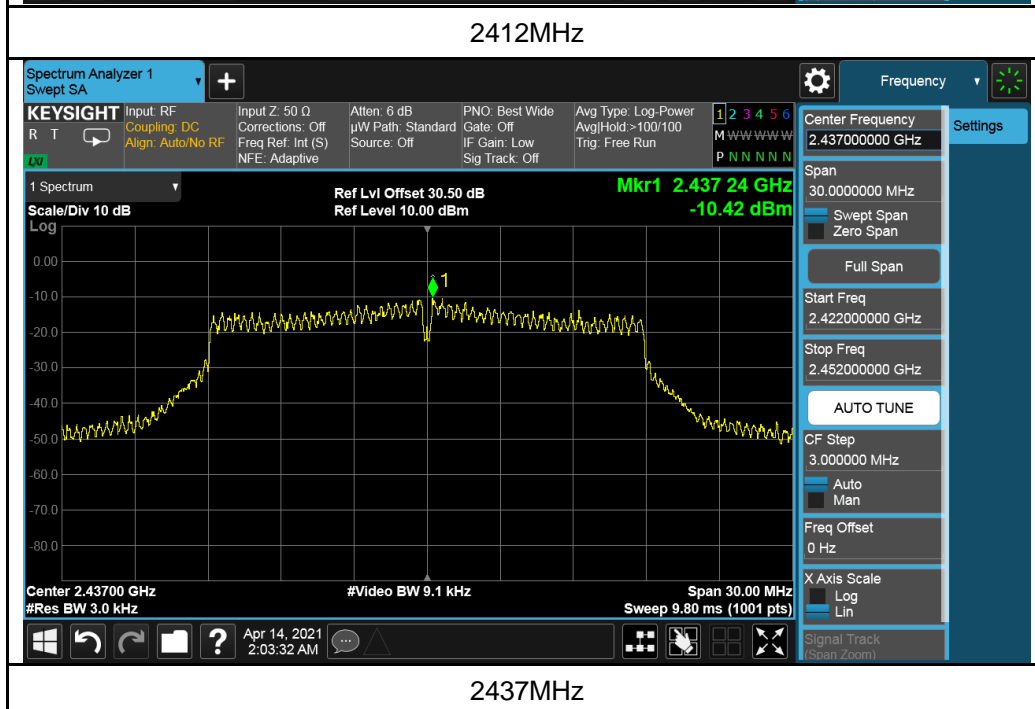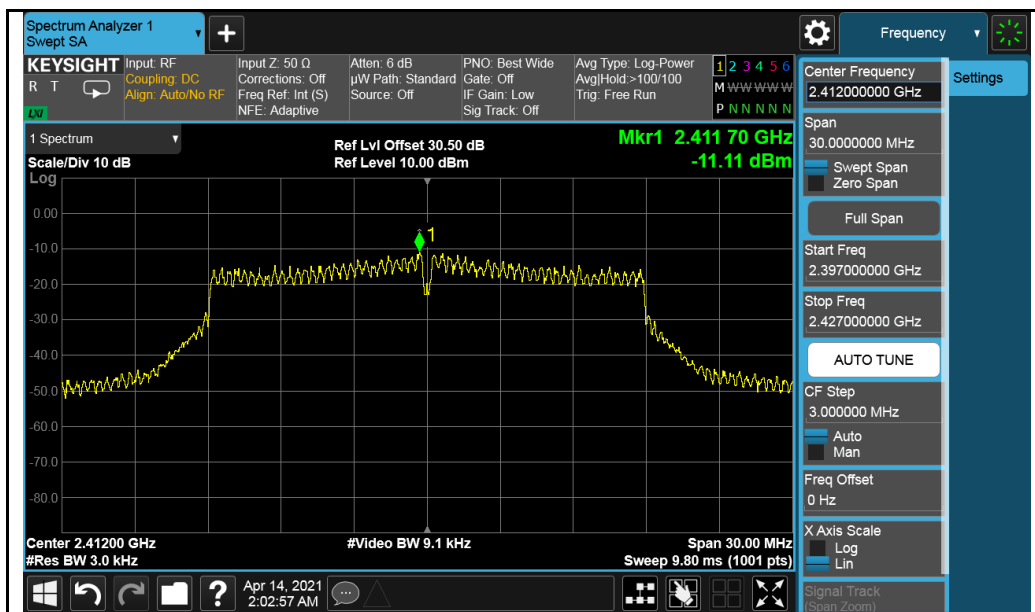

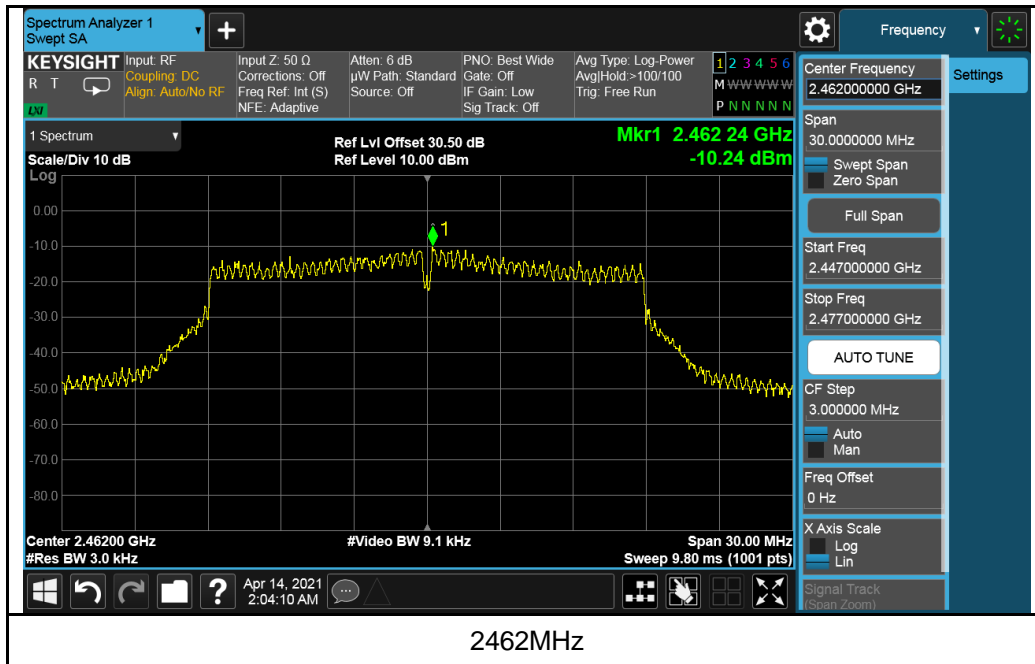


2462MHz

4.5 Conducted Out of Band Emission Measurement

4.5.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard



No deviation.

4.5.6 EUT Operating Condition


Same as Item 4.3.6

4.5.7 Test Results


802.11b

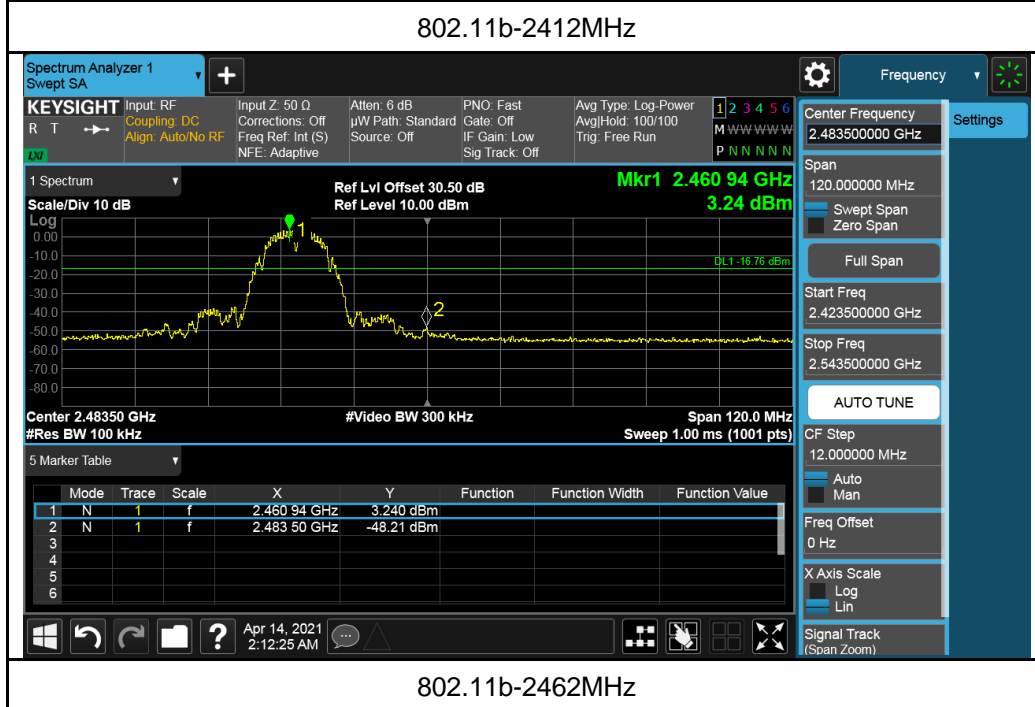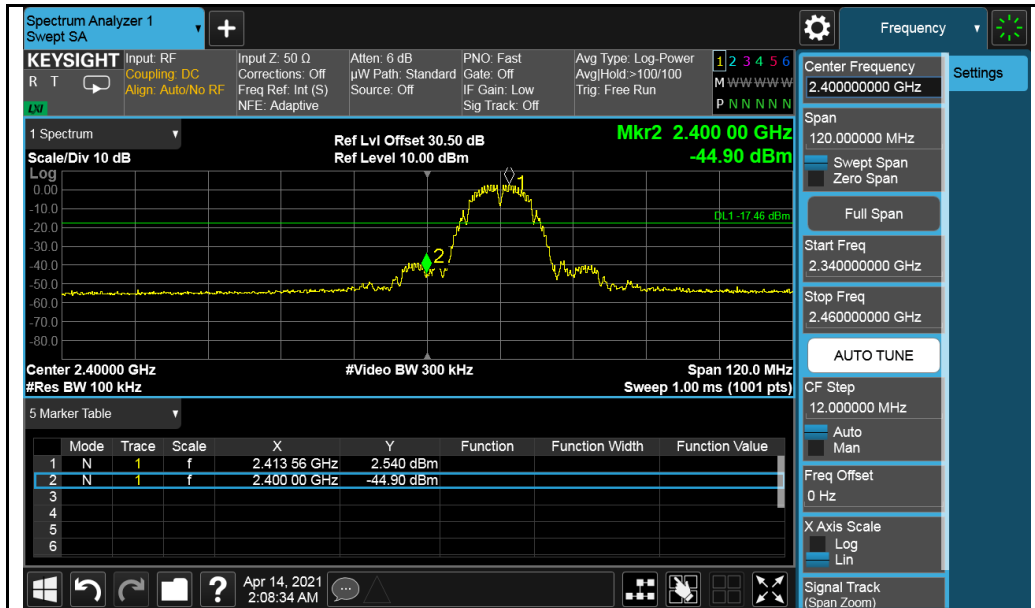

802.11g

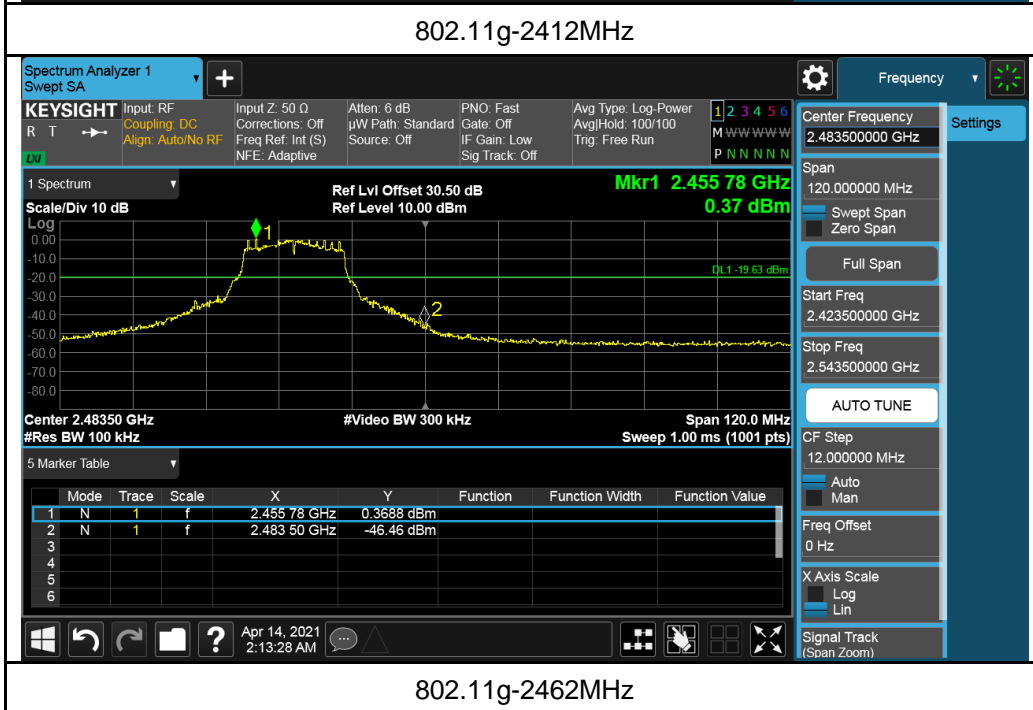

802.11n-HT20

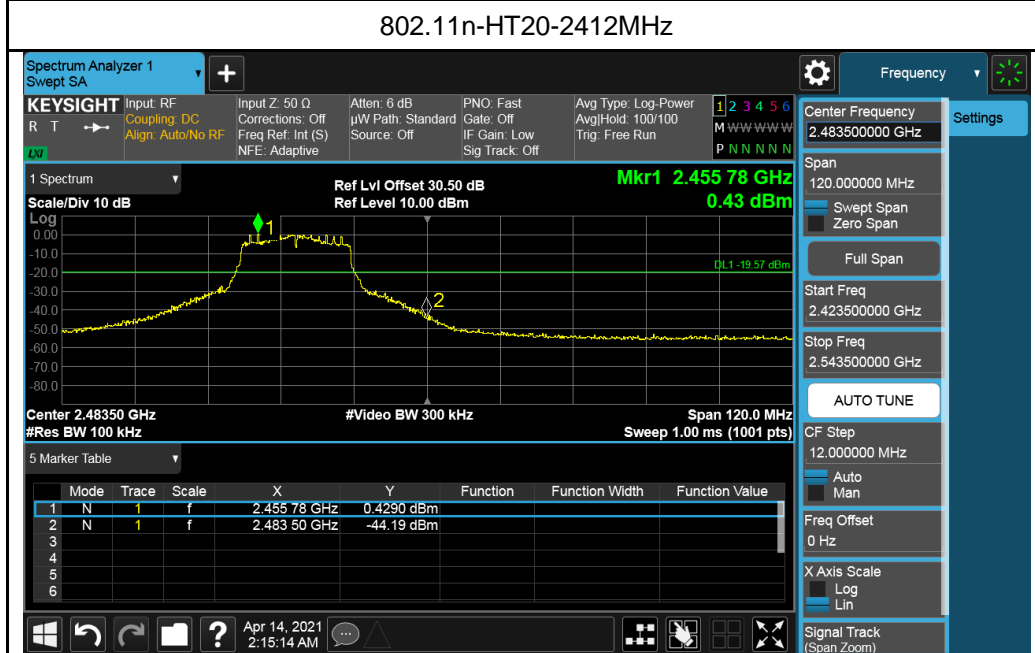

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

Bureau Veritas is a global leader in testing, inspection and certification (TIC) services. We help businesses improve safety, sustainability and productivity; and our clients include the majority of leading brands in retail, manufacturing and other industries. With a presence in every major country around the world, our quality assurance and compliance solutions are vital in helping our customers enhance product quality and concept-to-consumer journeys. We also assist with increasing speed to market, profitability and brand equity throughout the supply chain. Bureau Veritas is a leading wireless/IoT testing, inspection, audit and certification provider, with a global network of test laboratories to support the IoT industry in areas of connectivity, security, interoperability as well as quality, health & safety, and environmental/chemical requirements.

If you have any comments, please feel free to contact us at the following:

Milpitas EMC/RF/Safety/Telecom Lab

775 Montague Expressway, Milpitas, CA 95035

Tel: +1 408 526 1188

Sunnyvale OTA/Bluetooth Lab

1293 Anvilwood Avenue, Sunnyvale, CA 94089

Tel: +1 669 600 5293

Littleton EMC/RF/Safety/Environmental Lab

1 Distribution Center Cir #1, Littleton, MA 01460

Tel: +1 978 486 8880

Email: sales.eaw@us.bureauveritas.com

Web Site: www.cpsusa-bureauveritas.com

The address and road map of all our labs can be found in our web site also.

--- END ---