



Regulatory Test Report

Prepared for Harman International Industries, Inc.

This report presents detailed information on

INFO3.6 CSM

Prepared by

Aravind Buddana

Engineer II

Approved by

Jason Kanakry

General Manager

Issue date: 07/20/2023

Report No: AH22100701-HAR-053-TR1 v4

This test result relates only to the described test object.
This document shall not be reproduced, except in full, without the written approval of Bureau Veritas Test Lab.
Customer must not use this test report as the product certification of each accreditation body or each national organization.
The test is traceable to national standard or related international standard

Contents

1. Test Request Information	3
2. Test Laboratory Information	4
3. Statement of Conformity	5
4. Conducted Testing	6
5. Radiated Testing	37

1. Test Request Information

Test Request #:	7700182604
Test Requested By:	Mark Bowman Harman International Industries, Inc. 30001 Cabot Drive, Novi, MI 48377
Test item Description:	INFO3.6 CSM
Part Number:	8457687
DUT Sample Number:	AH22100701-HAR-053#1, AH22100701-HAR-053#4, AH22100701-HAR-053#5
Hardware Version of DUT:	PV
Software Version of DUT:	17.80.200.219
Component Category of DUT:	N/A
FCC ID:	2AHPN-BE2866
ISED ID:	6434C-BE2866
Type of Test:	FCC/ISED Certification
Test Method:	CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2, ISED Canada RSS-GEN Issue 5, FCC KDB 558074 D01 15.247 Measurement Guidance v05r02 and ANSI C63.10-2013
Deviations from standard:	None
Approved Test Plan Number:	N/A
Test Plan Revision:	N/A
Date Test Sample Received:	10-07-2022
Date Test Started:	10-17-2022
Date Test Finished:	12-28-2022

2. Test Laboratory Information

Location of Test Lab:	The radiated and conducted emissions test sites are located at Bureau Veritas 815 N. Opdyke Rd #100, Auburn Hills, MI 48326, Phone: +1-248-836-4700
Key Contact:	Jason Kanakry (General Manager) Jason.Kanakry@BureauVeritas.com Phone: +1-248-836-4747
Laboratory Accreditations:	BUREAU VERITAS CONSUMER PRODUCTS SERVICES, INC is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.
ISO/IEC 17025:2017:	5678.01
FCC Test Site Number:	US1278 (242530)
IC Test Site Number:	US0229 (26240)

3. Statement of Conformity

RSS-GEN	RSS 247	Part 15	Comments
6.4		15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
		15.19	The label shown in the label exhibit.
		15.21	Information to the user shown in the instruction manual exhibit.
		15.27	No special accessories are required for compliance.
3.2		15.31	The EUT tested in accordance with the measurement standards in this section.
6.13.2		15.33	Frequency range investigated according to this section, unless noted in specific rule section under which the equipment operates.
6.13.1		15.35	The EUT emissions measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
6.8		15.203	EUT employs integrated PCB antenna with 2.57dBi gain.
8.10		15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-GEN as applicable
8.8		15.207	N/A. EUT is vehicle battery powered only.

4. Conducted Testing

4.1 Test Summary

This test report supports an application for certification of a transmitter operating pursuant to: **CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2**. The product is **INFO3.6 CSM** a direct sequence spread spectrum transmitter that operates in the 2412-2462MHz frequency range.

Details	Description
Frequency Range (MHz)	2412 – 2462
Tested Modes	802.11b, 802.11g, 802.11n (HT20).
Number of Channels	11
Tested Channels	1, 6 ,11
DUT Antenna Type	Integrated PCB antenna
Number of transmit Chains	1
Equipment Type	Equipment with wideband modulation other than frequency hopping
DUT Antenna Gain	2.57dBi <input checked="" type="checkbox"/> Provided by Customer with Gain Report <input type="checkbox"/> Not Provided by Customer

Channels and Frequency

Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

Notes:

1. Channels marked bold were tested.
2. Output power measurements performed at the lowest and highest data rate of each supported 802.11 mode.

Power Settings

802.11b		802.11g	
Channel	Power Setting	Channel	Power Setting
1	15	1	15
6	15	6	15
11	15	11	15
802.11n (HT20)			
Channel	Power Setting		
1	15		
6	15		
11	15		

Test Results

Test	Frequency (MHz)	802.11b	802.11g	802.11n (HT20)
RF Output Power	2412/2437/2462	PASS	PASS	PASS
Power Spectral Density	2412/2437/2462	PASS	PASS	PASS
DTS Bandwidth (6dB)	2412/2437/2462	PASS	PASS	PASS
Occupied Channel Bandwidth 99%	2412/2437/2462	PASS	PASS	PASS
Band Edges Low	2412	PASS	PASS	PASS
Band Edges High	2462	PASS	PASS	PASS
Conducted Spurious Emissions	2412/2437/2462	PASS	PASS	PASS


We found that the product met the requirements. Test samples received in good condition and remains good and functional post testing.

Test Item	Sample #	Result
FCC 15.247 2.4G WLAN	AH22100701-HAR-053#1	Meets Requirements


4.2 Test Setup

Conducted Test Site Description

The site is accommodated to test tabletop and floor standing test equipment.

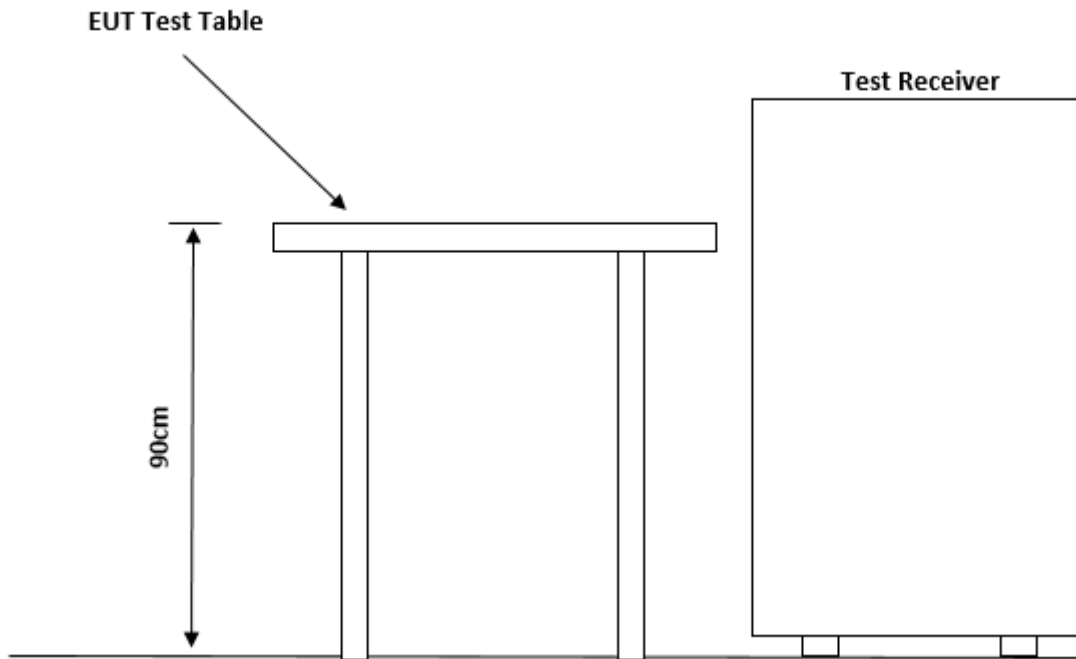

TEST SETUP DIAGRAM

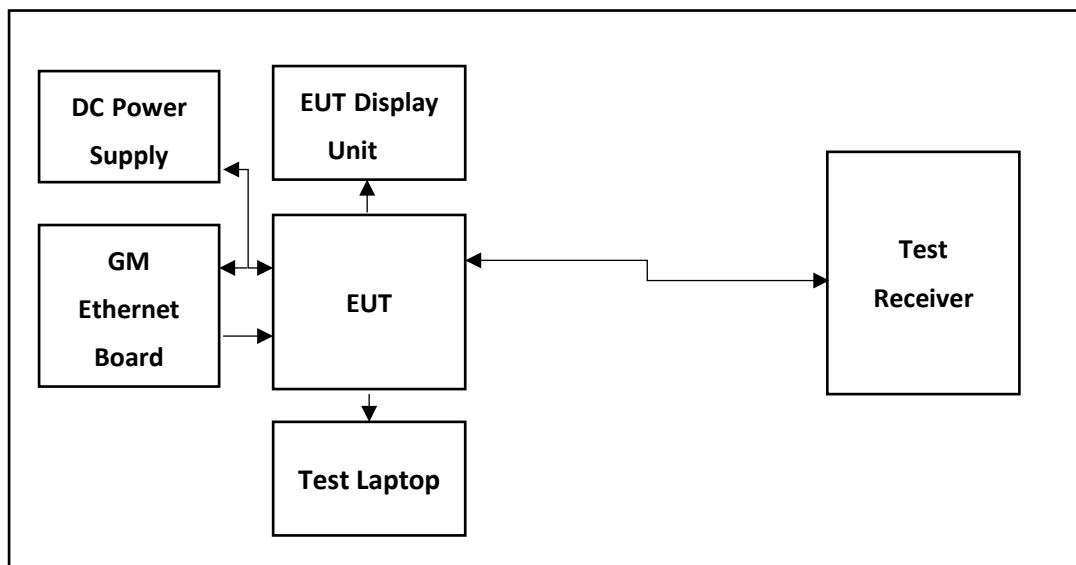

4.3 Test Equipment Used

ID #	Equipment	Manufacturer	Model #	Serial #	Cal Due
BVD0226	Spectrum Analyzer 10Hz-44GHz	Rohde & Schwarz	FSV3044	101018	4/20/2024
BVD0227	8 port switch unit for Wireless Test system	Rohde & Schwarz	OSP150	101100	11/24/2025
BVD0228	8 port switch unit for Wireless Test system	Rohde & Schwarz	OSP220	101632	11/14/2025
BVD0224	Signal Generator 100kHz-40GHz	Rohde & Schwarz	SMB100A	181741	4/20/2024
BVD0225	Signal Generator 100k-6GHz with GPS simulator	Rohde & Schwarz	SMW200A	107664	4/20/2023
BVD0250	Wireless Connectivity Tester 70M-6GHz	Rohde & Schwarz	CMW270	102113	4/20/2024
BVD0302	DC power supply 1-15VDC 60A 110/220 11.5A max input	BK Precision	1693	257F17180	N/A
BVD0321	Fixed Attenuator 2W 20dB -40GHz	Mini-Circuits	BW-K20-2W44+	2103	3/21/2023
BVD0430	Multimeter	Fluke	117	49710262SV	11/11/2023
BVD0229	Temp and Humidity Meter	Fluke	971	12001009	5/1/2023
N/A	Test-PC	Lenovo ThinkPad	E560	PF0L0N9R	N/A

Notes:- DC power supply verified before use with calibrated Multimeter.

Customer Supplied Equipment

ID #	Equipment	Manufacturer	Model	Serial #	Version No.
N/A	Harness	Harman	N/A	N/A	N/A
N/A	Display Unit	Innolux Corp	INFOMM-15524	0024	N/A
N/A	Ethernet Board	GM	N/A	N/A	CSMate rev.4
N/A	GM BT WLAN Test Tool NXP Chips S/W	Harman	N/A	N/A	2.4

Equipment List (Software)

ID #	Equipment	Manufacturer	Model	Version No	
N/A	EMC Test Software	Rodhe & Schwarz	EMC32	11.20.00	N/A

4.4 Test Data

4.4.1 RF Output Power

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 11.9.2.3.2, RSS-247 5.4 (d)

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.

Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

802.11b

Data Rate	Gated RMS (dBm) 2412 MHz	Gated RMS (dBm) 2437 MHz	Gated RMS (dBm) 2462 MHz	Limit (dBm)	Duty Cycle (%)	Power Setting
1 Mbps	5.704	6.211	6.141	30	99.889	15

802.11g

Data Rate	Gated RMS (dBm) 2412 MHz	Gated RMS (dBm) 2437 MHz	Gated RMS (dBm) 2462 MHz	Limit (dBm)	Duty Cycle (%)	Power Setting
6 Mbps	6.227	6.724	6.774	30	98.850	15

802.11n (HT20)

Data Rate	Gated RMS (dBm) 2412 MHz	Gated RMS (dBm) 2437 MHz	Gated RMS (dBm) 2462 MHz	Limit (dBm)	Duty Cycle (%)	Power Setting
MCS0	6.392	6.855	6.915	30	98.775	15

4.4.2 Power Spectral Density


Test according to FCC title 47 part 15 §15.247(e), KDB 558074 D01 DTS Meas Guidance v05r02 F and ANSI C63.10-2013 Section 11.10.2, RSS-247 5.2 (b)

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 1.3 dB


Mode	Data Rate	PSD (dBm) 2412 MHz	PSD (dBm) 2437 MHz	PSD (dBm) 2462 MHz	Limit (dBm)
802.11b	1 Mbps	-13.521	-12.806	-13.074	8.0

802.11b 2412MHz 1Mbps

Power Spectral Density

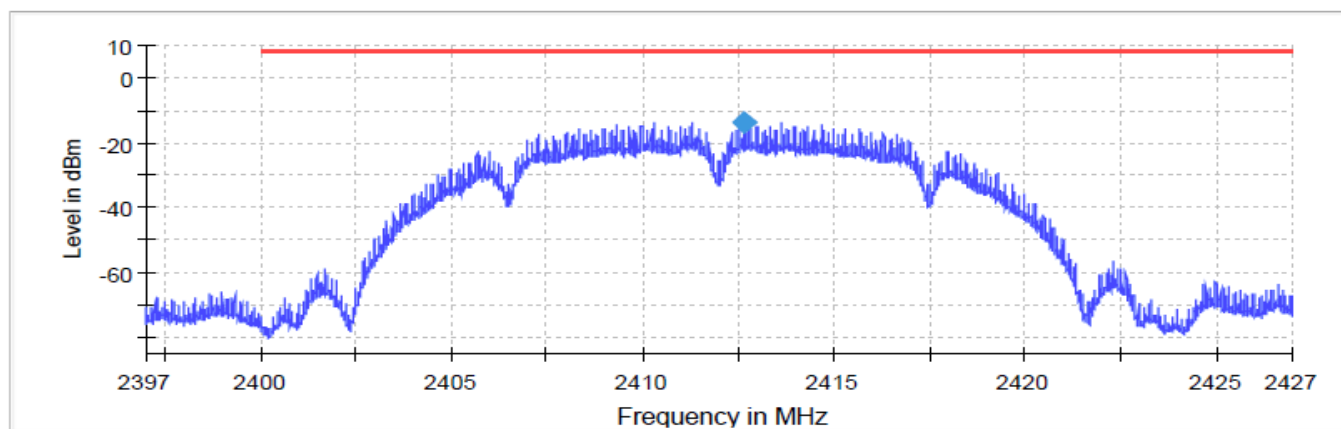


Connector 1 Sum Level Limit PSD

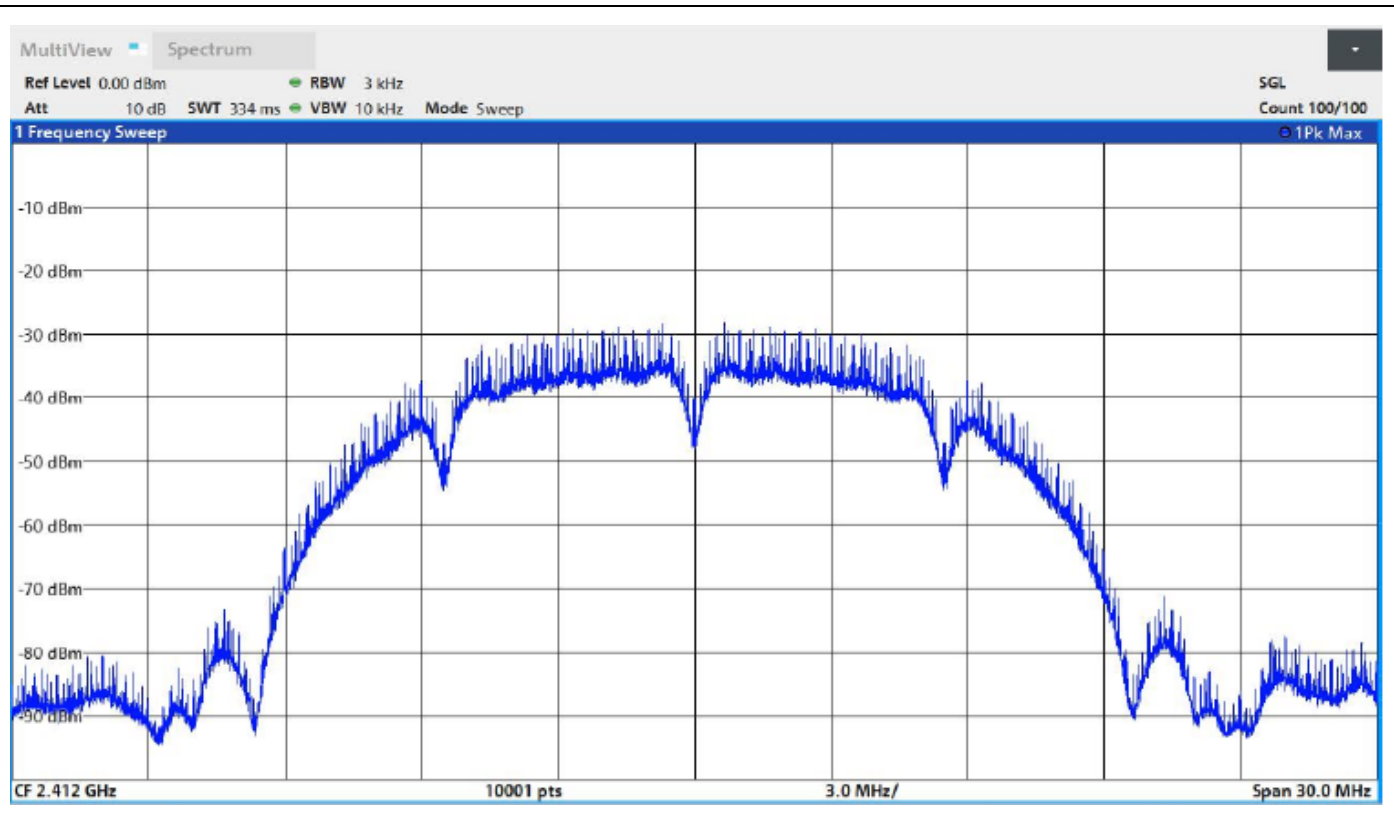

Mode	Data Rate	PSD (dBm) 2412 MHz	PSD (dBm) 2437 MHz	PSD (dBm) 2462 MHz	Limit (dBm)
802.11g	6 Mbps	-18.612	-18.056	-18.108	8.0

802.11g 2412MHz 6Mbps

Power Spectral Density

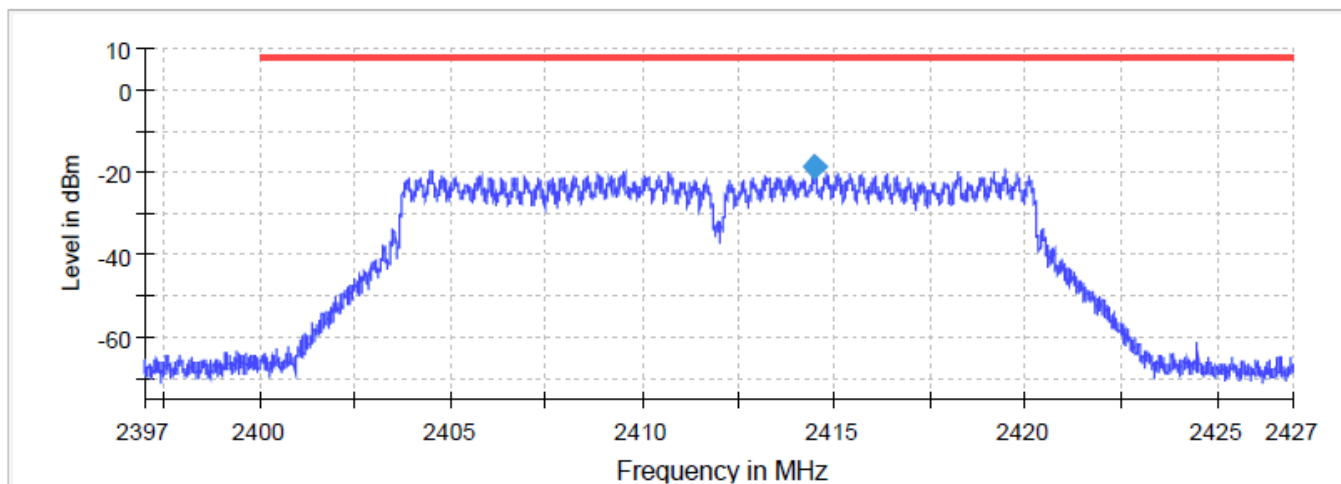

Connector 1 Sum Level Limit PSD


MultiView Spectrum

Ref Level 0.00 dBm RBW 3 kHz
 Att 10 dB SWT 334 ms VBW 10 kHz Mode Sweep

SGL
 Count 100/100

1 Frequency Sweep

1Pk Max


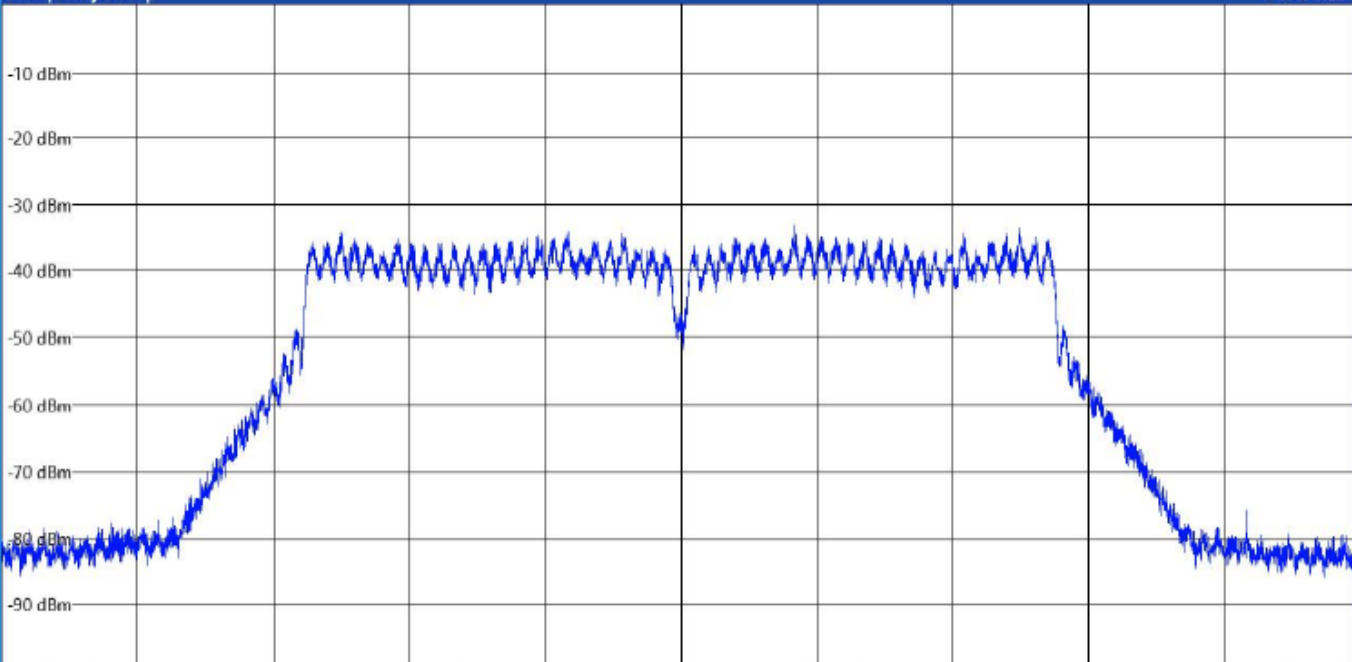


CF 2.412 GHz 10001 pts 3.0 MHz/ Span 30.0 MHz

Mode	Data Rate	PSD (dBm) 2412 MHz	PSD (dBm) 2437 MHz	PSD (dBm) 2462 MHz	Limit (dBm)
802.11n	MCS0	-18.639	-17.346	-16.570	8.0

802.11n (HT20) 2412MHz MCS0

Power Spectral Density

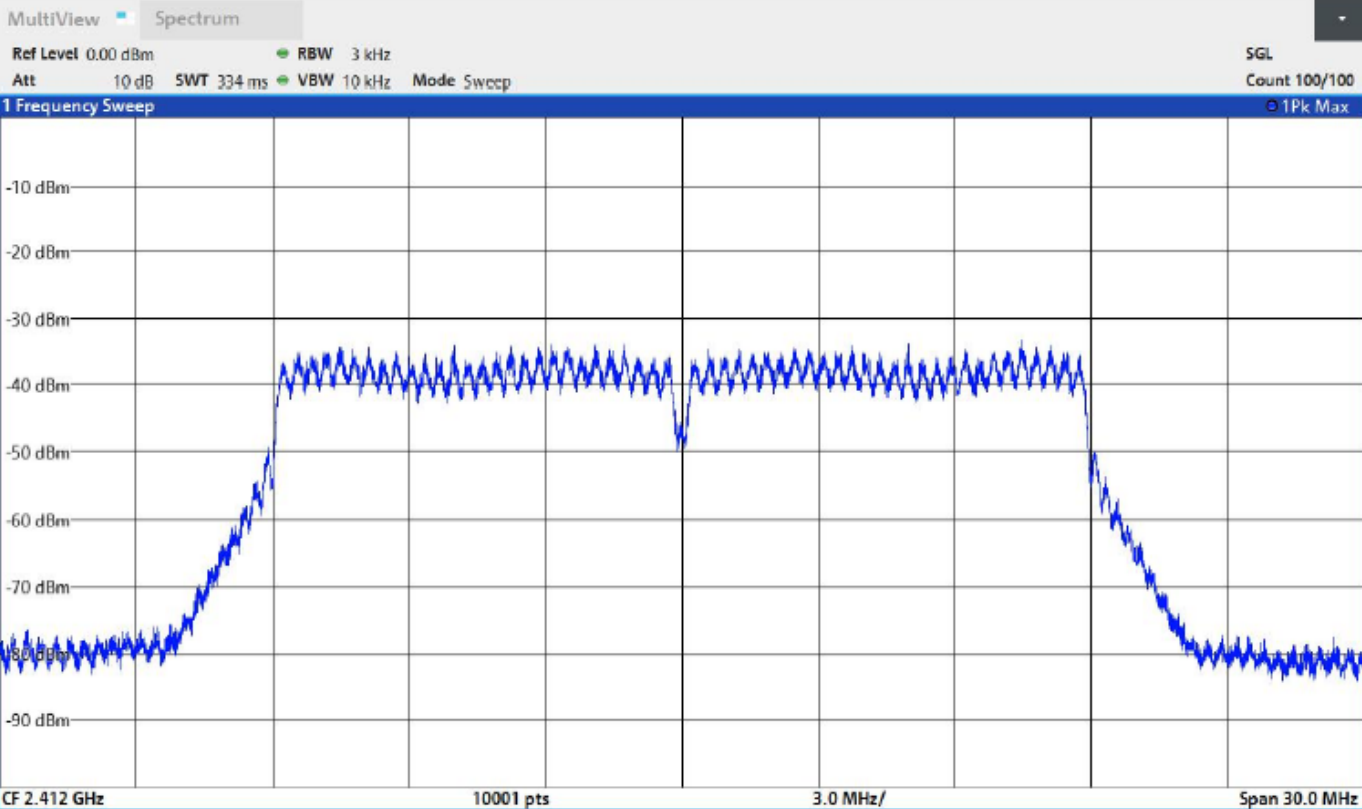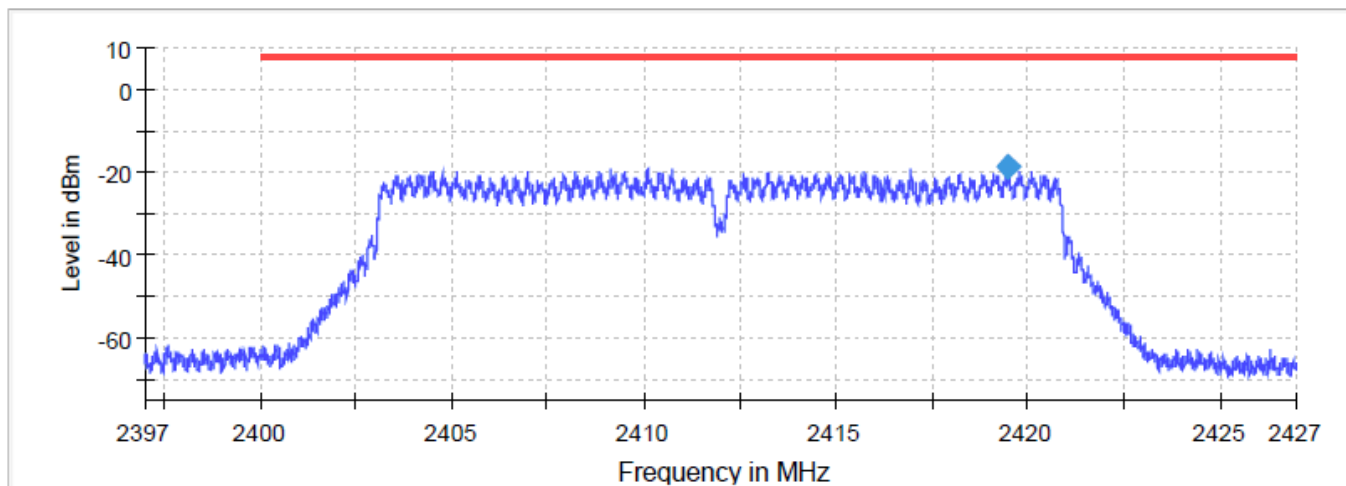



4.4.3 Occupied Channel Bandwidth

Test according to RSS-GEN Section 6.7, KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013,
Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 2%

Data Rate	DUT Frequency (MHz)	Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
802.11b 1Mbps	2412.000000	13.500000	2405.250000	2418.750000
802.11g 6Mbps	2412.000000	16.700000	2403.650000	2420.350000
802.11n (HT20) MCS0	2412.000000	17.700000	2403.150000	2420.850000
802.11b 1Mbps	2437.000000	13.400000	2430.250000	2443.650000
802.11g 6Mbps	2437.000000	16.600000	2428.650000	2445.250000
802.11n (HT20) MCS0	2437.000000	17.600000	2428.150000	2445.750000
802.11b 1Mbps	2462.000000	13.300000	2455.350000	2468.650000
802.11g 6Mbps	2462.000000	16.700000	2453.650000	2470.350000
802.11n (HT20) MCS0	2462.000000	17.700000	2453.150000	2470.850000



802.11b 1Mbps 2412MHz

99 % Bandwidth

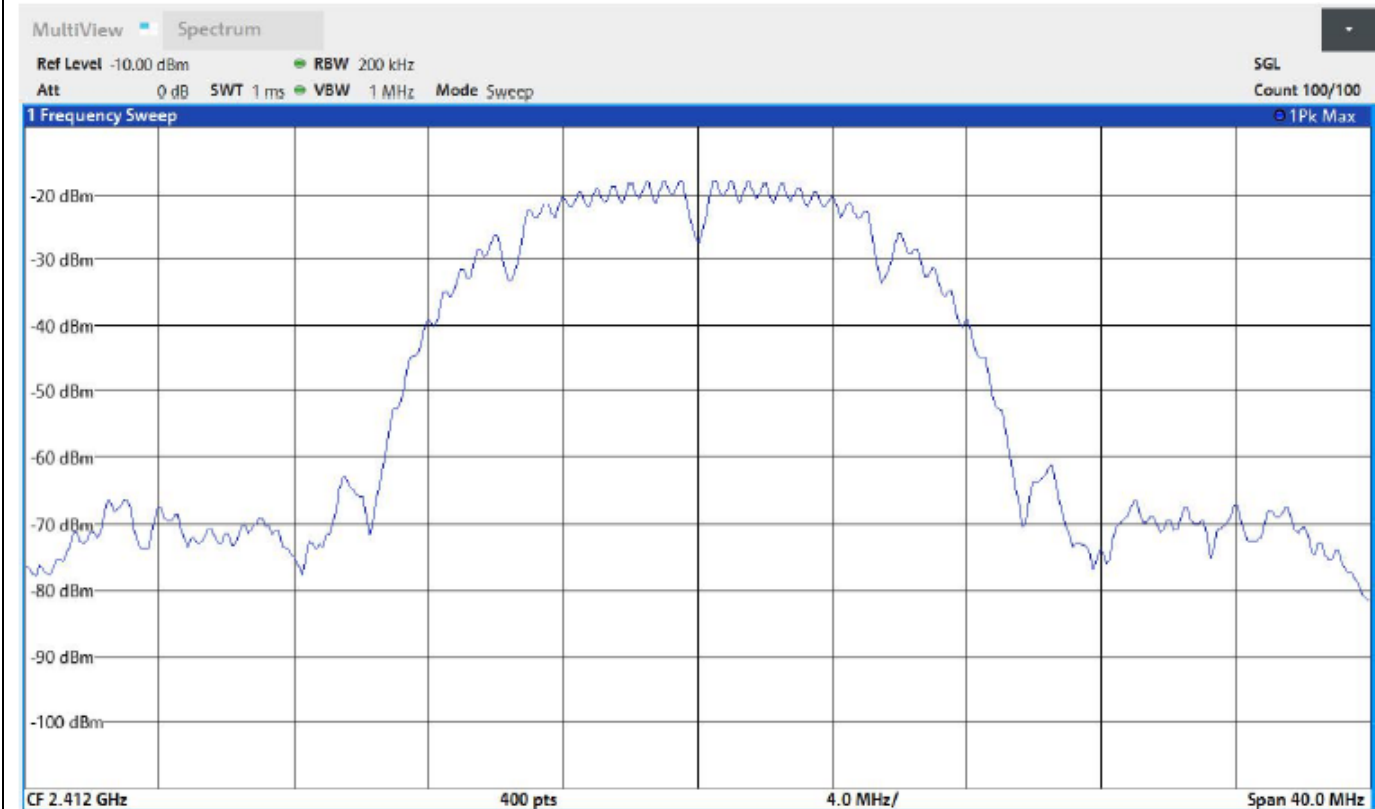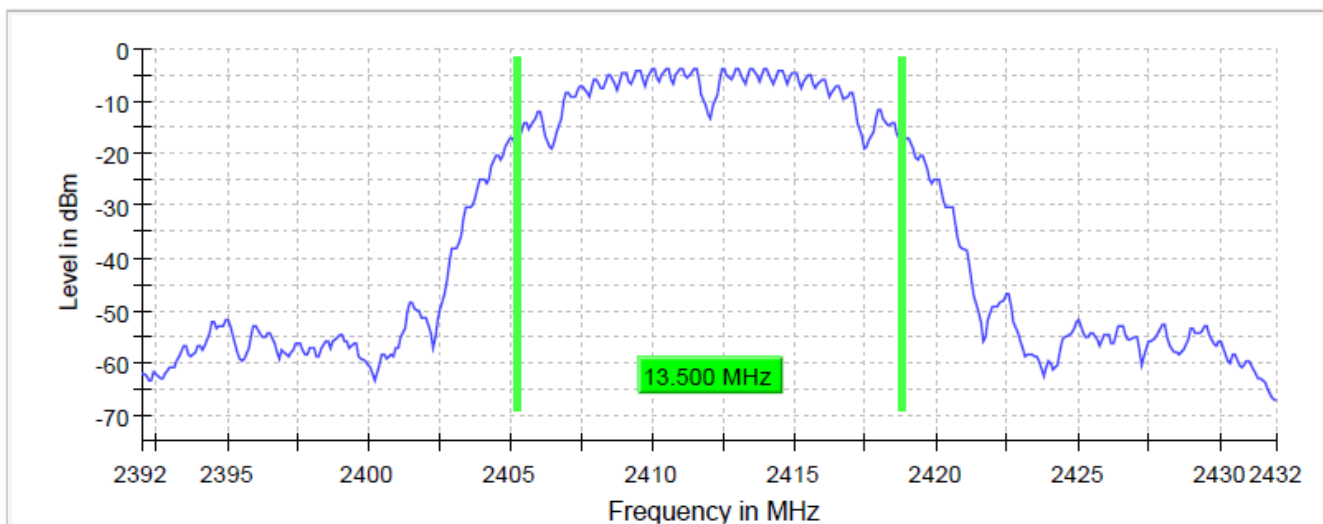



802.11g 6Mbps 2412MHz

99 % Bandwidth

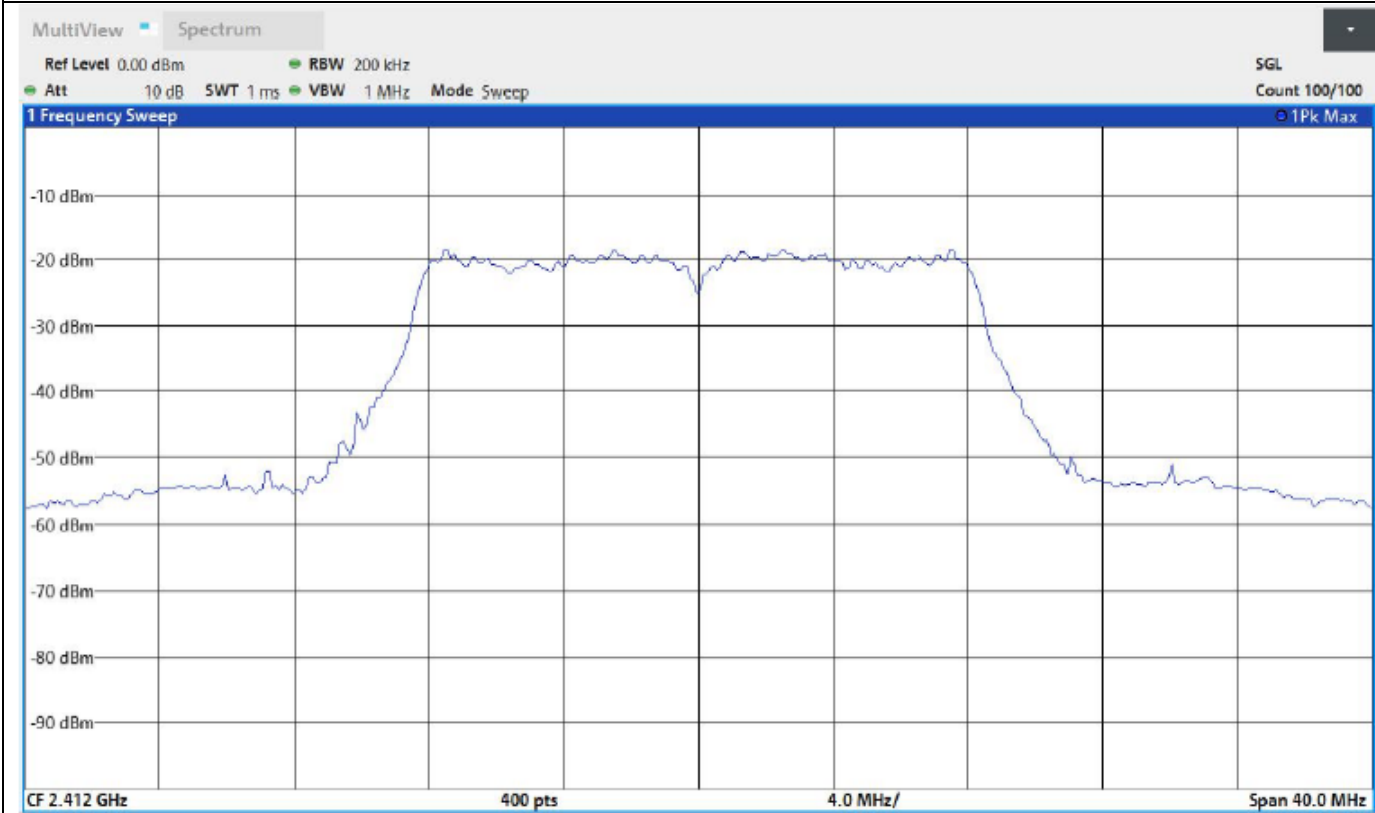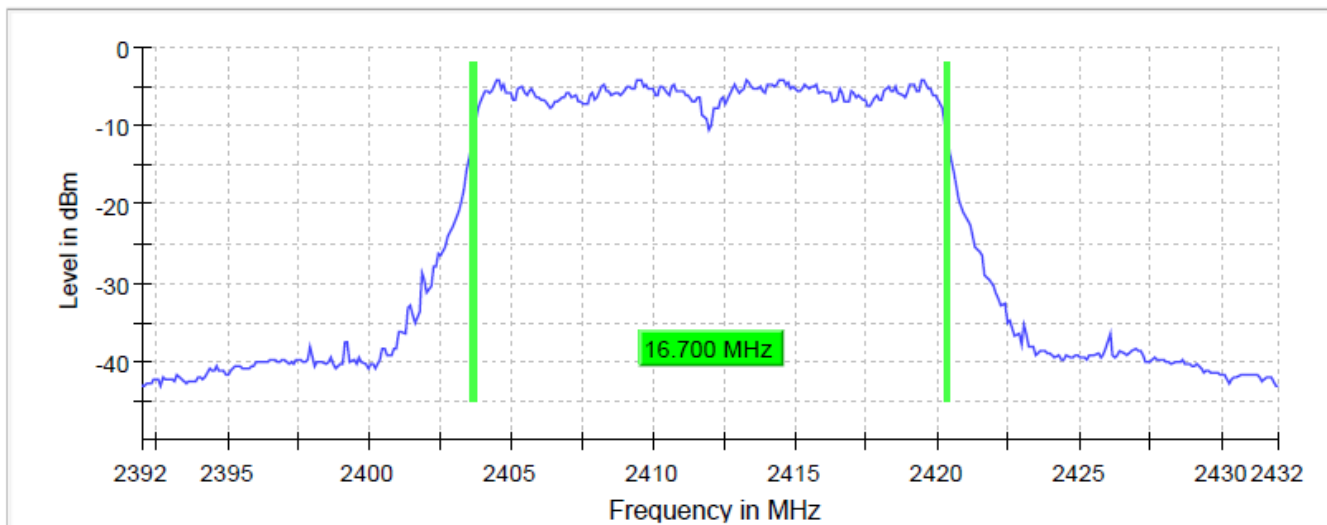

802.11n MCS0 2412MHz

99 % Bandwidth

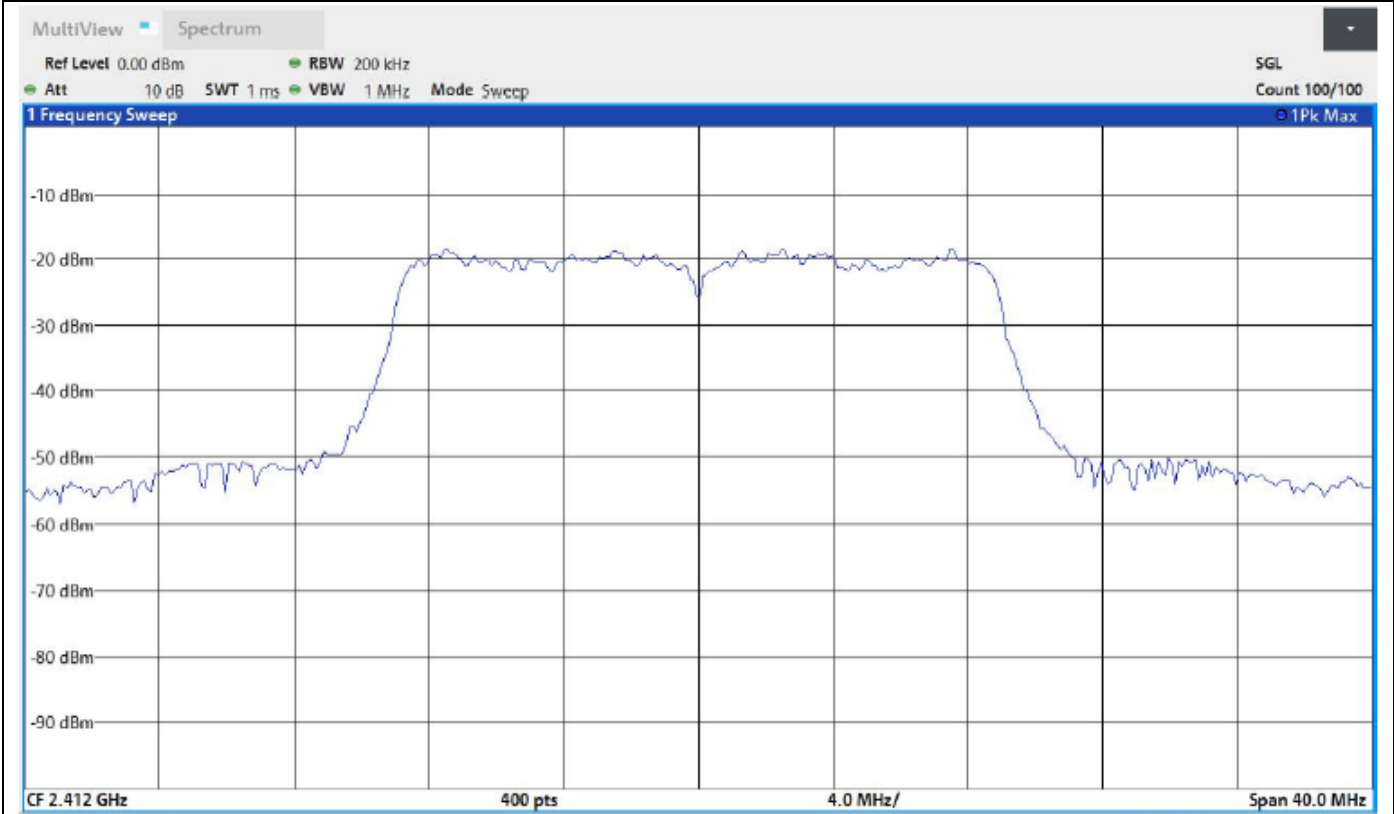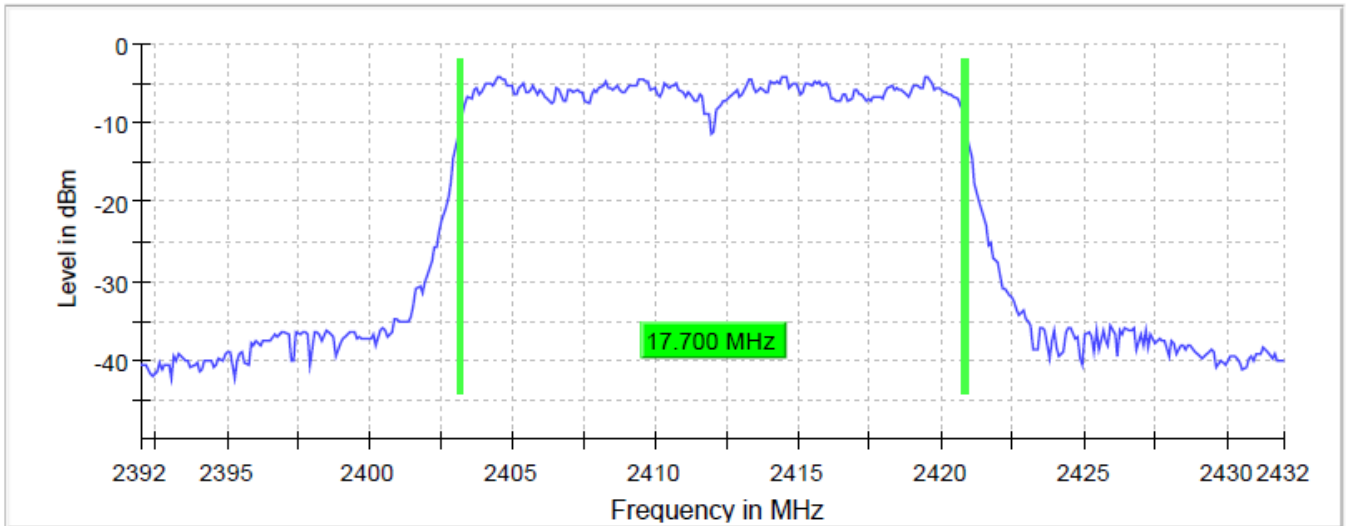

4.4.4 DTS Bandwidth (6dB)



Definition: Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v05r02 and ANSI C63.10-2013 11.8.1, RSS-247 5.2(a)

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 2%

Data Rate	DUT Frequency (MHz)	Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Minimum Limit (MHz)
802.11b 1Mbps	2412.000000	10.150000	2406.875000	2417.025000	0.500000
802.11g 6Mbps	2412.000000	16.450000	2403.725000	2420.175000	0.500000
802.11n (HT20) MCS0	2412.000000	17.650000	2403.125000	2420.775000	0.500000
802.11b 1Mbps	2437.000000	10.150000	2431.875000	2442.025000	0.500000
802.11g 6Mbps	2437.000000	16.450000	2428.725000	2445.175000	0.500000
802.11n (HT20) MCS0	2437.000000	17.450000	2428.125000	2445.575000	0.500000
802.11b 1Mbps	2462.000000	10.150000	2456.875000	2467.025000	0.500000
802.11g 6Mbps	2462.000000	16.450000	2453.725000	2470.175000	0.500000
802.11n (HT20) MCS0	2462.000000	17.650000	2453.125000	2470.775000	0.500000



802.11b 2412MHz 1Mbps

6 dB Bandwidth

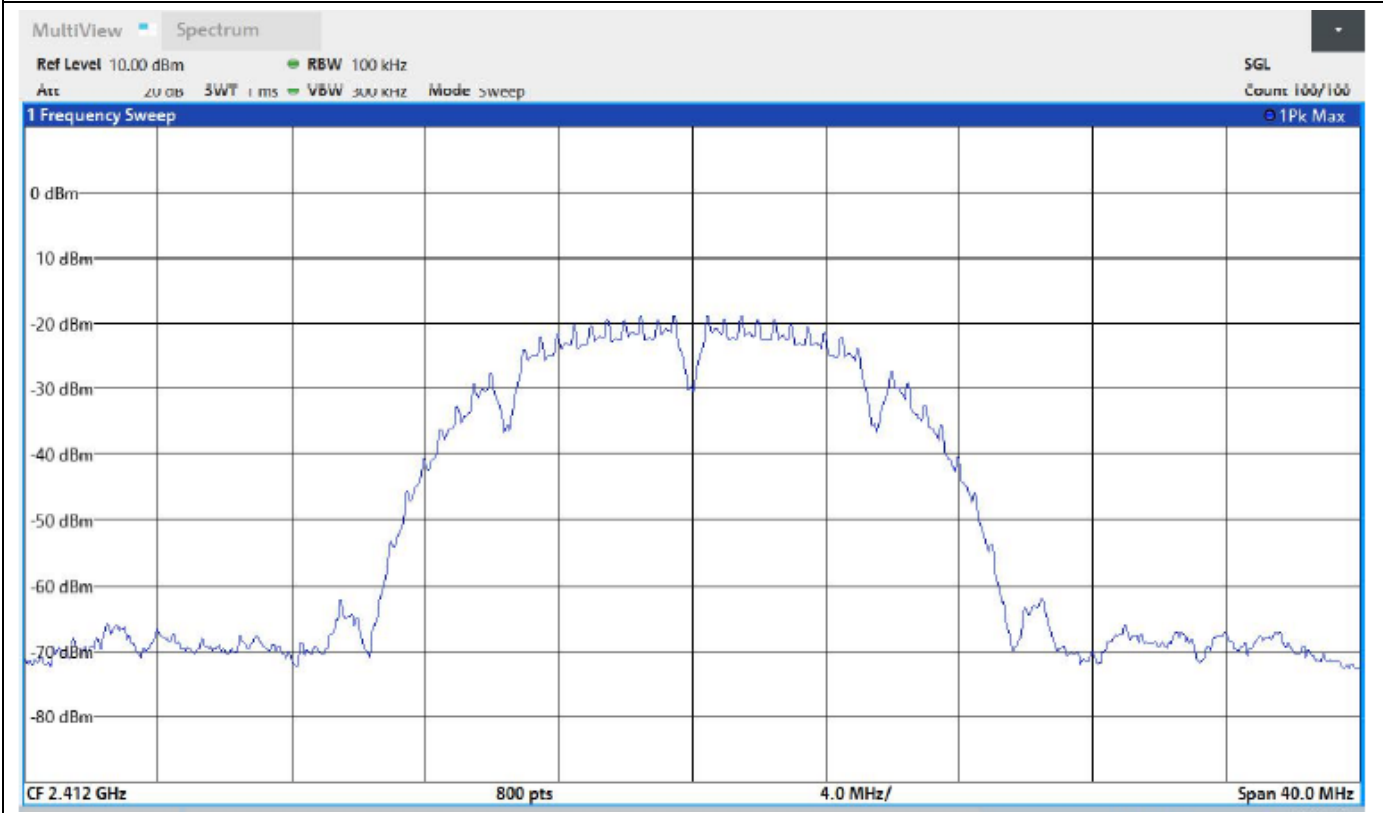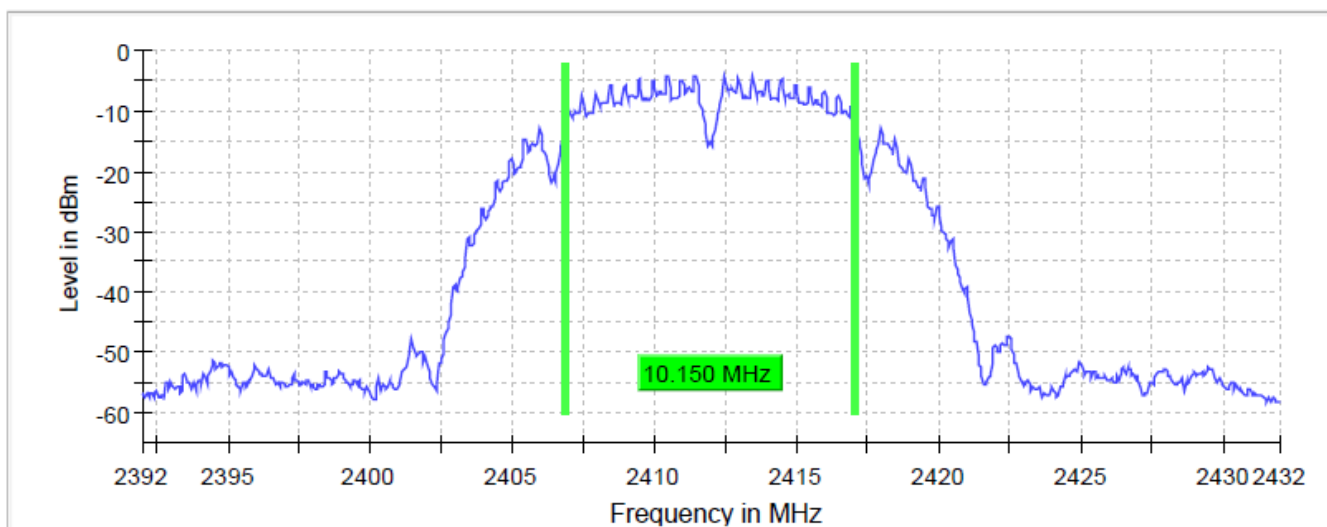



802.11g 2412MHz 6Mbps

6 dB Bandwidth

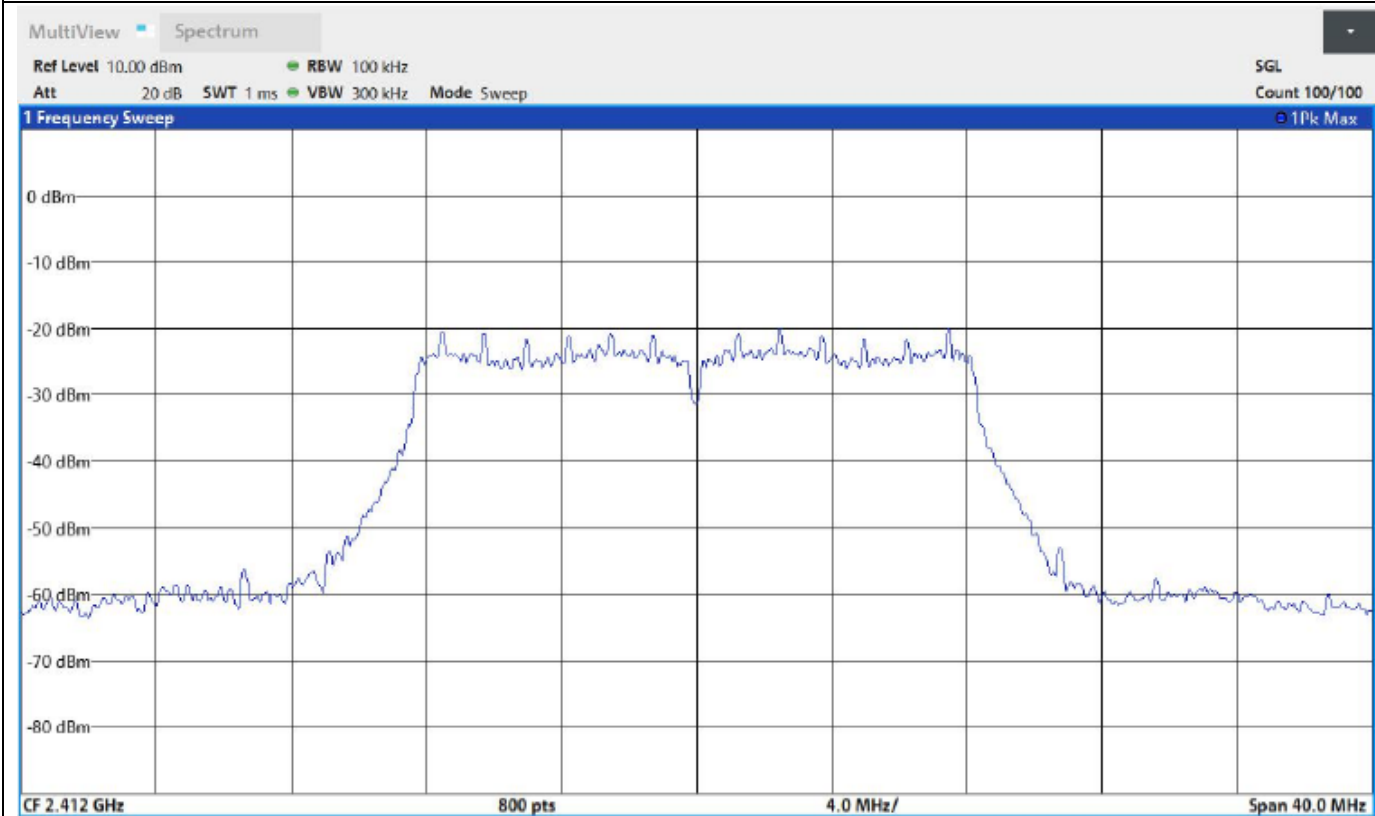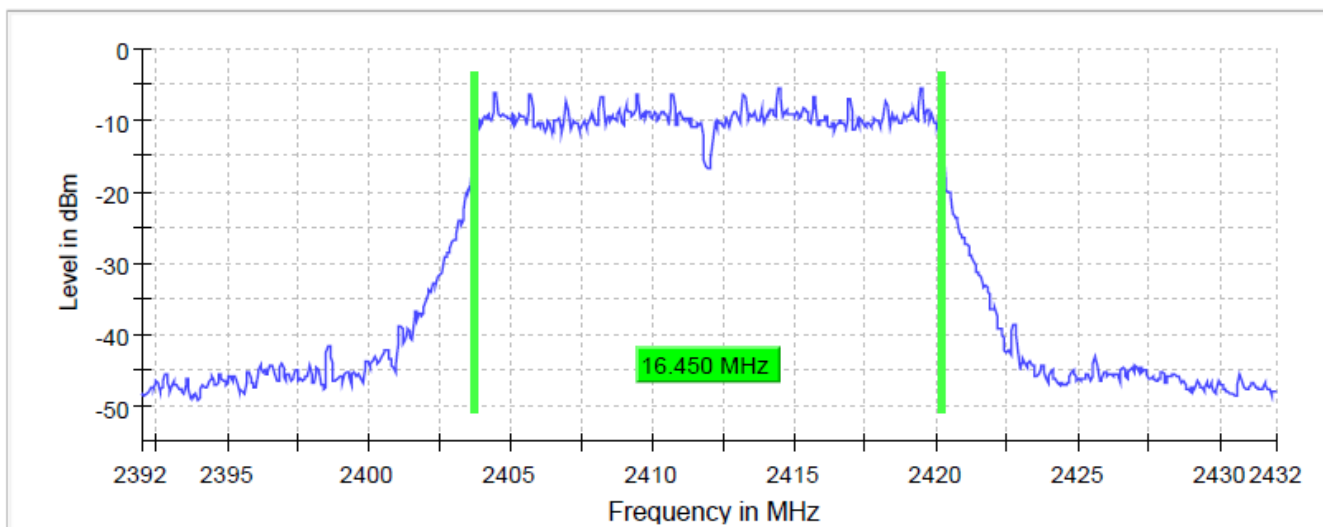

802.11n 2412MHz MCS0

6 dB Bandwidth

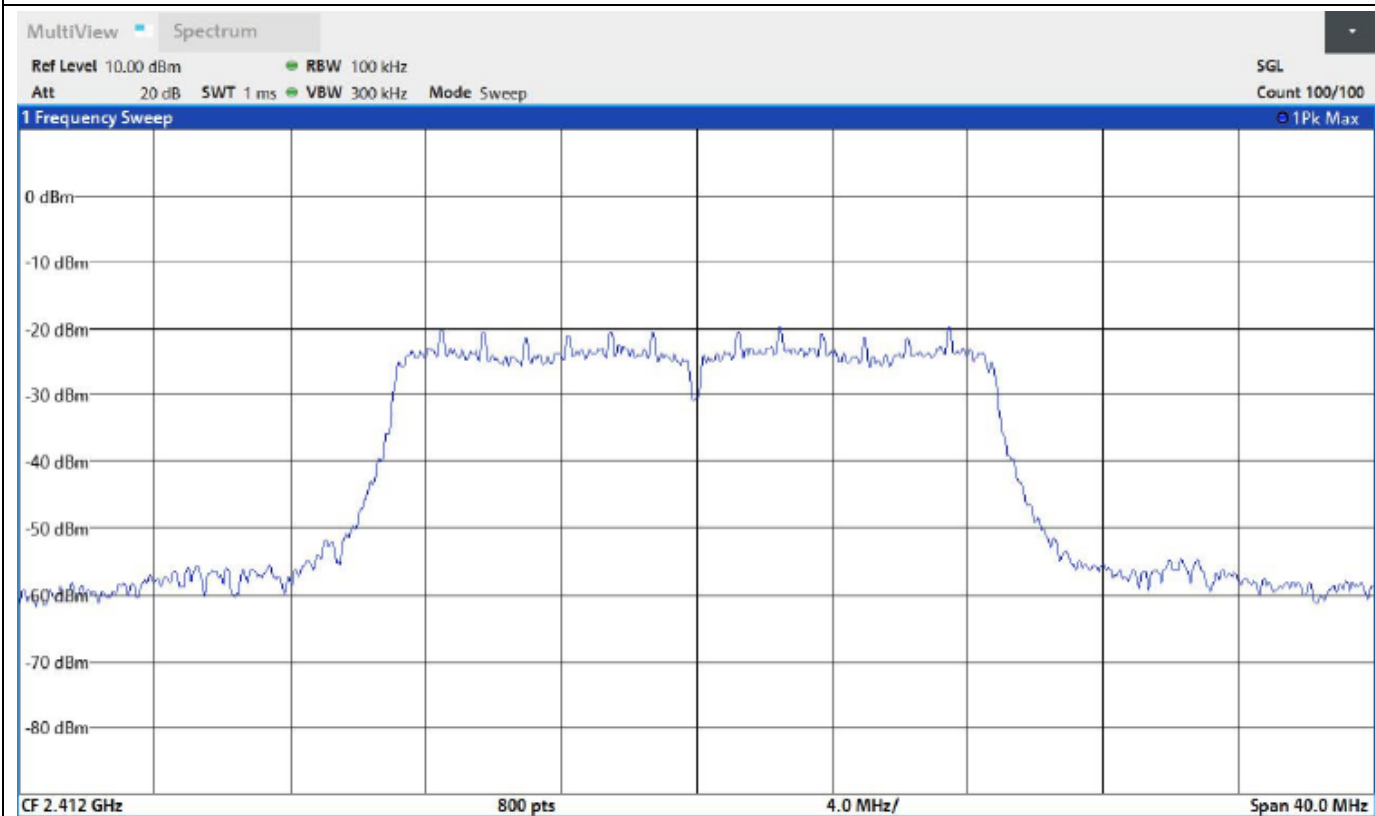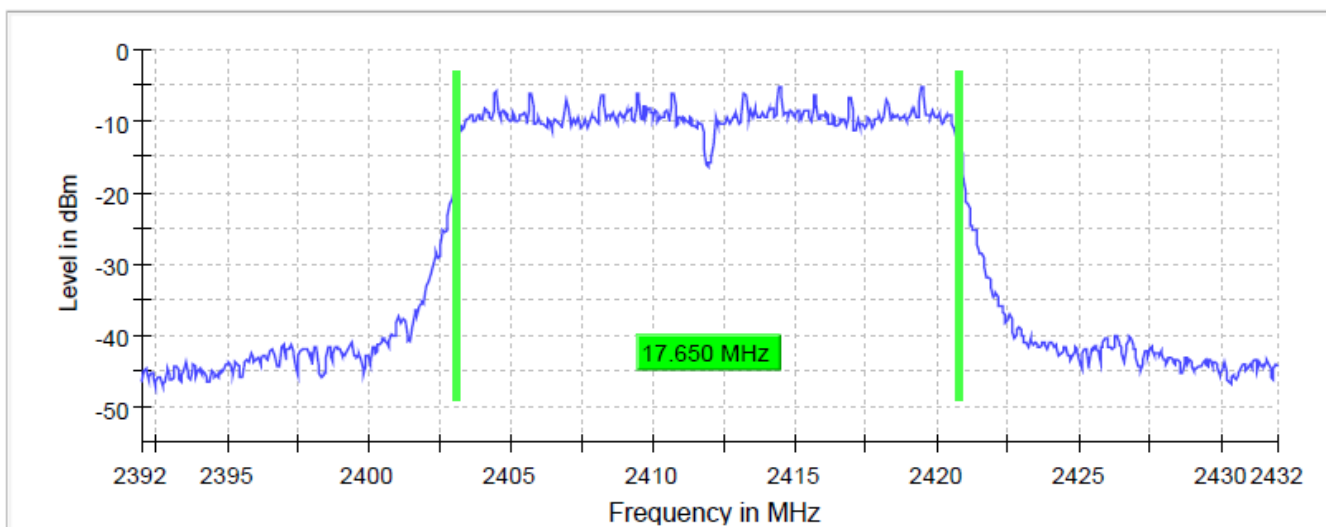


4.4.5 Conducted Band Edge

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05r02 Section 8.7 and ANSI C63.10-2013 Section 11.11.3, RSS-247 5.5

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.Expanded Uncertainty (K=2) < 0.8 dB

Band Edge Low (802.11b 1Mbps 2412MHz)				
Frequency (MHz)		Level (dBm)		
2412.475000		-1.3		



Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2394.975000	-50.2	18.8	-31.3	PASS
2395.025000	-50.2	18.9	-31.3	PASS
2394.525000	-50.9	19.5	-31.3	PASS
2394.475000	-50.9	19.5	-31.3	PASS
2394.925000	-51.8	20.4	-31.3	PASS
2394.775000	-51.8	20.5	-31.3	PASS
2394.725000	-51.9	20.5	-31.3	PASS
2394.875000	-52.0	20.7	-31.3	PASS
2395.075000	-52.2	20.8	-31.3	PASS
2394.825000	-52.3	21.0	-31.3	PASS
2395.975000	-52.3	21.0	-31.3	PASS
2396.025000	-52.3	21.0	-31.3	PASS
2394.675000	-52.6	21.2	-31.3	PASS
2394.575000	-52.6	21.2	-31.3	PASS
2396.475000	-52.8	21.4	-31.3	PASS

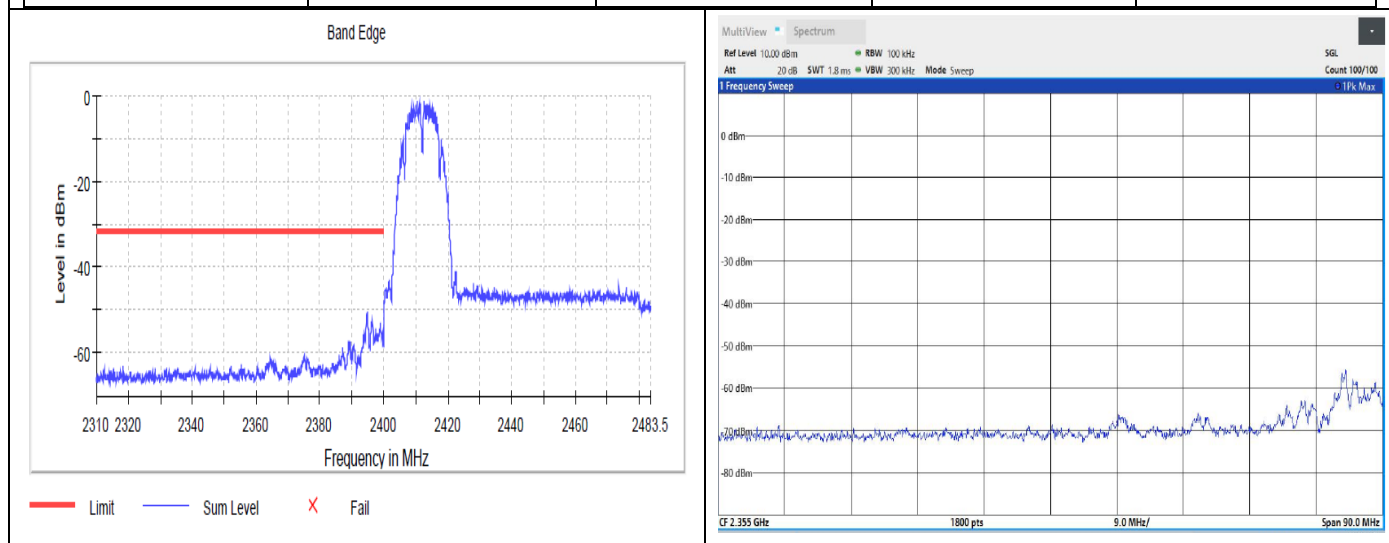

Band Edge High (802.11b 1Mbps 2462MHz)

Frequency (MHz)	Level (dBm)
2462.475000	-1.2

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2486.225000	-44.9	13.6	-31.2	PASS
2486.275000	-44.9	13.7	-31.2	PASS
2499.425000	-45.9	14.6	-31.2	PASS
2484.825000	-46.1	14.8	-31.2	PASS
2487.775000	-46.1	14.9	-31.2	PASS
2483.875000	-46.2	14.9	-31.2	PASS
2487.725000	-46.2	14.9	-31.2	PASS
2484.675000	-46.2	14.9	-31.2	PASS
2484.875000	-46.2	15.0	-31.2	PASS
2484.625000	-46.2	15.0	-31.2	PASS
2487.825000	-46.2	15.0	-31.2	PASS
2492.275000	-46.3	15.1	-31.2	PASS
2498.075000	-46.4	15.1	-31.2	PASS
2483.825000	-46.5	15.3	-31.2	PASS
2496.125000	-46.6	15.3	-31.2	PASS

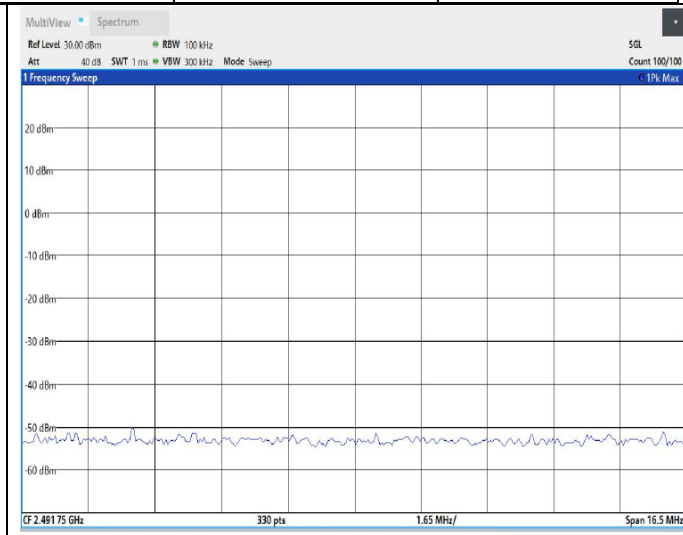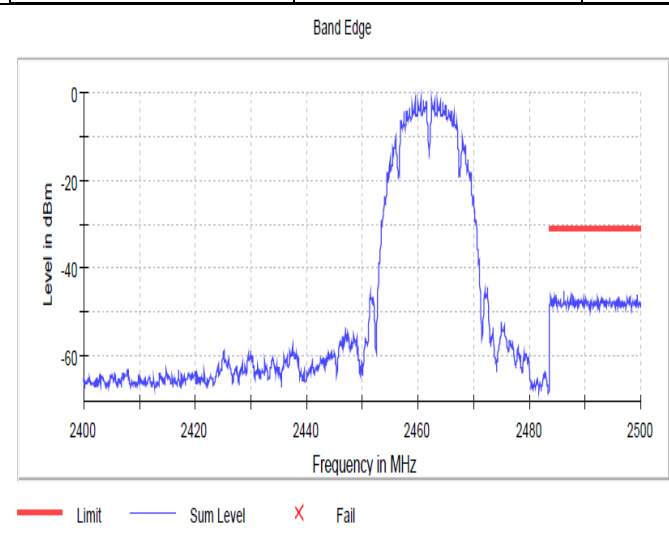


Band Edge Low (802.11g 6Mbps 2412MHz)


Frequency (MHz)	Level (dBm)
2414.475000	-2.5

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.225000	-39.8	7.2	-32.5	PASS
2398.175000	-39.8	7.3	-32.5	PASS
2399.625000	-40.0	7.5	-32.5	PASS
2399.675000	-40.1	7.6	-32.5	PASS
2398.275000	-40.2	7.7	-32.5	PASS
2399.575000	-40.5	8.0	-32.5	PASS
2398.125000	-40.6	8.1	-32.5	PASS
2399.725000	-40.9	8.4	-32.5	PASS
2399.775000	-41.7	9.2	-32.5	PASS
2399.525000	-41.8	9.2	-32.5	PASS
2399.475000	-41.9	9.4	-32.5	PASS
2398.075000	-42.2	9.7	-32.5	PASS
2396.625000	-42.4	9.8	-32.5	PASS
2396.675000	-42.4	9.9	-32.5	PASS
2396.975000	-42.5	9.9	-32.5	PASS

Band Edge

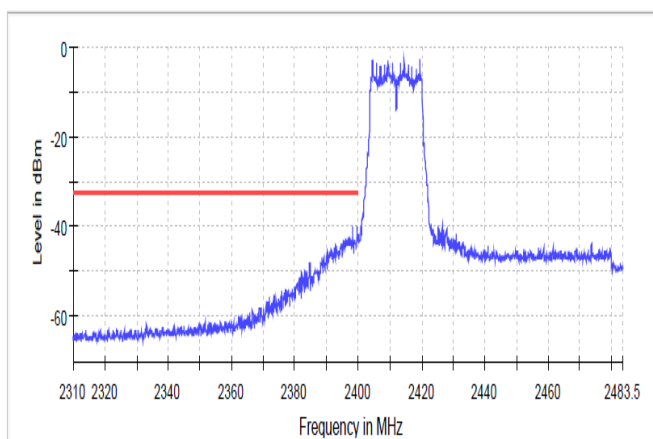


— Limit — Sum Level X Fail

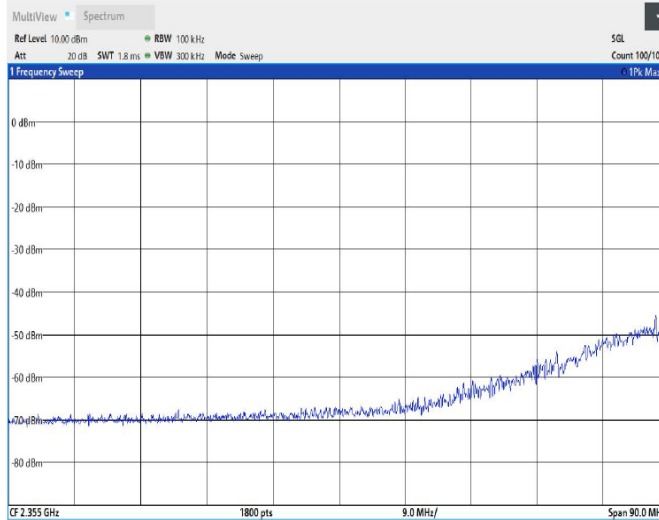


Band Edge High (802.11g 6Mbps 2462MHz)

Frequency (MHz)	Level (dBm)
2464.475000	-1.9

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2485.425000	-45.2	13.3	-31.9	PASS
2485.475000	-45.3	13.3	-31.9	PASS
2483.575000	-45.3	13.3	-31.9	PASS
2485.275000	-45.3	13.4	-31.9	PASS
2483.725000	-45.4	13.4	-31.9	PASS
2493.725000	-45.4	13.5	-31.9	PASS
2493.675000	-45.4	13.5	-31.9	PASS
2487.575000	-45.4	13.5	-31.9	PASS
2485.225000	-45.4	13.5	-31.9	PASS
2487.625000	-45.5	13.5	-31.9	PASS
2483.775000	-45.6	13.6	-31.9	PASS
2488.825000	-45.7	13.8	-31.9	PASS
2496.175000	-45.8	13.9	-31.9	PASS
2496.225000	-45.9	13.9	-31.9	PASS
2485.525000	-45.9	13.9	-31.9	PASS

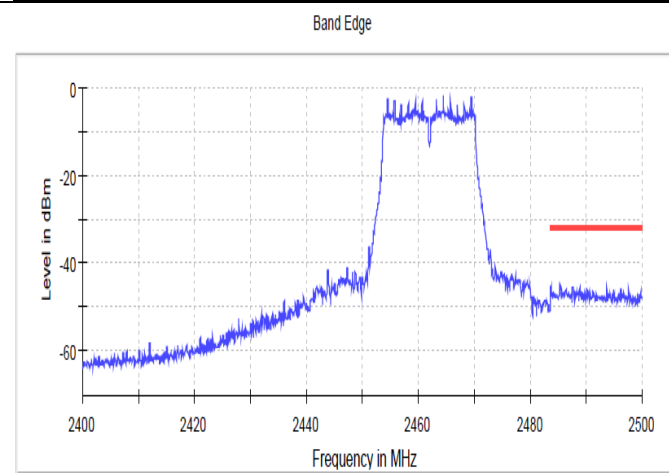

— Limit — Sum Level X Fail

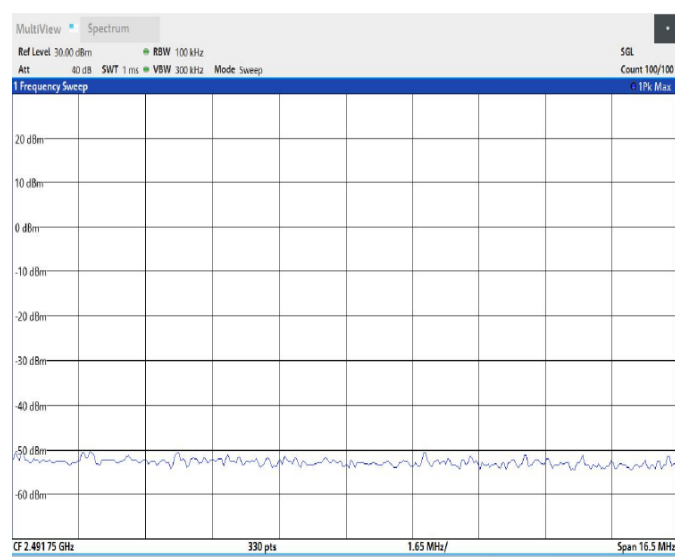


Band Edge Low (802.11n (HT20) MCS0 2412MHz)


Frequency (MHz)	Level (dBm)
2414.475000	-2.3

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.425000	-38.6	6.3	-32.3	PASS
2399.375000	-38.6	6.3	-32.3	PASS
2397.825000	-38.8	6.5	-32.3	PASS
2397.775000	-38.8	6.5	-32.3	PASS
2397.275000	-39.0	6.7	-32.3	PASS
2396.975000	-39.0	6.7	-32.3	PASS
2397.975000	-39.1	6.7	-32.3	PASS
2398.025000	-39.1	6.7	-32.3	PASS
2399.525000	-39.1	6.8	-32.3	PASS
2399.575000	-39.1	6.8	-32.3	PASS
2398.525000	-39.1	6.8	-32.3	PASS
2397.025000	-39.1	6.8	-32.3	PASS
2398.425000	-39.1	6.8	-32.3	PASS
2399.325000	-39.2	6.9	-32.3	PASS
2399.275000	-39.2	6.9	-32.3	PASS

Band Edge

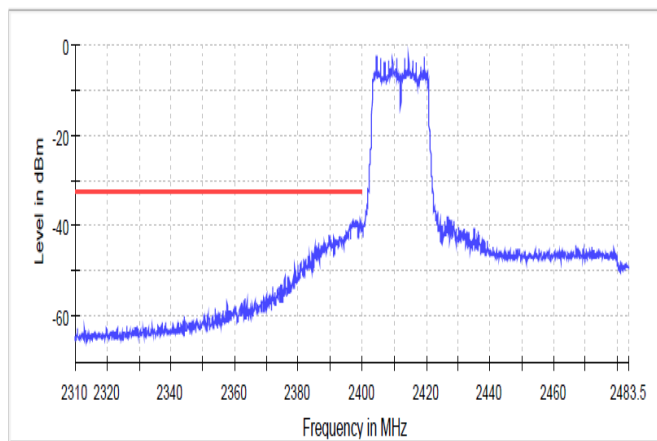

— Limit — Sum Level X Fail

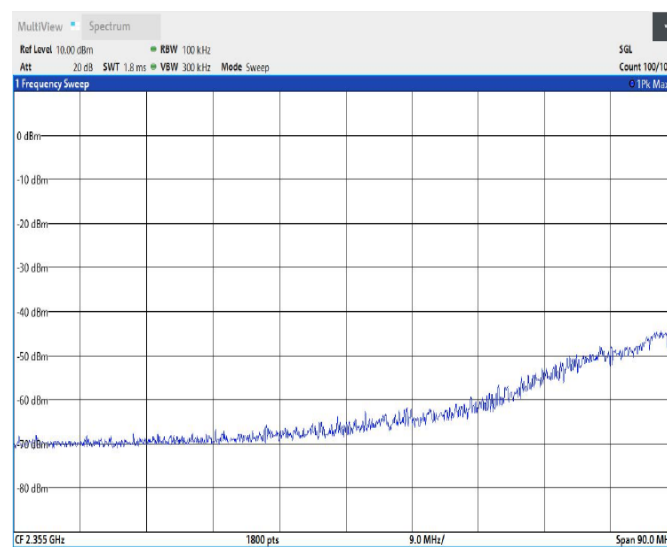


Band Edge High (802.11n (HT20) MCS0 2462MHz)


Frequency (MHz)	Level (dBm)
2464.475000	-1.9

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2484.775000	-41.5	9.6	-31.9	PASS
2484.825000	-42.4	10.5	-31.9	PASS
2483.825000	-42.8	10.9	-31.9	PASS
2488.775000	-43.1	11.1	-31.9	PASS
2484.725000	-43.2	11.3	-31.9	PASS
2483.875000	-43.6	11.7	-31.9	PASS
2485.025000	-43.6	11.7	-31.9	PASS
2484.175000	-43.8	11.8	-31.9	PASS
2484.125000	-43.8	11.9	-31.9	PASS
2486.425000	-44.1	12.2	-31.9	PASS
2488.825000	-44.2	12.2	-31.9	PASS
2488.725000	-44.2	12.3	-31.9	PASS
2486.375000	-44.3	12.4	-31.9	PASS
2486.325000	-44.3	12.4	-31.9	PASS
2484.675000	-44.4	12.4	-31.9	PASS

Band Edge

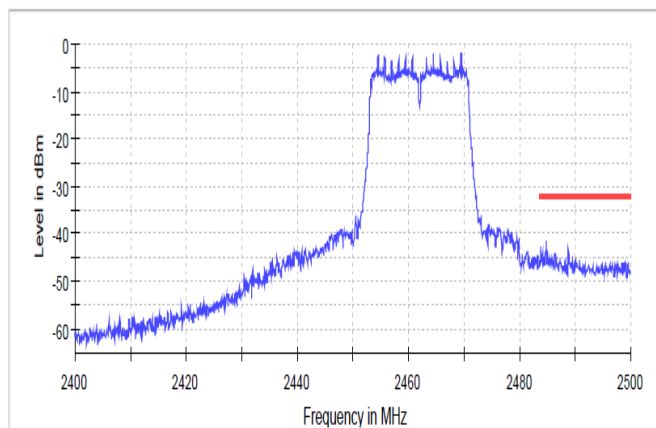

— Limit — Sum Level × Fail

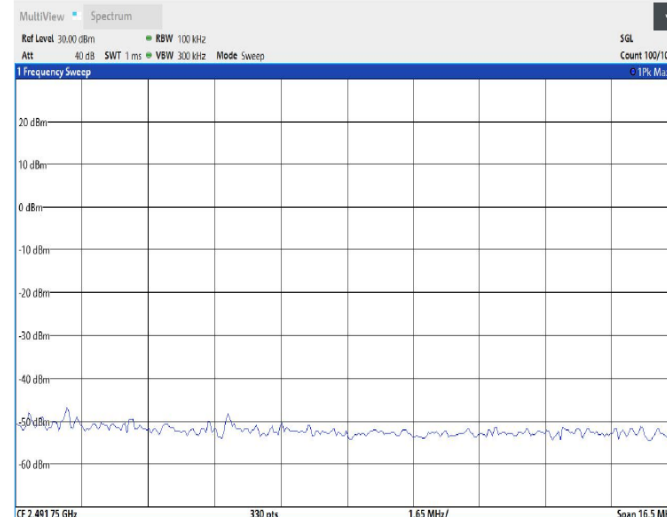

4.4.6 Tx Spurious Emissions

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v05r02 8.5 and ANSI C63.10-2013 11.11.2 & 11.11.3, RSS-247 5.5

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 1.8 dB

802.11b 1Mbps 2412MHz			
Pre Measurement			
Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22076.170937	-52.1	20.1	-32.0
21966.214972	-53.1	21.1	-32.0
21996.202962	-53.2	21.3	-32.0
22226.110889	-53.4	21.4	-32.0
22246.102882	-53.4	21.4	-32.0
22106.158927	-53.4	21.4	-32.0
22206.118895	-53.5	21.5	-32.0
22146.142914	-53.6	21.6	-32.0
22456.018815	-53.6	21.7	-32.0
22306.078863	-53.6	21.7	-32.0
22156.138911	-53.7	21.7	-32.0
22086.166934	-53.7	21.7	-32.0
22096.162930	-53.7	21.7	-32.0
22036.186950	-53.7	21.7	-32.0
22066.174940	-53.8	21.8	-32.0

Spurious

Level in dBm

Frequency in Hz

Legend: Limit (red line), Sum Level (blue line), Threshold (magenta dashed line), Critical (red X), Final Critical (green X)

MultiView Spectrum

Ref Level -20.00 dBm RBW 100 kHz

AT 0 dB SWT 250 ms VBW 300 kHz Mode Sweep

5GL Count 3/3

Frequency Sweep

Level in dBm


CF 12.515 GHz 2498 pts 2.5 GHz/ Span 24.97 GHz

802.11b 1Mbps 2437MHz

Pre Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22016.194956	-52.5	19.1	-33.4
22166.134908	-52.7	19.4	-33.4
22136.146918	-52.9	19.5	-33.4
22146.142914	-53.3	19.9	-33.4
22126.150921	-53.4	20.0	-33.4
22066.174940	-53.4	20.0	-33.4
22106.158927	-53.7	20.4	-33.4
22296.082866	-53.7	20.4	-33.4
22036.186950	-53.8	20.4	-33.4
21976.210969	-53.8	20.4	-33.4
22076.170937	-53.9	20.5	-33.4
22116.154924	-53.9	20.5	-33.4
22236.106886	-53.9	20.5	-33.4
22006.198959	-53.9	20.5	-33.4
21986.206966	-54.1	20.7	-33.4

Spurious

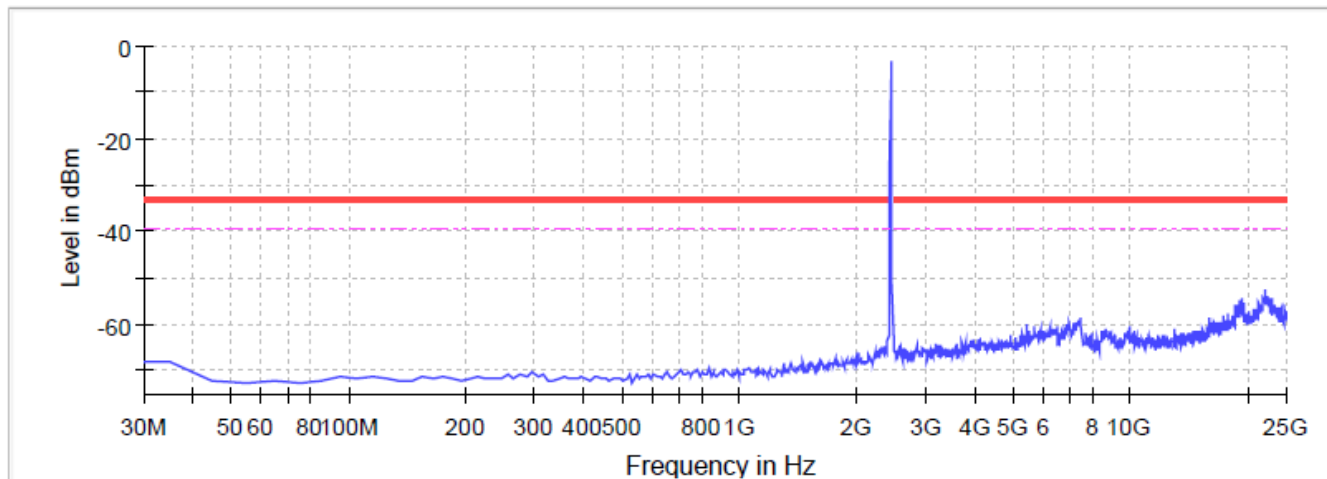


— Limit
 — Sum Level
 - - - Threshold
 × Critical
 × Final Critical

802.11b 1Mbps 2462MHz

Pre Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22086.166934	-53.2	20.9	-32.3
22146.142914	-53.3	21.0	-32.3
22036.186950	-53.3	21.0	-32.3
22515.994796	-53.4	21.1	-32.3
22026.190953	-53.4	21.1	-32.3
22466.014812	-53.4	21.1	-32.3
22226.110889	-53.4	21.1	-32.3
22006.198959	-53.4	21.1	-32.3
22206.118895	-53.4	21.1	-32.3
22326.070857	-53.5	21.2	-32.3
22376.050841	-53.6	21.3	-32.3
21986.206966	-53.7	21.4	-32.3
21446.423139	-53.7	21.4	-32.3
22056.178943	-53.8	21.5	-32.3
22186.126902	-53.8	21.5	-32.3

Spurious

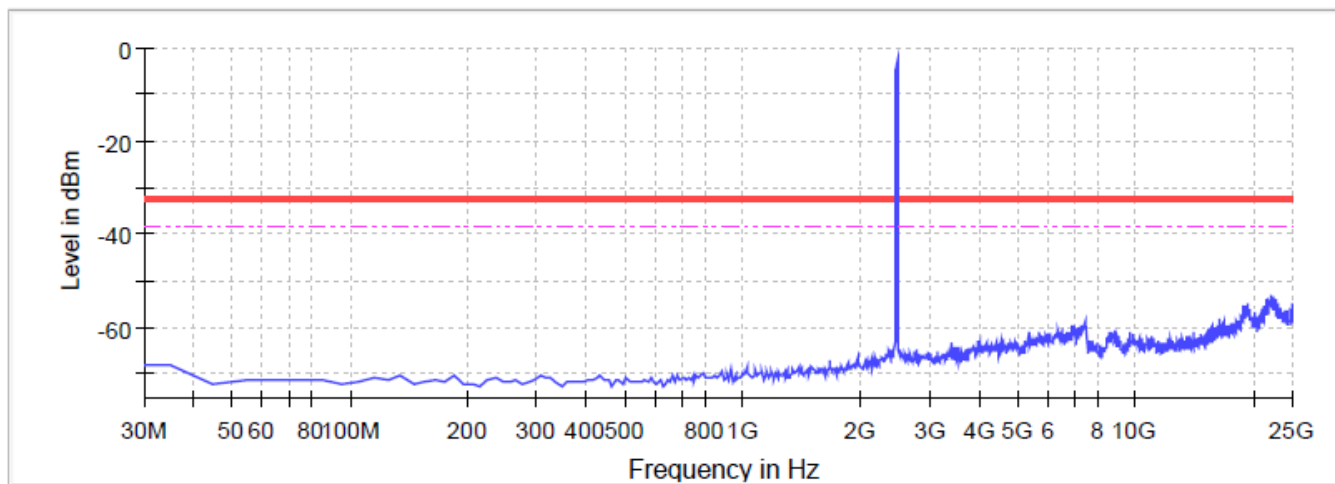


— Limit
 — Sum Level
 - - - Threshold
 × Critical
 × Final Critical

802.11g 6Mbps 2412MHz


Pre Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22006.198959	-43.0	9.2	-33.8
22046.182946	-43.1	9.3	-33.8
22476.010809	-43.3	9.5	-33.8
22276.090873	-43.3	9.6	-33.8
22136.146918	-43.4	9.6	-33.8
22036.186950	-43.4	9.6	-33.8
22266.094876	-43.4	9.6	-33.8
22446.022818	-43.4	9.6	-33.8
22126.150921	-43.4	9.6	-33.8
21956.218975	-43.5	9.7	-33.8
22715.914732	-43.5	9.7	-33.8
22206.118895	-43.5	9.7	-33.8
22166.134908	-43.5	9.8	-33.8
22156.138911	-43.6	9.8	-33.8
22116.154924	-43.7	9.9	-33.8

Spurious

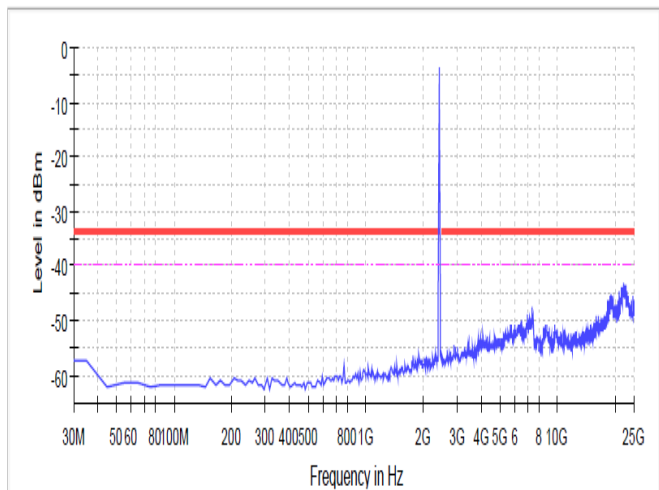

— Limit — Sum Level - - - Threshold X Critical X Final Critical

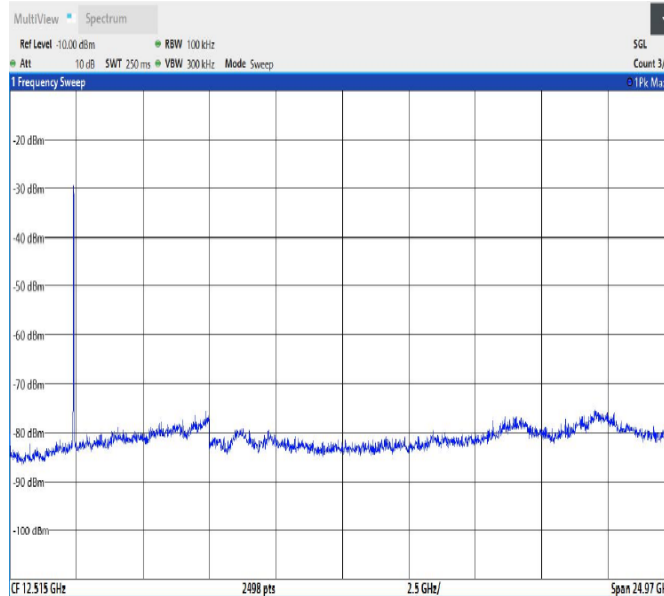


802.11g 6Mbps 2437MHz

Pre Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22056.178943	-42.3	8.1	-34.2
22016.194956	-42.5	8.3	-34.2
22236.106886	-42.6	8.4	-34.2
21996.202962	-43.4	9.2	-34.2
22076.170937	-43.4	9.2	-34.2
22066.174940	-43.5	9.2	-34.2
22096.162930	-43.5	9.3	-34.2
22136.146918	-43.5	9.3	-34.2
22266.094876	-43.5	9.3	-34.2
22476.010809	-43.6	9.4	-34.2
22226.110889	-43.6	9.4	-34.2
22046.182946	-43.7	9.4	-34.2
21966.214972	-43.7	9.5	-34.2
22126.150921	-43.7	9.5	-34.2
22496.002802	-43.9	9.6	-34.2

Spurious

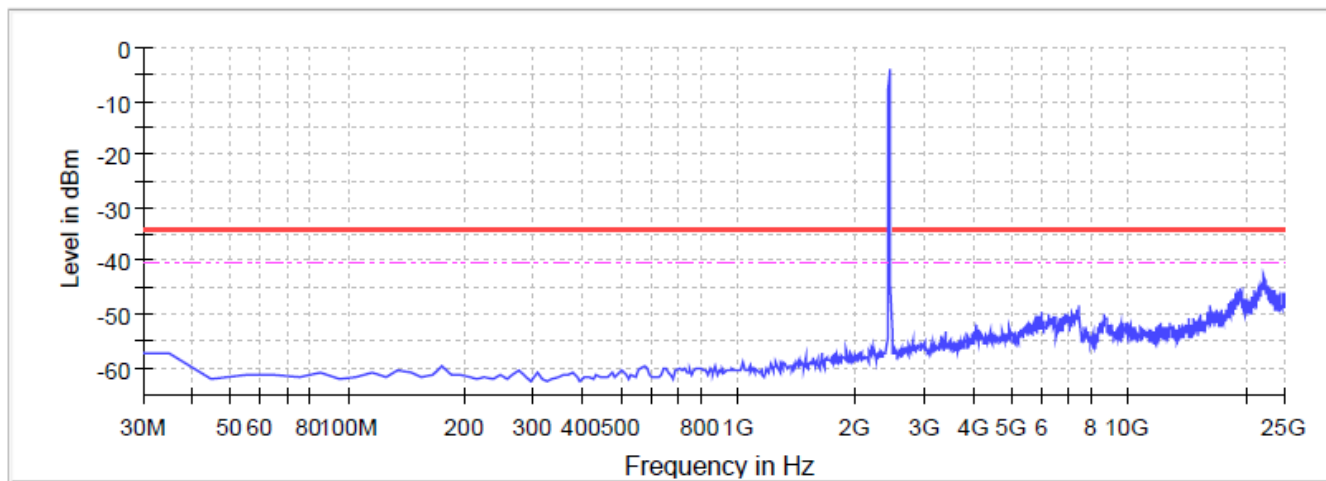

— Limit
 — Sum Level
 - - - Threshold
 × Critical
 × Final Critical

802.11g 6Mbps 2462MHz


Final Measurement

Frequency (MHz)	Level Pre Measurement (dBm)	Level (dBm)	Margin (dB)	Limit (dBm)
22073.178418	-42.1	-63.1	27.4	-35.6

Pre Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22076.170937	-41.0	5.4	-35.6
22106.158927	-42.7	7.1	-35.6
22026.190953	-43.0	7.4	-35.6
22176.130905	-43.2	7.6	-35.6
22146.142914	-43.2	7.6	-35.6
22196.122898	-43.3	7.6	-35.6
21936.226982	-43.3	7.6	-35.6
22216.114892	-43.4	7.8	-35.6
22006.198959	-43.4	7.8	-35.6
21866.255004	-43.4	7.8	-35.6
22306.078863	-43.6	7.9	-35.6
21946.222978	-43.6	8.0	-35.6
22236.106886	-43.6	8.0	-35.6
22276.090873	-43.7	8.1	-35.6
22126.150921	-43.8	8.1	-35.6

Spurious

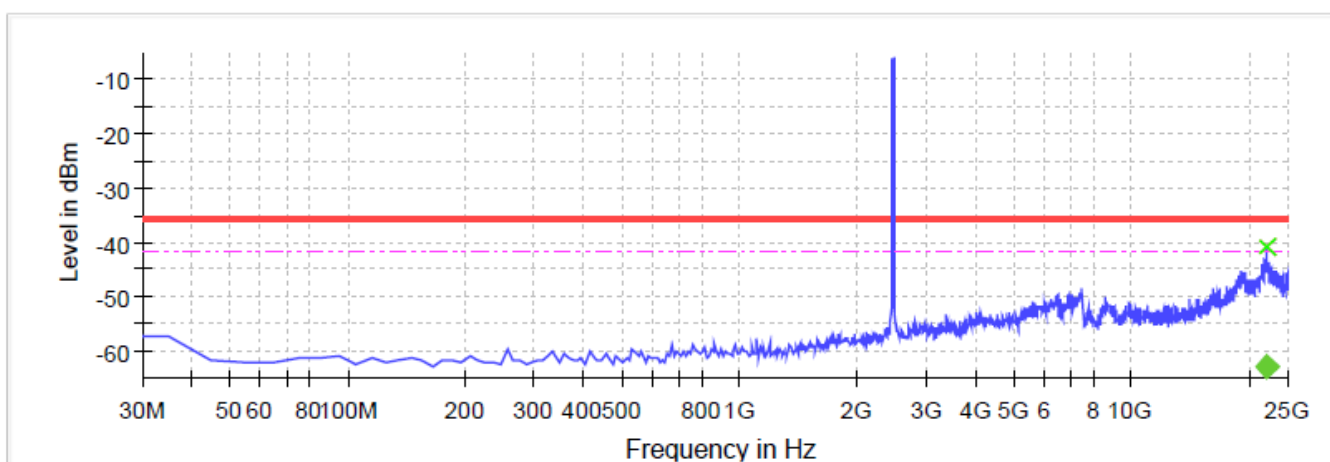

— Limit
x Final Critical
— Sum Level
◆ Fail
- - - Threshold
◆ Pass
x Critical

802.11n (HT20) MCS0 2412MHz


Final Measurement

Frequency (MHz)	Level Pre Measurement (dBm)	Level (dBm)	Margin (dB)	Limit (dBm)
2397.544515	-26.7	-53.7	19.9	-33.9


Pre Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2394.053243	-39.0	5.1	-33.9
22196.122898	-42.7	8.8	-33.9
22076.170937	-42.8	9.0	-33.9
22046.182946	-43.4	9.5	-33.9
22256.098879	-43.4	9.6	-33.9
22476.010809	-43.5	9.6	-33.9
22016.194956	-43.5	9.6	-33.9
22056.178943	-43.6	9.7	-33.9
22126.150921	-43.7	9.8	-33.9
21866.255004	-43.8	9.9	-33.9
22066.174940	-43.8	9.9	-33.9
21786.287030	-43.9	10.0	-33.9
22096.162930	-43.9	10.0	-33.9
22166.134908	-43.9	10.1	-33.9
22106.158927	-44.0	10.2	-33.9

Spurious

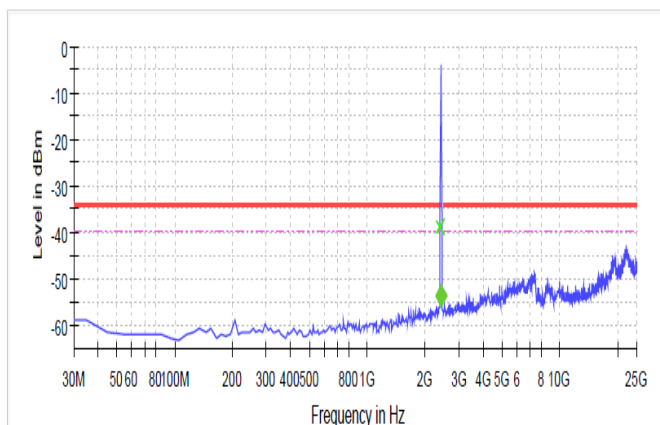

— Limit — Sum Level - - - Threshold X Critical
◆ Final Critical ◆ Fail ◆ Pass

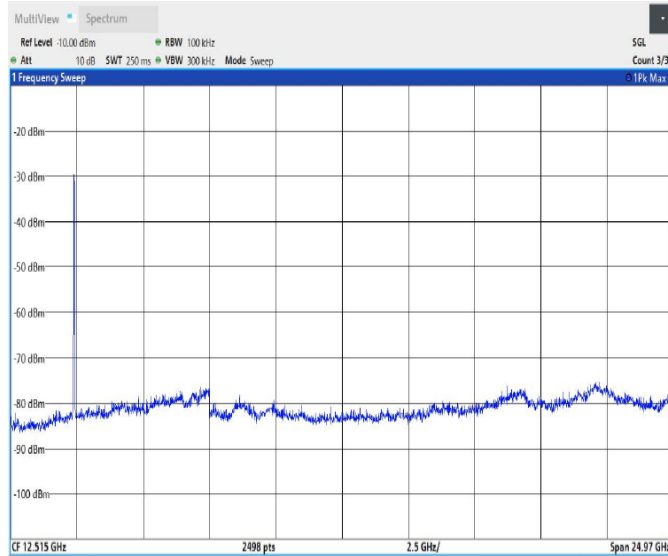


802.11n (HT20) MCS0 2437MHz

Pre Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22126.150921	-42.3	6.5	-35.8
22046.182946	-42.9	7.0	-35.8
22156.138911	-43.1	7.3	-35.8
21966.214972	-43.3	7.5	-35.8
22456.018815	-43.4	7.6	-35.8
21896.242994	-43.5	7.6	-35.8
22136.146918	-43.5	7.7	-35.8
22186.126902	-43.6	7.7	-35.8
22076.170937	-43.7	7.8	-35.8
22016.194956	-43.7	7.9	-35.8
22236.106886	-43.7	7.9	-35.8
22066.174940	-43.9	8.0	-35.8
22366.054844	-43.9	8.0	-35.8
22376.050841	-43.9	8.1	-35.8
21996.202962	-43.9	8.1	-35.8

Spurious

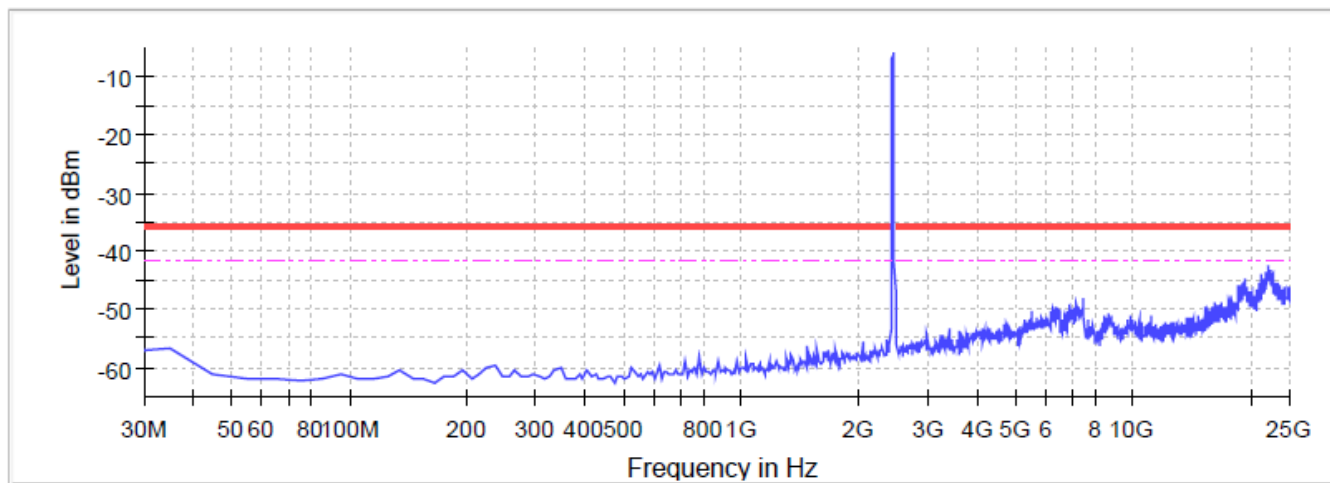


— Limit
 — Sum Level
 - - - Threshold
 × Critical
 × Final Critical

802.11n (HT20) MCS0 2462MHz

Pre Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
22246.102882	-41.6	7.9	-33.7
22066.174940	-42.3	8.5	-33.7
22046.182946	-42.7	9.0	-33.7
22186.126902	-42.9	9.2	-33.7
22306.078863	-43.0	9.3	-33.7
22116.154924	-43.3	9.6	-33.7
22226.110889	-43.4	9.6	-33.7
21976.210969	-43.4	9.7	-33.7
22126.150921	-43.5	9.8	-33.7
22016.194956	-43.6	9.9	-33.7
22056.178943	-43.8	10.1	-33.7
22166.134908	-44.0	10.3	-33.7
21866.255004	-44.0	10.3	-33.7
22296.082866	-44.1	10.4	-33.7
22006.198959	-44.1	10.4	-33.7

Spurious

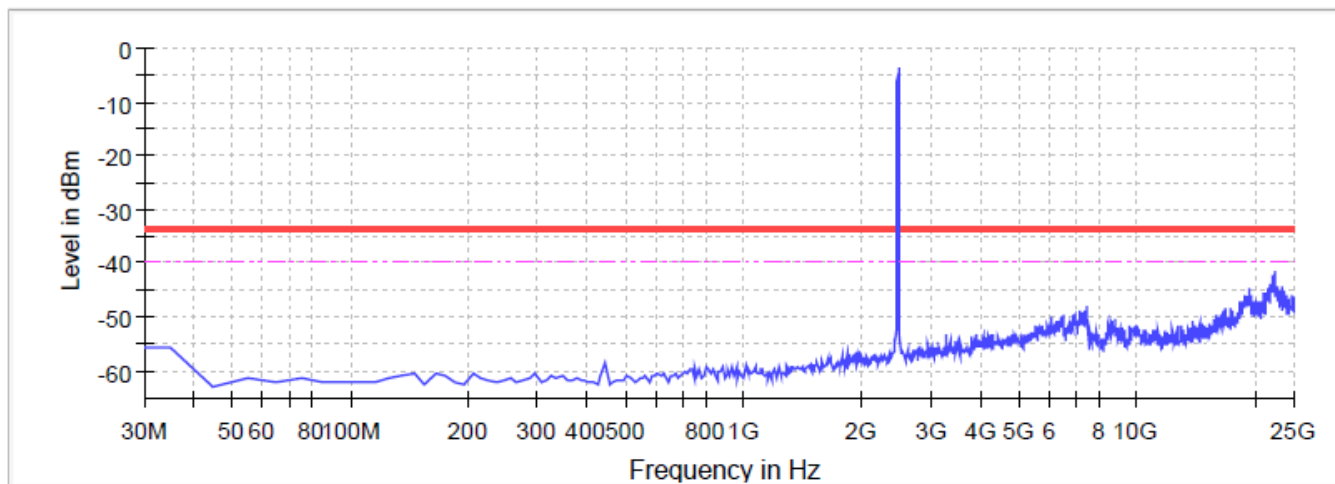

— Limit — Sum Level - - - Threshold × Critical × Final Critical

5. Radiated Testing

5.1 Test Summary

Start: 11/22/2022	End: 12/28/2022	Temperature: 23.2°C	Initials: AB
		Humidity: 23.8 %R.H	

DUT S/N	AH22100701-HAR-053#4 AH22100701-HAR-053#5	DUT Operating Mode	2.4GHz WLAN		
Comment	802.11b 1Mbps 802.11g 6Mbps 802.11n MCS0				
Antenna	Frequency Range	Polarization	Result Over/Under Limit		Notes
Loop	9kHz-30MHz	Parallel	<input type="checkbox"/> Over	<input checked="" type="checkbox"/> Under	√
		Perpendicular	<input type="checkbox"/> Over	<input checked="" type="checkbox"/> Under	√
		Ground-Parallel	<input type="checkbox"/> Over	<input checked="" type="checkbox"/> Under	√
Log Periodic	30MHz-1GHz	Horizontal	<input type="checkbox"/> Over	<input checked="" type="checkbox"/> Under	√
		Vertical	<input type="checkbox"/> Over	<input checked="" type="checkbox"/> Under	√
Horn	1GHz-18GHz	Horizontal	<input type="checkbox"/> Over	<input checked="" type="checkbox"/> Under	√
		Vertical	<input type="checkbox"/> Over	<input checked="" type="checkbox"/> Under	√
Horn	18GHz-27.5GHz	Horizontal	<input type="checkbox"/> Over	<input checked="" type="checkbox"/> Under	√
		Vertical	<input type="checkbox"/> Over	<input checked="" type="checkbox"/> Under	√


Notes: √ meets the requirements of the acceptance criteria.


5.2 Test Setup

Semi-Anechoic Chamber Test Site-3 meter

Chamber Location	815 N Opdyke Rd Auburn Hills, Michigan 48326
Chamber Manufacturer:	ETS-Lindgren
Chamber Type	Semi-Anechoic
Model	FACT™ 3-2.0 Plus
Chamber Dimensions (L x W x H)	18'x18'x30'
Quiet Zone Diameter	2.0 meters
Quiet Zone Test Heights	1 & 2 meters (front only)
Test Distance	3.0 meters
Test Frequency Range	1-40 GHz
Measured Performance	4.87 dB Site sVSWR

Chamber Dimensions

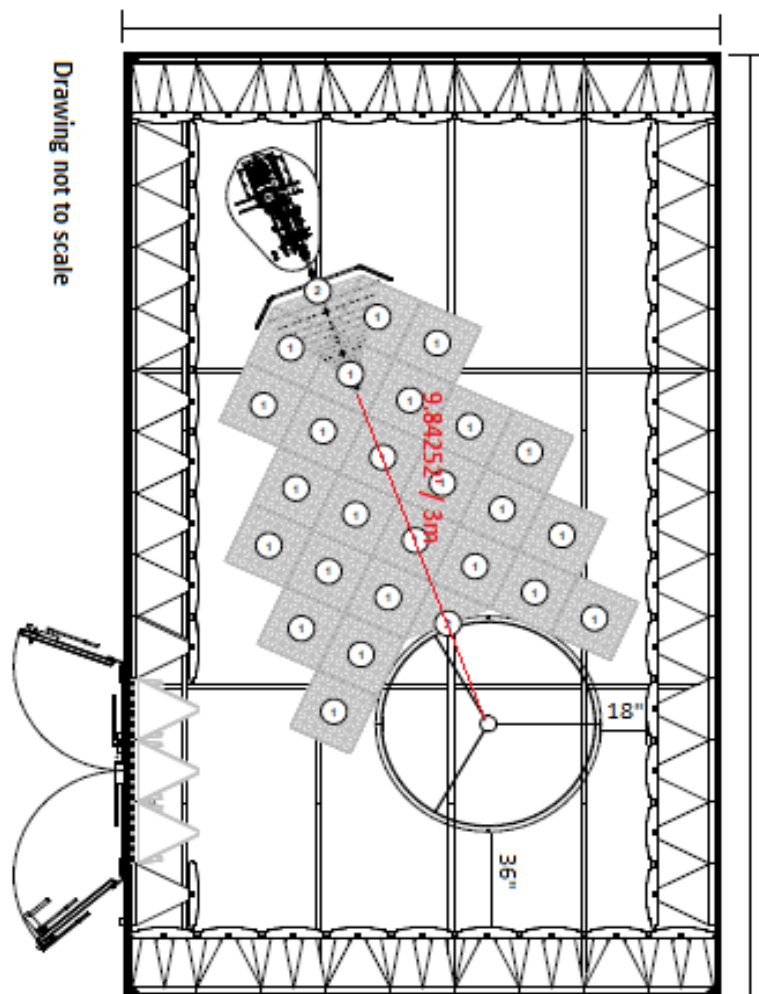

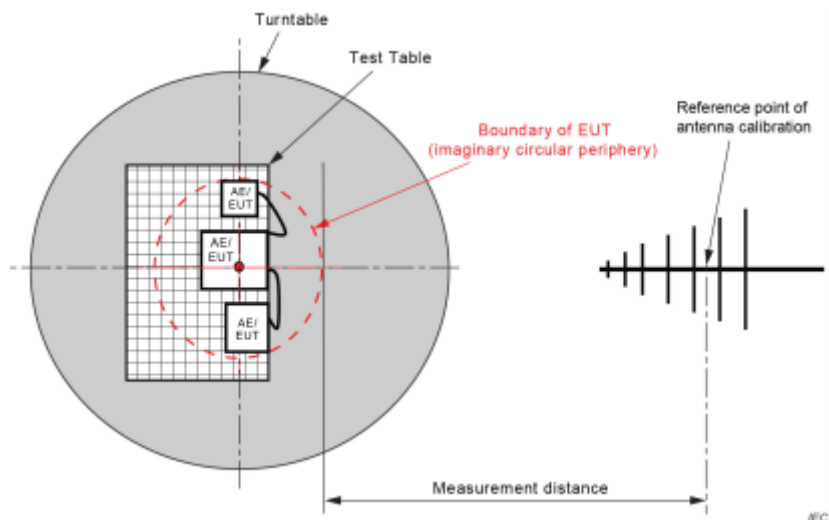

5.3 Test Equipment Used

ID #	Equipment	Manufacturer	Model #	Serial #	Cal Due
BVD0217	Receiver 2Hz-44GHz	Rohde & Schwarz	ESW44	101871	4/20/2023
BVD0118	Antenna Mast Position Controller	ETS	7006-001	00214778/00 214648	N/A
BVD0111	3 Meter Anechoic Chamber	ETS	N/A	N/A	N/A
BVD0247	Turn Table	ETS	920250	N/A	N/A
BVD0323	Foam Test Table For 3 Meter Chamber	ETS-Lindgren	LDT-1.5	N/A	N/A
BVD0069	Bore Sight Tower	ETS	2171B	226732	N/A
BVD0259	Optima 12V Blue top Marine battery	Optima	D34M	N/A	N/A
BVD0184	Preamplifier 29dB 1-18GHz	Rohde & Schwarz	TS-PR18	101646	5/6/2023
BVD0185	Preamplifier 45dB 18-40GHz	Rohde & Schwarz	TS-PR1840	100064	4/6/2023
BVD0267	Double Ridge Waveguide 800MHz-18GHz	Rohde & Schwarz	HF907	102832	5/5/2023
BVD0021	UltraLog Antenna 30-6000 MHz	Rohde & Schwarz	HL562E	101113	7/21/2023
BVD0320	18-40GHz Horn Antenna	L3 Narda ATM	PNR 180-442-KF	136164-01	4/4/2023
BVD0011	Loop Antenna 9kHz-30MHz	Rohde & Schwarz	FMZB1519B	145	5/4/2023
BVD0045	Field Probe Mast	Rohde & Schwarz	TS-FPMA	N/A	N/A
BVD0480	Band Reject Filter 50dB from 2400 to 2500MHz	Micro-Tronics	BRM50702	G482	4/11/2023
BVD0394	Double Shielded N-Type Cable 6.9 Meter	Rohde & Schwarz	N-Type	N/A	3/11/2023
BVD0398	Double Shielded N-Type Cable 2 Meter	Rohde & Schwarz	N-Type	N/A	12/29/2024
BVD0486	Sucoflex K-Type Coaxial Cable 5 Meter	Huber+Suhner, inc	K-Type Coaxial	474343	3/7/2023
BVD0407	Double Shielded N-Type Cable 410mm (For PreAmp)	Rohde & Schwarz	N-Type	N/A	8/31/2023
BVD0495	SMA Shielded Cable approx 100mm (for Pre-Amp)	Rohde & Schwarz	SMA-Type	N/A	4/6/2023
BVD0552	Double Shielded N-Type Cable 440mm (For PreAmp)	Electronic Assemblies	N-Type	N/A	5/7/2023
BVD0229	Temp and Humidity Meter	Fluke	971	12001009	5/1/2023

Equipment List (Software)

ID #	Equipment	Manufacturer	Model	Version No.	
N/A	EMC Test Software	Rodhe & Schwarz	EMC32	11.20.00	N/A

Customer Supplied Equipment

ID #	Equipment	Manufacturer	Model	Serial #	Version No.
N/A	Harness	Harman	N/A	N/A	N/A
N/A	Display Unit	Innolux Corp	INFOMM-15524	0024	N/A
N/A	Ethernet Board	GM	N/A	N/A	CSMate rev.4
N/A	GM BT WLAN Test Tool NXP Chips S/W	Harman	N/A	N/A	2.4

5.4 Test Limits and Procedures

Radiated emissions that fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

Frequencies (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Field strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement distance (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	48.5 - 13.8	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	33.8 - 23	30
1.705 ~ 30.0	30	29.54	30
30 ~ 88	100	40.0	3
88 ~ 216	150	43.5	3
216 ~ 960	200	46.0	3
Above 960	500	54.0	3

Note:

- The lower limit shall apply at the transition frequencies.
- As per 15.35(b), for frequencies above 1000MHz, the field strength limits based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- For performing measurements at a specified distance of 3m, the values are extrapolated using extrapolation factor.
Frequencies below 30MHz are extrapolated using 40dB/decade.
Frequencies above 30MHz are extrapolated using 20dB/decade.

Frequencies (MHz)	Formula for Limits derivation for below 30MHz	Limits for frequencies below 30MHz ($\text{dB}\mu\text{V}/\text{m}$)
0.009 ~ 0.490	$2400/F(\text{kHz}) + 40 \text{ Log } (300\text{m}/3\text{m})$	128.5 ~ 93.8
0.490 ~ 1.705	$24000/F(\text{kHz}) + 40 \text{ Log } (30\text{m}/3\text{m})$	73.8 ~ 62.96
1.705 ~ 30.0	$29.54 + 40 \text{ Log } (30\text{m}/3\text{m})$	69.54

Radiated emissions that fall in restricted bands, as defined in RSS-GEN Section 8.10 must also comply with radiated emissions limits specified in RSS-GEN Section 8.9

The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω .

For example, the measurement frequency 2190KHz resulted in a level of 29.29 $\text{dB}\mu\text{V}/\text{m}$, which is equivalent to $28.50 - 51.48 = -22.19 \text{ dB}\mu\text{A}/\text{m}$, which has the same margin, -40.25 dB, to the corresponding RSS-GEN Table 6 limit as it has to the 15.209(a) limit.

The measurement procedures are as per ANSI C63.10-2013 Sections 6.3, Section 6.4, Section 6.5, and Section 6.6

1. The table height for emissions measurements
 - i) Below 1 GHz, the table height is 80 cm above the reference ground plane.
 - ii) Above 1 GHz, the table height is 1.5 m
2. Radiated emission tests are performed in the frequency range
 - i) 9 kHz to 30 MHz, using a calibrated loop antenna
 - ii) 30 MHz to 1GHz, using a calibrated log antenna
 - iii) Above 1 GHz using a calibrated horn antenna
3. Measurements performed with the EUT rotated from 0° to 360°, the antenna height scanned between 1m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

5.5 Test Data

Uncertainty

Radiated Emissions (30MHz to 40GHz)

Test Engineer Initials: AB

The test is to measure the radiated emissions of the EUT. Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

30MHz to 1GHZ

Source of Uncertainty	Value (dB)	ProbabilityDistribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter – Receiver	0.25	U-Shape	2.449	1	0.1768033
NSA Calibration	4.0	Triangular	1.414	1	1.633332
ETS Foam Table (LDT-1.5)	1.8	Rectangular	1.732	1	1.039261
Combined Standard Uncertainty (square root of the sum of the squares)					2.113781
Expanded Uncertainty (K=2)					4.227562

The total derived measurement uncertainty is +/- 4.228 dB

1GHz to 40GHz

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105000
Filter Insertion Loss	0.25	Normal	2	1	0.125000
Antenna Factor	0.65	Normal	2	1	0.325000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.866051
PRF Response	1.5	Rectangular	1.732	1	0.866051
Mismatch Filter – Receiver	0.25	U-Shape	1.414	1	0.176803
VSWR Calibration	2.0	Triangular	2.449	1	0.816659
ETS Foam Table (LDT-1.5)	1.8	Rectangular	1.732	1	1.039261
Combined Standard Uncertainty (square root of the sum of the squares)					1.869213
Expanded Uncertainty (K=2)					3.738426

The total derived measurement uncertainty is +/- 3.738 dB.

Remarks:

1. Level Q-Peak Reading (dBµV/m) = Raw Q-Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Q-Peak Reading – Limit

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:


1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Average Reading – Limit

AH22100701-HAR-053#5_2.4G 802.11g_Ch 6_9kHz-30MHz_Ground-Parallel

12/28/2022 3:57:12 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.190086MHz	29.29	19.49	69.54	-40.25	1.00	218.50	H/V	Passed
2.	12.577024MHz	28.46	19.83	69.54	-41.08	1.00	179.00	H/V	Passed
3.	13.382612MHz	28.34	19.85	69.54	-41.20	1.00	265.00	H/V	Passed
4.	16.694949MHz	29.09	19.92	69.54	-40.45	1.00	29.30	H/V	Passed
5.	25.637829MHz	32.15	20.99	69.54	-37.39	1.00	292.90	H/V	Passed
6.	30MHz	30.59	21.85	40.00	-9.41	1.00	40.10	H/V	Passed

Overall Graphs:

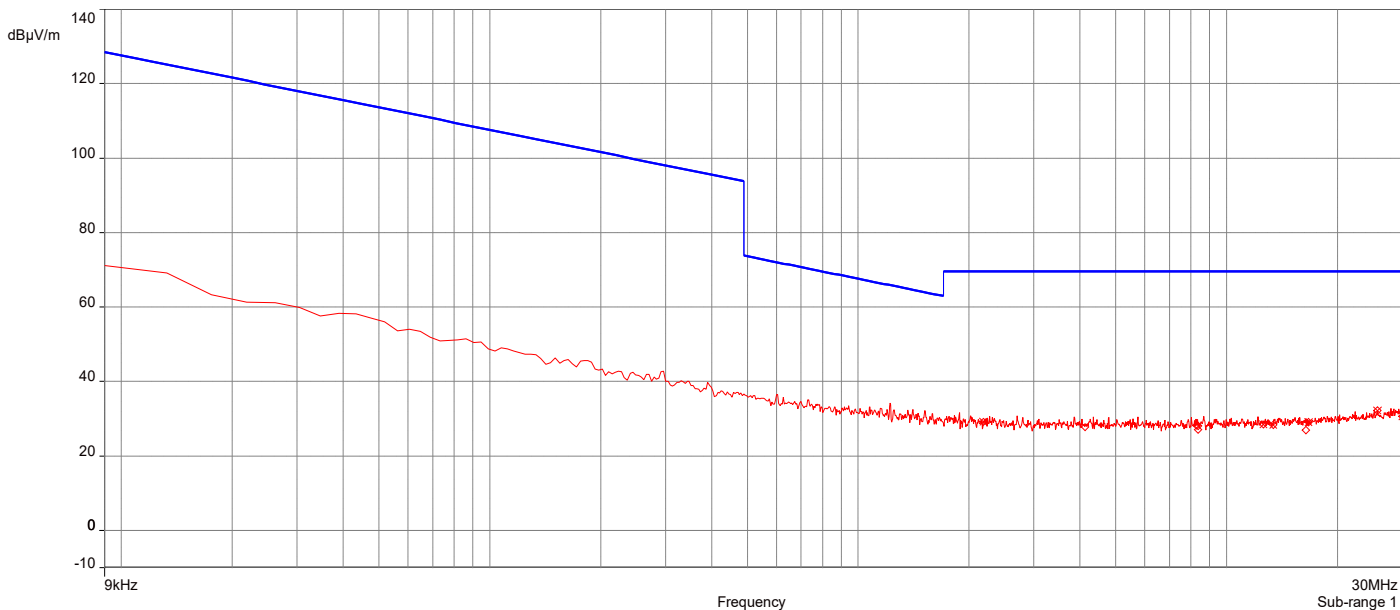

Remarks:


1. Level Q-Peak Reading (dBμV/m) = Raw Q-Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Q-Peak Reading – Limit

AH22100701-HAR-053#5_2.4G 802.11g_Ch 6_9kHz-30MHz_Parallel

12/28/2022 3:50:30 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	2.177231MHz	28.31	19.49	69.54	-41.23	1.00	333.50	H/V	Passed
2	13.365472MHz	29.65	19.85	69.54	-39.89	1.00	2.70	H/V	Passed
3	16.420706MHz	29.17	19.89	69.54	-40.37	1.00	0.10	H/V	Passed
4	16.694949MHz	28.39	19.92	69.54	-41.15	1.00	131.50	H/V	Passed
5	25.616403MHz	31.37	20.99	69.54	-38.17	1.00	331.80	H/V	Passed
6	30MHz	31.27	21.85	40.00	-8.73	1.00	51.00	H/V	Passed

Overall Graphs:

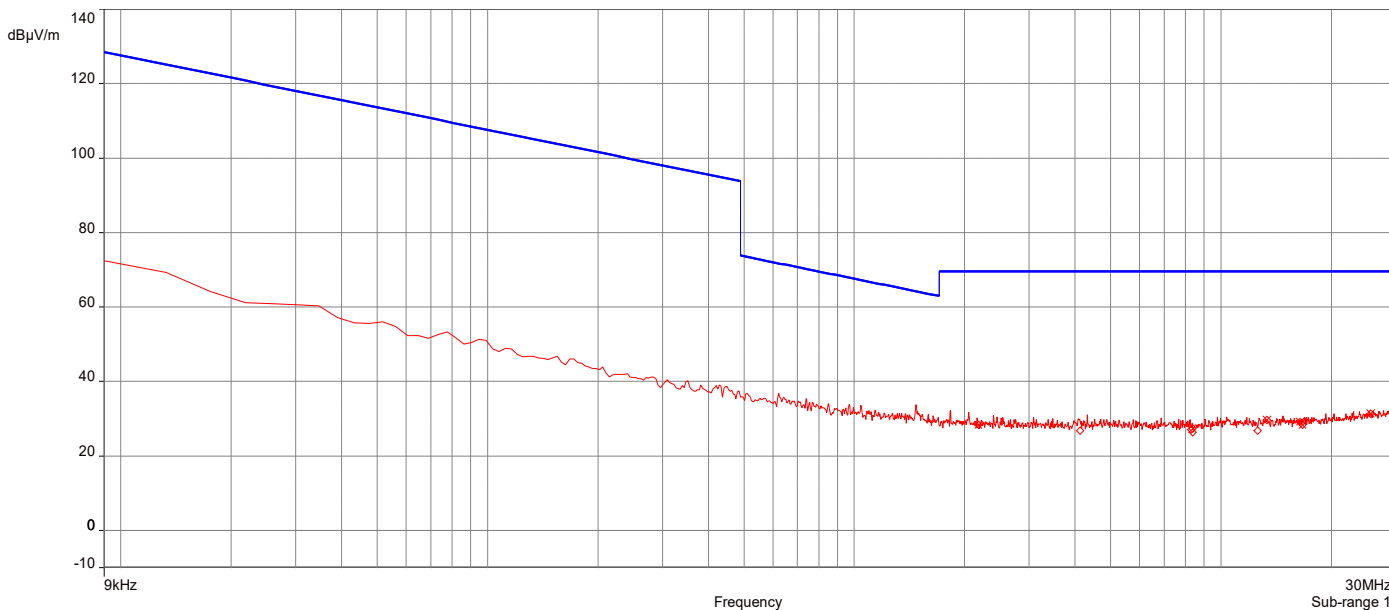

Remarks:


1. Level Q-Peak Reading (dBμV/m) = Raw Q-Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Q-Peak Reading – Limit

AH22100701-HAR-053#5_2.4G 802.11g_Ch 6_9kHz-30MHz_Perpendicular

12/28/2022 3:52:46 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	2.181516MHz	28.22	19.49	69.54	-41.32	1.00	54.00	H/V	Passed
2	8.291984MHz	27.38	19.45	69.54	-42.16	1.00	117.50	H/V	Passed
3	8.386255MHz	28.23	19.45	69.54	-41.31	1.00	358.90	H/V	Passed
4	13.391182MHz	29.28	19.85	69.54	-40.26	1.00	263.50	H/V	Passed
5	25.603548MHz	32.28	20.99	69.54	-37.26	1.00	358.90	H/V	Passed
6	30MHz	30.12	21.85	40.00	-9.88	1.00	77.10	H/V	Passed

Overall Graphs:

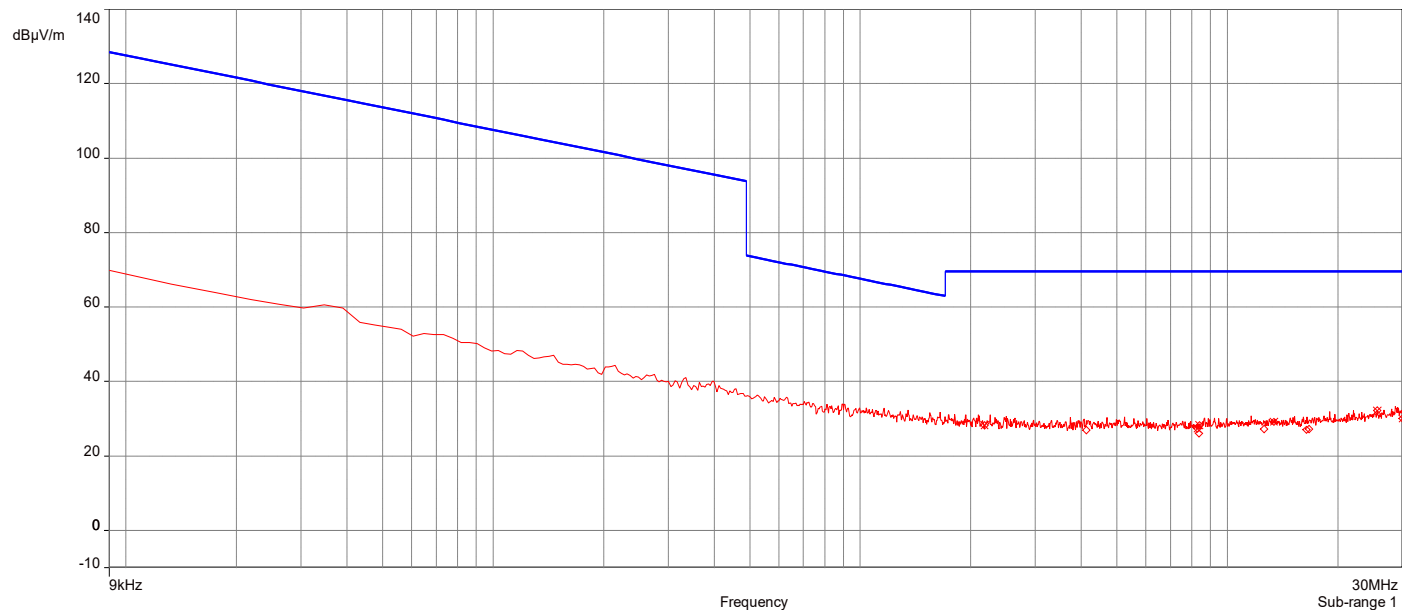

Remarks:


1. Level Q-Peak Reading (dBμV/m) = Raw Q-Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Q-Peak Reading – Limit

AH22100701-HAR-053#5_2.4G 802.11n_Ch 6_9kHz-30MHz_Ground-Parallel

12/28/2022 4:01:02 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	2.181516MHz	30.03	19.49	69.54	-39.51	1.00	301.80	H/V	Passed
2	13.361187MHz	28.51	19.85	69.54	-41.03	1.00	76.40	H/V	Passed
3	16.420706MHz	28.22	19.89	69.54	-41.32	1.00	283.20	H/V	Passed
4	16.694949MHz	28.06	19.92	69.54	-41.48	1.00	284.50	H/V	Passed
5	25.629258MHz	31.38	20.99	69.54	-38.16	1.00	329.70	H/V	Passed
6	30MHz	29.65	21.85	40.00	-10.35	1.00	34.30	H/V	Passed

Overall Graphs:

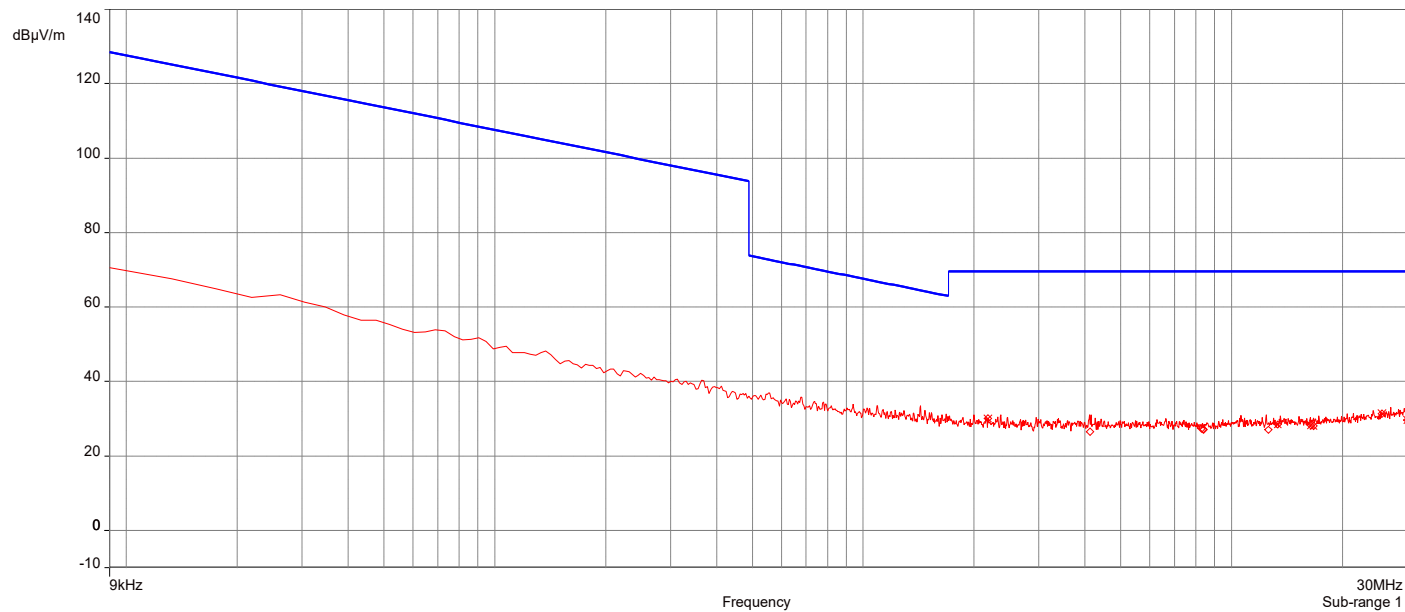

Remarks:


1. Level Q-Peak Reading (dBμV/m) = Raw Q-Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Q-Peak Reading – Limit

AH22100701-HAR-053#5_2.4G 802.11n_Ch 6_9kHz-30MHz_Parallel

12/28/2022 4:06:21 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	2.181516MHz	29.29	19.49	69.54	-40.25	1.00	60.90	H/V	Passed
2	8.291984MHz	28.90	19.45	69.54	-40.64	1.00	355.50	H/V	Passed
3	12.577024MHz	30.58	19.83	69.54	-38.96	1.00	86.00	H/V	Passed
4	13.391182MHz	29.05	19.85	69.54	-40.49	1.00	1.40	H/V	Passed
5	25.646399MHz	31.59	20.99	69.54	-37.95	1.00	33.40	H/V	Passed
6	30MHz	30.05	21.85	40.00	-9.95	1.00	9.40	H/V	Passed

Overall Graphs:

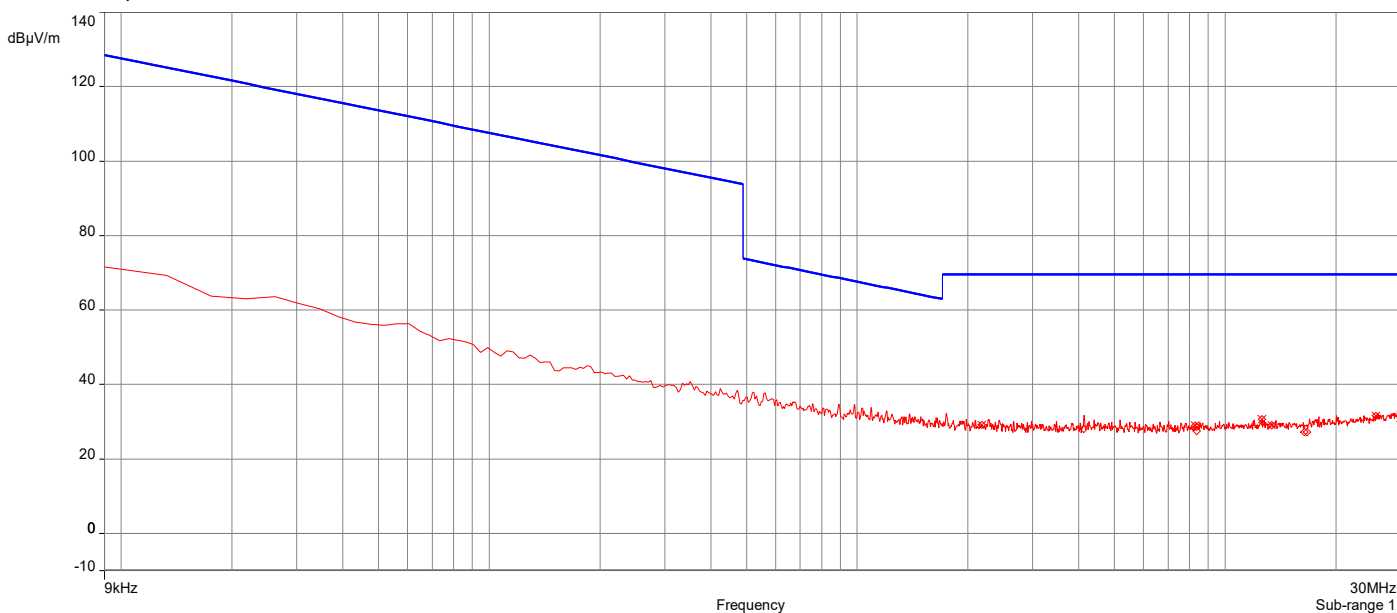

Remarks:


1. Level Q-Peak Reading (dBμV/m) = Raw Q-Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Q-Peak Reading – Limit

AH22100701-HAR-053#5_2.4G 802.11n_Ch 6_9kHz-30MHz_Perpendicular

12/28/2022 4:03:46 PM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	2.190086MHz	29.41	19.49	69.54	-40.13	1.00	336.20	H/V	Passed
2	8.38197MHz	28.04	19.45	69.54	-41.50	1.00	218.80	H/V	Passed
3	12.577024MHz	28.31	19.83	69.54	-41.23	1.00	187.50	H/V	Passed
4	13.395467MHz	28.97	19.85	69.54	-40.57	1.00	250.30	H/V	Passed
5	25.654969MHz	31.20	20.99	69.54	-38.34	1.00	36.30	H/V	Passed
6	30MHz	29.32	21.85	40.00	-10.68	1.00	91.60	H/V	Passed

Overall Graphs:

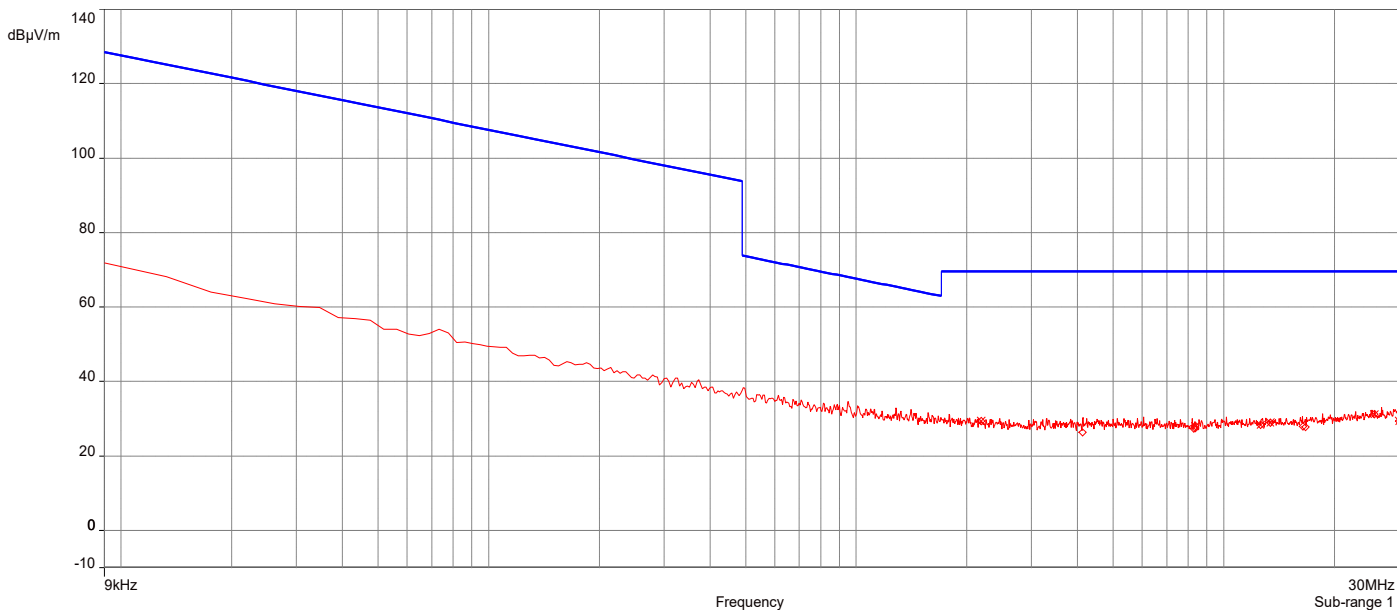

Remarks:


1. Level Q-Peak Reading (dBμV/m) = Raw Q-Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Q-Peak Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11g_Ch 6_30MHz-1GHz

12/28/2022 10:55:53 AM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	621.50656MHz	38.26	-5.18	46.00	-7.74	1.00	112.90	Vertical	Passed
2.	759.59704MHz	40.28	-3.28	46.00	-5.72	1.00	89.20	Vertical	Passed
3.	828.64227MHz	37.96	-2.26	46.00	-8.04	1.00	130.60	Vertical	Passed
4.	621.4495MHz	37.48	-4.13	46.00	-8.52	1.00	227.50	Horizontal	Passed
5.	759.59704MHz	40.02	-2.18	46.00	-5.98	1.00	68.20	Horizontal	Passed
6.	828.64227MHz	39.51	-0.86	46.00	-6.49	1.00	66.50	Horizontal	Passed

Overall Graphs:

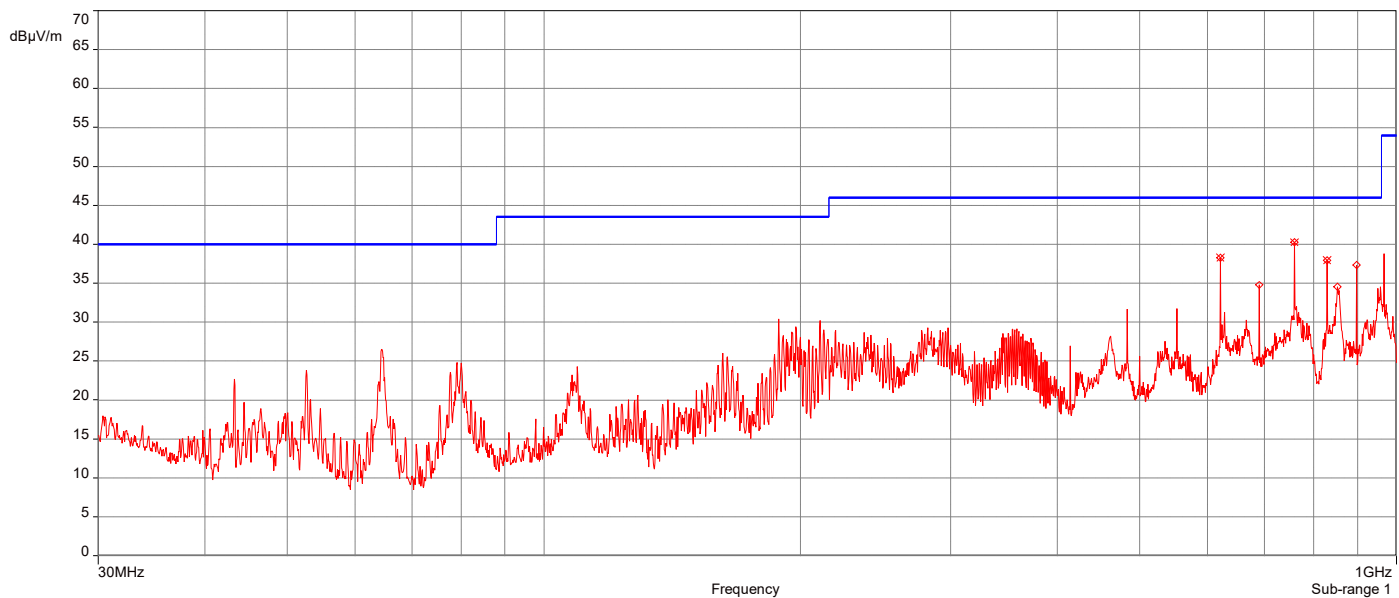

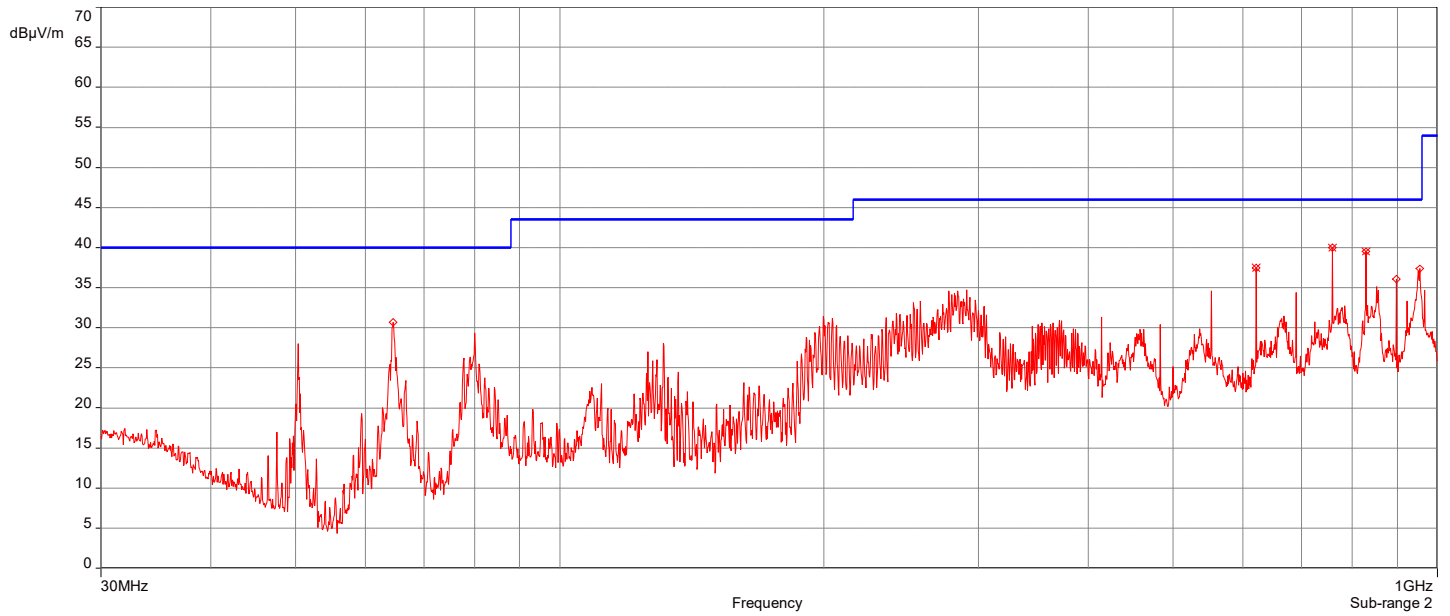

Remarks:


1. Level Q-Peak Reading (dBµV/m) = Raw Q-Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Q-Peak Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11n_Ch 6_30MHz-1GHz

12/28/2022 11:11:25 AM

No	Frequency (MHz)	Level Q-Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	759.59704MHz	37.67	-3.28	46.00	-8.33	1.00	88.00	Vertical	Passed
2	897.68751MHz	36.42	-1.68	46.00	-9.58	1.00	178.70	Vertical	Passed
3	64.522619MHz	30.48	-17.95	40.00	-9.52	3.00	0.10	Horizontal	Passed
4	759.59704MHz	38.93	-2.18	46.00	-7.07	1.00	59.10	Horizontal	Passed
5	828.64227MHz	38.35	-0.86	46.00	-7.65	1.00	76.80	Horizontal	Passed
6	951.7254MHz	36.13	0.03	46.00	-9.87	1.00	60.80	Horizontal	Passed

Overall Graphs:

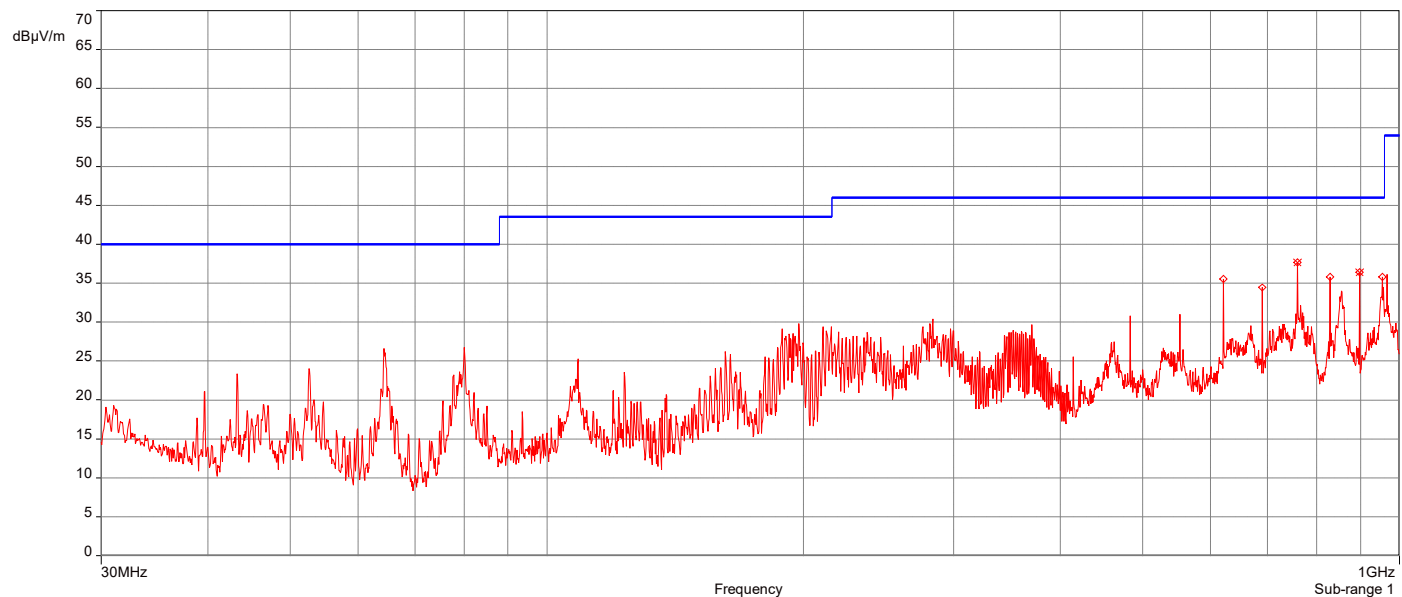

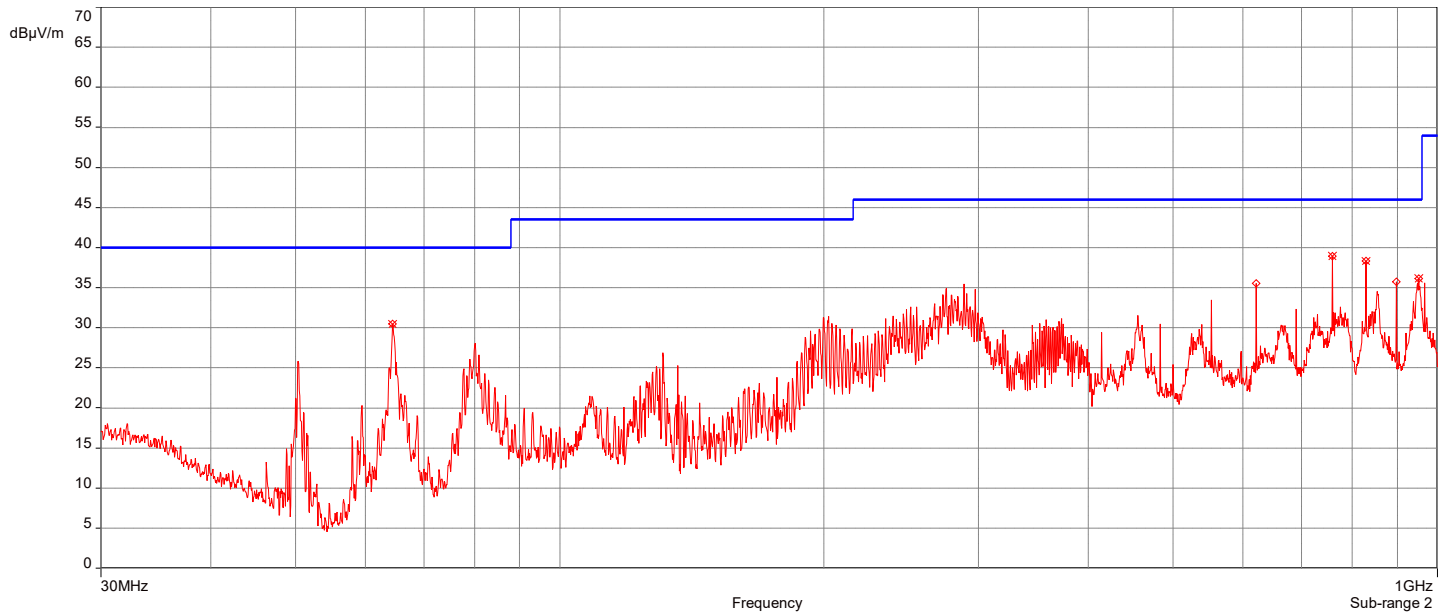

Remarks:

1. Level Q-Peak Reading (dBµV/m) = Raw Q-Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Q-Peak Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11b_Ch 1_1-18GHz


11/23/2022 10:37:09 AM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	1.6570193GHz	42.14	-5.30	74.00	-31.86	2.50	119.10	Vertical	Passed
2.	1.8640254GHz	42.51	-4.31	74.00	-31.49	2.00	70.20	Vertical	Passed
3.	2.4090414GHz	43.01	-1.99	74.00	-30.99	1.00	157.80	Vertical	Passed
4.	17.9965GHz	55.68	21.69	74.00	-18.32	2.50	2.40	Vertical	Passed
5.	14.834407GHz	50.72	15.66	74.00	-23.28	1.50	56.40	Horizontal	Passed
6.	17.964999GHz	55.92	21.06	74.00	-18.08	3.50	106.10	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.4105415GHz	41.43	-1.99	54.00	-12.57	1.50	162.80	Vertical	Passed
2.	11.88932GHz	45.06	11.49	54.00	-8.94	3.00	112.10	Vertical	Passed
3.	17.931998GHz	42.55	20.79	54.00	-11.45	3.00	291.90	Vertical	Passed
4.	12.378335GHz	45.02	11.99	54.00	-8.98	3.50	314.20	Horizontal	Passed
5.	14.832407GHz	37.61	15.69	54.00	-16.39	3.00	190.10	Horizontal	Passed
6.	17.964999GHz	42.92	21.06	54.00	-11.08	3.50	106.10	Horizontal	Passed

Overall Graphs:

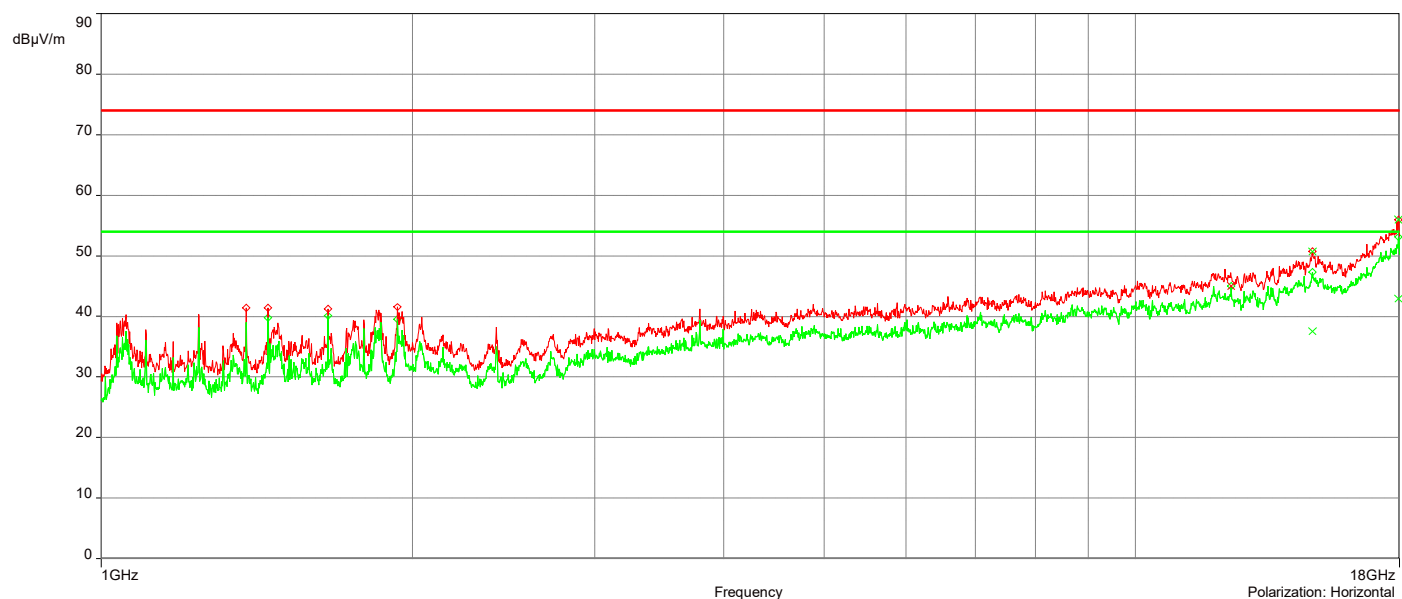

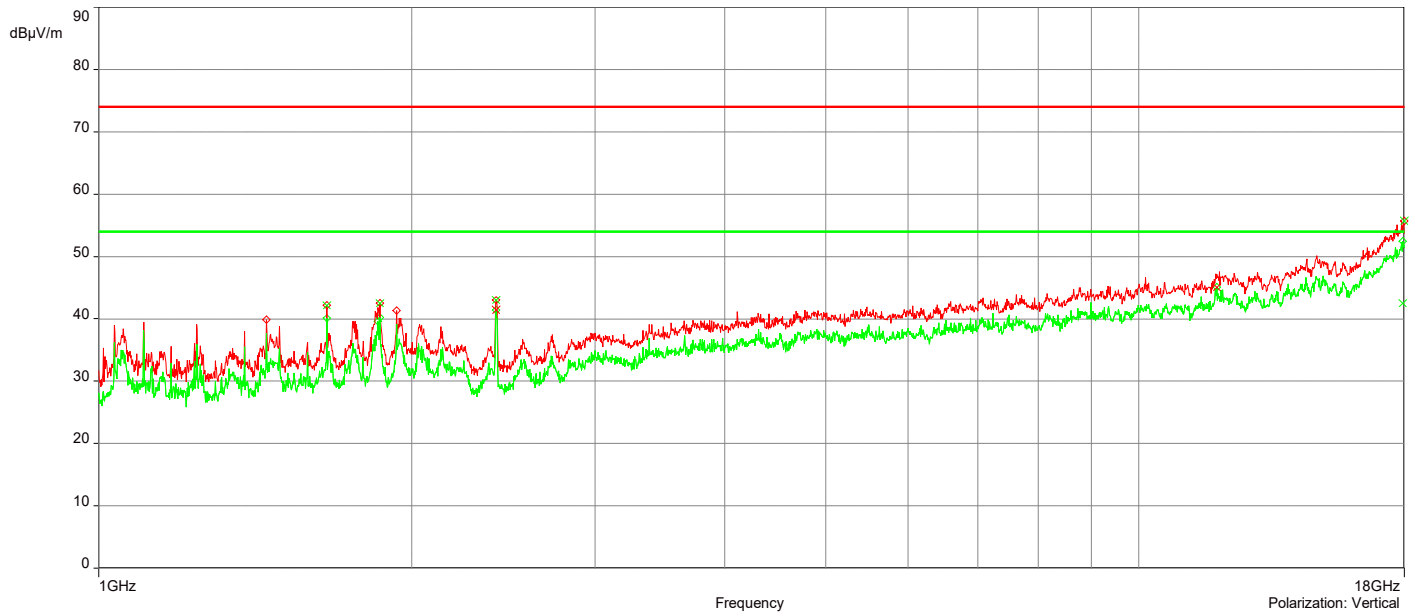

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#4_2.4G 802.11b_Ch 6_1-18GHz


12/6/2022 12:37:27 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	1.851525GHz	43.45	-4.38	74.00	-30.55	2.50	88.60	Vertical	Passed
2	5.2521251GHz	44.67	4.38	74.00	-29.33	4.00	359.90	Vertical	Passed
3	14.826907GHz	51.34	15.64	74.00	-22.66	4.00	59.20	Vertical	Passed
4	17.9975GHz	55.68	21.72	74.00	-18.32	2.00	247.40	Vertical	Passed
5	14.803406GHz	50.33	15.41	74.00	-23.67	1.50	20.60	Horizontal	Passed
6	17.956499GHz	55.35	20.96	74.00	-18.65	2.00	359.90	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	5.2521251GHz	41.69	4.38	54.00	-12.31	4.00	359.90	Vertical	Passed
2	13.531369GHz	45.22	11.28	54.00	-8.78	4.00	359.90	Vertical	Passed
3	17.956499GHz	42.54	21.02	54.00	-11.46	2.00	241.90	Vertical	Passed
4	11.929821GHz	45.04	11.65	54.00	-8.96	1.00	0.10	Horizontal	Passed
5	14.841907GHz	47.78	15.55	54.00	-6.22	1.50	235.80	Horizontal	Passed
6	17.956499GHz	42.28	20.96	54.00	-11.72	2.00	359.90	Horizontal	Passed

Overall Graphs:

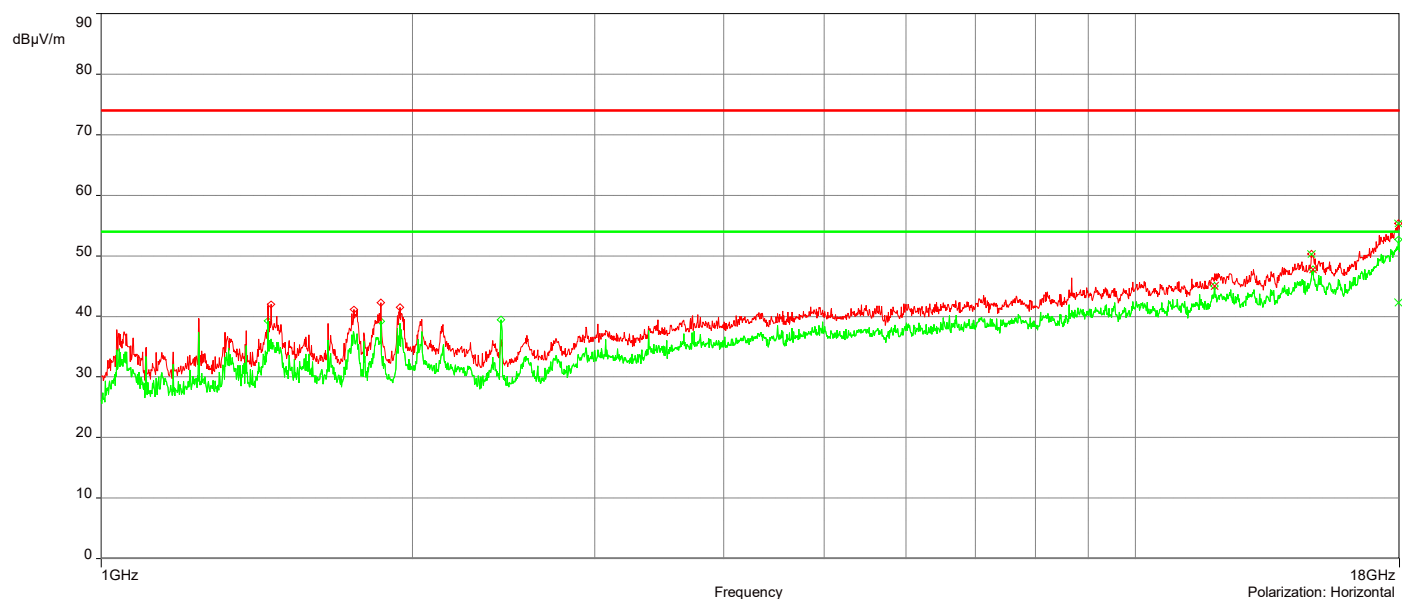

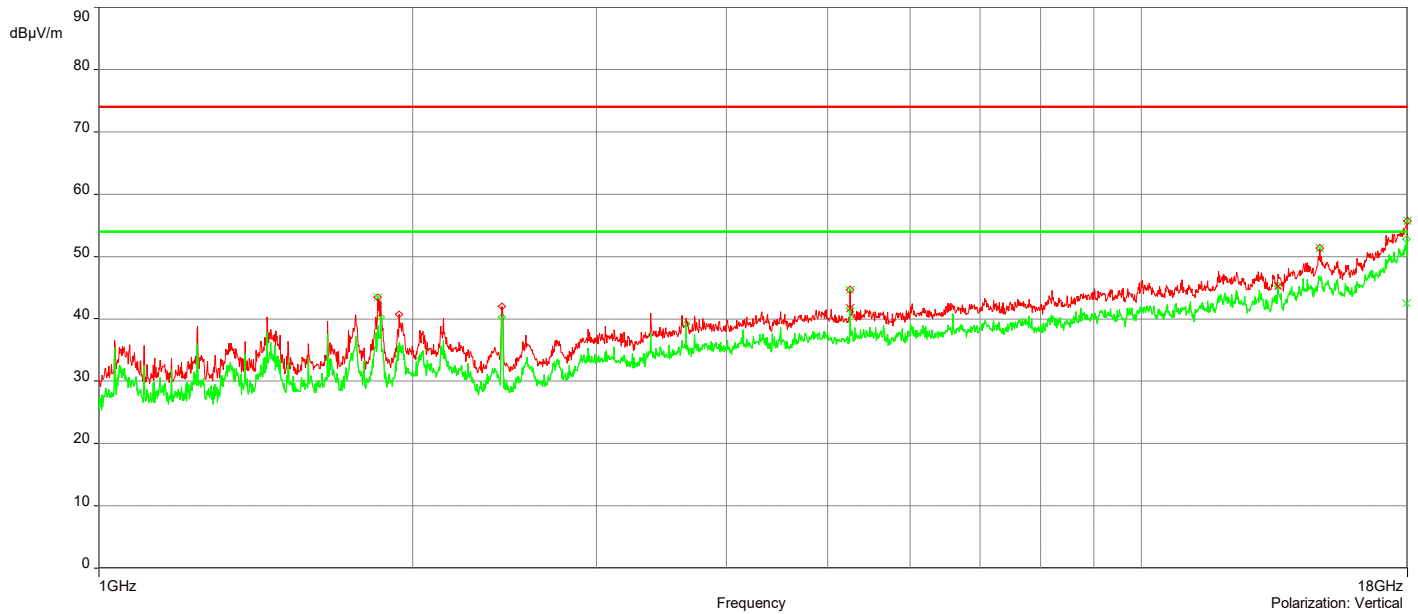

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11b_Ch 11_1-18GHz


11/23/2022 10:55:20 AM

No	Frequency (MHz)	Level Peak Reading (dBµV/m)	Correction Factor (dB)	Limit dBµV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	1.6570193GHz	42.46	-5.30	74.00	-31.54	3.00	98.20	Vertical	Passed
2	1.851525GHz	42.38	-4.38	74.00	-31.62	2.00	114.90	Vertical	Passed
3	17.981999GHz	55.44	21.32	74.00	-18.56	3.00	66.70	Vertical	Passed
4	1.8645254GHz	43.45	-4.23	74.00	-30.55	2.50	105.10	Horizontal	Passed
5	11.88232GHz	48.60	11.39	74.00	-25.40	4.00	213.50	Horizontal	Passed
6	17.907497GHz	55.21	20.53	74.00	-18.79	1.50	185.80	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBµV/m)	Correction Factor (dB)	Limit dBµV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	1.6570193GHz	40.16	-5.30	54.00	-13.84	3.00	98.20	Vertical	Passed
2	1.8640254GHz	39.17	-4.31	54.00	-14.83	2.00	124.20	Vertical	Passed
3	12.318833GHz	44.91	11.83	54.00	-9.09	2.00	0.10	Vertical	Passed
4	17.976499GHz	42.57	21.23	54.00	-11.43	1.00	312.10	Vertical	Passed
5	1.6570193GHz	39.79	-5.42	54.00	-14.21	2.00	140.90	Horizontal	Passed
6	17.903497GHz	42.67	20.51	54.00	-11.33	1.00	304.10	Horizontal	Passed

Overall Graphs:

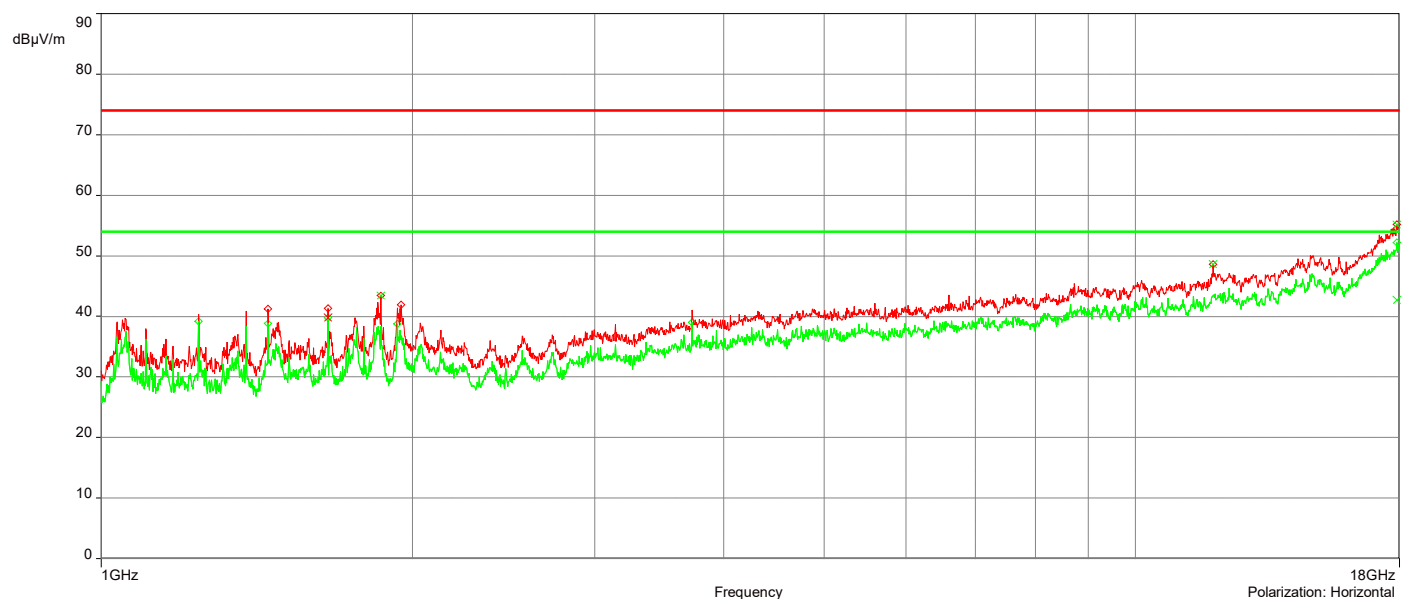

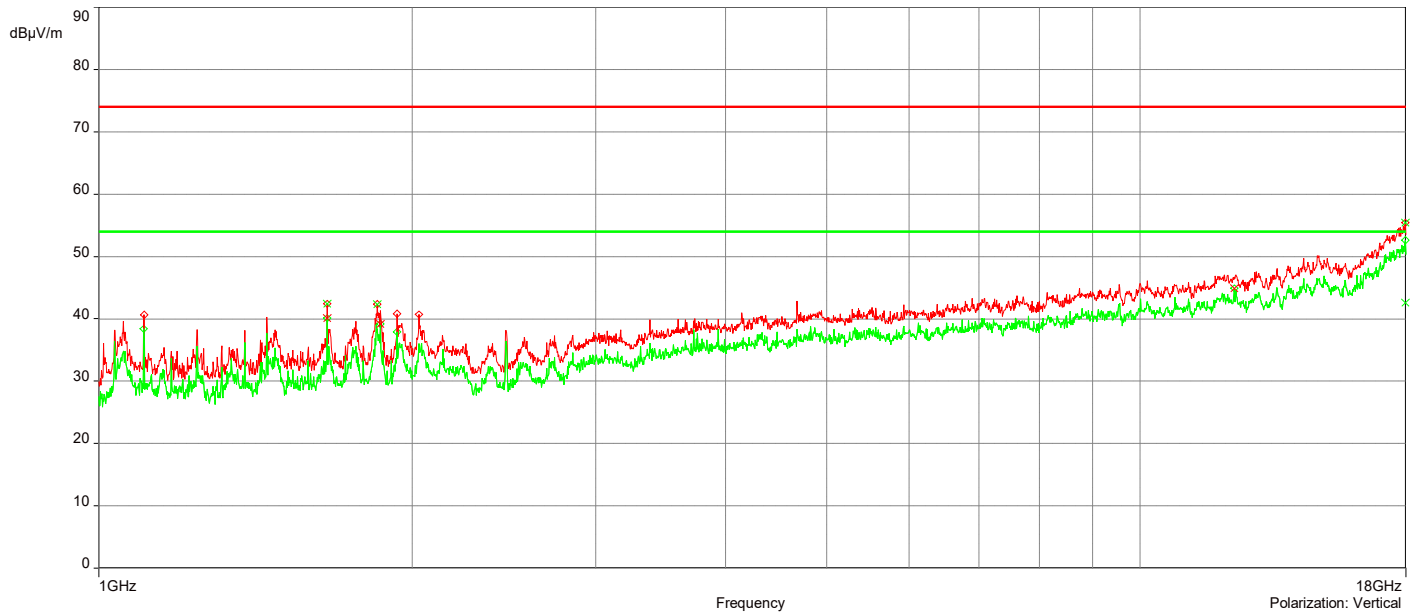

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11g_Ch 1_1-18GHz


11/22/2022 6:39:08 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	1.6570193GHz	41.98	-5.30	74.00	-32.02	2.50	113.20	Vertical	Passed
2	1.8645254GHz	42.01	-4.30	74.00	-31.99	3.50	74.20	Vertical	Passed
3	2.4105415GHz	42.74	-1.99	74.00	-31.26	1.50	150.30	Vertical	Passed
4	17.968999GHz	56.86	21.15	74.00	-17.14	1.50	217.90	Vertical	Passed
5	1.6570193GHz	41.30	-5.42	74.00	-32.70	1.00	52.50	Horizontal	Passed
6	17.931498GHz	55.91	20.72	74.00	-18.09	2.00	248.10	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
4.	2.4105415GHz	40.93	-1.99	54.00	-13.07	1.50	150.30	Vertical	Passed
5.	11.88332GHz	45.85	11.45	54.00	-8.15	3.50	151.90	Vertical	Passed
6.	14.802406GHz	36.88	15.29	54.00	-17.12	4.00	254.10	Vertical	Passed
7.	17.968999GHz	42.95	21.15	54.00	-11.05	1.50	217.90	Vertical	Passed
8.	14.830907GHz	37.51	15.71	54.00	-16.49	3.50	353.90	Horizontal	Passed
9.	17.958999GHz	42.68	20.99	54.00	-11.32	2.50	285.90	Horizontal	Passed

Overall Graphs:

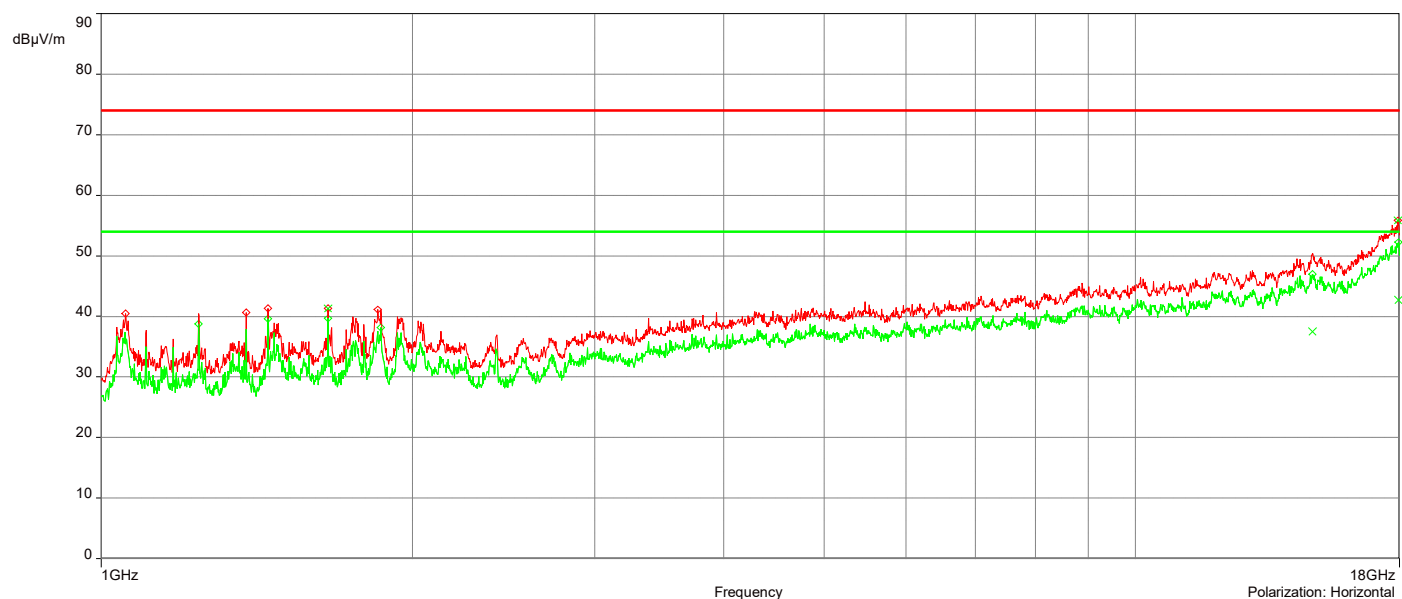

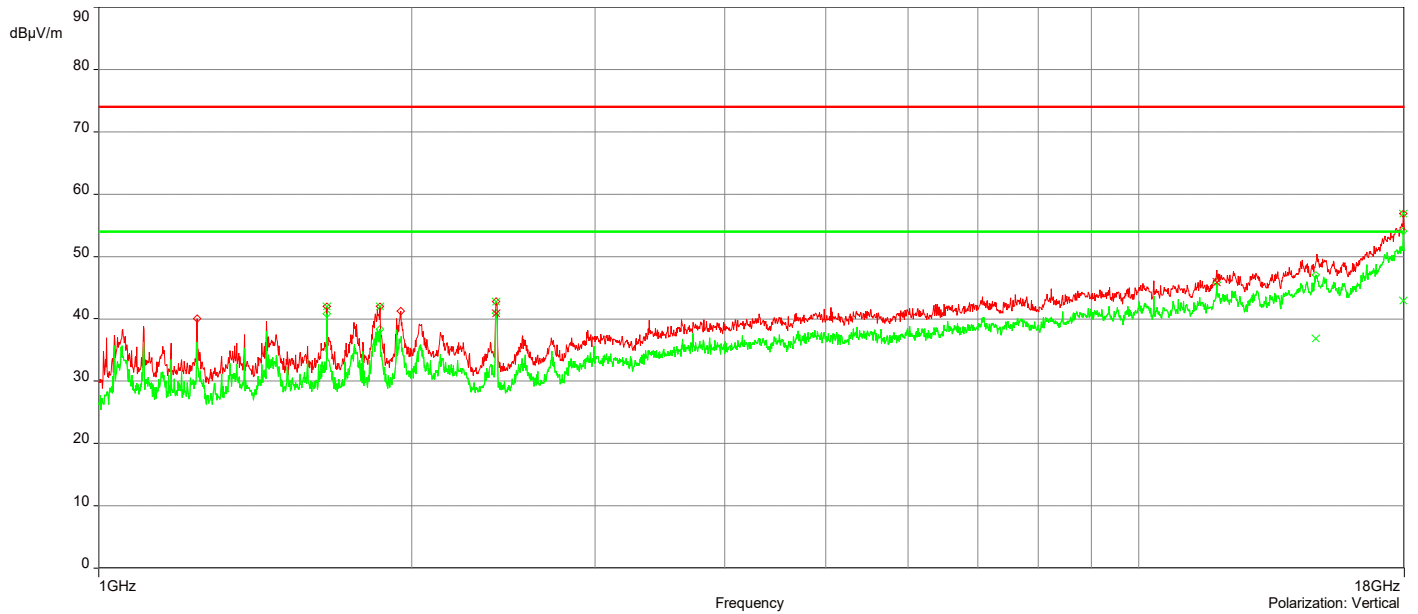

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11g_Ch 6_1-18GHz


12/6/2022 1:10:29 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	1.8535251GHz	43.50	-4.37	74.00	-30.50	2.50	103.50	Vertical	Passed
2	5.2676255GHz	44.29	4.42	74.00	-29.71	2.50	355.10	Vertical	Passed
3	17.892997GHz	55.15	20.53	74.00	-18.85	2.00	237.50	Vertical	Passed
4	1.4500132GHz	44.00	-7.03	74.00	-30.00	2.00	84.30	Horizontal	Passed
5	14.809906GHz	50.04	15.50	74.00	-23.96	1.00	295.40	Horizontal	Passed
6	17.967999GHz	55.27	21.09	74.00	-18.73	3.50	134.50	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	5.2651254GHz	40.96	4.41	54.00	-13.04	2.50	355.10	Vertical	Passed
2	17.996GHz	42.67	21.68	54.00	-11.33	2.50	359.90	Vertical	Passed
3	1.4500132GHz	40.44	-7.03	54.00	-13.56	2.00	84.30	Horizontal	Passed
4	12.407336GHz	45.37	11.98	54.00	-8.63	3.50	218.20	Horizontal	Passed
5	14.831907GHz	47.81	15.69	54.00	-6.19	2.00	208.40	Horizontal	Passed
6	17.957999GHz	42.30	20.98	54.00	-11.70	3.50	0.10	Horizontal	Passed

Overall Graphs:

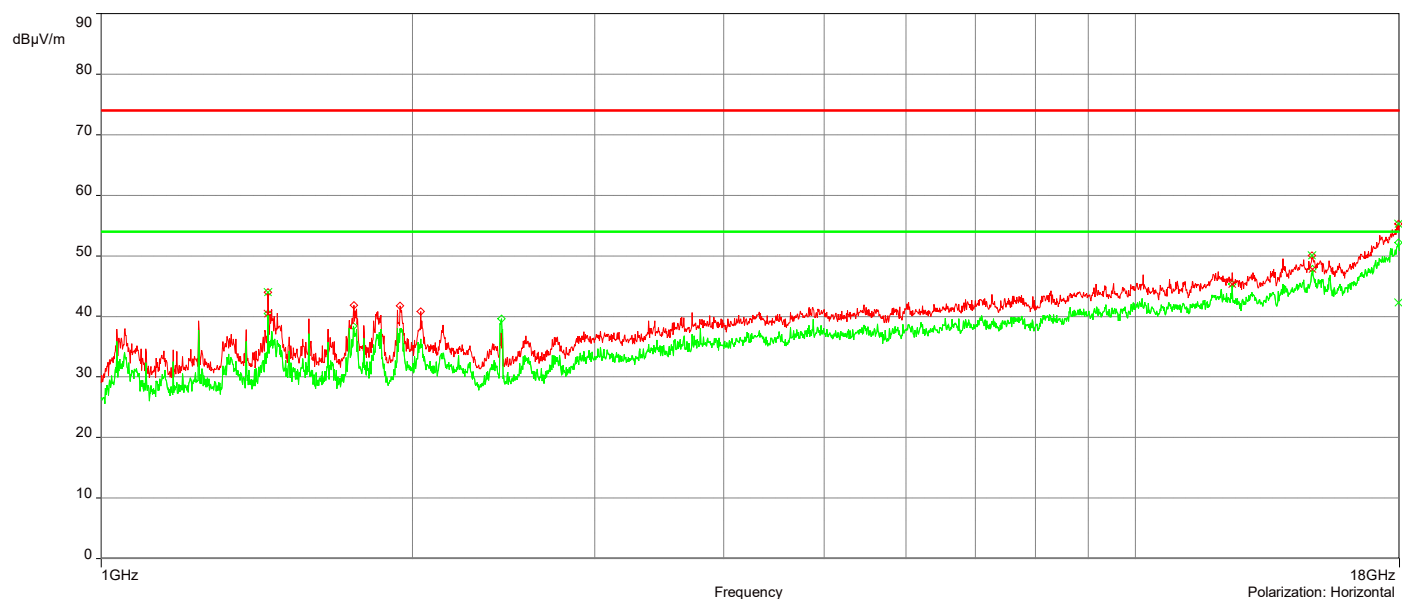

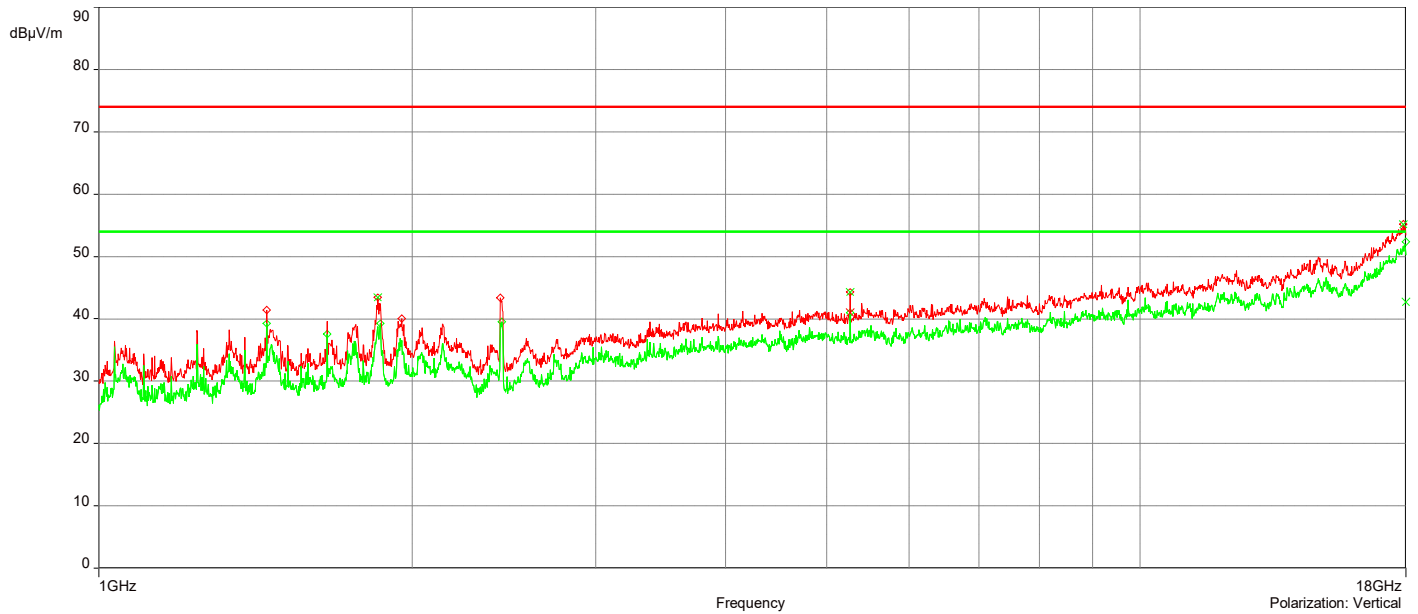

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11g_Ch 11_1-18GHz


11/22/2022 7:03:03 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	1.6570193GHz	41.96	-5.30	74.00	-32.04	3.00	94.70	Vertical	Passed
2	1.9485279GHz	42.00	-3.23	74.00	-32.00	1.00	66.70	Vertical	Passed
3	17.967999GHz	55.42	21.14	74.00	-18.58	2.00	34.60	Vertical	Passed
4	1.6570193GHz	41.72	-5.42	74.00	-32.28	2.00	137.40	Horizontal	Passed
5	1.8640254GHz	43.31	-4.24	74.00	-30.69	2.50	106.70	Horizontal	Passed
6	17.898497GHz	55.37	20.48	74.00	-18.63	3.00	283.30	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	1.6570193GHz	40.20	-5.30	54.00	-13.80	3.00	94.70	Vertical	Passed
2	10.784788GHz	44.08	10.08	54.00	-9.92	3.00	99.60	Vertical	Passed
3	14.823907GHz	37.42	15.60	54.00	-16.58	4.00	344.90	Vertical	Passed
4	17.904997GHz	42.75	20.59	54.00	-11.25	3.50	201.10	Vertical	Passed
5	1.8640254GHz	40.82	-4.24	54.00	-13.18	2.50	106.70	Horizontal	Passed
6	17.264978GHz	40.46	17.91	54.00	-13.54	1.00	96.10	Horizontal	Passed

Overall Graphs:

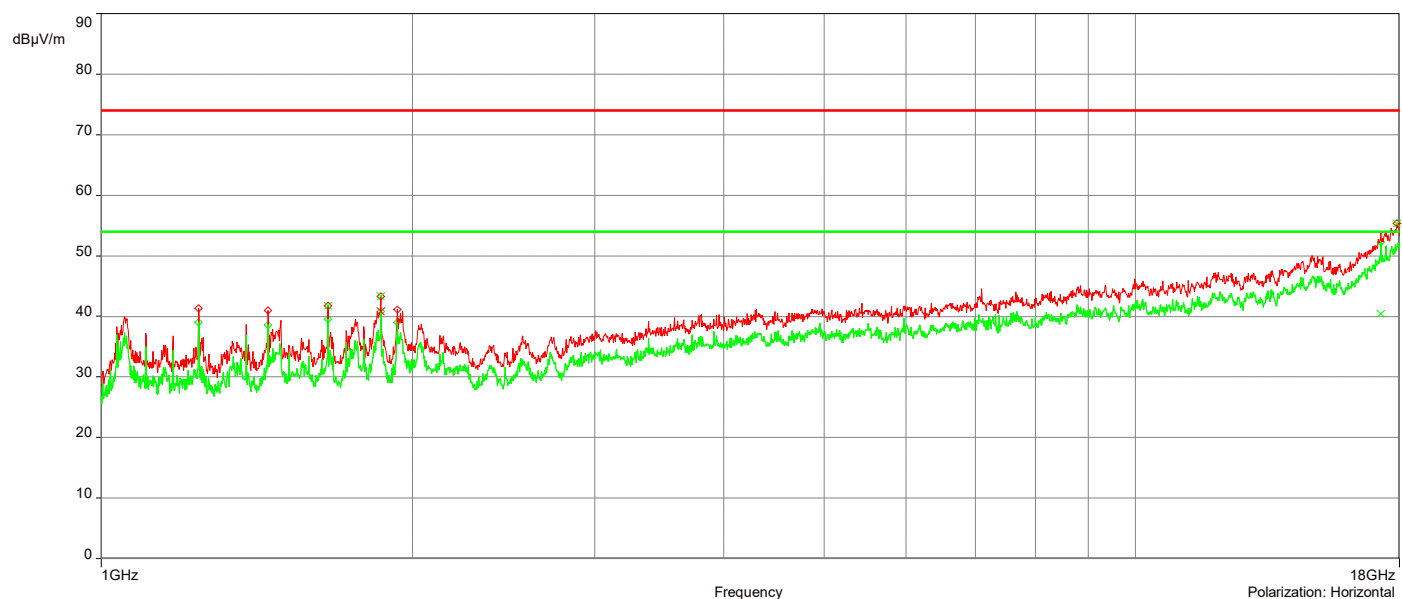

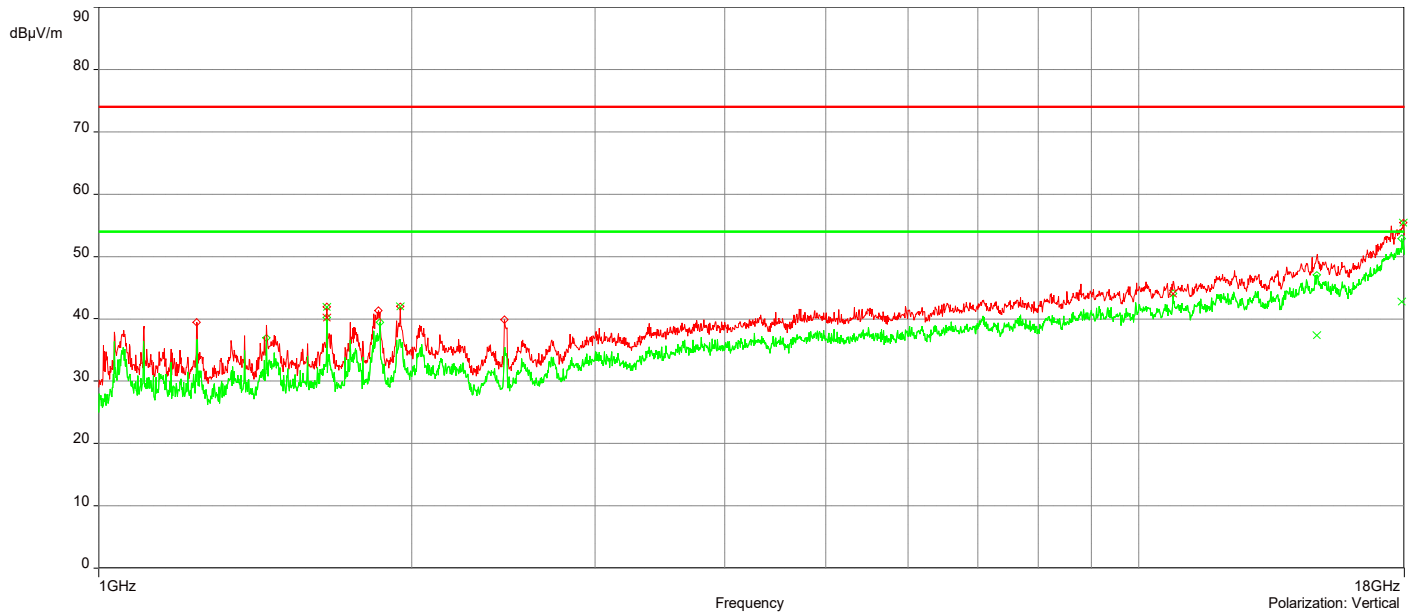

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11n_Ch 1_1-18GHz


11/22/2022 7:24:09 PM

No	Frequency (MHz)	Level Peak Reading (dBµV/m)	Correction Factor (dB)	Limit dBµV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	1.6570193GHz	42.13	-5.30	74.00	-31.87	2.50	114.00	Vertical	Passed
2	2.4095415GHz	43.89	-1.99	74.00	-30.11	1.50	156.80	Vertical	Passed
3	17.9985GHz	56.17	21.75	74.00	-17.83	1.50	291.40	Vertical	Passed
4	1.8580252GHz	43.01	-4.29	74.00	-30.99	1.00	67.50	Horizontal	Passed
5	1.9335275GHz	42.06	-3.65	74.00	-31.94	3.00	72.40	Horizontal	Passed
6	17.998GHz	56.37	21.71	74.00	-17.63	2.50	22.00	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBµV/m)	Correction Factor (dB)	Limit dBµV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	2.4045413GHz	40.88	-1.99	54.00	-13.12	1.50	130.50	Vertical	Passed
2	11.921821GHz	45.61	11.68	54.00	-8.39	1.50	276.90	Vertical	Passed
3	14.385894GHz	35.61	14.34	54.00	-18.39	2.00	89.10	Vertical	Passed
4	17.907997GHz	42.58	20.60	54.00	-11.42	4.00	359.90	Vertical	Passed
5	14.832907GHz	37.51	15.68	54.00	-16.49	1.00	359.90	Horizontal	Passed
6	17.998GHz	42.77	21.71	54.00	-11.23	2.50	22.00	Horizontal	Passed

Overall Graphs:

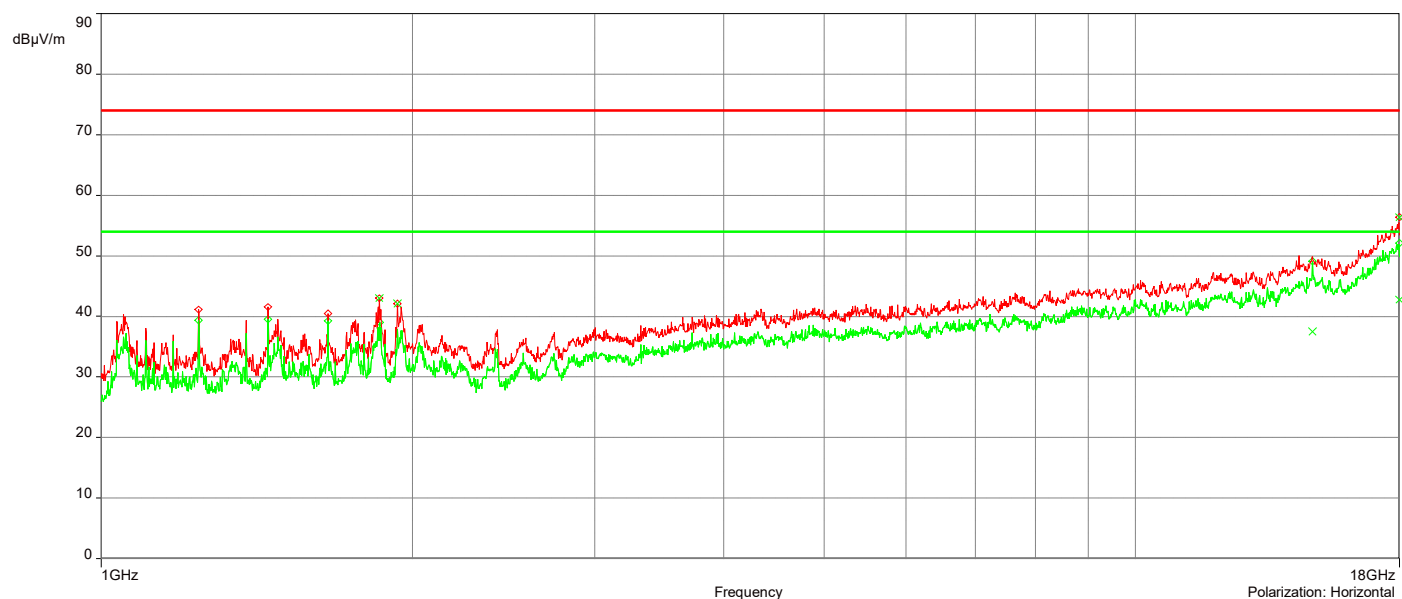

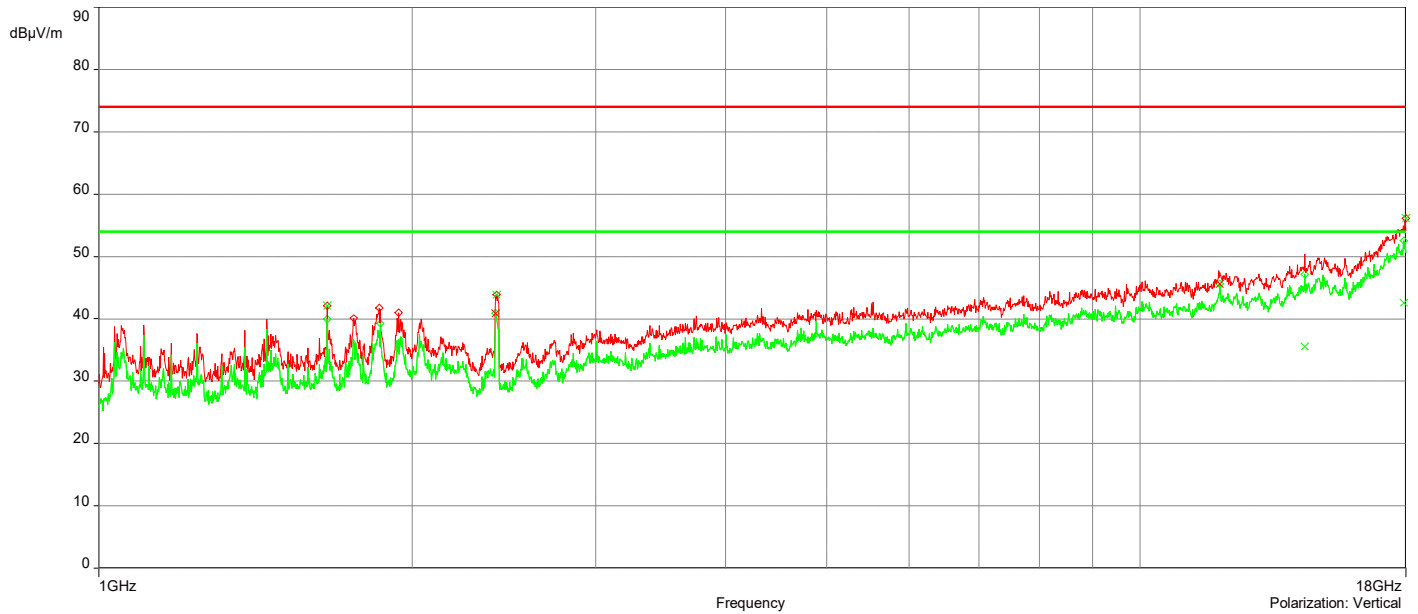

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11n_Ch 6_1-18GHz


12/6/2022 1:18:15 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	5.1921233GHz	45.84	4.32	74.00	-28.16	2.50	324.20	Vertical	Passed
2	5.2026236GHz	46.45	4.31	74.00	-27.55	2.50	324.20	Vertical	Passed
3	5.2531251GHz	44.36	4.38	74.00	-29.64	1.00	310.40	Vertical	Passed
4	17.902497GHz	55.42	20.58	74.00	-18.58	4.00	37.10	Vertical	Passed
5	14.817906GHz	50.31	15.60	74.00	-23.69	2.00	133.10	Horizontal	Passed
6	17.9985GHz	55.47	21.72	74.00	-18.53	1.50	118.30	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
4.	5.1921233GHz	42.41	4.32	54.00	-11.59	2.50	324.20	Vertical	Passed
5.	5.1956234GHz	43.58	4.31	54.00	-10.42	2.50	324.20	Vertical	Passed
6.	5.2046237GHz	42.84	4.31	54.00	-11.16	2.50	324.20	Vertical	Passed
7.	17.904497GHz	42.27	20.59	54.00	-11.73	3.00	238.90	Vertical	Passed
8.	14.817906GHz	47.01	15.60	54.00	-6.99	2.00	133.10	Horizontal	Passed
9.	17.962999GHz	42.48	21.04	54.00	-11.52	4.00	103.90	Horizontal	Passed

Overall Graphs:

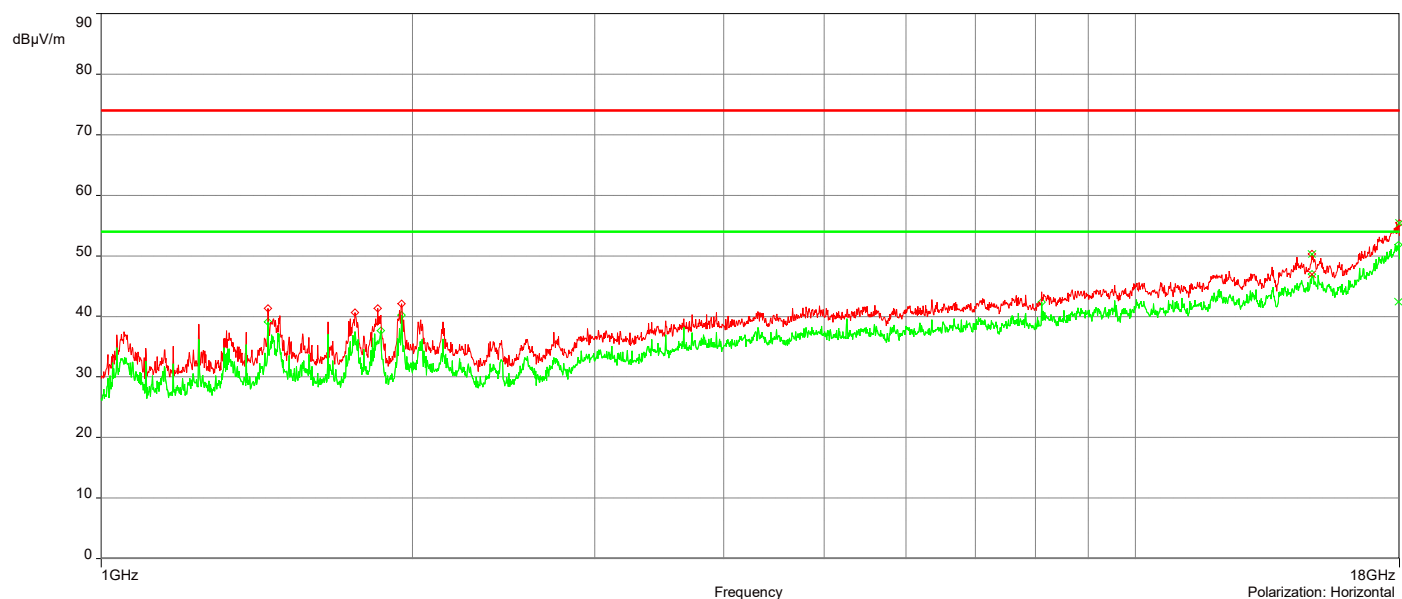

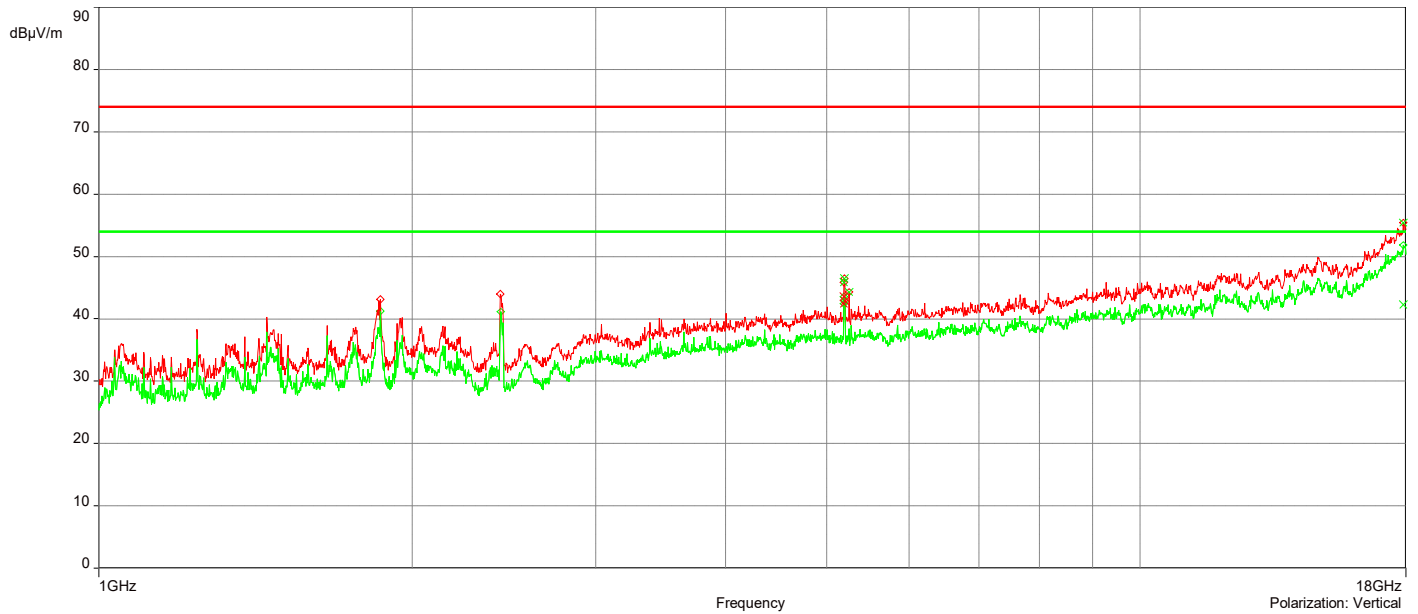

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11n_Ch 11_1-18GHz


11/23/2022 10:13:39 AM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	1.851525GHz	42.80	-4.38	74.00	-31.20	2.00	83.10	Vertical	Passed
2	14.851907GHz	50.92	15.34	74.00	-23.08	2.50	157.90	Vertical	Passed
3	17.900997GHz	56.48	20.57	74.00	-17.52	4.00	14.90	Vertical	Passed
4	1.4500132GHz	42.51	-7.03	74.00	-31.49	1.50	213.90	Horizontal	Passed
5	14.857908GHz	51.05	15.31	74.00	-22.95	4.00	202.40	Horizontal	Passed
6	17.963499GHz	55.47	21.04	74.00	-18.53	4.00	92.90	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	14.856908GHz	37.19	15.26	54.00	-16.81	3.50	359.90	Vertical	Passed
2	17.900997GHz	43.03	20.57	54.00	-10.97	4.00	14.90	Vertical	Passed
3	1.4500132GHz	40.46	-7.03	54.00	-13.54	1.50	213.90	Horizontal	Passed
4	7.1031795GHz	41.22	7.05	54.00	-12.78	2.50	40.80	Horizontal	Passed
5	14.856908GHz	37.28	15.33	54.00	-16.72	3.50	311.90	Horizontal	Passed
6	17.959999GHz	42.81	21.00	54.00	-11.19	3.50	279.90	Horizontal	Passed

Overall Graphs:

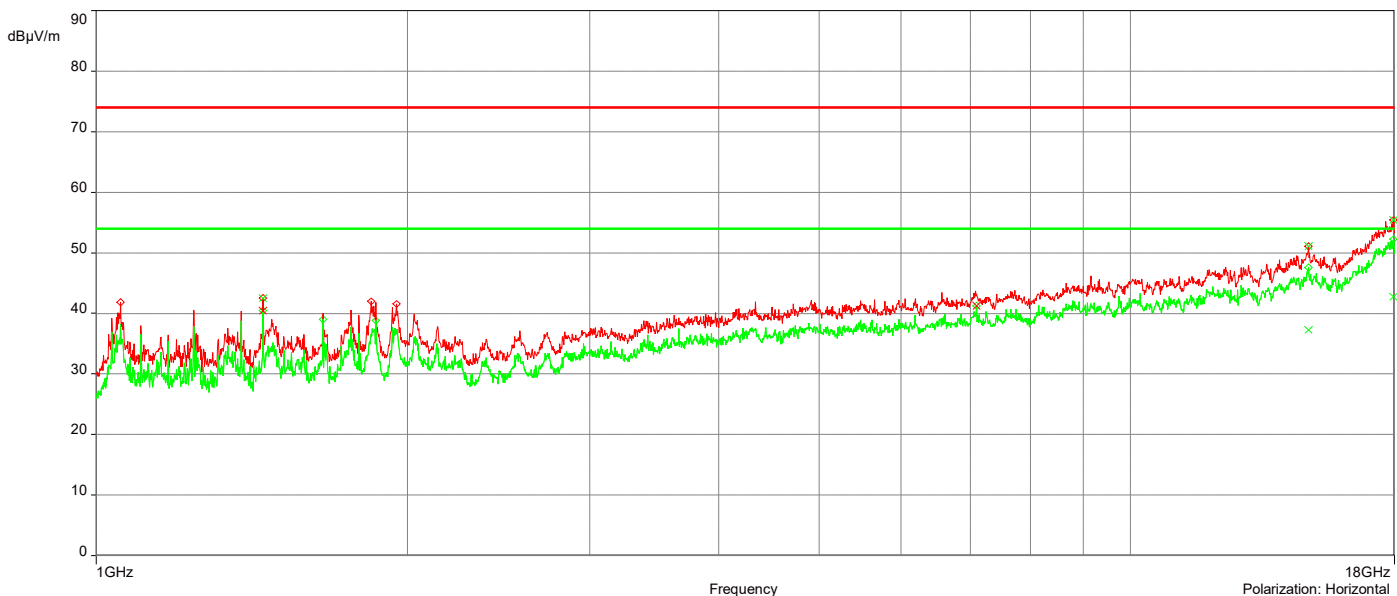

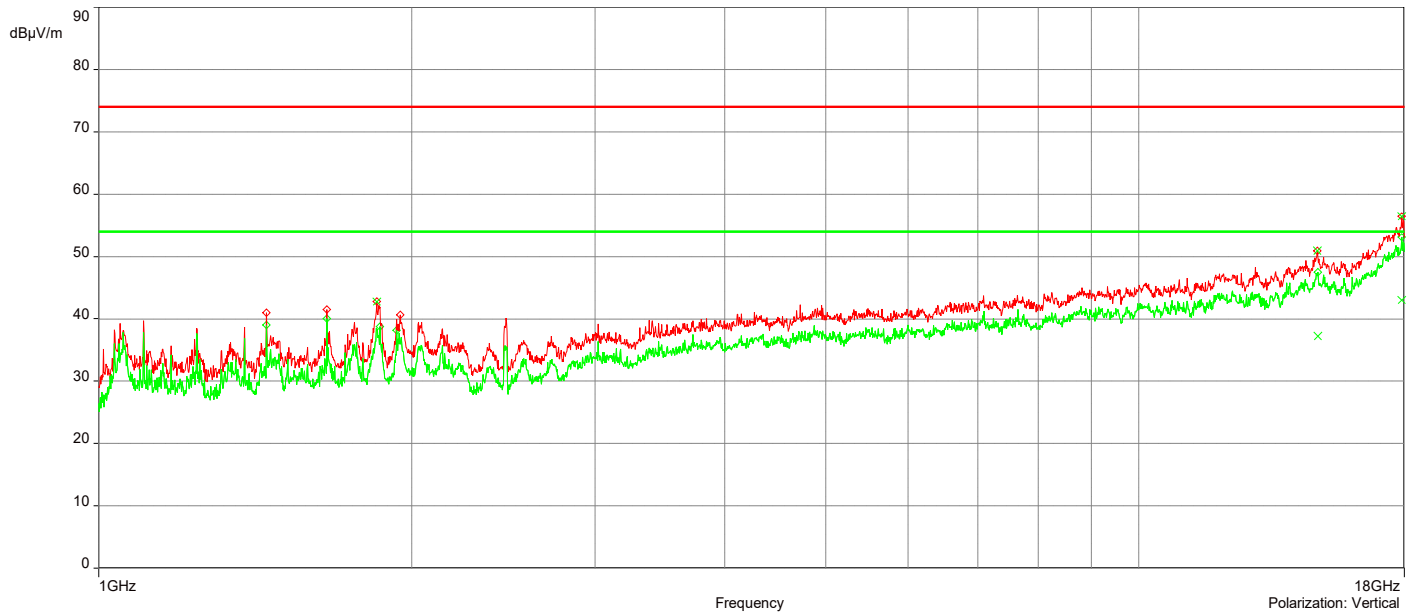

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11g_Ch 1_18-27.5GHz


11/28/2022 2:34:42 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	21.393095GHz	50.59	0.93	74.00	-23.41	1.97	292.60	Vertical	Passed
2	26.00605GHz	50.31	3.78	74.00	-23.69	2.88	112.60	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	24.339192GHz	47.55	2.56	54.00	-6.45	2.46	180.20	Vertical	Passed
2	25.340067GHz	47.26	3.00	54.00	-6.74	3.76	202.50	Horizontal	Passed

Overall Graphs:

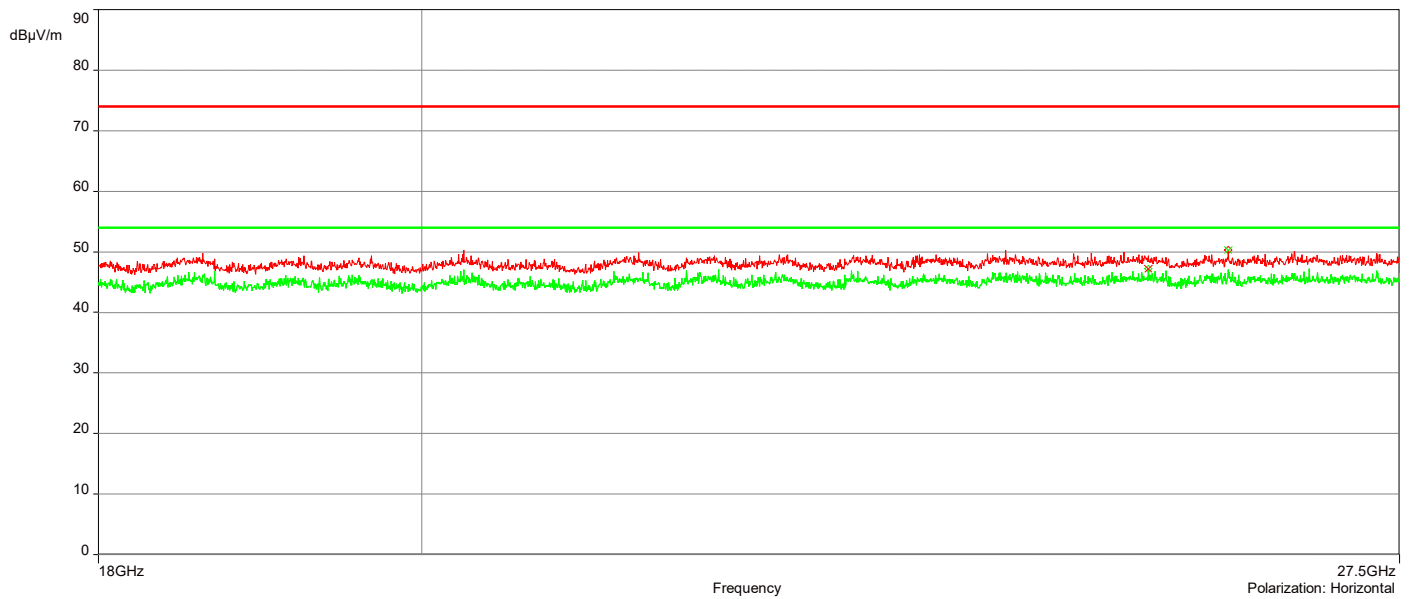

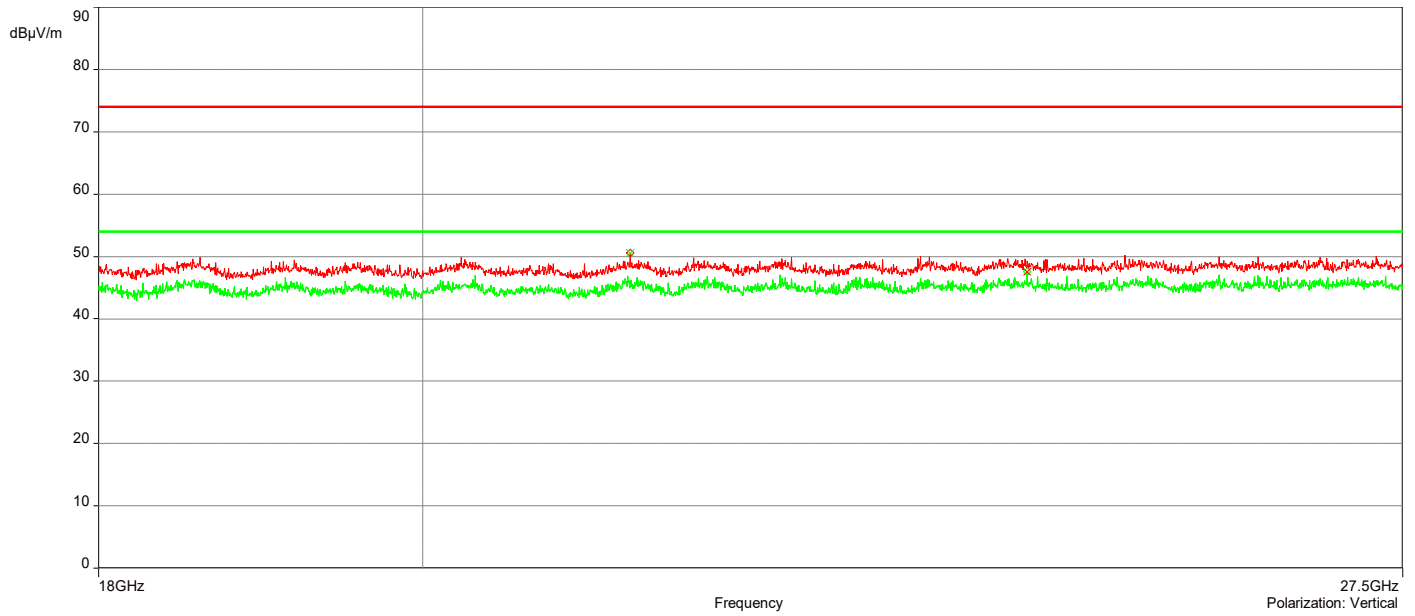

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#4_2.4G 802.11g_Ch 6_18-27.5GHz


12/15/2022 10:49:26 AM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	22.539802GHz	50.93	1.43	74.00	-23.07	3.33	202.40	Vertical	Passed
2	25.89632GHz	50.98	3.72	74.00	-23.02	1.03	337.40	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	22.539802GHz	48.45	1.43	54.00	-5.55	3.33	202.40	Vertical	Passed
2	21.90422GHz	47.62	0.86	54.00	-6.38	2.68	224.90	Horizontal	Passed

Overall Graphs:

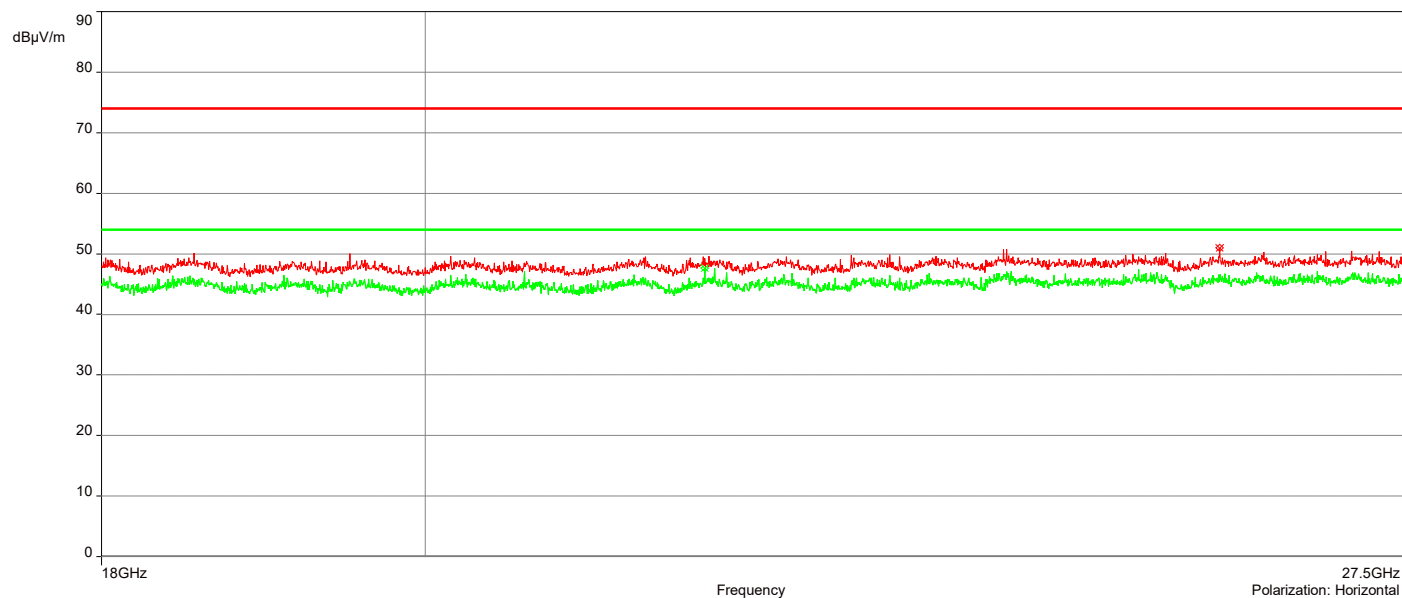

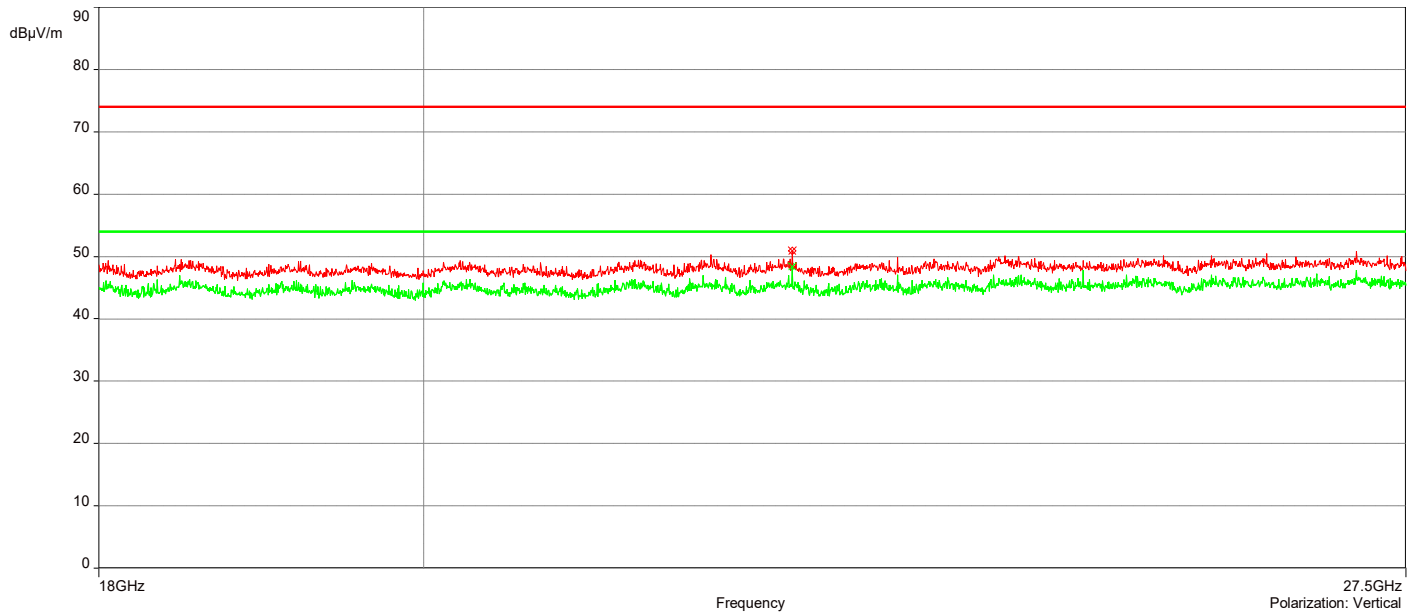

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11g_Ch 11_18-27.5GHz


11/28/2022 2:57:19 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	27.302865GHz	50.13	5.66	74.00	-23.87	2.01	337.40	Vertical	Passed
2	25.354793GHz	50.84	3.08	74.00	-23.16	2.51	112.40	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	20.334267GHz	47.17	0.05	54.00	-6.83	3.21	157.40	Vertical	Passed
2	18.464098GHz	47.61	-0.29	54.00	-6.39	2.98	269.90	Horizontal	Passed

Overall Graphs:

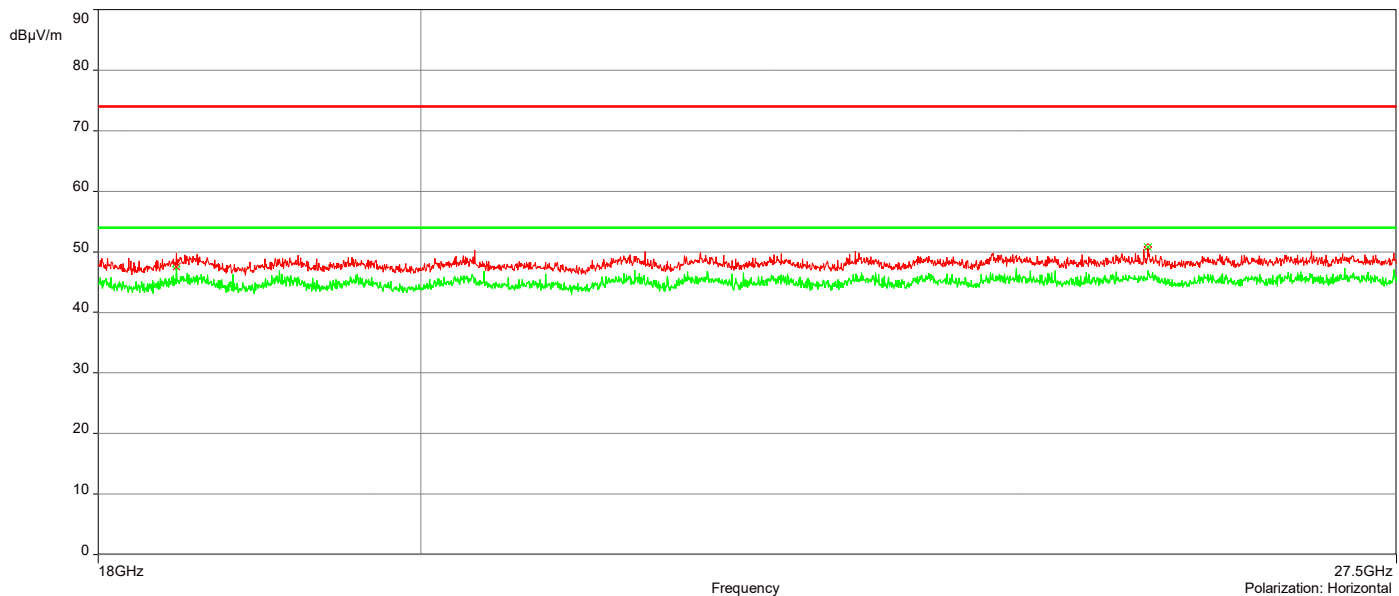

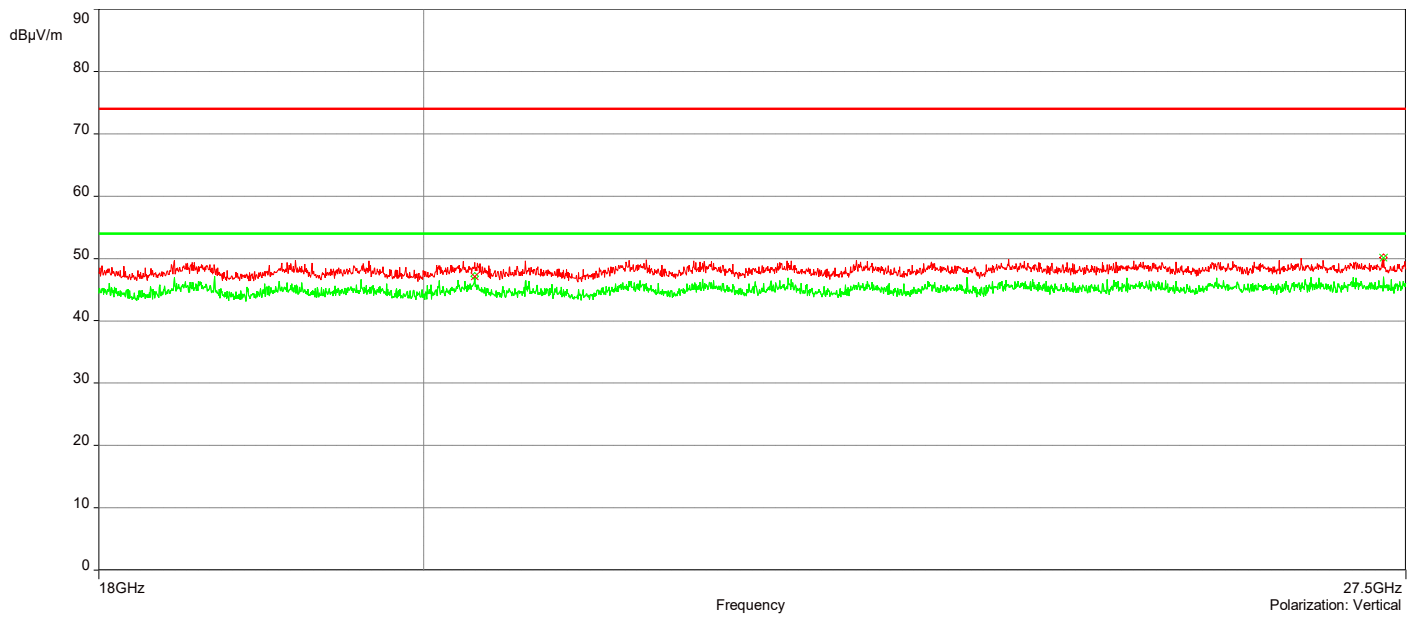

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11n_Ch 1_18-27.5GHz


11/28/2022 3:19:27 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	24.375294GHz	50.35	2.64	74.00	-23.65	1.82	90.00	Vertical	Passed
2	21.870019GHz	50.64	0.82	74.00	-23.36	2.10	135.10	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	27.045877GHz	47.72	5.30	54.00	-6.28	3.86	45.10	Vertical	Passed
2	21.958373GHz	47.38	1.00	54.00	-6.62	2.99	22.60	Horizontal	Passed

Overall Graphs:

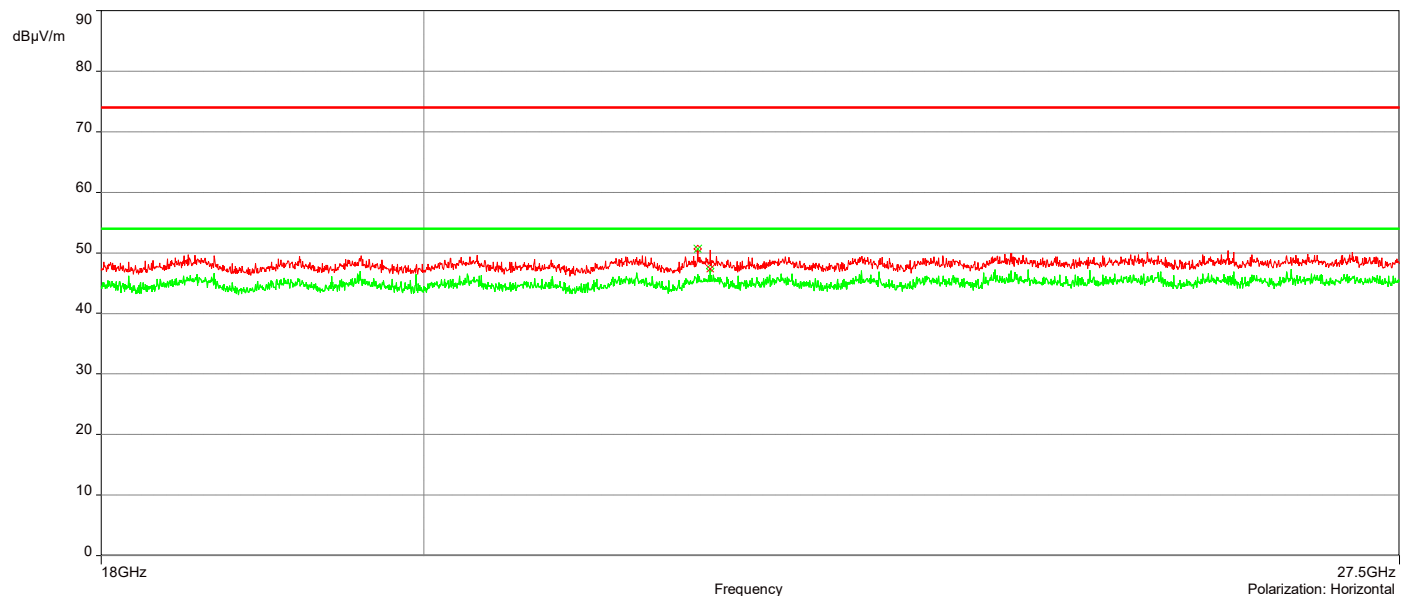

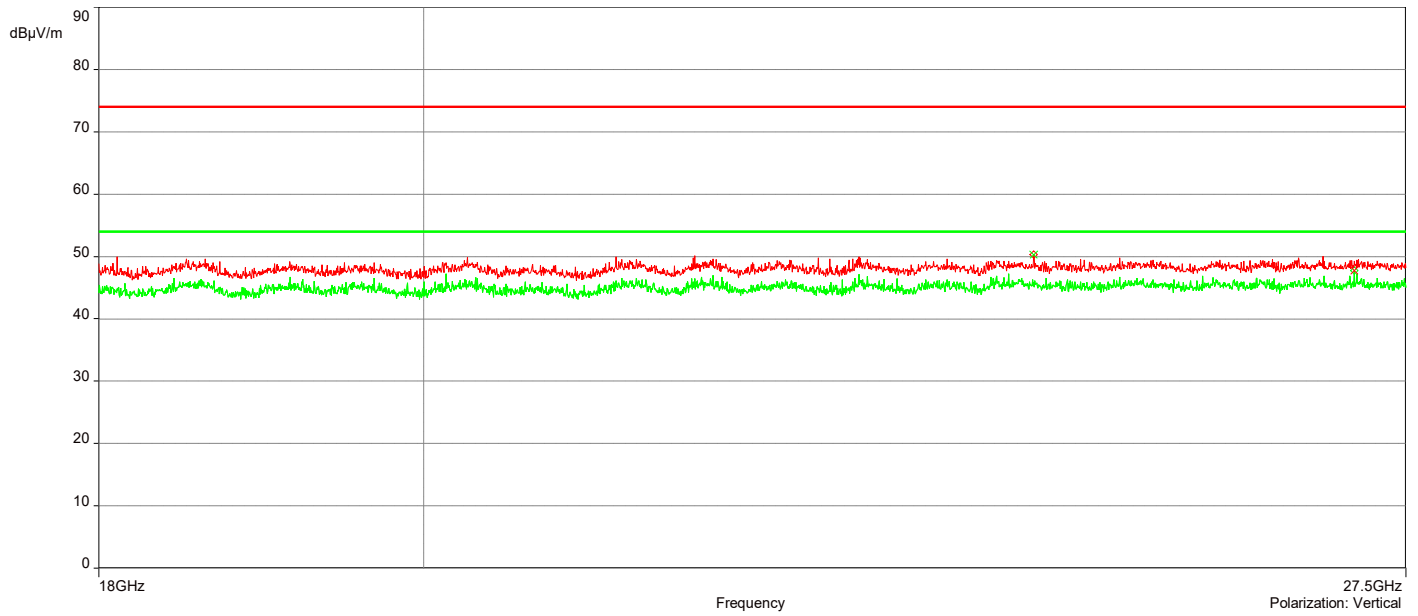

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#4_2.4G 802.11n_Ch 6_18-27.5GHz


12/15/2022 11:13:05 AM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	19.539552GHz	50.66	-0.35	74.00	-23.34	3.80	202.70	Vertical	Passed
2	26.19226GHz	50.58	3.88	74.00	-23.42	3.98	292.60	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	19.539552GHz	48.09	-0.35	54.00	-5.91	3.80	202.70	Vertical	Passed
2	21.948872GHz	47.69	0.96	54.00	-6.31	3.71	225.10	Horizontal	Passed

Overall Graphs:

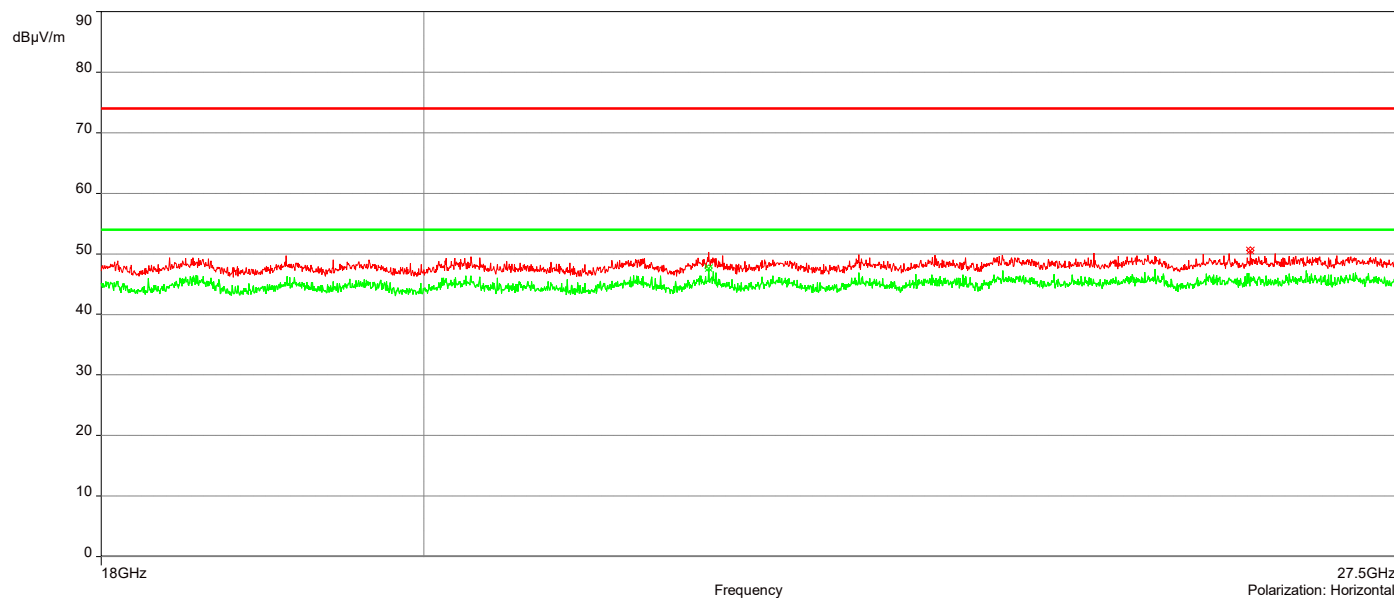

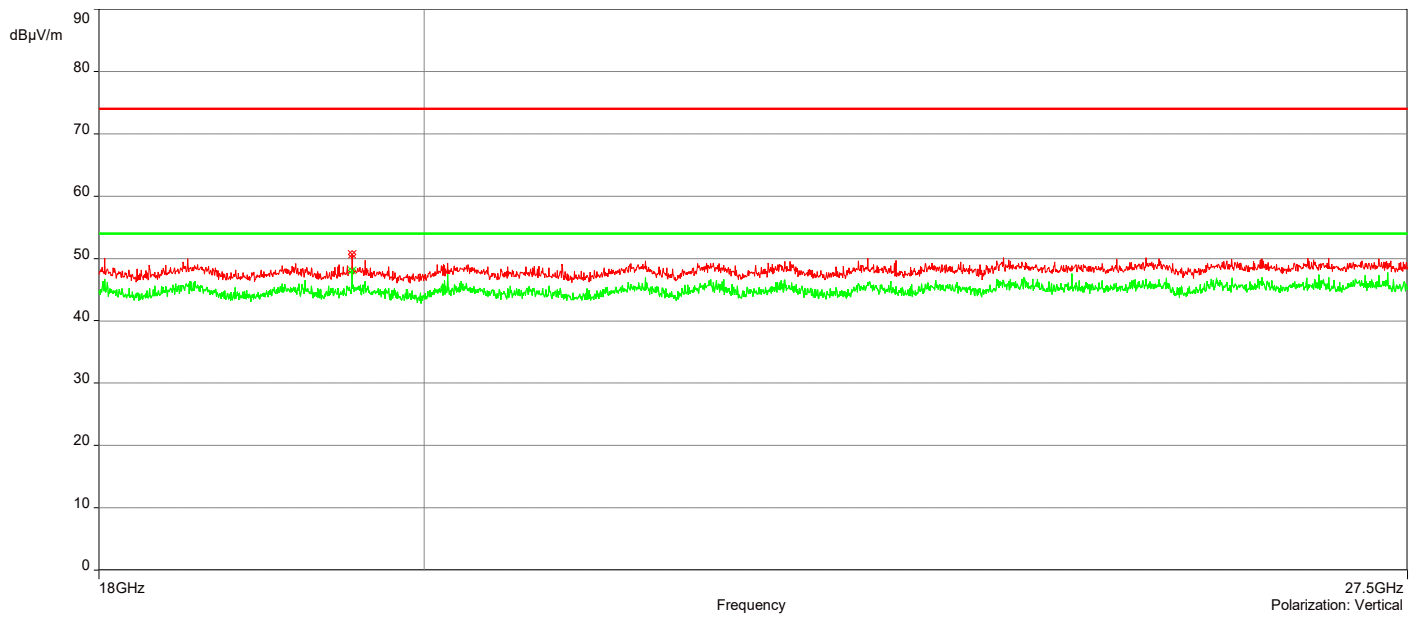

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_2.4G 802.11n_Ch 11_18-27.5GHz


11/28/2022 3:41:43 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1	26.219336GHz	50.34	4.05	74.00	-23.66	3.97	157.40	Vertical	Passed
2	23.531652GHz	50.46	2.00	74.00	-23.54	1.00	89.90	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1	26.516701GHz	47.77	4.24	54.00	-6.23	1.36	224.90	Vertical	Passed
2	23.124081GHz	47.30	1.65	54.00	-6.70	2.98	44.90	Horizontal	Passed

Overall Graphs:

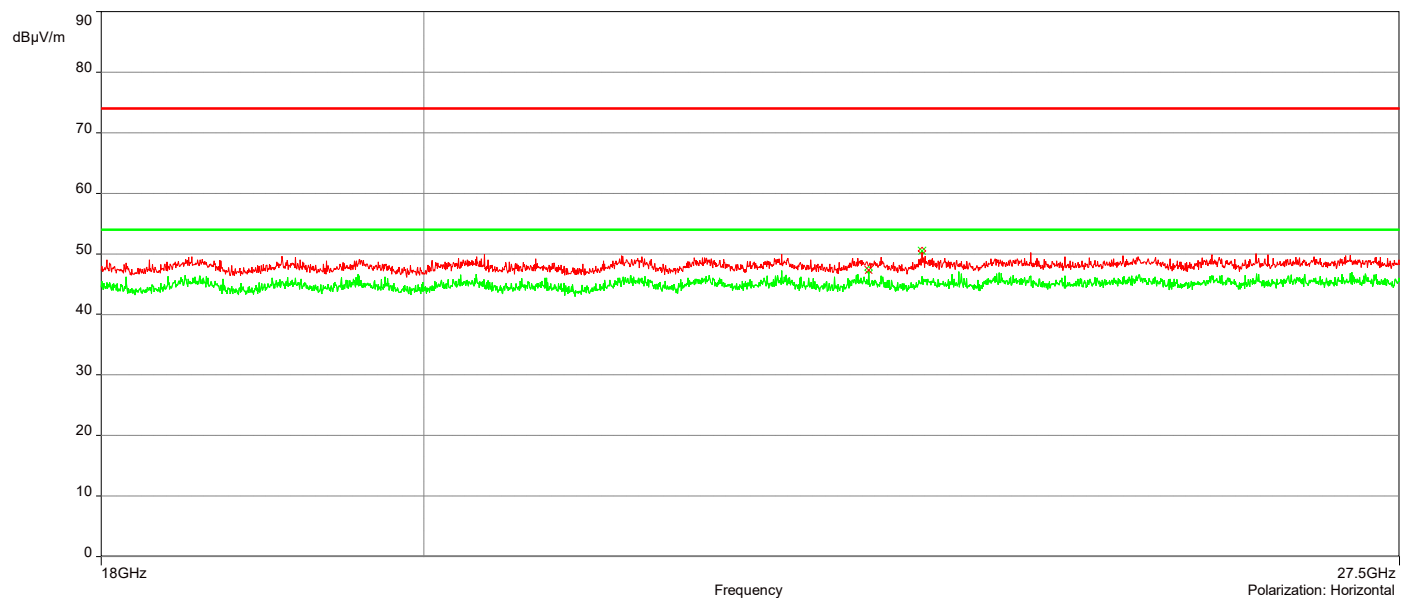

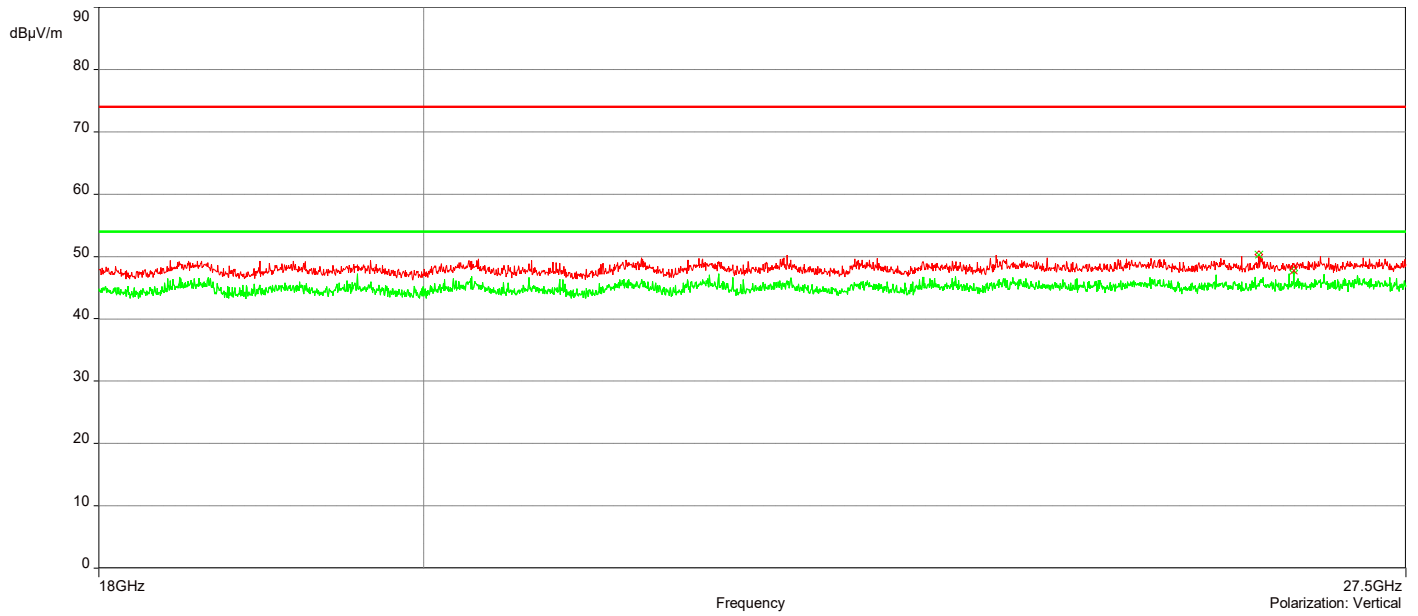

Remarks:

1. Level Peak Reading (dBµV/m) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBµV/m) = Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_Restricted Bandedge_2.4G 802.11b_Ch 1


11/23/2022 12:06:26 PM

No	Frequency (MHz)	Level Peak Reading (dBµV/m)	Correction Factor (dB)	Limit dBµV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.3885093GHz	43.10	-3.06	74.00	-30.90	1.00	155.20	Vertical	Passed
2.	2.4893547GHz	40.33	-2.63	74.00	-33.67	4.00	12.80	Vertical	Passed
3.	2.3850875GHz	40.01	-3.11	74.00	-33.99	3.00	87.30	Horizontal	Passed
4.	2.4861231GHz	40.04	-2.46	74.00	-33.96	2.00	10.60	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBµV/m)	Correction Factor (dB)	Limit dBµV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.3885093GHz	41.77	-3.06	54.00	-12.23	1.00	155.20	Vertical	Passed
2.	2.4915408GHz	39.35	-2.62	54.00	-14.65	1.00	53.20	Vertical	Passed
3.	2.3807154GHz	38.60	-3.10	54.00	-15.40	2.00	70.80	Horizontal	Passed
4.	2.4977189GHz	38.85	-2.38	54.00	-15.15	4.00	4.00	Horizontal	Passed

Overall Graphs:

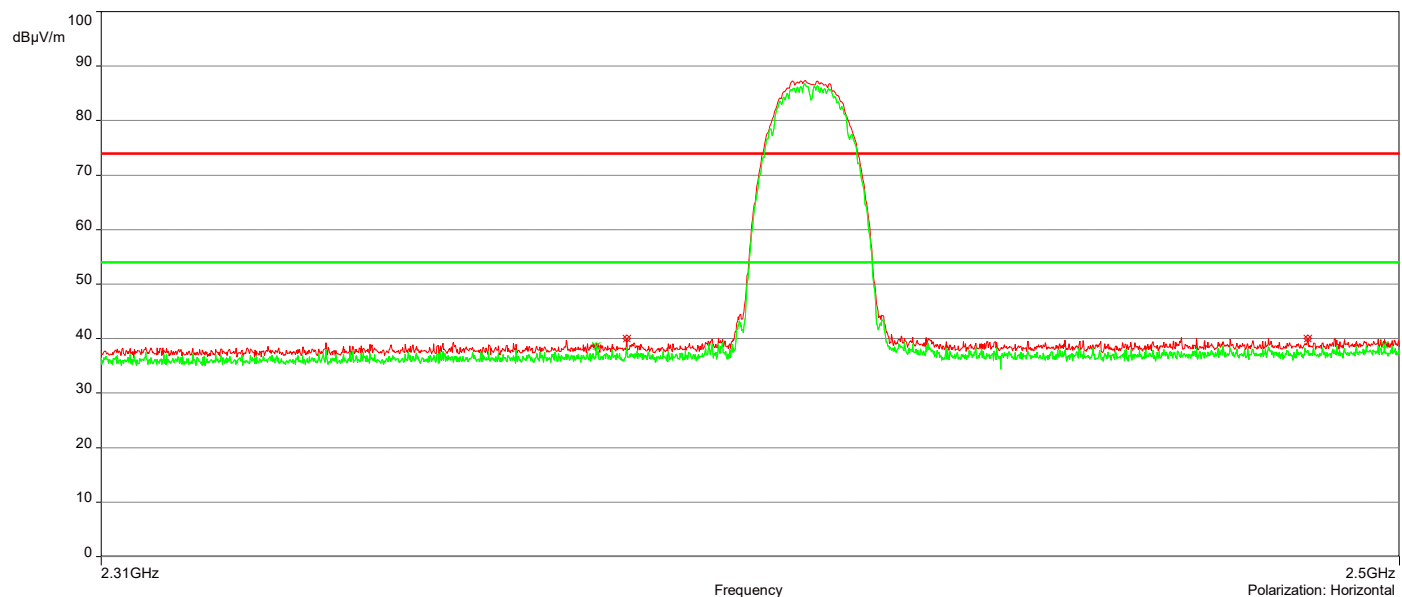

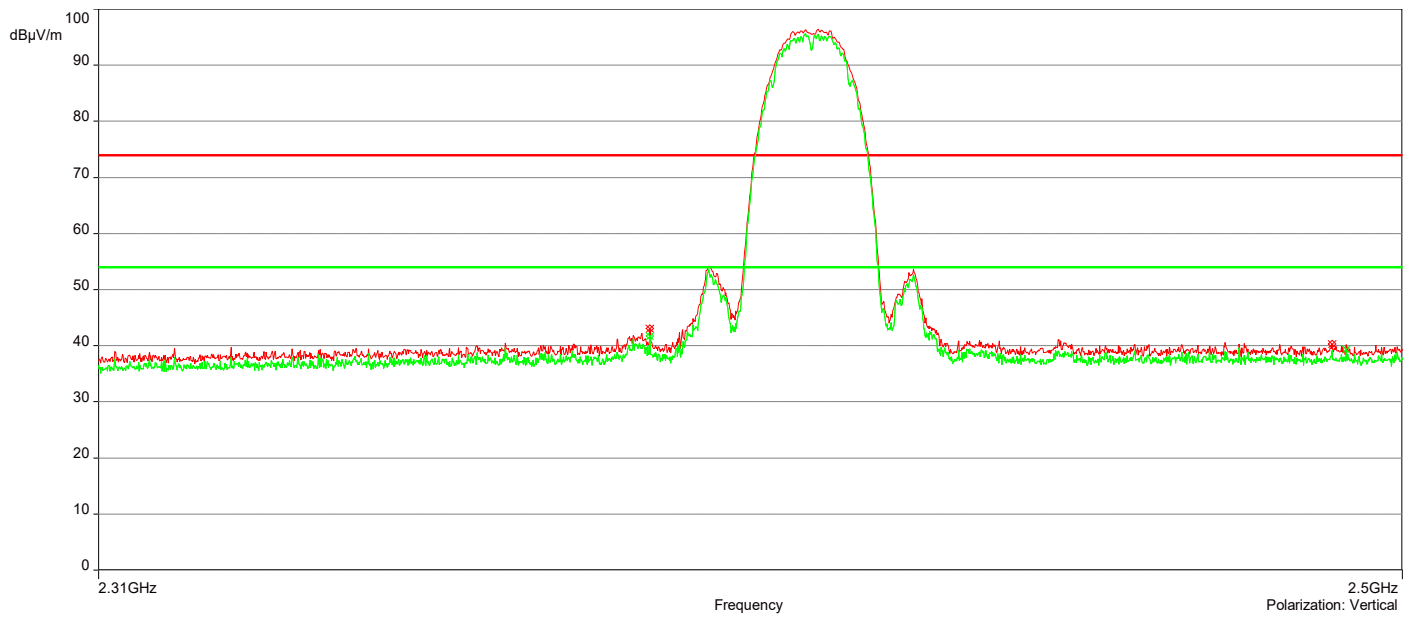

Remarks:

1. Level Peak Reading (dBuV) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBuV)= Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_Restricted Bandedge_2.4G 802.11b_Ch 11


11/23/2022 11:43:26 AM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.3857529GHz	40.01	-3.06	74.00	-33.99	3.00	45.40	Vertical	Passed
2.	2.4877389GHz	41.94	-2.64	74.00	-32.06	1.00	13.30	Vertical	Passed
3.	2.3648424GHz	40.26	-3.11	74.00	-33.74	1.00	284.40	Horizontal	Passed
4.	2.4877389GHz	40.32	-2.45	74.00	-33.68	4.00	75.70	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.3785293GHz	39.04	-3.00	54.00	-14.96	1.00	124.00	Vertical	Passed
2.	2.4857429GHz	40.63	-2.66	54.00	-13.37	1.50	169.50	Vertical	Passed
3.	2.3683592GHz	38.28	-3.13	54.00	-15.72	2.00	191.80	Horizontal	Passed
4.	2.4834617GHz	38.77	-2.48	54.00	-15.23	3.50	207.50	Horizontal	Passed

Overall Graphs:

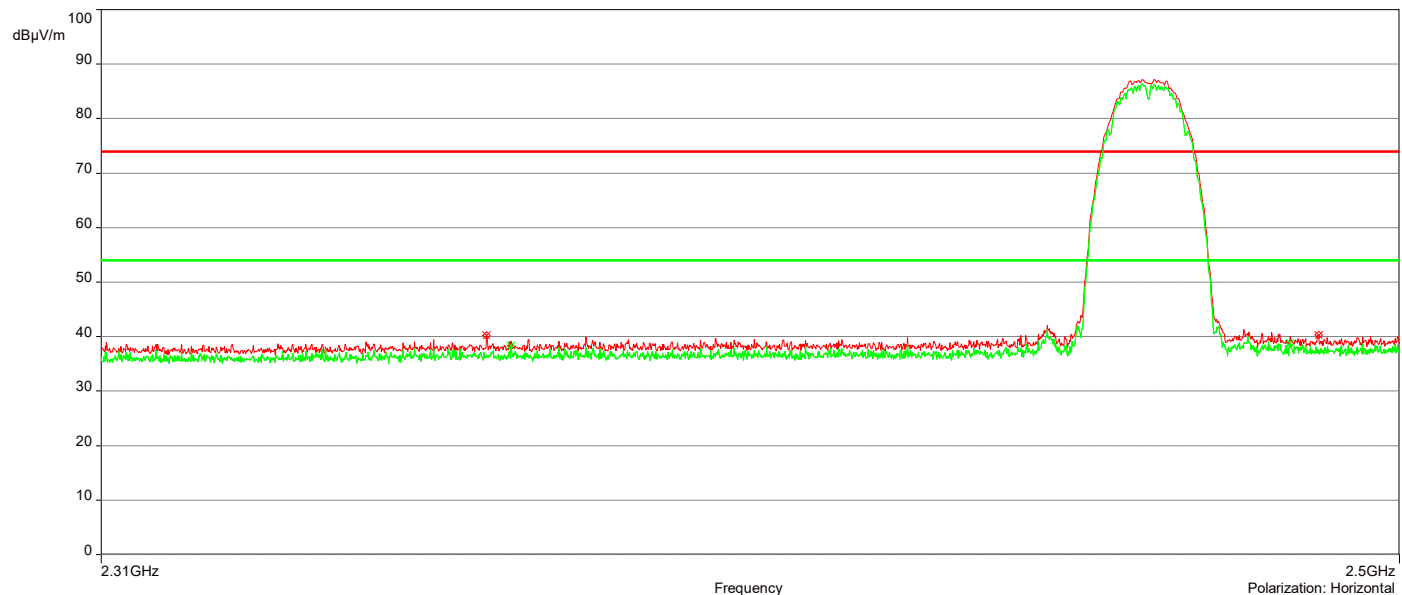

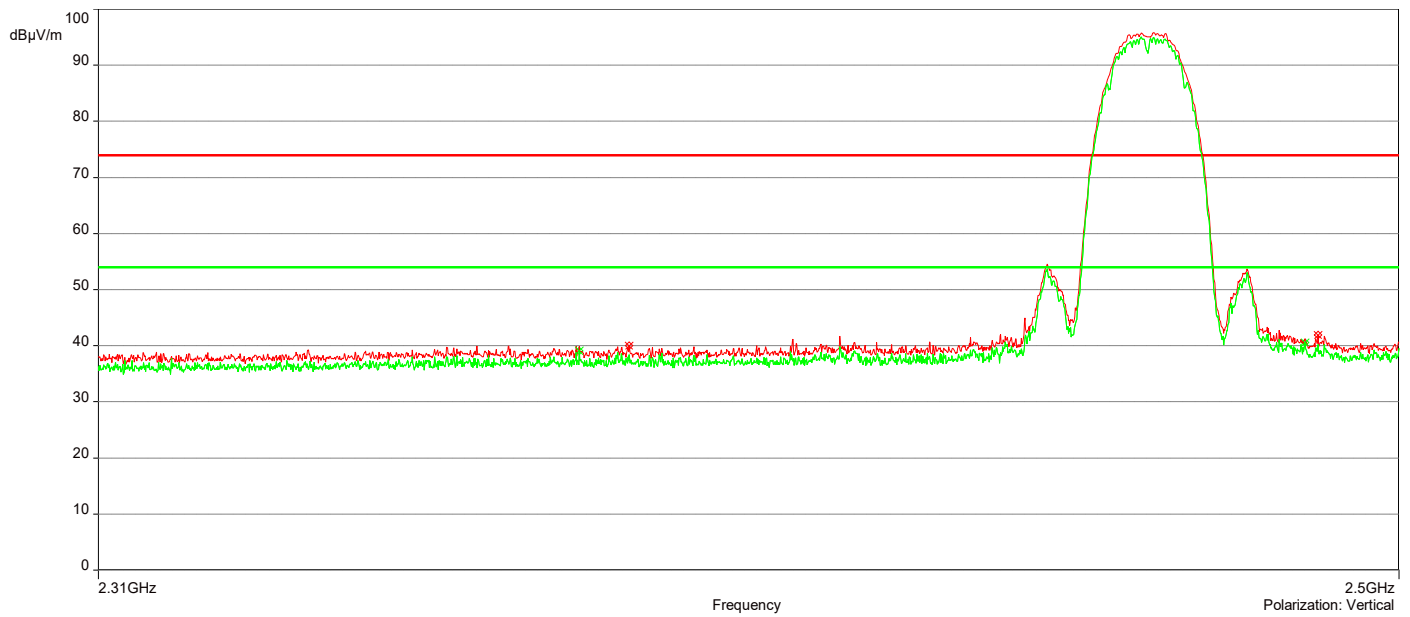

Remarks:

1. Level Peak Reading (dBuV) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBuV)= Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_Restricted Bandedge_2.4G 802.11g_Ch 1


11/23/2022 12:22:51 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.3893647GHz	62.03	-3.05	74.00	-11.97	1.00	161.90	Vertical	Passed
2.	2.4966733GHz	41.32	-2.59	74.00	-32.68	2.50	161.90	Vertical	Passed
3.	2.3892696GHz	53.01	-3.08	74.00	-20.99	3.00	79.40	Horizontal	Passed
4.	2.4938219GHz	41.00	-2.41	74.00	-33.00	1.00	4.50	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.3893647GHz	42.85	-3.05	54.00	-11.15	1.00	161.90	Vertical	Passed
2.	2.4966733GHz	40.20	-2.59	54.00	-13.80	2.50	161.90	Vertical	Passed
3.	2.3892696GHz	50.48	-3.08	54.00	-3.52	3.00	79.40	Horizontal	Passed
4.	2.484032GHz	39.43	-2.47	54.00	-14.57	4.00	122.00	Horizontal	Passed

Overall Graphs:

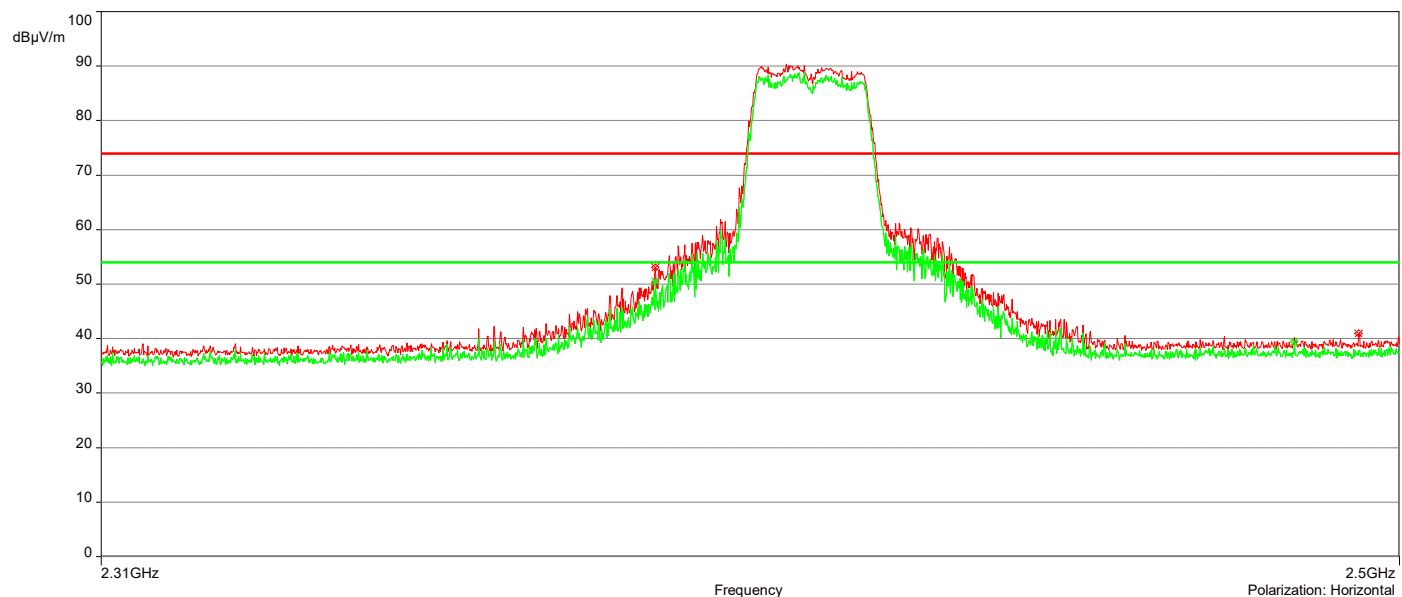

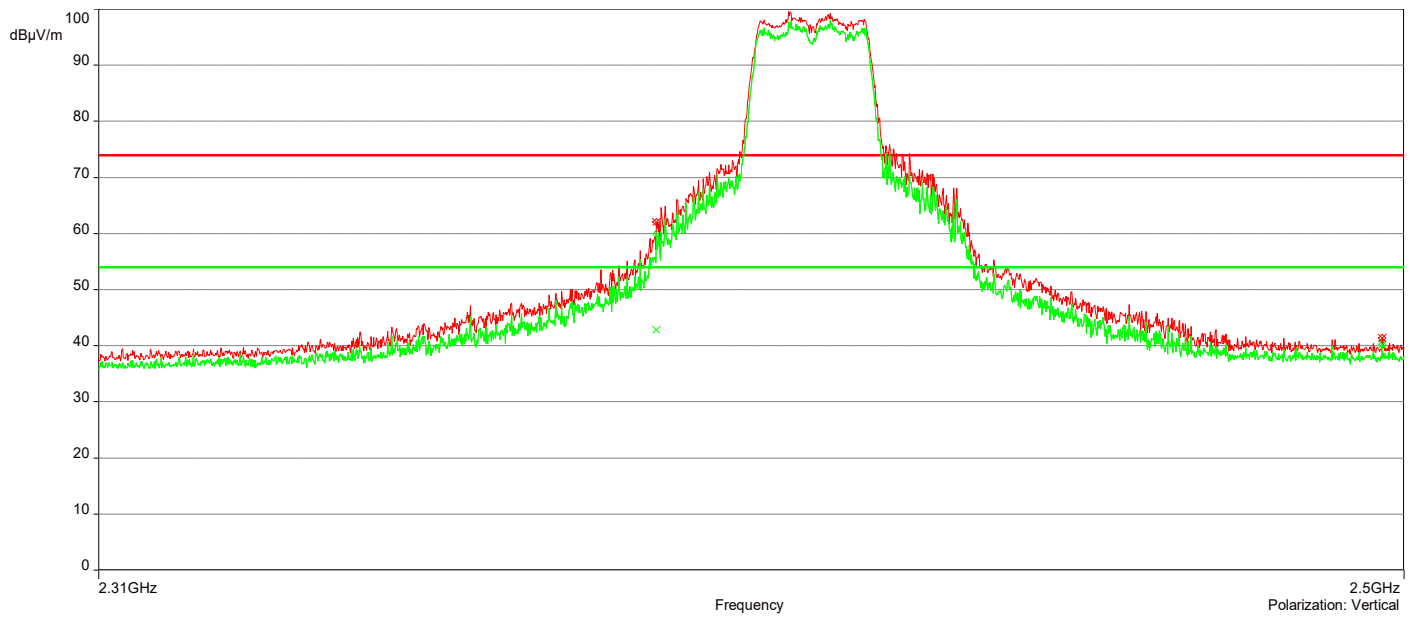

Remarks:

1. Level Peak Reading (dBuV) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBuV)= Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit

AH22100701-HAR-053#5_Restricted Bandedge_2.4G 802.11g_Ch 11


11/23/2022 12:38:24 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.367979GHz	41.48	-2.97	74.00	-32.52	3.50	147.80	Vertical	Passed
2.	2.4835568GHz	64.23	-2.67	74.00	-9.77	1.00	157.30	Vertical	Passed
3.	2.3876538GHz	40.36	-3.10	74.00	-33.64	1.00	140.50	Horizontal	Passed
4.	2.4838419GHz	52.45	-2.47	74.00	-21.55	2.00	185.20	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.3845173GHz	39.19	-3.05	54.00	-14.81	1.50	78.20	Vertical	Passed
2.	2.4835568GHz	44.64	-2.67	54.00	-9.36	1.00	157.30	Vertical	Passed
3.	2.3876538GHz	38.80	-3.10	54.00	-15.20	1.00	140.50	Horizontal	Passed
4.	2.4841271GHz	49.58	-2.47	54.00	-4.42	2.00	187.20	Horizontal	Passed

Overall Graphs:



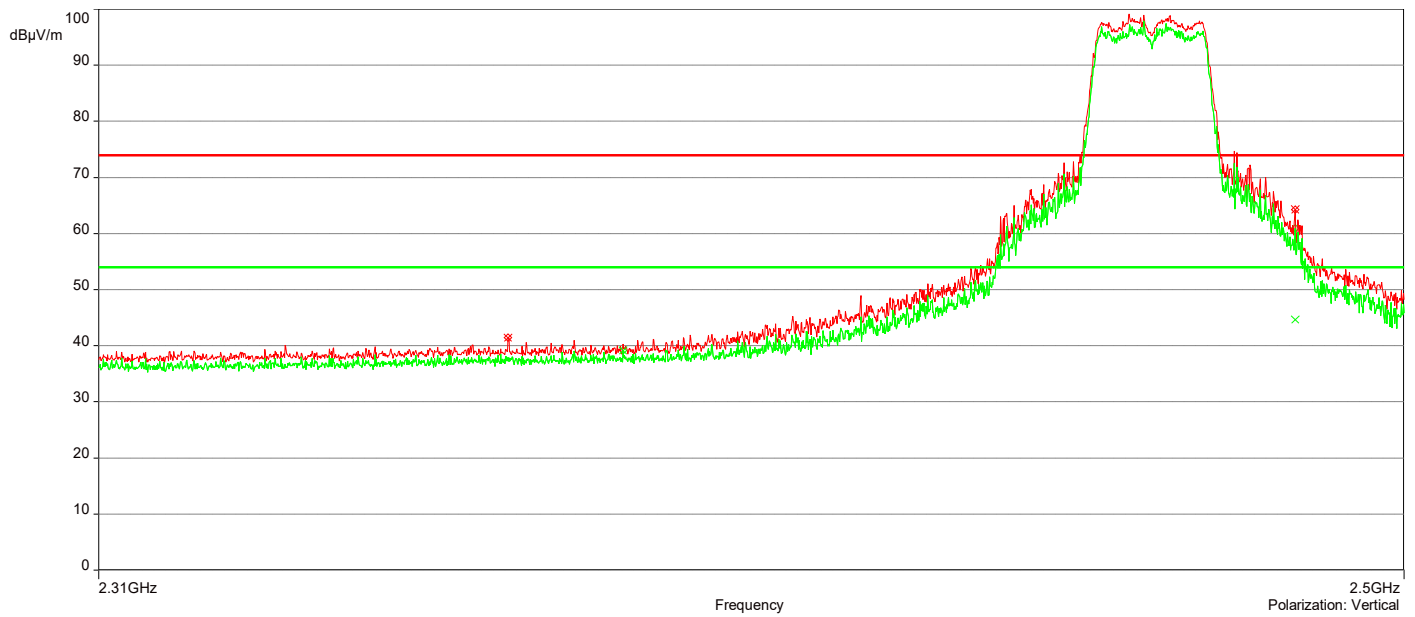

Remarks:

1. Level Peak Reading (dBuV) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBuV)= Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit

AH22100701-HAR-053#5_Restricted Bandedge_2.4G 802.11n_Ch 1

11/23/2022 12:54:51 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.3885093GHz	65.53	-3.06	74.00	-8.47	2.50	161.40	Vertical	Passed
2.	2.4981941GHz	41.33	-2.58	74.00	-32.67	1.50	158.30	Vertical	Passed
3.	2.3890795GHz	56.08	-3.08	74.00	-17.92	3.00	92.40	Horizontal	Passed
4.	2.4988594GHz	40.28	-2.36	74.00	-33.72	2.00	65.10	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.3886043GHz	38.47	-3.06	54.00	-15.53	1.50	79.90	Vertical	Passed
2.	2.4938219GHz	39.68	-2.61	54.00	-14.32	2.50	168.10	Vertical	Passed
3.	2.3890795GHz	30.61	-3.08	54.00	-23.39	3.00	92.40	Horizontal	Passed
4.	2.4906853GHz	39.03	-2.42	54.00	-14.97	3.50	340.30	Horizontal	Passed

Overall Graphs:





Remarks:

1. Level Peak Reading (dBuV) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBuV)= Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Pre-amplifier Gain
3. Margin = Level Average Reading – Limit


AH22100701-HAR-053#5_Restricted Bandedge_2.4G 802.11n_Ch 11


11/23/2022 1:16:23 PM

No	Frequency (MHz)	Level Peak Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgement
1.	2.3875588GHz	41.47	-3.06	74.00	-32.53	3.00	157.80	Vertical	Passed
2.	2.4834617GHz	65.53	-2.68	74.00	-8.47	1.00	11.70	Vertical	Passed
3.	2.369975GHz	39.43	-3.13	74.00	-34.57	3.00	0.10	Horizontal	Passed
4.	2.4851726GHz	54.25	-2.46	74.00	-19.75	3.50	91.20	Horizontal	Passed

No	Frequency (MHz)	Level Average Reading (dBμV/m)	Correction Factor (dB)	Limit dBμV/m	Margin (dB)	Height (m)	Angle (°)	Polarization	Judgment
1.	2.3838519GHz	39.35	-3.05	54.00	-14.65	3.00	135.70	Vertical	Passed
2.	2.4837469GHz	46.56	-2.67	54.00	-7.44	2.00	157.90	Vertical	Passed
3.	2.3815708GHz	38.51	-3.10	54.00	-15.49	4.00	205.00	Horizontal	Passed
4.	2.4851726GHz	30.38	-2.46	54.00	-23.62	3.50	91.20	Horizontal	Passed

Overall Graphs:

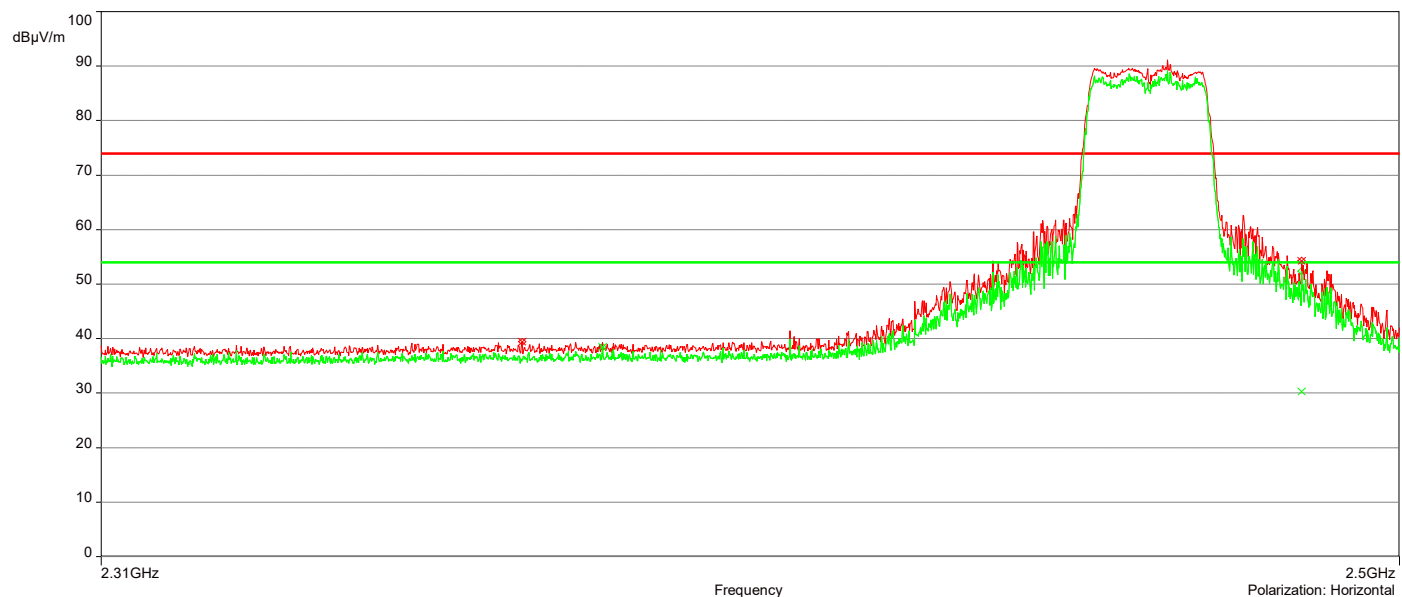

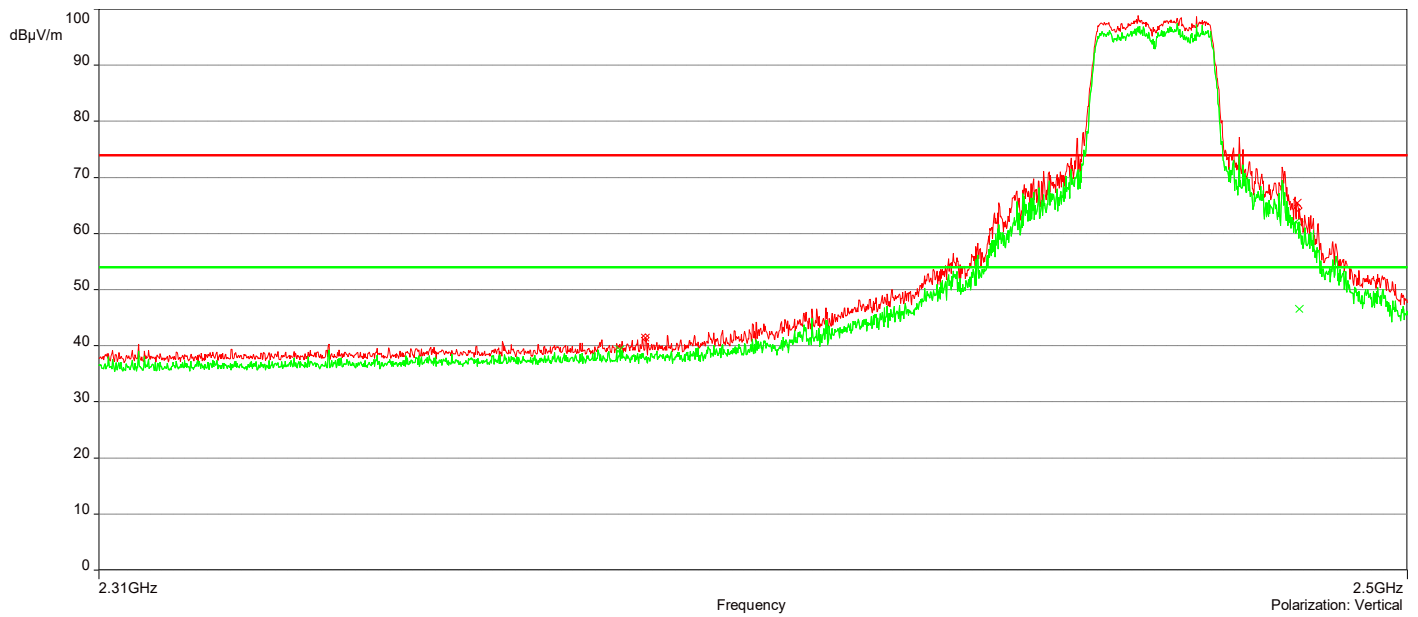

Remarks:

1. Level Peak Reading (dBuV) = Raw Peak Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Peak Reading – Limit

Remarks:

1. Level Average Reading (dBuV)= Raw Average Level + Correction Factor
2. Correction Factor (dB) = Antenna Factor + Cable Loss – Preamplifier Gain
3. Margin = Level Average Reading – Limit

Document Revisions

Version	Date	Modifier	Changes
1.0	03/08/2023	Aravind Buddana	<ul style="list-style-type: none">• Initial Release
2.0	05/13/2023	Aravind Buddana	<ul style="list-style-type: none">• Updated the Power Spectral density test procedure description.• Updated occupied channel bandwidth measurement reference.• Updated Band Edge measure procedure and spectrum analyzer plots.• Updated Radiated Emissions Procedure and Limits Information.• Updated the Band edge tests with Average test data.
3.0	07/13/2023	Aravind Buddana	<ul style="list-style-type: none">• Corrected the typo in Section 4.4.5 Conducted Band Edge measurement procedure.• Updated Section 5.4 Test Limits and Procedures with limits sample formulas.
4.0	07-20-2023	Aravind Buddana	<ul style="list-style-type: none">• Updated Section 5.4 with sample calculation that demonstrate the equivalence of magnetic field strength and electric field strength

End of Report