



# TEST REPORT

## FCC PART 15.247

**Report Reference No.:** CTL2406131031-WF01

Compiled by:  
( position+printed name+signature)


Happy Guo  
(File administrators)

Tested by:  
( position+printed name+signature)

Jack Wang  
(Test Engineer)

Approved by:  
( position+printed name+signature)

Ivan Xie  
(Manager)



**Product Name**..... : Speaker  
**Model/Type reference**..... : IQ-6512DJBT  
**List Model(s)**..... : See next page  
**Trade Mark**..... : IQ SOUND  
**FCC ID**..... : **2AHPZ-CHS65**

**Applicant's name**..... : **Guangzhou Chuanghong Electronics Co.,Ltd.**  
**Address of applicant**..... : Chuanghong Industry,Dongjing Village ,Huadu district,Guangzhou ,China

**Test Firm**..... : **Shenzhen CTL Testing Technology Co., Ltd.**  
**Address of Test Firm**..... : Zone A, 1st Floor, Warehouse 2, Baisha Logistics Company, No. 3011 Shahe West Road, Nanshan District, Shenzhen

**Test specification**..... :  
**Standard**..... : **FCC Part 15.247:** Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.  
**TRF Originator**..... : Shenzhen CTL Testing Technology Co., Ltd.  
**Master TRF**..... : Dated 2011-01

**Date of receipt of test item**..... : Jun. 17,2024  
**Date of Test Date**..... : Jun. 18, 2024 - Jul. 01, 2024  
**Date of Issue**..... : Jul. 03, 2024  
**Result**..... : **Pass**

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

<b>Test Report No. :</b>	<b>CTL2406131031-WF01</b>	Jul. 03, 2024
		Date of issue

Equipment under Test : Speaker

Sample No : CTL2406131031

Model /Type : IQ-6512DJBT

: IQ-3404BT,IQ-6412DJBT,IQ-7810DJBT,IQ-6512DJBT,CH-6839A  
 IQ-3504BT,IQ-3604BT,IQ-3704BT,IQ-3804BT ,IQ-3904BT,IQ-661  
 2DJBT,IQ-6312DJBT,IQ-6212DJBT,IQ-6112DJBT,IQ-7110DJBT ,I  
 Q-7210DJBT,IQ-7310DJBT,IQ-7410DJBT,IQ-7510DJBT,IQ-7610  
 DJBT,IQ-7710DJBT,IQ-7910DJBT,IQ-7612DJBT  
 IQ-7212DJBT,IQ-8212DJBT,IQ-7612DJBT

MPD411L,MPD412L,MPD413L,MPD416L,MPD431L,MPD451L  
 MPD461L,MPD631L,MPD632L,MPD864L,MPD865L,MPD866L  
 MPD867L,MPD868L,MPD1081L,MPD1063L,MPD1064L,MPD12  
 36L  
 MPD1237L,MPD1238L,MPD1541L,MPD1542L

MPD8266,MPD8277,MPD8288,MPD8299,MPD8666,MPD8777,  
 MPD8211,MPD8222

MPD8233,MPD8244,MPD8255,MPD8311,MPD8322,MPD8333,  
 MPD8344,MPD8355

Listed Models

MPD8366,MPD8377,MPD8388,MPD8399,MPD8411,MPD8422,  
 MPD8433,MPD8444

MPD8455,MPD8466,MPD8477,MPD8488,MPD8499,MPD8511,  
 MPD8522,MPD8533

MPD8544,MPD8555,MPD8566,MPD8577,MPD8588,MPD8599,  
 MPD8611,MPD8622

MPD8633,MPD8644,MPD8655,MPD8666,MPD8677,MPD8688,  
 MPD8699,MPD8711

MPD8722,MPD8733,MPD8744,MPD8755,MPD8766,MPD8777,  
 MPD8788,MPD8799

MPD8811,MPD881,MPD882,MPD883,MPD884,MPD885,MPD88  
 6,MPD887,MPD888

MPD889,MPD891,MPD892,MPD893,MPD894,MPD895,MPD896  
 ,MPD897,MPD898

MPD882,MPD8833,MPD8844,MPD8855,MPD8866,MPD8877,  
 MPD8899

MPD991,MPD9921,MPD9933,MPD9944,MPD8855,MPD9966,M  
 PD9977,MPD9988

MPD9910,MPD12201,MPD12202,MPD12203,MPD12204,MPD1  
 2205,MPD12206

MPD12207,MPD12208,MPD12209,MPD6601,MPD6602,MPD66

03,MPD6604,MPD6605  
MPD6606,MPD6607,MPD6608,MPD6609,MPD8801,MPD8802,  
MPD8803,MPD8804  
MPD8805,MPD8806,MPD8807,MPD8808,MPD8809

**Applicant** : **Guangzhou Chuanghong Electronics Co.,Ltd.**

**Address** : Chuanghong Industry,Dongjing Village ,Huadu  
district,Guangzhou ,China

**Manufacturer** : **Guangzhou Chuanghong Electronics Co.,Ltd.**

**Address** : Chuanghong Industry,Dongjing Village ,Huadu  
district,Guangzhou ,China

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\*In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.



**Table of Contents****Page**

<b>1. SUMMARY .....</b>	<b>6</b>
1.1. TEST STANDARDS .....	6
1.2. TEST DESCRIPTION .....	6
1.3. TEST FACILITY .....	7
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	7
<b>2. GENERAL INFORMATION .....</b>	<b>9</b>
2.1. ENVIRONMENTAL CONDITIONS .....	9
2.2. GENERAL DESCRIPTION OF EUT .....	9
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY .....	10
2.4. EQUIPMENTS USED DURING THE TEST .....	11
2.5. RELATED SUBMITTAL(S) / GRANT (S) .....	12
2.6. MODIFICATIONS .....	12
<b>3. TEST CONDITIONS AND RESULTS .....</b>	<b>13</b>
3.1. CONDUCTED EMISSIONS TEST .....	13
3.2. RADIATED EMISSIONS AND BAND EDGE .....	17
3.3. MAXIMUM PEAK OUTPUT POWER .....	28
3.4. 20DB BANDWIDTH .....	29
3.5. FREQUENCY SEPARATION .....	30
3.6. NUMBER OF HOPPING FREQUENCY .....	31
3.7. TIME OF OCCUPANCY (DWELL TIME) .....	32
3.8. OUT-OF-BAND EMISSIONS .....	33
3.9. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....	34
3.10. ANTENNA REQUIREMENT .....	35
<b>4. TEST SETUP PHOTOS OF THE EUT .....</b>	<b>36</b>
<b>5. PHOTOS OF THE EUT .....</b>	<b>38</b>

# 1. SUMMARY

## 1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 v05r02](#): KDB558074 D01 15.247 Meas Guidance v05r02

## 1.2. Test Description

<b>FCC PART 15.247</b>		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(1)(i)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(a)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

### 1.3. Test Facility

#### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co.,Ltd.

Zone A, 1st Floor, Warehouse 2, Baisha Logistics Company, No. 3011 Shahe West Road, Nanshan District, Shenzhen

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 32/EN 55032 requirements.

#### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L7497**

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

##### **A2LA-Lab Cert. No. 4343.01**

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

##### **IC Registration No.: 9618B**

##### **CAB identifier: CN0041**

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan.22, 2019.

##### **FCC-Registration No.: 399832**

##### **Designation No.: CN1216**

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

### 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power Radiated	±2.20 dB	(1)
Radiated Emission 9KHz~30MHz	±3.66dB	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
20dB Emission Bandwidth	±1.9%	(1)
Carrier Frequency Separation	±1.9%	(1)

Maximum Power Spectral Density Level	$\pm 0.98$ dB	(1)
Number of Hopping Channel	$\pm 1.9\%$	(1)
Time of Occupancy	$\pm 0.11\%$	(1)
Max Peak Conducted Output Power	$\pm 0.98$ dB	(1)
Band-edge Spurious Emission	$\pm 1.21$ dB	(1)
Conducted RF Spurious Emission	9kHz-7GHz: $\pm 1.09$ dB 7GHz-26.5GHz: $\pm 3.27$ dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .



## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2. General Description of EUT

Product Name:	Speaker
Model/Type reference:	IQ-6512DJBT
Power supply:	DC 12V or AC 120V/60Hz
<b>Bluetooth:</b>	
Version:	Supported BR/EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	1.70dBi

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain provided by the applicant.

## 2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

### Operation Frequency :

Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
01	2403
⋮	⋮
38	2440
<b>39</b>	<b>2441</b>
40	2442
⋮	⋮
77	2479
<b>78</b>	<b>2480</b>

Preliminary tests were performed in each mode and packet length of BT, and found worst case as bellow, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
Conducted Emissions	DH5 Middle channel
Radiated Emissions and Band Edge	DH5
Maximum Conducted Output Power	DH5/2DH5/3DH5
20dB Bandwidth	DH5/2DH5/3DH5
Frequency Separation	DH5/2DH5/3DH5 Middle channel
Number of hopping frequency	DH5/2DH5/3DH5
Time of Occupancy (Dwell Time)	DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel 3DH1/3DH3/3DH5 Middle channel
Out-of-band Emissions	DH5/2DH5/3DH5

## 2.4. Equipments Used during the Test

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
EMI Test Receiver		ROHDE & SCHWARZ	ESCI	1166.5950.03	2024/04/30	2025/04/29
LISN		R&S	ESH2-Z5	860014/010	2024/04/30	2025/04/29
Limitator		ROHDE & SCHWARZ	ESH3-Z2	100408	2024/04/30	2025/04/29
Software:						
Name of Software:				Version:		
ES-K1				V1.71		

Radiated Emissions and Band Edge					
Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Active Loop Antenna	Da Ze	ZN30900A	/	2024/04/30	2025/04/29
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2023/02/13	2026/02/12
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/12/23	2024/12/22
Amplifier	Agilent	8449B	3008A02306	2024/04/30	2025/04/29
Amplifier	Brief&Smart	LNA-4018	2104197	2024/05/03	2025/05/02
EMI Test Receiver	R&S	ESCI	1166.5950.03	2024/04/30	2025/04/29
Spectrum Analyzer	Keysight	N9020A	MY53420874	2024/05/01	2025/04/30
Test software					
Name of Software			Version		
EZ_EMG(Below 1GHz)			V1.1.4.2		
EZ_EMG(Above 1GHz)			V1.1.4.2		

Maximum Peak Output Power & 20dB Bandwidth & Frequency Separation & Number of hopping frequency & Dwell Time & Out-of-band Emissions					
Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Spectrum Analyzer	Keysight	N9020A	MY53420874	2024/05/01	2025/04/30
Temperature/Humidity Meter	Ji Yu	MC501	/	2024/05/04	2025/05/03
Test Software					
Name of Software			Version		
TST-PASS			V2.0		

## **2.5. Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## **2.6. Modifications**

No modifications were implemented to meet testing criteria.

### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emissions Test


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

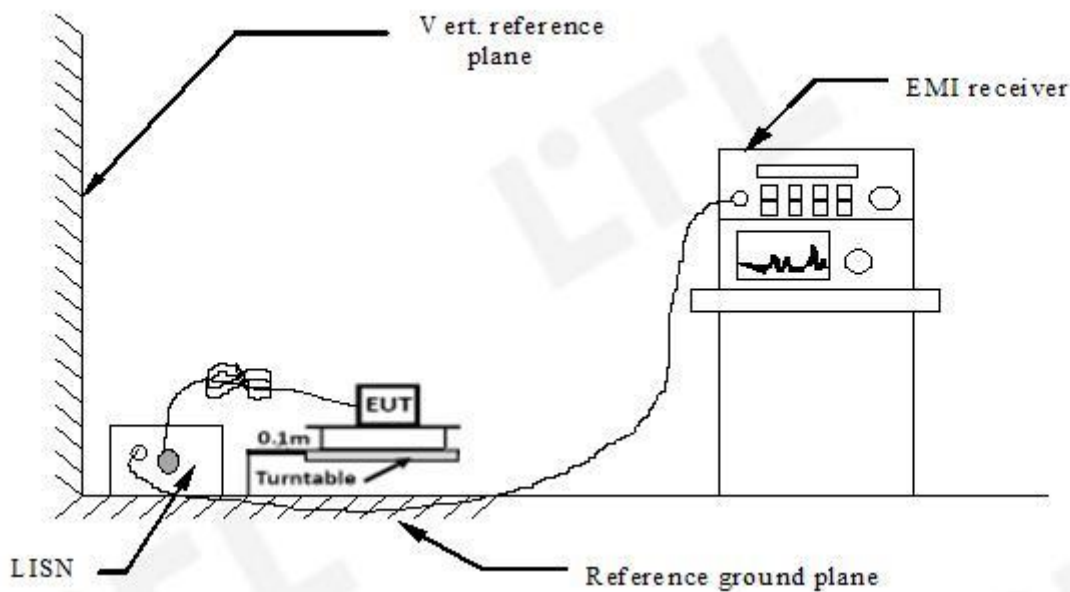

##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a floor speaker; a wooden table with a height of 0.1 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load;

the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.

7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

**TEST RESULTS**

Remark: All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Low Channel was reported as below:

<b>Line:</b>	<b>L</b>																																																								
<p><i>Shenzhen CTL Testing Technology Co., Ltd.</i></p> <p><b>Voltage Mains Test FCC PART 15 C</b></p> <p>EUT: IQ-6512DJBT                  Manufacturer: Guanzhou Chuanghong Electronics co.,Ltd                  Operating Condition: BT 2402MHz                  Test Site: /                  Operator: WSX                  Test Specification: AC 120V/60Hz                  Comment:                  Start of Test: 6/27/2024 / 9:28:26AM</p> <p><b>SCAN TABLE: "Voltage (9K-30M) FIN"</b>                  Short Description: 150K-30M Voltage</p>																																																									
<p>* * *MES CTL240626189_fin</p>																																																									
<p><b>MEASUREMENT RESULT: "CTL240626189_fin"</b></p> <p>6/27/2024 9:30AM</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency MHz</th> <th>Level dBµV</th> <th>Transd dB</th> <th>Limit dBµV</th> <th>Margin dB</th> <th>Detector</th> <th>Line</th> <th>PE</th> </tr> </thead> <tbody> <tr> <td>0.186000</td> <td>33.80</td> <td>10.0</td> <td>64</td> <td>30.4</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.370500</td> <td>29.60</td> <td>10.0</td> <td>59</td> <td>28.9</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.568500</td> <td>27.80</td> <td>10.0</td> <td>56</td> <td>28.2</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.604500</td> <td>30.30</td> <td>10.0</td> <td>56</td> <td>25.7</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.640500</td> <td>32.30</td> <td>10.0</td> <td>56</td> <td>23.7</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> </tbody> </table>		Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	0.186000	33.80	10.0	64	30.4	QP	L1	GND	0.370500	29.60	10.0	59	28.9	QP	L1	GND	0.568500	27.80	10.0	56	28.2	QP	L1	GND	0.604500	30.30	10.0	56	25.7	QP	L1	GND	0.640500	32.30	10.0	56	23.7	QP	L1	GND								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE																																																		
0.186000	33.80	10.0	64	30.4	QP	L1	GND																																																		
0.370500	29.60	10.0	59	28.9	QP	L1	GND																																																		
0.568500	27.80	10.0	56	28.2	QP	L1	GND																																																		
0.604500	30.30	10.0	56	25.7	QP	L1	GND																																																		
0.640500	32.30	10.0	56	23.7	QP	L1	GND																																																		
<p><b>MEASUREMENT RESULT: "CTL240626189_fin2"</b></p> <p>6/27/2024 9:30AM</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency MHz</th> <th>Level dBµV</th> <th>Transd dB</th> <th>Limit dBµV</th> <th>Margin dB</th> <th>Detector</th> <th>Line</th> <th>PE</th> </tr> </thead> <tbody> <tr> <td>0.325500</td> <td>13.50</td> <td>10.0</td> <td>50</td> <td>36.1</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.375000</td> <td>13.80</td> <td>10.0</td> <td>48</td> <td>34.6</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.595500</td> <td>15.50</td> <td>10.0</td> <td>46</td> <td>30.5</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.640500</td> <td>20.20</td> <td>10.0</td> <td>46</td> <td>25.8</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>1.000500</td> <td>10.40</td> <td>10.1</td> <td>46</td> <td>35.6</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>1.135500</td> <td>11.50</td> <td>10.1</td> <td>46</td> <td>34.5</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> </tbody> </table>		Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	0.325500	13.50	10.0	50	36.1	AV	L1	GND	0.375000	13.80	10.0	48	34.6	AV	L1	GND	0.595500	15.50	10.0	46	30.5	AV	L1	GND	0.640500	20.20	10.0	46	25.8	AV	L1	GND	1.000500	10.40	10.1	46	35.6	AV	L1	GND	1.135500	11.50	10.1	46	34.5	AV	L1	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE																																																		
0.325500	13.50	10.0	50	36.1	AV	L1	GND																																																		
0.375000	13.80	10.0	48	34.6	AV	L1	GND																																																		
0.595500	15.50	10.0	46	30.5	AV	L1	GND																																																		
0.640500	20.20	10.0	46	25.8	AV	L1	GND																																																		
1.000500	10.40	10.1	46	35.6	AV	L1	GND																																																		
1.135500	11.50	10.1	46	34.5	AV	L1	GND																																																		


Line:	N
-------	---

**Shenzhen CTL Testing Technology Co., Ltd.**

**Voltage Mains Test FCC PART 15 C**

EUT: IQ-6512DJBT  
 Manufacturer: Guanzhou Chuanghong Electronics co.,Ltd  
 Operating Condition: BT 2402MHz  
 Test Site: /  
 Operator: WSX  
 Test Specification: AC 120V/60Hz  
 Comment:  
 Start of Test: 6/27/2024 / 9:25:19AM

**SCAN TABLE: "Voltage (9K-30M)FIN"**  
 Short Description: 150K-30M Voltage

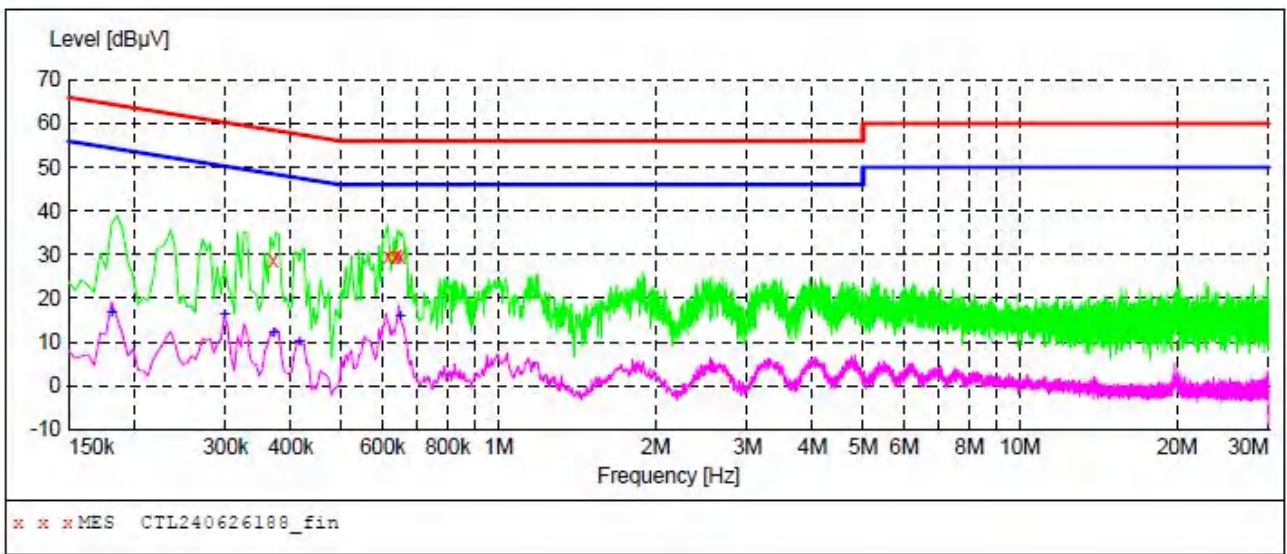

**MEASUREMENT RESULT: "CTL240626188\_fin"**

6/27/2024 9:27AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.370500	28.60	10.0	59	29.9	QP	N	GND
0.613500	29.50	10.0	56	26.5	QP	N	GND
0.636000	29.50	10.0	56	26.5	QP	N	GND
0.640500	30.10	10.0	56	25.9	QP	N	GND
0.649500	29.50	10.0	56	26.5	QP	N	GND

**MEASUREMENT RESULT: "CTL240626188\_fin2"**

6/27/2024 9:27AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.181500	16.70	10.0	54	37.7	AV	N	GND
0.298500	16.30	10.0	50	34.0	AV	N	GND
0.370500	12.00	10.0	49	36.5	AV	N	GND
0.415500	9.90	10.0	48	37.6	AV	N	GND
0.649500	15.90	10.0	46	30.1	AV	N	GND



### 3.2. Radiated Emissions and Band Edge

#### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+ 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+ 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

#### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

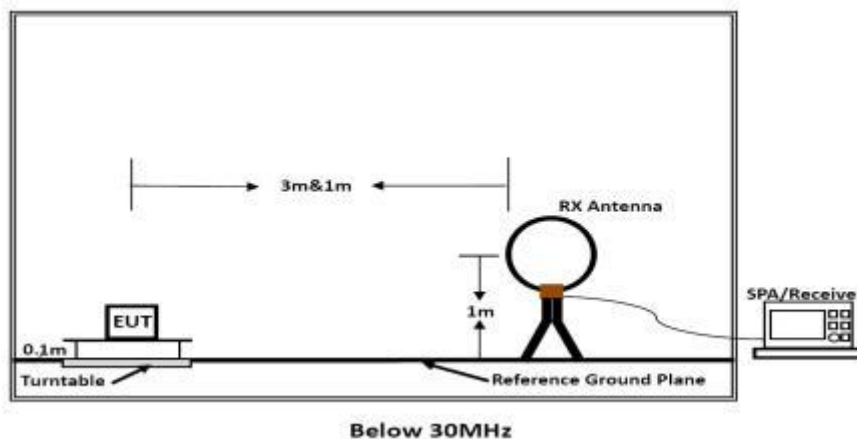

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

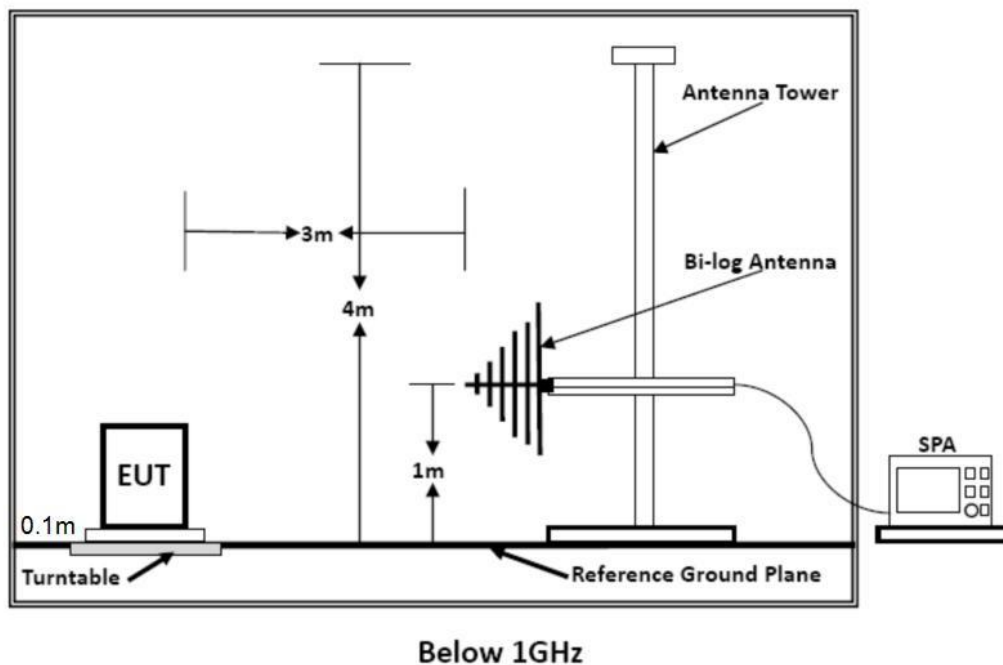

## (C) Radiated Emission Test Set-Up, Frequency above 1000MHz

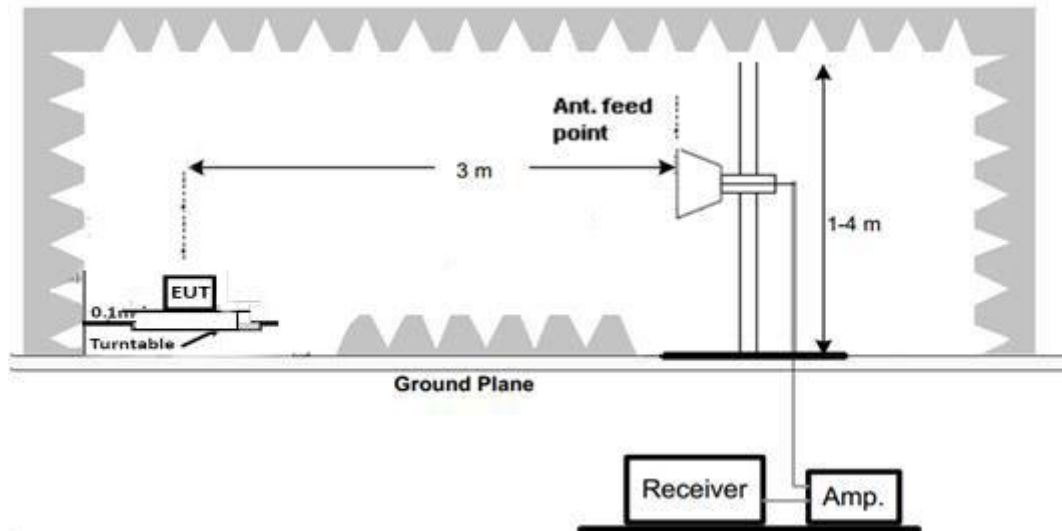**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.1m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 0.1m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

**TEST RESULTS**

## Remark:


1. We measured Radiated Emission at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode..
2. For below 1GHz testing recorded worst at GFSK DH5 low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, Found the emission level are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.

For 30MHz-1GHz

Horizontal



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

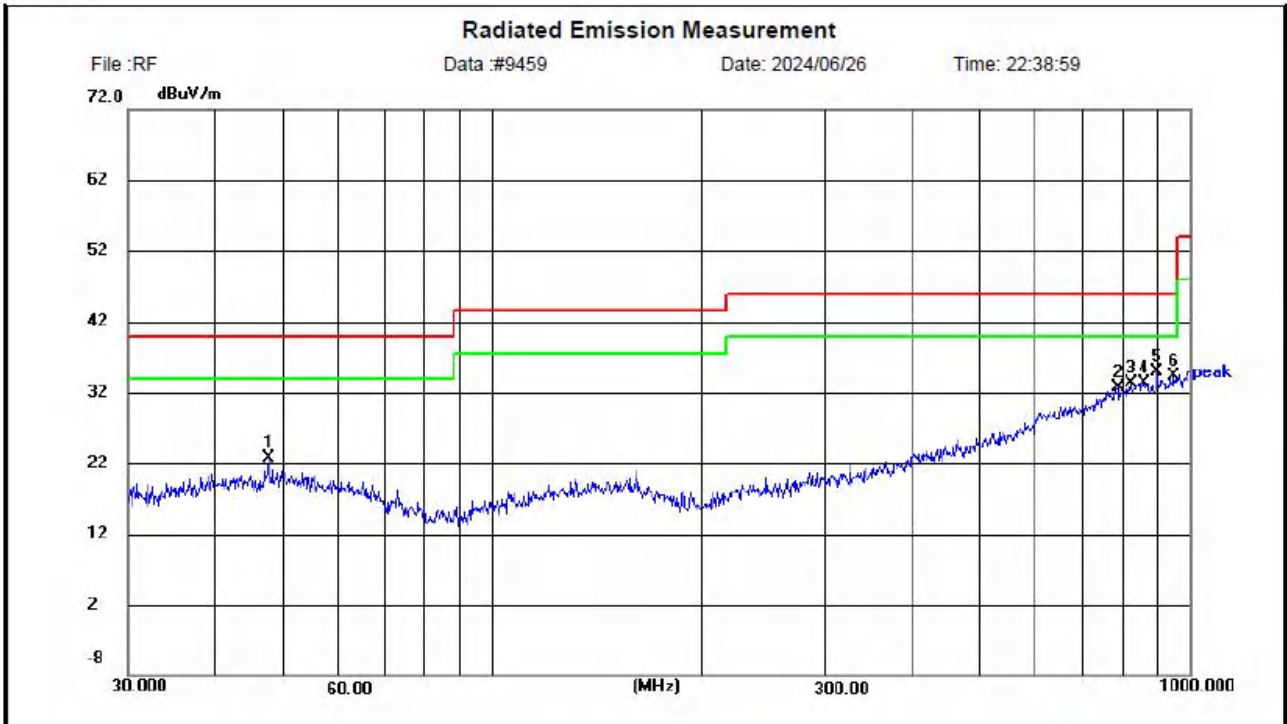

Site: LAB Chamber 2 Polarization: **Horizontal** Temperature: 25(C)  
Limit: FCC Part15 RE-Class C\_30-1000MHz Power: Humidity: 50 %  
EUT: / Distance: 3m  
M/N: IQ-6512DJBT  
Mode: BT 2402MHz  
Note: Guanzhou chuanghong electronics co.,ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	47.7840	8.39	14.38	22.77	40.00	17.23	peak	100	128	P	
2	790.2723	7.23	25.43	32.66	46.00	13.34	peak	100	82	P	
3	823.5132	7.43	25.91	33.34	46.00	12.66	peak	100	90	P	
4	859.2815	6.96	26.35	33.31	46.00	12.69	peak	100	305	P	
5	898.9645	8.32	26.58	34.90	46.00	11.10	peak	100	351	P	
6	951.2594	7.10	27.11	34.21	46.00	11.79	peak	100	205	P	


Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

Radiated Emission Measurement

File :RF Data :#9460 Date: 2024/06/26 Time: 22:39:59

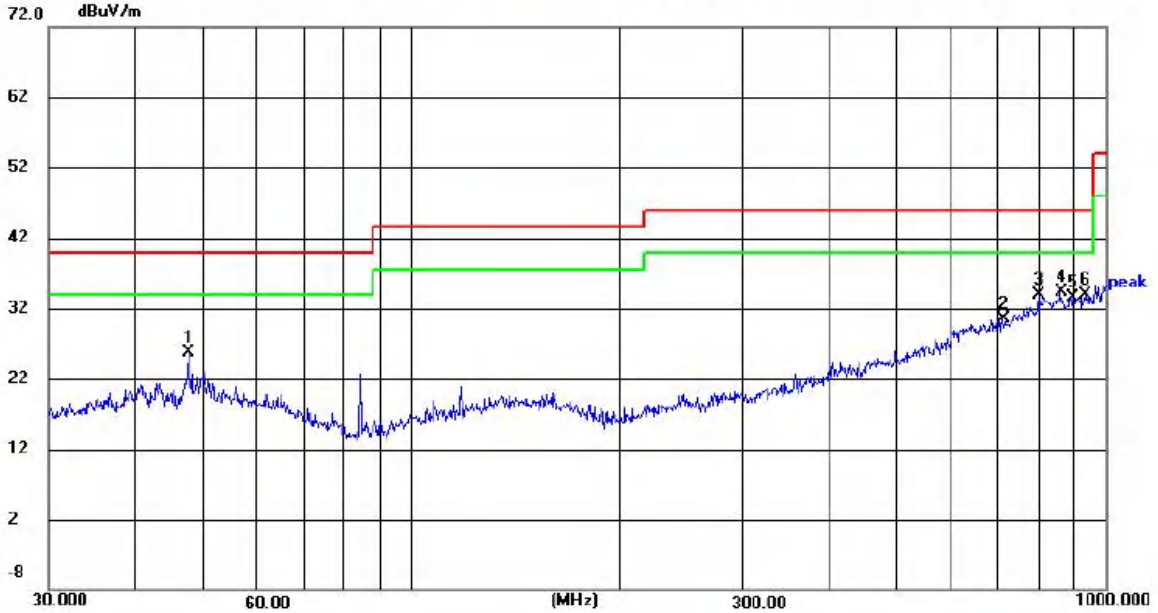


Site LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_30-1000MHz Power: Humidity: 50 %  
 EUT: / Distance: 3m  
 M/N: IQ-6512DJBT  
 Mode: BT 2402MHz  
 Note: Guanzhou chuanghong electronics co.,ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	47.8050	11.37	14.38	25.75	40.00	14.25	peak	100	124	P	
2	710.1155	7.47	22.98	30.45	46.00	15.55	peak	100	232	P	
3	799.6805	8.24	25.63	33.87	46.00	12.13	peak	100	16	P	
4	861.9221	8.01	26.39	34.40	46.00	11.60	peak	100	360	P	
5	894.2485	7.18	26.39	33.57	46.00	12.43	peak	100	100	P	
6	933.4982	6.74	27.08	33.82	46.00	12.18	peak	100	32	P	

**For 1GHz to 25GHz**

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK (above 1GHz)**

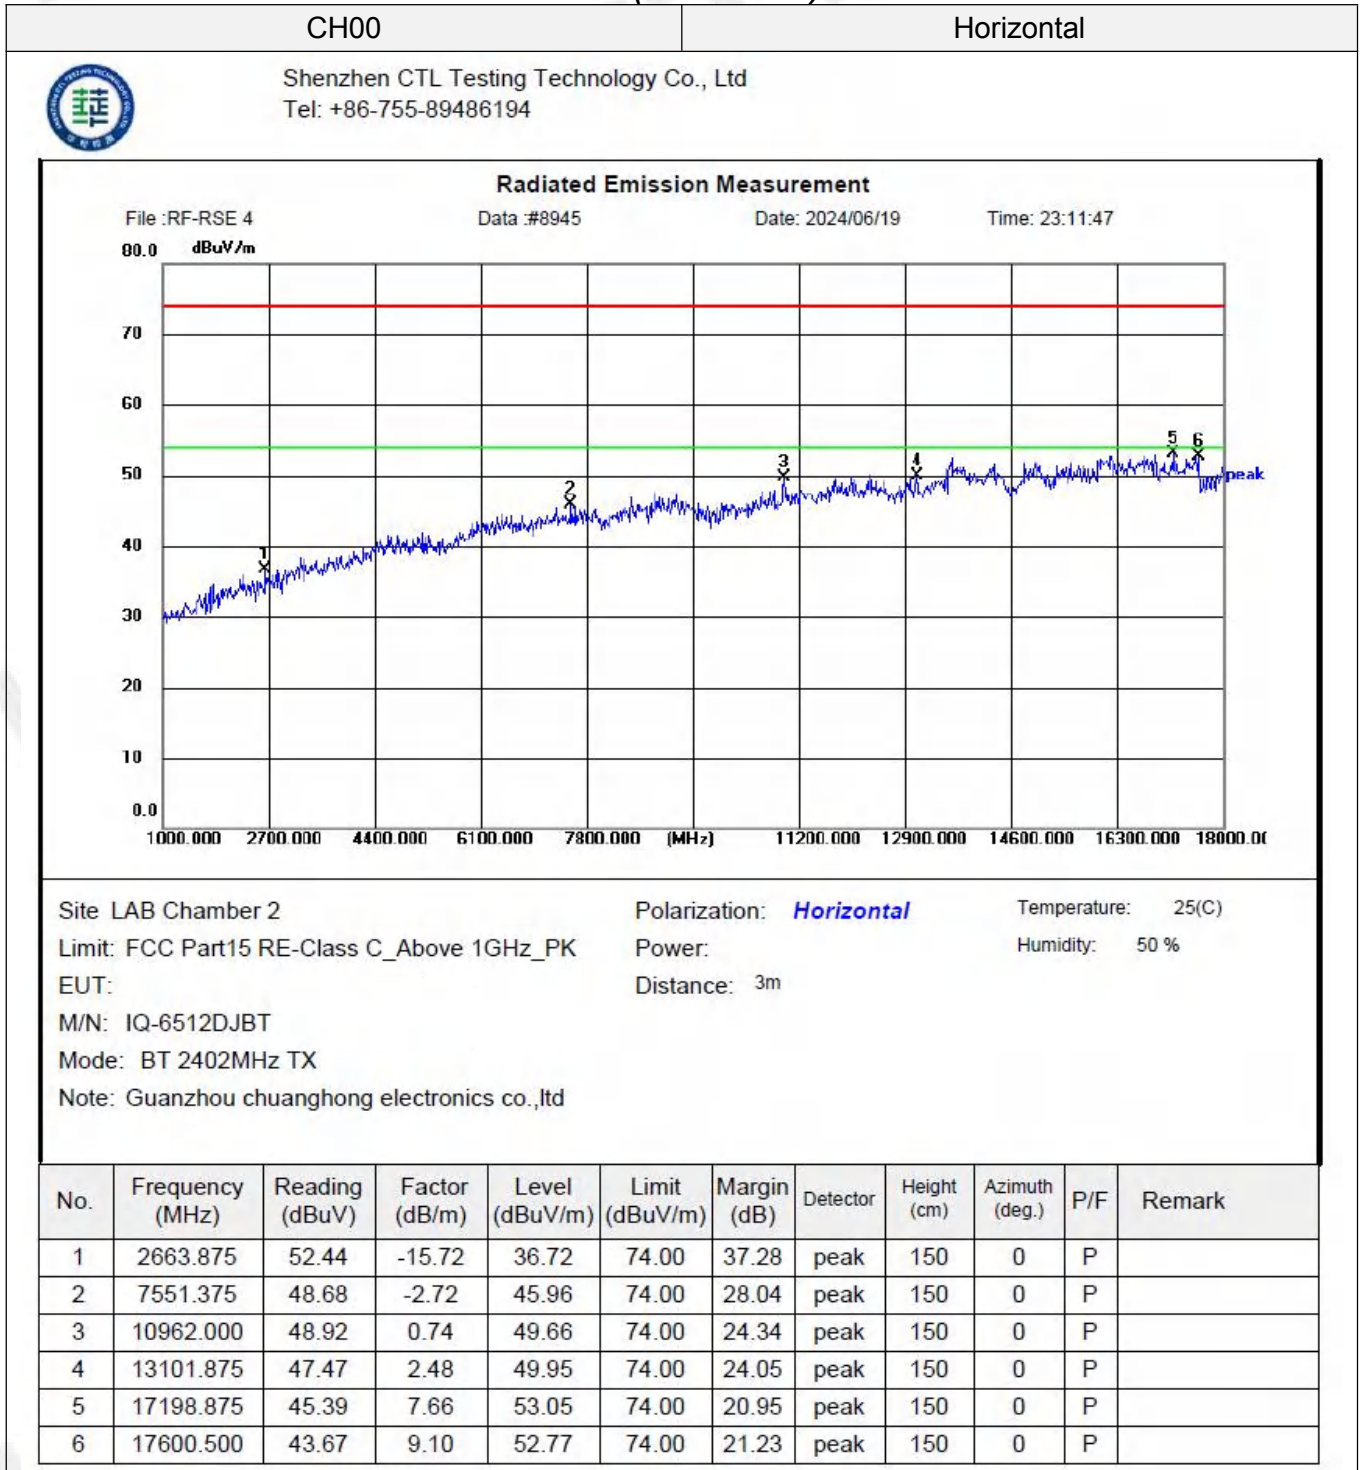

CH00

Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**


File :RF-RSE 4

Data :#8946

Date: 2024/06/19

Time: 23:12:10

90.0 dBuV/m

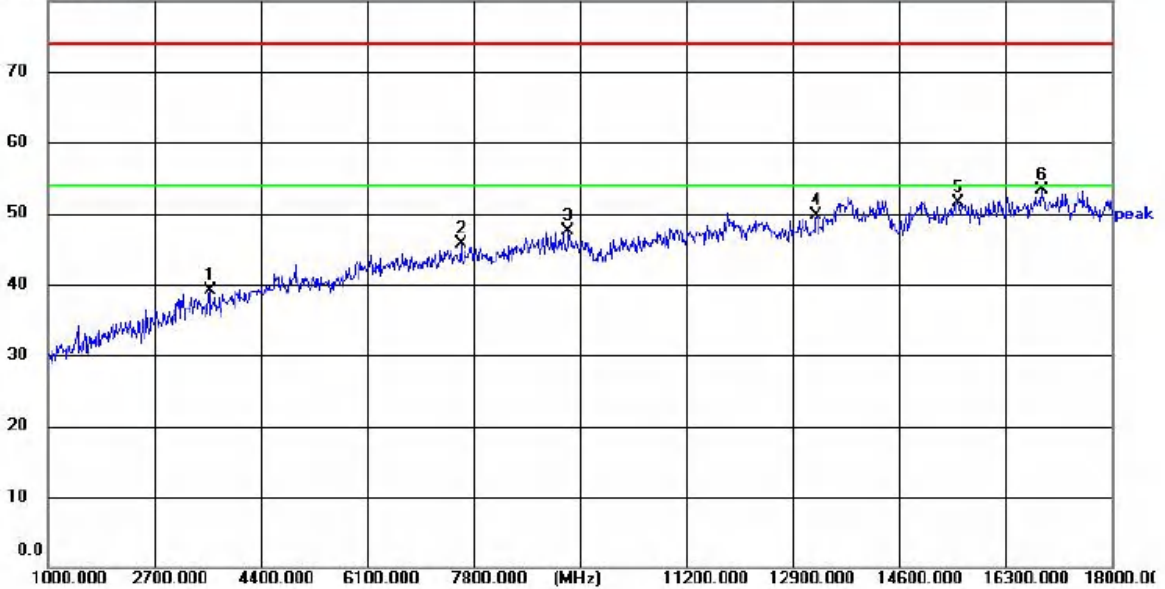

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: IQ-6512DJBT

Mode: BT 2402MHz TX

Note: Guanzhou chuanghong electronics co.,ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3584.000	50.99	-11.80	39.19	74.00	34.81	peak	150	0	P	
2	7608.750	48.57	-2.85	45.72	74.00	28.28	peak	150	0	P	
3	9327.875	47.42	0.14	47.56	74.00	26.44	peak	150	0	P	
4	13274.000	46.63	3.12	49.75	74.00	24.25	peak	150	0	P	
5	15541.375	47.62	3.89	51.51	74.00	22.49	peak	150	0	P	
6	16882.250	46.56	6.65	53.21	74.00	20.79	peak	150	0	P	

CH39


Horizontal



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**

File :RF-RSE 4      Data :#8947      Date: 2024/06/19      Time: 23:12:42

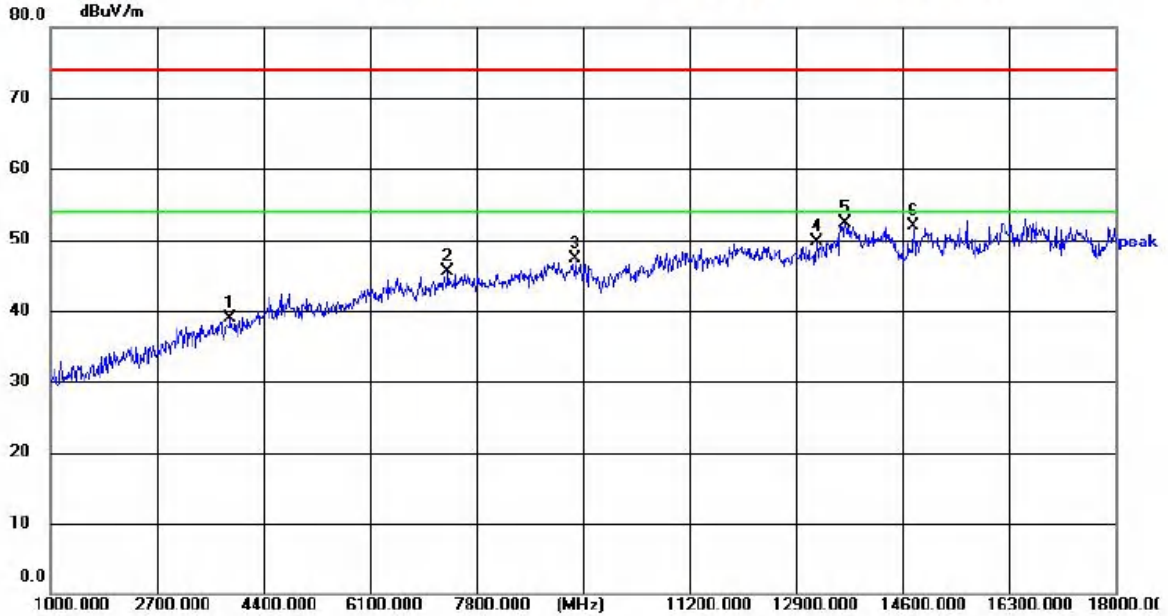

Site LAB Chamber 2      Polarization: **Horizontal**      Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK      Power:      Humidity: 50 %  
 EUT:      Distance: 3m  
 M/N: IQ-6512DJBT  
 Mode: BT 2441MHz TX  
 Note: Guanzhou chuanghong electronics co.,ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3877.250	49.60	-10.76	38.84	74.00	35.16	peak	150	0	P	
2	7353.750	48.37	-2.87	45.50	74.00	28.50	peak	150	0	P	
3	9395.875	47.00	0.21	47.21	74.00	26.79	peak	150	0	P	
4	13237.875	46.67	3.00	49.67	74.00	24.33	peak	150	0	P	
5	13688.375	48.31	3.91	52.22	74.00	21.78	peak	150	0	P	
6	14778.500	48.99	2.91	51.90	74.00	22.10	peak	150	0	P	


CH39

Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**

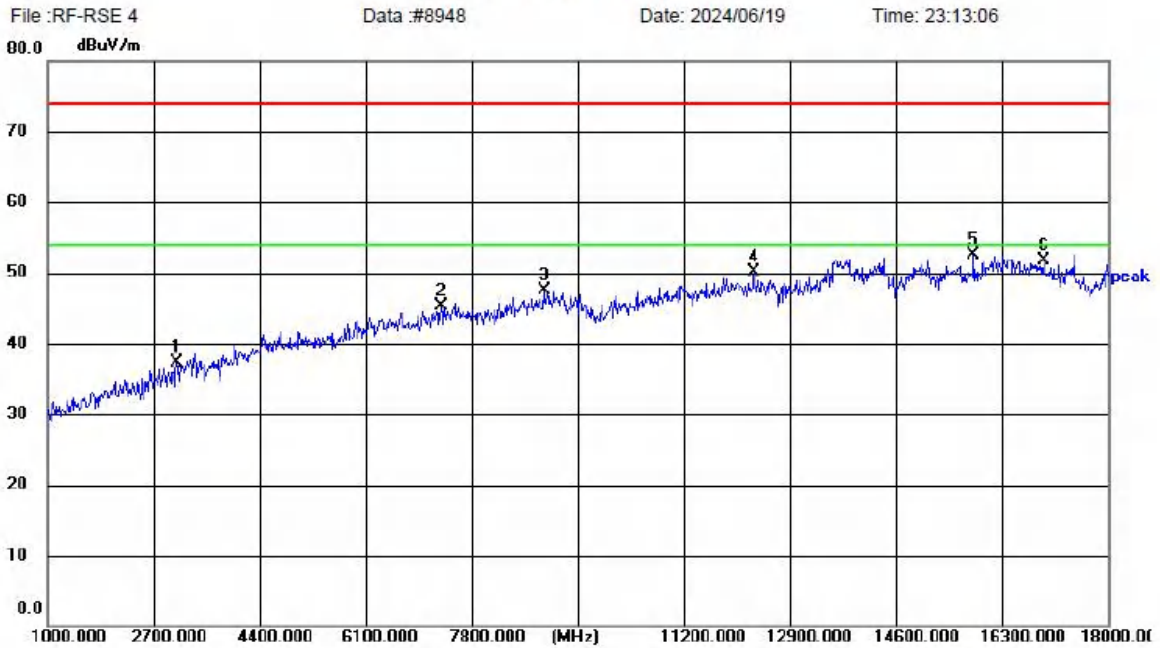

Site LAB Chamber 2      Polarization: **Vertical**      Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK      Power:      Humidity: 50 %  
 EUT:      Distance: 3m  
 M/N: IQ-6512DJBT  
 Mode: BT 2441MHz TX  
 Note: Guanzhou chuanghong electronics co.,ltd

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3088.875	51.07	-13.67	37.40	74.00	36.60	peak	150	0	P	
2	7313.375	48.21	-3.00	45.21	74.00	28.79	peak	150	0	P	
3	8964.500	47.79	-0.37	47.42	74.00	26.58	peak	150	0	P	
4	12326.250	47.86	2.19	50.05	74.00	23.95	peak	150	0	P	
5	15849.500	48.13	4.34	52.47	74.00	21.53	peak	150	0	P	
6	16975.750	44.92	6.74	51.66	74.00	22.34	peak	150	0	P	




CH78

Horizontal




Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**

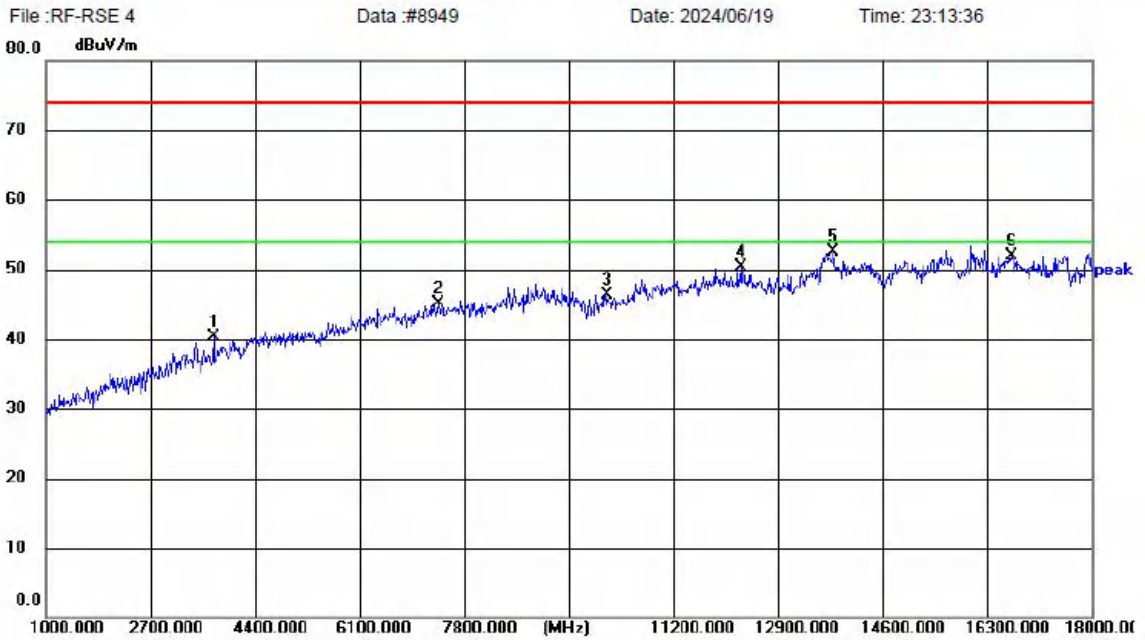

Site LAB Chamber 2      Polarization: *Horizontal*      Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK      Power:      Humidity: 50 %  
 EUT:      Distance: 3m  
 M/N: IQ-6512DJB T  
 Mode: BT 2480MHz TX  
 Note: Guanzhou chuanghong electronics co.,ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3730.625	51.56	-11.34	40.22	74.00	33.78	peak	150	0	P	
2	7377.125	48.00	-2.83	45.17	74.00	28.83	peak	150	0	P	
3	10112.000	45.92	0.45	46.37	74.00	27.63	peak	150	0	P	
4	12288.000	48.16	2.18	50.34	74.00	23.66	peak	150	0	P	
5	13803.125	48.80	3.73	52.53	74.00	21.47	peak	150	0	P	
6	16693.125	45.53	6.46	51.99	74.00	22.01	peak	150	0	P	

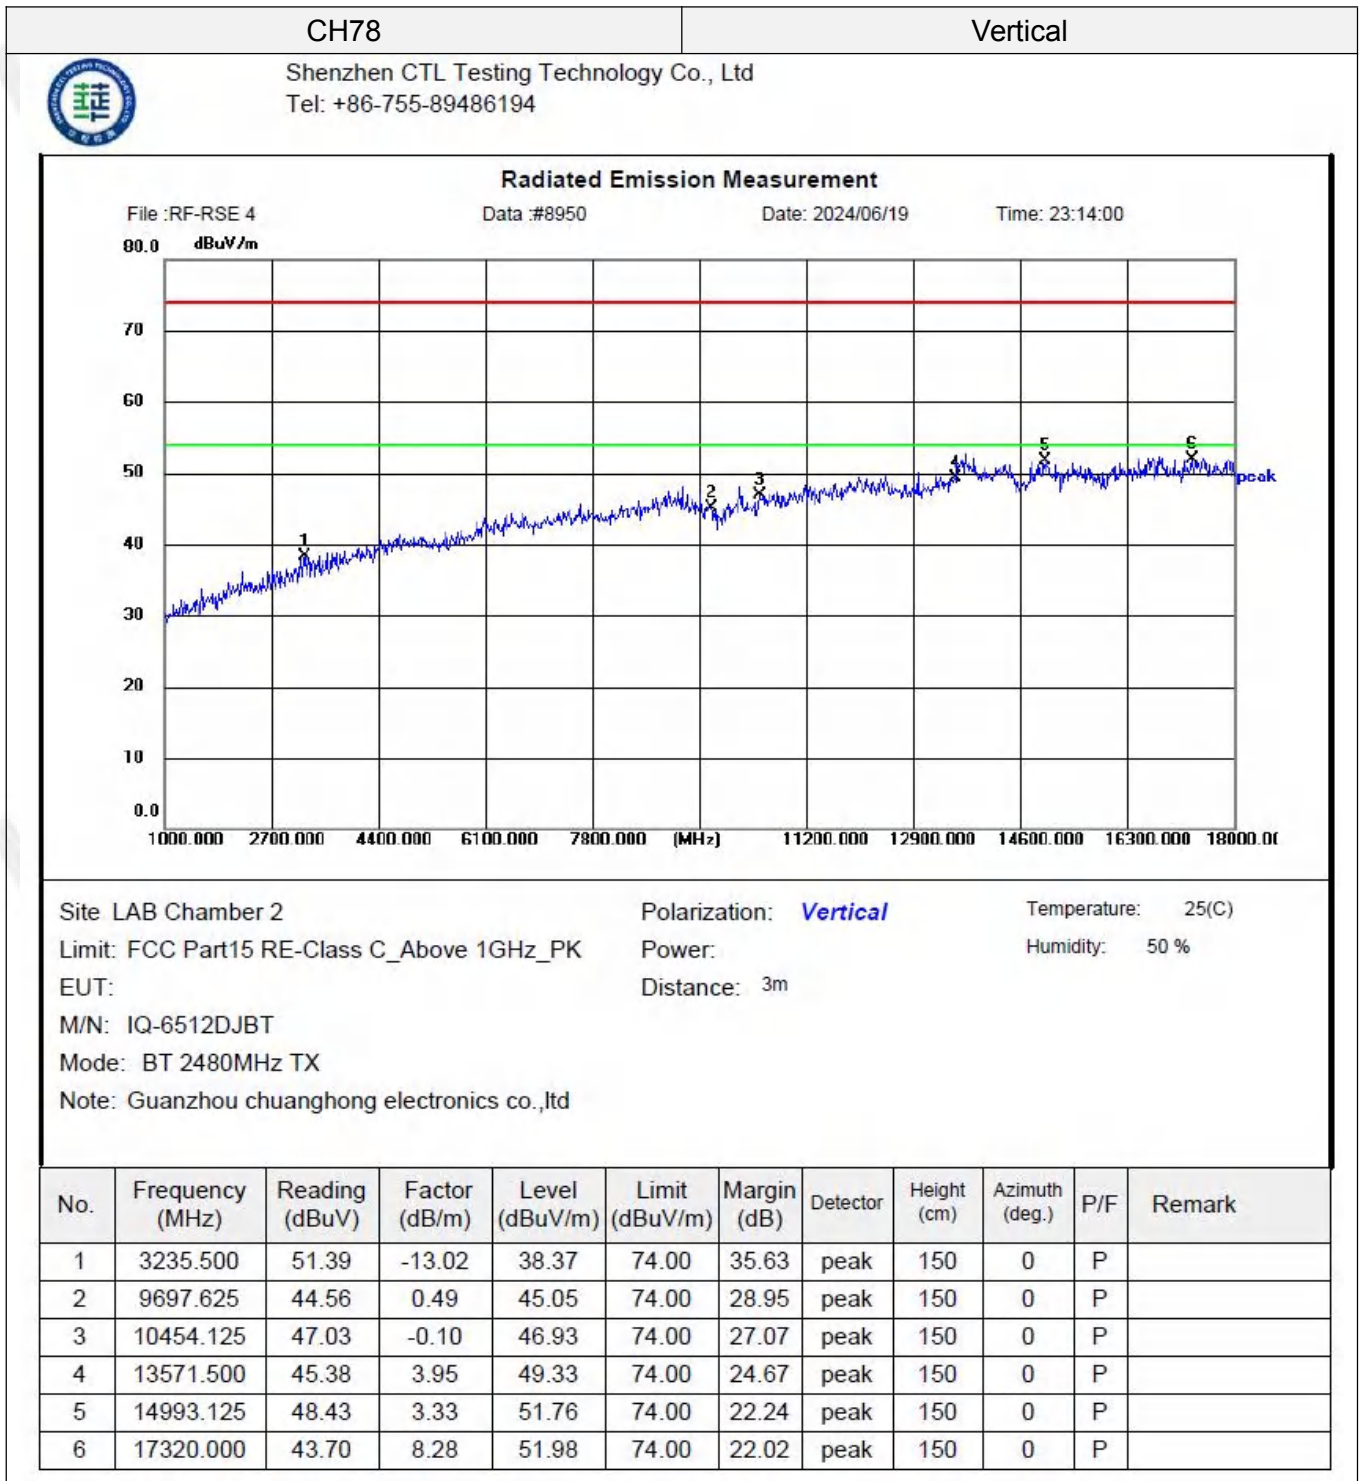

**REMARKS:**

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. PK detector measurement value is lower than the average limit. Therefore, there is no need to test AV detector measurements.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Other emissions are attenuated 20dB below the limits from 9kHz to 30MHz, so it does not recorded in report.
7. 18GHz-26GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.

**Results of Band Edges Test (Radiated)**

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK**

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	104.11	PK	--	--	70.72	28.78	4.61	0.00	33.39
2402.00	96.86	AV	--	--	63.47	28.78	4.61	0.00	33.39
2375.00	44.06	PK	74.00	29.94	10.98	28.52	4.56	0.00	33.08
2375.00	--	AV	54.00	--	--	--	--	--	--
2390.00	47.12	PK	74.00	26.88	13.8	28.72	4.60	0.00	33.32
2390.00	--	AV	54.00	--	--	--	--	--	--
2400.00	49.73	PK	--	--	16.34	28.78	4.61	0.00	33.39
2400.00	--	AV	--	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	102.97	PK	--	--	69.58	28.78	4.61	0.00	33.39
2402.00	94.73	AV	--	--	61.34	28.78	4.61	0.00	33.39
2376.00	41.53	PK	74.00	32.47	8.45	28.52	4.56	0.00	33.08
2376.00	--	AV	54.00	--	--	--	--	--	--
2390.00	44.67	PK	74.00	29.33	11.35	28.72	4.60	0.00	33.32
2390.00	--	AV	54.00	--	--	--	--	--	--
2400.00	48.69	PK	--	--	15.3	28.78	4.61	0.00	33.39
2400.00	--	AV	--	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	102.52	PK	--	--	68.9	28.92	4.70	0.00	33.62
2480.00	94.13	AV	--	--	60.51	28.92	4.70	0.00	33.62
2483.50	50.94	PK	74.00	23.06	17.31	28.93	4.70	0.00	33.63
2483.50	--	AV	54.00	--	--	--	--	--	--
2489.00	47.69	PK	74.00	26.31	14.03	28.95	4.71	0.00	33.66
2489.00	--	AV	54.00	--	--	--	--	--	--
2500.00	45.88	PK	74.00	28.12	12.2	28.96	4.72	0.00	33.68
2500.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	101.59	PK	--	--	67.97	28.92	4.70	0.00	33.62
2480.00	90.07	AV	--	--	56.45	28.92	4.70	0.00	33.62
2483.50	48.91	PK	74.00	25.09	15.28	28.93	4.70	0.00	33.63
2483.50	--	AV	54.00	--	--	--	--	--	--
2490.00	44.87	PK	74.00	29.13	11.21	28.95	4.71	0.00	33.66
2490.00	--	AV	54.00	--	--	--	--	--	--
2500.00	43.58	PK	74.00	30.42	9.9	28.96	4.72	0.00	33.68
2500.00	--	AV	54.00	--	--	--	--	--	--

### 3.3. Maximum Peak Output Power

#### Limit


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

#### Test Configuration



#### Test Results

Raw data reference to Section 2 of document No. CTL2406131031-WF01\_Appendix of BT.

### 3.4. 20dB Bandwidth

#### Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 91 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### Test Configuration



#### Test Results

Raw data reference to Section 1 of document No. CTL2406131031-WF01\_Appendix of BT.

### 3.5. Frequency Separation

#### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300 KHz RBW and 300 KHz VBW.

#### TEST CONFIGURATION



#### TEST RESULTS

Raw data reference to Section 3 of document No. CTL2406131031-WF01\_Appendix of BT.

### 3.6. Number of hopping frequency


#### Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 300 KHz RBW and 300 KHz VBW.

#### Test Configuration



#### Test Results

Raw data reference to Section 4 of document No. CTL2406131031-WF01\_Appendix of BT.

### 3.7. Time of Occupancy (Dwell Time)

#### Limit

The average time of occupancy on any channel shall not be greater than 400 milliseconds within a period of 400 milliseconds multiplied by the number of hopping channels employed.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 910 KHz RBW and 910 KHz VBW, Span 0Hz.

#### Test Configuration



#### Test Results

Raw data reference to Section 5 of document No. CTL2406131031-WF01\_Appendix of BT.



### 3.8. Out-of-band Emissions

#### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

#### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.

#### Test Configuration



#### Test Results

Raw data reference to Section 6 of document No. CTL2406131031-WF01\_Appendix of BT.

### 3.9. Pseudorandom Frequency Hopping Sequence

#### TEST APPLICABLE


#### **For 47 CFR Part 15C section 15.247 (a) (1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### **EUT Pseudorandom Frequency Hopping Sequence Requirement**


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

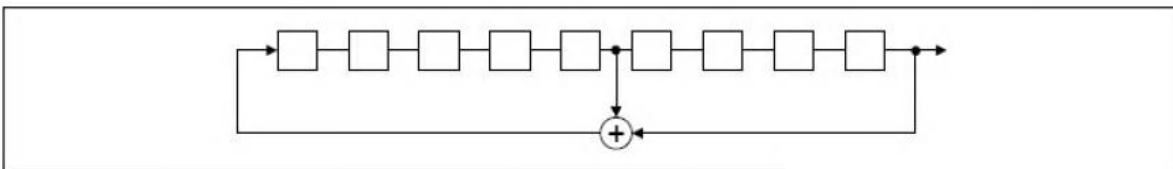

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

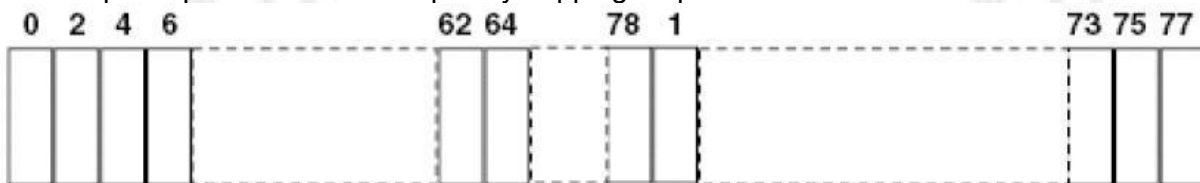

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

### 3.10. Antenna Requirement

#### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### **Refer to statement below for compliance**


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.


#### Antenna Connected Construction

The maximum gain of antenna was 1.70dBi.

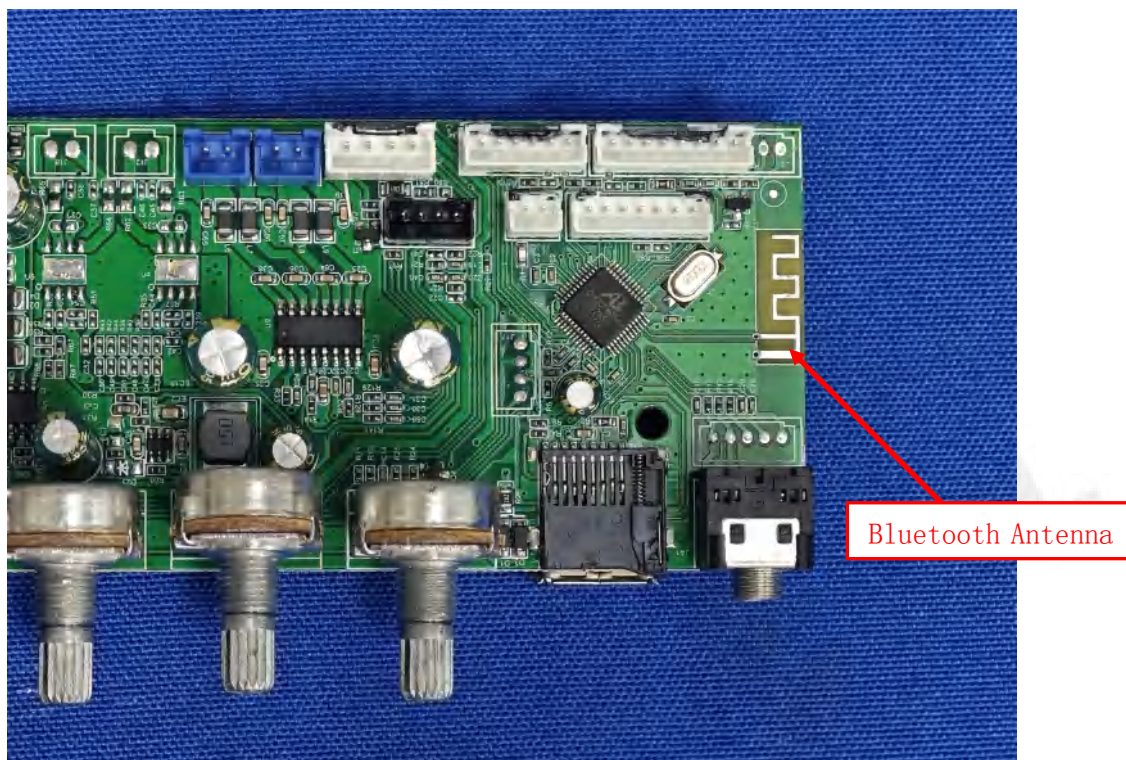

#### 4. Test Setup Photos of the EUT

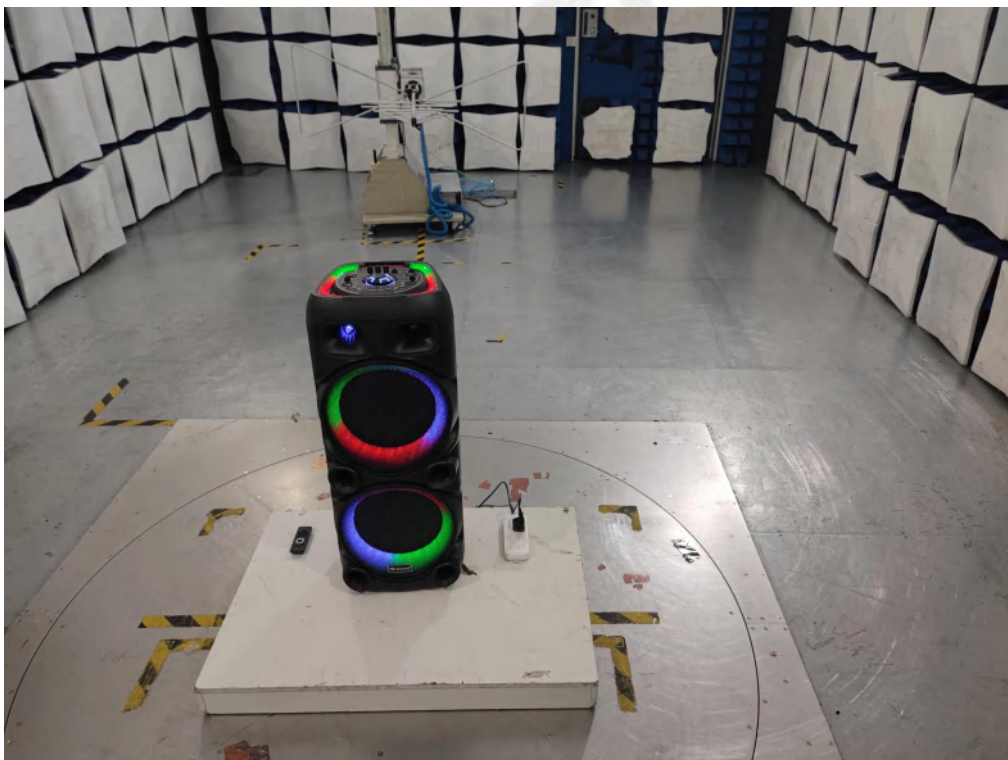

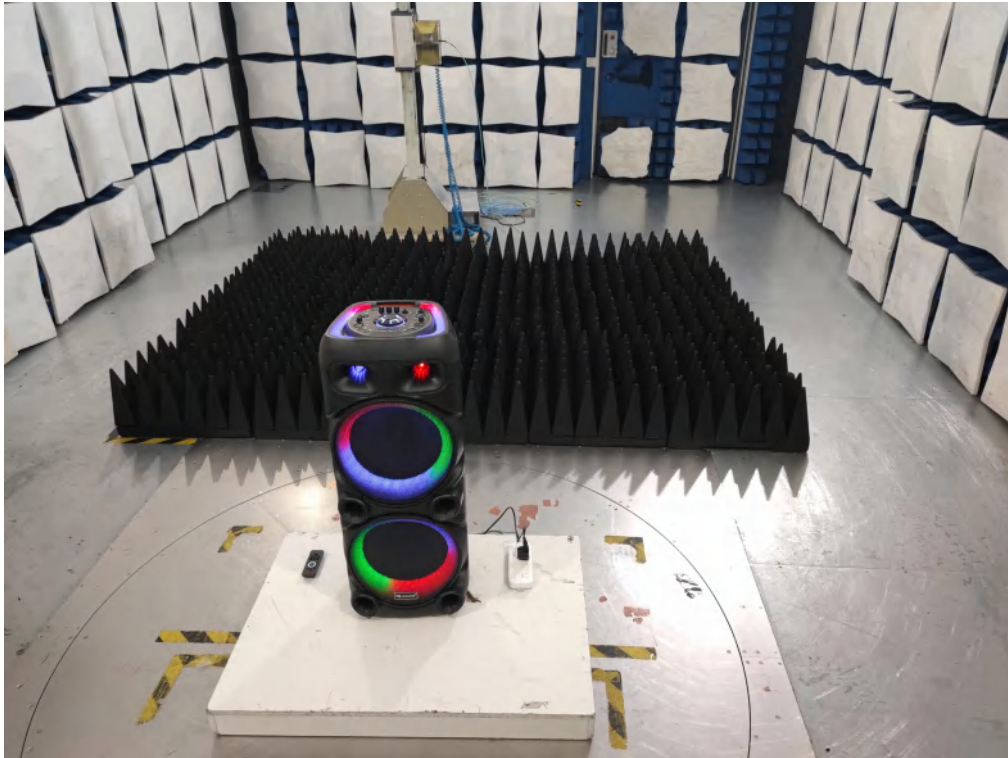

## 5. Photos of the EUT

### External Photos of EUT


















Internal Photos of EUT

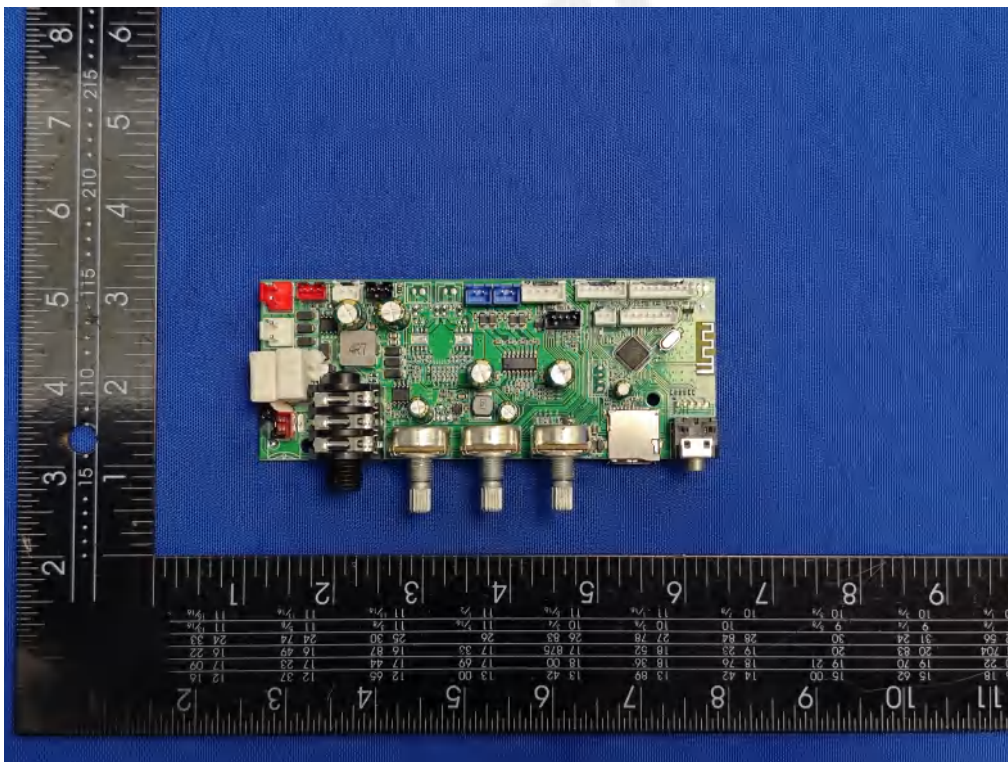


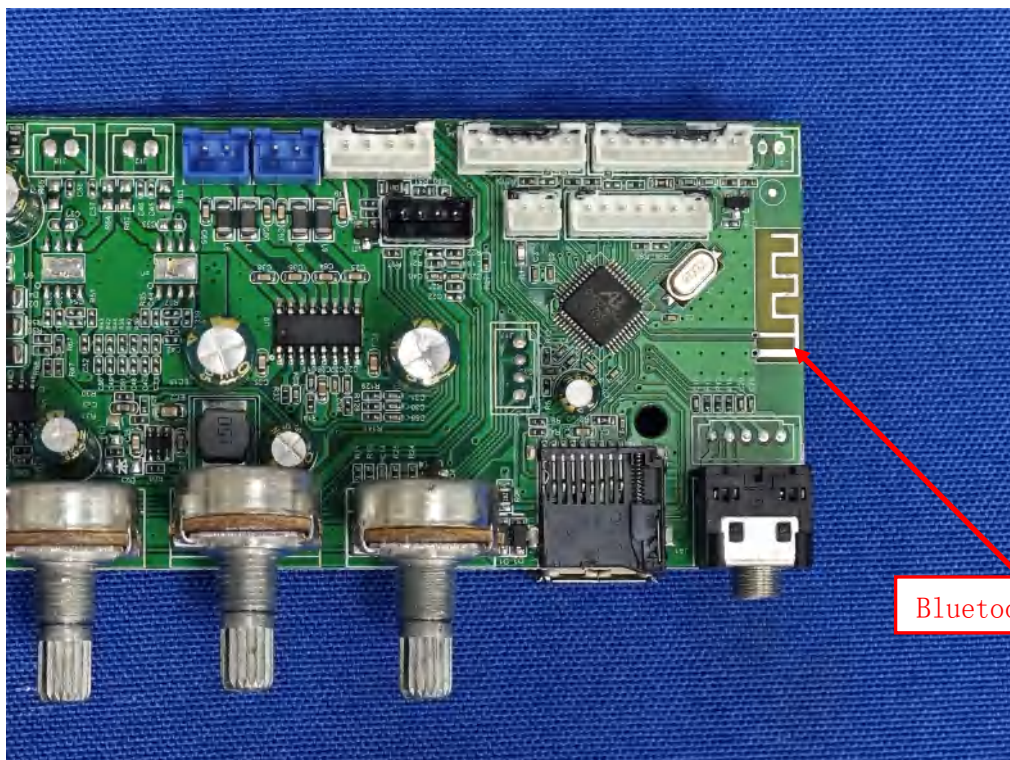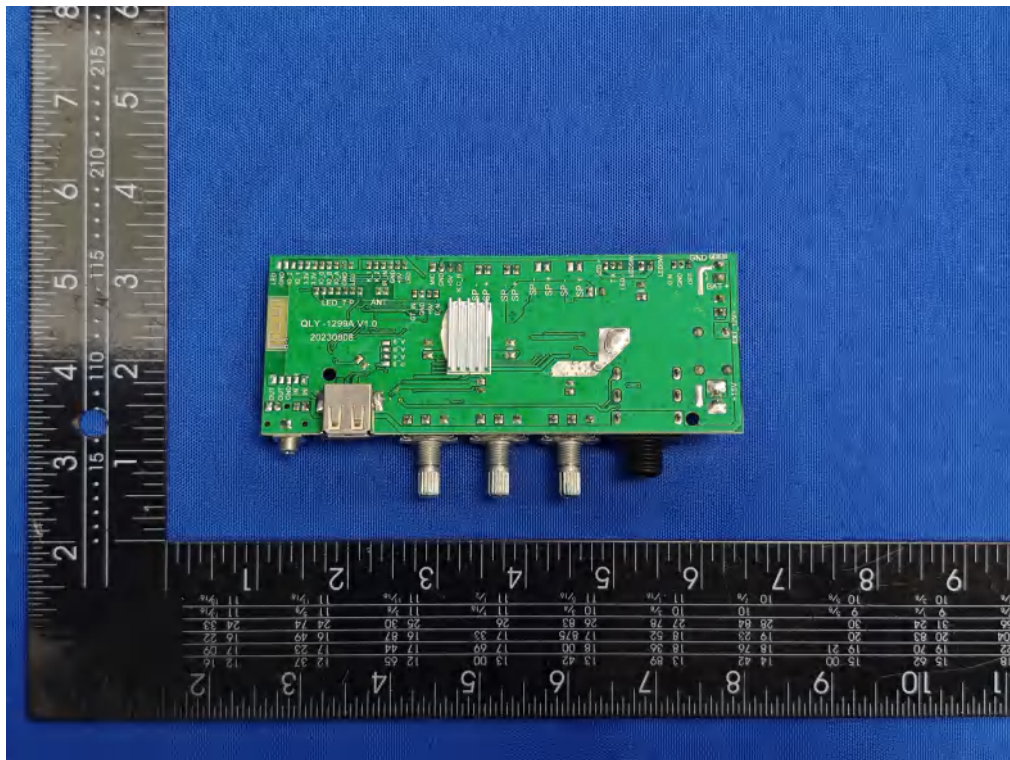

Bluetooth Antenna

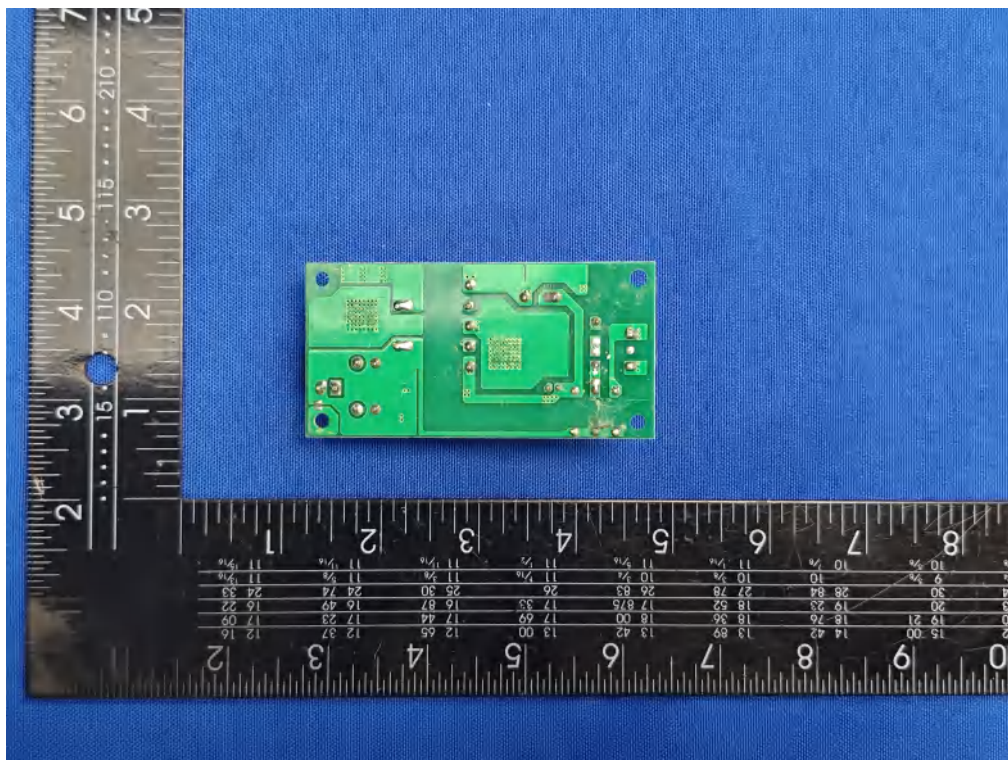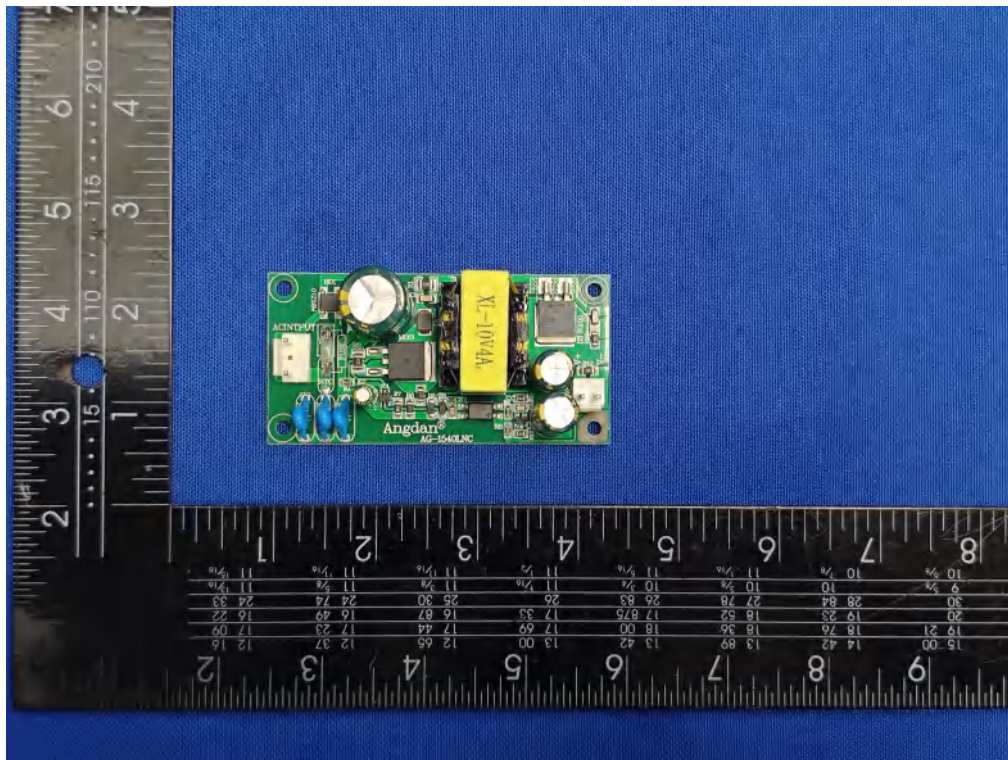

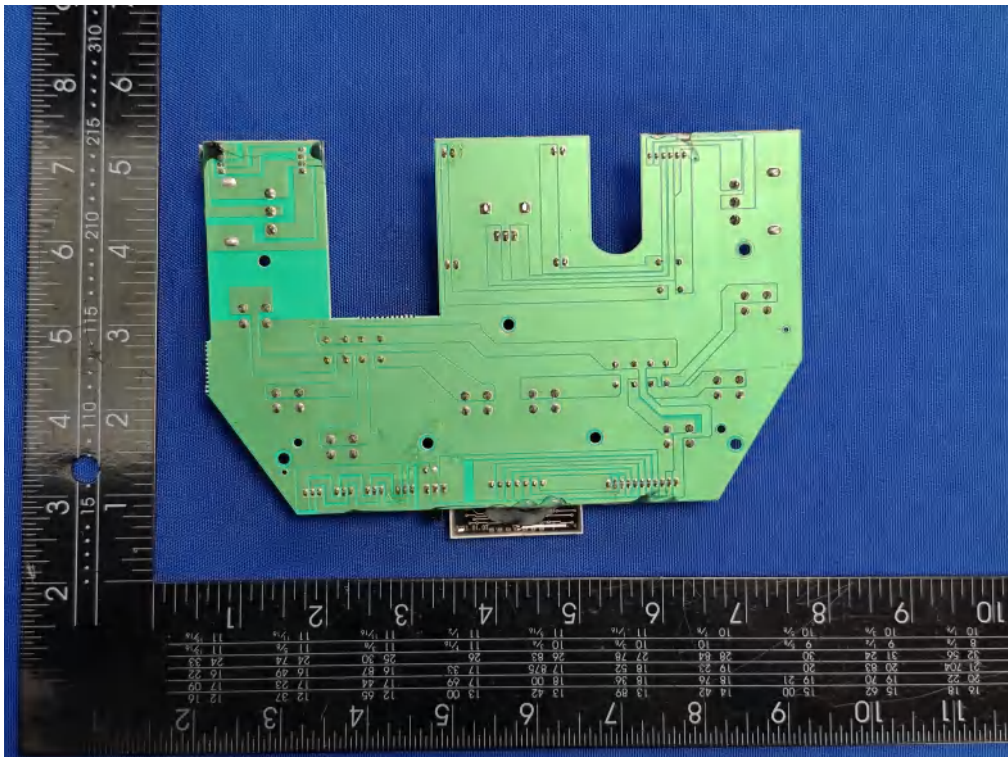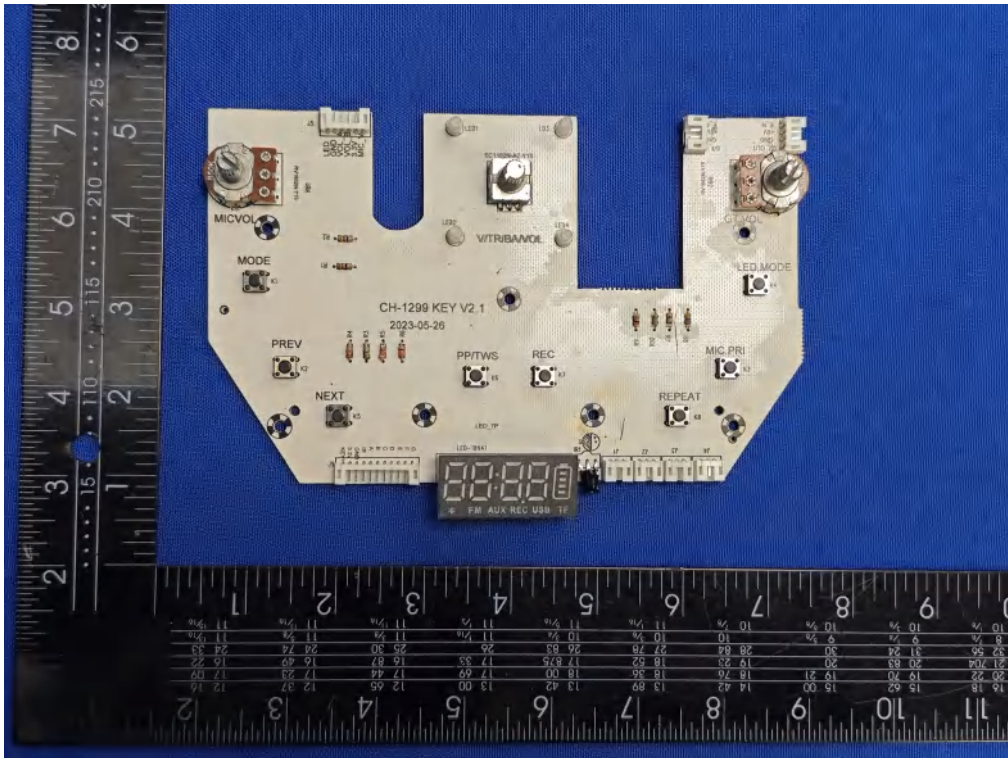

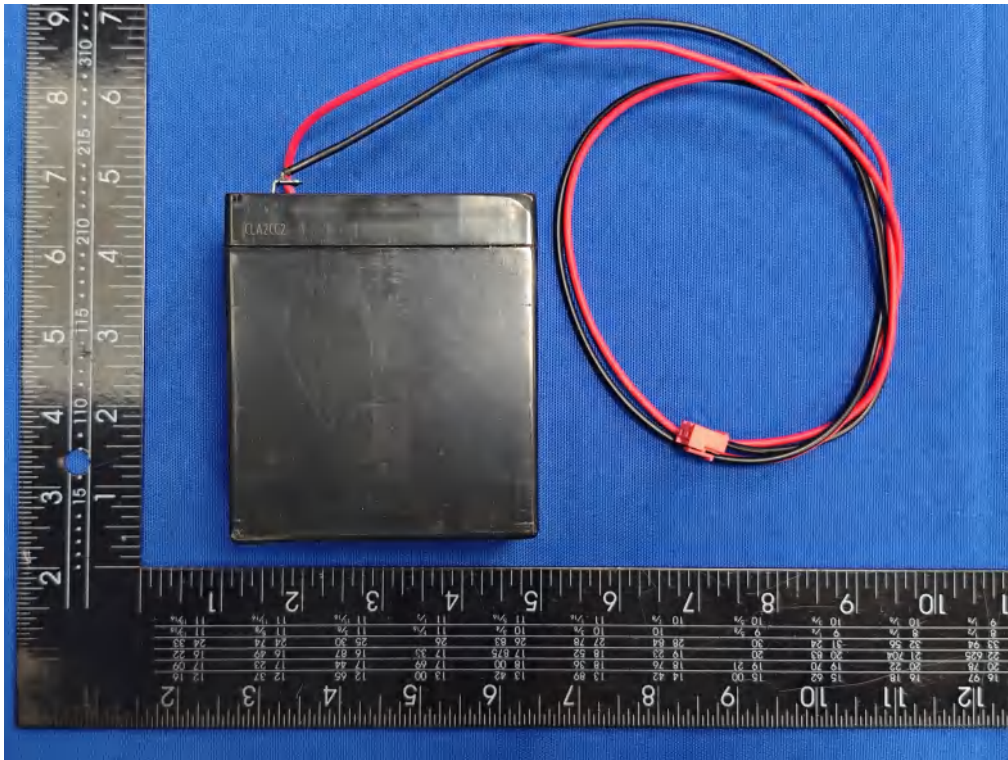

\*\*\*\*\* End of Report \*\*\*\*\*