

Testing Tomorrow's Technology

**Application
For**

**Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an
Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247**

For the

Clean Hands Safe Hands, LLC

Model Number: GEN4 Sensor

FCC ID: 2AHQD-SENSOR4

UST Project: 22-0125

Test Dates: April 31, 2022 – June 3, 2022

Issue Date: June 6, 2022

Total Pages: 65

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US Tech (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Consulting Engineer, President

Date: June 6, 2022



This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: Clean Hands Safe Hands, LLC
MODEL: GEN4 Sensor
FCC ID: 2AHQD-SENSOR4
DATE: June 6, 2022

This report concerns (check one): Original grant Class II change

Equipment type: 2.4 GHz Zigbee transmitter Device

Technical:
IEEE Std. 802.15.4
2405 MHz - 2475 MHz (Channels 11-25)
Type of modulation: O-QPSK
Data/Bit Rate: 250 kBPS
Antenna Gain: +3.3 dBi (Trace Antenna)
Maximum Output Power: +6.2 dBm
Software used to program EUT: RAILtest
EUT firmware number: V2.12
Power setting: +14 dBm

Report prepared by:
US Tech
3505 Francis Circle
Alpharetta, GA30004

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

Table of Contents

| <u>Paragraph</u> | <u>Title</u> | <u>Page</u> |
|------------------|---|-------------|
| 1 | General Information..... | 7 |
| 1.1 | Purpose of this Report | 7 |
| 1.2 | Characterization of Test Sample..... | 7 |
| 1.3 | Product Description | 7 |
| 1.4 | Configuration of Tested System..... | 8 |
| 1.5 | Test Facility..... | 8 |
| 1.6 | Related Submittal(s)/Grant(s) | 8 |
| 2 | Tests and Measurements | 10 |
| 2.1 | Test Equipment..... | 10 |
| 2.2 | Modifications to EUT Hardware | 11 |
| 2.3 | Number of Measurements for Intentional Radiators (15.31(m)) | 11 |
| 2.4 | Frequency Range of Radiated Measurements (Part 15.33)..... | 12 |
| 2.4.1 | Intentional Radiator..... | 12 |
| 2.4.2 | Unintentional Radiator | 12 |
| 2.5 | Measurement Detector Function and Bandwidth (CFR 15.35) | 12 |
| 2.5.1 | Detector Function and Associated Bandwidth | 12 |
| 2.5.2 | Corresponding Peak and Average Requirements..... | 12 |
| 2.6 | EUT Antenna Requirements (CFR 15.203) | 13 |
| 2.7 | Restricted Bands of Operation (Part 15.205) | 14 |
| 2.8 | Transmitter Duty Cycle (Part15.35 (c)) | 14 |
| 2.9 | Antenna Conducted Intentional and Spurious Emissions (CFR 15.209, 15.247(d))..... | 14 |
| 2.10 | Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d)) | 29 |
| 2.11 | Band Edge Measurements (CFR 15.247(d)) | 32 |
| 2.12 | Six (6) dB Bandwidth (CFR 15.247(a)(2))..... | 41 |
| 2.13 | Occupied Bandwidth, (99% bandwidth) | 45 |
| 2.14 | Maximum Peak Conducted Output Power (CFR 15.247 (b) (3)) | 49 |
| 2.15 | Power Spectral Density (CFR 15.247(e)) | 54 |
| 2.16 | Intentional Radiator Power Lines Conducted Emissions (CFR 15.207) | 58 |
| 2.17 | Intentional Radiator, Radiated Emissions (CFR 15.209) | 59 |
| 2.18 | Measurement Uncertainty | 66 |
| 2.18.1 | Conducted Emissions Measurement Uncertainty | 66 |
| 2.18.2 | Radiated Emissions Measurement Uncertainty | 66 |
| 3 | Conclusions | 66 |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

List of Figures

| <u>Figures</u> | <u>Title</u> | <u>Page</u> |
|----------------|--|-------------|
| Figure 1. | Block Diagram of Test Configuration | 13 |
| Figure 2. | Block Diagram Conducted Radio Measurement | 14 |
| Figure 3. | Channel 11, 30-1000 MHz | 15 |
| Figure 4. | Channel 11, 1 – 2.921 GHz | 16 |
| Figure 5. | Channel 11, 2.679 - 10 GHz | 17 |
| Figure 6. | Channel 11, 10-24 GHz | 18 |
| Figure 7. | Channel 18, 30-1000 MHz | 19 |
| Figure 8. | Channel 18, 1-2.921 GHz | 20 |
| Figure 9. | Channel 18, 2.6-6 GHz | 21 |
| Figure 10. | Channel 18, 6-10 GHz | 22 |
| Figure 11. | Channel 18, 10-24 GHz | 23 |
| Figure 12. | Channel 25, 30-1000 MHz | 24 |
| Figure 13. | Channel 25, 1 – 2.921 GHz | 25 |
| Figure 14. | Channel 25, 2.679-6 GHz | 26 |
| Figure 15. | Channel 25, 6-10 GHz | 27 |
| Figure 16. | Channel 25, 10-24 GHz | 28 |
| Figure 17. | Above 1 GHz Radiated Emissions Test Setup..... | 29 |
| Figure 18. | Band Edge Compliance – Low Channel Delta – Peak (Horizontal) | 33 |
| Figure 19. | Band Edge Compliance – Low Channel Delta – Peak (Vertical)..... | 34 |
| Figure 20. | Low Channel Restricted Band – Peak (Horizontal)..... | 35 |
| Figure 21. | Low Channel Restricted Band – Peak (Vertical) | 36 |
| Figure 22. | Band Edge Compliance – High Channel Delta – Peak (Horizontal)..... | 37 |
| Figure 23. | Band Edge Compliance – High Channel Delta – Peak (Vertical) | 38 |
| Figure 24. | High Channel Restricted Band – Peak (Horizontal) | 39 |
| Figure 25. | High Channel Restricted Band – Peak (Vertical) | 40 |
| Figure 26. | Block Diagram Conducted Radio Measurement | 41 |
| Figure 27. | 6 dB Bandwidth Low Channel..... | 42 |
| Figure 28. | 6 dB Bandwidth Mid Channel..... | 43 |
| Figure 29. | 6 dB Bandwidth High Channel | 44 |
| Figure 30. | 99% Occupied Bandwidth Low Channel | 46 |
| Figure 31. | 99% Occupied Bandwidth Mid Channel..... | 47 |
| Figure 32. | 99% Occupied Bandwidth High Channel | 48 |
| Figure 33. | Peak Antenna Conducted Output Power, Low Channel | 51 |
| Figure 34. | Peak Antenna Conducted Output Power, Mid Channel | 52 |
| Figure 35. | Peak Antenna Conducted Output Power, High Channel | 53 |
| Figure 36. | Power Spectral Density, Low Channel..... | 55 |
| Figure 37. | Power Spectral Density, Mid Channel..... | 56 |
| Figure 38. | Power Spectral Density, High Channel | 57 |
| Figure 39. | Block Diagram Below 30 MHz Radiated Emissions Test Setup..... | 59 |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

| | |
|---|----|
| Figure 40. Block Diagram 30- 1000 MHz Radiated Emissions Test Setup | 60 |
| Figure 41. Block Diagram Above 1 GHz Radiated Emissions Test Setup | 60 |
| Figure 42. Radiated Emissions, Horizontal 30 MHz – 1 GHz..... | 63 |
| Figure 43. Radiated Emissions, Vertical 30 MHz – 1 GHz..... | 63 |
| Figure 44. Radiated Emissions, Horizontal 1 GHz – 10 GHz..... | 65 |
| Figure 45. Radiated Emissions, Vertical 1 GHz – 10 GHz | 65 |

List of Tables

| <u>Table</u> | <u>Title</u> | <u>Page</u> |
|---|--------------|-------------|
| Table 1. EUT and Peripherals..... | | 9 |
| Table 2. Test Instruments | | 10 |
| Table 3. Number of Test Frequencies for Intentional Radiators..... | | 11 |
| Table 4. Allowed Antenna(s)..... | | 13 |
| Table 5. Radiated Fundamental & Harmonic Emissions - AVERAGE | | 30 |
| Table 6. Radiated Fundamental & Harmonic Emissions - PEAK | | 31 |
| Table 7. Six (6) dB Bandwidth | | 41 |
| Table 8. 99% Occupied Bandwidth..... | | 45 |
| Table 9. Peak Antenna Conducted Output Power per Part 15.247 (b)(3) | | 50 |
| Table 10. Power Spectral Density for Low, Mid and High Bands..... | | 54 |
| Table 11. Power Line Conducted Emissions | | 58 |
| Table 12. Spurious Radiated Emissions (30 MHz – 1 GHz) | | 61 |
| Table 13. Spurious Radiated Emissions (1 GHz – 10 GHz)..... | | 62 |
| Table 14. Spurious Radiated Emissions (10 GHz – 25 GHz)..... | | 64 |

List of Attachments

| | |
|---------------------------|--------------------------------|
| FCC Agency Agreement | Test Configuration Photographs |
| FCC Application Forms | External Photographs |
| Letter of Confidentiality | Internal Photographs |
| Equipment Label(s) | Theory of Operation |
| Block Diagram(s) | RF Exposure |
| Schematic(s) | User's Manual |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to FCC Rules and Regulations Part 15 Subpart C, Section 15.247.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on May 31, 2022 in good operating condition.

1.3 Product Description

The Equipment under Test (EUT) is the Clean Hands Safe Hands, LLC Model GEN4 Sensor. The purpose of the Sensor is to monitor for sensory input and scan for Clean Hands Safe Hands Badges (BLE). This data is then transmitted back over Zigbee to a central network coordinator that processes the data and forwards it on to the cloud.

The EUT incorporates both Bluetooth LE technology and Zigbee technology. This report is for the radio module.

The Zigbee radio details include:

Antenna Gain: +3.3 dBi (Trace Antenna)
Bandwidth: 5 MHz bandwidth modulation
Maximum Output Power: +6.2 dBm (measured)
Firmware setting +14 dBm.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* for the intentional radiator aspect of the device and *ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014)* for the unintentional radiator aspect of the device as well as FCC subpart B and C of Part 15 and per FCC KDB Publication number 558074 v03r05 for Digital Transmission Systems Operating Under section 15.247.

Digital RF conducted and radiated emissions data below 1 GHz were taken with the measuring receiver (or spectrum analyzer's) resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements performed above 1.0 GHz were made with a RBW of 1 MHz. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was set to 3 times the RBW or as required per the standard throughout the evaluation process.

A list of EUT and Peripherals is found in Table 1. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is US5301.

1.6 Related Submittal(s)/Grant(s)

The EUT is subject to the following FCC Equipment Authorizations:

- a) Certification of the transmitter incorporated within the EUT, see test data presented herein.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

Table 1. EUT and Peripherals

| PERIPHERAL MANUFACTURER | MODEL NUMBER | SERIAL NUMBER | FCC/IC ID | CABLES P/D |
|--|----------------|---------------|-------------------------------------|------------|
| EUT/ Clean Hands Safe Hands, LLC | GEN4 Sensor | N/A | FCC ID: 2AHQD- SENSOR4 (pending) | N/A |
| Antenna See antenna details | -- | -- | -- | -- |

S= Shielded, U= Unshielded, P= Power, D= Data

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are included herein.

Table 2. Test Instruments

| TEST INSTRUMENT | MANUFACTURER | MODEL NUMBER | SERIAL NUMBER | CALIBRATION DUE DATE |
|----------------------------------|--------------------|----------------|---------------|----------------------|
| Spectrum Analyzer | Agilent | E4407B | US41442935 | 9/2/2022 2 yr. |
| Spectrum Analyzer | Hewlett-Packard | 8593E | 3205A00124 | 2/28/2024 2 yr. |
| Rf Preamp 100 kHz To 1.3 GHz | Hewlett-Packard | 8447D | 1937A02980 | 6/9/2022 |
| Preamp 1.0 GHz To 26.0 GHz | Hewlett-Packard | 8449B | 3008A00480 | 2/11/2023 |
| Biconical Antenna | EMCO | 3110B | 9307-1431 | 11/11/2022 2 yr. |
| Log Periodic Antenna | EMCO | 3146 | 9110-3236 | 12/13/2023 2 yr. |
| Horn Antenna | EMCO | SAS-571 | 605 | 4/28/2024 2 yr. |
| High Pass Filter | Microwave Circuits | H3R020G2 | 001DC9528 | 7/16/2022 |
| SMA Fixed Attenuator 8 dB 50 Ohm | Mini-Circuits Inc. | VAT-8 15542 | 3 0519 | 8/10/2022 |

Note 1: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

US Tech Test Report:
FCC ID:
Test Report Number:
he EUT in a tJune 6, 2022
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.2 Modifications to EUT Hardware

No modifications were made by US Tech to bring the EUT into compliance with FCC Part 15.247 requirements.

2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated, with the device operating at the number of frequencies in each band specified in Table 3.

Table 3. Number of Test Frequencies for Intentional Radiators

| Frequency Range over which the device operates | Number of Frequencies | Location in the Range of operation |
|--|-----------------------|--|
| 1 MHz or less | 1 | Middle |
| 1 to 10 MHz | 2 | 1 near the top 1 near the bottom |
| Greater than 10 MHz | 3 | 1 near top 1 near middle 1 near bottom |

Because the EUT operates over 2.405 GHz to 2.475 GHz, 3 test frequencies will be used.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.4 Frequency Range of Radiated Measurements (Part 15.33)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to the range specified in 2.4.1 above, whichever is the higher range of investigation.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following:

2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e., 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified, there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.6 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

Table 4. Allowed Antenna(s)

| REPORT REFERENCE | MANUFACTURER | TYPE OF ANTENNA | MODEL | GAIN dB _i | TYPE OF CONNECTOR |
|------------------|-----------------------------|-----------------|-----------------|----------------------|-------------------|
| Antenna | Clean Hands Safe Hands, LLC | PCB Trace | Inverted F type | +3.3 | PCB Trace |

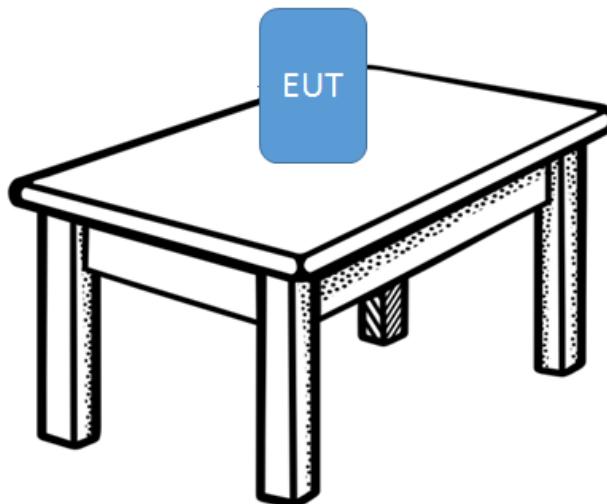


Figure 1. Block Diagram of Test Configuration

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.7 Restricted Bands of Operation (Part 15.205)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious emissions cannot exceed the limits of 15.209.

2.8 Transmitter Duty Cycle (Part15.35 (c))

The EUT employs pulse transmission however for testing purpose the EUT was programmed to transmit at a rate >98%. The pulse transmission requirements of this subpart were acknowledged and considered during testing.

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may also be expressed logarithmically in dB.

2.9 Antenna Conducted Intentional and Spurious Emissions (CFR 15.209, 15.247(d))

The EUT was put into a continuous-transmit mode of operation and tested per ANSI C63.10-2013 for conducted out of band emissions emanating from the antenna port over the frequency range of 30 MHz to ten times the highest clock frequency generate or used in this case, 25 GHz. A conducted scan was performed on the EUT to identify and record spurious signals that were related to the transmitter. Antenna Conducted Emissions of a significant magnitude that fell within restricted bands were then measured as radiated emissions in the EMC Chamber. The conducted emissions graphs are found in the figures below. The limit for antenna conducted power is 1 Watt (30 dBm) per 15.247 (b)(3).

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.



Figure 2. Block Diagram Conducted Radio Measurement

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AHQD-SENSOR4
 22-0125
 June 6, 2022
 Clean Hands Safe Hands, LLC
 Gen4 Sensor

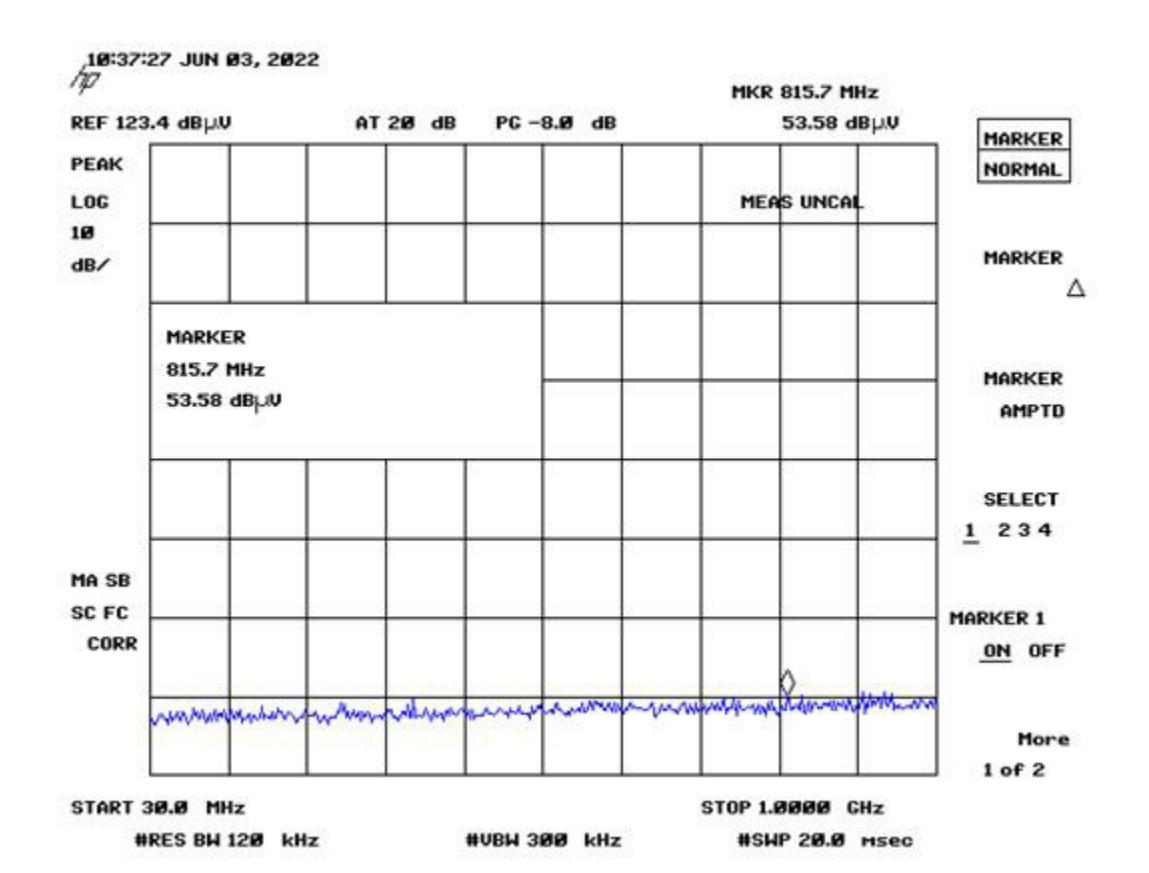


Figure 3. Channel 11, 30-1000 MHz

Sample Calculation

Conversion from dBuV to dBm: $\text{dBm} = \text{dBuV} - 107$

Fundamental conversion (2.407 GHz): $112.85 - 107 = 5.85 \text{ dBm}$

Spur measurement (815.7 MHz): $53.58 - 107 = -53.42 \text{ dBm}$

| | | |
|-------------|------------|----|
| Fundamental | 5.85 | dB |
| Spur | - (-53.42) | dB |
| Difference | 59.27 | dB |
| Limit | -20.00 | dB |
| Margin | 47.69 | dB |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

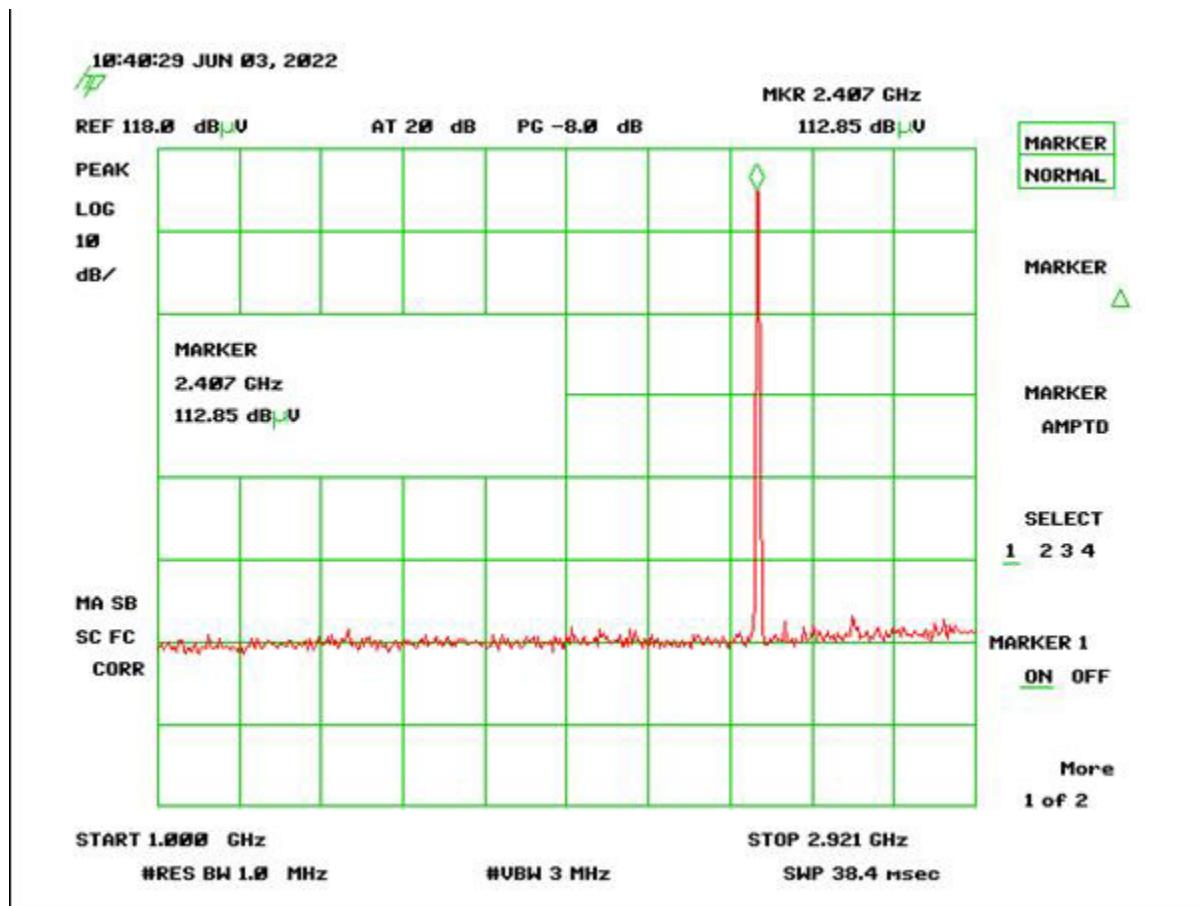


Figure 4. Channel 11, 1 – 2.921 GHz
(Note: Intentional Emission seen for radio operating at 2405 MHz)

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

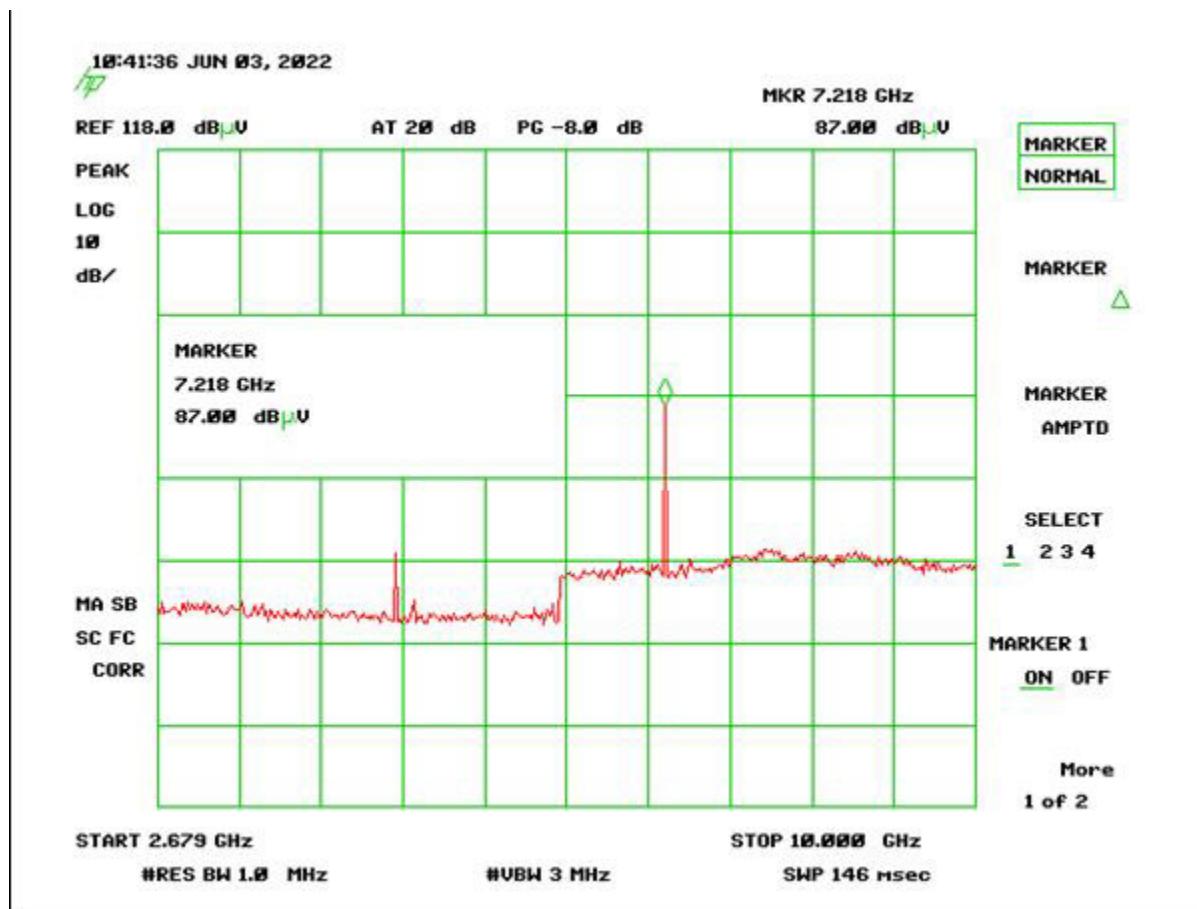


Figure 5. Channel 11, 2.679 - 10 GHz

Sample Calculation

Conversion from dBµV to dBm: $\text{dBm} = \text{dB}\mu\text{V} - 107$

Fundamental conversion (2.407 GHz): $112.85 - 107 = 5.85 \text{ dBm}$

Spur measurement (7.218 GHz): $87.00 - 107 = -20 \text{ dBm}$

| | | |
|-------------|------------|----|
| Fundamental | 5.85 | dB |
| Spur | - (-20.00) | dB |
| Difference | 25.85 | dB |
| Limit | -20.00 | dB |
| Margin | 5.85 | dB |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

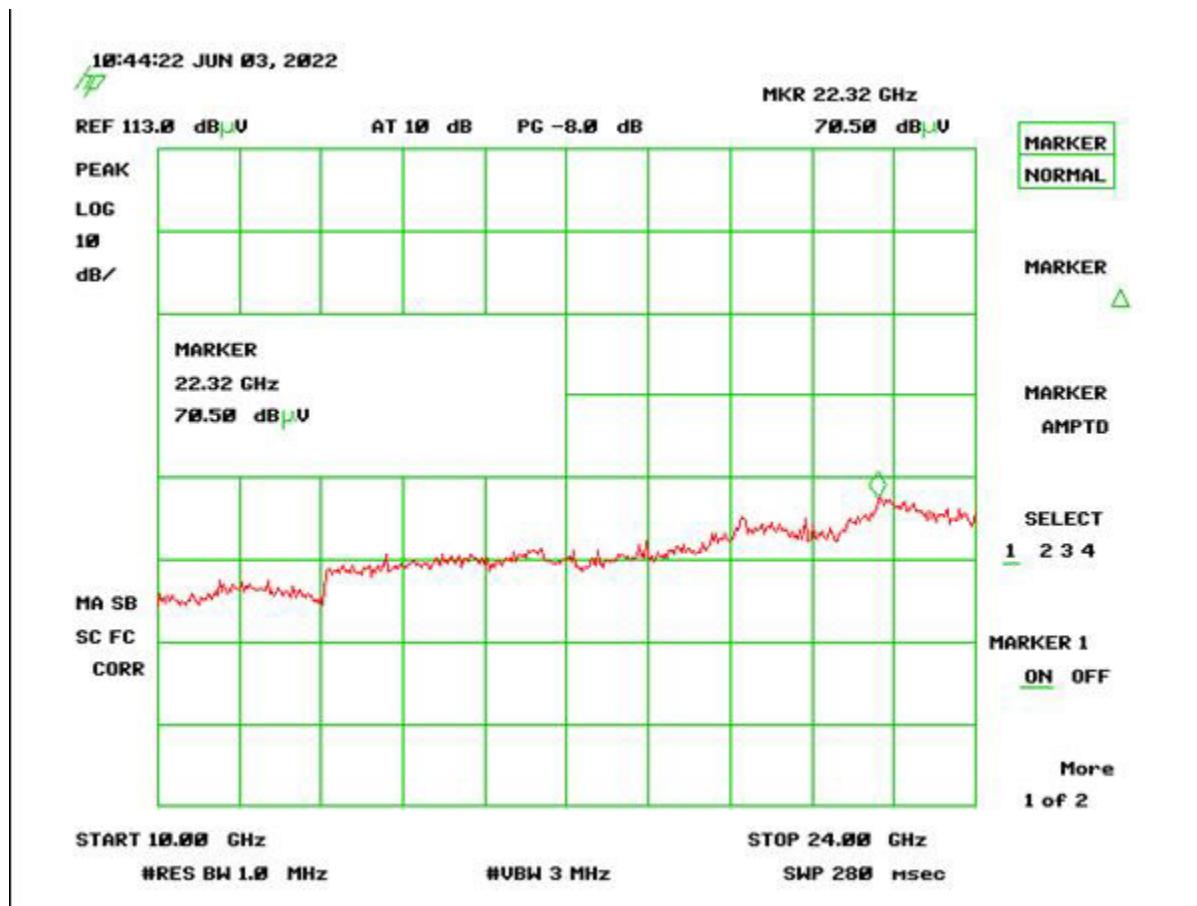


Figure 6. Channel 11, 10-24 GHz

Sample Calculation

Conversion from dBuV to dBm: $\text{dBm} = \text{dBuV} - 107$

Fundamental conversion (2.407 GHz): $112.85 - 107 = 5.85 \text{ dBm}$

Spur measurement (22.32 GHz): $70.50 - 107 = -36.5 \text{ dBm}$

| | | |
|-------------|-----------|----|
| Fundamental | 5.85 | dB |
| Spur | - (-36.5) | dB |
| Difference | 42.35 | dB |
| Limit | -20.00 | dB |
| Margin | 22.35 | dB |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

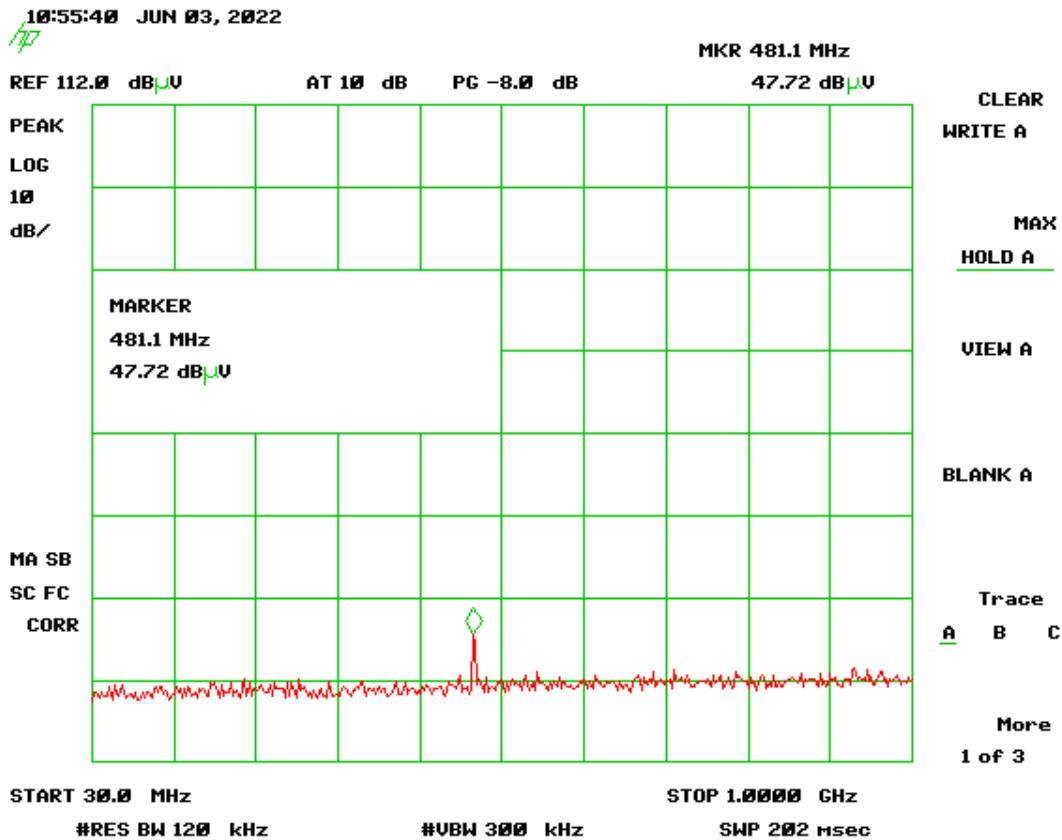


Figure 7. Channel 18, 30-1000 MHz
(Note: Intentional Emission seen for radio operating at 2440 MHz)

Sample Calculation

Conversion from dB_uV to dBm: dBm = dB_uV - 107

Fundamental conversion (2.440 GHz): $112.82 - 107 = 5.82$ dBm

Spur measurement (481.1 MHz): $47.72 - 107 = -59.28$ dBm

| | | |
|-------------|------------|----|
| Fundamental | 5.85 | dB |
| Spur | - (-59.28) | dB |
| Difference | 65.13 | dB |
| Limit | -20.00 | dB |
| Margin | 45.13 | dB |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

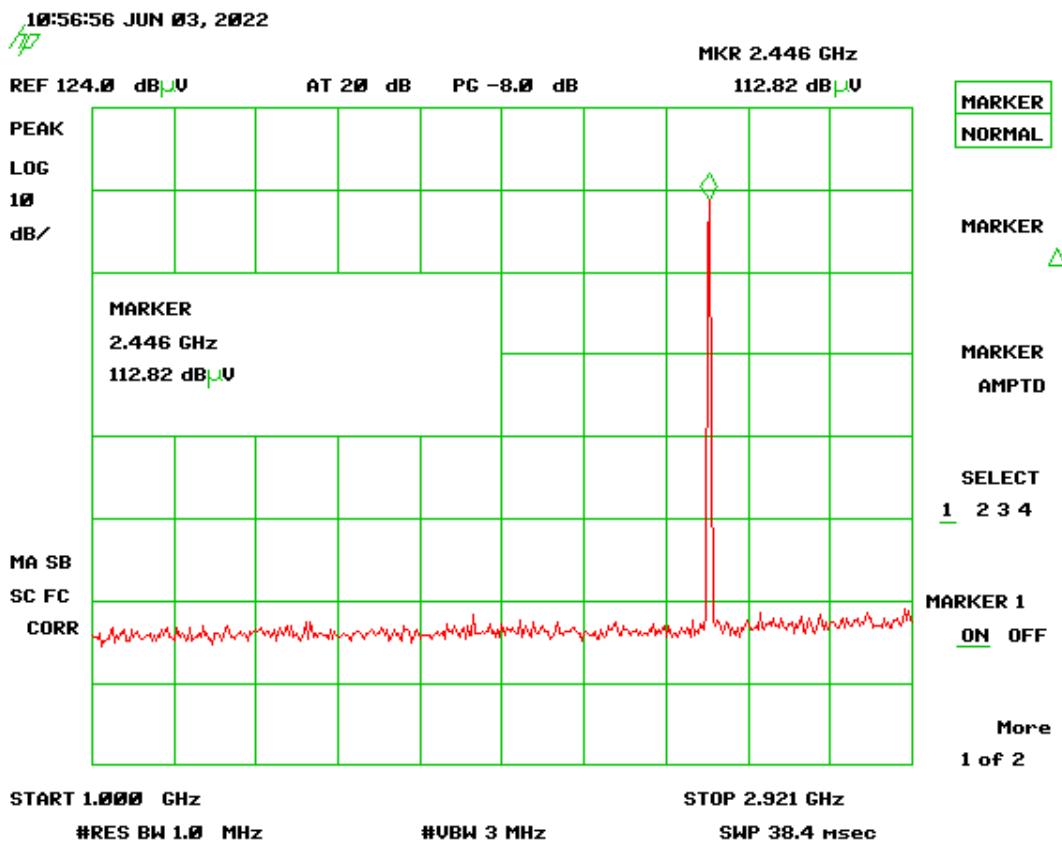


Figure 8. Channel 18, 1-2.921 GHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

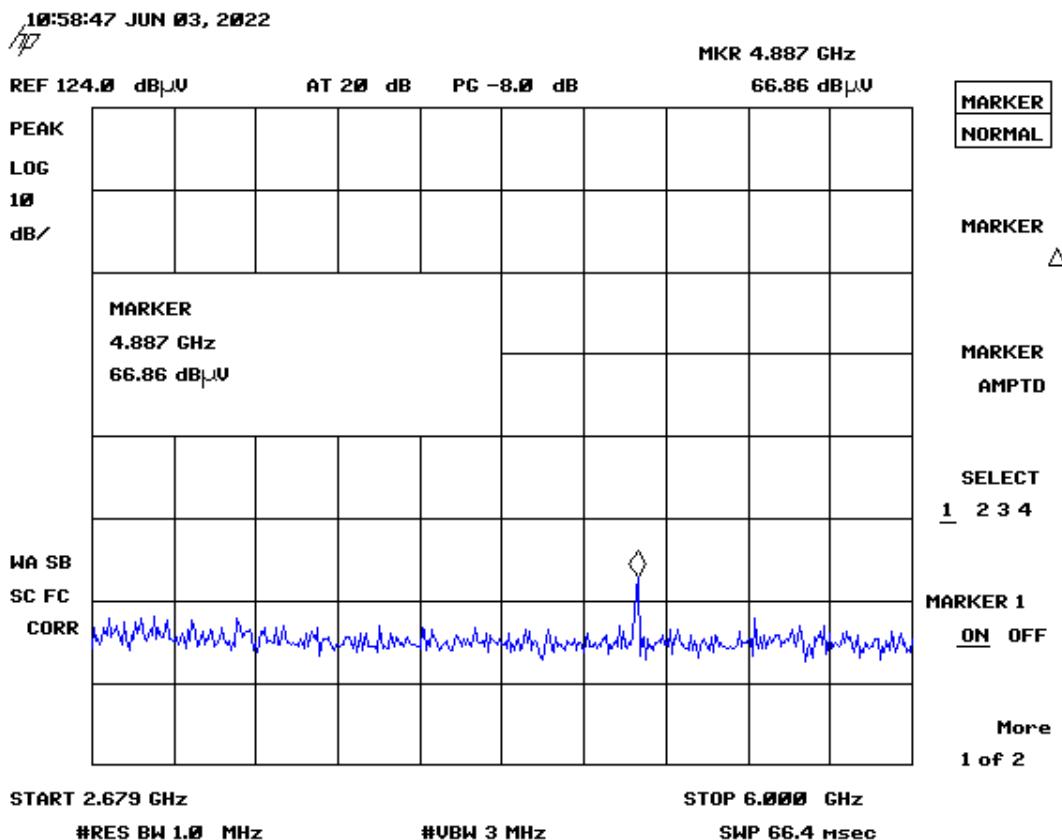


Figure 9. Channel 18, 2.6-6 GHz

Sample Calculation

Conversion from dB_μV to dBm: dBm = dB_μV - 107

Fundamental conversion (2.440 GHz): 112.82 - 107 = 5.82 dBm

Spur measurement (4.881 GHz): 66.86 - 107 = - 40.14 dBm

| | | |
|-------------|-------------|----|
| Fundamental | 5.85 | dB |
| Spur | - (- 40.14) | dB |
| Difference | 45.96 | dB |
| Limit | -20.00 | dB |
| Margin | 25.96 | dB |

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AHQD-SENSOR4
 22-0125
 June 6, 2022
 Clean Hands Safe Hands, LLC
 Gen4 Sensor

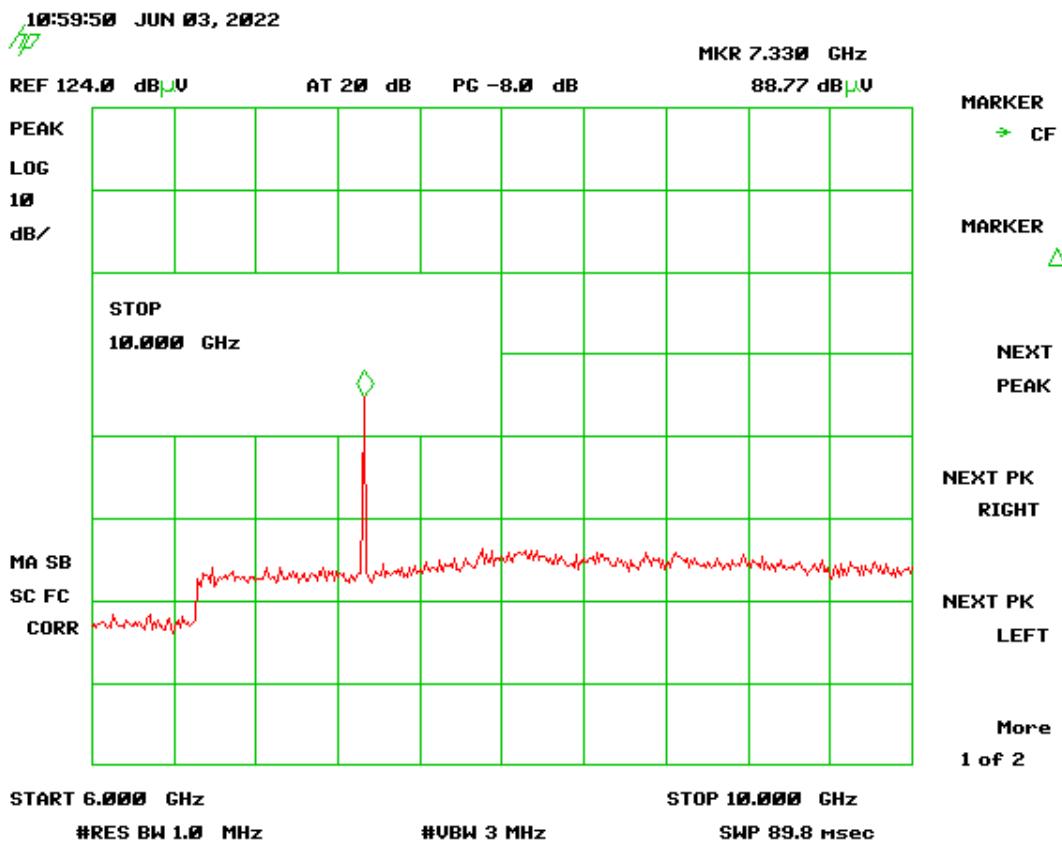


Figure 10. Channel 18, 6-10 GHz

Sample Calculation

Conversion from dB_μV to dBm: dBm = dB_μV - 107

Fundamental conversion (2.440 GHz): $112.82 - 107 = 5.82$ dBm

Spur measurement (7.33 GHz): $88.77 - 107 = -18.23$ dBm

| | | |
|-------------|-------------|----|
| Fundamental | 5.85 | dB |
| Spur | - (- 18.23) | dB |
| Difference | 24.05 | dB |
| Limit | -20.00 | dB |
| Margin | 4.05 | dB |

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AHQD-SENSOR4
 22-0125
 June 6, 2022
 Clean Hands Safe Hands, LLC
 Gen4 Sensor

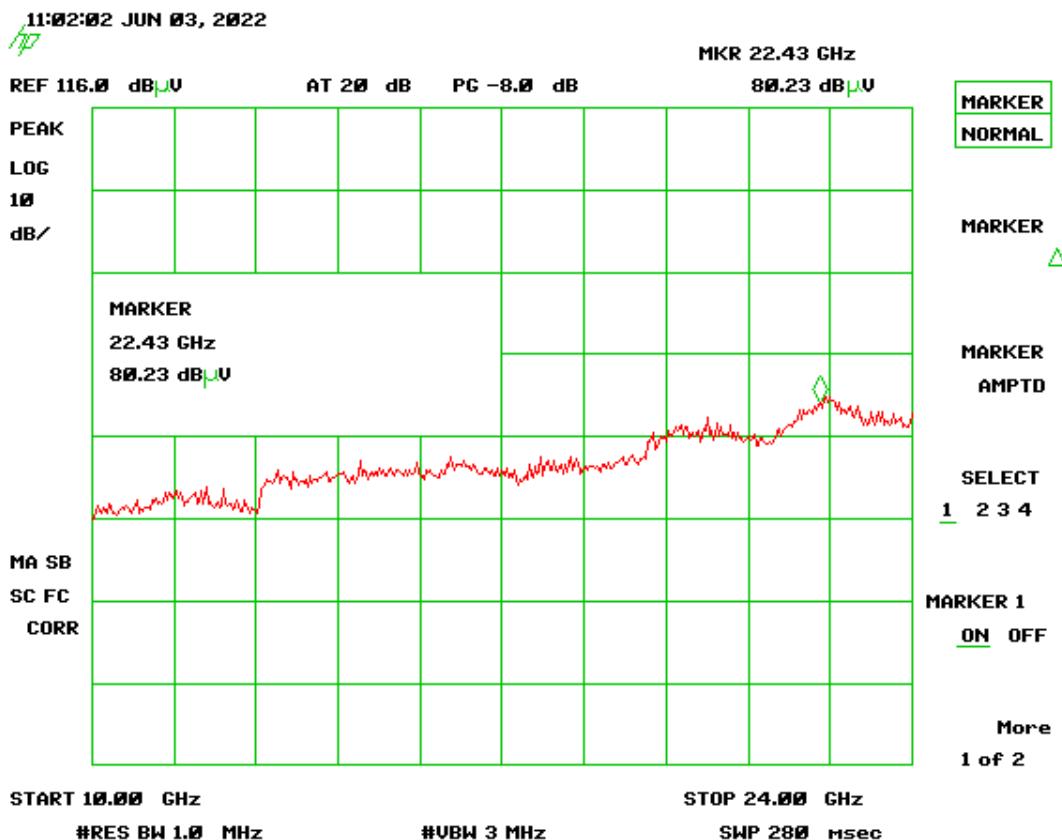


Figure 11. Channel 18, 10-24 GHz

Sample Calculation

Conversion from dB_uV to dBm: dBm = dB_uV - 107

Fundamental conversion (2.440 GHz): $112.82 - 107 = 5.82$ dBm

Spur measurement (22.43 GHz): $80.23 - 107 = -26.77$ dBm

| | | |
|-------------|-------------|----|
| Fundamental | 5.85 | dB |
| Spur | - (- 26.77) | dB |
| Difference | 32.62 | dB |
| Limit | -20.00 | dB |
| Margin | 12.62 | dB |

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AHQD-SENSOR4
 22-0125
 June 6, 2022
 Clean Hands Safe Hands, LLC
 Gen4 Sensor

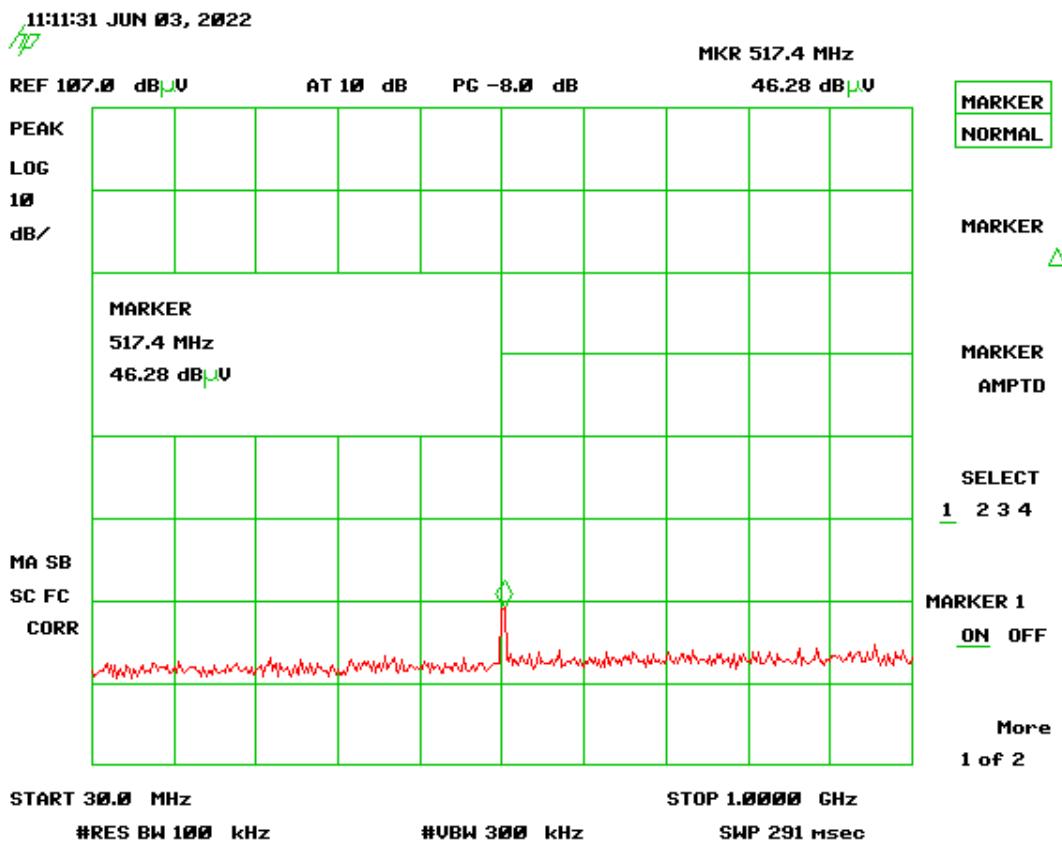


Figure 12. Channel 25, 30-1000 MHz

(Note: Intentional Emission seen for radio operating at 2475 MHz)

Sample Calculation

Conversion from dB_µV to dBm: dBm = dB_µV - 107

Fundamental conversion (2.475 GHz): $122.00 - 107 = 15$ dBm

Spur measurement (517.4 MHz): $46.28 - 107 = -60.72$ dBm

| | | |
|-------------|-------------|----|
| Fundamental | 15.00 | dB |
| Spur | - (- 60.72) | dB |
| Difference | 75.72 | dB |
| Limit | -20.00 | dB |
| Margin | 55.72 | dB |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

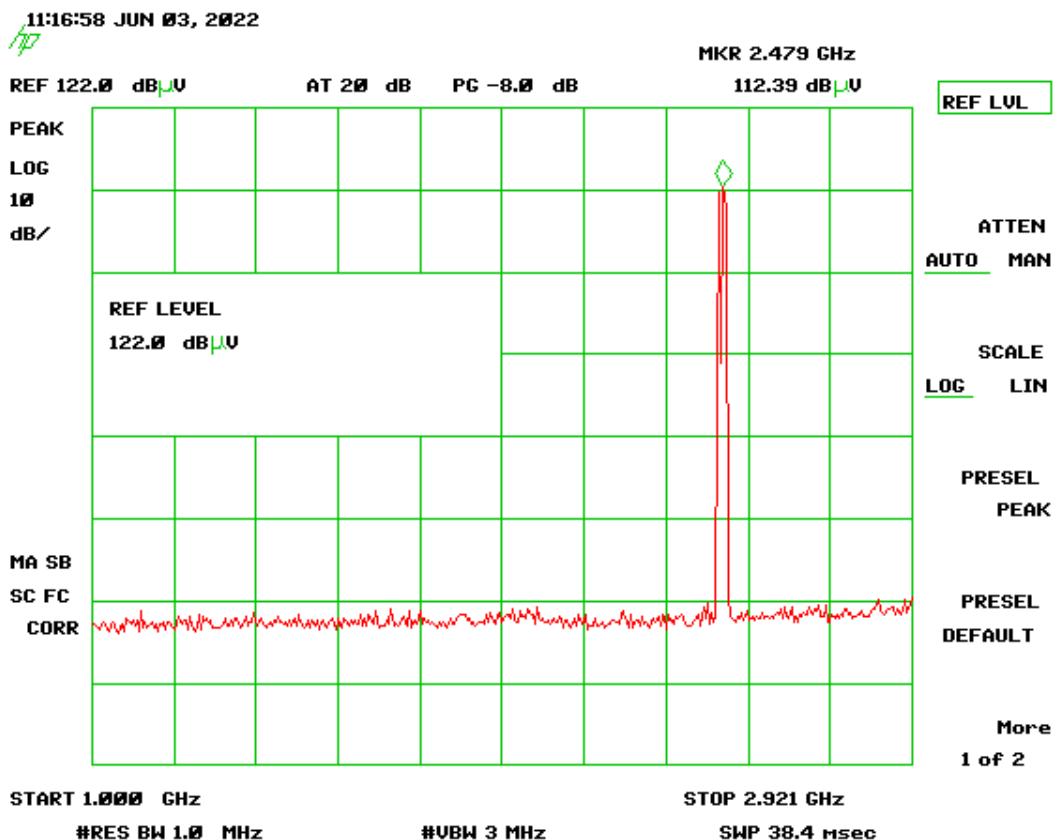


Figure 13. Channel 25, 1 – 2.921 GHz

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AHQD-SENSOR4
 22-0125
 June 6, 2022
 Clean Hands Safe Hands, LLC
 Gen4 Sensor

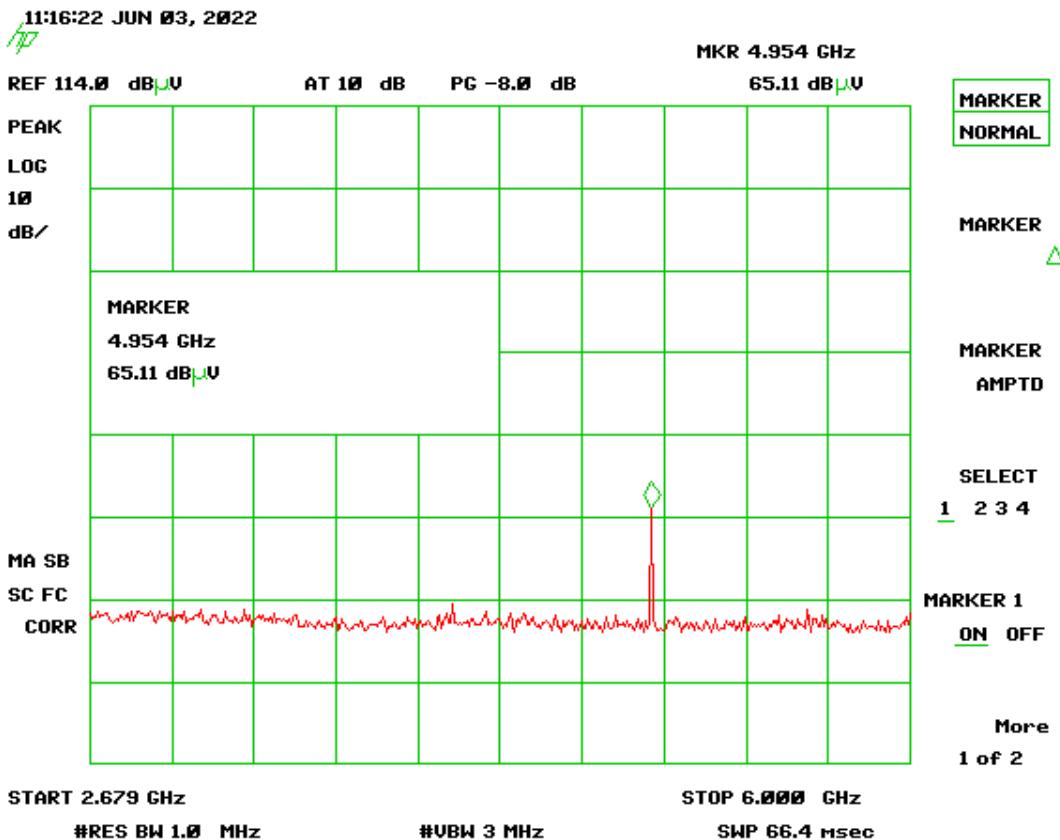


Figure 14. Channel 25, 2.679-6 GHz

Sample Calculation

Conversion from dB μ V to dBm: dBm = dB μ V - 107

Fundamental conversion (2.440 GHz): 122.00 - 107 = 15.00 dBm

Spur measurement (4.954 GHz): 65.11 - 107 = - 41.89 dBm

| | | |
|-------------|-------------|----|
| Fundamental | 15.00 | dB |
| Spur | - (- 41.89) | dB |
| Difference | 56.89 | dB |
| Limit | -20.00 | dB |
| Margin | 36.89 | dB |

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AHQD-SENSOR4
 22-0125
 June 6, 2022
 Clean Hands Safe Hands, LLC
 Gen4 Sensor

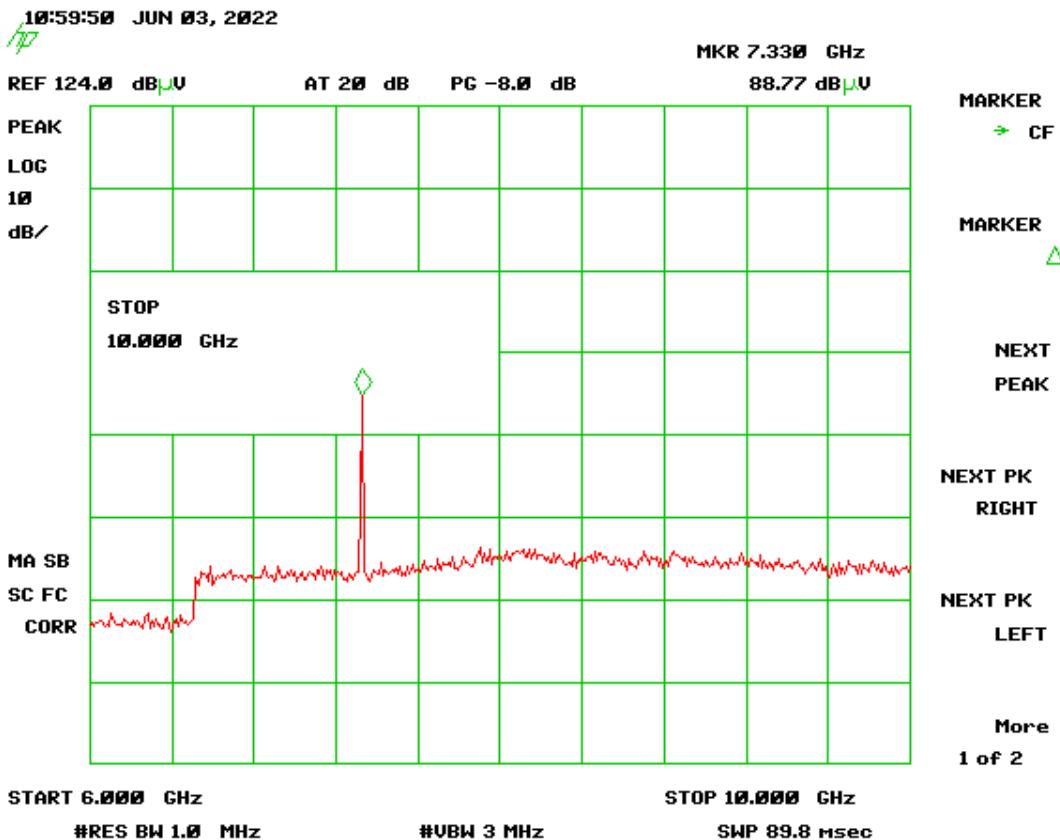


Figure 15. Channel 25, 6-10 GHz

Sample Calculation

Conversion from dB μ V to dBm: dBm = dB μ V - 107

Fundamental conversion (2.440 GHz): $122.00 - 107 = 15.00$ dBm

Spur measurement (7.33 GHz): $88.77 - 107 = -18.23$ dBm

| | | |
|-------------|-------------|----|
| Fundamental | 15.00 | dB |
| Spur | - (- 18.23) | dB |
| Difference | 33.23 | dB |
| Limit | -20.00 | dB |
| Margin | 13.23 | dB |

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AHQD-SENSOR4
 22-0125
 June 6, 2022
 Clean Hands Safe Hands, LLC
 Gen4 Sensor

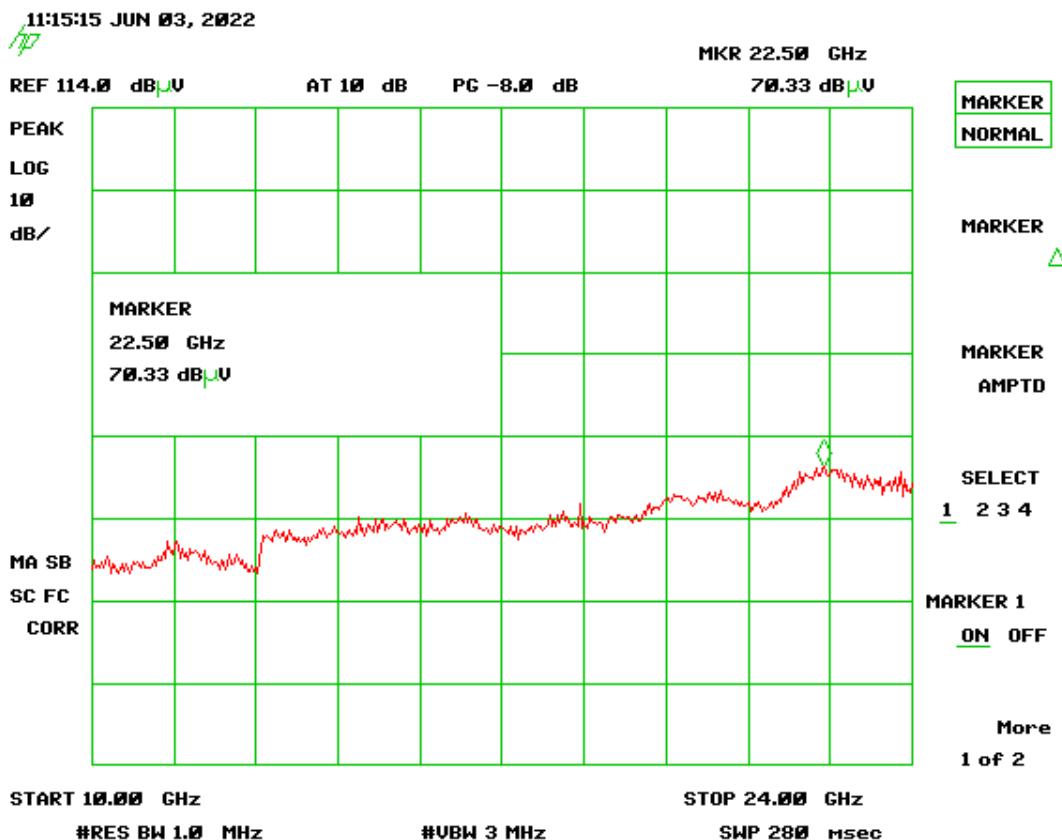


Figure 16. Channel 25, 10-24 GHz

Sample Calculation

Conversion from dB_µV to dBm: dBm = dB_µV - 107

Fundamental conversion (2.440 GHz): $122.00 - 107 = 15.00$ dBm

Spur measurement (22.5 GHz): $70.33 - 107 = -36.67$ dBm

| | | |
|-------------|-------------|----|
| Fundamental | 15.00 | dB |
| Spur | - (- 36.67) | dB |
| Difference | 51.67 | dB |
| Limit | -20.00 | dB |
| Margin | 31.67 | dB |

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d))

On the test site, the EUT was placed on top of a non-conductive table, 80 cm above the floor for measurements below 1 GHz and 150 cm above the floor for measurements > 1 GHz. The EUT was also evaluated in three orthogonal positions to determine the worst-case position. The front of the EUT faced the measurement antenna located 3 meters away. Each signal measured was maximized by raising and lowering the receive antenna between 1 and 4 meters in height while monitoring the ever-changing spectrum analyzer display (with channel A in the Clear-Write mode and channel B in the Max-Hold mode) for the largest signal visible. That exact antenna height where the signal was maximized was recorded for reproducibility purposes. Also, the EUT was rotated about its Y-axis while monitoring the Spectrum Analyzer display for maximum. The EUT azimuth was recorded for reproducibility purposes. The EUT was measured when both maxima were simultaneously satisfied.

For radiated measurements, the EUT was set into a continuous transmission mode. Below 1 GHz, the RBW of the measuring instrument was set equal to 120 kHz. Peak measurements above 1 GHz were measured using a RBW = 1 MHz, with a VBW \geq RBW. The results of peak radiated spurious emissions falling within restricted bands are given in Table 6 below.

For Average measurements above 1 GHz, the emissions were measured using RBW = 1 MHz and VBW = 10 Hz or the duty cycle correction factor was applied to the Peak recorded value.

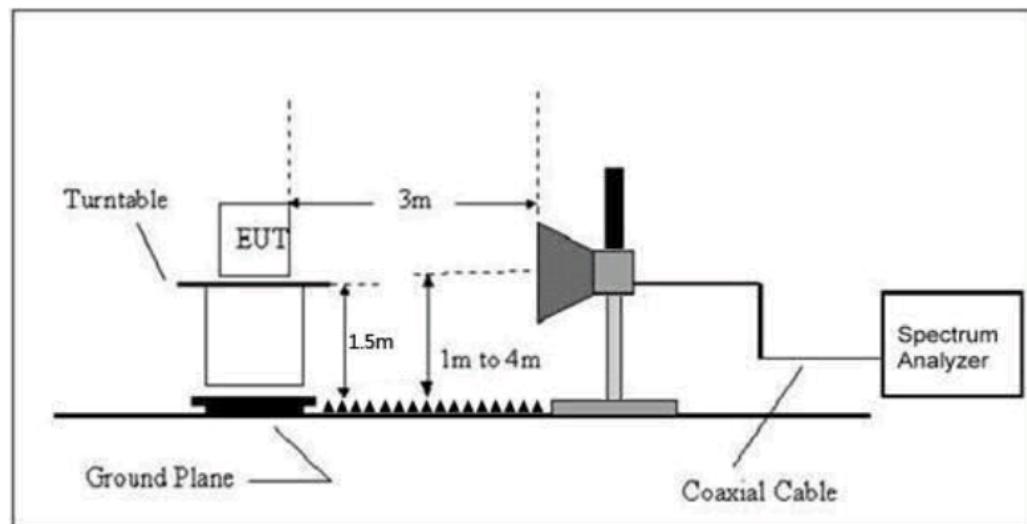


Figure 17. Above 1 GHz Radiated Emissions Test Setup

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AHQD-SENSOR4
 22-0125
 June 6, 2022
 Clean Hands Safe Hands, LLC
 Gen4 Sensor

Table 5. Radiated Fundamental & Harmonic Emissions - AVERAGE

| Test: FCC Part 15,247(d) | | | | | | | | |
|--------------------------|------------------|-------------------|-----------------|----------------------------|-----------------|-------------------------|-------------|------------|
| Frequency (MHz) | Test Data (dBuV) | Additional Factor | AF+CL-PA (dB/m) | Corrected Results (dBuV/m) | Limits (dBuV/m) | Distance / Polarization | Margin (dB) | Detector |
| Low Channel – AVG | | | | | | | | |
| 2404.00 | 104.5 | 0.00 | -8.00 | 96.50 | -- | 3.0m./HORZ | -- | PK |
| *4808.00 | 47.17 | 0.00 | -3.99 | 43.18 | 54.0 | 3.0m./HORZ | 10.8 | AVG |
| *7216.00 | 57.16 | -9.50 | 3.74 | 51.40 | 54.0 | 1.0m./HORZ | 2.6 | AVG |
| Mid Channel – AVG | | | | | | | | |
| 2440.00 | 108.00 | 0.00 | -8.04 | 99.96 | -- | 3.0m./HORZ | -- | PK |
| *4878.00 | 53.73 | 0.00 | -3.87 | 49.86 | 54.0 | 3.0m./HORZ | 4.1 | AVG |
| *7321.00 | 54.83 | -9.50 | 5.00 | 50.33 | 54.0 | 1.0m./HORZ | 3.7 | AVG |
| High Channel- AVG | | | | | | | | |
| 2475.00 | 104.30 | 0.00 | -7.75 | 96.55 | -- | 3.0m./HORZ | -- | PK |
| *4950.00 | 51.98 | 0.00 | -3.99 | 47.99 | 54.0 | 3.0m./HORZ | 6.0 | PK |
| *7426.00 | 55.03 | -9.50 | 3.62 | 49.15 | 54.0 | 1.0m./HORZ | 4.8 | AVG |

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 15.247.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. The EUT was placed in three orthogonal positions, tested while broadcasting from each antenna, and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.
4. Measurement at 1 meters corrected using inverse extrapolation factor of -9.5 dB to correct the value for 3 meter.

Sample Calculation at 2404.00 MHz:

| | | |
|--|-------|--------|
| Magnitude of Measured Frequency | 104.5 | dBuV |
| +Additional Factor | 0.00 | dB |
| +Antenna Factor + Cable Loss+ Amplifier Gain | -8.00 | dB/m |
| Corrected Result | 96.50 | dBuV/m |

Test Date: June 1, 2022

Tested By

Signature:



Name: Gabriel Medina

US Tech Test Report:
 FCC ID:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification
 2AHQD-SENSOR4
 22-0125
 June 6, 2022
 Clean Hands Safe Hands, LLC
 Gen4 Sensor

Table 6. Radiated Fundamental & Harmonic Emissions - PEAK

| Test: FCC Part 15,247(d) | | | | | | | | |
|----------------------------|------------------|-------------------|-----------------|----------------------------|-----------------|-------------------------|-------------|-----------|
| Frequency (MHz) | Test Data (dBuV) | Additional Factor | AF+CL-PA (dB/m) | Corrected Results (dBuV/m) | Limits (dBuV/m) | Distance / Polarization | Margin (dB) | Detector |
| Low Channel - PEAK | | | | | | | | |
| 2404.00 | 104.5 | 0.00 | -8.00 | 96.50 | -- | 3.0m./HORZ | -- | PK |
| *4808.00 | 58.54 | 0.00 | -3.99 | 54.55 | 74.0 | 3.0m./HORZ | 19.4 | PK |
| *7216.00 | 68.91 | -9.50 | 3.74 | 63.15 | 74.0 | 1.0m./HORZ | 10.9 | PK |
| Mid Channel - PEAK | | | | | | | | |
| 2440.00 | 108.00 | 0.00 | -8.04 | 99.96 | -- | 3.0m./HORZ | -- | PK |
| *4878.00 | 64.82 | 0.00 | -3.87 | 60.95 | 74.0 | 3.0m./HORZ | 13.0 | PK |
| *7321.00 | 63.51 | -9.50 | 5.00 | 59.01 | 74.0 | 1.0m./HORZ | 15.0 | PK |
| High Channel - PEAK | | | | | | | | |
| 2475.00 | 104.30 | 0.00 | -7.75 | 96.55 | -- | 3.0m./HORZ | -- | PK |
| *4950.00 | 51.98 | 0.00 | -3.99 | 47.99 | 74.0 | 3.0m./HORZ | 26.0 | PK |
| *7426.00 | 70.63 | -9.50 | 3.62 | 64.75 | 74.0 | 1.0m./HORZ | 9.2 | PK |

1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 15.247.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. The EUT was placed in three orthogonal positions, tested while broadcasting from each antenna, and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.
4. Measurement at 1 meters corrected using inverse extrapolation factor of -9.5 dB to correct the value for 3 meter.

Sample Calculation at 2404.00 MHz:

| | | |
|--|-------|--------|
| Magnitude of Measured Frequency | 104.5 | dBuV |
| +Additional Factor | 0.00 | dB |
| +Antenna Factor + Cable Loss+ Amplifier Gain | -8.00 | dB/m |
| Corrected Result | 96.50 | dBuV/m |

Test Date: June 1, 2022

Tested By

Signature:



Name: Gabriel Medina

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.11 Band Edge Measurements (CFR 15.247(d))

Band Edge measurements are made following the guidelines in ANSI C63.10-2013 Clause 6.10 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Restricted band and band edge test is performed as radiated measurements. The test instrument used for testing has both Peak and Average detection. In consideration of Clause 5.8 of ANSI C63.10-2013, the EUT antenna is connected to its antenna port during testing. The EUT was set to its highest rated output power level during testing. The results are collected and presented below.

Radiated Emissions Test Setup as presented in Figure 17 above was used to perform these measurements.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

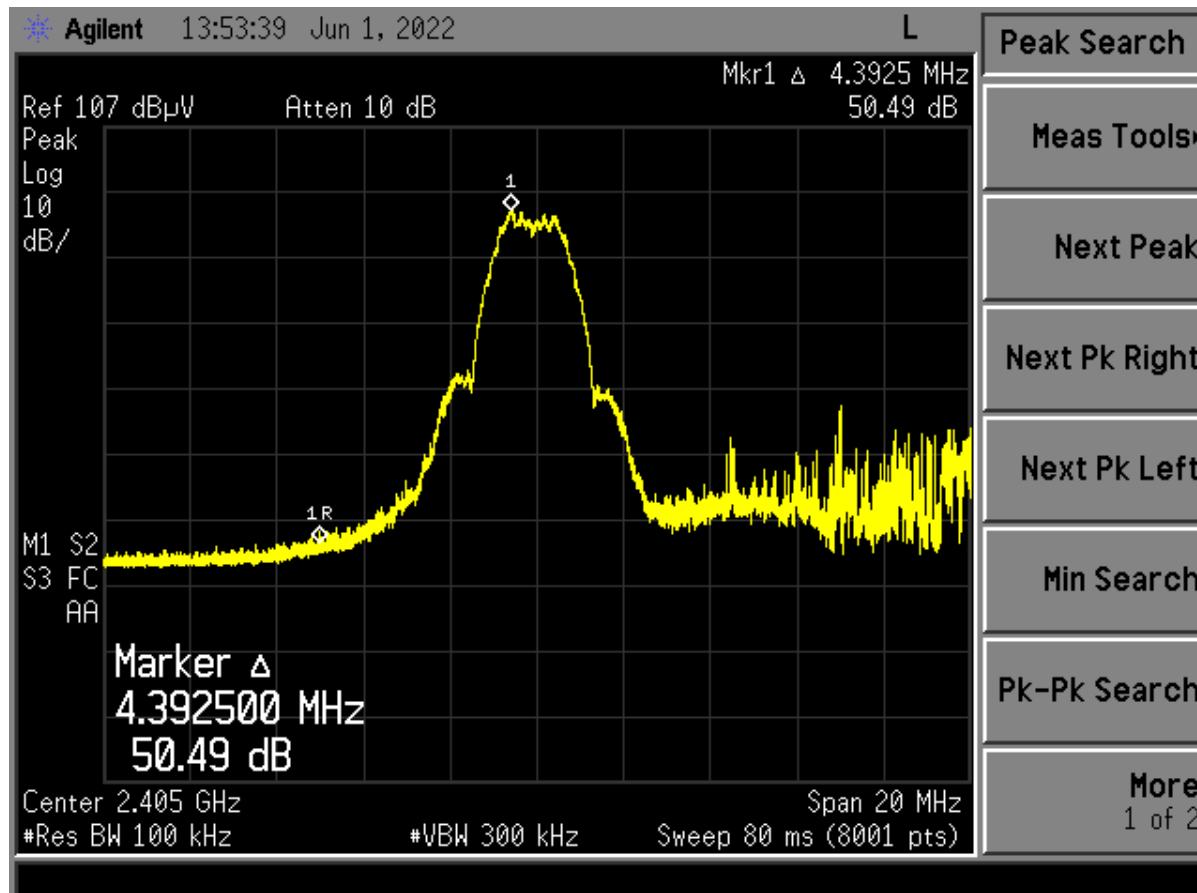


Figure 18. Band Edge Compliance – Low Channel Delta – Peak (Horizontal)

Lower band edge must be 20 dB below the fundamental. This requirement is met.

| | | |
|------------------|-------|----|
| Measured Result | 50.49 | dB |
| Band Edge Limit | 20.00 | dB |
| Band Edge Margin | 30.49 | dB |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

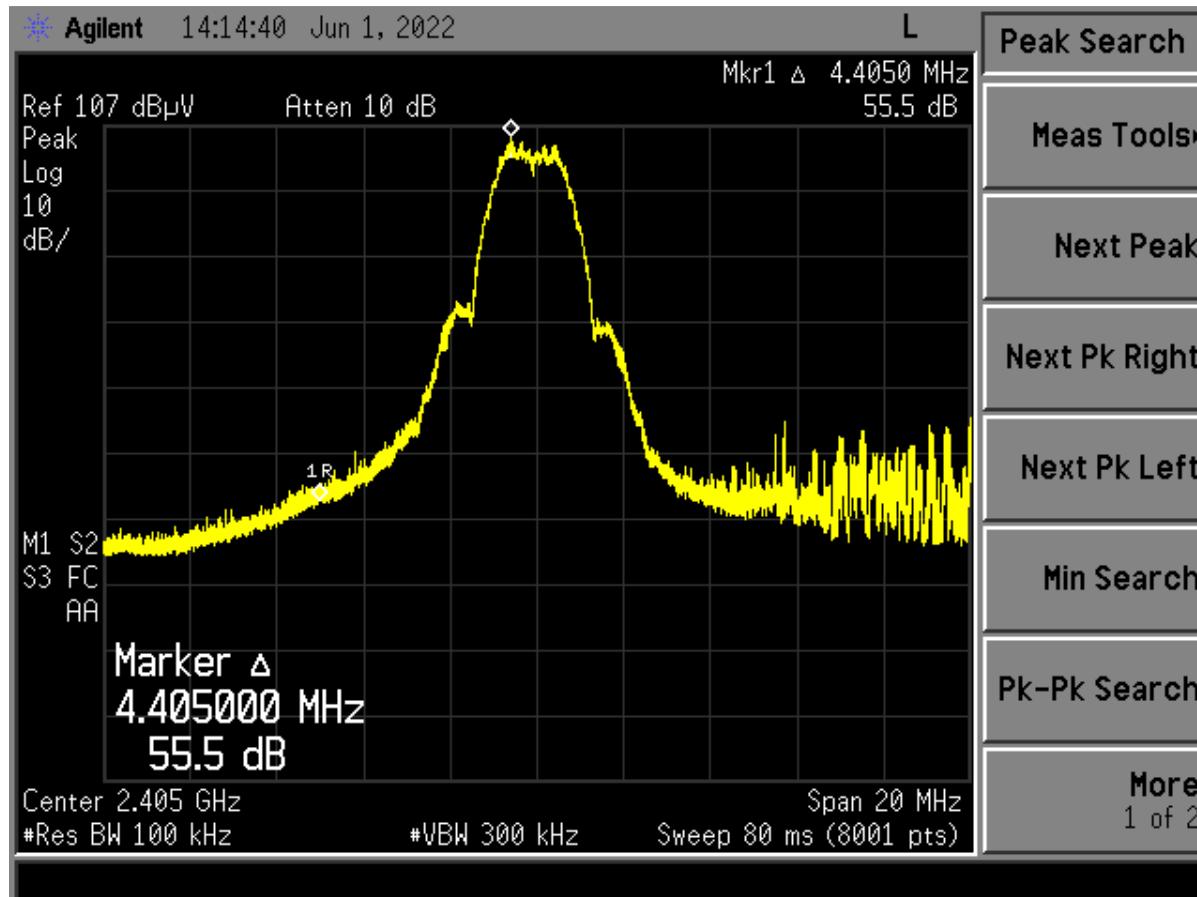


Figure 19. Band Edge Compliance – Low Channel Delta – Peak (Vertical)

Lower band edge must be 20 dB below the fundamental. This requirement is met.

| | | |
|------------------|-------|----|
| Measured Result | 55.50 | dB |
| Band Edge Limit | 20.00 | dB |
| Band Edge Margin | 35.50 | dB |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

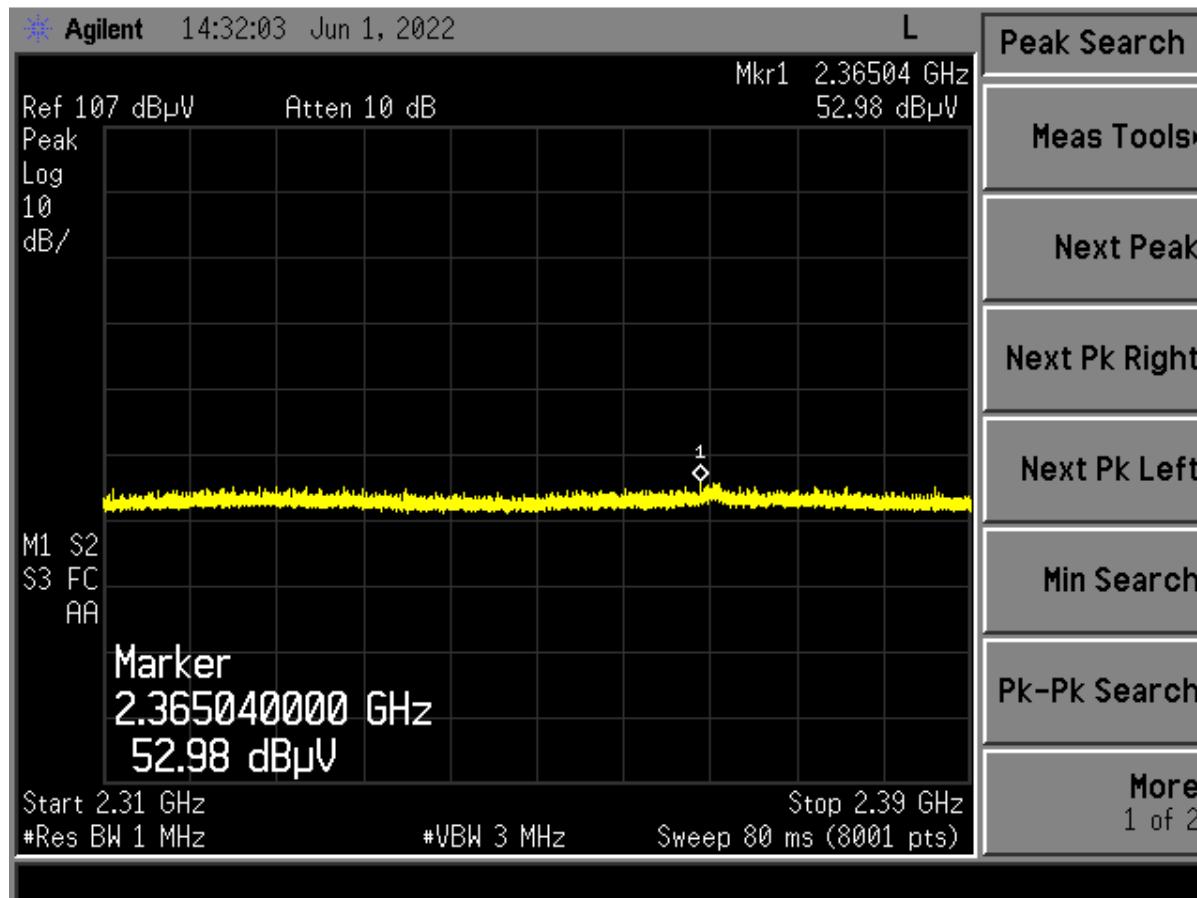


Figure 20. Low Channel Restricted Band – Peak (Horizontal)

| Frequency (MHz) | Test Data (dB μ V) | AF+CA-AMP+DC (dB/m) | Results (dB μ V/m) | Limits (dB μ V/m) | Distance / Polarization | Margin (dB) | Detector PK/QP/AVG |
|-----------------|------------------------|---------------------|------------------------|-----------------------|-------------------------|-------------|--------------------|
| 2365.04 | 52.98 | -8.36 | 44.62 | 54.0 | 3.0m./HORZ | 9.4 | PK |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

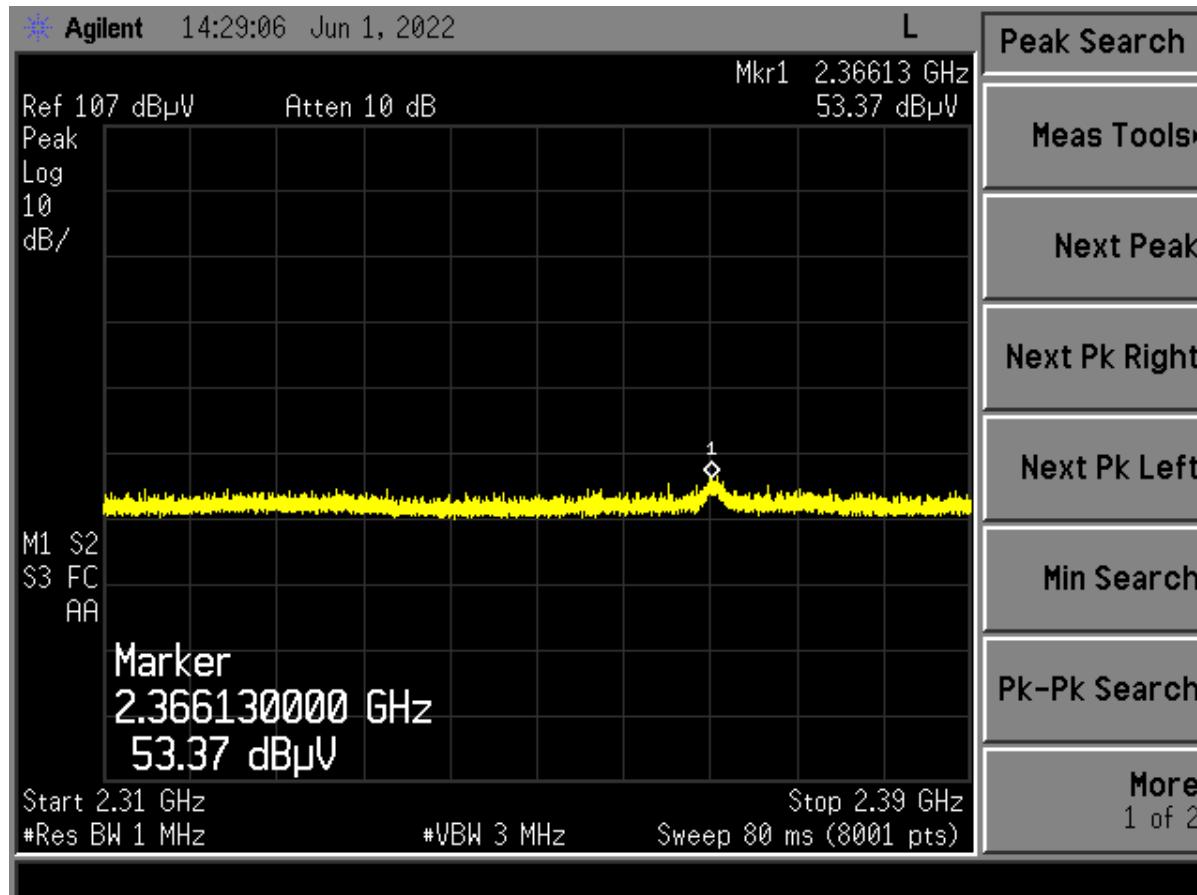


Figure 21. Low Channel Restricted Band – Peak (Vertical)

| Frequency (MHz) | Test Data (dB μ V) | AF+CA-AMP+DC (dB/m) | Results (dB μ V/m) | Limits (dB μ V/m) | Distance / Polarization | Margin (dB) | Detector PK/QP/AVG |
|-----------------|------------------------|---------------------|------------------------|-----------------------|-------------------------|-------------|--------------------|
| 2366.13 | 53.37 | -8.23 | 45.14 | 54.0 | 3.0m./VERT | 8.9 | PK |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

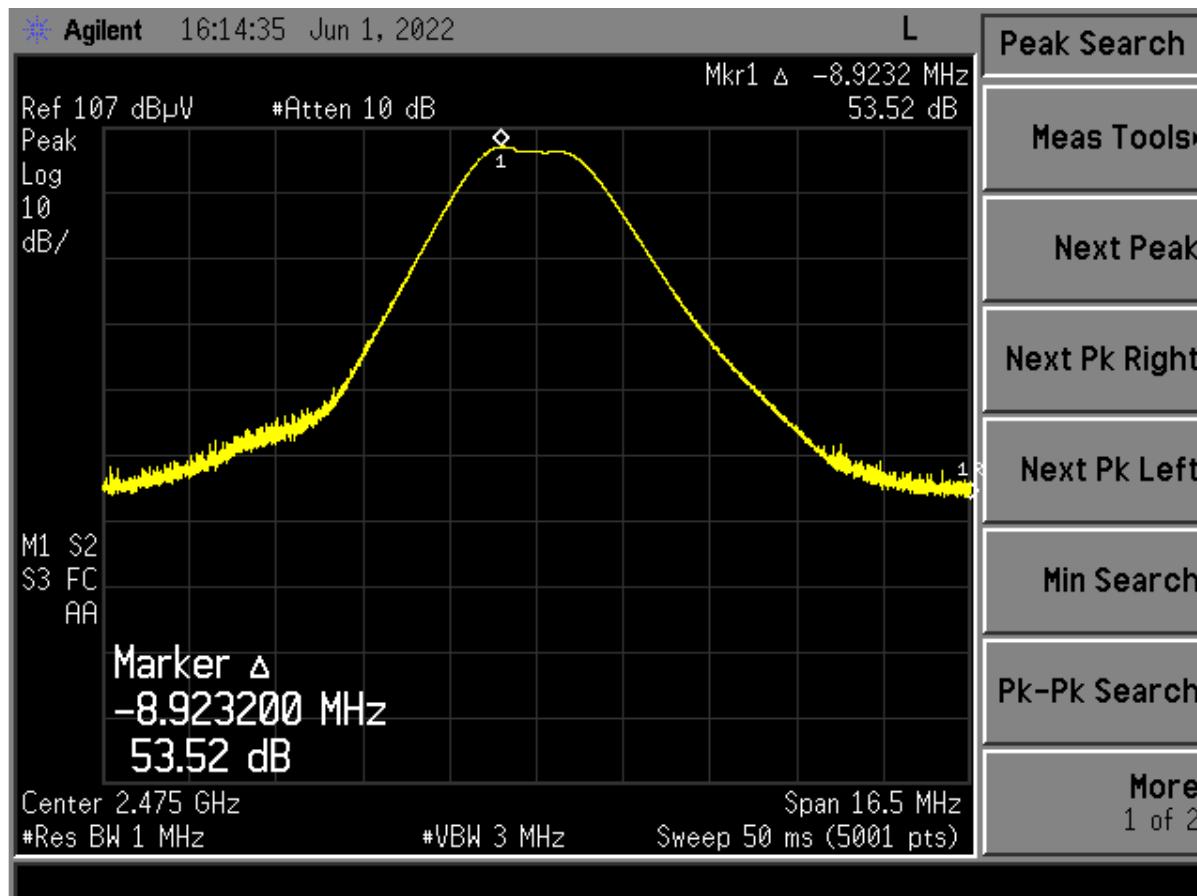


Figure 22. Band Edge Compliance – High Channel Delta – Peak (Horizontal)

Higher band edge must be 20 dB below the fundamental. This requirement is met.

| | | |
|------------------|-------|----|
| Measured Result | 53.52 | dB |
| Band Edge Limit | 20.00 | dB |
| Band Edge Margin | 33.52 | dB |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

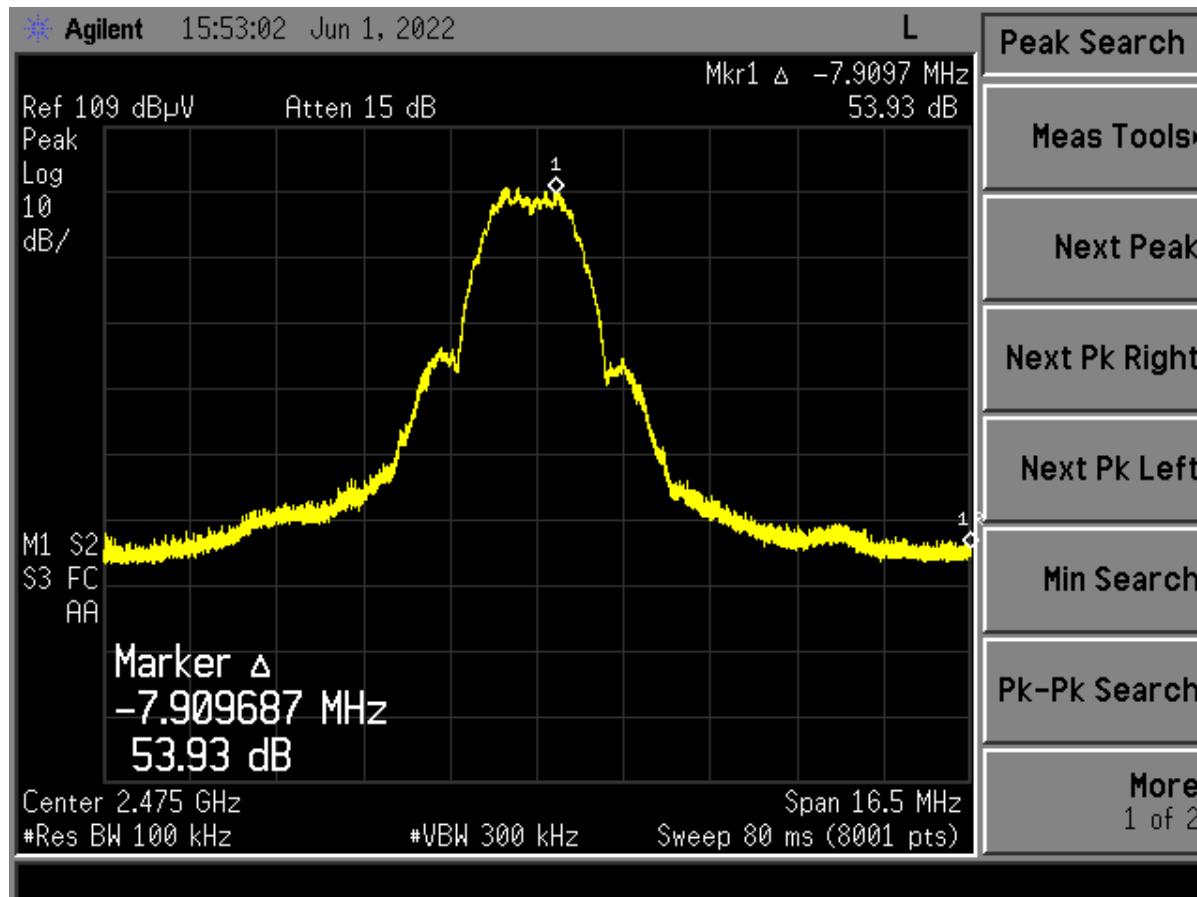


Figure 23. Band Edge Compliance – High Channel Delta – Peak (Vertical)

Higher band edge must be 20 dB below the fundamental. This requirement is met.

| | | |
|------------------------|-------|----|
| Measured Result | 53.93 | dB |
| <u>Band Edge Limit</u> | 20.00 | dB |
| Band Edge Margin | 33.93 | dB |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

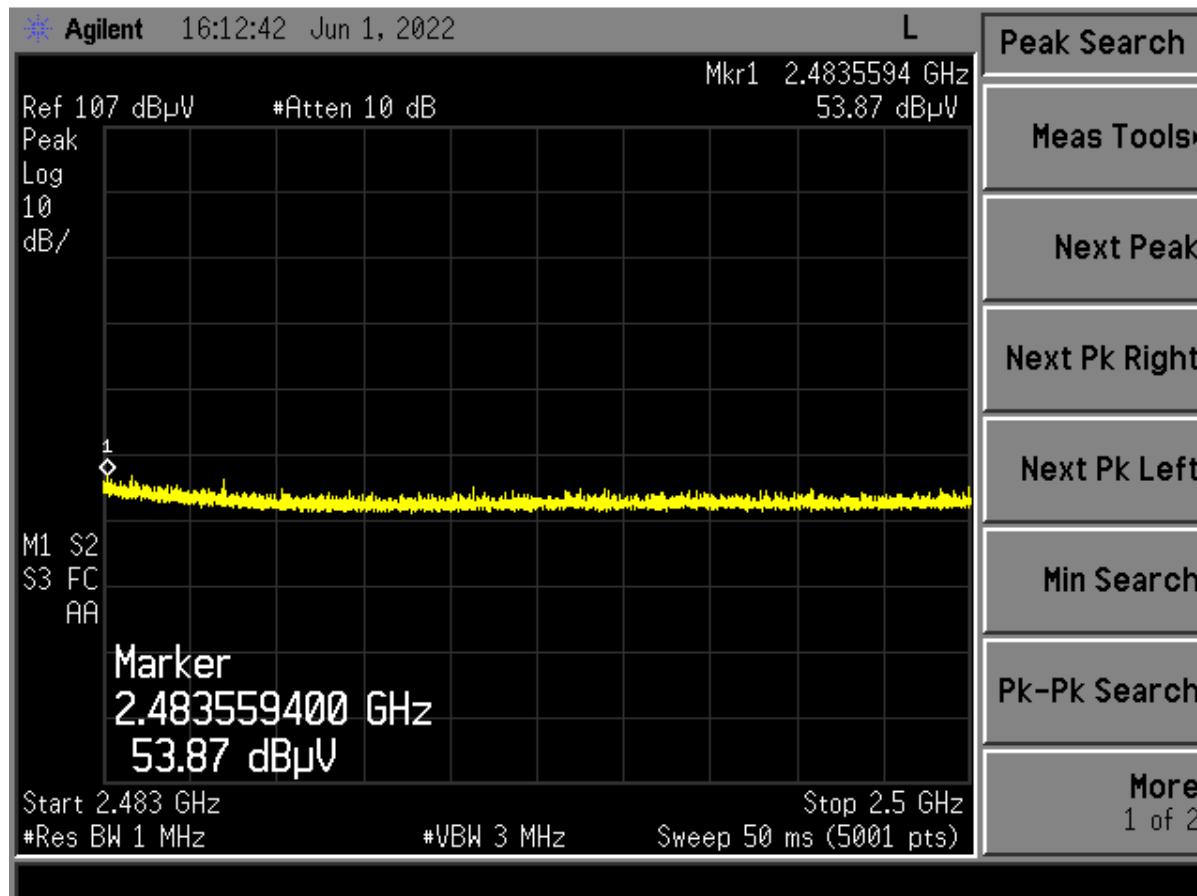


Figure 24. High Channel Restricted Band – Peak (Horizontal)

| Frequency (MHz) | Test Data (dB μ V) | AF+CA-AMP+DC (dB/m) | Results (dB μ V/m) | Limits (dB μ V/m) | Distance / Polarization | Margin (dB) | Detector PK/QP/AVG |
|-----------------|------------------------|---------------------|------------------------|-----------------------|-------------------------|-------------|--------------------|
| 2483.55 | 53.87 | -7.75 | 46.12 | 54.0 | 3.0m./HORZ | 7.9 | PK |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

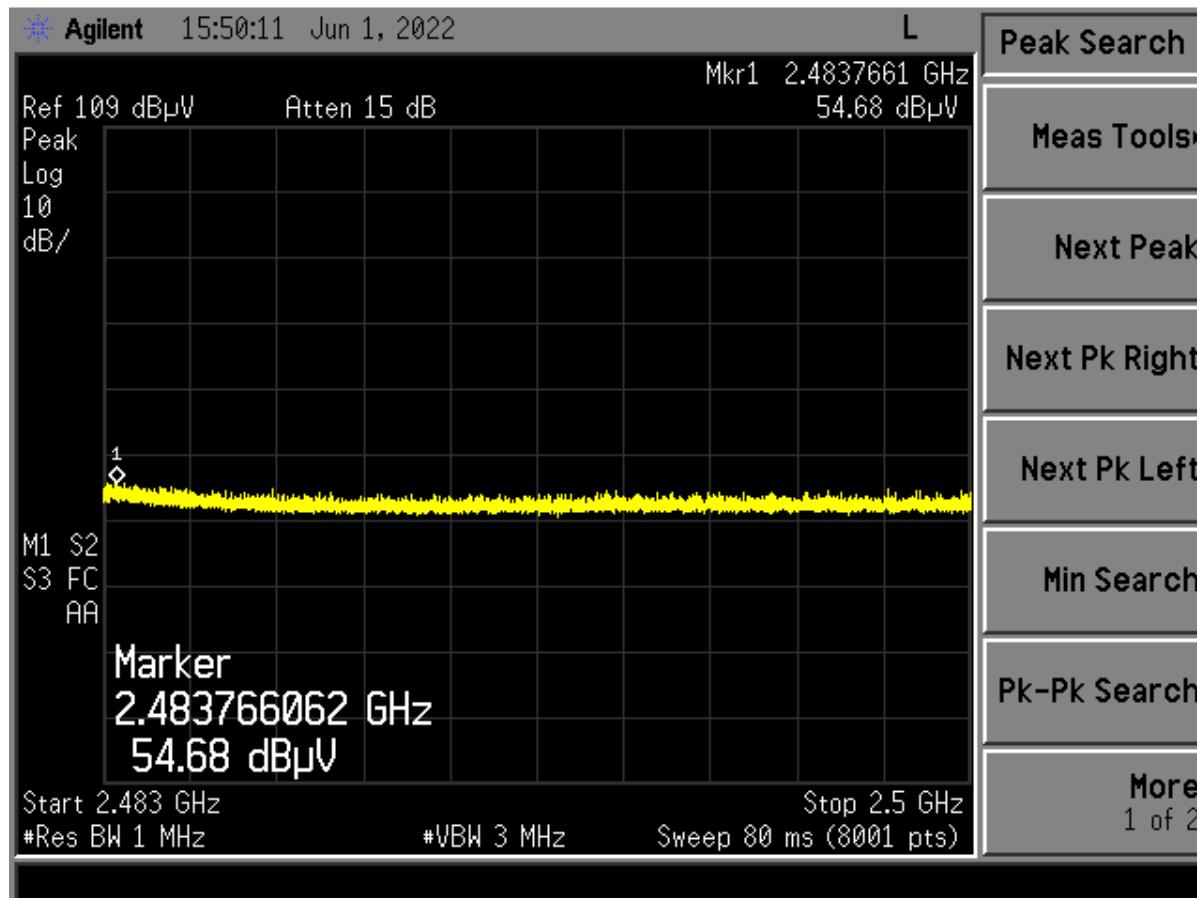


Figure 25. High Channel Restricted Band – Peak (Vertical)

| Frequency (MHz) | Test Data (dB μ V) | AF+CA-AMP+DC (dB/m) | Results (dB μ V/m) | Limits (dB μ V/m) | Distance / Polarization | Margin (dB) | Detector PK/QP/AVG |
|-----------------|------------------------|---------------------|------------------------|-----------------------|-------------------------|-------------|--------------------|
| 2483.79 | 54.68 | -7.81 | 46.87 | 54.0 | 3.0m./VERT | 7.1 | PK |

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.12 Six (6) dB Bandwidth (CFR 15.247(a)(2))

The EUT antenna port was connected to a spectrum analyzer having a 50Ω input impedance. Measurements were performed per ANSI C63.10-2013, clause 11.8. The RBW was set to 100 kHz and the $VBW \geq RBW$. The results of this test are given in the table below and figures below.



Figure 26. Block Diagram Conducted Radio Measurement

Table 7. Six (6) dB Bandwidth

| Frequency (MHz) | 6 dB Bandwidth (MHz) | Minimum FCC Bandwidth (MHz) |
|-----------------|----------------------|-----------------------------|
| 2405 | 1.70 | 0.5 |
| 2440 | 1.68 | 0.5 |
| 2475 | 1.68 | 0.5 |

Test Date: June 3 2022

Tested By

Signature: 

Name: Gabriel Medina

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

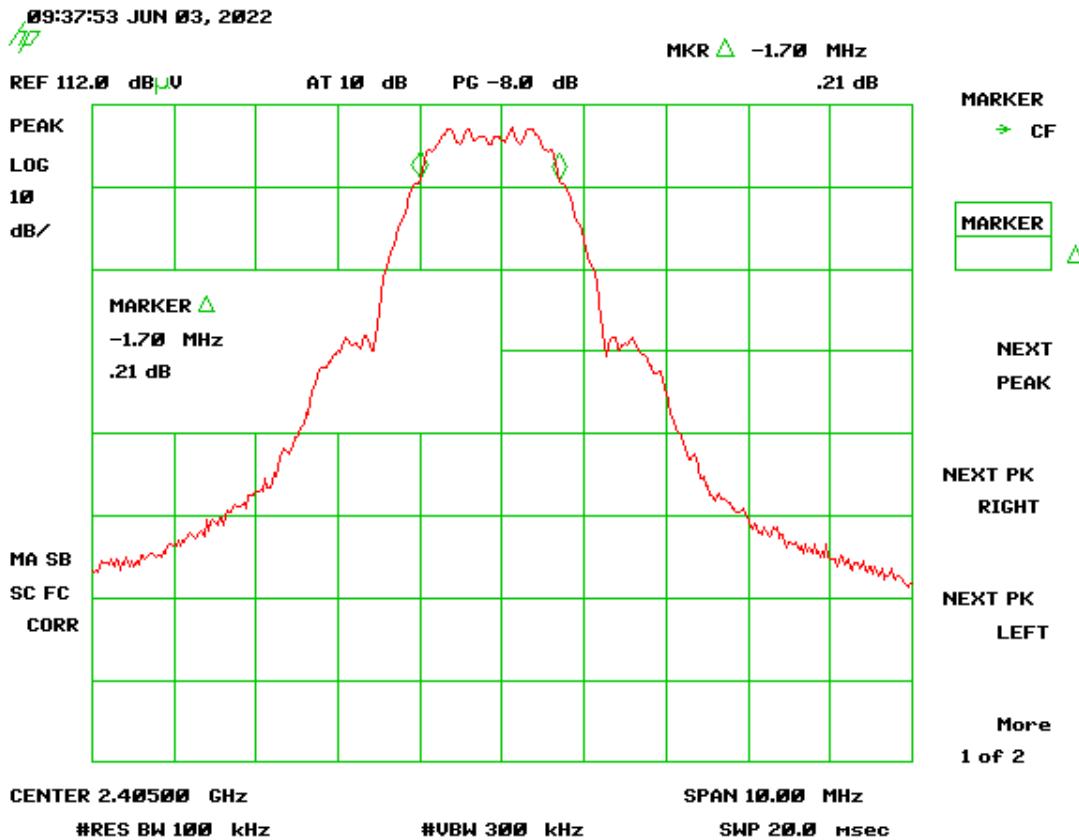


Figure 27. 6 dB Bandwidth Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

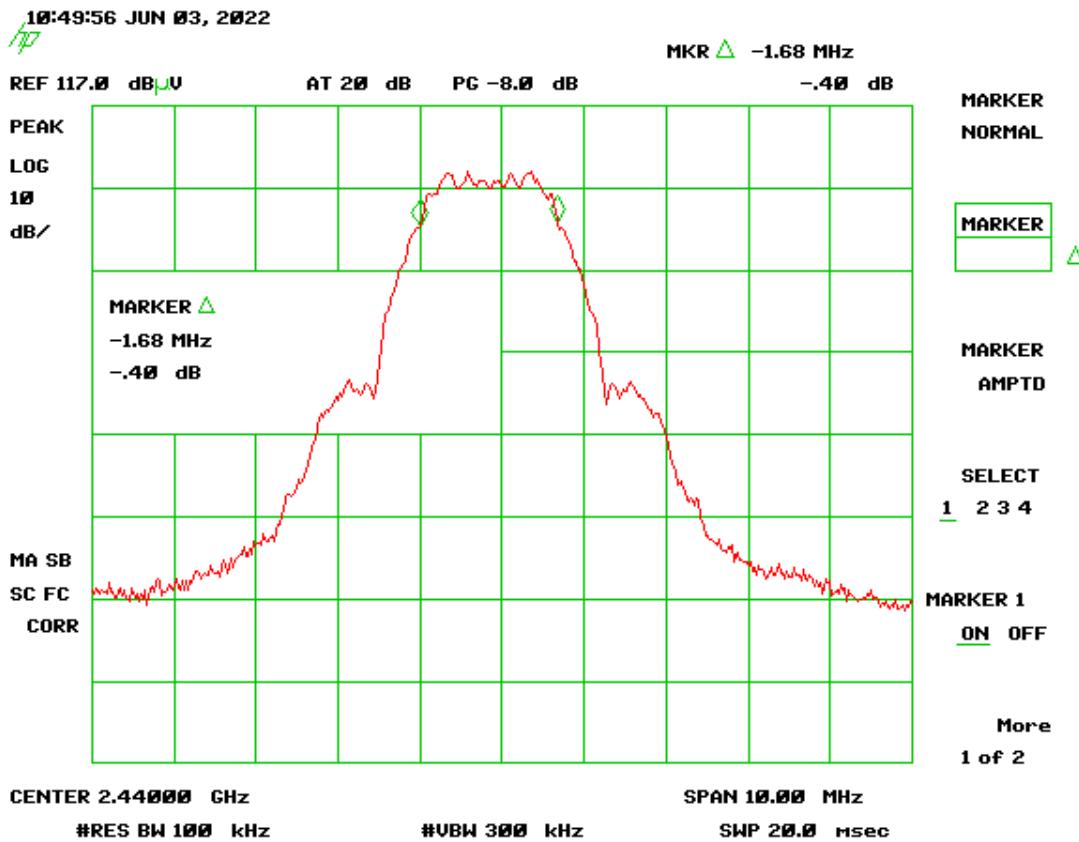


Figure 28. 6 dB Bandwidth Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

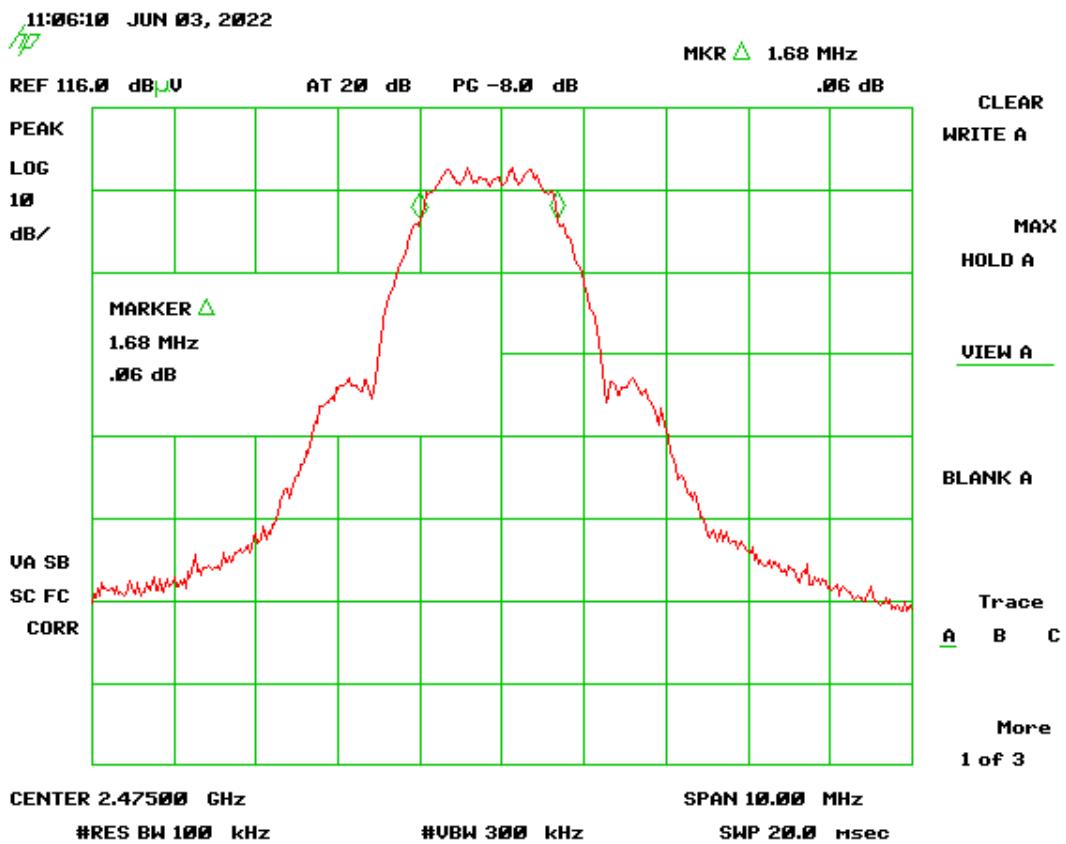


Figure 29. 6 dB Bandwidth High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.13 Occupied Bandwidth, (99% bandwidth)

The EUT antenna port was connected to a spectrum analyzer having a 50Ω input impedance. Measurements were performed similar to the method of FCC, KDB Publication No. 558074 v03r05 for a bandwidth of 20 dB. The RBW was set to approximately 1/100 of the manufacturers claimed RBW and with the VBW \geq RBW. The results of this test are given in Table 7 and presented in the figures herein.

Conducted Radio measurement test method was used to collect this test data.

Table 8. 99% Occupied Bandwidth

| Frequency (MHz) | 99% Occupied Bandwidth (MHz) |
|--------------------|---------------------------------|
| 2405 | 2.212 |
| 2440 | 2.175 |
| 2475 | 2.190 |

Test Date: June 3 2022

Tested By

Signature:



Name: Gabriel Medina

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

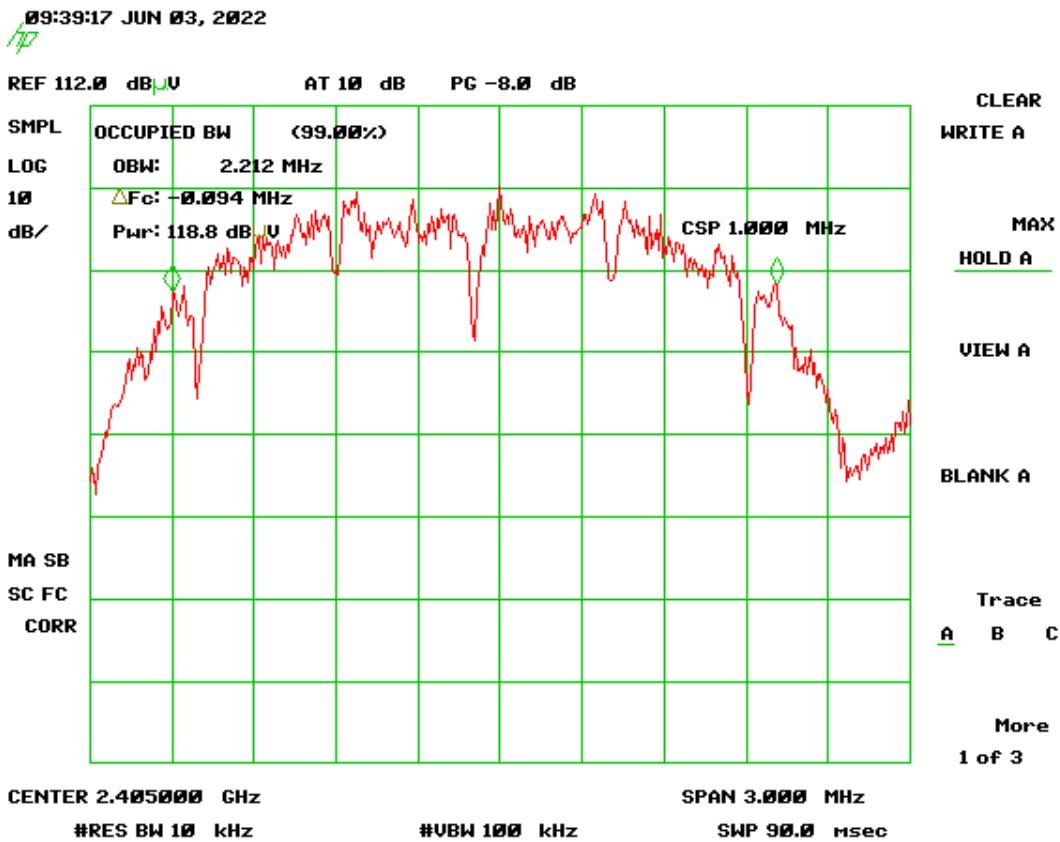


Figure 30. 99% Occupied Bandwidth Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

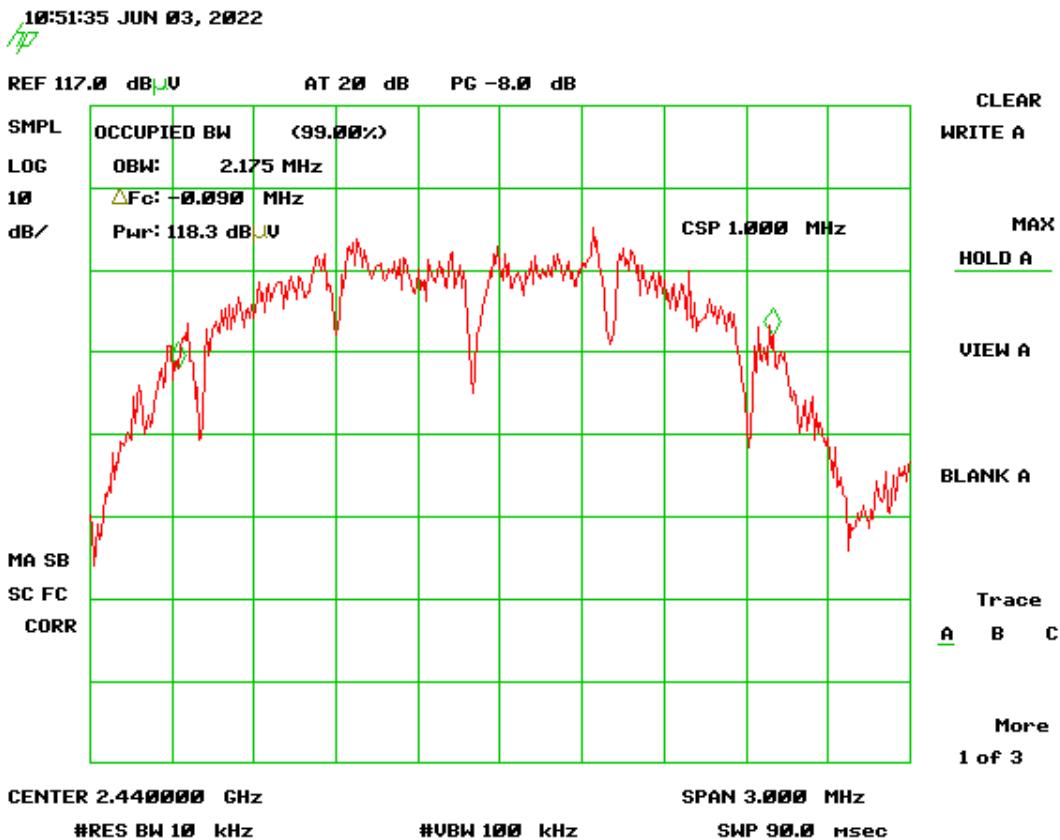


Figure 31. 99% Occupied Bandwidth Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

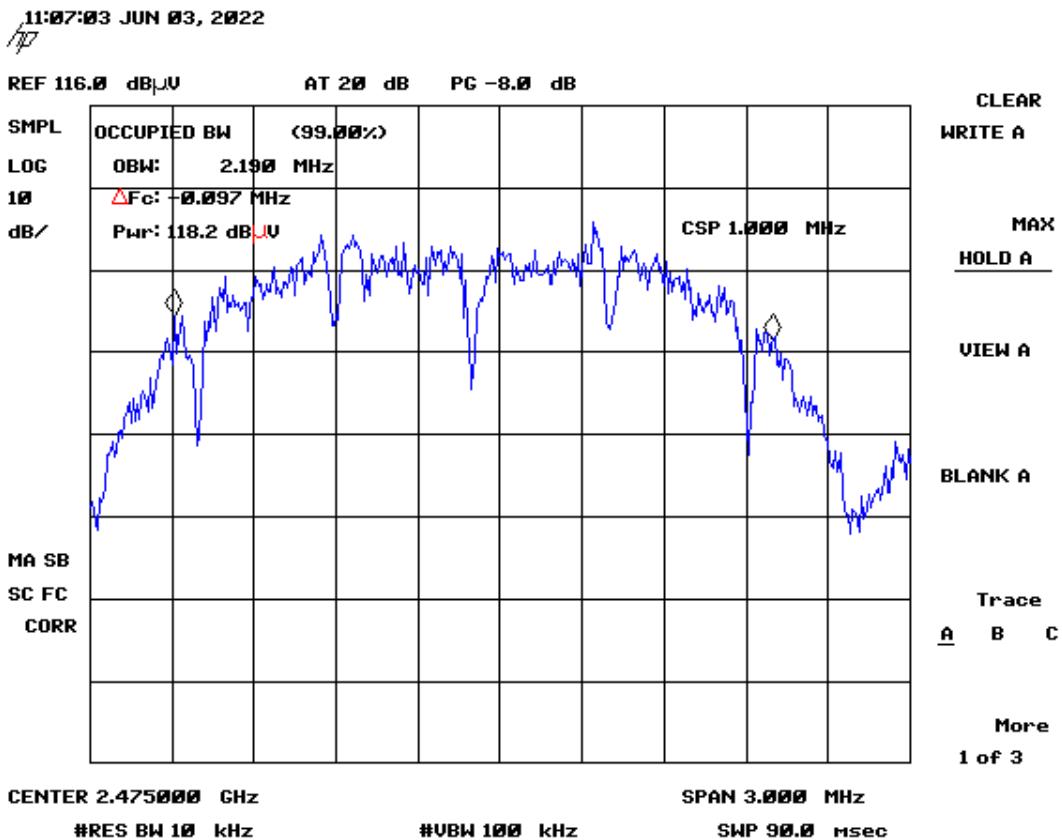


Figure 32. 99% Occupied Bandwidth High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.14 Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))

The transmitter was programmed to operate at a maximum output power across the bandwidth. For this test the output power of the radio was set to the maximum data rate of 250 kBPS.

Peak power within the band 2400 MHz to 2483.5 MHz was measured per ANSI C63.10-2013 as an Antenna Conducted test with a spectrum analyzer by connecting the spectrum analyzer directly, via a short RF cable, and attenuators to the antenna output terminals on the EUT. The spectrum analyzer was set to a RBW of 1 MHz, and the VBW \geq RBW. The integration method was used. Peak antenna conducted output power is tabulated in the table below.

Conducted Radio measurement test method was used to collect this test data.

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

Table 9. Peak Antenna Conducted Output Power per Part 15.247 (b)(3)

| Frequency of Fundamental (MHz) | Measured dBm | Converted Data (mW) | FCC Limit (mW Maximum) |
|--------------------------------|--------------|---------------------|------------------------|
| 2404 | 6.20 | 4.16 | 1000 |
| 2440 | 5.77 | 3.77 | 1000 |
| 2475 | 5.64 | 3.66 | 1000 |

Test Date: June 3 2022

Tested By
Signature:



Name: Gabriel Medina

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

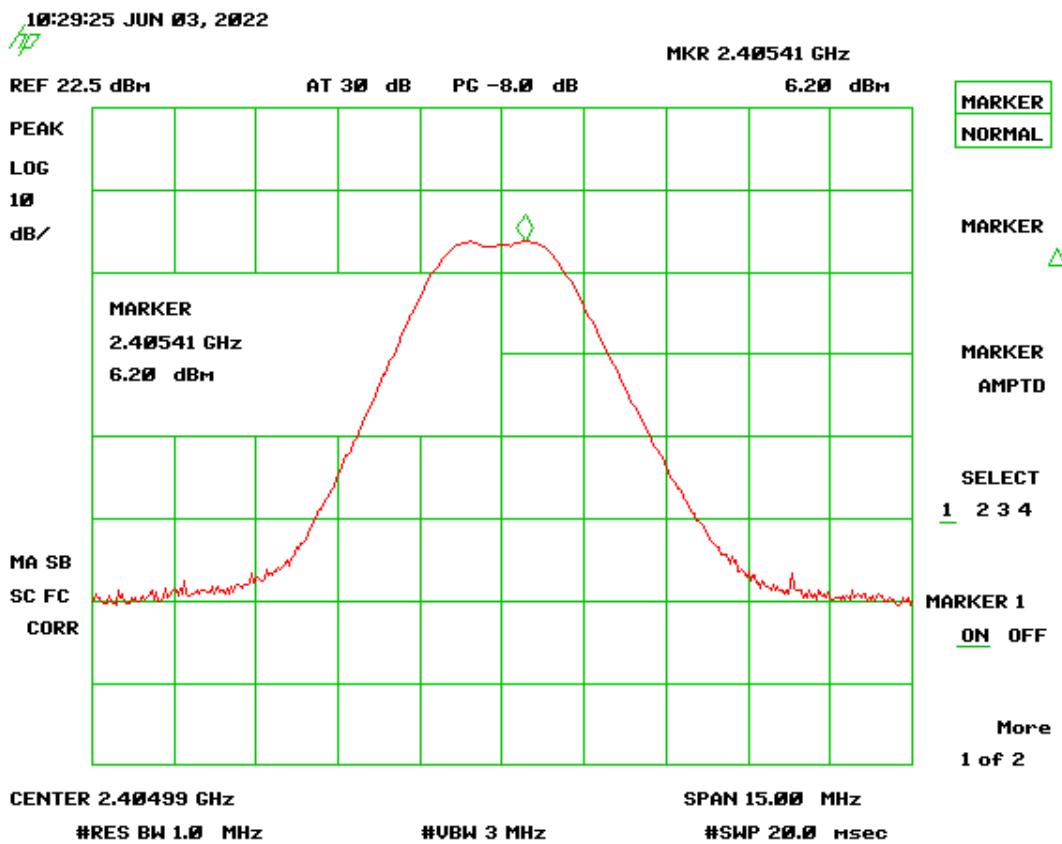


Figure 33. Peak Antenna Conducted Output Power, Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

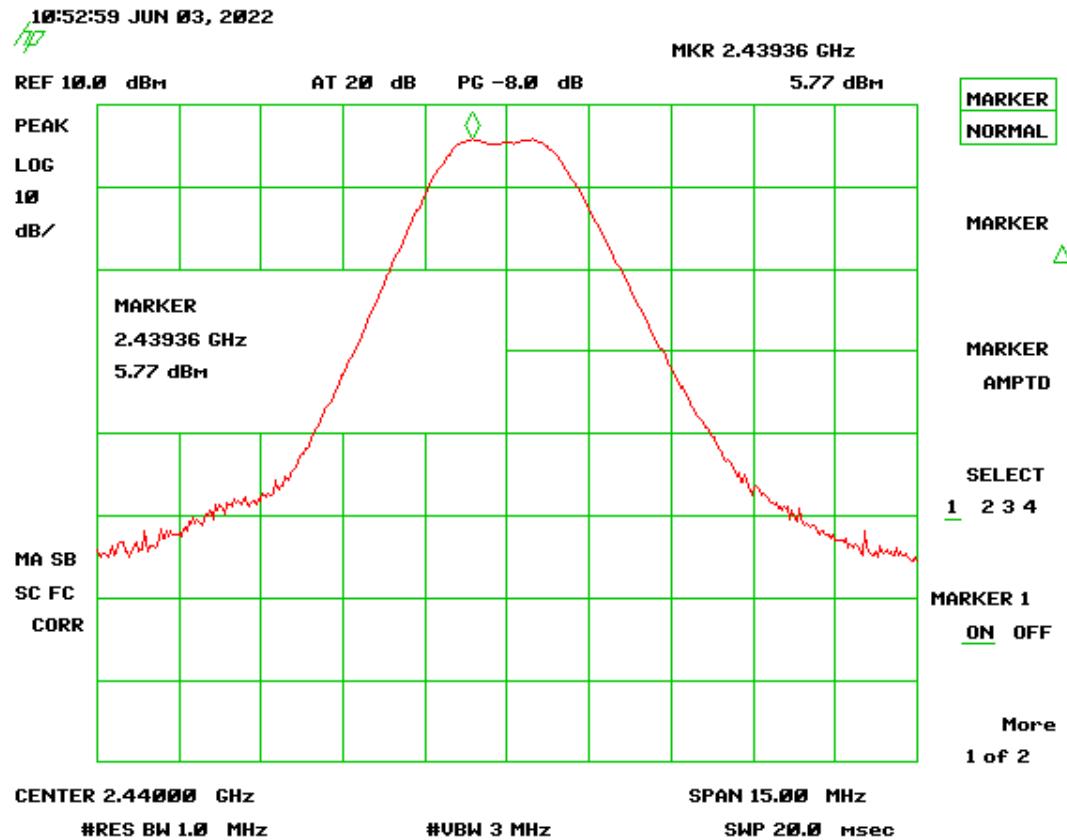


Figure 34. Peak Antenna Conducted Output Power, Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

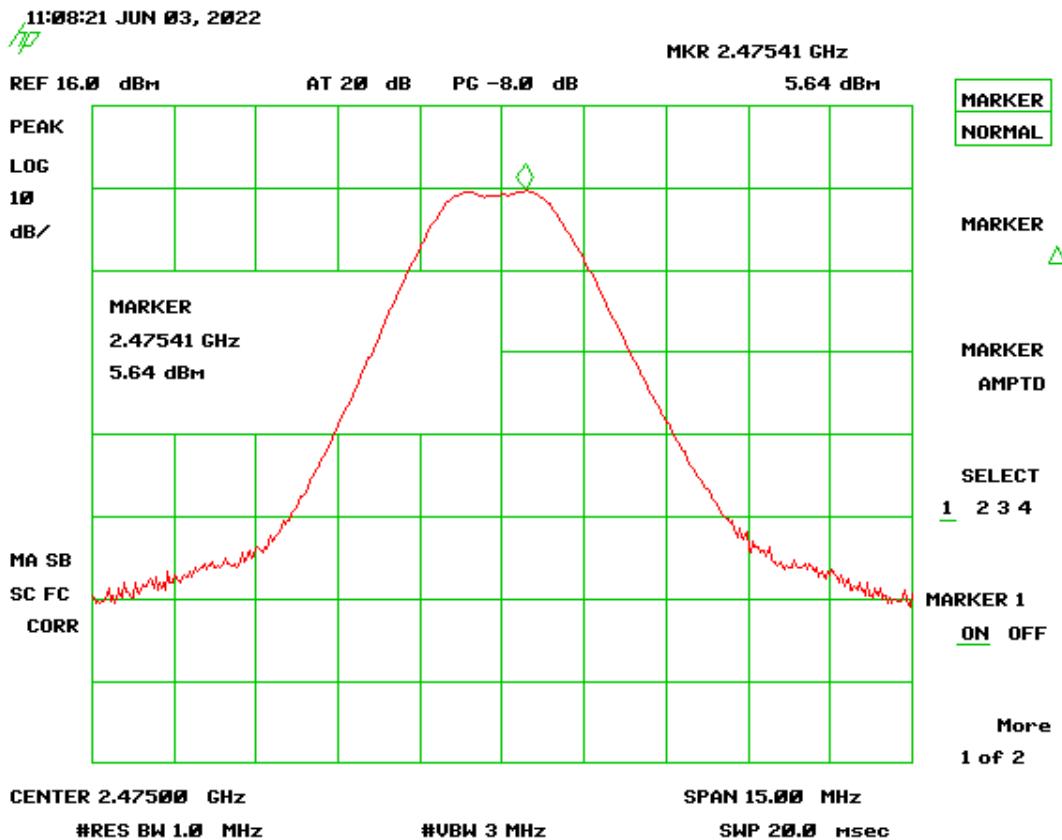


Figure 35. Peak Antenna Conducted Output Power, High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.15 Power Spectral Density (CFR 15.247(e))

The transmitter was placed into a continuous mode of operation at all applicable frequencies. The measurements were performed per the procedures of ANSI C63.10-2013. The RBW was set to 100 kHz and the Video Bandwidth was set to \geq RBW.

In accordance with 15.247 (e), the power spectral density shall be no greater than +8 dBm per any 3 kHz band.

Results are shown in the table below and figures below. All are less than +8 dBm per 3 kHz band. See figures below.

Conducted Radio measurement test method was used to collect this test data.

Table 10. Power Spectral Density for Low, Mid and High Bands

| Frequency (MHz) | Measured Result (dBm/100kHz) | Corrected Results (dBm/3kHz) | FCC Limit (dBm/3 kHz) |
|-----------------|------------------------------|------------------------------|-----------------------|
| 2405 | 2.23 | -13.00 | +8.0 |
| 2440 | 1.91 | -13.32 | +8.0 |
| 2475 | 1.16 | -14.07 | +8.0 |

Note: dBm/Hz correct to dBm/kHz using the following formula, $10 \log \text{RBW ref}/\text{RBW measured}$.

Test Date: June 3 2022

Tested By

Signature:



Name: Gabriel Medina

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

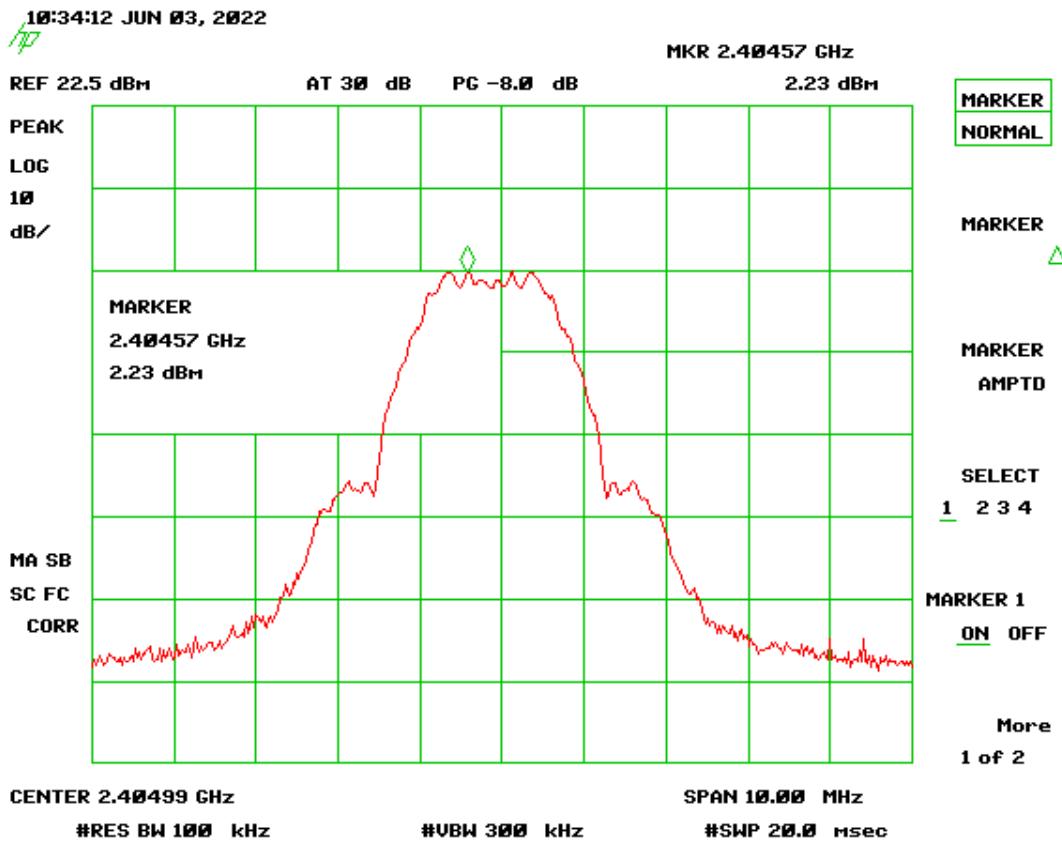


Figure 36. Power Spectral Density, Low Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

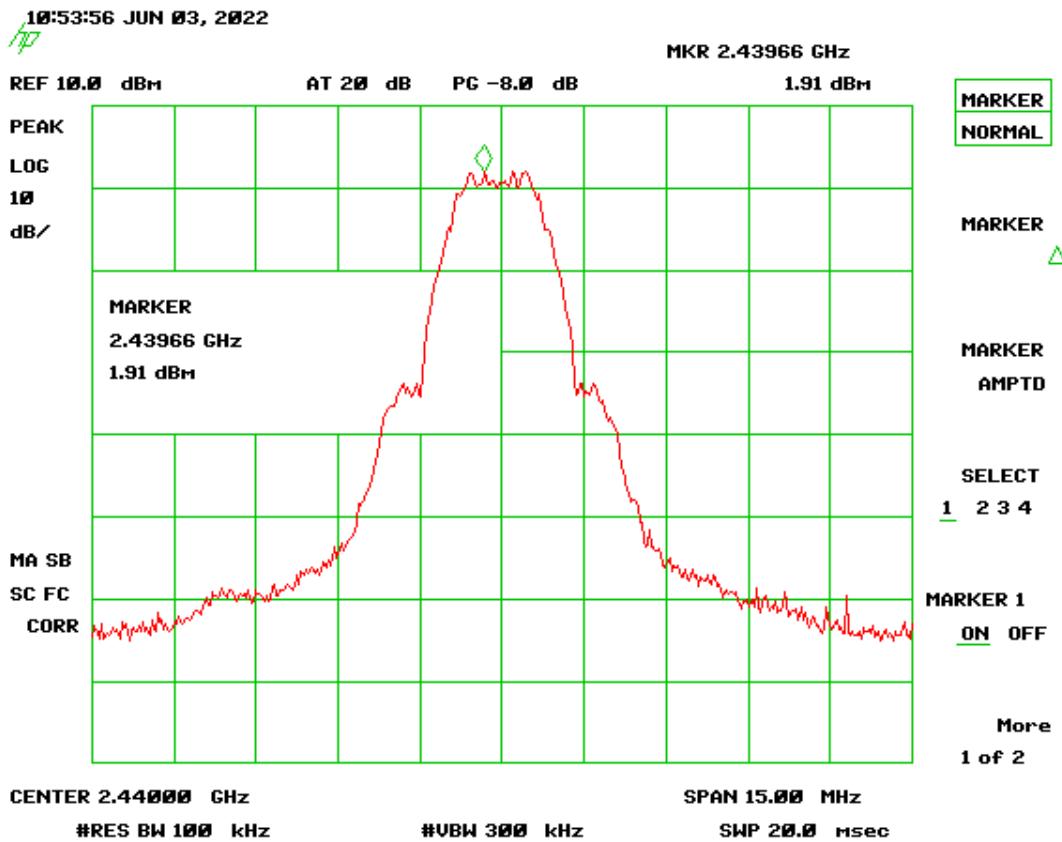


Figure 37. Power Spectral Density, Mid Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

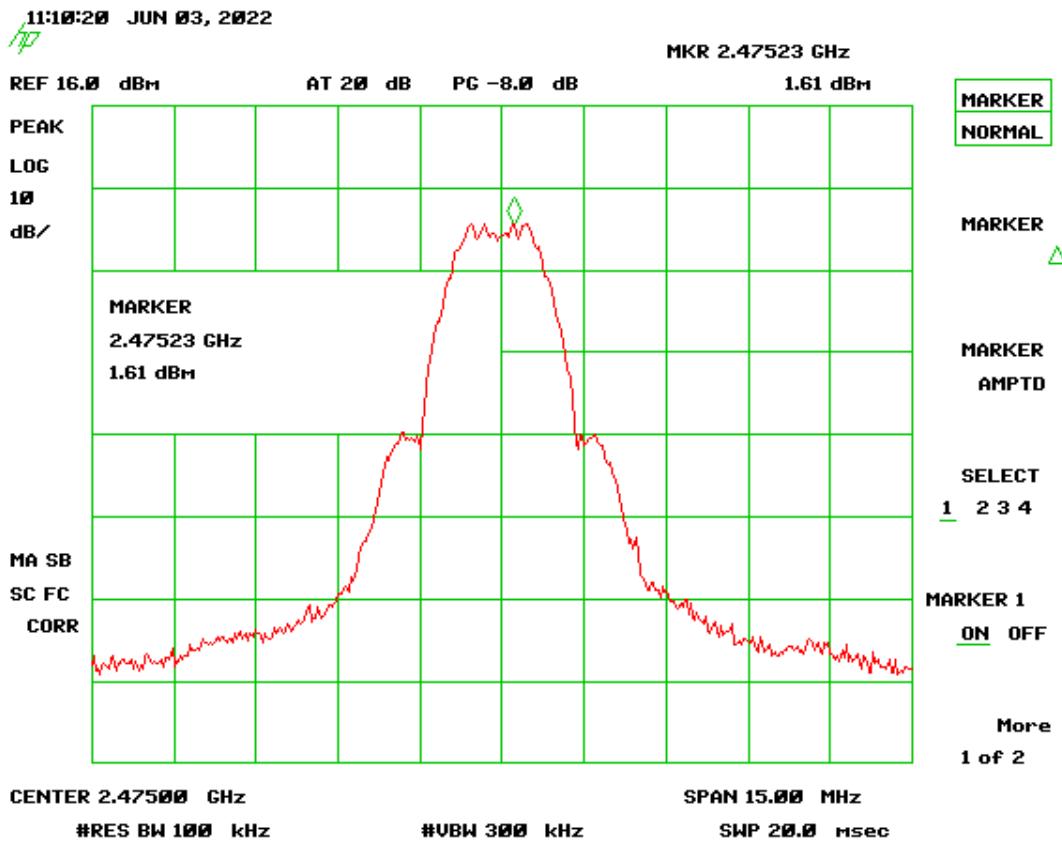


Figure 38. Power Spectral Density, High Channel

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.16 Intentional Radiator Power Lines Conducted Emissions (CFR 15.207)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.207, per ANSI C63.10:2013, Clause 6.2, with a spectrum analyzer connected to an LISN and the EUT placed into a continuous mode of transmission.

This EUT is Battery operated. Therefor not power line conducted emissions testing needed.

Table 11. Power Line Conducted Emissions

| Conducted Emissions 150 kHz to 30 MHz | | | | | | |
|---------------------------------------|------------------|--------------|--------------------------|-------------------|-------------|----------|
| Frequency (MHz) | Test Data (dBuV) | LISN+CL (dB) | Corrected Results (dBuV) | AVG Limits (dBuV) | Margin (dB) | Detector |
| Not Applicable | | | | | | |

Test Date: N/A

Tested By

Signature:



Name: Gabriel Medina

2.17 Intentional Radiator, Radiated Emissions (CFR 15.209)

The test data provided herein is to support the verification requirement for radiated emissions coming for the EUT in a transmitting state per 15.209 and were investigated from 9kHz or the lowest operating clock frequency to 25 GHz and tested as detailed in ANSI C63.10:2013, Clause 6.4-6.6.

Measurements were made with the analyzer's resolution bandwidth set to 120 kHz for measurements made below 1 GHz and 1 MHz for measurements made above 1 GHz. The video bandwidth was set to three times the resolution bandwidth; 1 MHz RBW and 3 MHz VBW. The test data were maximized for magnitude by rotating the turn-table through 360 degrees and raising and lowering the receiving antenna between 1 to 4 meters in height as a part of the measurement procedure.

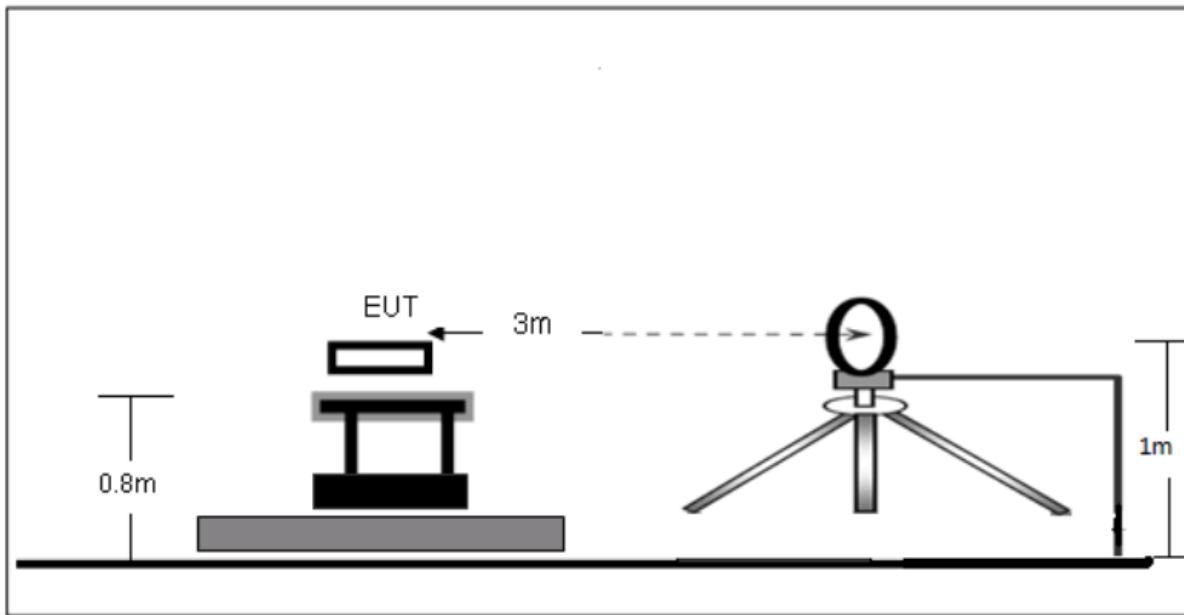


Figure 39. Block Diagram Below 30 MHz Radiated Emissions Test Setup

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

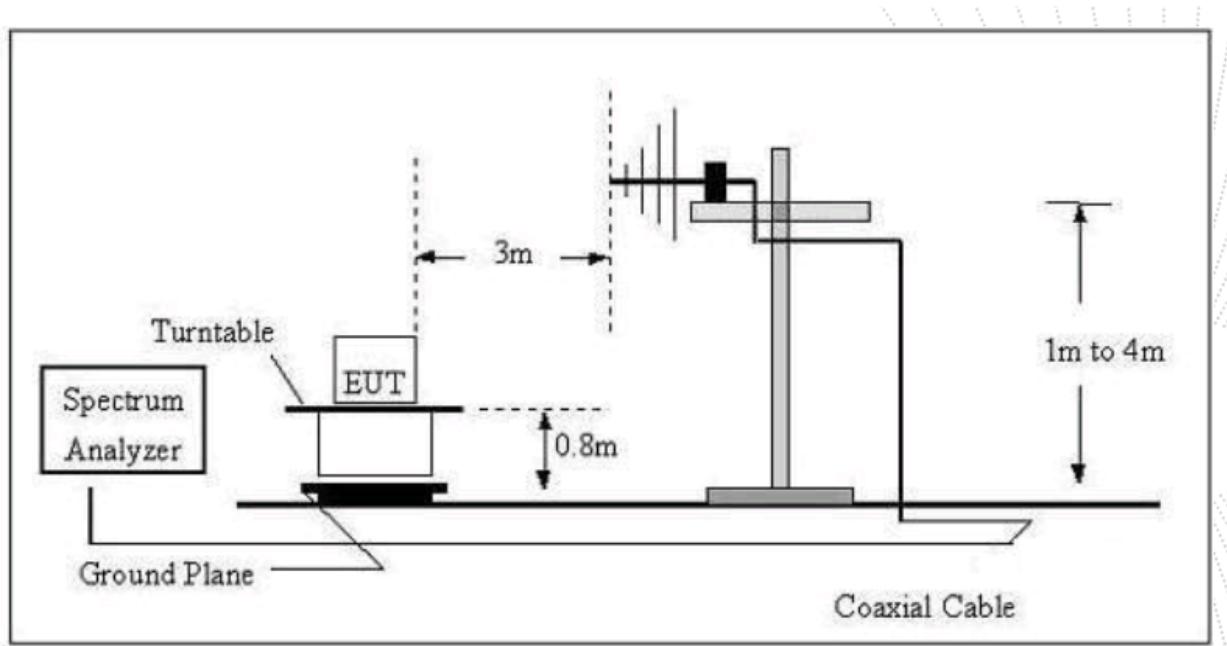


Figure 40. Block Diagram 30- 1000 MHz Radiated Emissions Test Setup

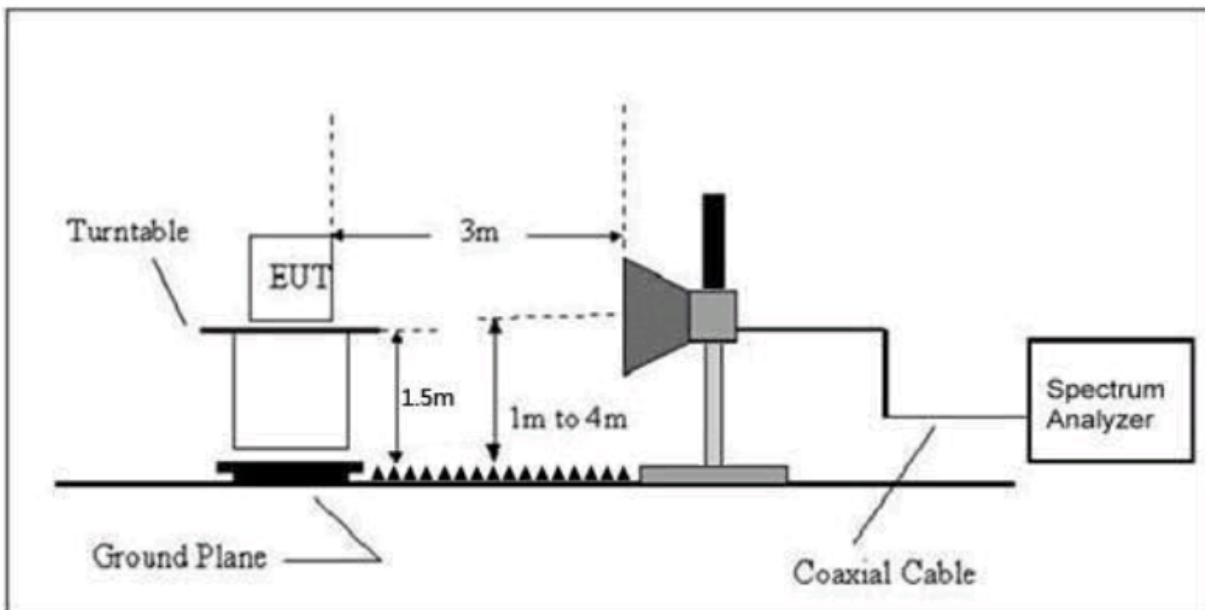


Figure 41. Block Diagram Above 1 GHz Radiated Emissions Test Setup

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

Table 12. Spurious Radiated Emissions (30 MHz – 1 GHz)

| Test: FCC Part 15.209 | | | | | | | |
|-----------------------|------------------|---------------|------------------|-----------------|-------------------------|-------------|----------------------|
| Frequency (MHz) | Test Data (dBuV) | AF+CL-PA (dB) | Results (dBuV/m) | Limits (dBuV/m) | Distance / Polarization | Margin (dB) | DETECTOR PK / QP/AVG |
| 78.54 | 41.15 | -18.22 | 22.93 | 40.0 | 3m./HORZ | 17.1 | PK |
| 139.04 | 41.16 | -15.05 | 26.11 | 43.5 | 3m./HORZ | 17.4 | PK |
| 425.06 | 41.23 | -10.07 | 31.16 | 46.0 | 3m./HORZ | 14.8 | PK |
| 595.64 | 41.62 | -6.81 | 34.81 | 46.0 | 3m./HORZ | 11.2 | PK |
| 833.08 | 41.42 | -3.68 | 37.74 | 46.0 | 3m./HORZ | 8.3 | PK |
| 89.88 | 41.56 | -17.27 | 24.29 | 43.5 | 3m./VERT | 19.2 | PK |
| 157.44 | 40.77 | -13.57 | 27.20 | 43.5 | 3m./VERT | 16.3 | PK |
| 399.56 | 41.35 | -11.59 | 29.76 | 46.0 | 3m./VERT | 16.2 | PK |
| 628.58 | 41.81 | -7.57 | 34.24 | 46.0 | 3m./VERT | 11.8 | PK |
| 851.28 | 41.39 | -5.41 | 35.98 | 46.0 | 3m./VERT | 10.0 | PK |

AF is antenna factor.

CL is cable loss.

PA is preamplifier gain.

Sample Calculation at 78.54 MHz:

| | |
|---|--------------|
| Magnitude of Measured Frequency | 41.15 dBuV |
| +Antenna Factor + Cable Loss - Amplifier Gain | -18.22 dB/m |
| Corrected Result | 22.93 dBuV/m |

Test Date: June 2 2022

Tested By

Signature:



Name: Gabriel Medina

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

Table 13. Spurious Radiated Emissions (1 GHz – 10 GHz)

| Test: FCC Part 15.209 | | | | | | | |
|-----------------------|------------------|---------------|------------------|-----------------|-------------------------|-------------|----------------------|
| Frequency (MHz) | Test Data (dBuV) | AF+CL-PA (dB) | Results (dBuV/m) | Limits (dBuV/m) | Distance / Polarization | Margin (dB) | DETECTOR PK / QP/AVG |
| 5767.00 | 31.63 | -1.78 | 29.85 | 54.0 | 3.0m./HORZ | 24.1 | AVG |
| 7423.00 | 45.53 | 3.62 | 49.15 | 54.0 | 1.0m./HORZ | 4.8 | AVG |
| 5758.00 | 31.08 | -1.13 | 29.95 | 54.0 | 3.0m./VERT | 24.0 | AVG |
| 7423.00 | 45.35 | 3.48 | 48.83 | 54.0 | 1.0m./VERT | 5.2 | AVG |

AF is antenna factor.

CL is cable loss.

PA is preamplifier gain.

Sample Calculation at 5767.00 MHz:

| | | |
|---|-------|--------|
| Magnitude of Measured Frequency | 31.63 | dBuV |
| +Antenna Factor + Cable Loss - Amplifier Gain | -1.78 | dB/m |
| Corrected Result | 29.85 | dBuV/m |

Test Date: June 2 2022

Tested By

Signature:



Name: Gabriel Medina

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

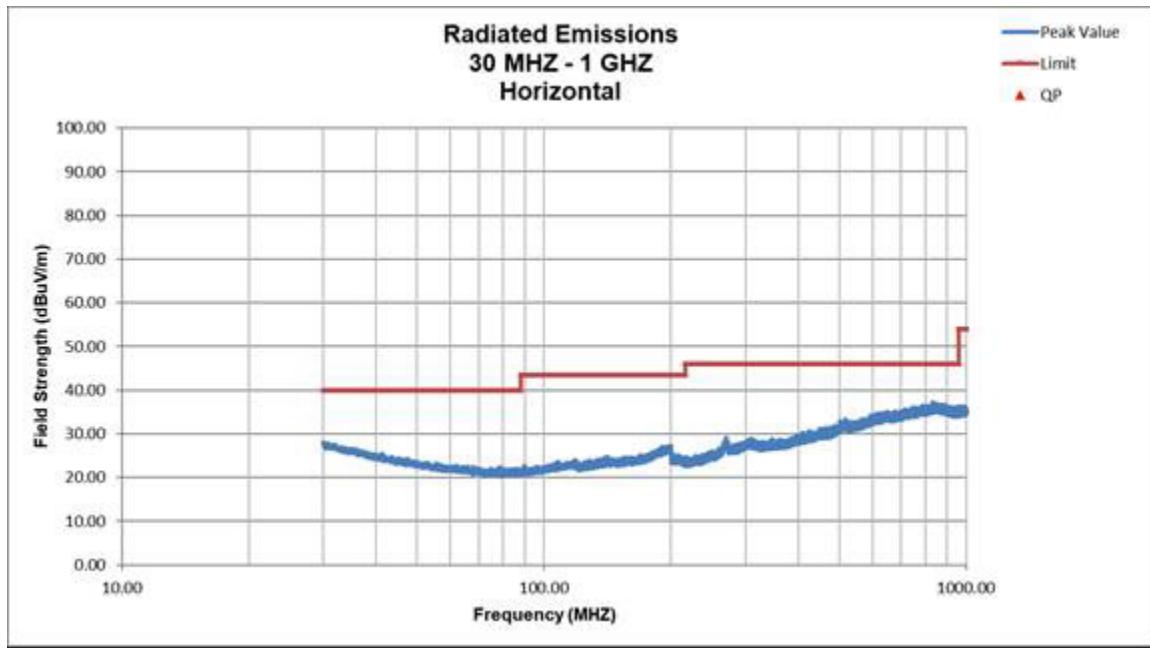


Figure 42. Radiated Emissions, Horizontal 30 MHz – 1 GHz

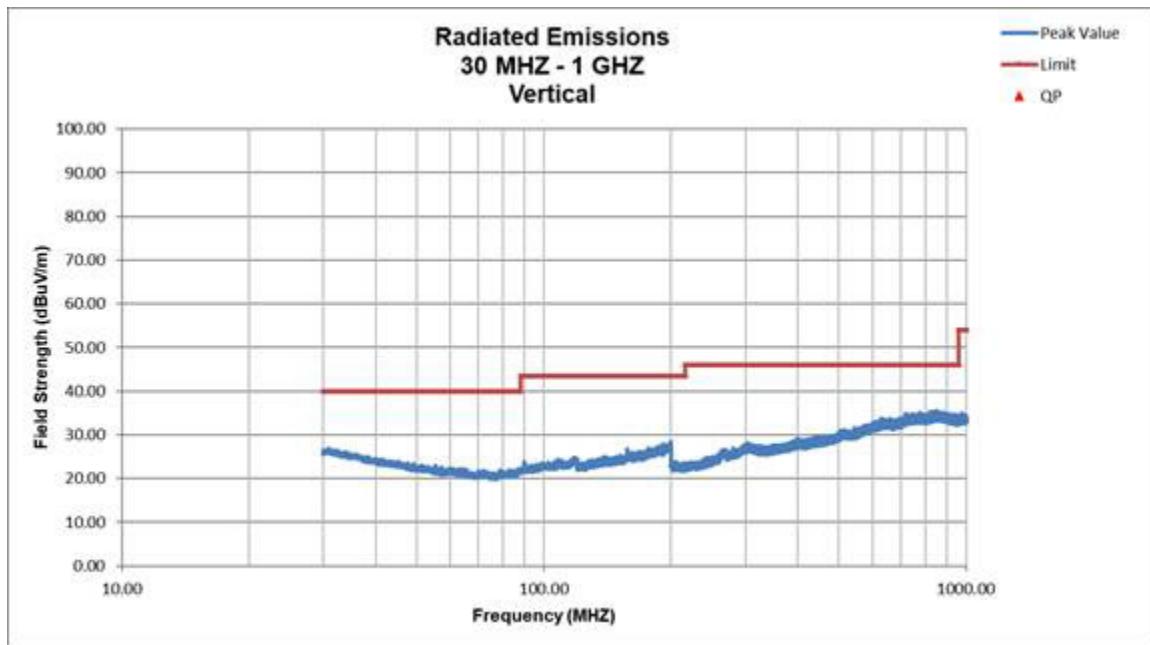


Figure 43. Radiated Emissions, Vertical 30 MHz – 1 GHz

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

Table 14. Spurious Radiated Emissions (10 GHz – 25 GHz)

| Test: FCC Part 15.209 | | | | | | | |
|---|------------------|---------------|------------------|-----------------|-------------------------|-------------|----------------------|
| Frequency (MHz) | Test Data (dBuV) | AF+CL-PA (dB) | Results (dBuV/m) | Limits (dBuV/m) | Distance / Polarization | Margin (dB) | DETECTOR PK / QP/AVG |
| All emissions where 20 dB below the limit | | | | | | | |

AF is antenna factor.

CL is cable loss.

PA is preamplifier gain.

Sample Calculation: N/A

Test Date: June 2 2022

Tested By

Signature: 

Name: Gabriel Medina

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

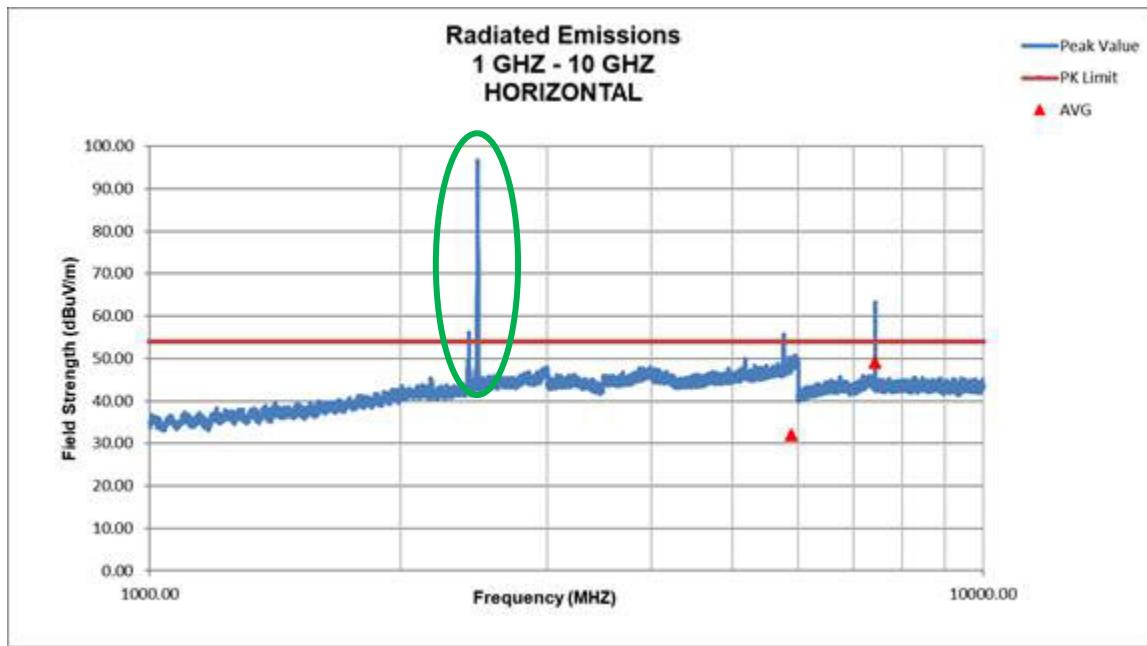


Figure 44. Radiated Emissions, Horizontal 1 GHz – 10 GHz

Note: fundamental emission is encircled in green

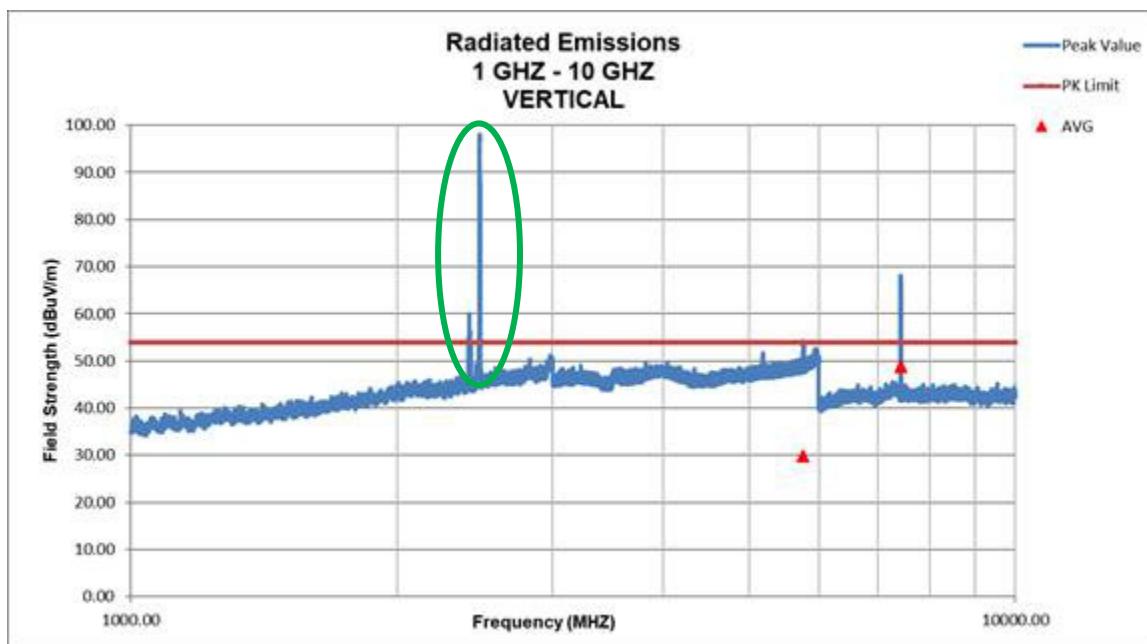


Figure 45. Radiated Emissions, Vertical 1 GHz – 10 GHz

Note: fundamental emission is encircled in green

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification
2AHQD-SENSOR4
22-0125
June 6, 2022
Clean Hands Safe Hands, LLC
Gen4 Sensor

2.18 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2:2011. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.18.1 Conducted Emissions Measurement Uncertainty

The EUT is battery powered; therefore, this test is not applicable.

2.18.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.2 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.2 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.2 dB.

3 Conclusions

The EUT is deemed to have met the requirements of the standards cited within the test report when tested as detailed in the present test report.