



# FCC RF Test Report

**APPLICANT** : Positioning Universal  
**EQUIPMENT** : asset tracking device  
**BRAND NAME** : FJ500M  
**MODEL NAME** : FJ500M  
**FCC ID** : Contains FCC ID :2AHRH-FJ500M  
**STANDARD** : 47 CFR Part 2, 24(E), 27(L), 27(H)  
**CLASSIFICATION** : PCS Licensed Transmitter (PCB)

The product was installed a module during the test: M2M DATA MODULE (Model Name: IMA2A, FCC ID: 2AHRH-FJ500M) during test.

The product was received on Apr. 18, 2019 and completely tested on May 08, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*James Huang*

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Product Feature of Equipment Under Test..... 5
1.3 Product Specification of Equipment Under Test..... 6
1.4 Modification of EUT ..... 6
1.5 Maximum ERP/EIRP Power ..... 7
1.6 Testing Location ..... 8
1.7 Applicable Standards..... 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9
2.1 Test Mode ..... 9
2.2 Connection Diagram of Test System ..... 10
2.3 Support Unit used in test configuration and system ..... 10
2.4 Frequency List of Low/Middle/High Channels ..... 11
3 CONDUCTED TEST ITEMS ..... 13
3.1 Measuring Instruments ..... 13
3.2 Test Setup ..... 13
3.3 Test Result of Conducted Test ..... 13
3.4 Conducted Output Power and ERP/EIRP ..... 14
4 RADIATED TEST ITEMS ..... 15
4.1 Measuring Instruments ..... 15
4.2 Test Setup ..... 15
4.3 Test Result of Radiated Test ..... 15
4.4 Radiated Spurious Emission ..... 16
5 LIST OF MEASURING EQUIPMENT ..... 17
6 UNCERTAINTY OF EVALUATION ..... 18
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(c)(10)	Effective Radiated Power (Band 12)	ERP < 3 Watt	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	EIRP < 2Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	PASS	-
-	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	1
-	§2.1049	Occupied Bandwidth	Reporting Only	PASS	1
-	§2.1051 §24.238(a) §27.53(g) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 12)	< 43+10log <sub>10</sub> (P[Watts])	PASS	1
-	§2.1051 §24.238(a) §27.53(g) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 12)	< 43+10log <sub>10</sub> (P[Watts])	PASS	1
-	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	1
4.4	§2.1053 §24.238(a) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 12)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 21.88 dB at 3474.000 MHz

Remark 1: The conducted test items were leverage from module RF report which can refer to Report No. "FG851701".



# 1 General Description

## 1.1 Applicant

Positioning Universal

4660 La Jolla Village Dr Suite #1100, San Diego, CA92122

## 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	asset tracking device
Brand Name	FJ500M
Model Name	FJ500M
FCC ID	Contains FCC ID :2AHRH-FJ500M
EUT supports Radios application	LTE Category M1 and GNSS
SN Code	JKP3A191000028
HW Version	v1.0
SW Version	6300
EUT Stage	Production Unit



### 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz
<b>Rx Frequency</b>	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz
<b>Bandwidth</b>	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 12 : 1.4MHz / 3MHz / 5MHz / 10MHz
<b>Maximum Output Power to Antenna</b>	LTE Band 2 : 23.84 dBm LTE Band 4 : 23.68 dBm LTE Band 12 : 23.77 dBm
<b>Antenna Gain</b>	LTE Band 2 : 1.34 dBi LTE Band 4 : 0.47 dBi LTE Band 12 : 0.63 dBi
<b>Type of Modulation</b>	QPSK / 16QAM

### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Maximum ERP/EIRP Power

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	-	-	0.3289	-	-	0.2547
3	1851.5 ~ 1908.5	-	-	0.3282	-	-	0.2410
5	1852.5 ~ 1907.5	-	-	0.3076	-	-	0.3296
10	1855.0 ~ 1905.0	-	-	0.3083	-	-	0.3289
15	1857.5 ~ 1902.5	-	-	0.3192	-	-	0.3273
20	1860.0 ~ 1900.0	-	-	0.3221	-	-	0.3266
LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	-	-	0.2600	-	-	0.1995
3	1711.5 ~ 1753.5	-	-	0.2404	-	-	0.1903
5	1712.5 ~ 1752.5	-	-	0.2323	-	-	0.2466
10	1715.0 ~ 1750.0	-	-	0.2307	-	-	0.2500
15	1717.5 ~ 1747.5	-	-	0.2438	-	-	0.2570
20	1720.0 ~ 1745.0	-	-	0.2382	-	-	0.2576
LTE Band 12		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	699.7 ~ 715.3	-	-	0.1596	-	-	0.1276
3	700.5 ~ 714.5	-	-	0.1535	-	-	0.1614
5	701.5 ~ 713.5	-	-	0.1629	-	-	0.1648
10	704.0 ~ 711.0	-	-	0.1679	-	-	0.1667



### 1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-0512-57900158 FAX : +86-0512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH06-KS	CN1257	314309

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 24(E), 27(L), 27(H)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.





## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v			v	v	v
	12	v	v	v	v	-	-	v	v	v			v	v	v
Radiated Spurious Emission	2	Worst Case										v	v	v	
	4	Worst Case										v	v	v	
	12	Worst Case										v	v	v	
Note	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>The maximum RB size of LTE Cat M1 is 6RB for each LTE band and bandwidth, for conducted power and ERP/EIRP we test all the bandwidth, for the other conducted test items we only test 5MHz Bandwidth.</li> </ol>														

## 2.2 Connection Diagram of Test System

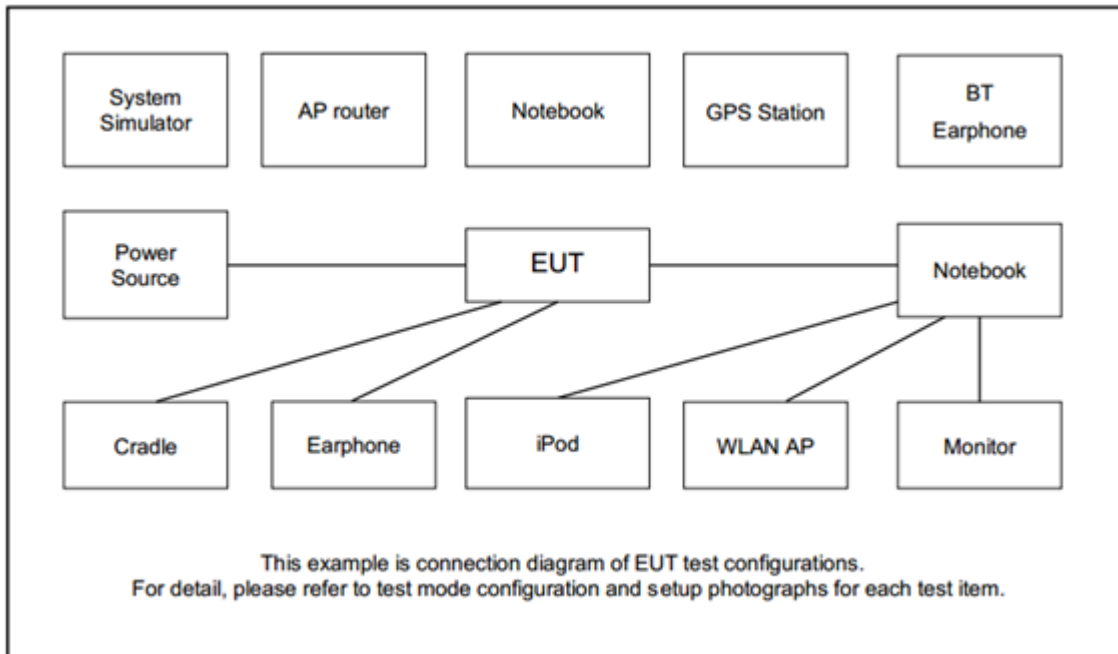

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m



### 2.4 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3


### 3 Conducted Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.2 Test Setup

##### 3.2.1 Conducted Output Power

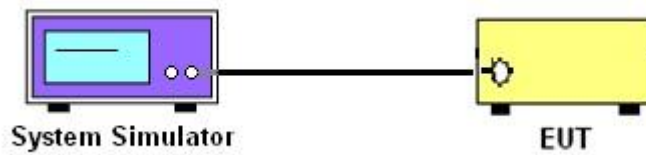

#### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



### 3.4 Conducted Output Power and ERP/EIRP

#### 3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 12.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

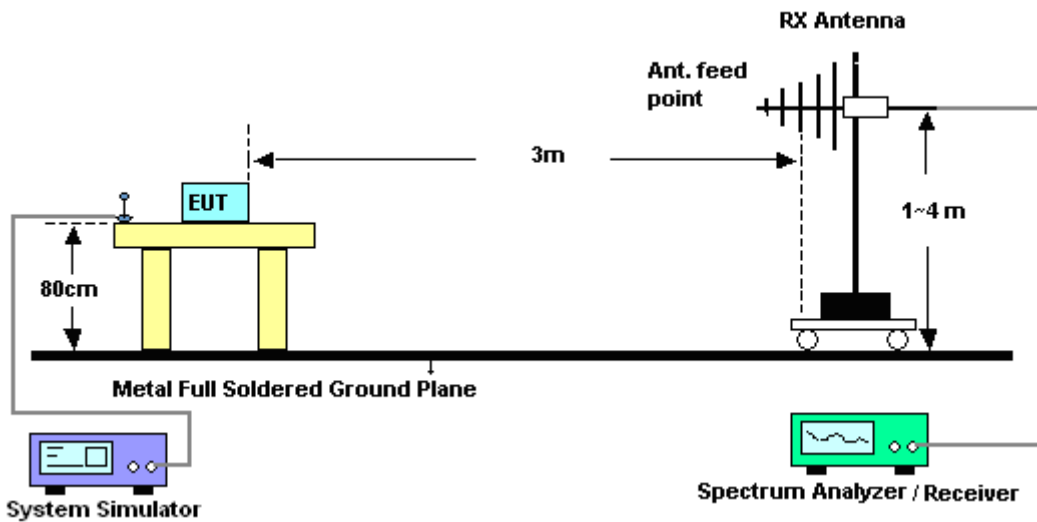

#### 4.2.2 For radiated test above 1GHz

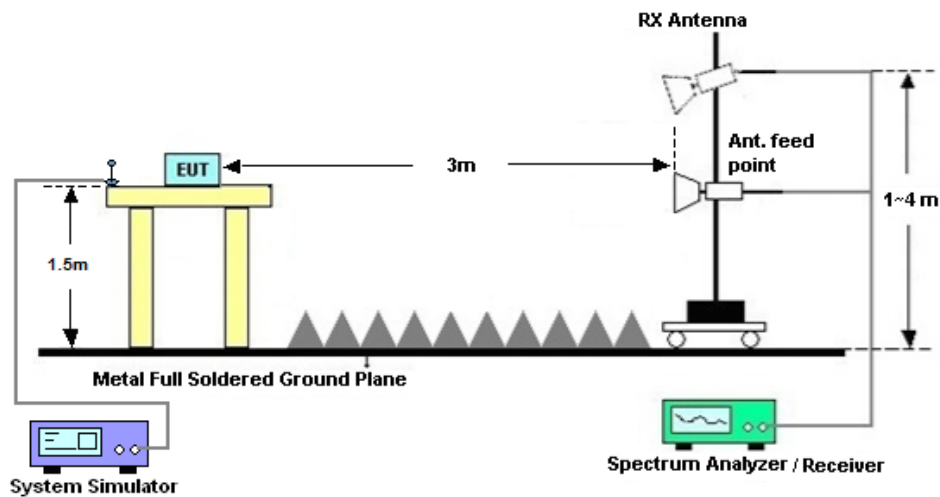

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)] \text{ (dB)}$   
=  $[30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
= -13dBm.





## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz-44GHz	Jun. 25, 2018	May 03, 2019~ May 08, 2019	Jun. 24, 2019	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 28, 2018	May 03, 2019~ May 08, 2019	Dec. 27, 2019	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 20, 2018	May 03, 2019~ May 08, 2019	Oct. 19, 2019	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	May 03, 2019~ May 08, 2019	Jan. 04, 2020	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2018	May 03, 2019~ May 08, 2019	Aug. 05, 2019	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2019	May 03, 2019~ May 08, 2019	Apr. 14, 2020	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35 -HG	2014749	18~40GHz	Jan. 14, 2019	May 03, 2019~ May 08, 2019	Jan. 13, 2020	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 03, 2019~ May 08, 2019	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 03, 2019~ May 08, 2019	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 03, 2019~ May 08, 2019	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required



## 6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.0 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.0 dB
---	--------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]									
BW [MHz]	Mod	RB Size	RB Offset	Index			Lowest	Middle	Highest
				L	M	H			
20	QPSK	1	0	0	0	15	23.60	23.34	23.74
20		1	5	0	0	15	23.74	23.37	23.65
20		6	0	0	0	15	23.72	23.33	23.64
20	16-QAM	1	0	0	0	15	23.78	23.68	23.75
20		1	5	0	0	15	23.76	23.64	23.76
20		6	0	0	0	15	23.74	23.70	23.80
15	QPSK	1	0	0	0	11	23.66	23.67	23.65
15		1	5	0	0	11	23.65	23.70	23.60
15		6	0	0	0	11	23.66	23.68	23.55
15	16-QAM	1	0	0	0	11	23.79	23.80	23.71
15		1	5	0	0	11	23.81	23.80	23.79
15		6	0	0	0	11	23.70	23.75	23.68
10	QPSK	1	0	0	0	7	23.54	23.53	23.53
10		1	5	0	0	7	23.45	23.55	23.49
10		6	0	0	0	7	22.80	22.89	22.80
10	16-QAM	1	0	0	0	7	23.80	23.73	23.83
10		1	5	0	0	7	23.81	23.75	23.79
10		6	0	0	0	7	22.23	22.17	22.16
5	QPSK	1	0	0	0	3	23.50	23.53	23.53
5		1	5	0	0	3	23.49	23.54	23.45
5		6	0	0	0	3	23.00	22.91	22.87
5	16-QAM	1	0	0	0	3	23.46	23.84	23.75
5		1	5	0	0	3	23.65	23.78	23.71
5		6	0	0	0	3	22.30	22.18	22.17



LTE Band 2 Maximum Average Power [dBm]									
BW [MHz]	Mod	RB Size	RB Offset	Index			Lowest	Middle	Highest
				L	M	H			
3	QPSK	1	0	0	0	1	23.82	23.40	23.57
3		1	5	0	0	1	23.79	23.35	23.80
3		6	0	0	0	1	21.59	21.42	21.13
3		1	0	0	0	1	22.47	22.36	22.20
3	16-QAM	1	5	0	0	1	22.48	22.32	22.25
3		6	0	0	0	1	21.51	21.58	21.05
1.4	QPSK	1	0	0	0	0	23.83	23.55	23.83
1.4		1	5	0	0	0	23.82	23.54	23.82
1.4		6	0	0	0	0	22.80	21.57	22.80
1.4	16-QAM	1	0	0	0	0	22.63	22.72	22.63
1.4		1	5	0	0	0	22.44	22.58	22.44
1.4		6	0	0	0	0	21.85	21.66	21.85



LTE Band 4 Maximum Average Power [dBm]									
BW [MHz]	Mod	RB Size	RB Offset	Index			Lowest	Middle	Highest
				L	M	H			
20	QPSK	1	0	0	0	15	23.30	23.26	23.19
20		1	5	0	0	15	23.28	23.29	23.24
20		6	0	0	0	15	23.21	23.28	23.21
20		1	0	0	0	15	23.64	23.57	23.54
20	16-QAM	1	5	0	0	15	23.60	23.58	23.57
20		6	0	0	0	15	23.34	23.35	23.31
15	QPSK	1	0	0	0	11	23.37	23.30	23.31
15		1	5	0	0	11	23.27	23.28	23.27
15		6	0	0	0	11	23.40	23.31	23.31
15	16-QAM	1	0	0	0	11	23.63	23.60	23.54
15		1	5	0	0	11	23.57	23.63	23.57
15		6	0	0	0	11	23.21	23.36	23.29
10	QPSK	1	0	0	0	7	23.10	23.13	23.14
10		1	5	0	0	7	23.16	23.12	23.13
10		6	0	0	0	7	22.64	22.50	22.66
10	16-QAM	1	0	0	0	7	23.51	23.44	23.50
10		1	5	0	0	7	23.46	23.44	23.49
10		6	0	0	0	7	21.92	21.90	22.00
5	QPSK	1	0	0	0	3	23.10	23.13	23.10
5		1	5	0	0	3	23.19	23.13	23.15
5		6	0	0	0	3	22.50	22.50	22.65
5	16-QAM	1	0	0	0	3	23.44	23.44	23.43
5		1	5	0	0	3	23.41	23.45	23.40
5		6	0	0	0	3	21.85	21.97	21.83



LTE Band 4 Maximum Average Power [dBm]									
BW [MHz]	Mod	RB Size	RB Offset	Index			Lowest	Middle	Highest
				L	M	H			
3	QPSK	1	0	0	0	1	23.22	23.11	23.34
3		1	5	0	0	1	23.25	23.10	23.28
3		6	0	0	0	1	21.22	21.09	21.24
3		1	0	0	0	1	22.33	22.11	22.01
3	16-QAM	1	5	0	0	1	22.28	22.11	22.02
3		6	0	0	0	1	21.25	21.22	21.33
1.4	QPSK	1	0	0	0	0	23.63	23.51	23.40
1.4		1	5	0	0	0	23.68	23.35	23.30
1.4		6	0	0	0	0	21.65	21.33	21.45
1.4	16-QAM	1	0	0	0	0	22.22	22.53	22.32
1.4		1	5	0	0	0	22.34	22.41	22.20
1.4		6	0	0	0	0	21.61	21.44	21.48



LTE Band 12 Maximum Average Power [dBm]									
BW [MHz]	Mod	RB Size	RB Offset	Index			Lowest	Middle	Highest
				L	M	H			
10	QPSK	1	0	0	0	7	23.39	23.40	23.40
10		1	5	0	0	7	23.40	23.41	23.39
10		6	0	0	0	7	22.77	22.73	23.77
10		1	0	0	0	7	23.44	23.71	23.57
10	16-QAM	1	5	0	0	7	23.70	23.74	23.74
10		6	0	0	0	7	23.01	23.06	23.05
5	QPSK	1	0	0	0	3	23.31	23.35	23.30
5		1	5	0	0	3	23.64	23.37	23.30
5		6	0	0	0	3	22.65	22.75	22.43
5	16-QAM	1	0	0	0	3	23.66	23.65	23.60
5		1	5	0	0	3	23.54	23.69	23.54
5		6	0	0	0	3	22.09	22.10	23.09
3	QPSK	1	0	0	0	1	23.15	23.38	23.30
3		1	5	0	0	1	23.25	23.30	23.18
3		6	0	0	0	1	21.34	21.29	21.13
3	16-QAM	1	0	0	0	1	21.88	23.60	22.20
3		1	5	0	0	1	21.98	23.31	22.23
3		6	0	0	0	1	21.43	21.29	21.06
1.4	QPSK	1	0	0	0	0	23.42	23.55	23.18
1.4		1	5	0	0	0	23.27	23.50	23.23
1.4		6	0	0	0	0	21.20	21.61	21.32
1.4	16-QAM	1	0	0	0	0	22.04	22.58	22.19
1.4		1	5	0	0	0	22.15	22.49	22.25
1.4		6	0	0	0	0	21.27	21.60	21.21



**ERP/EIRP**

LTE Band 2 (GT - LC = 1.34 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
(MHz)									
Conducted Power (dBm)	23.83	23.55	23.83	23.82	23.40	23.57	23.49	23.54	23.45
Conducted Power (Watts)	0.2415	0.2265	0.2415	0.2410	0.2188	0.2275	0.2234	0.2259	0.2213
EIRP(dBm)	25.17	24.89	25.17	25.16	24.74	24.91	24.83	24.88	24.79
EIRP(Watts)	0.3289	0.3083	0.3289	0.3282	0.2979	0.3097	0.3041	0.3076	0.3013

LTE Band 2 (GT - LC = 1.34 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
(MHz)									
Conducted Power (dBm)	23.45	23.55	23.49	23.65	23.70	23.60	23.60	23.34	23.74
Conducted Power (Watts)	0.2213	0.2265	0.2234	0.2317	0.2344	0.2291	0.2291	0.2158	0.2366
EIRP(dBm)	24.79	24.89	24.83	24.99	25.04	24.94	24.94	24.68	25.08
EIRP(Watts)	0.3013	0.3083	0.3041	0.3155	0.3192	0.3119	0.3119	0.2938	0.3221





LTE Band 2 (GT - LC = 1.34 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	22.63	22.72	22.63	22.48	22.32	22.25	23.46	23.84	23.75
Conducted Power (Watts)	0.1832	0.1871	0.1832	0.1770	0.1706	0.1679	0.2218	0.2421	0.2371
EIRP(dBm)	23.97	24.06	23.97	23.82	23.66	23.59	24.80	25.18	25.09
EIRP(Watts)	0.2495	0.2547	0.2495	0.2410	0.2323	0.2286	0.3020	0.3296	0.3228

LTE Band 2 (GT - LC = 1.34 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	23.80	23.73	23.83	23.81	23.80	23.79	23.74	23.70	23.80
Conducted Power (Watts)	0.2399	0.2360	0.2415	0.2404	0.2399	0.2393	0.2366	0.2344	0.2399
EIRP(dBm)	25.14	25.07	25.17	25.15	25.14	25.13	25.08	25.04	25.14
EIRP(Watts)	0.3266	0.3214	0.3289	0.3273	0.3266	0.3258	0.3221	0.3192	0.3266



LTE Band 4 (GT - LC = 0.47 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	23.68	23.35	23.30	23.22	23.11	23.34	23.19	23.13	23.15
Conducted Power (Watts)	0.2333	0.2163	0.2138	0.2099	0.2046	0.2158	0.2084	0.2056	0.2065
EIRP(dBm)	24.15	23.82	23.77	23.69	23.58	23.81	23.66	23.60	23.62
EIRP(Watts)	0.2600	0.2410	0.2382	0.2339	0.2280	0.2404	0.2323	0.2291	0.2301

LTE Band 4 (GT - LC = 0.47 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	23.16	23.12	23.13	23.40	23.31	23.31	23.30	23.26	23.19
Conducted Power (Watts)	0.2070	0.2051	0.2056	0.2188	0.2143	0.2143	0.2138	0.2118	0.2084
EIRP(dBm)	23.63	23.59	23.60	23.87	23.78	23.78	23.77	23.73	23.66
EIRP(Watts)	0.2307	0.2286	0.2291	0.2438	0.2388	0.2388	0.2382	0.2360	0.2323



LTE Band 4 (GT - LC = 0.47 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	22.22	22.53	22.32	22.33	22.11	22.01	23.41	23.45	23.40
Conducted Power (Watts)	0.1667	0.1791	0.1706	0.1708	0.1626	0.1589	0.2193	0.2213	0.2188
EIRP(dBm)	22.69	23.00	22.79	22.80	22.58	22.48	23.88	23.92	23.87
EIRP(Watts)	0.1858	0.1995	0.1901	0.1903	0.1811	0.1770	0.2443	0.2466	0.2438

LTE Band 4 (GT - LC = 0.47 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	23.51	23.44	23.50	23.63	23.60	23.54	23.64	23.57	23.54
Conducted Power (Watts)	0.2244	0.2208	0.2239	0.2307	0.2291	0.2259	0.2312	0.2275	0.2259
EIRP(dBm)	23.98	23.91	23.97	24.10	24.07	24.01	24.11	24.04	24.01
EIRP(Watts)	0.2500	0.2460	0.2495	0.2570	0.2553	0.2518	0.2576	0.2535	0.2518



LTE Band 12 (GT - LC = 0.63 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	23017	23095	23173	23025	23095	23165	23035	23095	23155
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	699.7	707.5	715.3	700.5	707.5	714.5	701.5	707.5	713.5
Conducted Power (dBm)	23.42	23.55	23.18	23.15	23.38	23.30	23.64	23.37	23.30
Conducted Power (Watts)	0.2198	0.2265	0.2080	0.2065	0.2178	0.2138	0.2312	0.2173	0.2138
ERP(dBm)	21.90	22.03	21.66	21.63	21.86	21.78	22.12	21.85	21.78
ERP(Watts)	0.1549	0.1596	0.1466	0.1455	0.1535	0.1507	0.1629	0.1531	0.1507

LTE Band 12 (GT - LC = 0.63 dB) QPSK			
Bandwidth	10M		
Channel	23060	23095	23130
	(Low)	(Mid)	(High)
Frequency (MHz)	704	707.5	711
Conducted Power (dBm)	22.77	22.73	23.77
Conducted Power (Watts)	0.1892	0.1875	0.2382
ERP(dBm)	21.25	21.21	22.25
ERP(Watts)	0.1334	0.1321	0.1679



LTE Band 12 (GT - LC = 0.63 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	23017	23095	23173	23025	23095	23165	23035	23095	23155
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	699.7	707.5	715.3	700.5	707.5	714.5	701.5	707.5	713.5
Conducted Power (dBm)	22.04	22.58	22.19	21.88	23.60	22.20	23.54	23.69	23.54
Conducted Power (Watts)	0.1600	0.1811	0.1656	0.1542	0.2291	0.1660	0.2259	0.2339	0.2259
ERP(dBm)	20.52	21.06	20.67	20.36	22.08	20.68	22.02	22.17	22.02
ERP(Watts)	0.1127	0.1276	0.1167	0.1086	0.1614	0.1169	0.1592	0.1648	0.1592

LTE Band 12 (GT - LC = 0.63 dB) 16QAM			
Bandwidth	10M		
Channel	23060	23095	23130
	(Low)	(Mid)	(High)
Frequency (MHz)	704	707.5	711
Conducted Power (dBm)	23.70	23.74	23.74
Conducted Power (Watts)	0.2344	0.2366	0.2366
ERP(dBm)	22.18	22.22	22.22
ERP(Watts)	0.1652	0.1667	0.1667



## Appendix B. Test Results of Radiated Test

### Radiated Spurious Emission

LTE Band 2 / 20MHz / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-41.08	-13	-28.08	-47.34	1.843	8.10	H
	5553	-51.84	-13	-38.84	-60.15	2.19	10.50	H
	7404	-43.40	-13	-30.40	-52.32	2.58	11.50	H
	3705	-46.35	-13	-33.35	-52.61	1.84	8.10	V
	5553	-49.51	-13	-36.51	-57.82	2.19	10.50	V
	7404	-43.72	-13	-30.72	-52.64	2.58	11.50	V
Middle	3744	-40.64	-13	-27.64	-46.90	1.843	8.10	H
	5613	-51.56	-13	-38.56	-59.87	2.19	10.50	H
	7488	-44.06	-13	-31.06	-52.98	2.58	11.50	H
	3744	-46.45	-13	-33.45	-52.71	1.84	8.10	V
	5613	-50.06	-13	-37.06	-58.37	2.19	10.50	V
	7488	-43.64	-13	-30.64	-52.56	2.58	11.50	V
Highest	3783	-42.13	-13	-29.13	-48.39	1.843	8.10	H
	5673	-51.24	-13	-38.24	-59.55	2.19	10.50	H
	7566	-42.69	-13	-29.69	-51.61	2.58	11.50	H
	3783	-46.29	-13	-33.29	-52.55	1.84	8.10	V
	5673	-51.75	-13	-38.75	-60.06	2.19	10.50	V
	7566	-45.15	-13	-32.15	-54.07	2.58	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 4 / 20MHz / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3423	-36.44	-13	-23.44	-43.13	1.75	8.44	H
	5136	-48.87	-13	-35.87	-57.29	1.94	10.36	H
	6840	-50.66	-13	-37.66	-59.90	2.47	11.71	H
	3423	-45.18	-13	-32.18	-51.87	1.75	8.44	V
	5136	-49.23	-13	-36.23	-57.65	1.94	10.36	V
	6840	-50.07	-13	-37.07	-59.31	2.47	11.71	V
Middle	3447	-35.19	-13	-22.19	-41.88	1.75	8.44	H
	5172	-50.02	-13	-37.02	-58.44	1.94	10.36	H
	6894	-50.77	-13	-37.77	-60.01	2.47	11.71	H
	3447	-46.88	-13	-33.88	-53.57	1.75	8.44	V
	5172	-50.72	-13	-37.72	-59.14	1.94	10.36	V
	6894	-51.76	-13	-38.76	-61.00	2.47	11.71	V
Highest	3474	-34.88	-13	-21.88	-41.57	1.75	8.44	H
	5208	-49.46	-13	-36.46	-57.88	1.94	10.36	H
	6948	-48.68	-13	-35.68	-57.92	2.47	11.71	H
	3474	-42.59	-13	-29.59	-49.28	1.75	8.44	V
	5208	-48.76	-13	-35.76	-57.18	1.94	10.36	V
	6948	-49.36	-13	-36.36	-58.60	2.47	11.71	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 12 / 10MHz / QPSK								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1400	-55.27	-13	-42.27	-58.51	1.11	6.50	H
	2100	-58.60	-13	-45.60	-61.22	1.43	6.20	H
	2798	-59.62	-13	-46.62	-64.06	1.71	8.30	H
	1400	-64.31	-13	-51.31	-67.55	1.11	6.50	V
	2098	-60.34	-13	-47.34	-62.96	1.43	6.20	V
	2798	-59.48	-13	-46.48	-63.92	1.71	8.30	V
Middle	1406	-54.99	-13	-41.99	-58.23	1.11	6.50	H
	2110	-58.58	-13	-45.58	-61.20	1.43	6.20	H
	2812	-59.63	-13	-46.63	-64.07	1.71	8.30	H
	1406	-63.48	-13	-50.48	-66.72	1.11	6.50	V
	2110	-60.23	-13	-47.23	-62.85	1.43	6.20	V
	2812	-59.29	-13	-46.29	-63.73	1.71	8.30	V
Highest	1414	-55.22	-13	-42.22	-58.46	1.11	6.50	H
	2120	-59.97	-13	-46.97	-62.59	1.43	6.20	H
	2826	-59.81	-13	-46.81	-64.25	1.71	8.30	H
	1414	-64.37	-13	-51.37	-67.61	1.11	6.50	V
	2120	-60.40	-13	-47.40	-63.02	1.43	6.20	V
	2826	-59.44	-13	-46.44	-63.88	1.71	8.30	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.