



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

FOR

SOUNDBAR

Model : BR-70B, WSP-BR16, BR-70, BR-60, BR-60B

Trade Name: N/A

Issued to

CHRIES TECHNOLOGY CO.,LTD
BLDG 1, Honghualing Industrial Area, Yuhu Village Longgang
Distrst, shenzhen, china

Issued by

WH Technology Corp.



EMC Test Site	Xizhi Office and Lab	7F., No.262, Sec. 3, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
---------------	----------------------	--

Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of WH Technology Corp. This document may be altered or revised by WH Technology Corp. Personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS	2
1. GENERAL INFORMATION	4
2. REPORT OF MEASUREMENTS AND EXAMINATIONS	5
2.1 LIST OF MEASUREMENTS AND EXAMINATIONS	5
2.2 DESCRIPTION OF THE TESTED SAMPLES	6
3. TEST METHODOLOGY	7
3.1 GENERAL TEST PROCEDURES	7
3.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	8
3.3 DESCRIPTION OF TEST MODES	8
3.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS	9
4. TEST AND MEASUREMENT EQUIPMENT	11
4.1 CALIBRATION	11
4.2 EQUIPMENT	11
5. SECTION 15.249 REQUIREMENTS (FUNDAMENTAL/ HARMONICS)	13
5.1 TEST SETUP	13
5.2 LIMIT	13
5.3 RESULT: PASSED	13
5.4 TEST DATA:	13
6. SECTION 15.205 REQUIREMENTS (BAND EDGE)	18
6.1 TEST SETUP	18
6.2 LIMIT	18
6.3 RESULT: PASSED	19
6.4 TEST DATA:	19
7. SECTION 15.209 REQUIREMENTS (GENERAL RADIATED EMISSION)	20
7.1 TEST SETUP	20
7.2 LIMIT	21
7.3 TEST PROCEDURE	22
7.4 RESULT: PASSED	22
7.5 TEST DATA:	23
8. SECTION 15.207 REQUIREMENTS (POWERLINE CONDUCTED EMISSIONS)	27
8.1 TEST SETUP	27
8.2 LIMIT	27
8.3 TEST PROCEDURE	27
8.4 TEST SPECIFICATION	28
8.5 RESULT: PASSED	28
8.6 TEST DATA:	29
9. 20DB BANDWIDTH MEASUREMENT	31
9.1 TEST SETUP	31
9.2 LIMIT	31
9.3 TEST PROCEDURE	31
9.4 RESULT: PASSED	31
9.5 TEST DATA	32

APPENDIX 1 PHOTOS OF TEST CONFIGURATION



APPENDIX 2 PHOTOS OF EUT



1. GENERAL INFORMATION

Applicant : CHRIES TECHNOLOGY CO.,LTD

Address : BLDG 1, Honghualing Industrial Area,Yuhu Village Longgan,
Distrst,shenzhen,china

Manufacturer : CHRIES TECHNOLOGY CO.,LTD

Address : Honghualing Industrial Zone 1,Yuhu Village Longgan
Distrst,shenzhen,china

EUT : SOUNDBAR

Model Name : BR-70B, WSP-BR16, BR-70, BR-60, BR-60B

Model Differences : All models are identical except model name.

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.10-2013. The said equipment in the configuration described in this report shows the maximum emission levels emanating

FCC part 15 subpart C

Receipt Date : 19/04/2018

Final Test Date : 26/04/2018

Tested By:

Reviewed by:

Apr. 26, 2018
Date



Bing Chang/ Engineer

Apr. 26, 2018
Date



Bell Wei / Manager
Designation Number: TW2954



2. REPORT OF MEASUREMENTS AND EXAMINATIONS

2.1 LIST OF MEASUREMENTS AND EXAMINATIONS

FCC Rule	Description of Test	Result
15.207	. Conducted Emission	Pass
15.205 15.209 15.249	. Radiated Emission	Pass
15.215(c)	. 20dB Bandwidth	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass



2.2 DESCRIPTION OF THE TESTED SAMPLES

EUT Name : SOUNDBAR

Model Number :: BR-70B, WSP-BR16, BR-70, BR-60, BR-60B

FCCID Number : 2AHRPBR-70B

Receipt Date : 19/04/2018

Input Voltage : 3.7Vdc From Li-ion Battery or 5Vdc From USB Port

Power From : Inside Outside
Adaptor BATTERY AC Power Source
DC Power Source Support Unit PC or NB

Operate Frequency : Refer to the channel list as described below

Modulation Technique : GFSK

Number of Channels : 79

Channel spacing : N/A 1 MHz

Operating Mode : Simplex Half Duplex

Antenna Type : integral antenna: PCB
a dedicated antenna

Antenna gain : 0 dBi



3. TEST METHODOLOGY

All testing as described below were performed in accordance with ANSI C63.10 and FCC CFR 47 Part 15 Subpart C.

3.1 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane according to clause 15.207 and requirements of ANSI C63.10. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.



3.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.3 DESCRIPTION OF TEST MODES

Full charge battery was used for all testing and the worst radiated emission case from X,Y and Z axis evaluation was selected for testing

Description of Channel:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	39	2440	77	2478
02	2403	40	2441	78	2479
03	2404	41	2442	79	2480
04	...	42	...		



05	...	43	...		
06	...	44	...		

The EUT was tested under following modes:

Modes:

- 1. Continuous transmitting**

Channels:

- 1. 2.402 GHz 39. 2.440 GHz 78. 2.480 GHz**

The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitter signals.

Example:

Frequency used: 2402 - 2480 MHz

79 Channels (Ch 1 - Ch 79)

Hopping Sequence in Data Mode

55,48,26,33,52,35,50,65,54,67,15,08,64,49,66,53,22,25,63,04,41,05,24,43,73,07,75,28,56,37,60,39,58,69,16,
40,21,44,23,42,13,17,46,02,51,03,11,29,77,47,62,27,71,10,68,32,57,12,59,72,30,76,31,18,74,61,14,70,36,06,
09,45,19,20,34,38 78,00,01

3.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS

Setup Diagram

See test photographs attached in appendix 1 for the actual connections between EUT and support equipment.





Support Equipment

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
1.	N/A	N/A	N/A	N/A	N/A	N/A	N/A
INSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
1.	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Note: All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

Grounding: Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



4. TEST AND MEASUREMENT EQUIPMENT

4.1 CALIBRATION

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2 EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

LIST OF TEST AND MEASUREMENT EQUIPMENT

Test Site	Instrument	Manufacturer	Model No.	S/N	Next Cal. Date
Conduction	Spectrum (9K--3GHz)	R&S	FSP3	833387/010	2018/09/20
	EMI Receiver	R&S	ESHS10	830223/008	2018/05/22
	LISN	Rolf Heine Hochfrequenztechnik	NNB-2/16z	98062	2018/05/25
	ISN	Schwarzbeck	8-Wire ISN CAT5	CAT5-8158-0094	2018/09/21
	RF Cable	N/A	N/A	EMI-3	2018/10/19
Radiation	Bilog antenna(30M-1G)	ETC	MCTD2786B	BLB16M04004/J B-5-004	2019/05/03
	Double Ridged Guide Horn antenna(1G-18G)	ETC	MCTD 1209	DRH15N0 2009	2018/11/23
	Horn antenna (18G-26G)	com-power	AH-826	81000	2018/08/15
	LOOP Antenna (Below 30M)	com-power	AL-130	17117	2018/10/04
	Pre amplifier (30M-1G)	EMC INSTRUMENT	EMC9135	980334	2019/05/04
	Microwave Preamplifier (1G-18G)	EMC INSTRUMENT	EMC051845	980108&AT -18001	2018/10/23
	Pre amplifier (18G~26G)	MITEQ	JS4-18002600-3 0-5A	808329	2018/08/10



	EMI Test Receiver	R&S	ESVS30 (20M-1000MHz)	826006/002	2018/11/28
	RF Cable (open site)	EMCI	N male on end of both sides (EMI4)	30m	2018/10/19
	RF CABLE (1~26.5G)	HARBOUT INDUSTRIES	LL142MI(4M+4M)	NA	2019/03/08
	RF CABLE (1~26.5G)	HARBOUR INDUSTRIES	LL142MI(7M)	NA	2018/08/11
	Spectrum(9K-26.5GHz)	R&S	FSEM	830180/006	2019/03/25
	Spectrum (9K--40GHz)	AGILENT	8564EC	4046A0032	2019/03/01
Software	e3	AUDIX	N/A	N/A	N/A

***CALIBRATION INTERVAL OF INSTRUMENTS LISTED ABOVE IS ONE YEAR**



5. SECTION 15.249 REQUIREMENTS (FUNDAMENTAL/ HARMONICS)

5.1 TEST SETUP

Refer to paragraph 7.1.

5.2 LIMIT

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m at 3-meter)	Detector
902 - 928 2400 - 2483 5725 - 5875	114	Peak
902 - 928 2400 - 2483 5725 - 5875	94	AV

Fundamental Frequency (MHz)	Field Strength of Harmonics (dB μ V/m at 3-meter)	Detector
902 - 928 2400 - 2483 5725 - 5875	74	Peak
902 - 928 2400 - 2483 5725 - 5875	54	AV

5.3 RESULT: PASSED

5.4 TEST DATA:



Fundamental

Vertical

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2402	V	93.27	-3.15	90.12	Peak	114	94	-23.88	242	1.5
2402	V	---	---	---	Ave	114	94	---	---	---
2440	V	92.45	-3.85	88.6	Peak	114	94	-25.4	172	1.5
2440	V	---	---	---	Ave	114	94	---	---	---
2480	V	90.88	-4.21	86.67	Peak	114	94	-27.33	120	1.5
2480	V	---	---	---	Ave	114	94	---	---	---

Note:

- 1 Emission level = Reading level + Correction factor
- 2 Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
- 3 All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
- 4 Measurements above 1000 MHz, Peak detector setting:
1 MHz RBW with 1 MHz VBW (Peak Detector).
- 5 Measurements above 1000 MHz, Average detector setting:
1 MHz RBW with 1 MHz VBW (RMS Detector).
- 6 Peak detector measurement data will represent the worst case results.
- 7 Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.



Fundamental

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2402	V	90.34	-3.15	87.19	Peak	114	94	-26.81	170	1.5
2402	V	---	---	---	Ave	114	94	---	---	---
2440	V	91.02	-3.85	87.17	Peak	114	94	-26.83	48	1.5
2440	V	---	---	---	Ave	114	94	---	---	---
2480	V	89.77	-4.21	85.56	Peak	114	94	-28.44	105	1.5
2480	V	---	---	---	Ave	114	94	---	---	---

Note:

- 1 Emission level = Reading level + Correction factor
- 2 Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
- 3 All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
- 4 Measurements above 1000 MHz, Peak detector setting:
1 MHz RBW with 1 MHz VBW (Peak Detector).
- 5 Measurements above 1000 MHz, Average detector setting:
1 MHz RBW with 1 MHz VBW (RMS Detector).
- 6 Peak detector measurement data will represent the worst case results.
- 7 Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.



Harmonics

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
4804	V	48.72	5.23	53.95	Peak	74	54	-20.05	57	1.5
4804	V	---	5.23	---	Ave	74	54	---	---	---
4880	V	42.58	5.94	48.52	Peak	74	54	-25.48	105	1.5
4880	V	---	5.94	---	Ave	74	54	---	---	---
4960	V	43.66	6.35	50.01	Peak	74	54	-23.99	257	1.5
4960	V	---	6.35	---	Ave	74	54	---	---	---
7206	V	39.47	9.88	49.35	Peak	74	54	-24.65	201	1.5
7206	V	---	9.88	---	Ave	74	54	---	---	---
7320	V	36.99	10.27	47.26	Peak	74	54	-26.74	120	1.5
7320	V	---	10.27	---	Ave	74	54	---	---	---
7440	V	35.27	12.33	47.6	Peak	74	54	-26.4	91	1.5
7440	V	---	12.33	---	Ave	74	54	---	---	---
---	---	---	---	---	Peak	74	54	---	---	---
---	---	---	---	---	Ave	74	54	---	---	---

Note:

- 1 Emission level = Reading level + Correction factor
- 2 Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
- 3 All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
- 4 Measurements above 1000 MHz, Peak detector setting:
1 MHz RBW with 1 MHz VBW (Peak Detector).
- 5 Measurements above 1000 MHz, Average detector setting:
1 MHz RBW with 1 MHz VBW (RMS Detector).
- 6 Peak detector measurement data will represent the worst case results.
- 7 Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.



Harmonics

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
4804	V	45.26	5.23	50.49	Peak	74	54	-23.51	95	1.5
4804	V	---	5.23	---	Ave	74	54	---	---	---
4880	V	45.17	5.94	51.11	Peak	74	54	-22.89	82	1.5
4880	V	---	5.94	---	Ave	74	54	---	---	---
4960	V	42.05	6.35	48.4	Peak	74	54	-25.6	1.4	1.5
4960	V	---	6.35	---	Ave	74	54	---	---	---
7206	V	40.55	9.88	50.43	Peak	74	54	-23.57	214	1.5
7206	V	---	9.88	---	Ave	74	54	---	---	---
7320	V	37.35	10.27	47.62	Peak	74	54	-26.38	88	1.5
7320	V	---	10.27	---	Ave	74	54	---	---	---
7440	V	36.22	12.33	48.55	Peak	74	54	-25.45	45	1.5
7440	V	---	12.33	---	Ave	74	54	---	---	---
---	---	---	---	---	Peak	74	54	---	---	---
---	---	---	---	---	Ave	74	54	---	---	---

Note:

- 1 Emission level = Reading level + Correction factor
- 2 Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
- 3 All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
- 4 Measurements above 1000 MHz, Peak detector setting:
1 MHz RBW with 1 MHz VBW (Peak Detector).
- 5 Measurements above 1000 MHz, Average detector setting:
1 MHz RBW with 1 MHz VBW (RMS Detector).
- 6 Peak detector measurement data will represent the worst case results.
- 7 Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.



6. SECTION 15.205 REQUIREMENTS (BAND EDGE)

6.1 TEST SETUP

Refer to paragraph 7.1.

6.2 LIMIT

Restricted Bands:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Operation within the bands:

902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

Frequency (Hz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
1.705-30	30 (at 30-meter)	49.5
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54



6.3 RESULT: PASSED

6.4 TEST DATA:

<2400 MHz						Fundamental Frequency: 2402 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2390	H	44.25	-3.04	41.21	Peak	74	54	-32.79	102	1
---	H	---	---	---	Ave	74	54	---	---	---
2390	V	40.34	-3.07	37.27	Peak	74	54	-36.73	177	1
---	V	---	---	---	Ave	74	54	---	---	---
>2483.5 MHz						Fundamental Frequency: 2480 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2483.50	H	46.87	-4.25	42.62	Peak	74	54	-31.38	82	1
---	H	---	---	---	Ave	74	54	---	---	---
2483.50	V	42.55	-4.25	38.3	Peak	74	54	-35.7	205	1
---	V	---	---	---	Ave	74	54	---	---	---


Note:

- 8 Emission level = Reading level + Correction factor
- 9 Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
- 10 All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
- 11 Measurements above 1000 MHz, Peak detector setting:
1 MHz RBW with 1 MHz VBW (Peak Detector).
- 12 Measurements above 1000 MHz, Average detector setting:
1 MHz RBW with 1 MHz VBW (RMS Detector).
- 13 Peak detector measurement data will represent the worst case results.
- 14 Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.



7. SECTION 15.209 REQUIREMENTS (GENERAL RADIATED EMISSION)

7.1 TEST SETUP

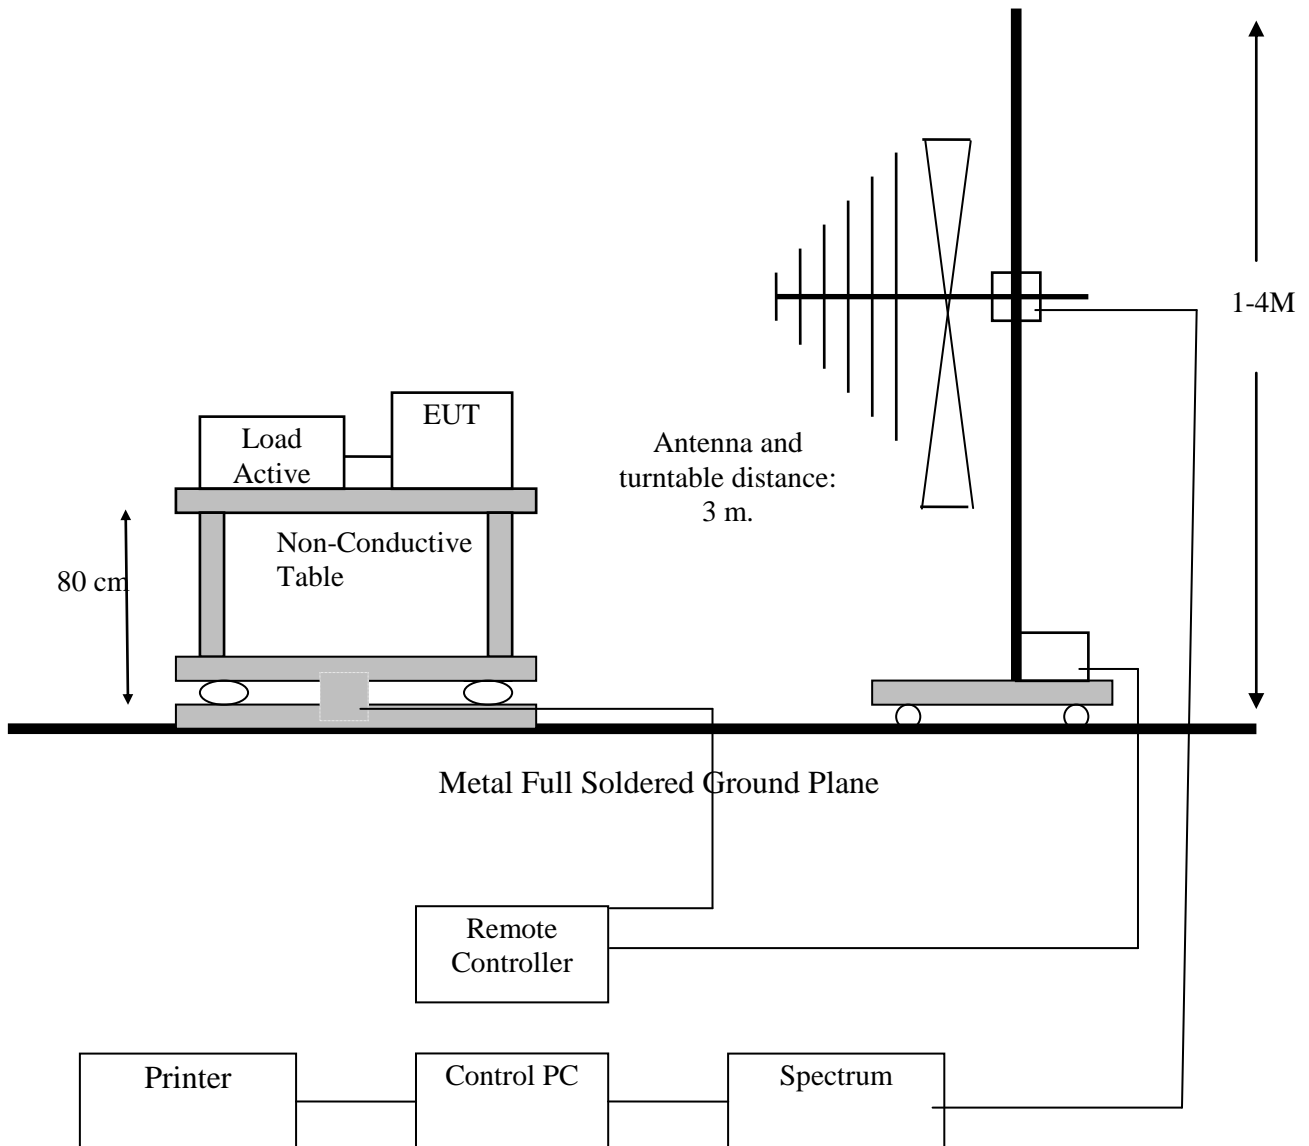



7.2 LIMIT

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
1.705-30	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500*	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*
In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ($\mu\text{V}/\text{m}$ at 3-meter)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$ at 3-meter)
1.705-30	30 (at 30-meter)	49.5
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54



7.3 TEST PROCEDURE

1. The EUT was placed on a turntable, which was 0.8m above ground plane.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
6. Repeated above procedures until the measurements for all frequencies are completed.

7.4 RESULT: PASSED



7.5 TEST DATA:

All frequencies not described in this test report and within the range of the general radiated emission limits are not detectable significantly. The table as below is representing worst emissions found.

TEST RESULTS (BELOW 30MHz)

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $20 \log (\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.



TEST RESULTS (30-1000MHz)


Vertical

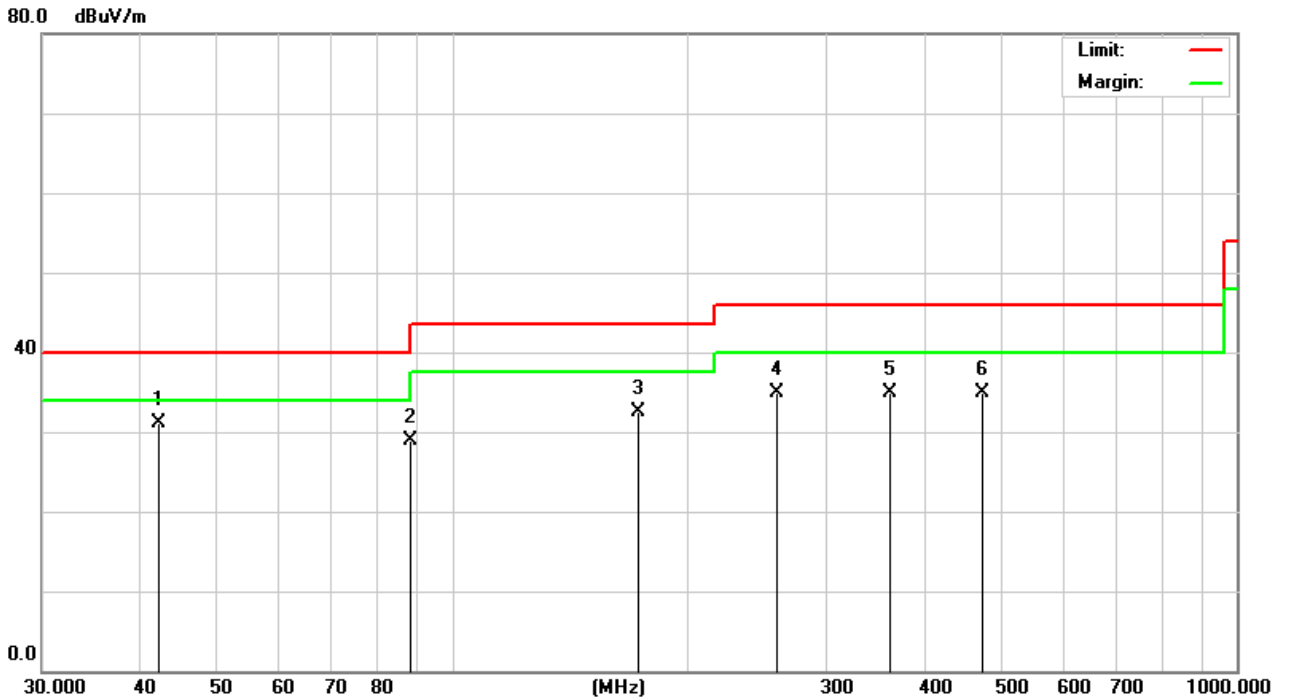

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	42.1500	46.27	-15.07	31.20	40.00	-8.80	QP
2		88.2000	47.33	-18.45	28.88	43.50	-14.62	QP
3		172.5300	49.37	-16.96	32.41	43.50	-11.09	QP
4		258.3500	47.44	-12.44	35.00	46.00	-11.00	QP
5		360.4200	46.00	-11.00	35.00	46.00	-11.00	QP
6		472.3500	43.80	-8.80	35.00	46.00	-11.00	QP



Horizontal

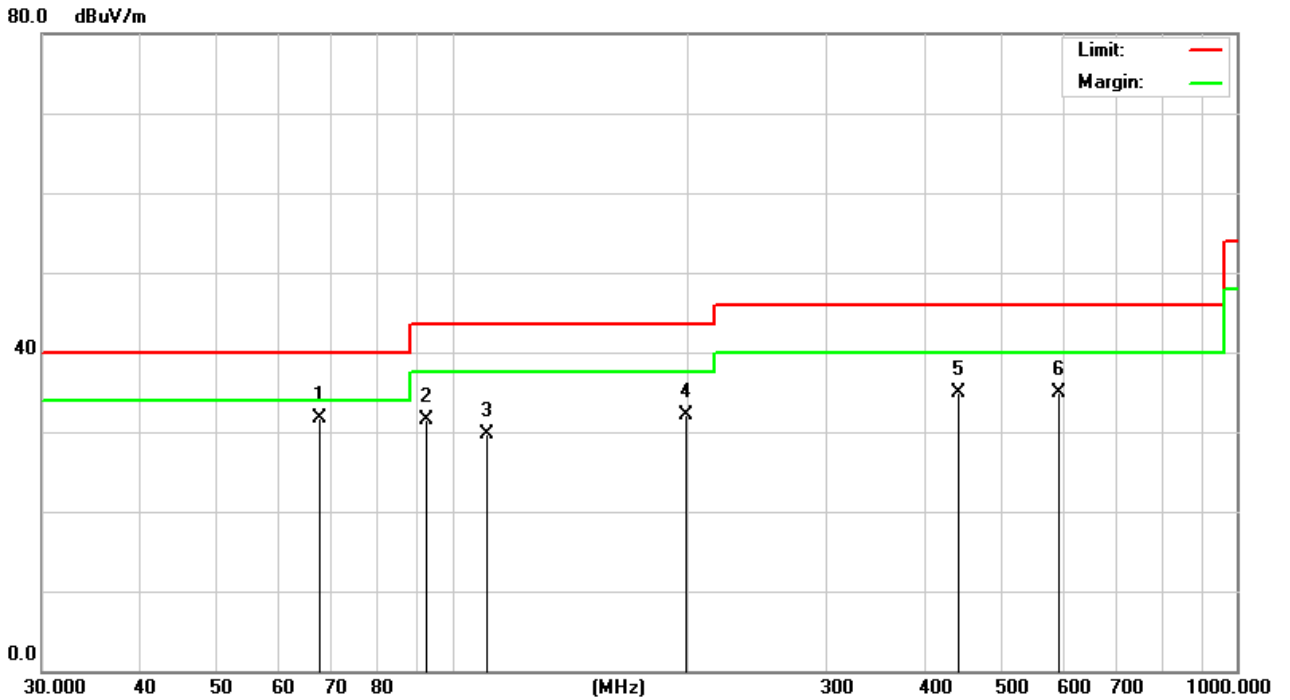

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	67.3500	53.11	-21.50	31.61	40.00	-8.39	QP
2		92.3700	49.37	-17.80	31.57	43.50	-11.93	QP
3		110.2500	45.23	-15.53	29.70	43.50	-13.80	QP
4		197.5200	50.76	-18.62	32.14	43.50	-11.36	QP
5		440.3600	44.63	-9.63	35.00	46.00	-11.00	QP
6		593.5000	40.05	-5.05	35.00	46.00	-11.00	QP




Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements from 9 kHz to 150 kHz, Peak detector setting: 100 Hz RBW
5. Measurements from 150 kHz to 30MHz, Peak detector setting: 10 kHz RBW
6. Measurements from 30 MHz to 1000 MHz, Peak detector setting: 100 kHz RBW
7. Measurements from 9 kHz to 150 kHz, CISPR Quasi-Peak detector: 200 Hz RBW
8. Measurements from 150 kHz to 30MHz, CISPR Quasi-Peak detector: 9 kHz RBW
9. Measurements from 30 MHz to 1000 MHz, CISPR Quasi-Peak detector: 120 kHz RBW
10. Peak detector measurement data will represent the worst case results.



8. SECTION 15.207 REQUIREMENTS (POWERLINE CONDUCTED EMISSIONS)

8.1 TEST SETUP

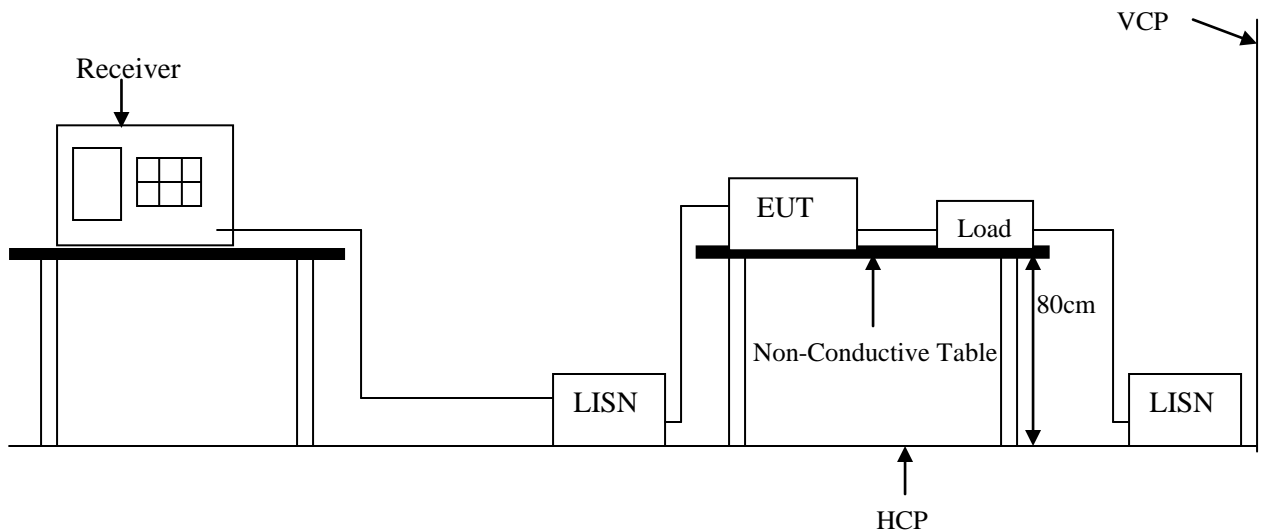

8.2 LIMIT

Frequency range (MHz)	CLASS B	
	QP dB(uV)	Average dB(uV)
0.15-0.5	66 - 56 dBuV	56 - 46 dBuV
0.5-5.0	56 dBuV	46 dBuV
5.0-30.0	60 dBuV	50 dBuV

Remark: In the above table, the tighter limit applies at the band edges.

8.3 TEST PROCEDURE

The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). It provides a 50 ohm / 50 μ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm / 50 μ H coupling impedance with 50 ohm termination. (Please refer to the block diagram of the test setup and photograph.)

Both sides of AC line are checked for the maximum conducted emission interference. In order to find the maximum emissions, the relating positions of equipment and all of the interference cables must be changed according to EN 55022 regulations: The measurement procedure on conducted emission interference.

The resolution bandwidth of the field strength meter is set at 9 KHz.



8.4 TEST SPECIFICATION

According to PART15.207

8.5 RESULT: PASSED


EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150KHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9KHz



8.6 TEST DATA:


Power	: From System	Pol/Phase	: LINE
Test Mode 1	: GFSK	Temperature	: 23 °C
Test Date	: Apr. 23, 2018	Humidity	: 55 %
Memo			

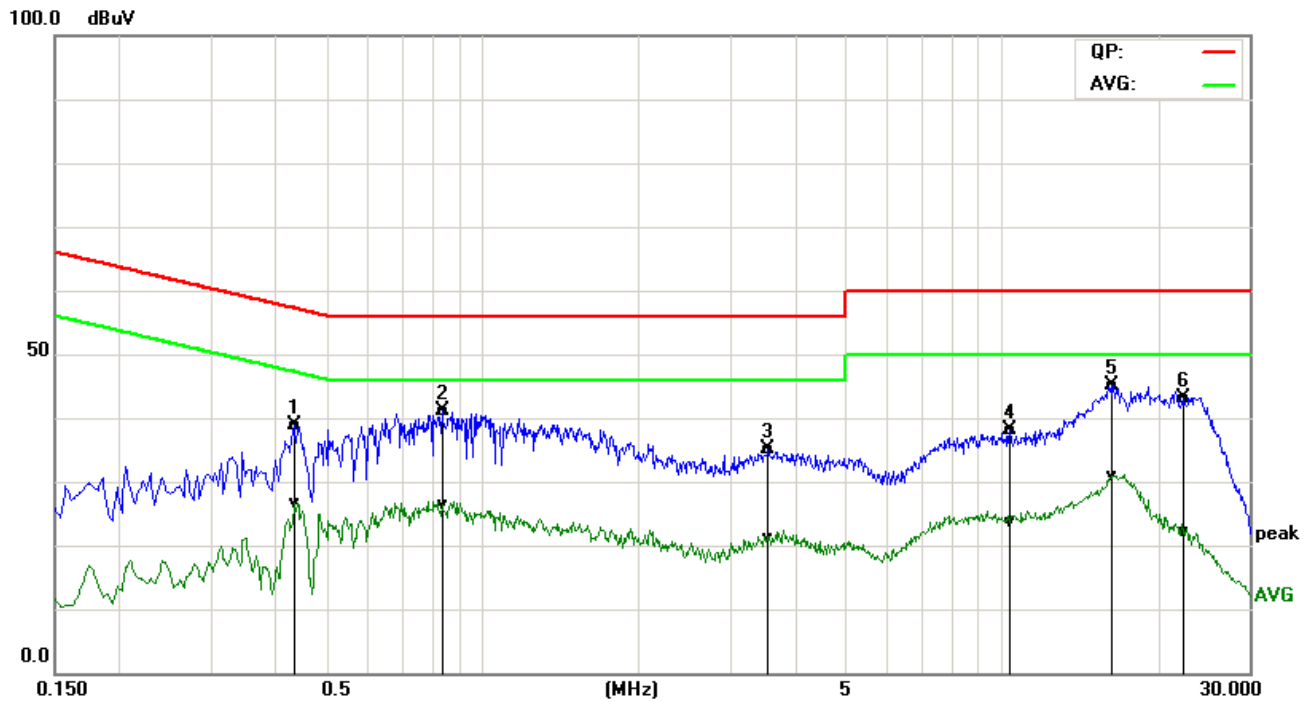

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.4340	28.91	16.78	9.91	38.82	26.69	57.18	47.18	-18.36	-20.49	Pass
2P	0.8380	31.12	16.30	10.00	41.12	26.30	56.00	46.00	-14.88	-19.70	Pass
3P	3.5620	25.07	11.19	10.06	35.13	21.25	56.00	46.00	-20.87	-24.75	Pass
4P	10.3660	28.05	13.52	10.09	38.14	23.61	60.00	50.00	-21.86	-26.39	Pass
5*	16.3900	34.82	20.48	10.33	45.15	30.81	60.00	50.00	-14.85	-19.19	Pass
6P	22.3860	32.54	11.54	10.65	43.19	22.19	60.00	50.00	-16.81	-27.81	Pass



Power	: From System	Pol/Phase	: NEUTRAL
Test Mode 1	: GFSK	Temperature	: 23 °C
Test Date	: Apr. 23, 2018	Humidity	: 55 %
Memo			

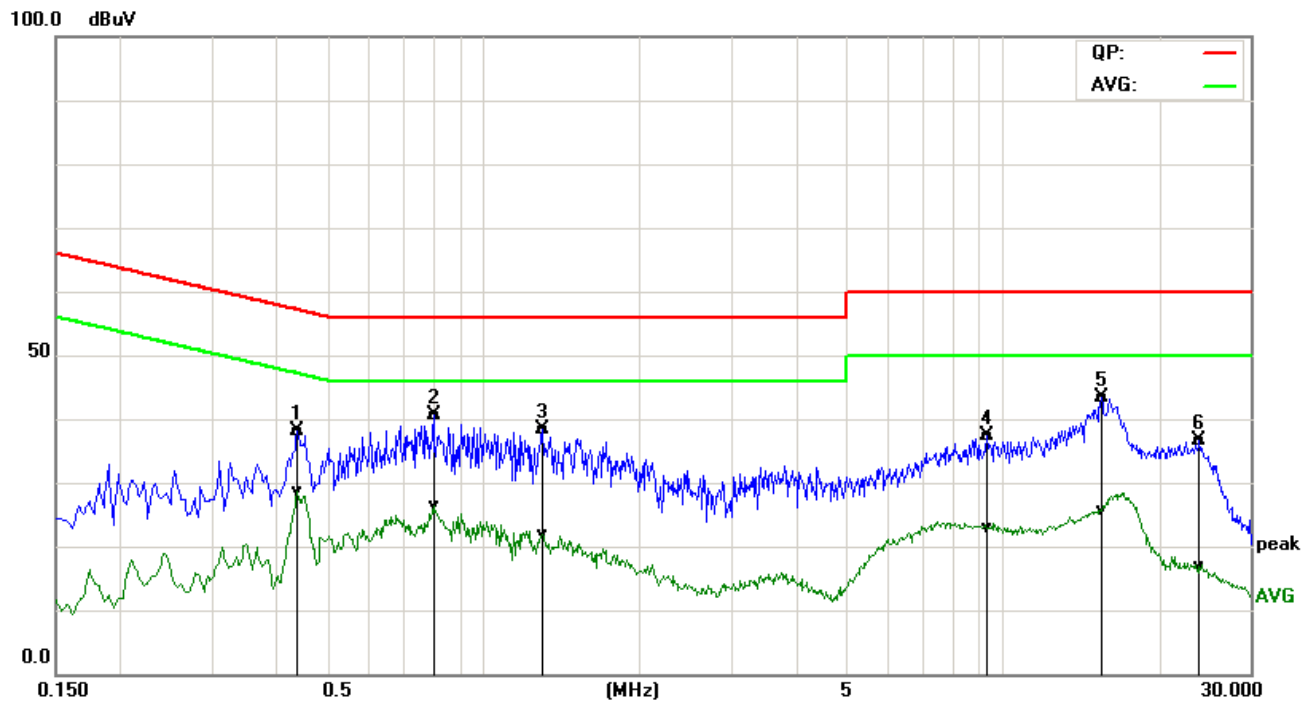


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.4380	28.24	18.74	9.91	38.15	28.65	57.10	47.10	-18.95	-18.45	Pass
2*	0.8020	30.63	16.44	9.99	40.62	26.43	56.00	46.00	-15.38	-19.57	Pass
3P	1.3020	28.42	11.93	10.03	38.45	21.96	56.00	46.00	-17.55	-24.04	Pass
4P	9.3340	27.27	12.93	10.06	37.33	22.99	60.00	50.00	-22.67	-27.01	Pass
5P	15.5180	33.00	15.36	10.28	43.28	25.64	60.00	50.00	-16.72	-24.36	Pass
6P	23.9900	25.84	6.10	10.72	36.56	16.82	60.00	50.00	-23.44	-33.18	Pass



9. 20DB BANDWIDTH MEASUREMENT

9.1 TEST SETUP



9.2 LIMIT

N/A

9.3 TEST PROCEDURE

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW=30KHz and VBW=100KHz.
- c. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.
- d. The 20 dB Bandwidth was measured and recorded.

9.4 RESULT: PASSED



9.5 TEST DATA


Test Date: Apr. 24, 2018

Temperature: 22°C


Atmospheric pressure: 1025 hPa

Humidity: 55%


Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1.0944	PASS
2441 MHz	1.0918	PASS
2480 MHz	1.0935	PASS

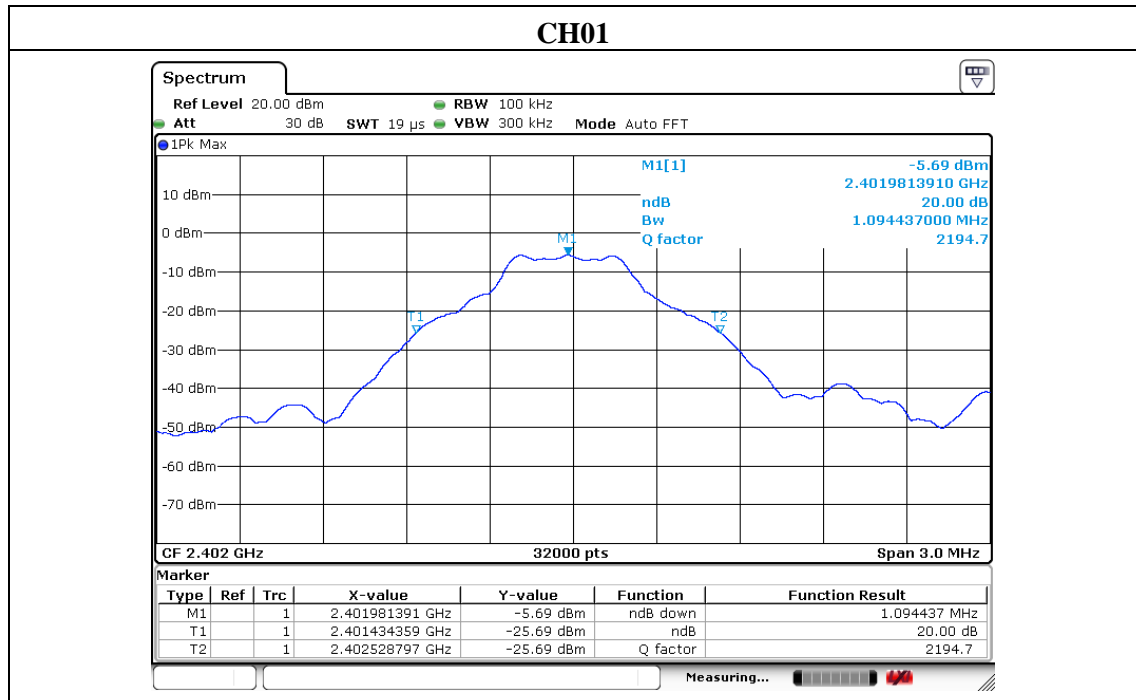

Date: 12 JUN 2017 17:54:10

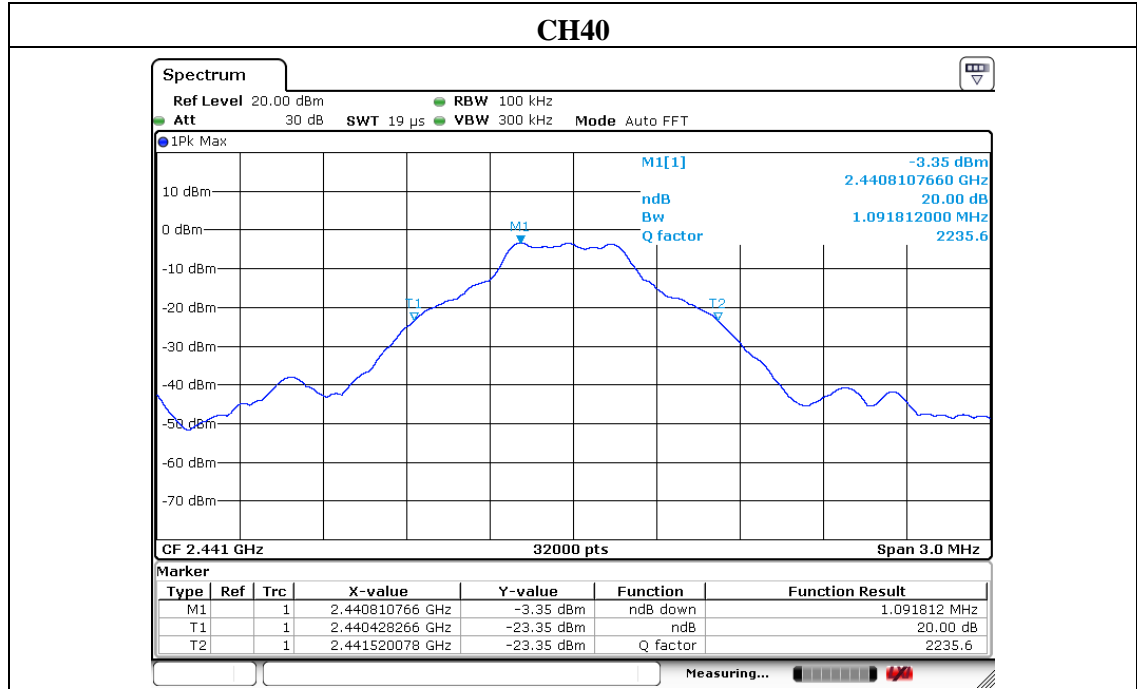


Date: 12 JUN 2017 17:54:39

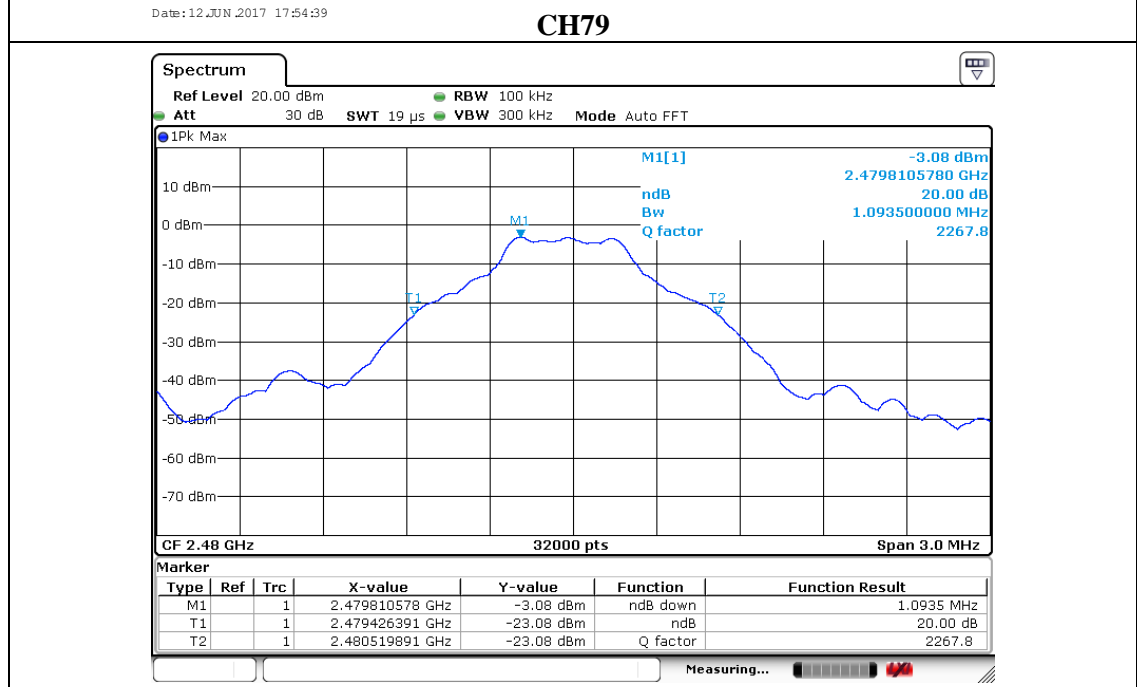

Date: 12 JUN 2017 17:54:53




APPENDIX 1 PHOTOS OF TEST CONFIGURATION

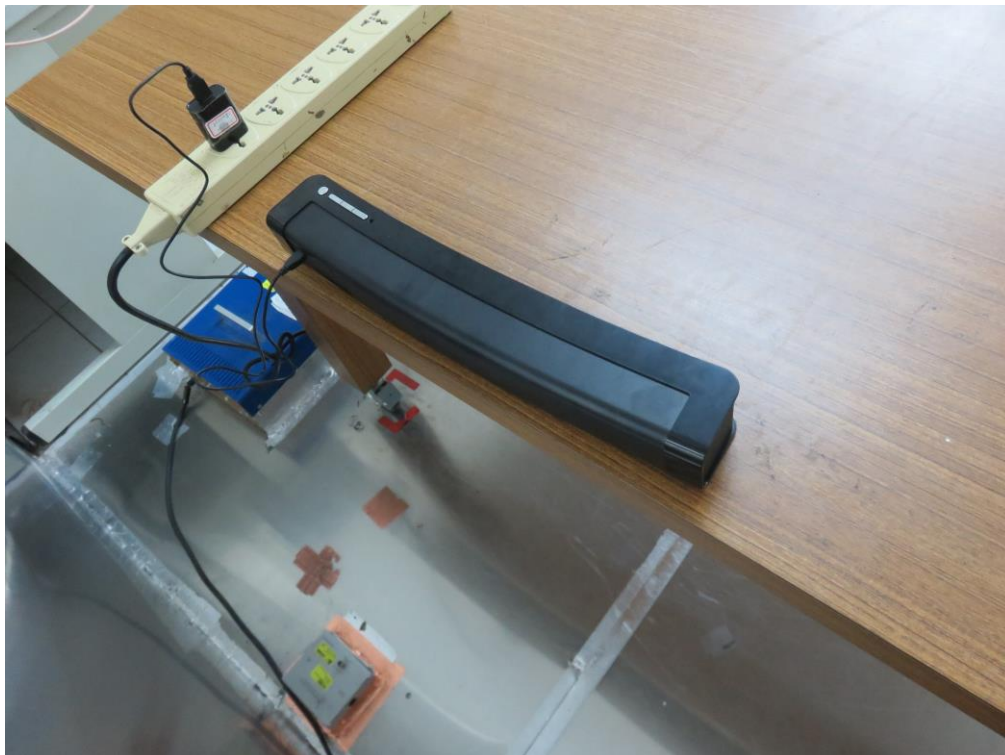









APPENDIX 2 PHOTOS OF EUT

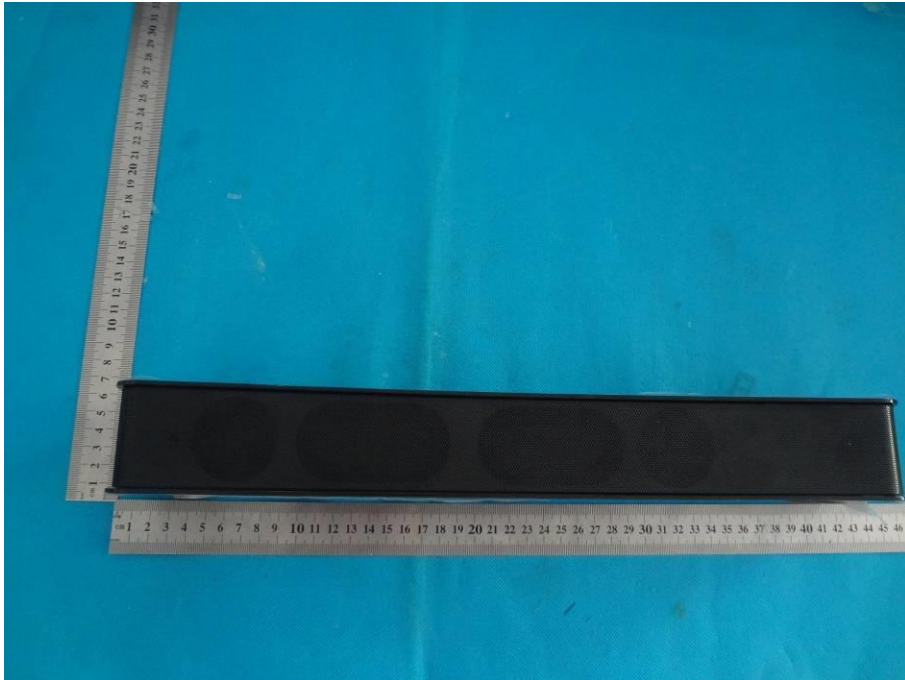




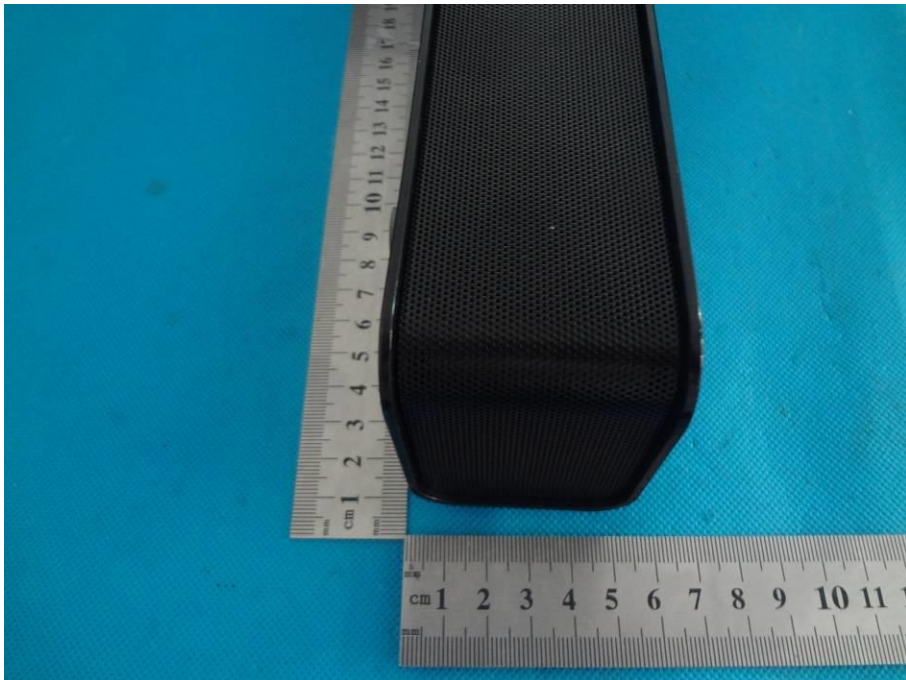

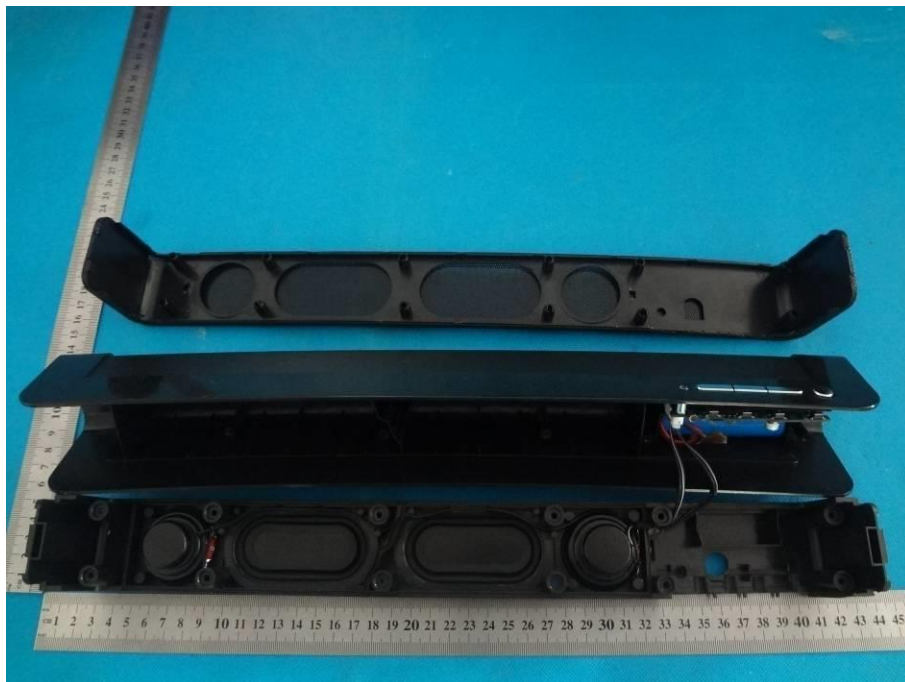

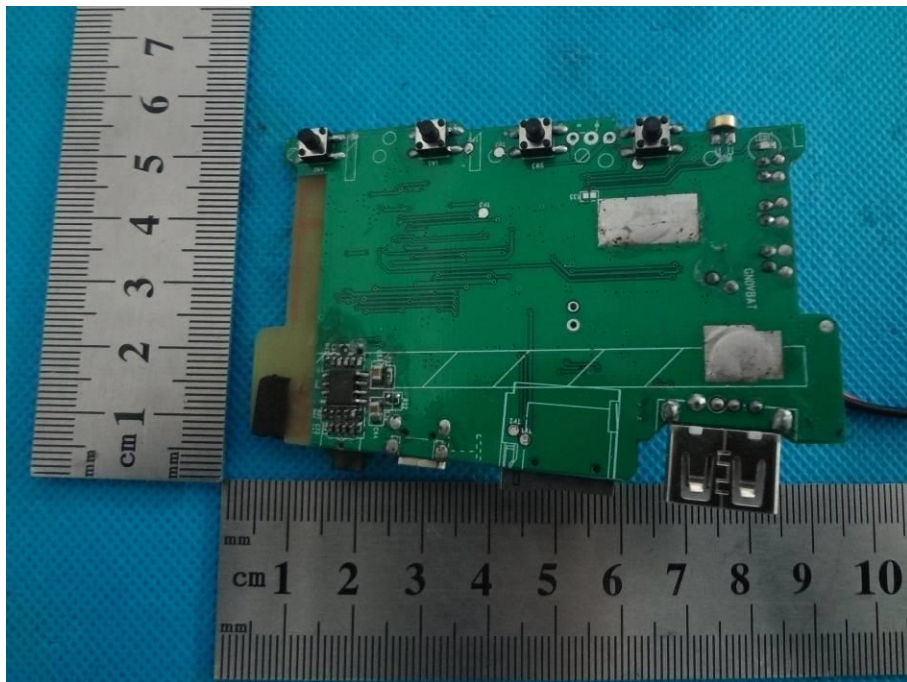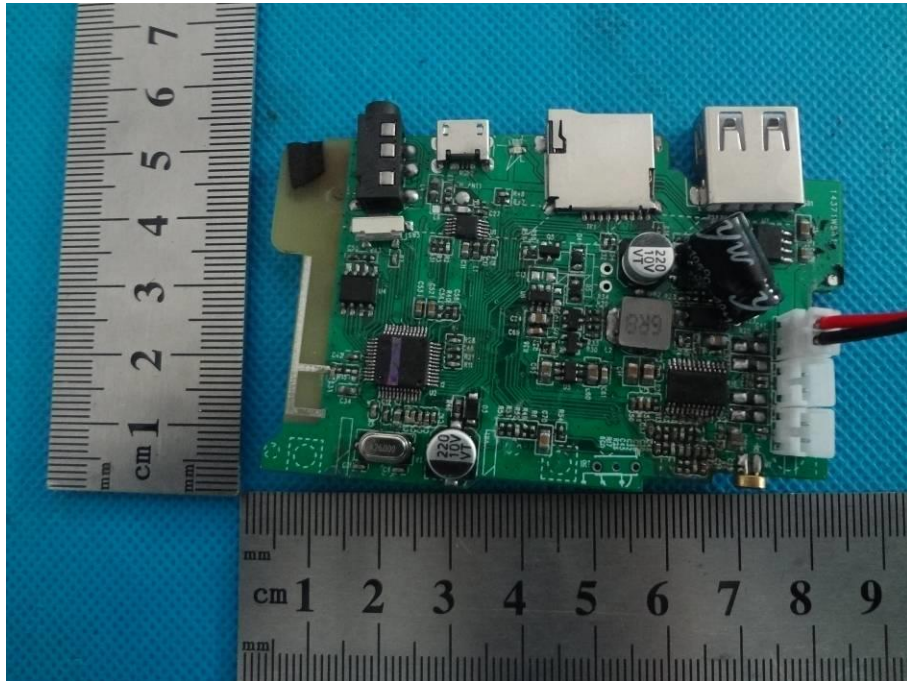

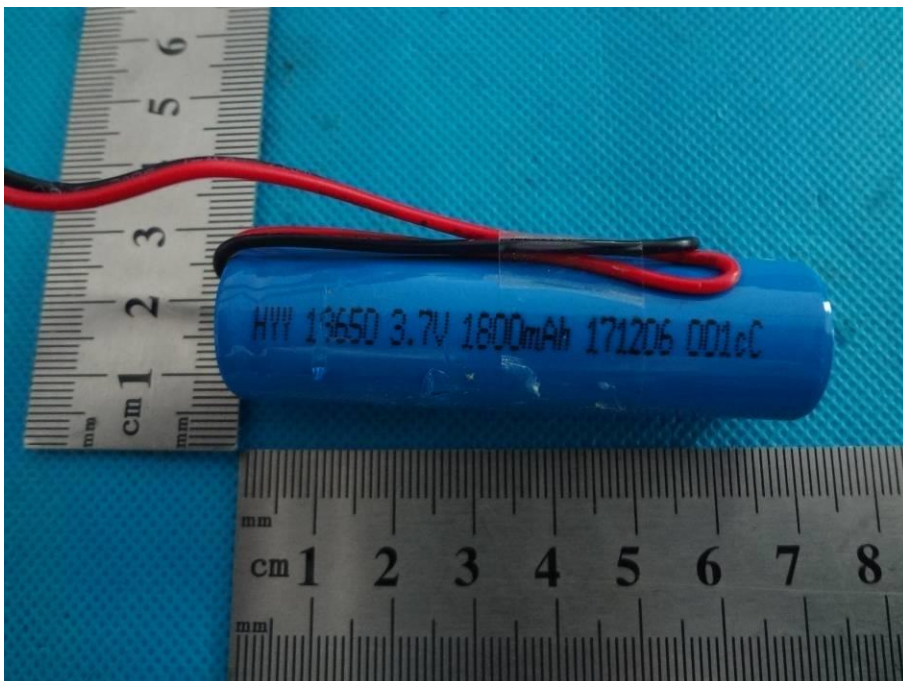

*****THE END*****