

# TEST REPORT

Product Name: 32 INCH DLED TV  
FCC ID: 2AHU2-JTV3223DCS  
Trademark: JENSEN  
Model Number: JTV3223DCS  
Prepared For: ASA Electronics Shenzhen Limited  
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China  
Manufacturer: ASA Electronics Shenzhen Limited  
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Jan. 12, 2023  
Sample tested Date: Jan. 12, 2023 to Feb. 07, 2023  
Issue Date: Feb. 07, 2023  
Report No.: CTB230130022RF  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.  
Compiled by: Reviewed by: Approved by:

Chen Zheng

Arron Liu



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b> .....	3
<b>2. TEST SUMMARY</b> .....	4
<b>3. MEASUREMENT UNCERTAINTY</b> .....	5
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	6
4.1 Product Information .....	6
4.2 Test Setup Configuration .....	6
4.3 Support Equipment .....	6
4.4 Channel List .....	6
4.5 Test Mode .....	7
4.6 Test Environment .....	7
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	8
5.1 Test Facility .....	8
5.2 Test Instrument Used .....	8
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	10
6.1 Block Diagram Of Test Setup .....	10
6.2 Limit .....	10
6.3 Test procedure .....	10
6.4 Test Result .....	12
<b>7. RADIATED SPURIOUS EMISSION</b> .....	13
7.1 Block Diagram Of Test Setup .....	13
7.2 Limit .....	13
7.3 Test procedure .....	14
7.4 Test Result .....	15
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	37
8.1 Block Diagram Of Test Setup .....	37
8.2 Limit .....	37
8.3 Test procedure .....	37
8.4 Test Result .....	38
<b>9. CONDUCTED OUTPUT POWER</b> .....	53
9.1 Block Diagram Of Test Setup .....	53
9.2 Limit .....	53
9.3 Test procedure .....	53
9.4 Test Result .....	54
<b>10. 6DB OCCUPIED BANDWIDTH</b> .....	55
10.1 Block Diagram Of Test Setup .....	55
10.2 Limit .....	55
10.3 Test procedure .....	55
10.4 Test Result .....	56
<b>11. POWER SPECTRAL DENSITY</b> .....	66
11.1 Block Diagram Of Test Setup .....	66
11.2 Limit .....	66
11.3 Test procedure .....	66
11.4 Test Result .....	67
<b>12. ANTENNA REQUIREMENT</b> .....	76
<b>13. EUT PHOTOGRAPHS</b> .....	77
<b>14. EUT TEST SETUP PHOTOGRAPHS</b> .....	78

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB230130022RF	Feb. 07, 2023	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):	JTV3223DCS
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 16.720dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (2.4G) : ANT1: 0.92dBi ANT2: 0.92dBi
Ratings:	DC 12V by DC power supply

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

##### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

##### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.2dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 4.01dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1dBi

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XLBLQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22




21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

## 6 AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

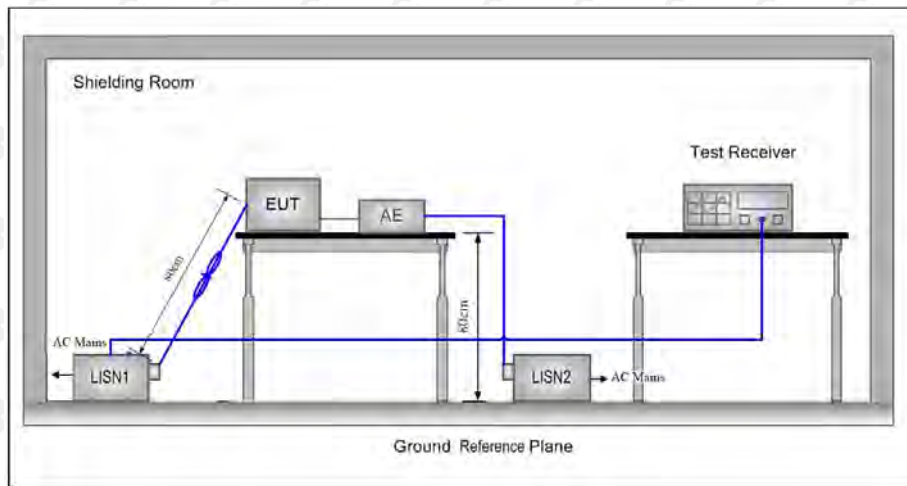

### 6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

#### 6.4 Test Result

N/A

NOTE: This EUT is powered by DC power only, this test item is not applicabl

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

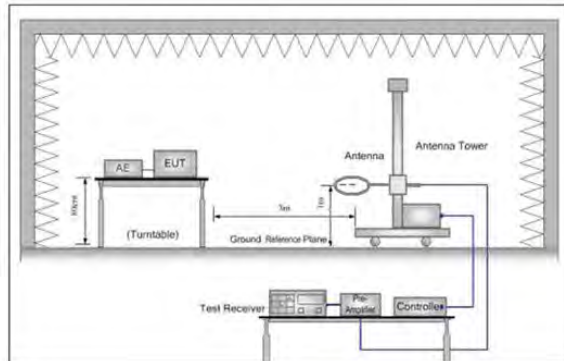


Figure 1. Below 30MHz

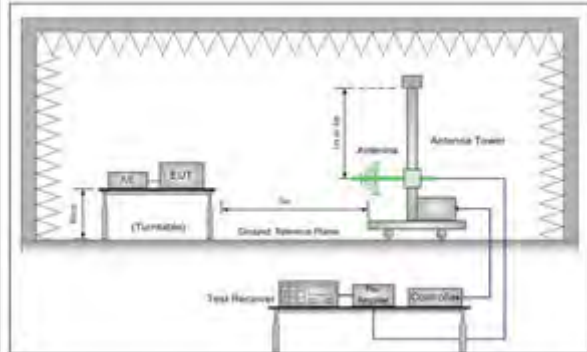


Figure 2. 30MHz to 1GHz

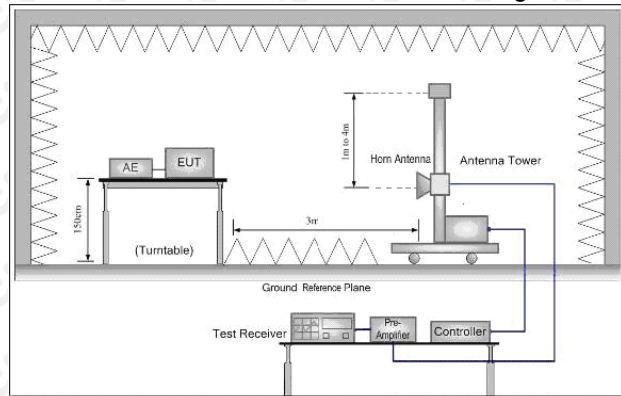


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

### 7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:  
Antenna polarity: H



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		46.5030	34.58	-6.57	28.01	40.00	-11.99	QP
2		227.2918	41.33	-8.81	32.52	46.00	-13.48	QP
3	!	300.8943	45.87	-5.44	40.43	46.00	-5.57	QP
4		377.9211	41.53	-3.26	38.27	46.00	-7.73	QP
5	*	755.3873	38.56	4.92	43.48	46.00	-2.52	QP
6	!	831.8574	35.23	6.19	41.42	46.00	-4.58	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	46.9125	42.96	-6.57	36.39	40.00	-3.61	QP
2		150.5378	40.00	-5.46	34.54	43.50	-8.96	QP
3		227.2918	43.87	-8.81	35.06	46.00	-10.94	QP
4		377.9211	38.87	-3.26	35.61	46.00	-10.39	QP
5	!	679.9600	37.60	3.58	41.18	46.00	-4.82	QP
6	!	755.3873	36.58	4.92	41.50	46.00	-4.50	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.



Above 1 GHz Test Results:

ANT2 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.17	-3.64	62.53	74	-11.47	peak
4824	48.71	-3.64	45.07	54	-8.93	AVG
7236	59.28	-0.95	58.33	74	-15.67	peak
7236	46.60	-0.95	45.65	54	-8.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.51	-3.64	61.87	74	-12.13	peak
4824	46.94	-3.64	43.30	54	-10.70	AVG
7236	58.81	-0.95	57.86	74	-16.14	peak
7236	45.76	-0.95	44.81	54	-9.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT2 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	64.40	-3.51	60.89	74	-13.11	peak
4874	48.66	-3.51	45.15	54	-8.85	AVG
7311	58.34	-0.82	57.52	74	-16.48	peak
7311	45.37	-0.82	44.55	54	-9.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	65.03	-3.51	61.52	74	-12.48	peak
4874	48.52	-3.51	45.01	54	-8.99	AVG
7311	58.21	-0.82	57.39	74	-16.61	peak
7311	43.57	-0.82	42.75	54	-11.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

## ANT2 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	64.89	-3.43	61.46	74	-12.54	peak
4924	48.14	-3.43	44.71	54	-9.29	AVG
7386	58.33	-0.75	57.58	74	-16.42	peak
7386	43.59	-0.75	42.84	54	-11.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	62.69	-3.43	59.26	74	-14.74	peak
4924	47.32	-3.43	43.89	54	-10.11	AVG
7386	57.41	-0.75	56.66	74	-17.34	peak
7386	42.47	-0.75	41.72	54	-12.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.21	-3.64	62.57	74	-11.43	peak
4824	48.84	-3.64	45.20	54	-8.80	AVG
7236	58.36	-0.95	57.41	74	-16.59	peak
7236	45.91	-0.95	44.96	54	-9.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.46	-3.64	60.82	74	-13.18	peak
4824	47.91	-3.64	44.27	54	-9.73	AVG
7236	59.45	-0.95	58.50	74	-15.50	peak
7236	45.34	-0.95	44.39	54	-9.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## ANT2 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	63.97	-3.51	60.46	74	-13.54	peak
4874	49.07	-3.51	45.56	54	-8.44	AVG
7311	60.39	-0.82	59.57	74	-14.43	peak
7311	45.88	-0.82	45.06	54	-8.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	64.45	-3.51	60.94	74	-13.06	peak
4874	46.78	-3.51	43.27	54	-10.73	AVG
7311	56.35	-0.82	55.53	74	-18.47	peak
7311	42.59	-0.82	41.77	54	-12.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

**ANT2 HIGH CH11 (802.11g Mode)/2462**

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.79	-3.43	59.36	74	-14.64	peak
4924	47.48	-3.43	44.05	54	-9.95	AVG
7386	58.48	-0.75	57.73	74	-16.27	peak
7386	41.83	-0.75	41.08	54	-12.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.90	-3.43	59.47	74	-14.53	peak
4924	48.56	-3.43	45.13	54	-8.87	AVG
7386	57.72	-0.75	56.97	74	-17.03	peak
7386	42.14	-0.75	41.39	54	-12.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

**Remark**

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	62.52	-3.64	58.88	74	-15.12	peak
4824	48.16	-3.64	44.52	54	-9.48	AVG
7236	58.33	-0.95	57.38	74	-16.62	peak
7236	43.65	-0.95	42.70	54	-11.30	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	66.59	-3.64	62.95	74	-11.05	peak
4824	48.16	-3.64	44.52	54	-9.48	AVG
7236	57.83	-0.95	56.88	74	-17.12	peak
7236	45.50	-0.95	44.55	54	-9.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.09	-3.51	58.58	74.00	-15.42	peak
4874.00	50.29	-3.51	46.78	54.00	-7.22	AVG
7311.00	59.55	-0.82	58.73	74.00	-15.27	peak
7311.00	44.64	-0.82	43.82	54.00	-10.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.54	-3.51	61.03	74.00	-12.97	peak
4874.00	47.13	-3.51	43.62	54.00	-10.38	AVG
7311.00	58.42	-0.82	57.60	74.00	-16.40	peak
7311.00	42.90	-0.82	42.08	54.00	-11.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



ANT1+ANT2 HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.95	-3.43	60.52	74	-13.48	peak
4924	46.94	-3.43	43.51	54	-10.49	AVG
7386	58.09	-0.75	57.34	74	-16.66	peak
7386	41.64	-0.75	40.89	54	-13.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.15	-3.43	61.72	74	-12.28	peak
4924	47.58	-3.43	44.15	54	-9.85	AVG
7386	56.91	-0.75	56.16	74	-17.84	peak
7386	42.74	-0.75	41.99	54	-12.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.08	-3.63	60.45	74	-13.55	peak
4844	47.37	-3.63	43.74	54	-10.26	AVG
7266	58.46	-0.94	57.52	74	-16.48	peak
7266	44.38	-0.94	43.44	54	-10.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.62	-3.63	61.99	74	-12.01	peak
4844	48.68	-3.63	45.05	54	-8.95	AVG
7266	57.94	-0.94	57.00	74	-17.00	peak
7266	45.75	-0.94	44.81	54	-9.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

## ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	64.15	-3.51	60.64	74	-13.36	peak
4874	49.01	-3.51	45.50	54	-8.50	AVG
7311	60.74	-0.82	59.92	74	-14.08	peak
7311	45.43	-0.82	44.61	54	-9.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	62.28	-3.51	58.77	74	-15.23	peak
4874	46.47	-3.51	42.96	54	-11.04	AVG
7311	56.67	-0.82	55.85	74	-18.15	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

## ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4904	62.51	-3.43	59.08	74	-14.92	peak
4904	46.73	-3.43	43.30	54	-10.70	AVG
7356	55.94	-0.75	55.19	74	-18.81	peak
7356	41.29	-0.75	40.54	54	-13.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4904	62.42	-3.43	58.99	74	-15.01	peak
4904	45.64	-3.43	42.21	54	-11.79	AVG
7356	56.34	-0.75	55.59	74	-18.41	peak
7356	43.79	-0.75	43.04	54	-10.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**Restricted bands around fundamental frequency (Radiated)**

Operation Mode:  
ANT 2 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.24	-5.81	52.43	74	-21.57	peak
2390	/	-5.81	/	54	/	AVG
2399	63.61	-5.84	57.77	74	-16.23	peak
2399	49.71	-5.84	43.87	54	-10.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.59	-5.81	50.78	74	-23.22	peak
2390	/	-5.81	/	54	/	AVG
2399	62.27	-5.84	56.43	74	-17.57	peak
2399	46.25	-5.84	40.41	54	-13.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: ANT2 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.46	-5.65	50.81	74	-23.19	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.42	-5.65	50.77	74	-23.23	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT2 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	58.19	-5.81	52.38	74	-21.62	peak
2390	/	-5.81	/	54	/	AVG
2399	61.92	-5.84	56.08	74	-17.92	peak
2399	47.53	-5.84	41.69	54	-12.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	56.13	-5.81	50.32	74	-23.68	peak
2390	/	-5.81	/	54	/	AVG
2399	62.30	-5.84	56.46	74	-17.54	peak
2399	45.97	-5.84	40.13	54	-13.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode: ANT2 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.85	-5.65	51.20	74	-22.80	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.05	-5.65	52.40	74	-21.60	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.46	-5.81	50.65	74	-23.35	peak
2390	/	-5.81	/	54	/	AVG
2399	63.88	-5.84	58.04	74	-15.96	peak
2399	47.99	-5.84	42.15	54	-11.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.29	-5.81	50.48	74	-23.52	peak
2390	/	-5.81	/	54	/	AVG
2399	61.50	-5.84	55.66	74	-18.34	peak
2399	47.49	-5.84	41.65	54	-12.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.34	-5.65	51.69	74	-22.31	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.12	-5.65	51.47	74	-22.53	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.45	-5.81	52.64	74	-21.36	peak
2390	/	-5.81	/	54	/	AVG
2399	62.73	-5.84	56.89	74	-17.11	peak
2399	47.32	-5.84	41.48	54	-12.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.20	-5.81	52.39	74	-21.61	peak
2390	/	-5.81	/	54	/	AVG
2399	61.62	-5.84	55.78	74	-18.22	peak
2399	46.24	-5.84	40.40	54	-13.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.45	-5.65	50.80	74	-23.20	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.87	-5.65	52.22	74	-21.78	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

**8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS**

8.1 Block Diagram Of Test Setup

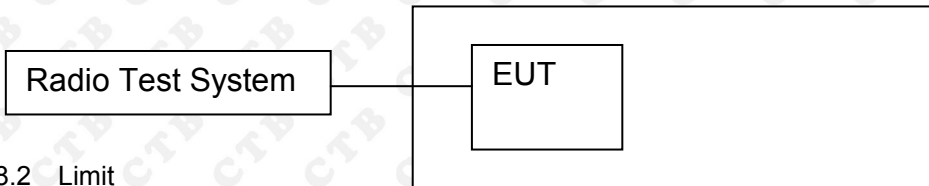

8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
 Blow 30MHz:  
 RBW = 100kHz, VBW = 300kHz, Sweep = auto  
 Detector function = peak, Trace = max hold  
 Above 30MHz:  
 RBW = 100KHz, VBW = 300KHz, Sweep = auto  
 Detector function = peak, Trace = max hold


## 8.4 Test Result

ANT1:

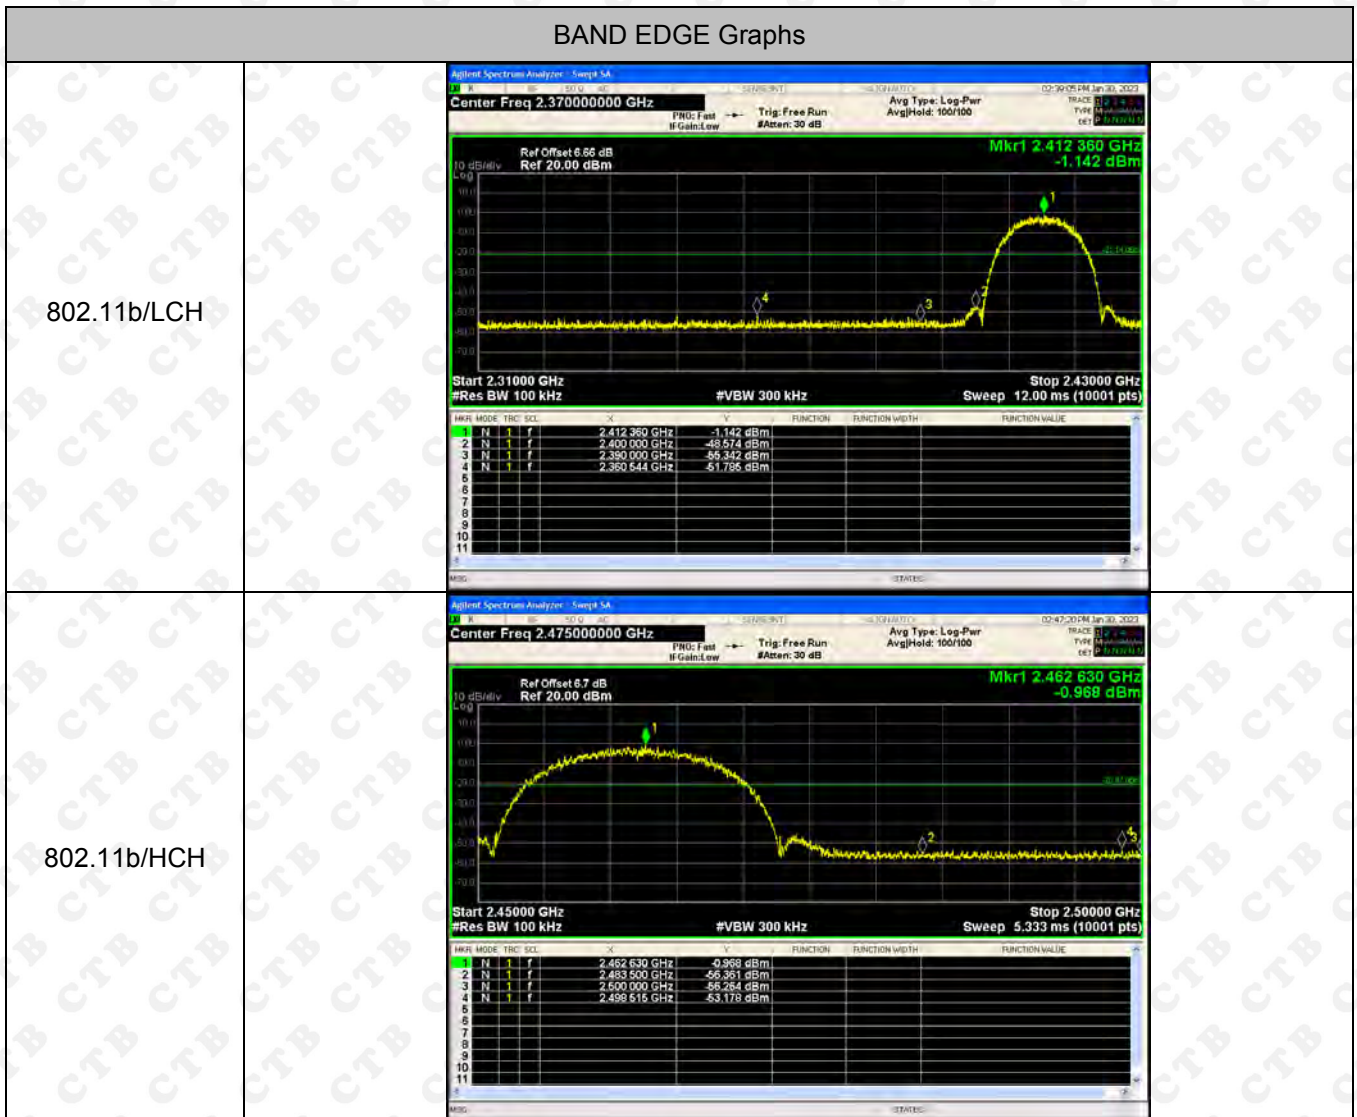

## BAND EDGE Graphs


802.11g/LCH

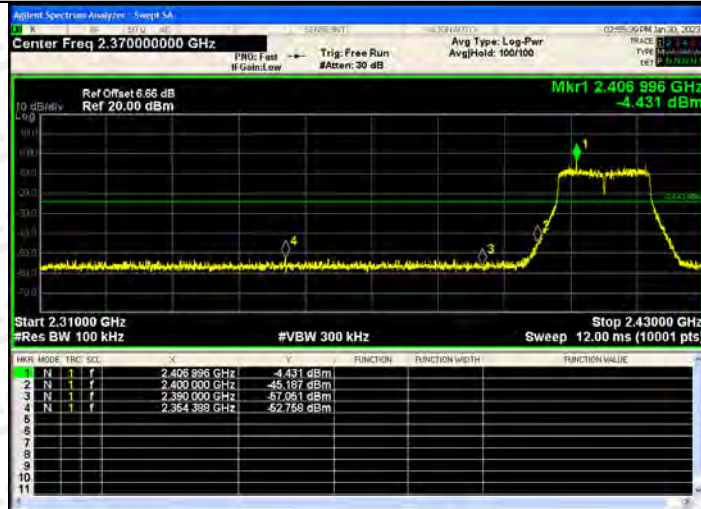


802.11g/HCH




802.11n(HT20)/L  
CH

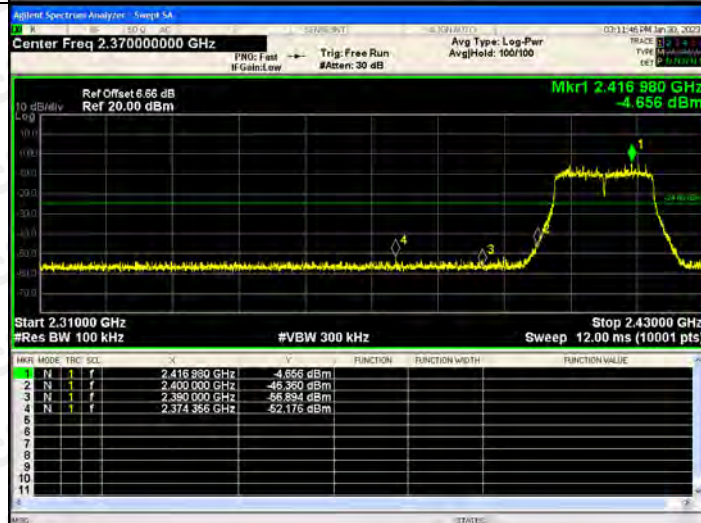

802.11n(HT20)/H  
CH

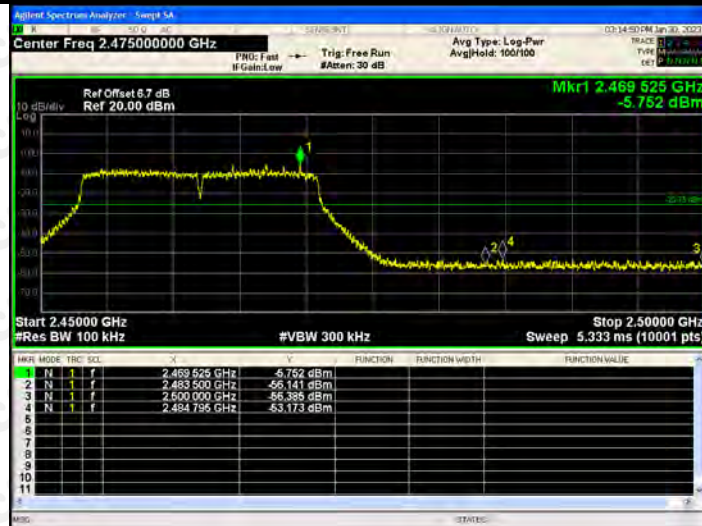

802.11n(HT40)/L  
CH

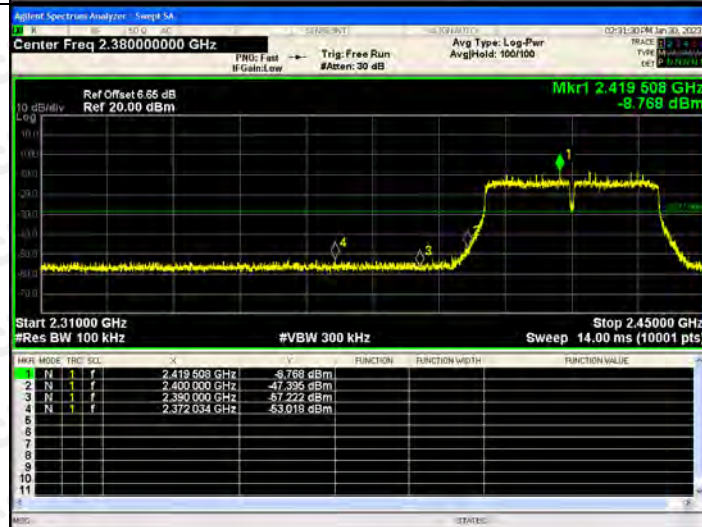

802.11n(HT40)/H  
CH






## RF Conducted Spurious Emissions Graphs




## RF Conducted Spurious Emissions Graphs

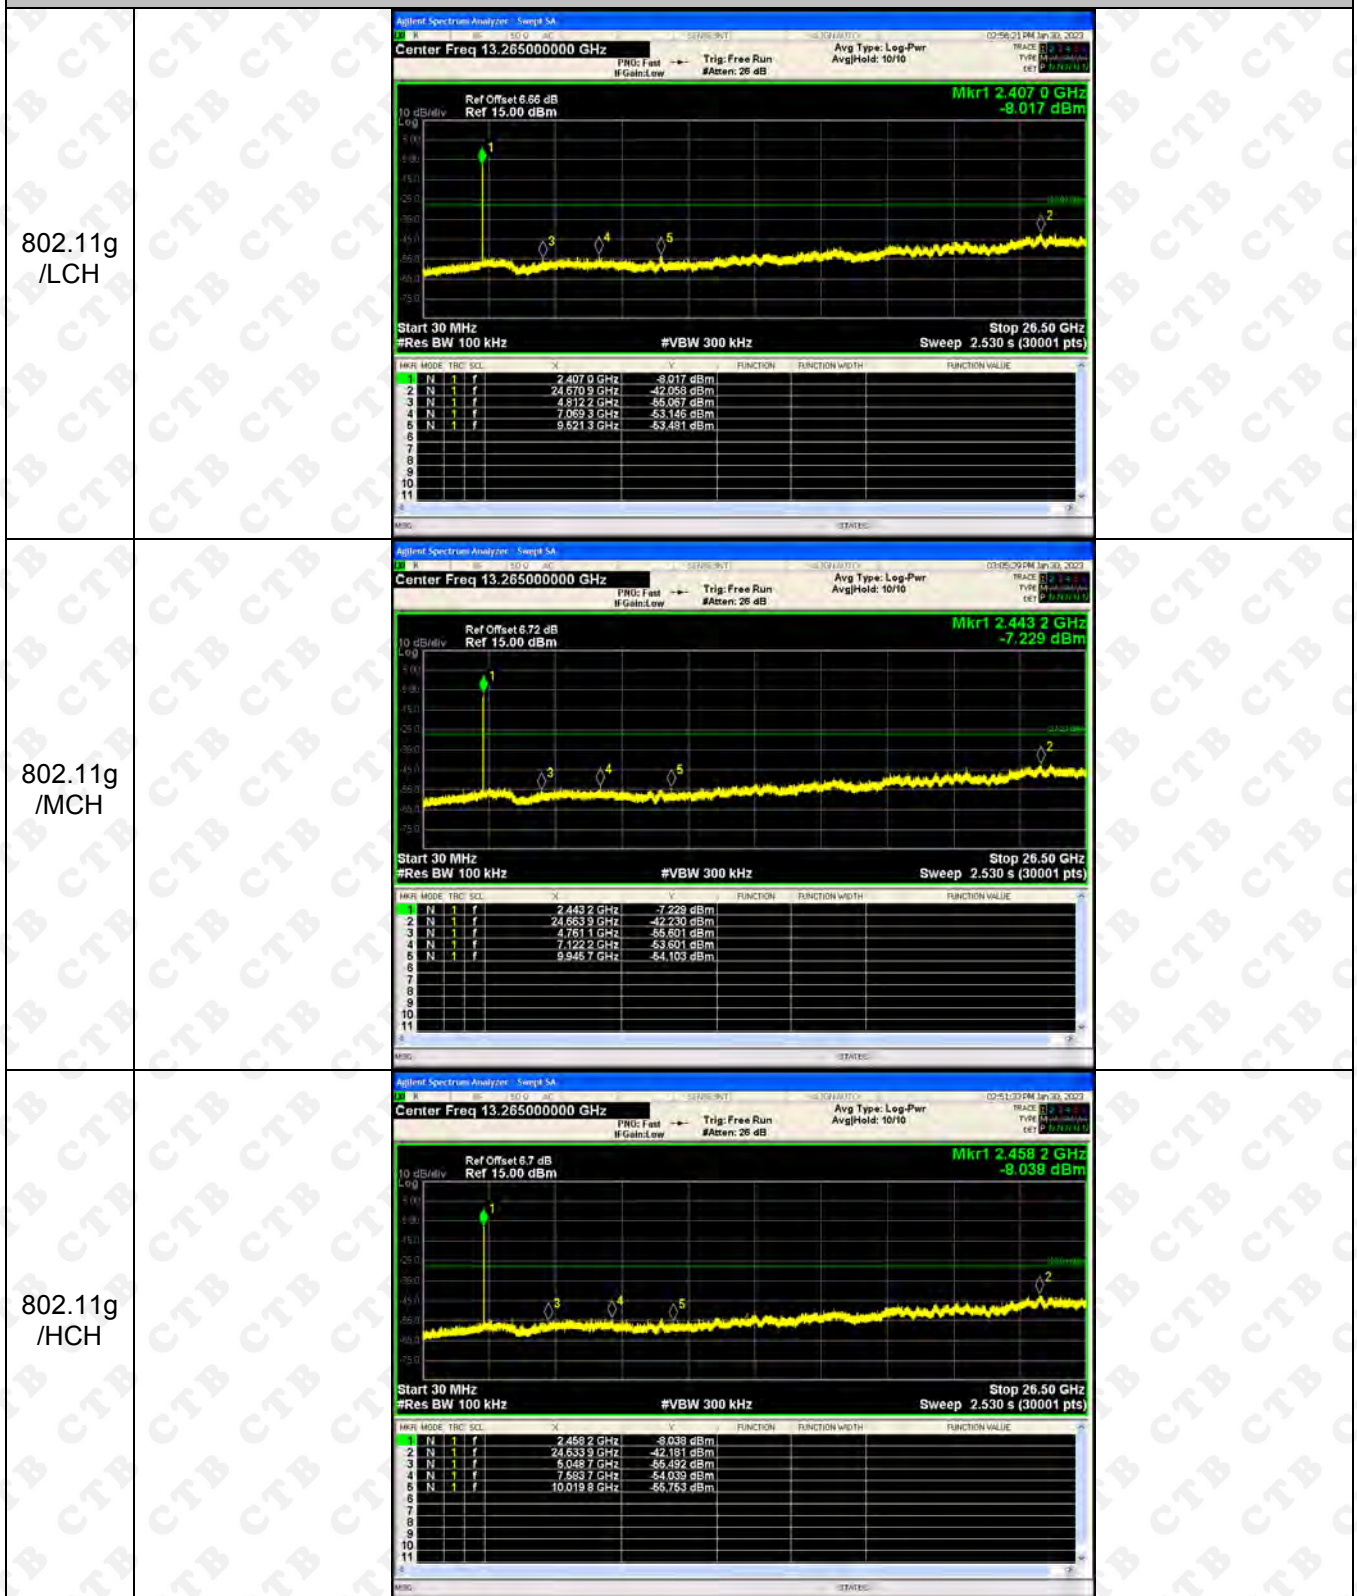


## RF Conducted Spurious Emissions Graphs




802.11n  
(HT40)/  
LCH

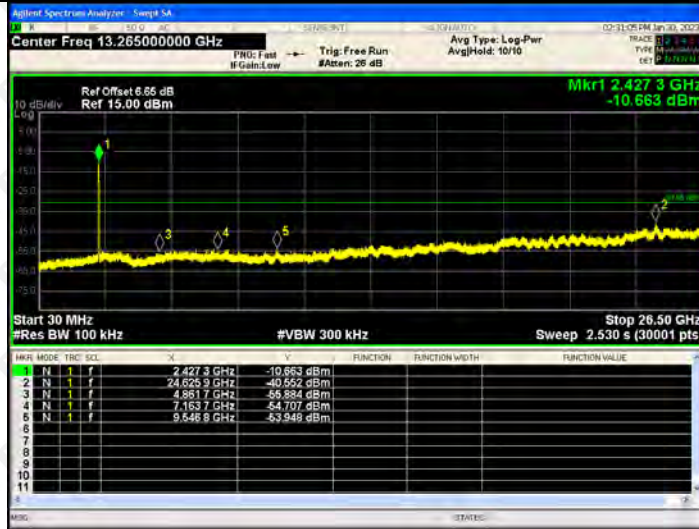

802.11  
n(HT40)  
/MCH

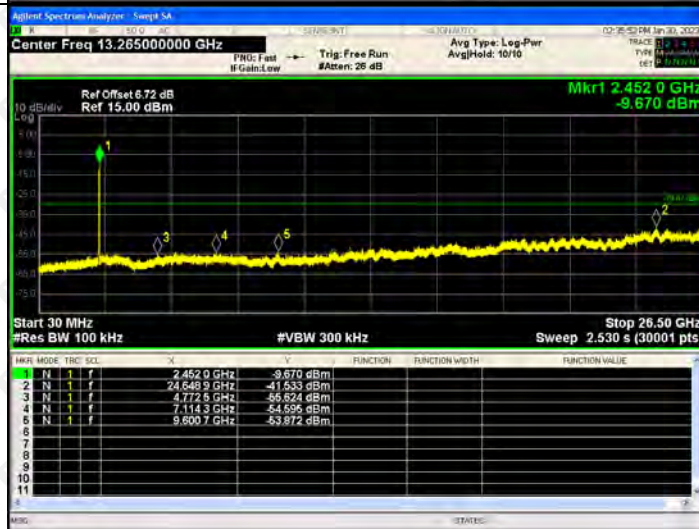


802.11  
n(HT40)  
/HCH

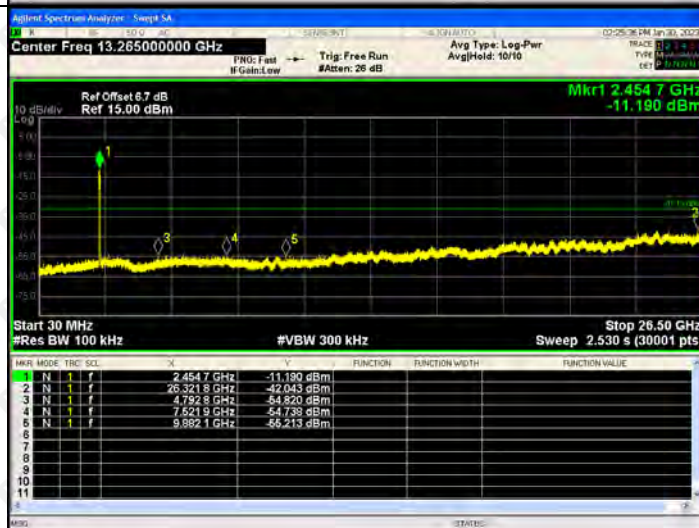

ANT2:

## BAND EDGE Graphs

802.11b/LCH

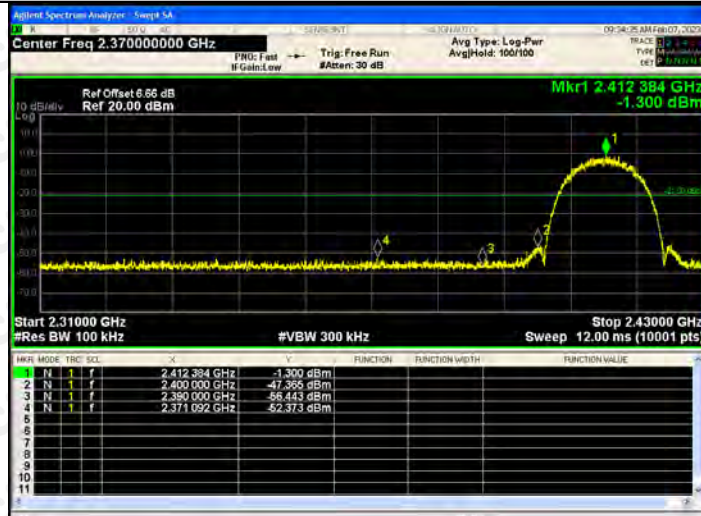


802.11b/HCH




## BAND EDGE Graphs

802.11g/LCH

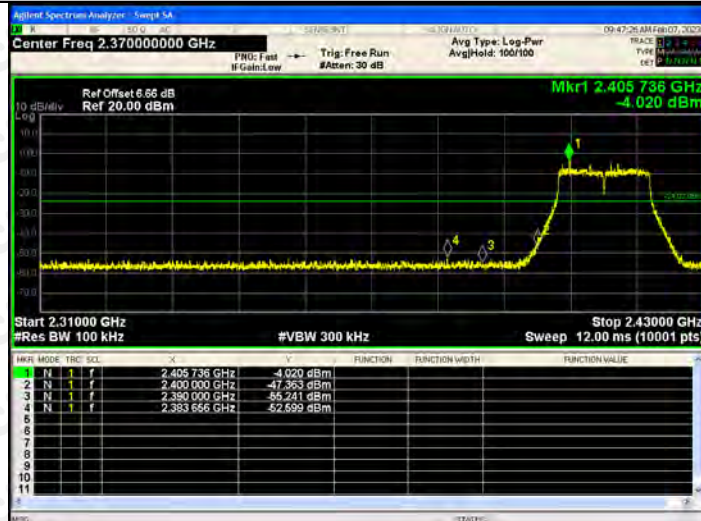


802.11g/HCH

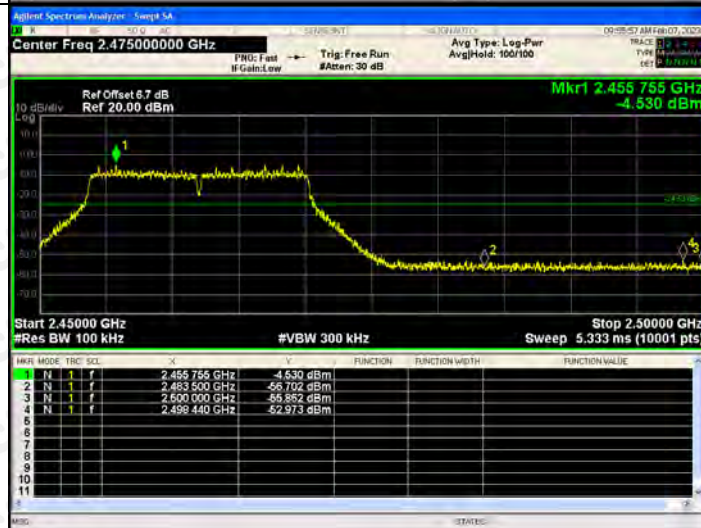


## BAND EDGE Graphs

802.11n(HT20)/L  
CH

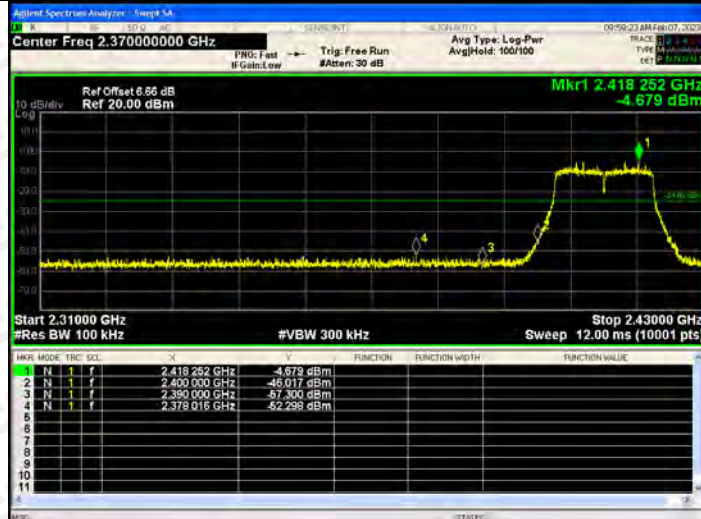


802.11n(HT20)/H  
CH

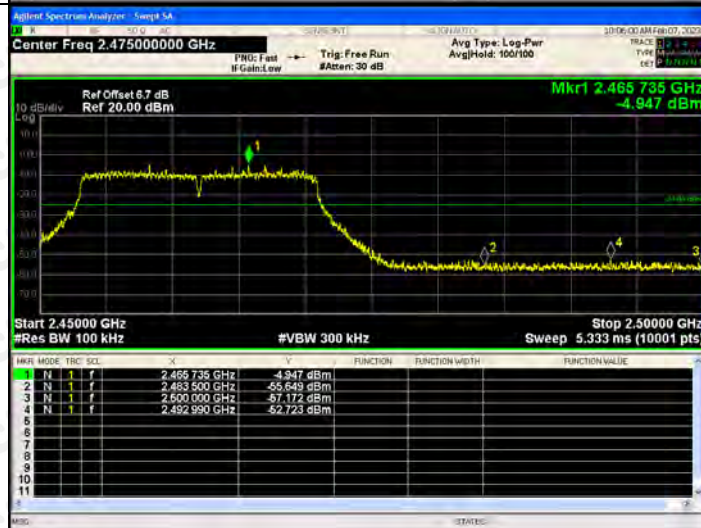

## BAND EDGE Graphs

802.11n(HT40)/L  
CH

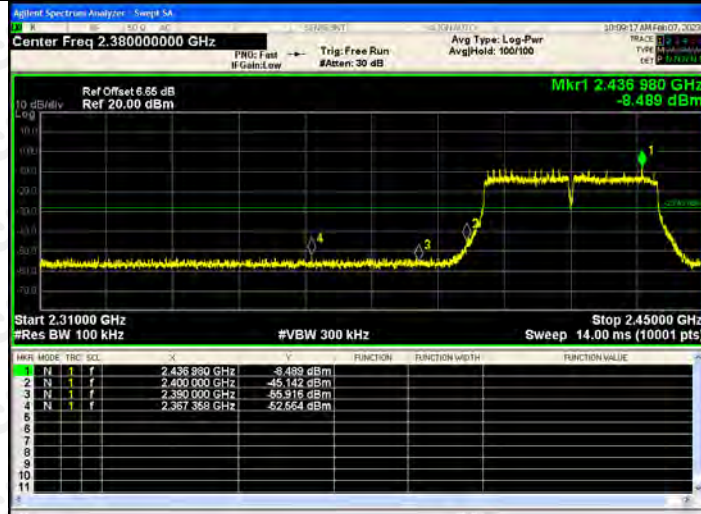


802.11n(HT40)/H  
CH






## RF Conducted Spurious Emissions Graphs

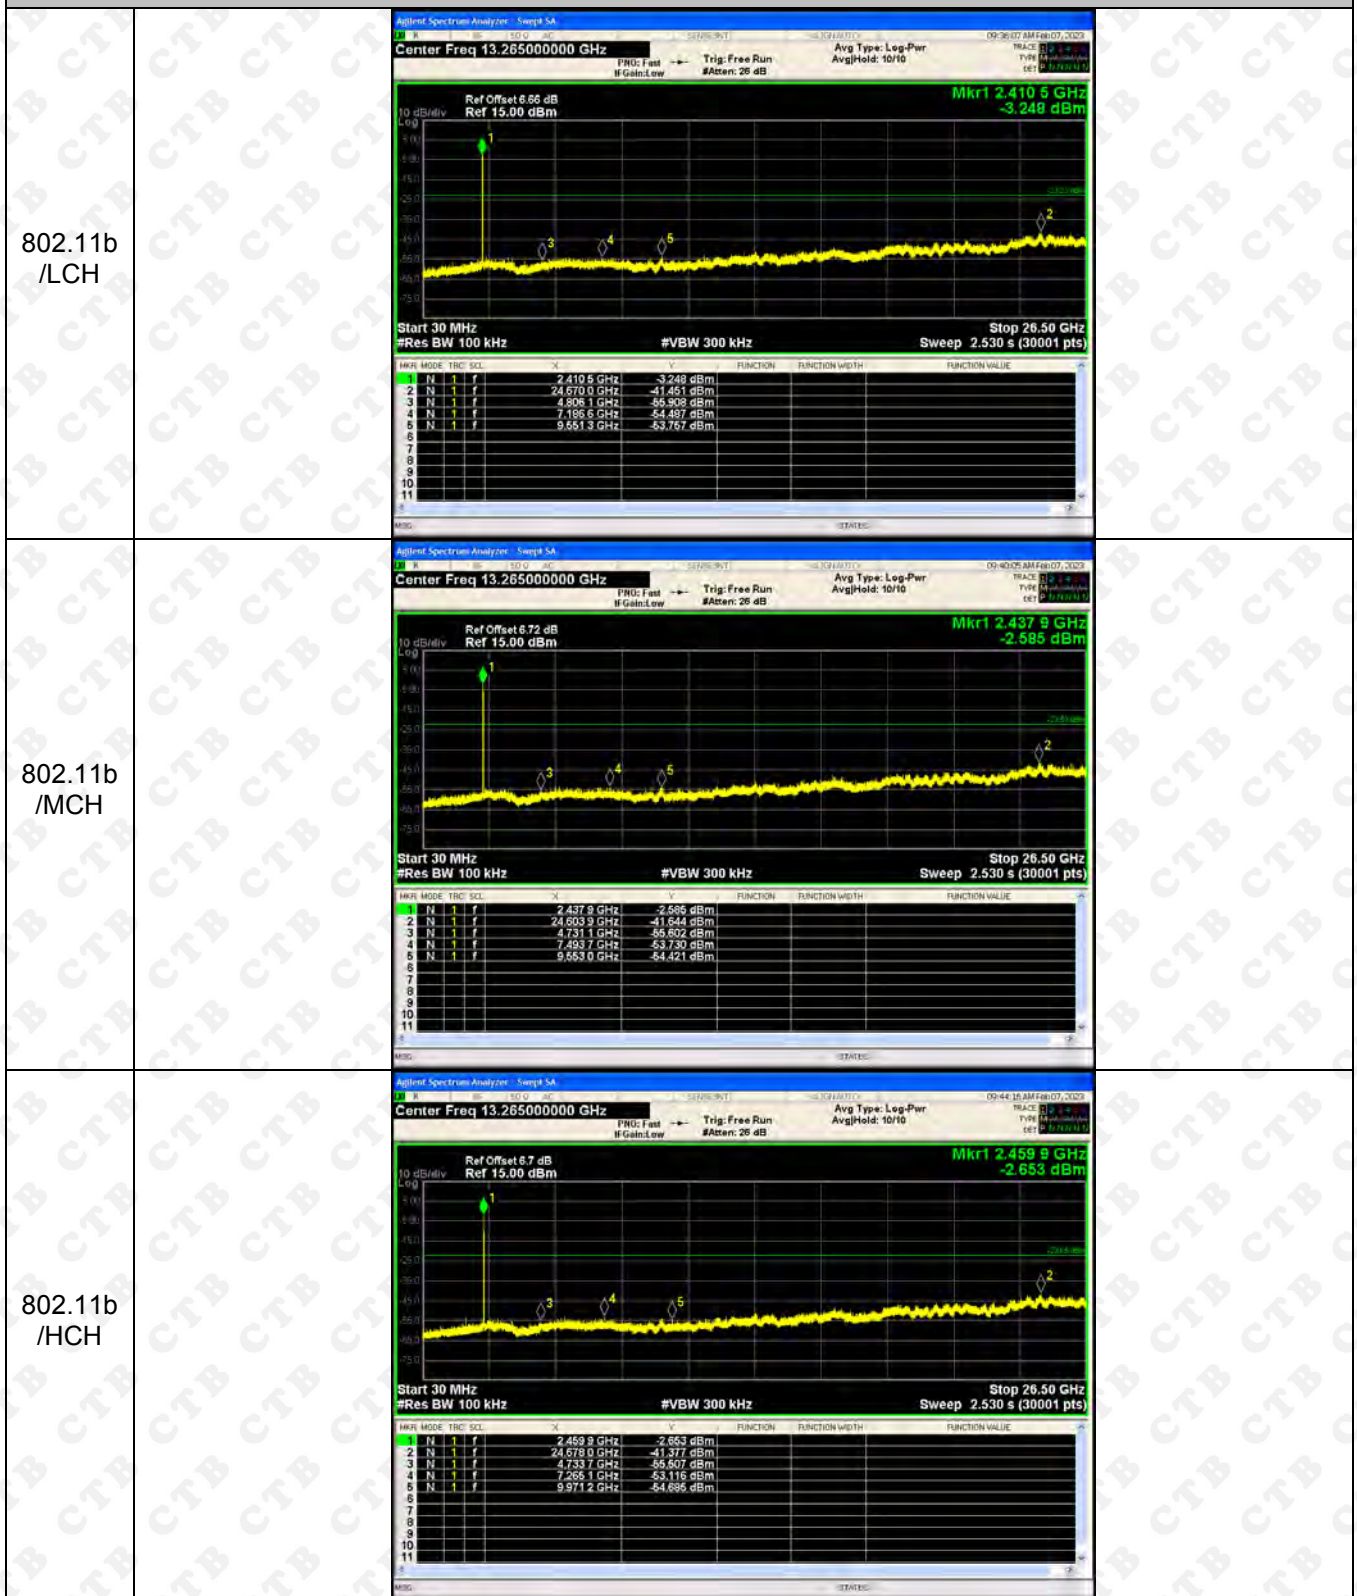

## RF Conducted Spurious Emissions Graphs



## RF Conducted Spurious Emissions Graphs

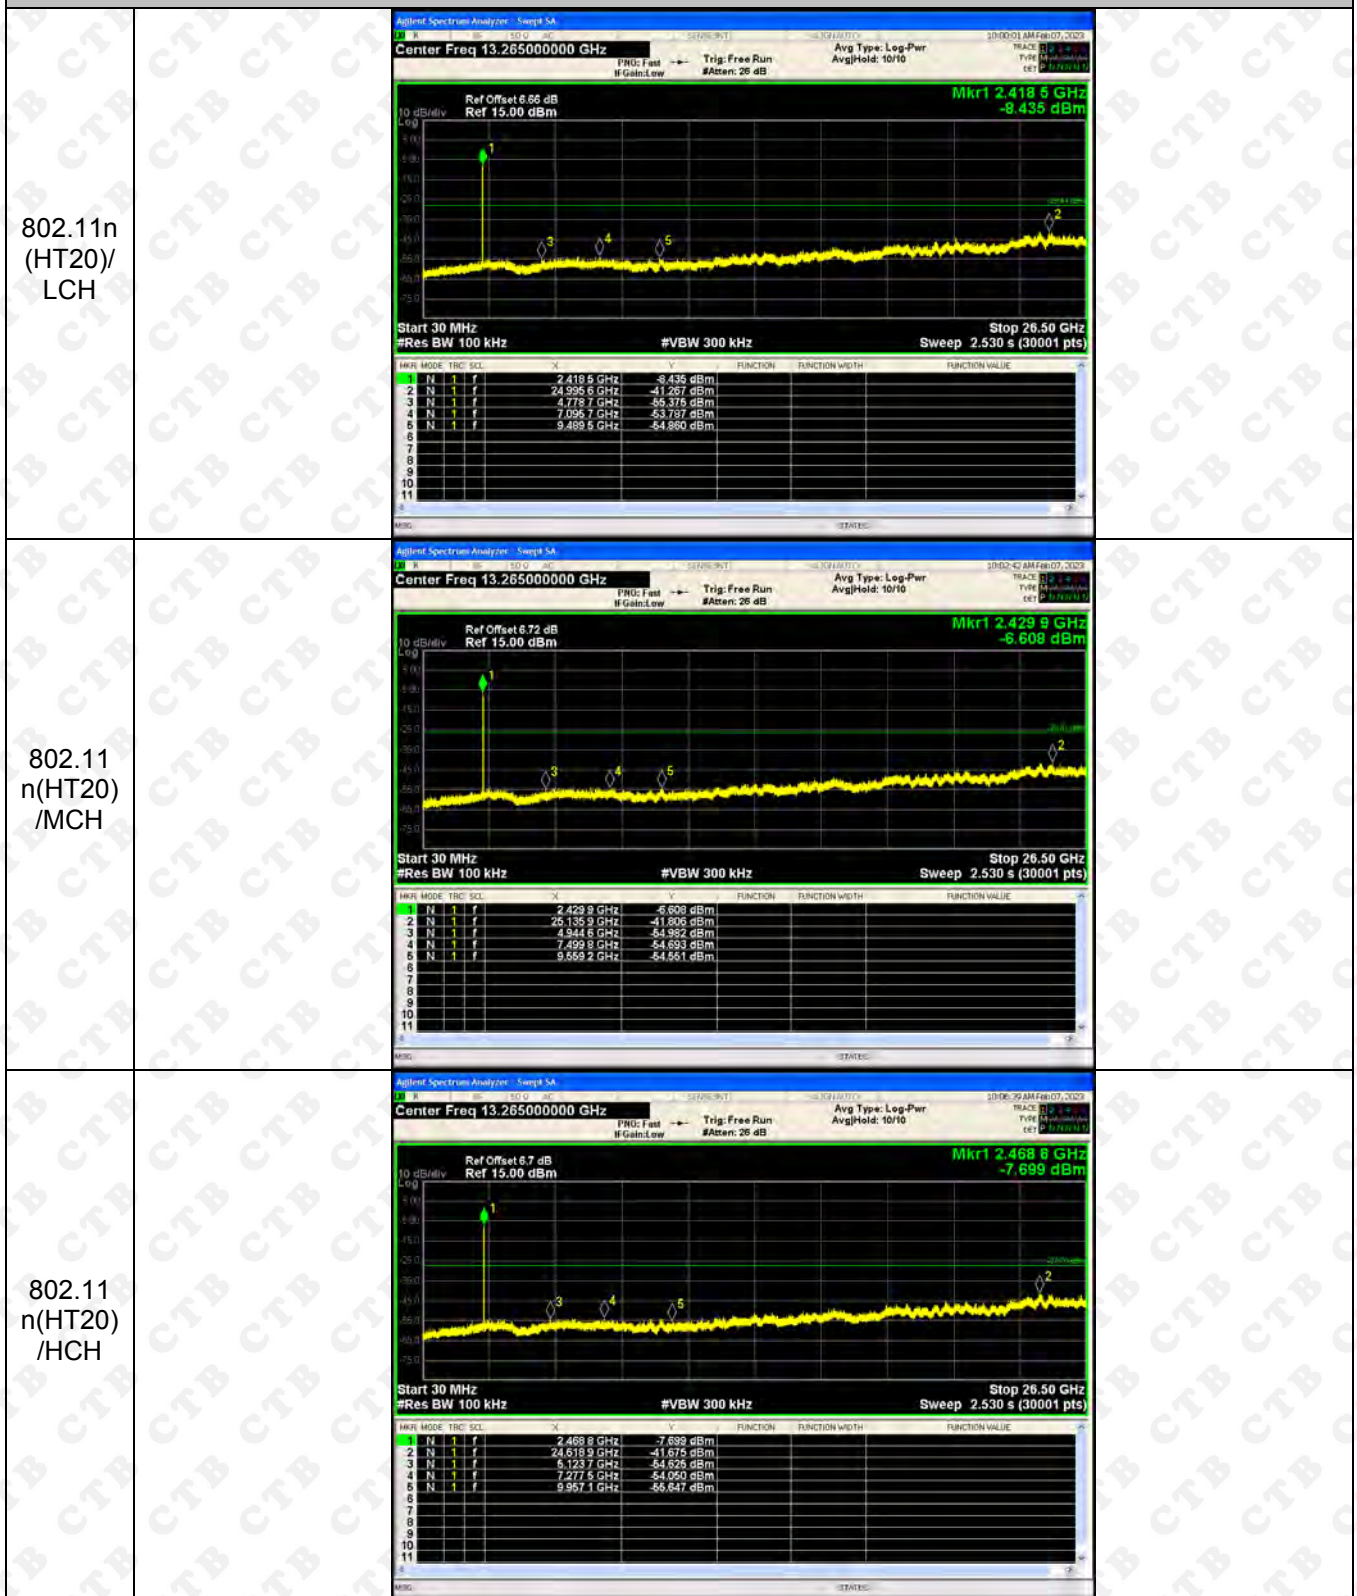


## RF Conducted Spurious Emissions Graphs



## 9. CODUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

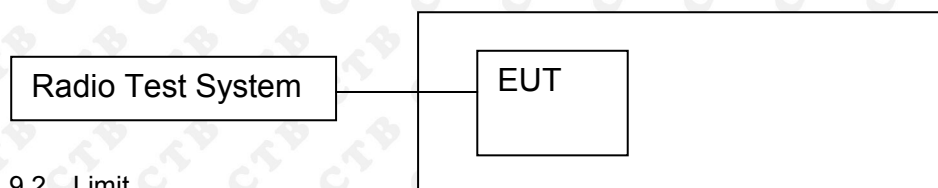

### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

## 9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	14.482	14.927	/	30
	MCH	14.52	14.287	/	30
	HCH	14.197	14.046	/	30
802.11g	LCH	13.336	13.814	/	30
	MCH	13.355	13.299	/	30
	HCH	13.579	13.596	/	30
802.11n(HT20)	LCH	13.52	13.551	16.546	30
	MCH	13.729	13.691	16.720	30
	HCH	13.707	13.582	16.655	30
802.11n(HT40)	LCH	12.166	12.383	15.286	30
	MCH	12.029	12.589	15.328	30
	HCH	12.126	12.395	15.273	30

### 10. 6DB OCCUPIED BANDWIDTH

#### 10.1 Block Diagram Of Test Setup

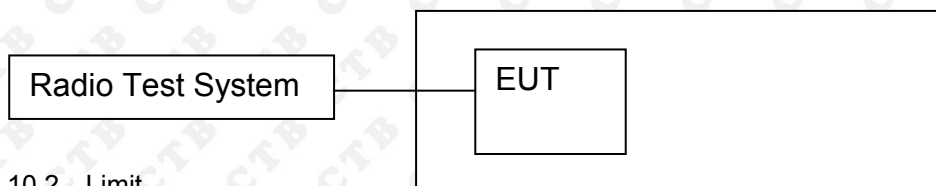

#### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

#### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.369	500	<b>PASS</b>
	MCH	10.339	500	<b>PASS</b>
	HCH	10.775	500	<b>PASS</b>
802.11g	LCH	16.343	500	<b>PASS</b>
	MCH	16.36	500	<b>PASS</b>
	HCH	16.366	500	<b>PASS</b>
802.11n(HT20)	LCH	17.009	500	<b>PASS</b>
	MCH	17.57	500	<b>PASS</b>
	HCH	17.077	500	<b>PASS</b>
802.11n(HT40)	LCH	35.683	500	<b>PASS</b>
	MCH	34.549	500	<b>PASS</b>
	HCH	35.387	500	<b>PASS</b>



ANT2:



Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.404	500	<b>PASS</b>
	MCH	10.695	500	<b>PASS</b>
	HCH	10.182	500	<b>PASS</b>
802.11g	LCH	16.361	500	<b>PASS</b>
	MCH	16.396	500	<b>PASS</b>
	HCH	16.413	500	<b>PASS</b>
802.11n(HT20)	LCH	16.571	500	<b>PASS</b>
	MCH	16.707	500	<b>PASS</b>
	HCH	17.027	500	<b>PASS</b>
802.11n(HT40)	LCH	35.683	500	<b>PASS</b>
	MCH	35.913	500	<b>PASS</b>
	HCH	35.492	500	<b>PASS</b>

ANT1:  
Test Graph:

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Radio Std: None          Trig: Free Run Avg/Hold: 100/100          #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Ref Offset: 6.66 dB Ref 26.66 dBm</p> <p>Mkr3 2.417164 GHz -9.5515 dBm</p> <p>Occupied Bandwidth 14.769 MHz Total Power 16.0 dBm</p> <p>Transmit Freq Error -20.362 kHz OBW Power 99.00 %          x dB Bandwidth 10.37 MHz x dB -6.00 dB</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Radio Std: None          Trig: Free Run Avg/Hold: 100/100          #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Ref Offset: 6.72 dB Ref 26.72 dBm</p> <p>Mkr3 2.442122 GHz -9.3569 dBm</p> <p>Occupied Bandwidth 14.807 MHz Total Power 16.0 dBm</p> <p>Transmit Freq Error -47.383 kHz OBW Power 99.00 %          x dB Bandwidth 10.34 MHz x dB -6.00 dB</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Radio Std: None          Trig: Free Run Avg/Hold: 100/100          #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Ref Offset: 6.7 dB Ref 26.70 dBm</p> <p>Mkr3 2.467342 GHz -8.7357 dBm</p> <p>Occupied Bandwidth 14.865 MHz Total Power 15.6 dBm</p> <p>Transmit Freq Error -45.027 kHz OBW Power 99.00 %          x dB Bandwidth 10.77 MHz x dB -6.00 dB</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupant BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB</p> <p>Ref: 26.66 dBm</p> <p>Mkr3: 2.420159 GHz</p> <p>-10.037 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 16.439 MHz</p> <p>Total Power: 12.6 dBm</p> <p>Transmit Freq Error: -12.292 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.34 MHz</p> <p>x dB: -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupant BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3: 2.445157 GHz</p> <p>-10.563 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 16.446 MHz</p> <p>Total Power: 12.2 dBm</p> <p>Transmit Freq Error: -22.760 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.36 MHz</p> <p>x dB: -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupant BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3: 2.470169 GHz</p> <p>-9.9551 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 16.431 MHz</p> <p>Total Power: 12.7 dBm</p> <p>Transmit Freq Error: -14.056 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.37 MHz</p> <p>x dB: -6.00 dB</p>


<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 6.66 dB Ref 26.66 dBm</p> <p>Mkr3 2.420487 GHz -11.006 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">17.610 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	17.610 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.6 dBm											
17.610 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm</p> <p>Mkr3 2.445774 GHz -10.578 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td colspan="3">17.615 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	17.615 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.8 dBm											
17.615 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 6.7 dB Ref 26.70 dBm</p> <p>Mkr3 2.470524 GHz -9.9519 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td colspan="3">17.581 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	17.581 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.7 dBm											
17.581 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
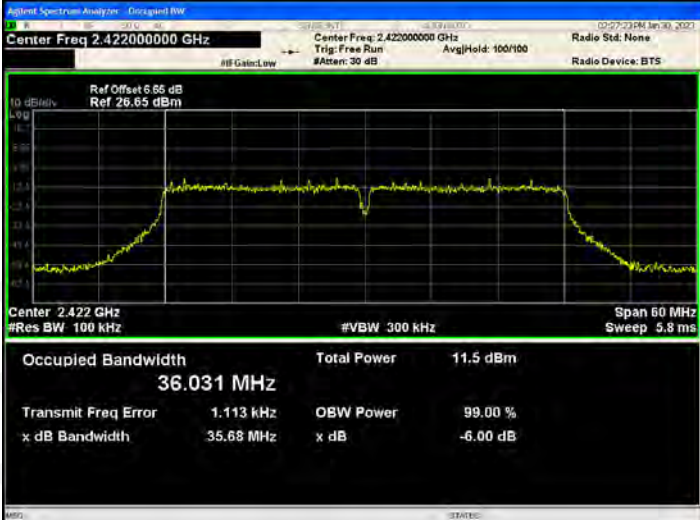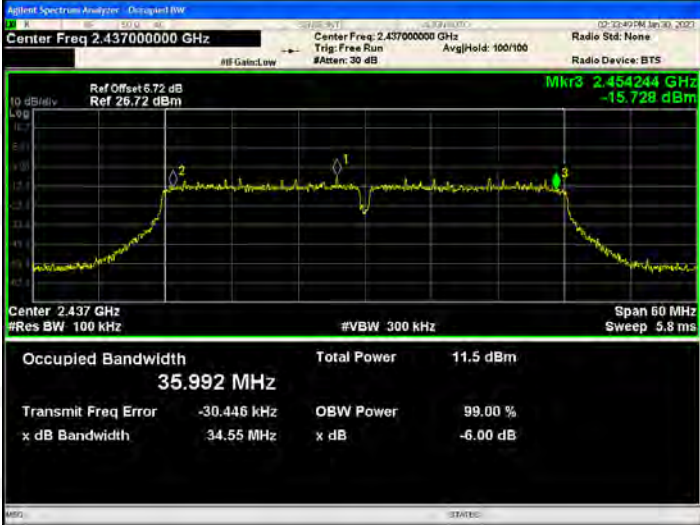
<p>802.11n(HT40)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset 6.65 dB Ref 26.65 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth <b>36.031 MHz</b></p> <p>Total Power <b>11.5 dBm</b></p> <p>Transmit Freq Error 1.113 kHz</p> <p>x dB Bandwidth 35.68 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth <b>35.992 MHz</b></p> <p>Total Power <b>11.5 dBm</b></p> <p>Transmit Freq Error -30.446 kHz</p> <p>x dB Bandwidth 34.55 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset 6.7 dB Ref 26.70 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth <b>36.038 MHz</b></p> <p>Total Power <b>11.6 dBm</b></p> <p>Transmit Freq Error -23.707 kHz</p> <p>x dB Bandwidth 35.39 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>

ANT2:  
Test Graph:

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz      Center Freq: 2.412000000 GHz      Radio Std: None</p> <p>Trig: Free Run      Avg/Hold: 100/100</p> <p>Ref Offset: 6.66 dB      Ref 26.66 dBm      Mkr3 2.416632 GHz -8.0077 dBm</p> <p>Center 2.412 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <p>Occupied Bandwidth      Total Power      15.8 dBm</p> <p><b>14.703 MHz</b></p> <p>Transmit Freq Error      -69.651 kHz      OBW Power      99.00 %</p> <p>x dB Bandwidth      9.404 MHz      x dB      -6.00 dB</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz      Center Freq: 2.437000000 GHz      Radio Std: None</p> <p>Trig: Free Run      Avg/Hold: 100/100</p> <p>Ref Offset: 6.72 dB      Ref 26.72 dBm      Mkr3 2.4423 GHz -8.7031 dBm</p> <p>Center 2.437 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <p>Occupied Bandwidth      Total Power      15.7 dBm</p> <p><b>14.788 MHz</b></p> <p>Transmit Freq Error      -46.847 kHz      OBW Power      99.00 %</p> <p>x dB Bandwidth      10.69 MHz      x dB      -6.00 dB</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz      Center Freq: 2.462000000 GHz      Radio Std: None</p> <p>Trig: Free Run      Avg/Hold: 100/100</p> <p>Ref Offset: 6.7 dB      Ref 26.70 dBm      Mkr3 2.467063 GHz -8.7031 dBm</p> <p>Center 2.462 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <p>Occupied Bandwidth      Total Power      15.5 dBm</p> <p><b>14.858 MHz</b></p> <p>Transmit Freq Error      -28.221 kHz      OBW Power      99.00 %</p> <p>x dB Bandwidth      10.18 MHz      x dB      -6.00 dB</p>

<p>802.11g/LCH</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB</p> <p>Ref: 26.66 dBm</p> <p>Mkr3 2.420166 GHz</p> <p>-9.7323 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.450 MHz</p> <p>Total Power 12.8 dBm</p> <p>Transmit Freq Error -14.622 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.36 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3 2.445185 GHz</p> <p>-11.872 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.467 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error -12.912 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.40 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3 2.470192 GHz</p> <p>-11.223 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.448 MHz</p> <p>Total Power 12.5 dBm</p> <p>Transmit Freq Error -14.719 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.41 MHz</p> <p>x dB -6.00 dB</p>


<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupant RW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run #Gates: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.420277 GHz -11.016 dBm Ref Offset: 6.66 dB Ref: 26.66 dBm 10 dB/div Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.609 MHz Total Power 12.5 dBm Transmit Freq Error -8.709 kHz OBW Power 99.00 % x dB Bandwidth 16.57 MHz x dB -6.00 dB</p>
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupant RW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Gates: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.445338 GHz -10.135 dBm Ref Offset: 6.72 dB Ref: 26.72 dBm 10 dB/div Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.631 MHz Total Power 12.6 dBm Transmit Freq Error -15.043 kHz OBW Power 99.00 % x dB Bandwidth 16.71 MHz x dB -6.00 dB</p>
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupant RW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run #Gates: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.470498 GHz -10.725 dBm Ref Offset: 6.7 dB Ref: 26.70 dBm 10 dB/div Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.619 MHz Total Power 12.6 dBm Transmit Freq Error -15.320 kHz OBW Power 99.00 % x dB Bandwidth 17.03 MHz x dB -6.00 dB</p>



<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.422000000 GHz</p> <p>Ref Offset: 6.65 dB Ref: 26.65 dBm</p> <p>Mkr3: 2.439832 GHz -14.998 dBm</p> <p>Center: 2.422 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.0 dBm</td> </tr> <tr> <td colspan="3">36.021 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.0 dBm	36.021 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.0 dBm											
36.021 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.454917 GHz -15.574 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.9 dBm</td> </tr> <tr> <td colspan="3">36.054 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	11.9 dBm	36.054 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	11.9 dBm											
36.054 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.452000000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.469729 GHz -15.715 dBm</p> <p>Center: 2.452 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.0 dBm</td> </tr> <tr> <td colspan="3">36.042 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.0 dBm	36.042 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.0 dBm											
36.042 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

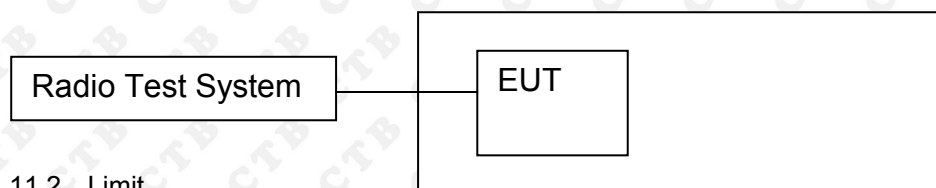

### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

### 11.3 Test procedure



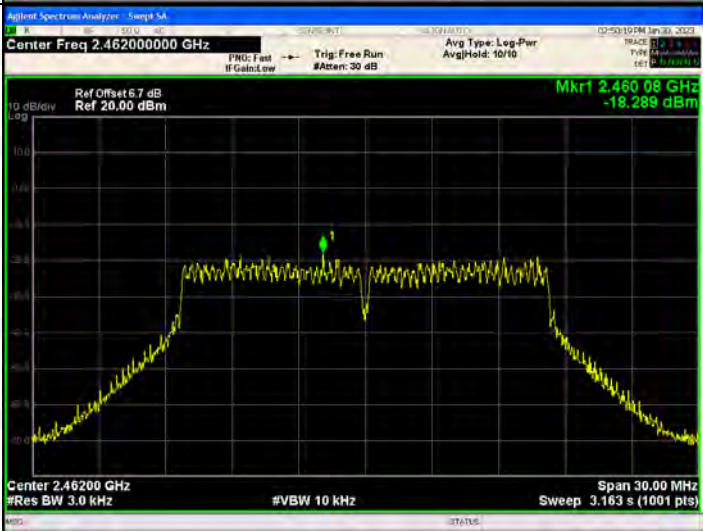
1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## 11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-15.017	-15.423	/	8
	MCH	-14.865	-15.04	/	8
	HCH	-15.562	-15.626	/	8
802.11g	LCH	-18.403	-17.929	/	8
	MCH	-18.748	-18.49	/	8
	HCH	-18.289	-18.251	/	8
802.11n(H T20)	LCH	-18.888	-19.379	-16.116	8
	MCH	-18.594	-18.232	-15.399	8
	HCH	-18.689	-19.305	-15.976	8
802.11n(H T40)	LCH	-22.971	-20.848	-18.771	8
	MCH	-23.305	-22.894	-20.084	8
	HCH	-23.445	-22.222	-19.780	8

ANT1:  
Test Graph

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.412000000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.413 77 GHz -15.017 dBm Span 30.00 MHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.438 77 GHz -14.885 dBm Span 30.00 MHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.460 74 GHz -15.582 dBm Span 30.00 MHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>
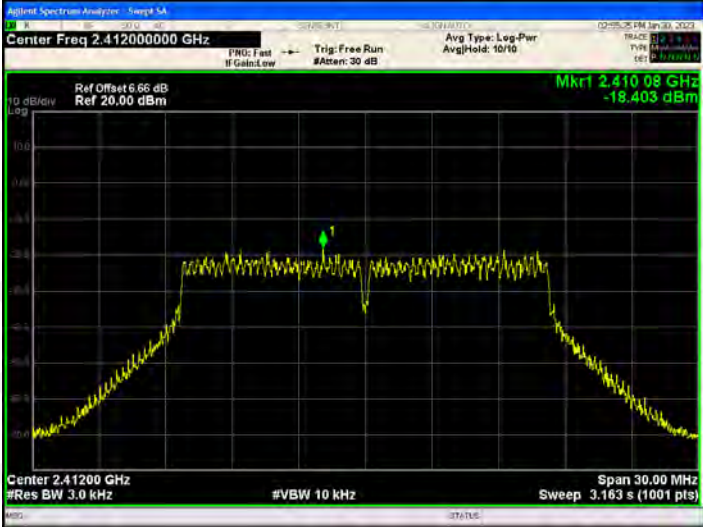
<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.40576 GHz -18.888 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44327 GHz -18.594 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.45576 GHz -18.689 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>




<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.43730 GHz -22.971 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.45230 GHz -23.306 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.45014 GHz -23.446 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

ANT 2:  
Test Graph

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.41074 GHz -15.423 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.43674 GHz -15.040 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.46195 GHz -15.826 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>



<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.40839 GHz -17.929 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.43451 GHz -18.490 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.45951 GHz -18.261 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
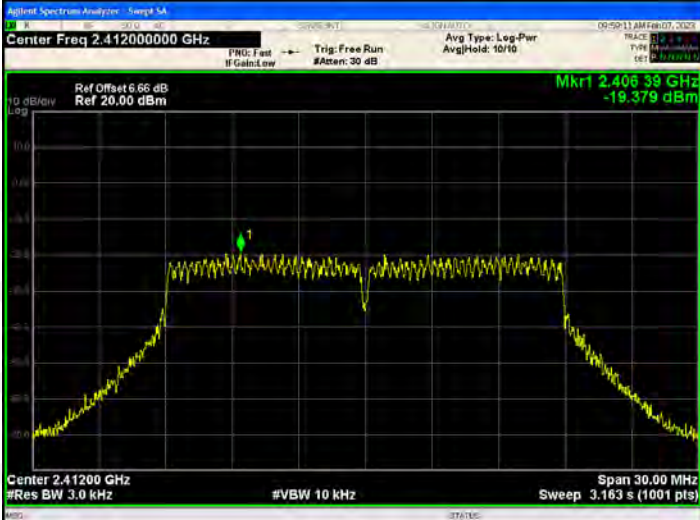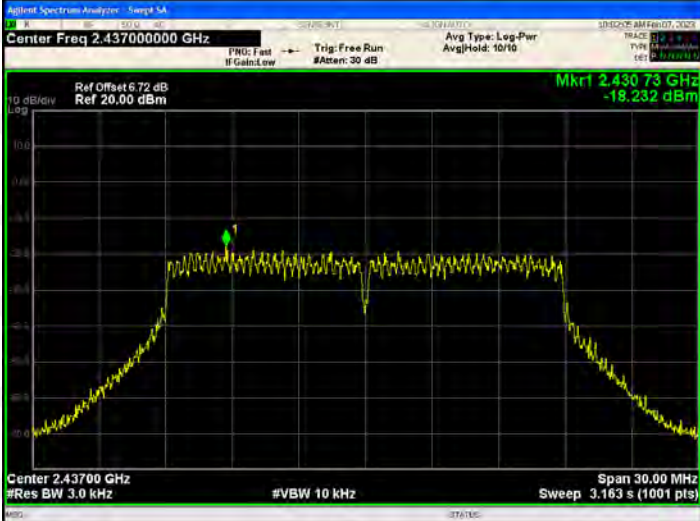
<p>802.11n(HT20)/LC H</p>	
<p>802.11n(HT20)/MC H</p>	
<p>802.11n(HT20)/HC H</p>	

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.43574 GHz -20.848 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.42296 GHz -22.894 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.45396 GHz -22.222 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:


The antenna is internal antenna and no consideration of replacement. The best case gain of the antenna is 0.92dBi

**13. EUT PHOTOGRAPHS****External Photos  
EUT Photo 1****EUT Photo 2**

**14. EUT TEST SETUP PHOTOGRAPHS**

Radiated Emission

Below 1G

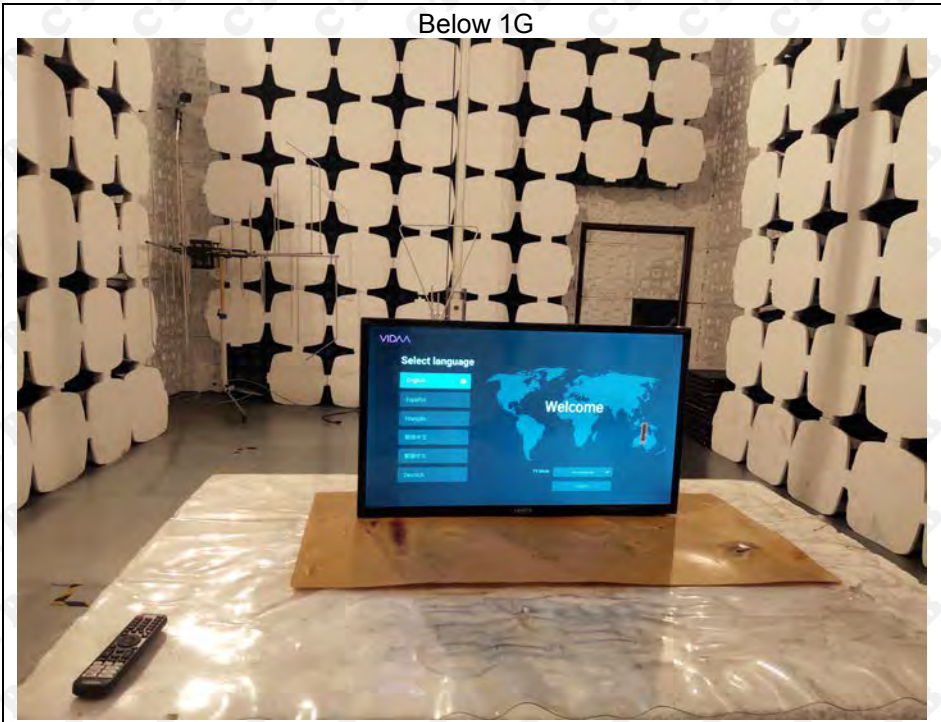

Above 1G



\*\*\*\*\* END OF REPORT \*\*\*\*\*