

TEST REPORT

For

SPEAKER BOX

MODEL No.: GDI-EXPAS601, PP-2000, GDI-EXPAX801

FCC ID: 2AHU8-PP2000

IC: 25617-PP2000

Trade Mark: POLINATA

REPORT NO: ES190829014W02

ISSUE DATE: November 13, 2019

Prepared for

Ningbo polinata Electronics Co.,Ltd.

9th Xinrui Road Longxing Village, Yinzhou District Ningbo China

Prepared by

EMTEK(SHENZHEN) CO., LTD.

**Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China**

TEL: 86-755-26954280

FAX: 86-755-26954282

Table of Contents

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	5
4	TEST METHODOLOGY	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
4.2	MEASUREMENT EQUIPMENT USED	6
4.3	DESCRIPTION OF TEST MODES	7
5	FACILITIES AND ACCREDITATIONS	8
5.1	FACILITIES	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	8
6	TEST SYSTEM UNCERTAINTY	9
7	SETUP OF EQUIPMENT UNDER TEST	10
7.1	RADIO FREQUENCY TEST SETUP 1	10
7.2	RADIO FREQUENCY TEST SETUP 2	10
7.3	CONDUCTED EMISSION TEST SETUP	11
7.4	SUPPORT EQUIPMENT	12
8	TEST REQUIREMENTS	13
8.1	DTS BANDWIDTH	13
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	16
8.3	MAXIMUM POWER SPECTRAL DENSITY	19
8.4	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	22
8.5	RADIATED SPURIOUS EMISSION	27
8.6	CONDUCTED EMISSIONS TEST	39
8.7	ANTENNA APPLICATION	42

1 TEST RESULT CERTIFICATION

Applicant:	Ningbo polinata Electronics Co.,Ltd. 9th Xinrui Road Longxing Village, Yinzhou District Ningbo China
Manufacture:	Ningbo polinata Electronics Co.,Ltd. 9th Xinrui Road Longxing Village, Yinzhou District Ningbo China
Product Description:	SPEAKER BOX
Model Number:	GDI-EXPAS601, PP-2000, GDI-EXPAX801
Trade Mark:	POLINATA
File Number:	ES190829014W
Date of Test:	September 08 to October 22, 2019

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 2018, Subpart J FCC 47 CFR Part 15 2018, Subpart C IC RSS-GEN, Issue 5, March 2019 IC RSS-247 Issue 2, February 2017.	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 2018 & IC RSS-GEN, Issue 5 March 2019 and Part 15.247 2018 & IC RSS-247 Issue 2, February 2017.

The test results of this report relate only to the tested sample identified in this report

Date of Test : September 08 to October 22, 2019

Abel Wu

Prepared by:

Abel Wu /Editor

Reviewer:

Joe Xia

Joe Xia /Supervisor



Approve & Authorized Signer :

Lisa Wang

Lisa Wang/Manager

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product Name	SPEAKER BOX
Model number	GDI-EXPAS601, PP-2000, GDI-EXPAX801 (Note: The models of GDI-EXPAS601, PP-2000 have the same sample, The difference is just model number. GDI-EXPAS601, GDI-EXPAX801 have same electrical principle and PCB layout, The difference is just shape. We tested model of GDI-EXPAS601.)
Data Rate	1Mbps for GFSK modulation
Modulation	GFSK modulation
Operating Frequency Range	2402-2480MHz
Number of Channels	40 channels (Bluetooth V5.0 Dual mode)
Transmit Power Max	-0.621 dBm
Antenna Type	PCB Antenna
Antenna Gain	0dBi
Power supply	AC 115V 60Hz or AC 230V 50Hz
Temperature Range	-20℃ to +55℃
Product SW/HW version	V2.0
Radio SW/HW version	V1.0
Test SW Version	V1.2

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2) & RSS-247.5.2(a)	DTS (6dB) Bandwidth	PASS	
RSS-Gen.6.7	99% Occupied Bandwidth	PASS	
15.247(b)(3) & RSS-247.5.4(d)	Maximum Peak Conducted Output Power	PASS	
15.247(e) & RSS-247.5.2(b)	Maximum Power Spectral Density Level	PASS	
15.247(d) & RSS-247.5.5	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) & RSS-247.5.5	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) & RSS-Gen 6.13	Radiated Spurious Emission	PASS	
15.207 & RSS-Gen 8.8	Conducted Emission Test	PASS	
15.203 & RSS-Gen 6.8	Antenna Application	PASS	
	NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AHU8-PP2000 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

This submittal(s) (test report) is intended for IC: 25617-PP2000 filing to comply with RSS 247 Clause 5 of the IC

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

IC RSS-GEN, Issue 5, March 2019

IC RSS-247 Issue 2, February 2017

FCC KDB 558074 D01 15.247 Meas Guidance V05r02

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/18/2019	May 17, 2020
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/18/2019	May 17, 2020
50Ω Coaxial Switch	Anritsu	MP59B	M20531	05/18/2019	May 17, 2020

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 19, 2019	May 18, 2020
Pre-Amplifier	HP	8447F	2944A07999	May 18, 2019	May 17, 2020
Bilog Antenna	Schwarzbeck	VULB9163	142	May 18, 2019	May 17, 2020
Loop Antenna	ARA	PLA-1030/B	1029	May 18, 2019	May 17, 2020
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 19, 2019	May 18, 2020
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 18, 2019	May 17, 2020
Cable	Schwarzbeck	AK9513	ACRX1	May 19, 2019	May 18, 2020
Cable	Rosenberger	N/A	FP2RX2	May 19, 2019	May 18, 2020
Cable	Schwarzbeck	AK9513	CRPX1	May 19, 2019	May 18, 2020
Cable	Schwarzbeck	AK9513	CRRX2	May 19, 2019	May 18, 2020

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 19, 2019	May 18, 2020

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (Bluetooth V5.0 with BLE mode:1Mbps) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth V5.0 with BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	19	2440
1	2404	20	2442	37	2476
2	2406	21	2444	38	2478
...	39	2480
Note: $f_c = 2402\text{MHz} + k \times 1\text{MHz}$ $k=1$ to 39					

Test Frequency and channel for Bluetooth V5.0 with BLE mode:

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	19	2440	39	2480

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2018.11.30
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)
The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2016.5.19
The Laboratory has been assessed according to the requirements
ISO/IEC 17025.

Accredited by FCC, August 06, 2018
The certificate is valid until August 07, 2020
Designation Number: CN1204
Test Firm Registration Number: 882943

Accredited by A2LA, August 08, 2018
The certificate is valid until August 31, 2020
The Certificate Number is 4321.01.

Accredited by Industry Canada, November 09, 2018
The Conformity Assessment Body Identifier is CN0008.

Name of Firm : EMTEK (SHENZHEN) CO., LTD.
Site Location : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth V5.0 with BLE mode component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

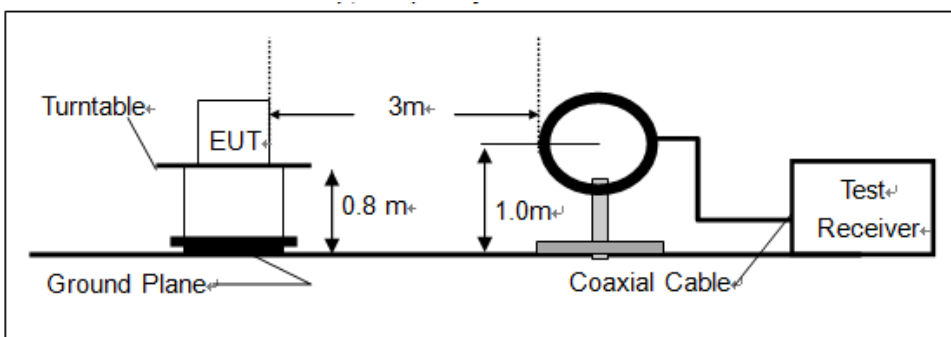

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

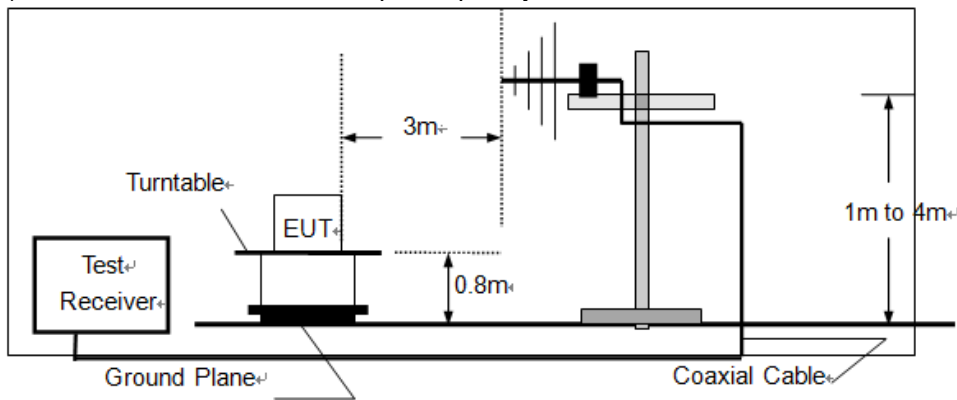

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

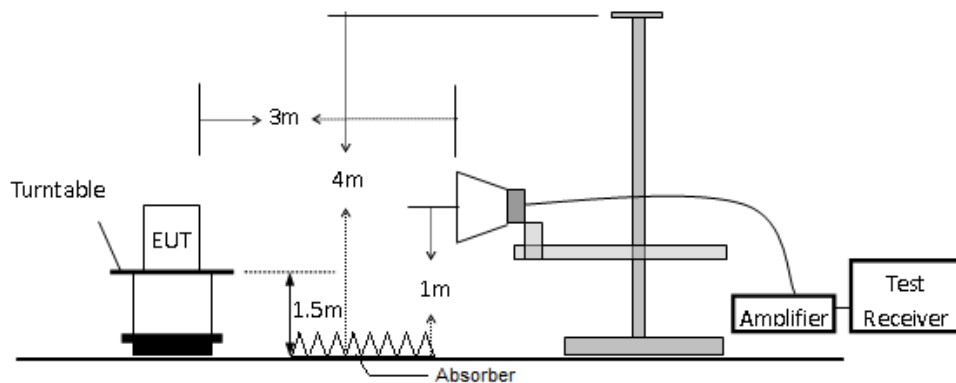


7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

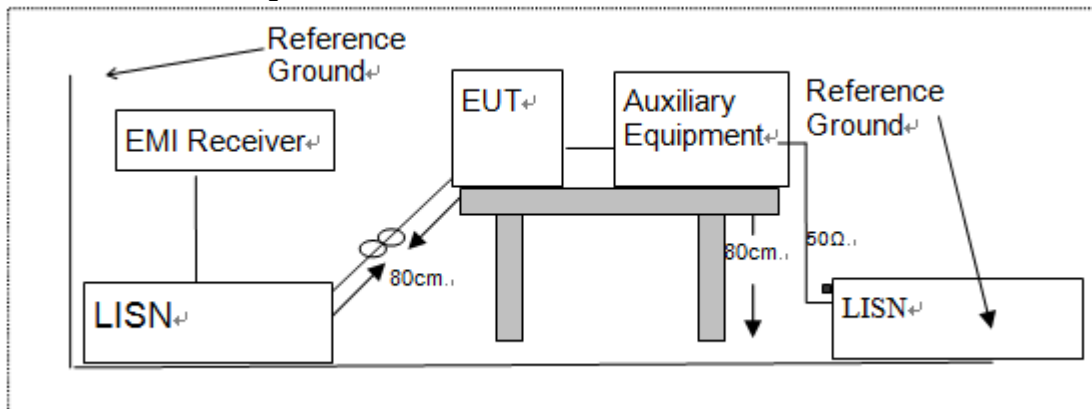

7.4 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
iPhone	Apple	iPhone 5C/A1526	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) & RSS-247 and RSS-247 and KDB 558074 D01 15.247 Meas Guidance V05r02

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in Bluetooth V5.0 with BLE mode mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz and 1%-5% OBW for 99% BANDWIDTH

Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.


Test Results

Temperature :	25°C	Test Date :	Oct 14, 2019
Humidity :	55 %	Test By:	XW

Operation Mode	Channel Number	Channel Frequency (MHz)	-6dB Bandwidth (KHz)	99% Bandwidth(KHz)	Limit (KHz)	Verdict
Bluetooth 5.0 DTS	0	2402	734.0	1049.3	>500	PASS
	19	2440	747.1	1051.4	>500	PASS
	39	2480	740.8	1049.4	>500	PASS


Test Model

DTS -6 Bandwidth and 99% Bandwidth
Bluetooth V5.0 with BLE mode
Channel 0: 2402MHz

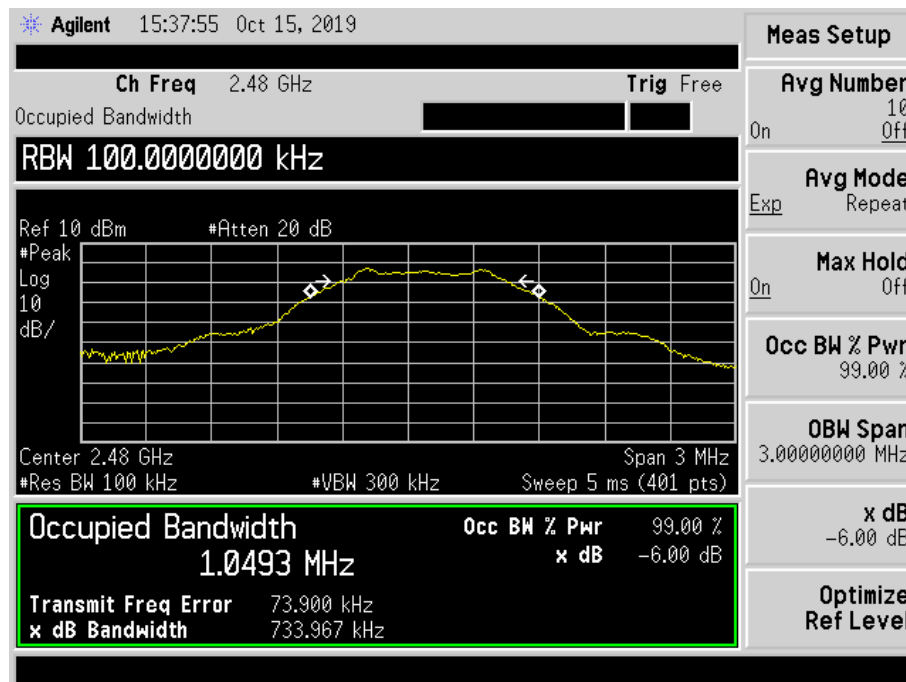


Test Model

DTS -6 Bandwidth and 99% Bandwidth
Bluetooth V5.0 with BLE mode
Channel 19: 2440MHz

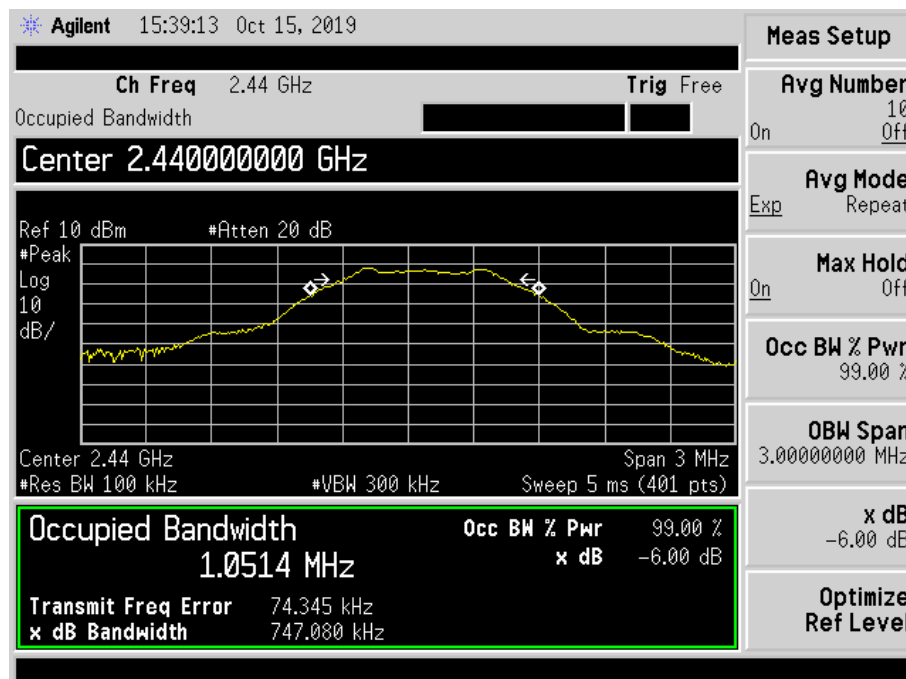

Test Model

DTS -6 Bandwidth and 99% Bandwidth
Bluetooth V5.0 with BLE mode
Channel 39: 2480MHz

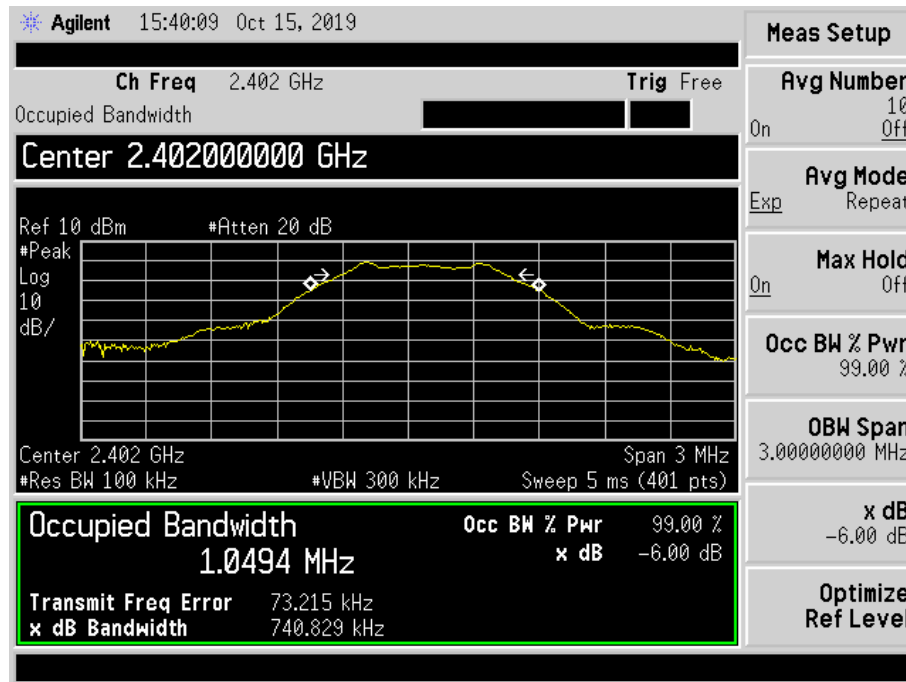

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.247(b)(3) & RSS-247 and KDB 558074 D01 15.247 Meas Guidance V05r02

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

■ According to FCC Part 15.247(b)(3) & RSS-247

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. For smart system, Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Set the RBW \geq DTS bandwidth (about 1MHz).

Set VBW $= 3 \times$ RBW (about 3MHz)

Set the span $\geq 3 \times$ RBW

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.

Allow trace to fully stabilize. Use peak marker function to determine the peak amplitude level.

■ According to FCC Part 15.247(b)(4) & IC RSS-247:


Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Results


Temperature :	25°C	Test Date :	Oct 14, 2019
Humidity :	55 %	Test By:	XW


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
Bluetooth 5.0DTS	0	2402	-0.621	30	PASS
	19	2440	-1.507	30	PASS
	39	2480	-2.669	30	PASS

Test Model	Maximum Conducted Output Power	
	Bluetooth V5.0 with BLE mode	
	Channel 0: 2402MHz	GFSK modulation

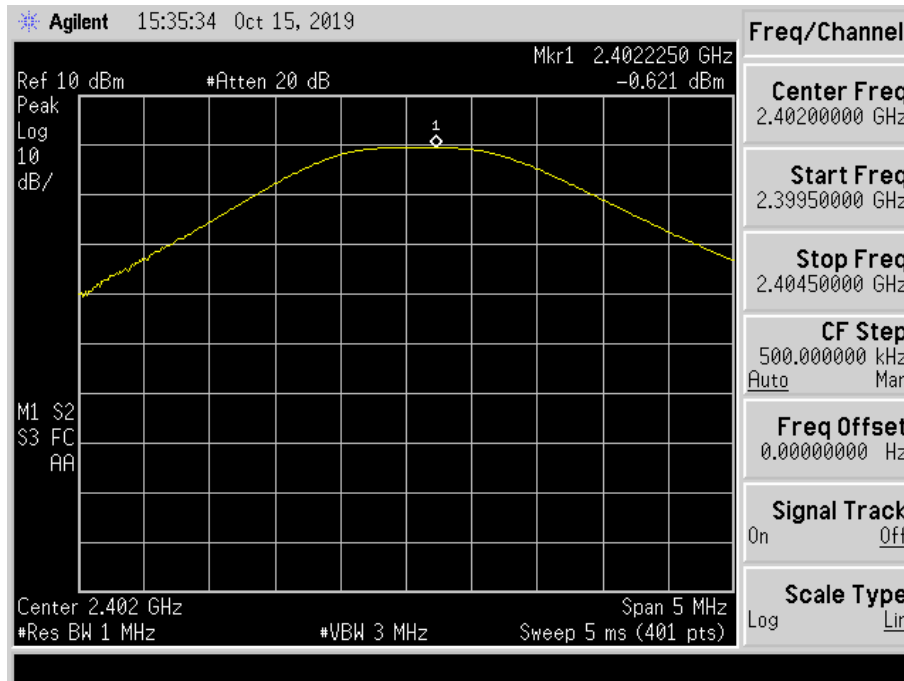

Test Model	Maximum Conducted Output Power	
	Bluetooth V5.0 with BLE mode	
	Channel 19: 2440MHz	GFSK modulation

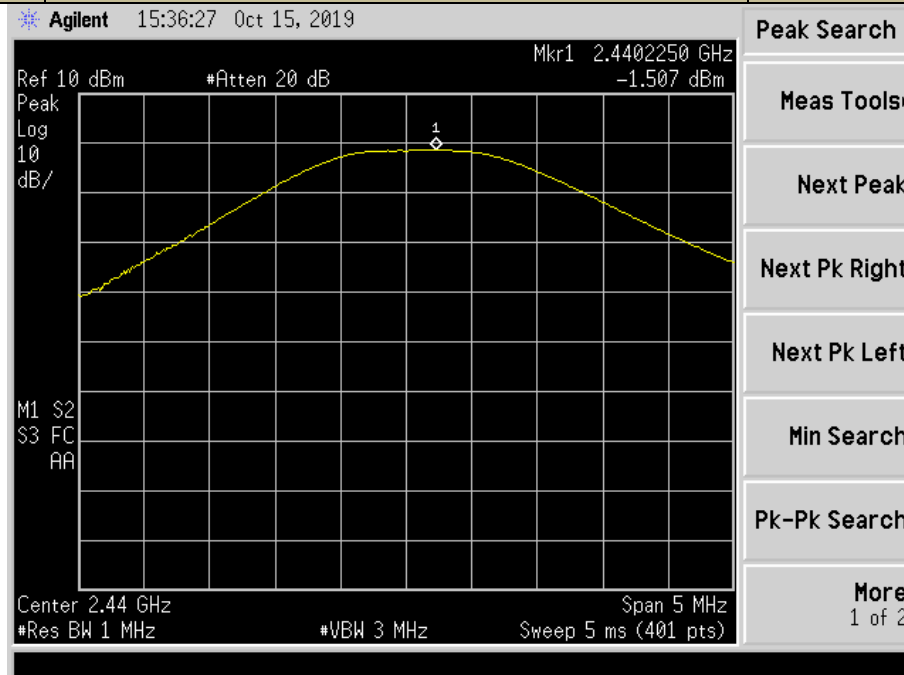

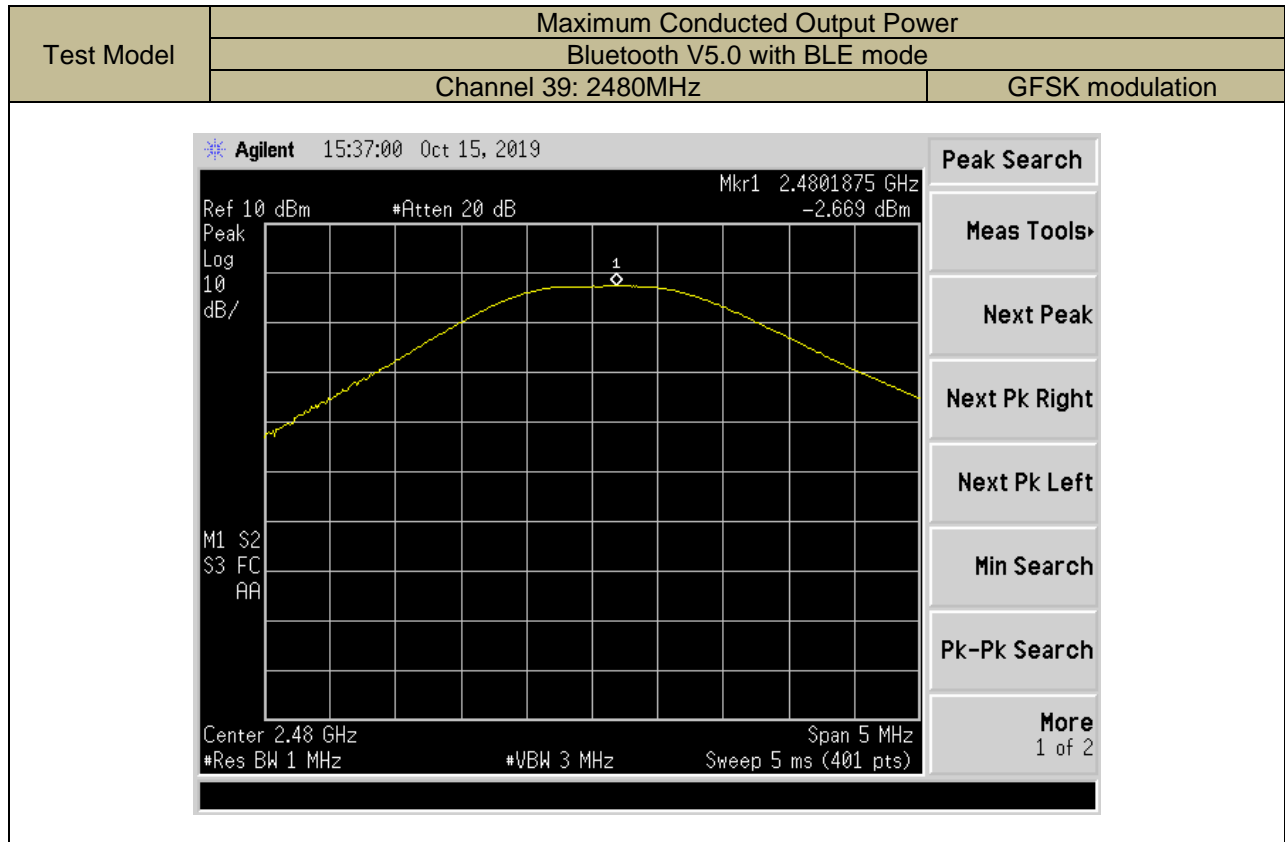

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.247(e) & RSS-247 Clause 5 and KDB 558074 D01 15.247 Meas Guidance V05r02

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.


8.3.5 Test Results

Temperature :	25°C	Test Date :	Oct 14, 2019
Humidity :	55 %	Test By:	XW

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Bluetooth V5.0 DTS	0	2402	-15.06	=<8	PASS
	19	2440	-16.10	=<8	PASS
	39	2480	-17.05	=<8	PASS
Note: N/A					


Test Model

Power Spectral Density
Bluetooth V5.0 with BLE mode
Channel 0: 2402MHz

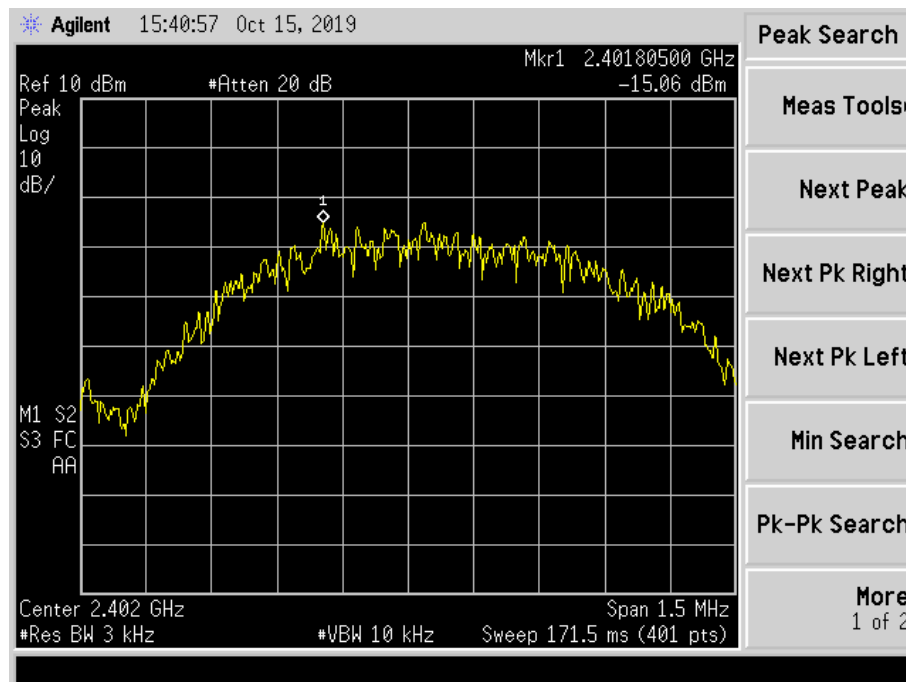


Test Model

Power Spectral Density
Bluetooth V5.0 with BLE mode
Channel 19: 2440MHz

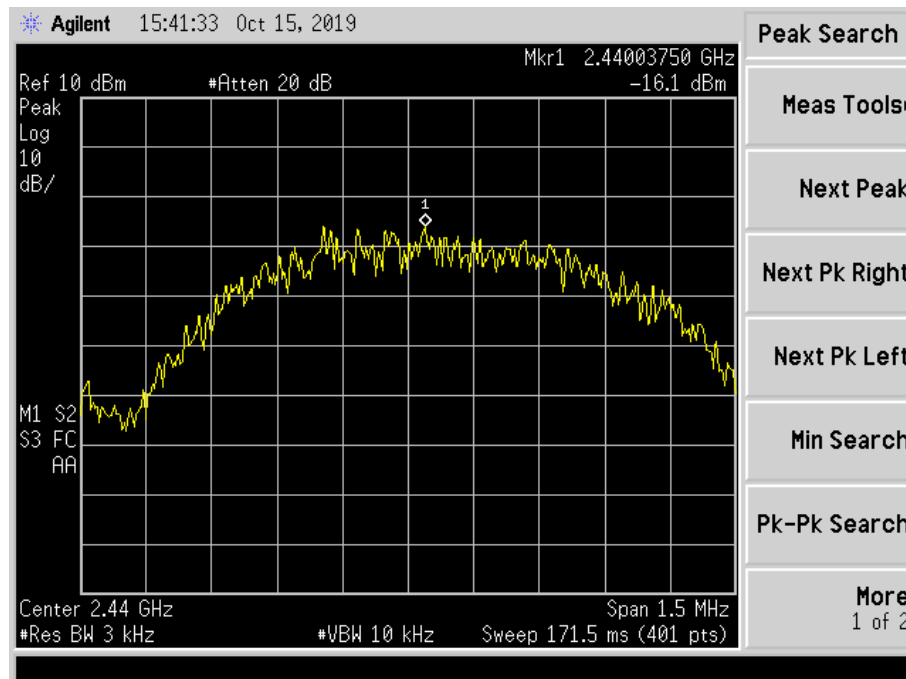

Test Model

Power Spectral Density
Bluetooth V5.0 with BLE mode
Channel 39: 2480MHz

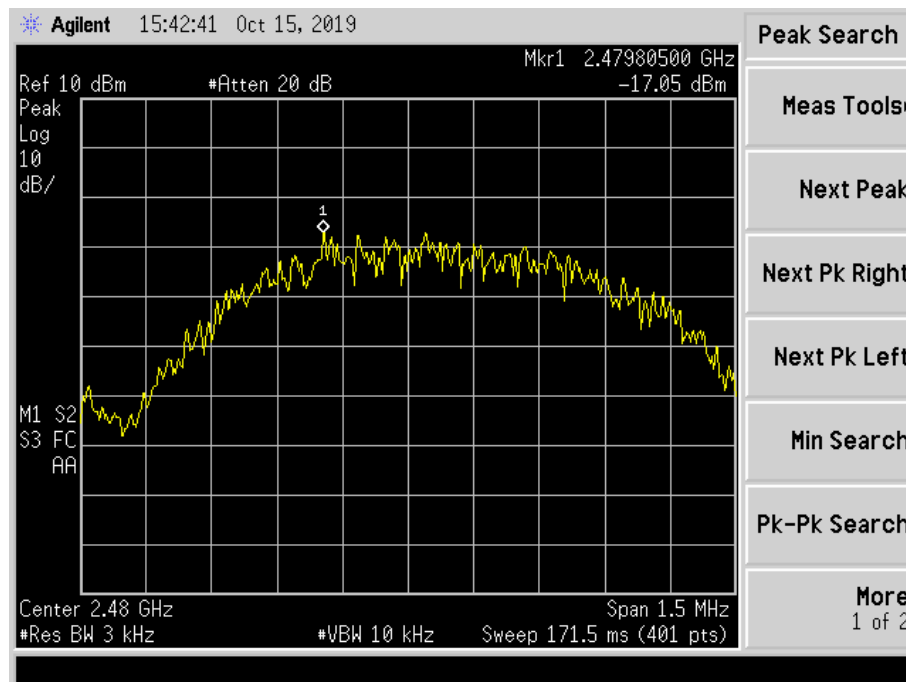

8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) & RSS-247 and KDB 558074 D01 15.247 Meas Guidance V05r02

8.4.2 Conformance Limit

According to FCC Part 15.247(d) & RSS-247:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to = 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results


Test Model

PSD(Power Spectral Density) RBW=100kHz
Bluetooth V5.0 with BLE mode
Channel 0: 2402MHz

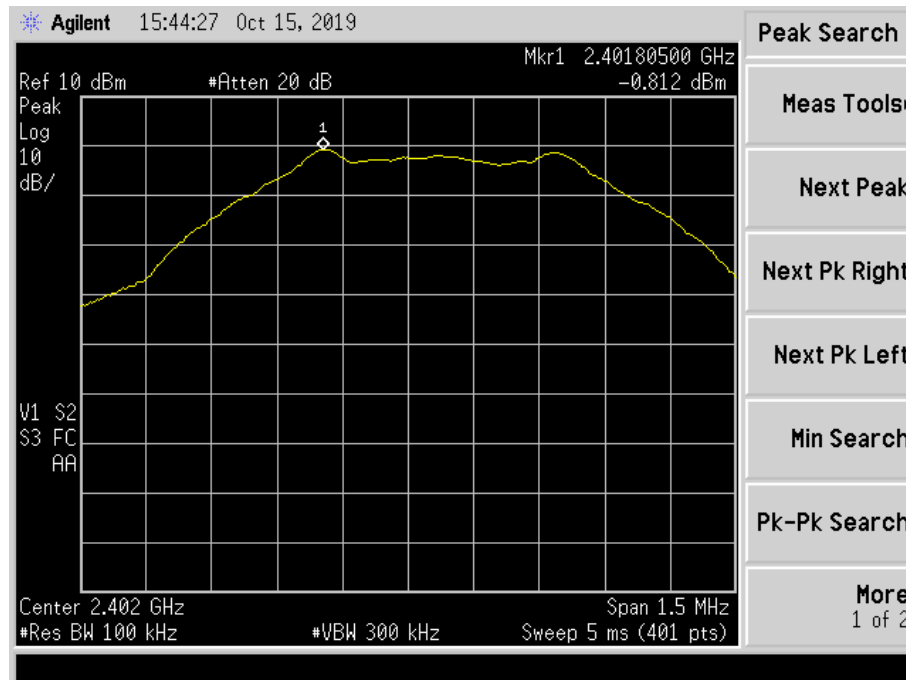


Test Model

Unwanted Emissions in non-restricted frequency bands
Bluetooth V5.0 with BLE mode
Channel 0: 2402MHz

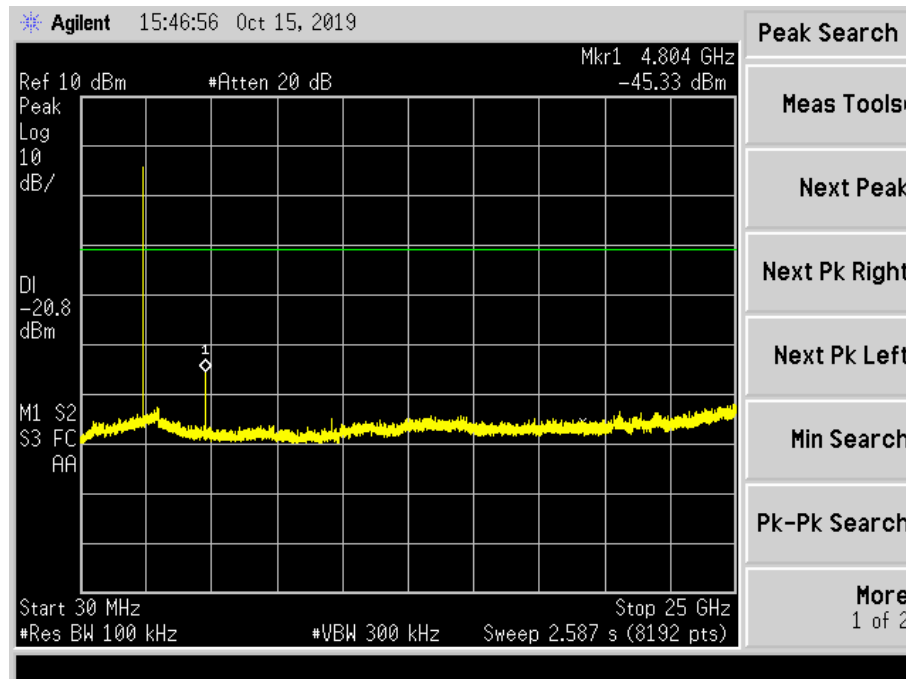


Test Model

Band edge
Bluetooth V5.0 with BLE mode
Channel 0: 2402MHz

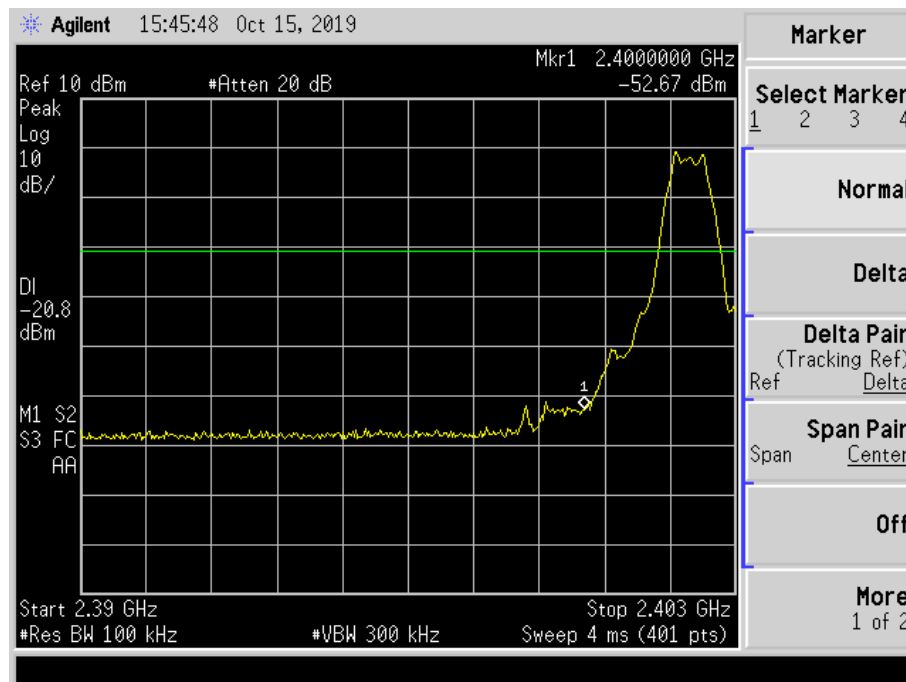


Test Model

PSD(Power Spectral Density) RBW=100kHz
Bluetooth V5.0 with BLE mode
Channel 19: 2440MHz

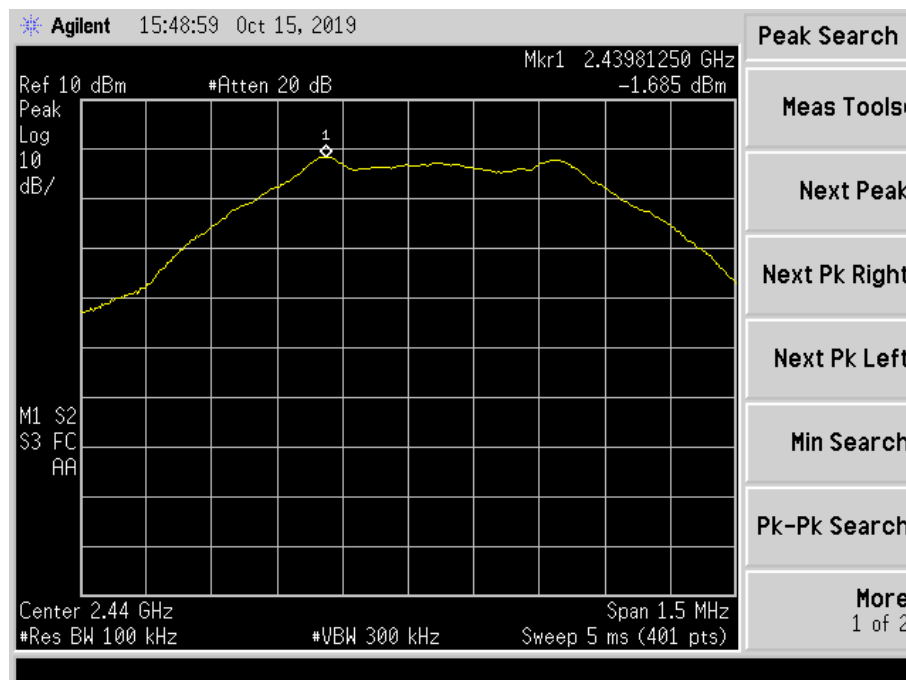


Test Model

Unwanted Emissions In Non-Restricted Frequency Bands
Bluetooth V5.0 with BLE mode
Channel 19: 2440MHz

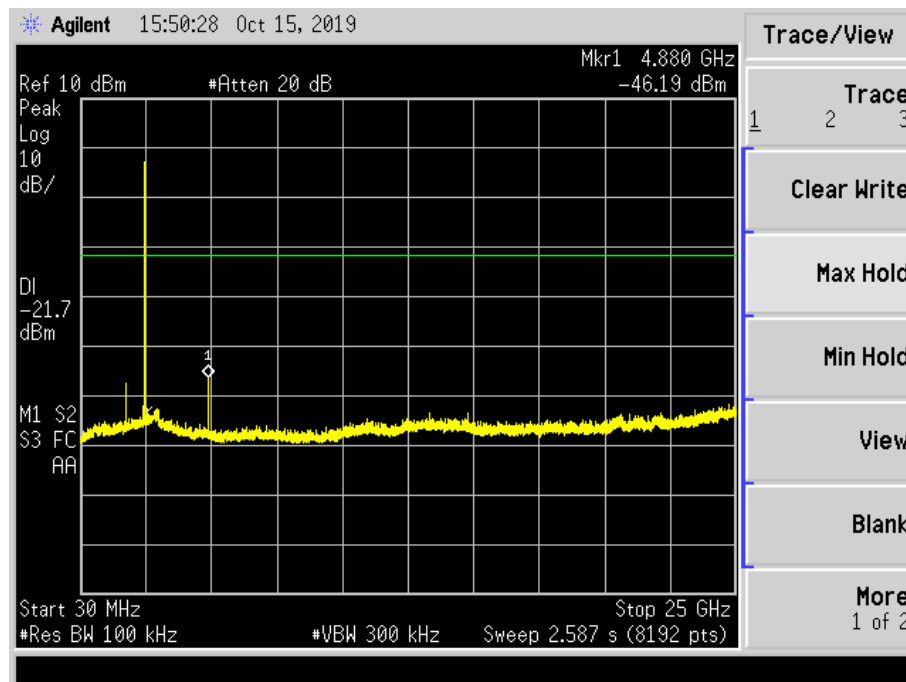


Test Model

PSD(Power Spectral Density) RBW=100kHz
Bluetooth V5.0 with BLE mode
Channel 39: 2480MHz

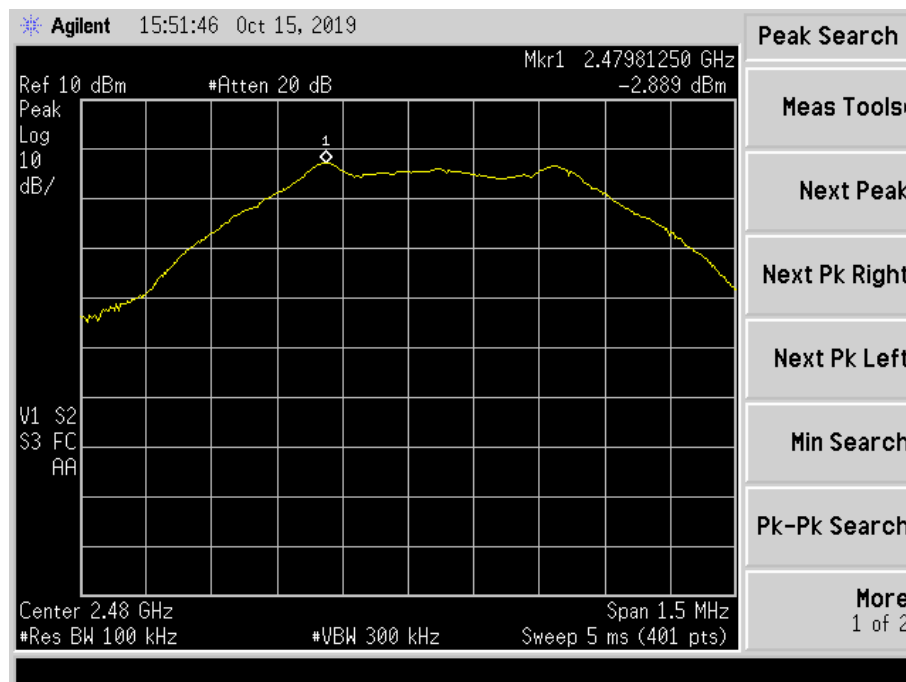


Test Model

Unwanted Emissions In Non-Restricted Frequency Bands
Bluetooth V5.0 with BLE mode
Channel 39: 2480MHz

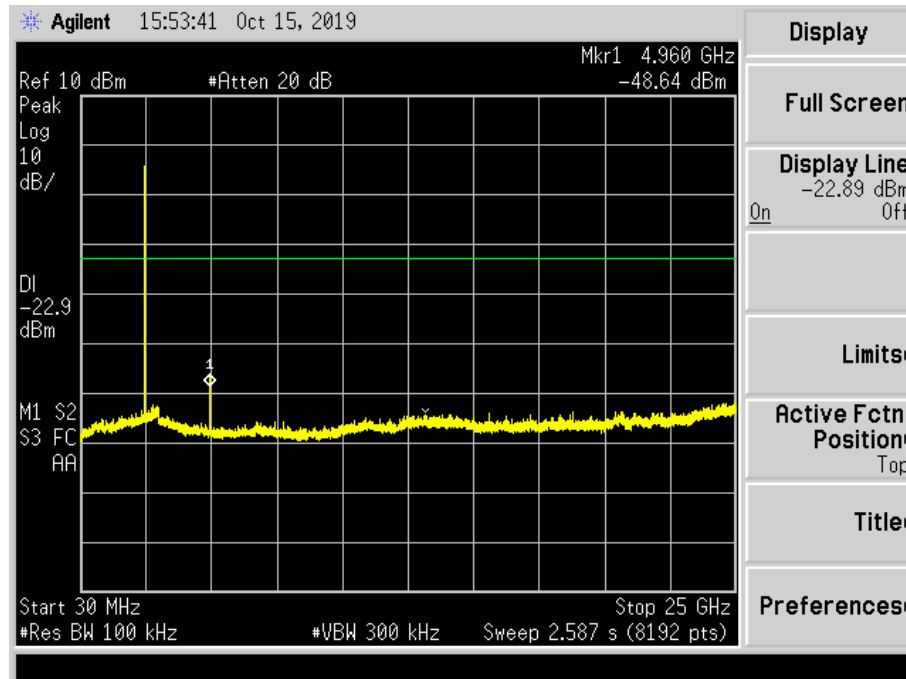

Test Model

Band edge
Bluetooth V5.0 with BLE mode
Channel 39: 2480MHz

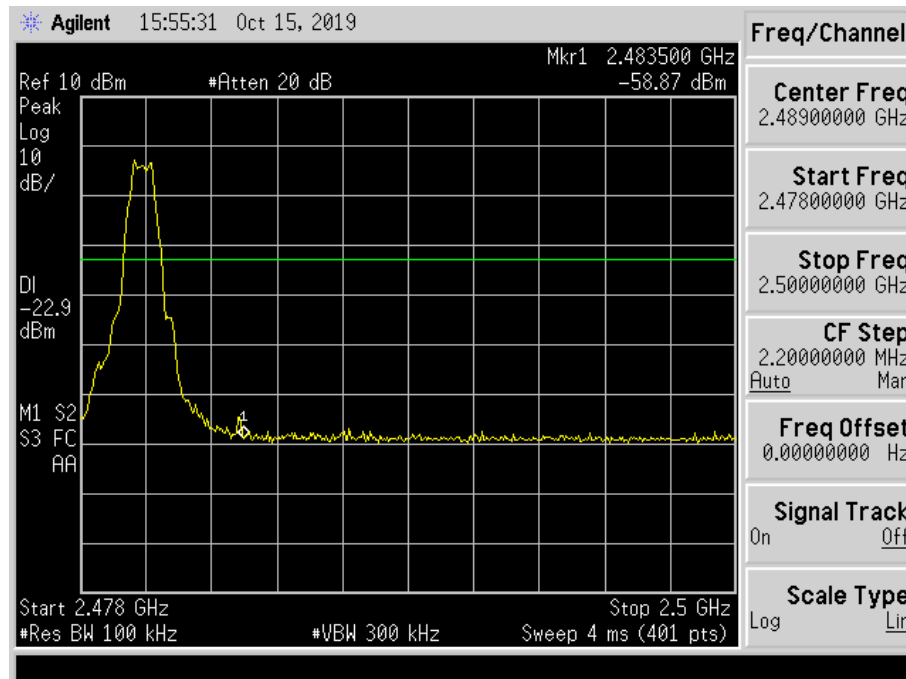

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) & RSS-Gen 6.13 and 15.209 and KDB 558074 D01 15.247 Meas Guidance V05r02

8.5.2 Conformance Limit

According to FCC Part 15.247(d) & IC RSS-Gen 6.13: radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits.

According to FCC Part 15.205 & IC RSS-Gen 6.13, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205 & IC RSS-Gen, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V/m}$)	300
0.490-1.705	24000/F(KHz)	20 log ($\mu\text{V/m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$ (1GHz to 25GHz), 100 kHz for $f < 1 \text{ GHz}$ (30MHz to 1GHz)

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature: 25°C Test Date: Oct 22, 2019
 Humidity: 48 % Test By: XW
 Test mode: TX Mode

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Temperature : 25°C Test Date : Oct 22, 2019
 Humidity : 48 % Test By: XW
 Test mode: BT 5.0 with BLE mode Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Po I. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1735.574	V	46.91	36.76	74.00	54.00	-27.09	-17.24
3783.794	V	45.59	35.49	74.00	54.00	-28.41	-18.51
7105.209	V	52.86	40.16	74.00	54.00	-21.14	-13.84
11745.425	V	60.37	46.28	74.00	54.00	-13.63	-7.72
14999.086	V	62.60	47.59	74.00	54.00	-11.40	-6.41
17901.420	V	64.94	49.18	74.00	54.00	-9.06	-4.82
1626.531	H	46.77	36.49	74.00	54.00	-27.23	-17.51
2818.481	H	45.69	35.89	74.00	54.00	-28.31	-18.11
4432.550	H	45.14	35.94	74.00	54.00	-28.86	-18.06
7383.665	H	53.18	40.95	74.00	54.00	-20.82	-13.05
14813.823	H	63.38	48.67	74.00	54.00	-10.62	-5.33
18000.000	H	64.80	49.85	74.00	54.00	-9.20	-4.15

Temperature : 25°C Test Date : Oct 22, 2019
 Humidity : 48 % Test By: XW
 Test mode: BT 5.0 with BLE mode Frequency: Channel 19: 2440MHz

Freq. (MHz)	Ant.P ol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1684.179	V	46.73	36.49	74.00	54.00	-27.27	-17.51
2850.021	V	46.36	36.75	74.00	54.00	-27.64	-17.25
8044.347	V	53.66	41.99	74.00	54.00	-20.34	-12.01
11694.613	V	60.57	46.75	74.00	54.00	-13.43	-7.25
14402.180	V	63.31	48.36	74.00	54.00	-10.69	-5.64
17966.214	V	64.84	49.55	74.00	54.00	-9.16	-4.45
1530.077	H	45.77	35.94	74.00	54.00	-28.23	-18.06
2833.593	H	46.08	36.59	74.00	54.00	-27.92	-17.41
5363.383	H	47.50	37.69	74.00	54.00	-26.50	-16.31
11402.556	H	60.72	45.33	74.00	54.00	-13.28	-8.67
14331.586	H	62.56	47.59	74.00	54.00	-11.44	-6.41
17968.811	H	65.29	50.34	74.00	54.00	-8.71	-3.66

Temperature : 25°C Test Date : Oct 22, 2019
 Humidity : 48 % Test By: XW
 Test mode: BT 5.0 with BLE mode Frequency: Channel 39: 2480MHz

Freq. (MHz)	Ant.Po l. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1545.858	V	45.64	35.86	74.00	54.00	-28.36	-18.14
2797.784	V	46.91	36.46	74.00	54.00	-27.09	-17.54
4441.527	V	45.40	35.92	74.00	54.00	-28.60	-18.08
11389.380	V	60.92	46.34	74.00	54.00	-13.08	-7.66
15020.779	V	63.32	48.22	74.00	54.00	-10.68	-5.78
17942.861	V	65.26	50.19	74.00	54.00	-8.74	-3.81
1670.363	H	46.72	36.76	74.00	54.00	-27.28	-17.24
2788.500	H	46.24	36.58	74.00	54.00	-27.76	-17.42
8267.099	H	54.68	42.05	74.00	54.00	-19.32	-11.95
11395.966	H	60.80	46.94	74.00	54.00	-13.20	-7.06
15005.591	H	62.49	48.68	74.00	54.00	-11.51	-5.32
17992.198	H	65.22	50.16	74.00	54.00	-8.78	-3.84

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Temperature : 24°C Test Date : Oct 17, 2019
 Humidity : 55 % Test By: XW
 Test mode: BT 5.0 with BLE mode Frequency: Channel 0: 2402MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
2386.640	H	49.00	74.00	-25.00	34.45	54.00	-19.55
2387.840	V	48.76	74.00	-25.24	34.42	54.00	-19.58

Temperature : 24°C Test Date : Oct 17, 2019
 Humidity : 55 % Test By: XW
 Test mode: BT 5.0 with BLE mode Frequency: Channel 39: 2480MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
2483.500	H	49.60	74.00	-24.40	39.77	54.00	-14.23
2483.500	V	49.04	74.00	-24.96	37.95	54.00	-16.05

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Test Model

Spurious Emission in Restricted Band 2310-2390MHz
Bluetooth V5.0 with BLE mode
Channel 0: 2402MHz


H

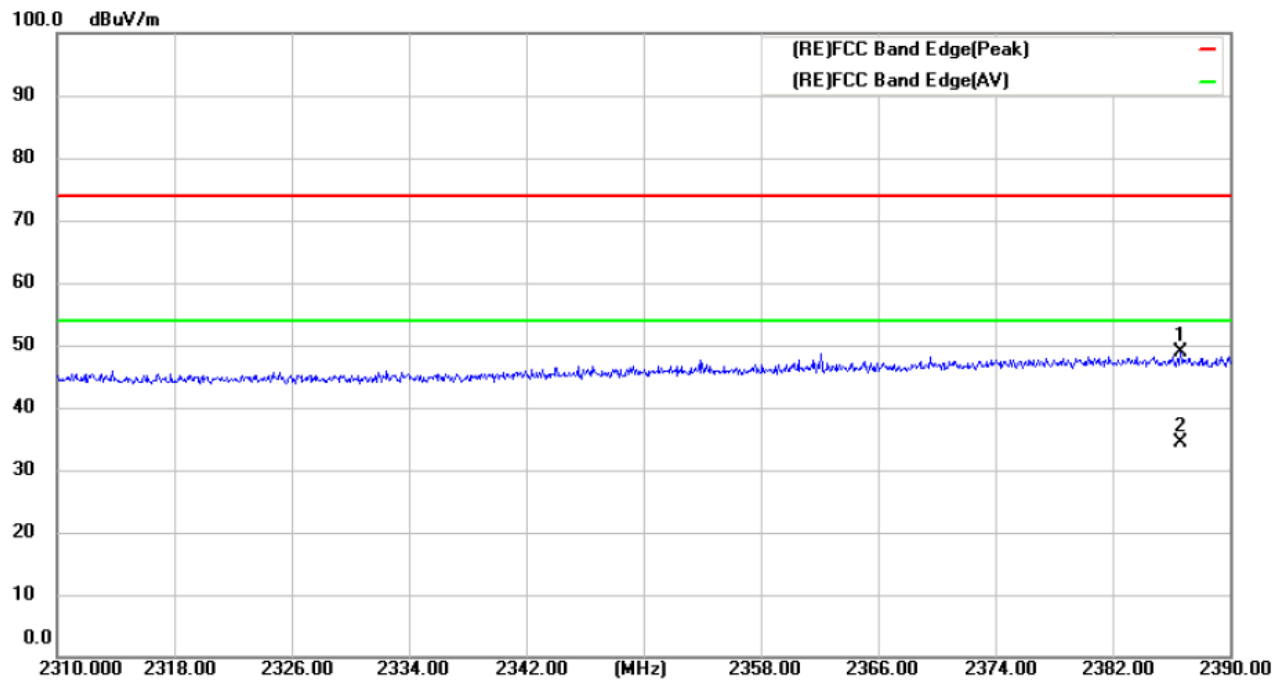

Test Model

Spurious Emission in Restricted Band 2483.5-2500MHz
Bluetooth V5.0 with BLE mode
Channel 0: 2402MHz


V

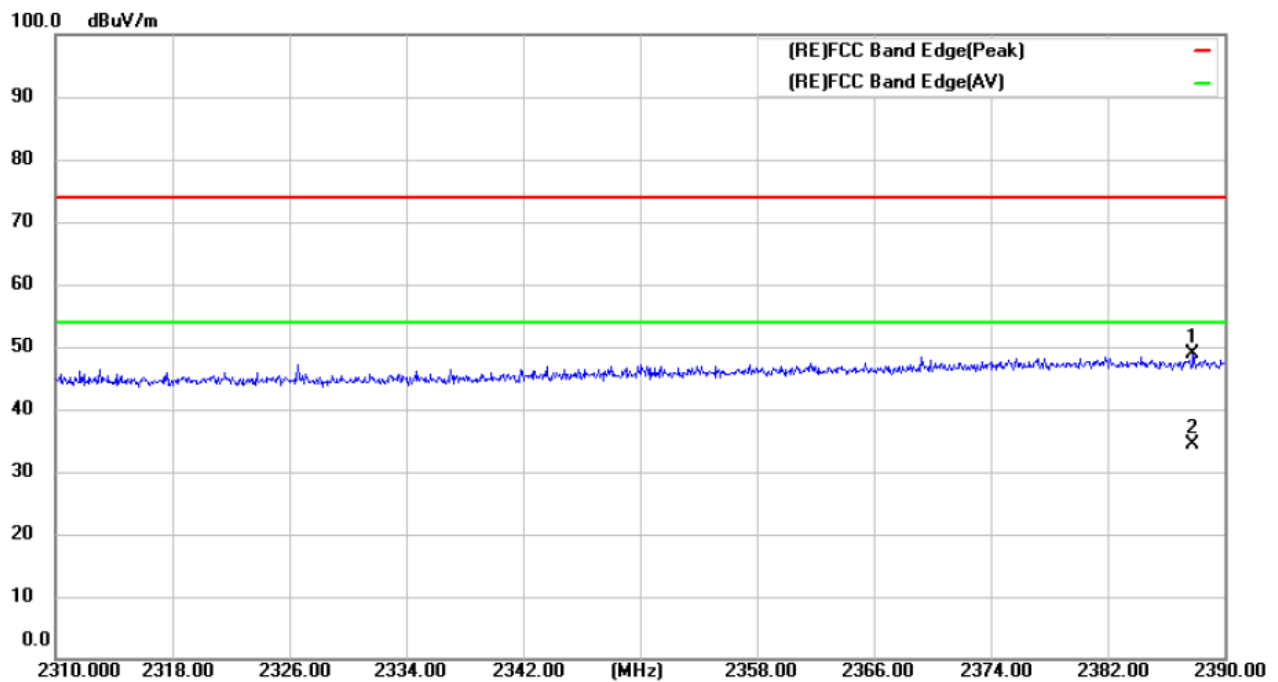

Test Model

Spurious Emission in Restricted Band 2310-2390MHz
Bluetooth V5.0 with BLE mode
Channel 39: 2480MHz


H

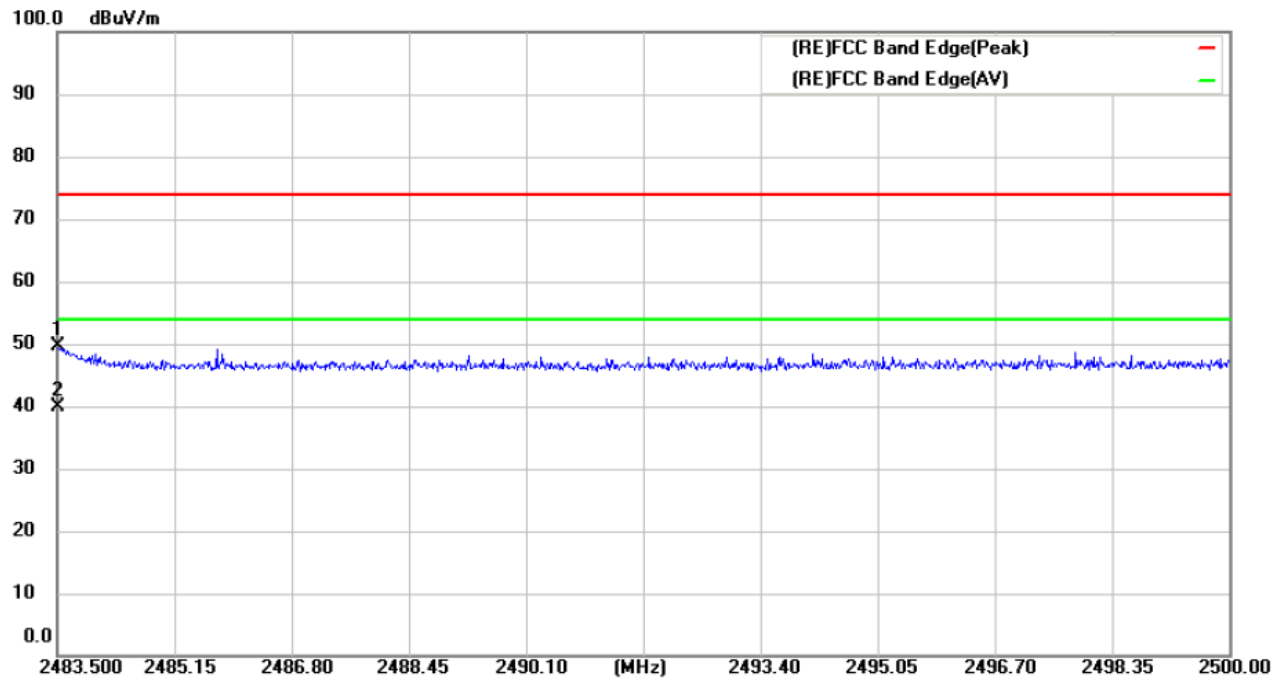


Test Model

Spurious Emission in Restricted Band 2483.5-2500MHz
Bluetooth V5.0 with BLE mode
Channel 39: 2480MHz

V

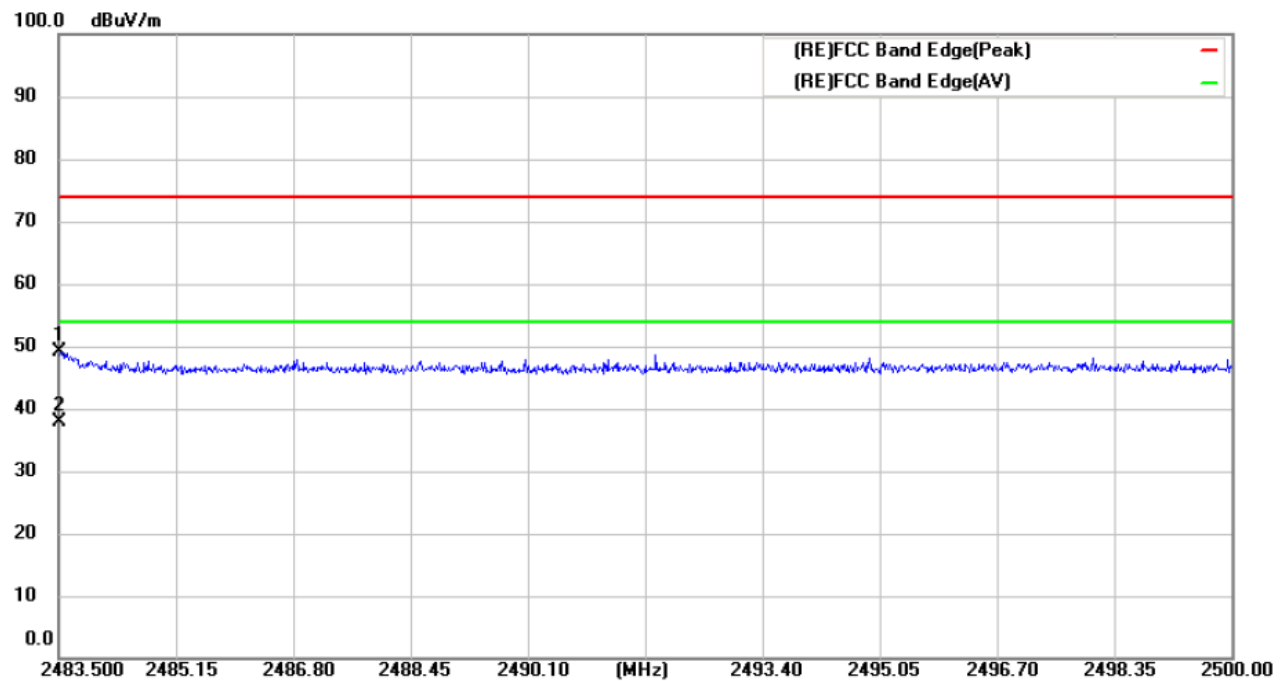


■ Spurious Emission below 1GHz (30MHz to 1GHz)

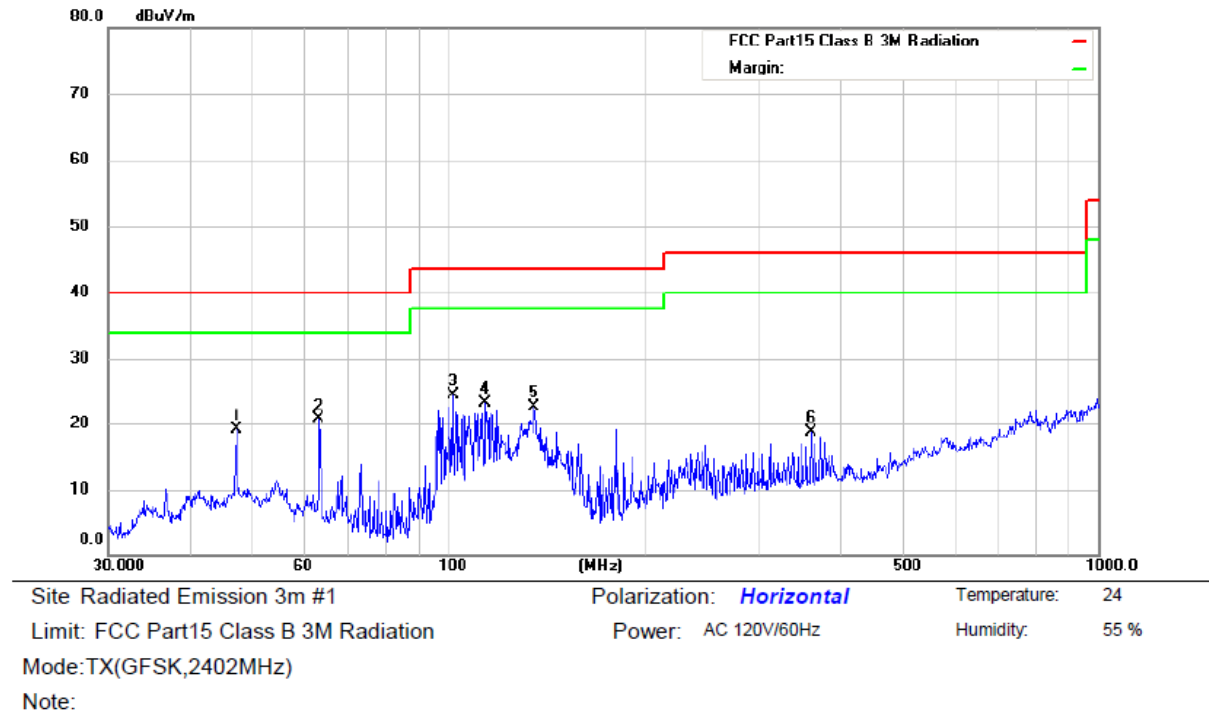

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		47.3255	38.77	-19.74	19.03	40.00	-20.97	QP		
2		63.3132	43.20	-22.46	20.74	40.00	-19.26	QP		
3	*	101.6443	45.56	-21.01	24.55	43.50	-18.95	QP		
4		114.1137	45.86	-22.49	23.37	43.50	-20.13	QP		
5		135.5061	48.57	-25.78	22.79	43.50	-20.71	QP		
6		361.7138	36.71	-18.04	18.67	46.00	-27.33	QP		

*:Maximum data x:Over limit !:over margin


Operator: XW

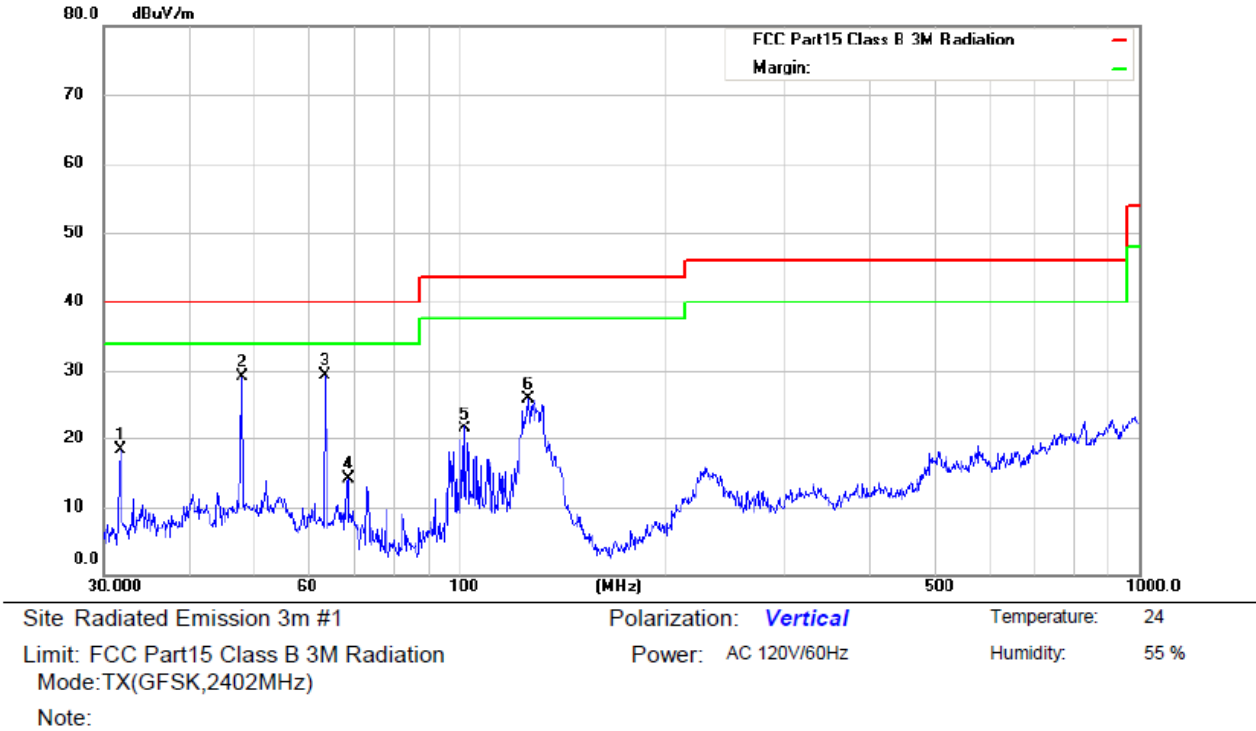

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		31.7312	41.69	-23.41	18.28	40.00	-21.72	QP			
2		47.9940	48.95	-19.90	29.05	40.00	-10.95	QP			
3	*	63.5356	51.86	-22.51	29.35	40.00	-10.65	QP			
4		68.6310	37.91	-23.71	14.20	40.00	-25.80	QP			
5		101.6443	42.61	-21.01	21.60	43.50	-21.90	QP			
6		126.3285	50.17	-24.29	25.88	43.50	-17.62	QP			

*:Maximum data x:Over limit !:over margin

Operator: XW

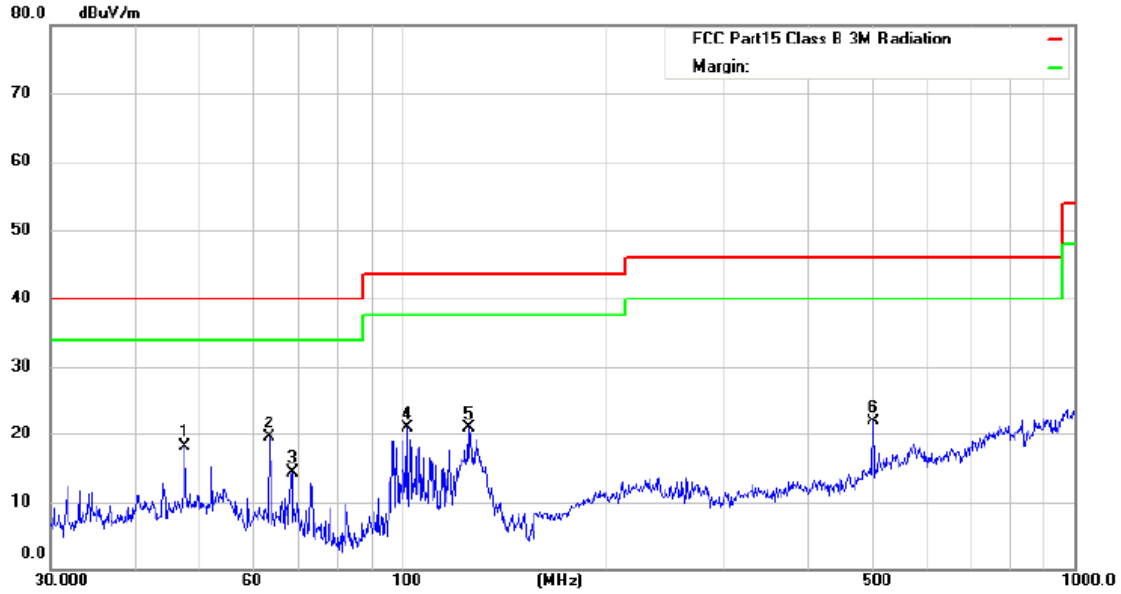

Site Radiated Emission 3m #1

Polarization: **Vertical**

Temperature: 24

Limit: FCC Part15 Class B 3M Radiation

Power: AC 120V/60Hz

Humidity: 55 %


Mode:TX(GFSK,2440MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		47.4917	37.93	-19.77	18.16	40.00	-21.84	QP		
2	*	63.5356	41.93	-22.51	19.42	40.00	-20.58	QP		
3		68.6310	37.93	-23.71	14.22	40.00	-25.78	QP		
4		101.6443	41.97	-21.01	20.96	43.50	-22.54	QP		
5		125.4457	45.01	-24.08	20.93	43.50	-22.57	QP		
6		501.1788	36.85	-14.88	21.97	46.00	-24.03	QP		

*:Maximum data x:Over limit !:over margin


Operator: XW

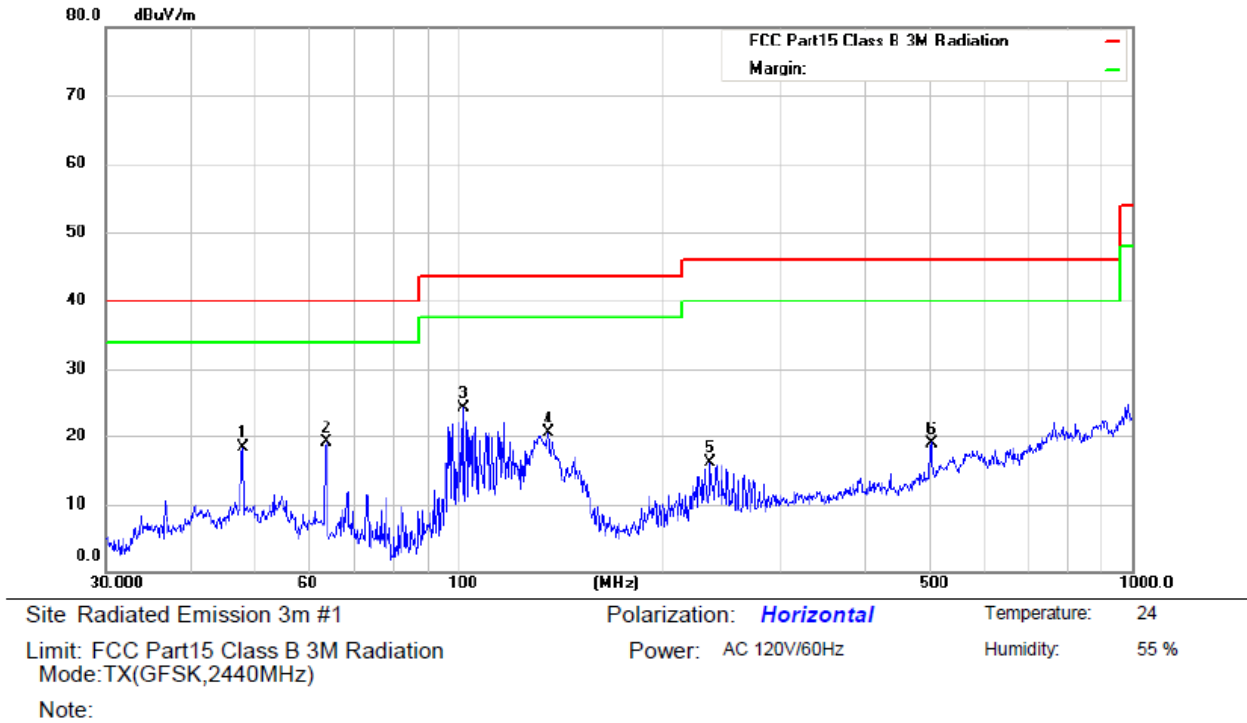

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		47.9938	38.21	-19.90	18.31	40.00	-21.69	QP			
2		63.7588	41.66	-22.55	19.11	40.00	-20.89	QP			
3	*	101.6443	45.34	-21.01	24.33	43.50	-19.17	QP			
4		135.9821	46.28	-25.83	20.45	43.50	-23.05	QP			
5		236.6447	37.51	-21.39	16.12	46.00	-29.88	QP			
6		502.9395	33.72	-14.72	19.00	46.00	-27.00	QP			

*:Maximum data x:Over limit !:over margin


Operator: XW

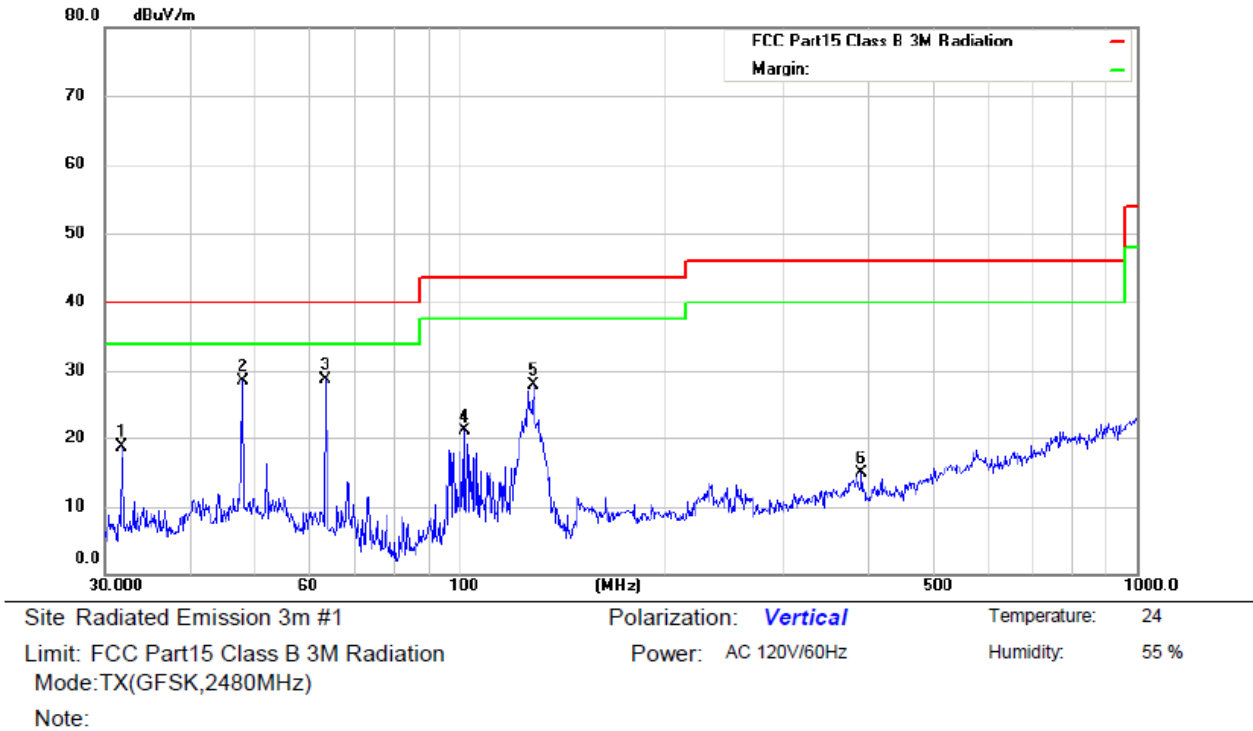

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.8427	42.04	-23.35	18.69	40.00	-21.31	QP		
2		47.9940	48.46	-19.90	28.56	40.00	-11.44	QP		
3	*	63.5356	51.27	-22.51	28.76	40.00	-11.24	QP		
4		101.6443	42.13	-21.01	21.12	43.50	-22.38	QP		
5		128.5629	52.78	-24.83	27.95	43.50	-15.55	QP		
6		392.0950	31.76	-16.95	14.81	46.00	-31.19	QP		

*:Maximum data x:Over limit !:over margin

Operator: XW

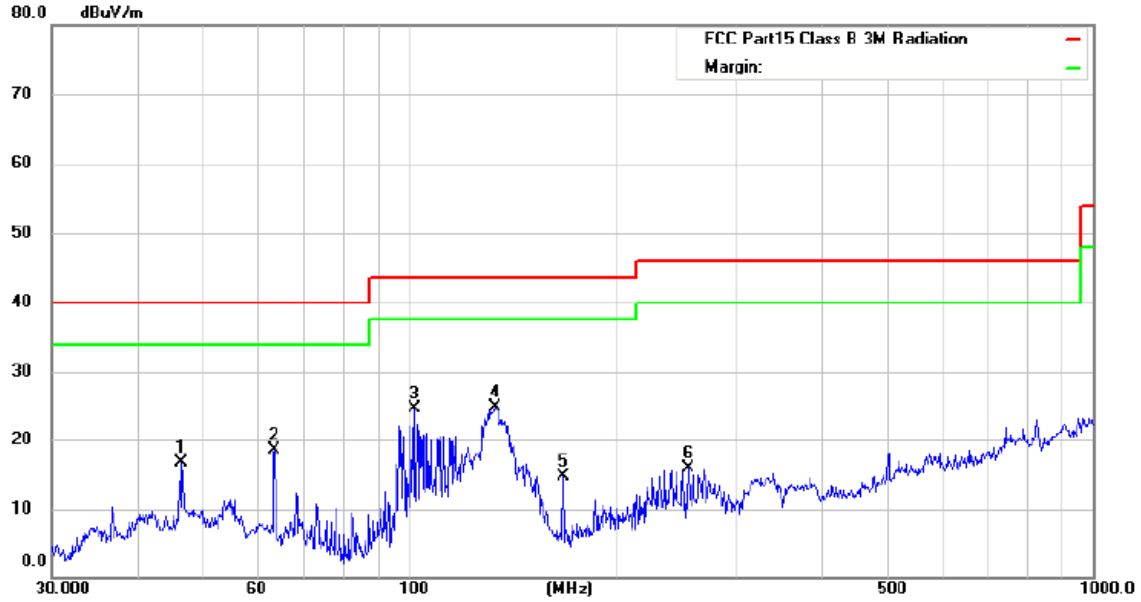

Polarization: **Horizontal** Temperature: 24
Power: AC 120V/60Hz Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		46.5030	36.20	-19.54	16.66	40.00	-23.34	QP		
2		63.5356	40.99	-22.51	18.48	40.00	-21.52	QP		
3		101.6443	45.77	-21.01	24.76	43.50	-18.74	QP		
4	*	133.6188	50.52	-25.57	24.95	43.50	-18.55	QP		
5		167.8242	40.16	-25.37	14.79	43.50	-28.71	QP		
6		255.6231	37.44	-21.44	16.00	46.00	-30.00	QP		

*:Maximum data x:Over limit !:over margin

Operator: XW

8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a) & IC RSS-Gen 8.8

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration


Test according to clause 7.3 conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

PASS

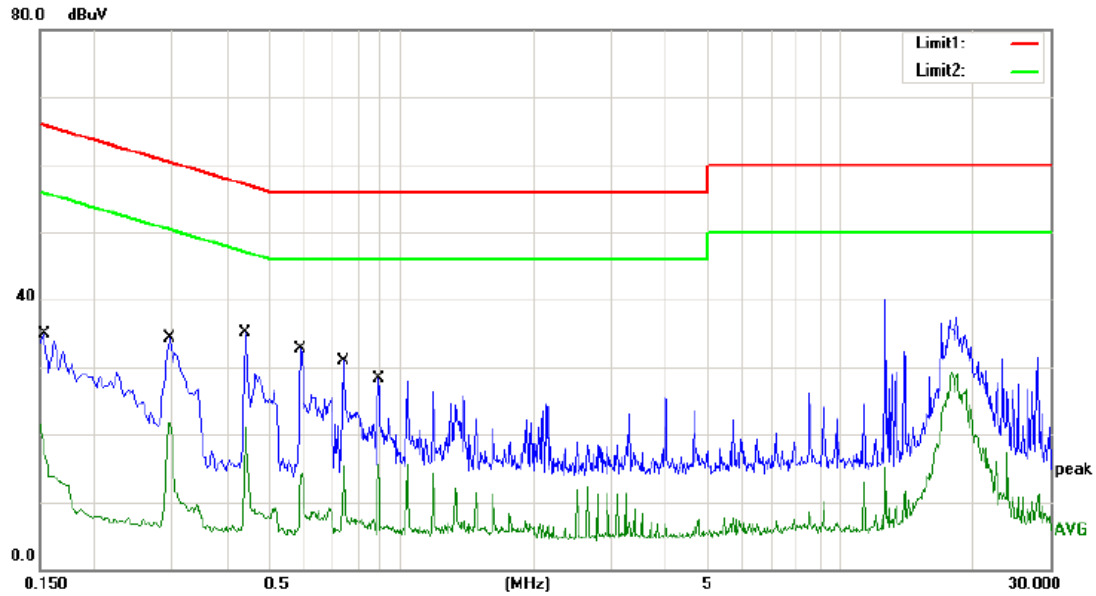

Site site #1

Phase: **N**

Temperature: 24

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz

Humidity: 55 %

Mode: Bluetooth Working

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1540	24.90	10.08	34.98	65.78	-30.80	QP	
2		0.1540	7.30	10.08	17.38	55.78	-38.40	AVG	
3		0.2980	24.10	10.09	34.19	60.30	-26.11	QP	
4		0.2980	11.50	10.09	21.59	50.30	-28.71	AVG	
5	*	0.4420	24.90	10.10	35.00	57.02	-22.02	QP	
6		0.4420	11.00	10.10	21.10	47.02	-25.92	AVG	
7		0.5900	22.60	10.06	32.66	56.00	-23.34	QP	
8		0.5900	3.90	10.06	13.96	46.00	-32.04	AVG	
9		0.7380	20.80	9.99	30.79	56.00	-25.21	QP	
10		0.7380	5.20	9.99	15.19	46.00	-30.81	AVG	
11		0.8860	18.30	9.92	28.22	56.00	-27.78	QP	
12		0.8860	5.50	9.92	15.42	46.00	-30.58	AVG	

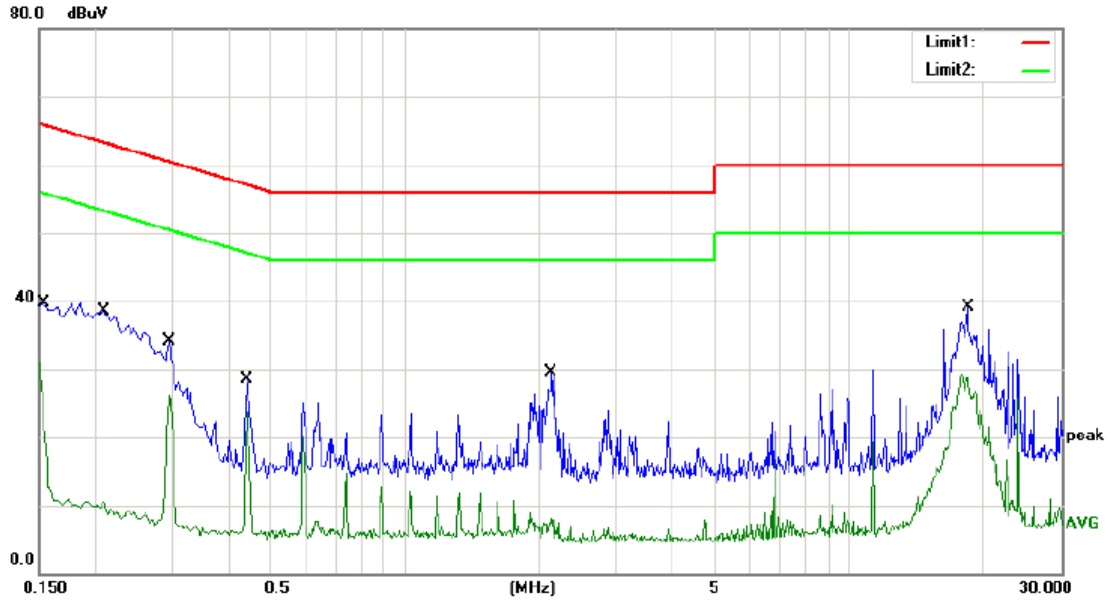

Site site #1

Phase: L1

Temperature: 24

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: Bluetooth Working

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1540	29.60	10.10	39.70	65.78	-26.08	QP	
2		0.1540	12.00	10.10	22.10	55.78	-33.68	AVG	
3		0.2100	28.30	10.09	38.39	63.21	-24.82	QP	
4		0.2100	0.40	10.09	10.49	53.21	-42.72	AVG	
5		0.2940	24.00	10.09	34.09	60.41	-26.32	QP	
6		0.2940	16.00	10.09	26.09	50.41	-24.32	AVG	
7		0.4420	18.30	10.07	28.37	57.02	-28.65	QP	
8		0.4420	13.60	10.07	23.67	47.02	-23.35	AVG	
9		2.1340	19.30	10.12	29.42	56.00	-26.58	QP	
10		2.1340	-2.00	10.12	8.12	46.00	-37.88	AVG	
11	*	18.4840	28.50	10.59	39.09	60.00	-20.91	QP	
12		18.4840	17.30	10.59	27.89	50.00	-22.11	AVG	

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203 & IC RSS-Gen 6.7	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203 & IC RSS-Gen 6.7, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b) & IC RSS-Gen 6.7, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

The EUT'S antenna is a dipole antenna. The antenna's gain is 0 dBi and meets the requirement, please refer to the internal photos.