

廠商會檢定中心

TEST REPORT

Report No.	:	AW0022783(0)		Date :	April 27, 2018
Application No.	:	LW005219(6)			
Applicant	:	Toy Shock International Limited Unit 302-303, 3/F, Tower B, New Mandarin Plaza, 14 Science Museum Road, Tsim Sha Tsui East, Kowloon, Hong Kong			
Sample Description	:	One(1) item of submitted s Sample Description Stringray Wave Runner	Model No. 300070A 300061A	2:	
		Rating No. of submitted sample	: 27.145MHz : 1 x 9V battery : Two (2) piece (s : RW009226-0040	·	09224-004(0)
Date Received	:	February 13, 2018			
Test Period	:	March 3, 2018 – April 6, 2018			
Test Requested	:	FCC 47CFR Part 15 Certification and RSS-310 Verification.			
Test Method	:	47 CFR Part 15 (10-1-17 Edition) RSS-310 Issue 4, July 2015 ANSI C63.10 – 2013			
Test Result	:	See attached sheet(s) from page 2 to 14.			
Conclusion	:	The submitted sample was found to comply with requirement of FCC 47CFR Part 15 Subpart C and RSS-310 Issue 4.			

For and on behalf of CMA Industrial Development Foundation Limited

Mr. WONG Lap-pong Andrew Manager Electrical Division

Page 1 of 14

Authorized Signature : _

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u>. This document shall not be reproduced except in full or with written approval by CMA Testing



TEST REPORT

Report No. : AW0022783(0)

Date : April 27, 2018

Table of Contents

2.1Test Procedure	1 Ge	neral Information	
1.3List of measuring equipment.51.4Measurement Uncertainty.61.5Test Summary.62Description of the radiated emission test72.1Test Procedure72.2Test Setup72.3Test Result93.1Test Procedure113.2Test Result113.3Test Setup113.4Graph and Table of Conducted Emission Measurement Data114Supplementary document.124.1Bandwidth12	1.1	General Description	
1.4Measurement Uncertainty61.5Test Summary62Description of the radiated emission test72.1Test Procedure72.2Test Setup72.3Test Result93.1Test Procedure113.2Test Result113.3Test Setup113.4Graph and Table of Conducted Emission Measurement Data114Supplementary document124.1Bandwidth12	1.2	Location of the test site	4
1.5Test Summary62Description of the radiated emission test72.1Test Procedure72.2Test Setup72.3Test Result93.1Test Procedure113.2Test Result113.3Test Setup113.4Graph and Table of Conducted Emission Measurement Data114Supplementary document124.1Bandwidth12	1.3	List of measuring equipment	5
2Description of the radiated emission test.72.1Test Procedure.72.2Test Setup.72.3Test Result.93.1Test Procedure.113.2Test Result.113.3Test Setup.113.4Graph and Table of Conducted Emission Measurement Data.114Supplementary document.124.1Bandwidth.12	1.4	Measurement Uncertainty	6
2Description of the radiated emission test.72.1Test Procedure.72.2Test Setup.72.3Test Result.93.1Test Procedure.113.2Test Result.113.3Test Setup.113.4Graph and Table of Conducted Emission Measurement Data.114Supplementary document.124.1Bandwidth.12	1.5	Test Summary	6
2.1Test Procedure	2 De	scription of the radiated emission test	7
2.3Test Result93.1Test Procedure113.2Test Result113.3Test Setup113.4Graph and Table of Conducted Emission Measurement Data114Supplementary document124.1Bandwidth12		Test Procedure	7
2.3Test Result93.1Test Procedure113.2Test Result113.3Test Setup113.4Graph and Table of Conducted Emission Measurement Data114Supplementary document124.1Bandwidth12	2.2	Test Setup	7
3.2Test Result113.3Test Setup113.4Graph and Table of Conducted Emission Measurement Data114Supplementary document124.1Bandwidth12	2.3	Test Result	9
3.3Test Setup113.4Graph and Table of Conducted Emission Measurement Data114Supplementary document124.1Bandwidth12	3.1	Test Procedure	
3.4Graph and Table of Conducted Emission Measurement Data114Supplementary document124.1Bandwidth12	3.2	Test Result	
4 Supplementary document	3.3	Test Setup	
4 Supplementary document		Graph and Table of Conducted Emission Measurement Data	
4.1 Bandwidth	4 Su	pplementary document	
5 Appendices 13	-		
	5 Ap	pendices	

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u>. This document shall not be reproduced except in full or with written approval by CMA Testing.



TEST REPORT

Report No. : AW0022783(0)

Date : April 27, 2018

1 General Information

1.1 General Description

The equipment under test (EUT) model 300061A is a remote controlled toys. It operates at frequency band 27.145MHz for transmitter. The oscillation of radio control is generated by a 27.145MHz crystal and modulated by transistor, Q2. The EUT is powered by one 9V battery. The EUT contains two control levers to control moving direction and a ON/OFF switch.

The model: 300070A is identical as model 300061A on the remote control unit (transmitter). The difference is only on the outlook of the remote controlled boat (receiver).

The wire antenna is used in EUT and the radio output power is unable to adjust.

The brief circuit description is listed as follows:

- S1-S5 and K1	and its associated circuit act as switch and control lever
- U1	and its associated circuit act as MCU
- X1	and its associated circuit act as oscillation clock
- Q2	and its associated circuit act as modulator
- Q1	and its associated circuit act as amplifier
- C8, C4, L3	and its associated circuit act as low-pass filter

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u>. This document shall not be reproduced except in full or with written approval by CMA Testing.



TEST REPORT

Report No. : AW0022783(0)

Date : April 27, 2018

1.2 Location of the test site

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2014. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre, 9 – 13 Wong Chuk Yeung Street, Fo Tan, Shatin, New Territories, Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 - 2014. A shielded room is located at :

Ground Floor, Yan Hing Centre, 9 – 13 Wong Chuk Yeung Street, Fo Tan, Shatin, New Territories, Hong Kong.

FCC Accredited Lab (Designation Number: HK0004) ISED Wireless Test Site (ISED Assigned Code: 4093A

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com This document shall not be reproduced except in full or with written approval by CMA Testing.



廠商會檢定中心

TEST REPORT

Report No. : AW0022783(0)

Date :

April 27, 2018

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	Rohde & Schwarz	ESCS30	100001	01 Feb 2019	1Year
EMI Test Receiver	Rohde & Schwarz	ESCI	100152	07 Dec 2018	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100964	08 Feb 2019	1Year
Broadband Antenna	Schaffner	CBL6112B	2692	28 Mar 2020	2Years
Loop Antenna	EMCO	6502	00056620	25 Jan 2020	2Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D- 531	21 Dec 2018	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	21 Dec 2018	2Years
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA917 0442	02 Aug 2018	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	02 Aug 2018	2Years
Coaxial Cable	Schaffner	RG 213/U	N/A	18 May 2018	1Year
Coaxial Cable	Suhner	RG 214/U	N/A	18 May 2018	1Year
Coaxial Cable	Suhner	Sucoflex_104	N/A	21 Dec 2018	1Year
LISN	Rohde & Schwarz	ENV216	101323	16 Jan 2019	1Year
Coaxial Cable	Tyco Electronics	RG 58C/U	N/A	24 Oct 2018	1Year

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u> This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited



廠商會檢定中心

TEST REPORT

Report No. : AW0022783(0)

Date : April 27, 2018

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%.

Radiated emissions

Kadiated emissions					
Frequency	Uncertainty (U _{lab})				
30MHz ~ 200MHz (Horizontal)	4.59dB				
30MHz ~ 200MHz (Vertical)	4.49dB				
200MHz ~1000MHz (Horizontal)	4.94dB				
200MHz ~1000MHz (Vertical)	4.97dB				
1GHz ~ 6GHz	4.52dB				

1.5 Test Summary

TEST ITEM	FCC REFERANCE	RSS REFERENCE	RESULT
Fundamental emission	15.227(a)	RSS-310, section 3.8	Comply
Out-band emission	15.227(d)	RSS-310, section 3.8	Comply
Bandwidth	15.215(c)	RSS-Gen	Comply

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u>. This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited



TEST REPORT

Report No. : AW0022783(0)

Date : April 27, 2018

2 Description of the radiated emission test


2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 - 2013.

A non-conductive turntable with dimensions of $1.5m \ge 0.4m \ge 0.8m$ (L $\ge W \ge H$) placed above the reference ground plane. The equipment under test (EUT) was placed at 0.8m height for below 1GHz measurement and 1.5m height for above 1GHz measurement. The test distance is 3m between EUT and receiving antenna. A broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated. Additional absorbing material will be placed between the EUT and receiving antenna for above 1GHz measurement.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.

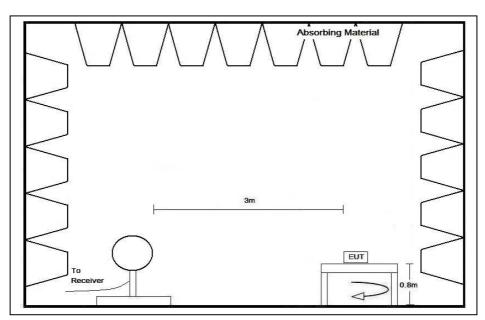

2.2 Test Setup

FCC ID: 2AHUVCXT3313-2


This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u>. This document shall not be reproduced except in full or with written approval by CMA Testing



AW0022783(0)

:


Date : April 27, 2018

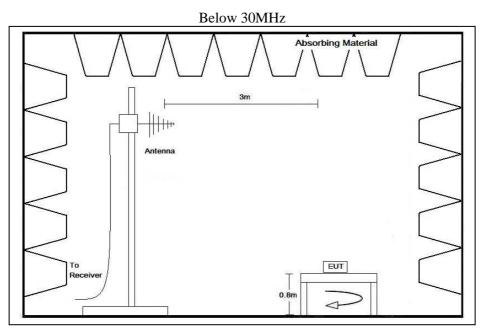

2.2 Test Setup

Report No.

30MHz - 1GHz

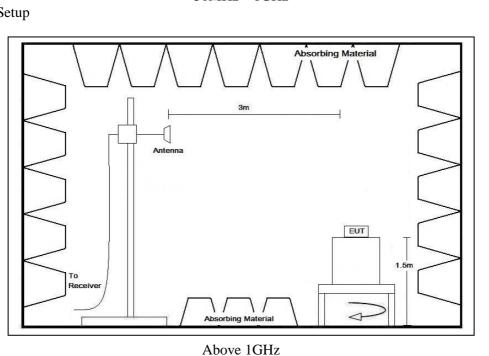

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u>. This document shall not be reproduced except in full or with written approval by CMA Testing.



TEST REPORT

Report No. : AW0022783(0)

Date : April 27, 2018

2.3 Test Result

Peak Detector data was measured unless otherwise stated.

The radiated emissions are measured from 9kHz to 270MHz (the tenth harmonics)

The worst case configuration is shown on the worst case configuration of test setup photo.

The frequencies from fundamental up to tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next pages.

The EUT has been tested in Transmission mode.

It was found that the EUT meet the FCC requirement and RSS requirement.

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u> This document shall not be reproduced except in full or with written approval by CMA Testing.



TEST REPORT

Report No. : AW0022783(0)

Date : April 27, 2018

2.4 Radiated Emission Measurement Data

Radiated emission

Environmental conditions:ParameterRecorded valueAmbient temperature:24.3° CRelative humidity:60.2%

Polarization	Frequency (MHz)	Reading at 3m	Antenna Factor and	Field Strength at	Limit at 3m (dBµV/m)	Margin (dB)	Detector Type
		(dBµV)	Cable Loss (dB/m)	3m (dBµV/m)	` • <i>´</i>		
V	27.142	51.9	16.0	67.9	80.0	-12.9	Peak
V	54.282	21.6	10.4	32.0	40.0	-8.0	Peak
V	81.449	6.1	9.8	15.9	40.0	-24.1	Peak
Н	108.566	9.5	11.2	20.7	43.5	-22.8	Peak
Н	135.725	11.3	12.6	23.9	43.5	-19.6	Peak
V	162.868	8.4	14.2	22.6	43.5	-20.9	Peak

Remark: All other emission below the limit more than 20dB are not reported in this report.

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u> This document shall not be reproduced except in full or with written approval by CMA Testing.



TEST REPORT

Report No. : AW0022783(0)

Date : April 27, 2018


- 3 Description of the Line-conducted Test
- 3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 - 2013. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

3.3 Test Setup

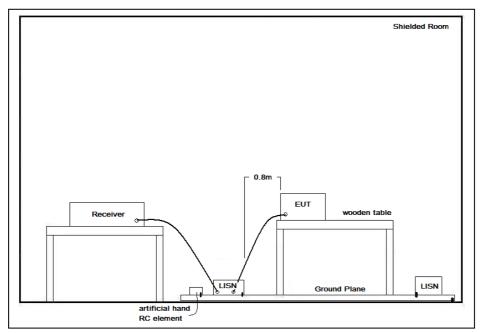

3.4 Graph and Table of Conducted Emission Measurement Data

Not Applicable

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u> This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited



廠商會檢定中心

TEST REPORT

Report No. : AW0022783(0)

Date : April 27, 2018

4 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename		
ID Label/Location	Label Artwork and Location.pdf		
Block Diagram	Block Diagram.pdf		
Schematic Diagram	Schematic.pdf		
Users Manual	User Manual.pdf		
Operational Description	Operation Description.pdf		

4.1 Bandwidth

Appendices A1 is shown the fundamental emission is confined in the specified band. 20dB bandwidth and 99% bandwidth are 5.58kHz and 16.3kHz and both bandwidth are within the assigned band. It also shows that the EUT meets the FCC Part 15.215(c) and RSS-Gen requirement.

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u>. This document shall not be reproduced except in full or with written approval by CMA Testing.



廠商會檢定中心

TEST REPORT

 Report No.
 :
 AW0022783(0)
 Date :
 April 27, 2018

5 Appendices

A1. Bandwidth Plot

1 page(s)

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u>. This document shall not be reproduced except in full or with written approval by CMA Testing




TEST REPORT

Report No.

AW0022783(0)


:

Date : April 27, 2018

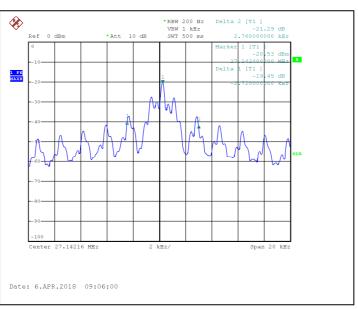

A1. Bandwidth Plot

20dB Bandwidth

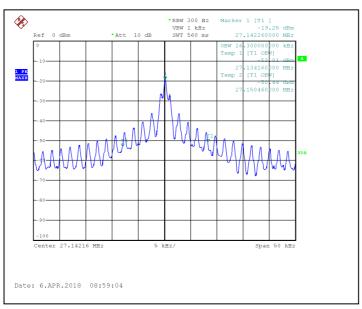

99% Bandwidth

***** End of Report *****

FCC ID: 2AHUVCXT3313-2

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <u>www.cmatcl.com</u> This document shall not be reproduced except in full or with written approval by CMA Testing

CMA Industrial Development Foundation Limited