

FCC TEST REPORT

No. 170201254SHA-001

Applicant : Guangdong Meijiixin Innovative technology Co.,
Ltd
Xingye South Road, Laimei Industrial Park,
Chenghai, Shantou, Guangdong, China

Manufacturer : Guangdong Meijiixin Innovative technology Co.,
Ltd
Xingye South Road, Laimei Industrial Park,
Chenghai, Shantou, Guangdong, China

Product Name : Remote Control

Type/Model : GR-303

Additional Models : GR-304, GR-730

TEST RESULT : PASS

SUMMARY

The equipment complies with the requirements according to the following standard(s) or specification:

47CFR Part 15 (2016): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Date of issue: February 19, 2017

Prepared by:



Nemo Li (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)

Description of Test Facility

Report prepare by:

Name : Intertek Testing Service Shanghai
Address : Building 86, No. 1198 Qinzhou Road(North), Shanghai
200233, P.R. China
Telephone : +86 (0)21 61278200
Telefax : +86 (0)21 54262353
FCC Registration
Number : 236597
IC Assigned Code : 2402B-1

Sub-contact laboratory for testing:

Name : Shenzhen UnionTrust Quality and Technology Co., Ltd.
Address : 16/F, Block A, Building 6, Baoneng Science and
Technology Park, Qingxiang Road No.1, Longhua New
District, Shenzhen, China
Telephone : +86 (0)755 28230888
Telefax : +86 (0)755 28230886

Name : Compliance Certification Services (Shenzhen) Inc.
Address : No.10-1 Mingkeda Logistics Park, No.18 Huanguan
South RD. Guan lan Town, Baoan Distr, Shenzhen,
Guangdong, China.
Telephone : +86 (0)755 28055000
Telefax : +86 (0)755 29055221
FCC Registration
Number : 441872

Content

SUMMARY.....	1
1 GENERAL INFORMATION	4
1.1 Description of Client.....	4
1.2 Identification of the EUT	4
1.3 Technical Specification.....	5
2 TEST SPECIFICATIONS.....	6
2.1 Standards or specification	6
2.2 Mode of operation during the test.....	6
2.3 Test software list	6
2.4 Test peripherals list	6
2.5 Instrument list	7
2.6 Test Summary	8
3 RADIATED EMISSION	9
3.1 Test limit	9
3.2 Test Configuration	9
3.3 Test procedure and test setup	10
3.4 Test protocol	11
4 ASSIGNED BANDWIDTH (20DB BANDWIDTH).....	13
4.1 Limit.....	13
4.2 Test Configuration	13
4.3 Test procedure and test setup	13
4.4 Test protocol	14
5 POWER LINE CONDUCTED EMISSION	15
5.1 Limit.....	15
5.2 Test configuration	15
5.3 Test procedure and test set up	16
5.4 Test protocol	17

1 GENERAL INFORMATION

1.1 Description of Client

Applicant : Guangdong Meijiixin Innovative technology Co., Ltd
Xingye South Road, Laimei Industrial Park, Chenghai,
Shantou, Guandong, China

Name of contact : Hellen Lin

Tel : +86 (0)754 85510798

Fax : ---

Email : hellen@mjxrc.com

Manufacturer : Guangdong Meijiixin Innovative technology Co., Ltd
Xingye South Road, Laimei Industrial Park, Chenghai,
Shantou, Guandong, China

1.2 Identification of the EUT

Product Name : Remote Control

Type/model : GR-303

Additional Models : GR-304, GR-730

(Note: All the model numbers are identical in circuitry and electrical, mechanical and physical construction; the only differences are the appearance, trade name and model no. for trading purpose.)

FCC ID : 2AHV3GR303

1.3 Technical Specification

Operation Frequency	:	2400~2483.5MHz
Band	:	
Type of Modulation	:	FHSS
EUT Modes of Modulation	:	GFSK
Channel Number	:	94
Description of EUT	:	Remote controller of Aircraft
Port identification	:	NA
Antenna	:	Internal antenna
Rating	:	DC 6.0V from 4*AA battery
Declared Temperature range	:	N/A
Category of EUT	:	Class B
EUT type	:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Sample received date	:	January 3, 2017
Sample Identification No	:	N/A
Date of test	:	January 3, 2017 to February 17, 2017

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2016)
ANSI C63.10 (2013)

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	EZ-EMC	FARAO	LZ-RF / CCS-SZ-3A2
Radiated emission	EZ-EMC	FARAO	LZ-RF / CCS-SZ-3A2

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
---	---	---	---

2.5 Instrument list

3m (Semi/Full-Anechoic Chamber)					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Due date (mm-dd-yyyy)	Cal. Interval
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	02-20-2017	1 Year
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Loop Antenna	COM-POWER	AL-130	121044	02-20-2017	1 Year
Bilog Antenna	SCHAFFNER	CBL6143	5063	02-21-2017	1 Year
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02-20-2017	1 Year
High Noise Amplifier	Agilent	8449B	3008A01838	02-21-2017	1 Year
Horn Antenna	Schwarzbeck	BBHA9120	D286	02-21-2017	1 Year
Temp. / Humidity Meter	Anymetre	JR913	N/A	02-21-2017	1 Year
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAO	LZ-RF / CCS-SZ-3A2			

Conducted RF test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Due date (mm-dd-yyyy)	Cal. Interval
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	02-22-2017	1 Year
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	02-22-2017	1 Year

2.6 Test Summary

This report applies to tested sample only. The test results have been compared directly with the limits, and the measurement uncertainty is recorded. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERANCE	RESULT
Radiated emission	15.249 & 15.209	Pass
Assigned bandwidth (20dB bandwidth)	15.215(c)	Pass
Power line conducted emission	15.207	NA

Notes: 1: NA =Not Applicable

2: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

3 Radiated emission

Test result: Pass


3.1 Test limit

Fundamental Frequency (MHz)	Fundamental limit (dBuV/m)	Harmonic limit (dBuV/m)
<input type="checkbox"/> 902 - 928	94	54
<input checked="" type="checkbox"/> 2400 - 2483.5	94	54
<input type="checkbox"/> 5725 - 5875	94	54
<input type="checkbox"/> 24000 - 24250	108	68

The radiated emissions which fall outside allocated band (2400-2483.5MHz), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

3.2 Test Configuration

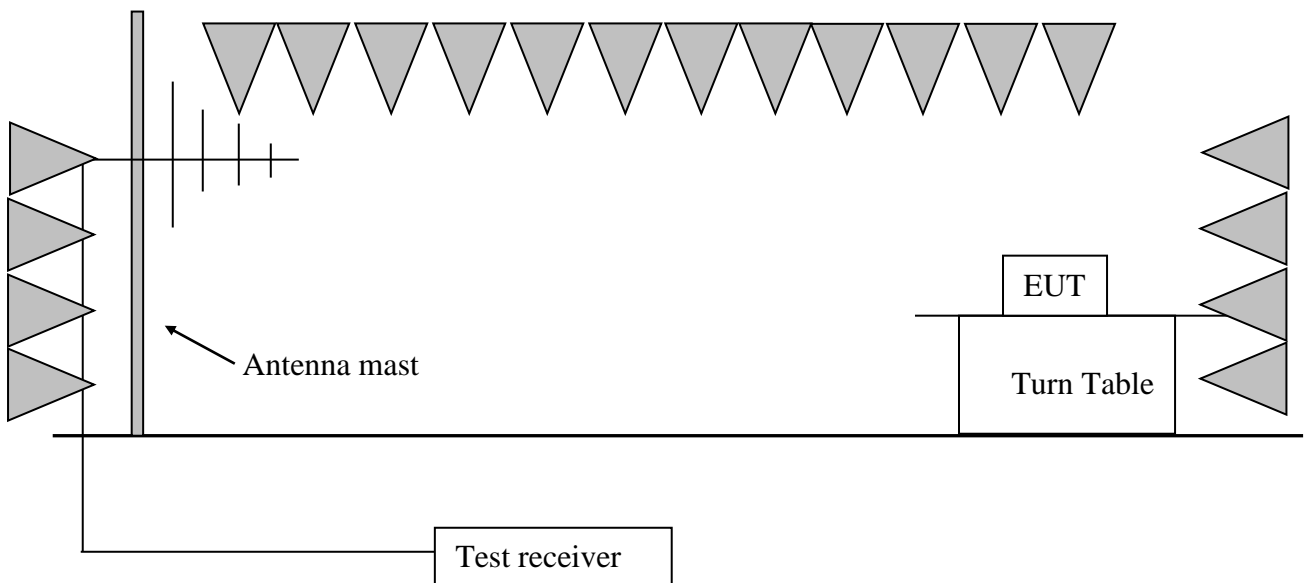

3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber for below 1 GHz and fully Anechoic Chamber for above 1GHz. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Y axis positioning which it is worse case.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 300 Hz, VBW = 1 kHz (9 kHz~150 kHz);
RBW = 10 kHz, VBW = 30 kHz (150 kHz~30MHz);
RBW = 100 kHz, VBW = 300 kHz (30MHz~1GHz for PK)
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

3.4 Test protocol

Temperature : 21.7 °C
Relative Humidity : 49 %

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	AV Factor	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	39.70	-11.25	---	32.00	40.00	8.00	QP
	H	78.50	-15.88	---	18.37	40.00	21.63	QP
	H	214.30	-11.20	---	24.19	43.50	19.31	QP
	H	2390.00	-2.79	---	51.04	74.00	22.96	peak
	H	2403.50	-2.79	---	97.50	114.00	16.50	peak
	H	2403.50	---	-14.71	82.79	94.00	11.21	AV
	H	2818.00	-1.69	---	42.24	74.00	31.76	peak
	H	3934.00	1.31	---	43.45	74.00	30.55	peak
	H	4807.00	4.34	---	50.10	74.00	23.90	peak
	V	39.70	-11.25	---	22.27	40.00	17.73	QP
	V	214.30	-11.20	---	24.22	43.50	19.28	QP
	V	752.65	-3.50	---	24.49	46.00	21.51	QP
	V	2216.00	-4.36	---	42.00	74.00	32.00	peak
	V	2390.00	-2.79	---	52.86	74.00	21.14	peak
	V	2403.50	-2.79	---	92.69	114.00	21.31	peak
	V	4195.00	2.28	---	45.26	74.00	28.74	peak
	V	4807.00	4.34	---	51.75	74.00	22.25	peak
M	H	128.94	-12.54	---	20.14	43.50	23.36	QP
	H	357.86	-9.23	---	21.03	46.00	24.97	QP
	H	576.11	-6.48	---	21.78	46.00	24.22	QP
	H	2427.00	-2.73	---	98.03	114.00	15.97	peak
	H	2427.00	---	-14.71	83.32	94.00	10.68	AV
	H	2809.00	-1.70	---	42.55	74.00	31.45	peak
	H	3799.00	0.74	---	42.56	74.00	31.44	peak
	H	4854.00	4.50	---	50.08	74.00	23.92	peak
	V	128.94	-12.54	---	19.36	43.50	24.14	QP
	V	288.02	-9.82	---	22.49	46.00	23.51	QP
	V	512.09	-6.80	---	23.35	46.00	22.65	QP
	V	2427.00	-2.73	---	91.48	114.00	22.52	peak
	V	2809.00	-1.70	---	42.76	74.00	31.24	peak
	V	3826.00	0.86	---	42.72	74.00	31.28	peak
	V	4854.00	4.50	---	52.39	74.00	21.61	peak
H	H	39.70	-11.25	---	31.39	40.00	8.61	QP
	H	78.46	-15.88	---	18.26	40.00	21.74	QP
	H	214.89	-11.20	---	24.11	43.50	19.39	QP
	H	2450.50	-2.59	---	99.89	114.00	14.11	peak
	H	2450.50	---	-14.71	85.18	94.00	8.82	AV

H	2483.50	-2.34	---	53.06	74.00	20.94	peak
H	3682.00	0.25	---	44.23	74.00	29.77	peak
H	4901.00	4.64	---	48.83	74.00	25.17	peak
H	7351.00	8.14	---	48.88	74.00	25.12	peak
V	39.70	-11.25	---	22.32	40.00	17.68	QP
V	214.49	-11.20	---	24.28	43.50	19.22	QP
V	752.68	-3.50	---	24.37	46.00	21.63	QP
V	2450.50	-2.59	---	89.93	114.00	24.07	peak
V	2483.50	-2.34	---	53.13	74.00	20.87	peak
V	2827.00	-1.67	---	42.43	74.00	31.57	peak
V	3835.00	0.89	---	43.69	74.00	30.31	peak
V	4901.00	4.64	---	51.31	74.00	22.69	peak

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed);
2. Corrected Reading = Original Receiver Reading + Correct Factor;
3. Margin = Limit – Corrected Reading;
4. If the PK Corrected reading is lower than AV limit, the AV test can be elided;
5. AV factor = $20 \cdot \log(\text{duty cycle}) = 20 \cdot \log(1.095/5.955) = -14.71\text{dB}$, AV value = PK value + AV factor.

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV,
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m,
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m,
 Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m,
 Then Margin = 54 - 10.20 = 43.80dB.


4 Assigned bandwidth (20dB bandwidth)

Test result: Pass

4.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission is contained within the allocated frequency band.

4.2 Test Configuration

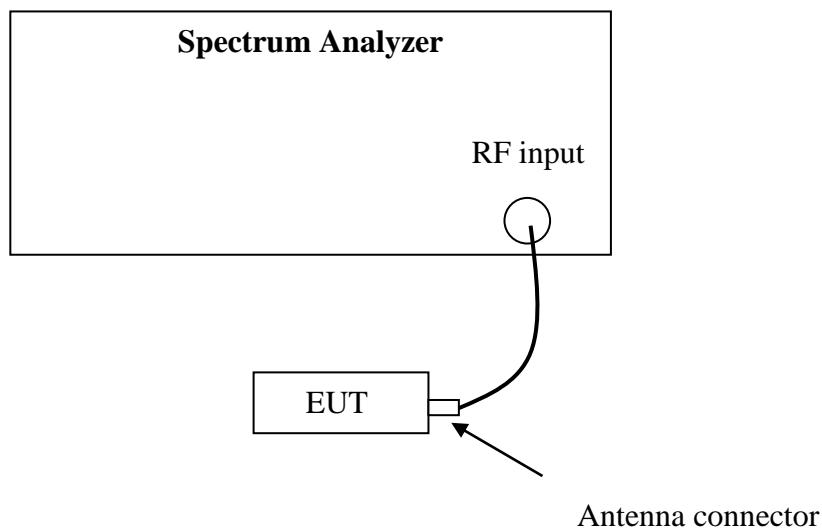

4.3 Test procedure and test setup

The 20dB Bandwidth per FCC § 15.215(c) is measured using the Spectrum Analyzer. Set Span = 2 to 3 times the 20 dB bandwidth, RBW = approximately 1% of the 20 dB bandwidth, VBW > RBW, Sweep = auto, Detector = peak, Trace = max hold. The test was performed at 3 channels (lowest, middle and highest channel).

4.4 Test protocol

Temperature : 21.3 °C
Relative Humidity : 46 %

Mode	Channel	20dB Bandwidth (kHz)	F _L (MHz)	F _H (MHz)
GFSK	L	801.7	2403.10	-
	M	803.1	-	-
	H	804.8	-	2450.90

5 Power line conducted emission


Test result: NA

5.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

5.2 Test configuration

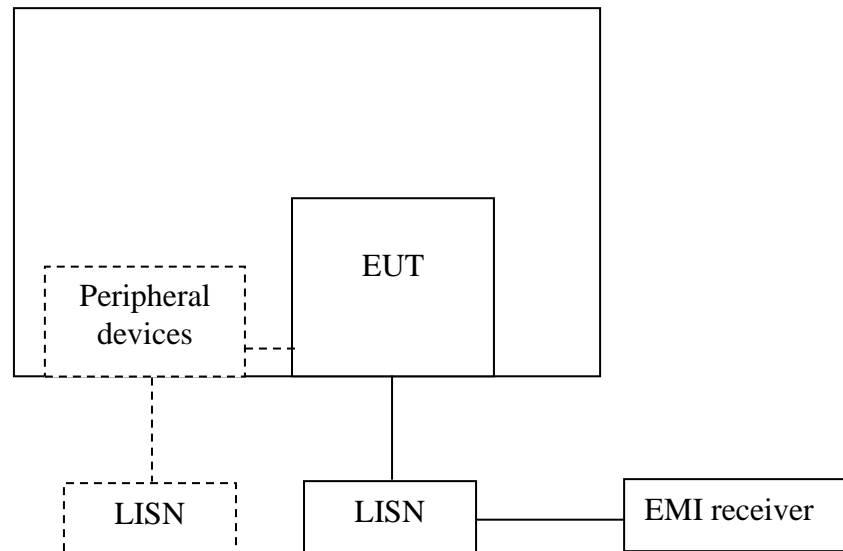

For table top equipment, wooden support is 0.8m height table

For floor standing equipment, wooden support is 0.1m height rack.

5.3 Test procedure and test set up

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

5.4 Test protocol

Temperature : °C
Relative Humidity : %

L line

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)

N line

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μ V)	Limit dB(μ V)	Margin (dB)	level dB(μ V)	limit dB(μ V)	Margin (dB)