

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel : +86-755-27521059 Fax: +86-755-27521011

# **EMC TEST REPORT**

Product name:	LED TV
Trademark:	AMTC; JVC
Model Name:	MUAV5860Y-16010
Adding Model:	MUAV58**Y-16010 (* can from 0 to 9,A to Z ); LT-58MA595, LT-58MAW595, LT-58MAB595, LT-58MAT595, LT-58MAS595, LT-58MAA595, LT-58MAC595, LT-58MA788, LT-58MAW788, LT-58MAB788, LT-58MAT788, LT-58MAS788, LT-58MAA788, LT-58MAC788, LT-58MA798, LT-58MAW798, LT-58MAB798, LT-58MAT798, LT-58MAS798, LT-58MAA798, LT-58MAC798
Test Standards:	FCC CFR Title 47 Part 15 Subpart B
FCC ID:	2AHVH5816016
FCC ID:	
	GTI20190129F
Report no	GTI20190129F
Report no	GTI20190129F Shen Zhen MTC Co.,LTD MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China
Report no	GTI20190129F Shen Zhen MTC Co.,LTD MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China Jan. 14, 2019

Test result	Pass *
-------------	--------

\* In the configuration tested, the EUT complied with the standards specified above



The FCC mark as shown above can be used, under the responsibility of the manufacturer, all necessary steps have been enforced to assure that all production units of the same equipment will continue to comply with the Federal Communications Commission's requirements.

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax.: (86)755-27521011 Http://www.sz-ctc.org.cn

Tell: (80)/55-27521059 EN 中国国家认证认可监督管理委员会 Certification and Acceleration Administration of the Pendels Resulting of China For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <u>yz.cncaic.cn</u>



#### **GENERAL DESCRIPTION OF EUT**

Equipment	LED TV
Model Name	MUAV5860Y-16010
Adding Model	MUAV58**Y-16010 (* can from 0 to 9,A to Z ); LT-58MA595, LT-58MAW595, LT-58MAB595, LT-58MAT595, LT-58MAS595, LT-58MAA595, LT-58MAC595, LT-58MA788, LT-58MAW788, LT-58MAB788, LT-58MAT788, LT-58MAS788, LT-58MAA788, LT-58MAC788, LT-58MA798, LT-58MAW798, LT-58MAB798, LT-58MAT798, LT-58MAS798, LT-58MAA798, LT-58MAC798
Model Difference	Just different colors and trademarks, the other is the same.
Manufacturer	Shen Zhen MTC Co.,LTD
Manufacturer Address	MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China
Factory	Shen Zhen MTC Co.,LTD
Factory Address	MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China
Product Description	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as as both an ITE /Computing Device & a Sound and Television Broadcast Receiver. More details of EUT technical specification, please refer to the User's Manual.
Power Rating	INPUT: AC100-240V, 150W, 50/60Hz

Compiled By:

Jim Jiang

(Jim Jiang)

Reviewed By:

(Cary Luo)

Approved By:

water ch

(Walter Chen)

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



#### **Table of Contents**

1	TEST SUMMARY	
,	TEST PROCEDURES ACCORDING TO THE TECHNICAL STANDARDS:	
	1.1 TEST FACILITY	
	1.2 MEASUREMENT UNCERTAINTY	5
2	GENERAL INFORMATION	6
,	2.1 DESCRIPTION OF TEST MODES	
	2.2 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	
,	2.3 MEASUREMENT INSTRUMENTS EQUIPMENTS LIST	
3	CONDUCTED EMISSION MEASUREMENT	9
,	3.1 LIMITS OF CONDUCTED EMISSION	9
	3.2 TEST PROCEDURE	
	3.3 TEST SETUP	-
	3.4 EUT OPERATING CONDITIONS	
	3.5 TEST RESULTS	
4	RADIATED EMISSION MEASUREMENT	
4	4.1 LIMITS OF RADIATED EMISSION MEASUREMENT	
4	4.2 TEST PROCEDURE	
4	4.3 TEST SETUP	
	4.4 EUT OPERATING CONDITIONS	
4	4.5 TEST RESULTS	
5	ANTENNA POWER CONDUCTION MEASUREMENT	19
6	ANTENNA POWER CONDUCTION MEASUREMENT	21
7	PICTURE SENSITIVITY MEASUREMENT	23
8	NOISE FIGURE MEASUREMENT	
9	EUT TEST PHOTO	25
10	ATTACHMENT PHOTOGRAPHS OF EUT	27



### 1 TEST SUMMARY

Test procedures according to the technical standards:

Test	Standard	Class	Result	Remark
Conducted Emission	FCC Part 15 Section 15.107	Class B	PASS	
Radiated Emission	FCC Part 15 Section 15.109	Class B	PASS	
Antenna Power Conduction	FCC Part 15 Section 15.111	Class B	PASS	
Picture Sensitivity	FCC Part 15 Section 15.117(f)	Class B	PASS	
Noise figure	FCC Part 15 Section 15.117(g)	Class B	PASS	

Both conducted and radiated emission tests were performed according to the procedures in ANSI C63.4: 2014. Test results are in compliance with the requirements of FCC Part 15: 2017.

The EUT setup configuration please refers to the photo of test configuration in item.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax.: (86)755-27521011 Http://www.sz-ctc.org.cn 下or anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <u>yz.cncaic.cn</u>

Page 5 of 34



#### 1.1 TEST FACILITY

CTC Laboratories, Inc. Add. : 1-2F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

#### ISED Registration No.: CN0029

The 3m alternate test site of CTC Laboratories, Inc.EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: CN0029 on Dec, 2018.

#### FCC-Registration No.: CN1208

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration CN1208, Sep 07, 2017

#### **1.2 MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement  $y \pm U \cdot$  where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of **k=2**  $\cdot$  providing a level of confidence of approximately **95** %  $^{\circ}$ 

#### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U · (dB)	NOTE
GTIC01	ANSI	150 KHz ~ 30MHz	3.2	/

#### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U · (dB)	NOTE
		30MHz ~ 1000MHz	3.5	/
GTIA01 AN	ANSI	1GHz ~ 6GHz	5.2	/

CTC Laboratories, Inc.

Accreditation Administration of the People's Republic of China : yz.cncaic.cn





#### 2 GENERAL INFORMATION

#### 2.1 DESCRIPTION OF TEST MODES

As the function of the EUT, test mode selected to test as below to conform this standard.

test Mode	Description
Mode 1	AV IN
Mode 2	HDMI
Mode 3	USB
Mode 4	NTSC
Mode 5	ATSC

Note:

EN

Pre-scan above all test mode and voltage(120Vac/60Hz and 230Vac/50Hz), found below test mode and voltage which it was worse case mode.

Test item	Worse case operation Test mode	Worse case operation Test Voltage
Conducted emission	Mode 2	120V/60Hz
Radiated emission	Mode 2	120V/60Hz
Antenna Power Conduction	Mode 4/ Mode 5	120V/60Hz
Picture Sensitivity	Mode 4	120V/60Hz
Noise figure	Mode 4	120V/60Hz



#### 2.2 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	LED TV	AMTC; JVC	MUAV5860Y-160 10	N/A	EUT
E-2	PC	HP	P7-1035cn	4CV125C15J	AE
E-3	DVD	GIEC	GK-901	N/A	AE
E-4	TV Generator	DTV tool	DTV	N/A	AE
E-5	Printer	HP	P1007	VNFN584036	AE
E-6	USB Disk	Kingston	DT101G2/8GB	253394	AE

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	120cm	AC Line
C-2	NO	NO	150cm	AV Line
C-3	YES	YES	150cm	HDMI Line
C-4	YES	YES	150cm	TV Line

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in  $^{\mathbb{C}}$  Length  $_{\mathbb{Z}}$  column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



#### 2.3 MEASUREMENT INSTRUMENTS EQUIPMENTS LIST

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until	
1	LISN	R&S	ENV216	101112	Dec. 28, 2019	
2	LISN	R&S	ENV216	101113	Dec. 28, 2019	
3	EMI Test Receiver	R&S	ESCI	100920	Dec. 28, 2019	
4	ISN CAT6	Schwarzbeck	NTFM 8158	8158-0046	Dec. 28, 2019	

	Radiated Emission							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until			
1	Bilog Antenna	Schwarzbeck	CBL6141A	4180	Dec. 28, 2019			
2	Spectrum Analyzer	R&S	FSU26	100105	Dec. 28, 2019			
3	Horn Antenna	Schwarzbeck	BBHA 9120D	647	Dec. 28, 2019			
4	Low Noise Pre-Amplifier	HP	8447D	1937A03050	Dec. 28, 2019			
5	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 28, 2019			
6	Test Receiver	R&S	ESCI7	100967	Dec. 28, 2019			
7	Antenna Mast	UC	UC3000	N/A	N/A			
8	Turn Table	UC	UC3000	N/A	N/A			

	Antenna Power Conduction& Picture Sensitivity& Noise figure							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until			
1	EMI Test Receiver	R&S	ESCI	100920	Dec. 28, 2019			
2	Spectrum Analyzer	R&S	FSU26	100105	Dec. 28, 2019			
3	Digital signal generator	R&S	SFC-U	N/A	Dec. 28, 2019			
4	Analog signal generator	PHILIPS	YQ-70C-1052 (PM5418)	N/A	Dec. 28, 2019			

The Cal. Interval was one year.

CTC Laboratories, Inc.



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <u>yz.cncaic.cn</u>



#### **3 CONDUCTED EMISSION MEASUREMENT**

#### **3.1 Limits of Conducted Emission**

	Class A (dBuV)		Class B (dBuV)		
FREQUENCY (MHz)	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	
0.50 -5.0	73.00	60.00	56.00	46.00	
5.0 -30.0	73.00	60.00	60.00	50.00	

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

#### The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


Page 10 of 34



#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

#### **3.3 TEST SETUP**

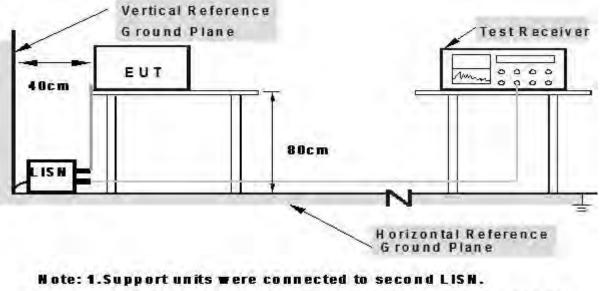


### 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### **3.4 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of **2.1** Unless otherwise a special operating condition is specified in the follows during the testing.



#### **3.5 TEST RESULTS**

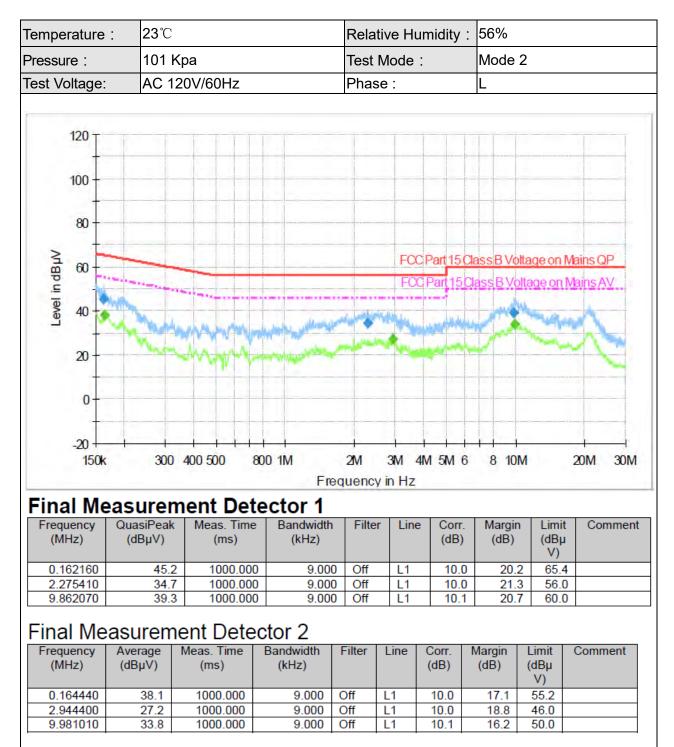


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax.: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <u>yz.cncaic.cn</u>



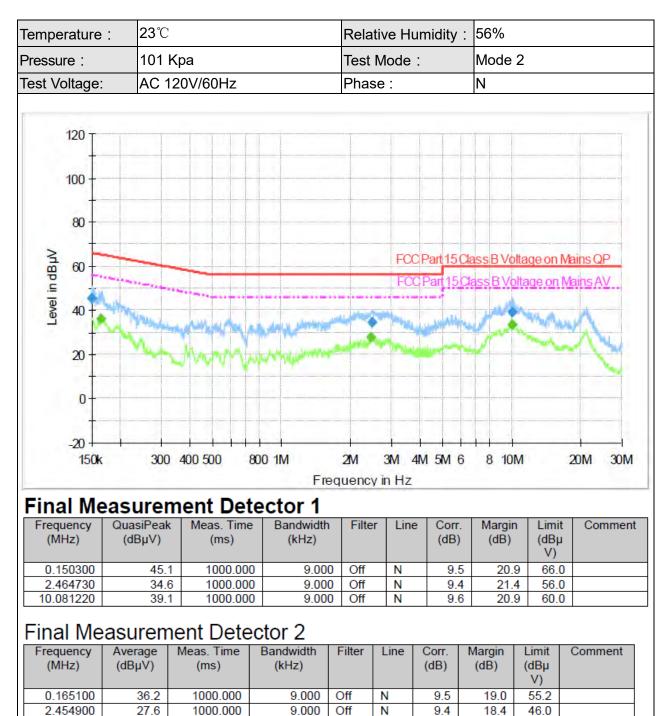

Off

Off

9.000

Ν

Ν

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Fax.: (86)755-27521011 Http://www.sz-ctc.org.cn



27.6

33.3

1000.000

10.000970

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cncaic.cn

9.4

9.6

16.7

50.0



#### 4 RADIATED EMISSION MEASUREMENT

#### 4.1 LIMITS OF RADIATED EMISSION MEASUREMENT

LIMITS OF RADIATED EMISSION MEASUREMENT

(Below 1000MHz)

	Class A (at 10m)	Class B (at 3m)	
FREQUENCY (MHz)	dBuV/m	dBu /m	
30 ~ 88	39.0	40.0	
88 ~ 216	43.5	43.5	
216 ~ 960	46.5	46.0	
Above 960	49.5	54.0	

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

 Class A (at 3m) dBuV/m
 Class B (at 3m) dBuV/m

 Peak
 Avg
 Peak
 Avg

 Above 1000
 80
 60
 74
 54

Notes:

- (1) The limit for radiated test was performed according to as following:
- FCC PART 15B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### 4.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency 30MHz to 6GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level - Limit value




#### **4.3 TEST SETUP**

(A) Radiated Emission Test Set-up, Frequency Below 1000MHz

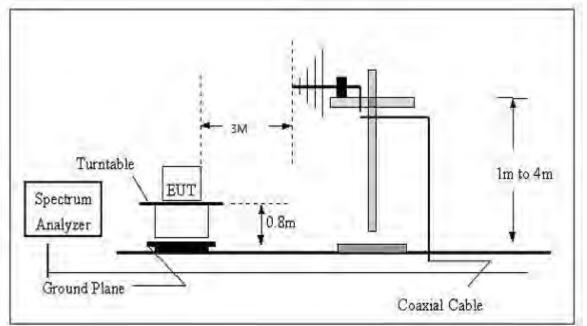

(B) Radiated Emission Test Set-up, Frequency Above 1GHz

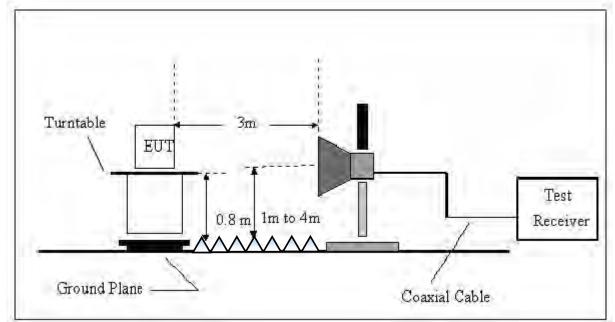

#### 4.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.1** Unless otherwise a special operating condition is specified in the follows during the testing.



#### 4.5 TEST RESULTS


Temperature: 24°C				,		57%				
Pressu	ressure: 101 Kpa		Т		Test Mode:		Mode 2			
Polariz	ation:	Vertical		Т	est Power:		AC	120V/6	60Hz	
90.0 d	lBu¥/m									
40							CC CI	ass B 3M I	Radiation Margin -6 c	18
	holdhamh	Martin Martin Martin			WWWWWWW		`\//^\/		Winger W	
10 30.000			10	(MHz)			Υμ <sup>λ</sup> Υή 400	500 6	00 700	1000.00
10			Factor (dB/m)	(MHz)		300 4	t	500 G Margin (dB)		_
0	) 40	50 60 70 8	Factor	Reading	Level	300 4	t /m)	Margin	Detect	or
0	40 No.	50 60 70 8 Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	300 4 Limi (dBuV/	t /m) 0	Margin (dB)	Detect	or
0	0 40 No.	50 60 70 8 Frequency (MHz) 30.4237	Factor (dB/m) -8.57	Reading (dBuV) 38.67	Level (dBuV/m) 30.10	300 4 Limi (dBuV/ 40.0	t /m) 10	Margin (dB) -9.90	Detection	or
0	40 No. 1 2	50 60 70 8 Frequency (MHz) 30.4237 76.7808	Factor (dB/m) -8.57 -22.14	Reading (dBuV) 38.67 55.94	Level (dBuV/m) 30.10 33.80	300 4 Limi (dBuV/ 40.0 40.0	t /m) 0 0	Margin (dB) -9.90 -6.20	Detection QP QP QP	
10	40 No. 1 2 3	50 60 70 8 Frequency (MHz) 30.4237 76.7808 177.5091	Factor (dB/m) -8.57 -22.14 -20.15	Reading (dBuV) 38.67 55.94 56.55	Level (dBuV/m) 30.10 33.80 36.40	300 4 Limi (dBuV/ 40.0 40.0 43.5	t /m) 10 10 10	Margin (dB) -9.90 -6.20 -7.10	Detection QP QP QP QP QP	

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Fax.: (86)755-27521011 Http://www.sz-ctc.org.cn For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : <u>yz.cncaic.cn</u>




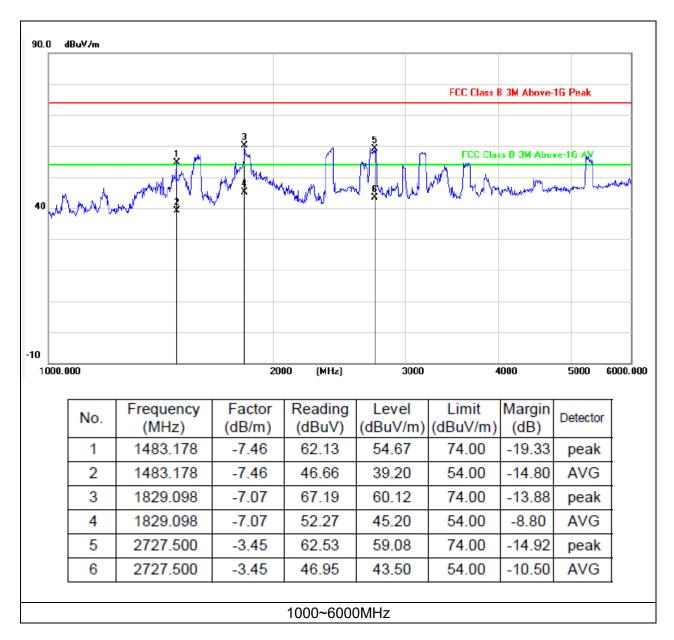

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax.: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <u>yz.cncaic.cn</u>




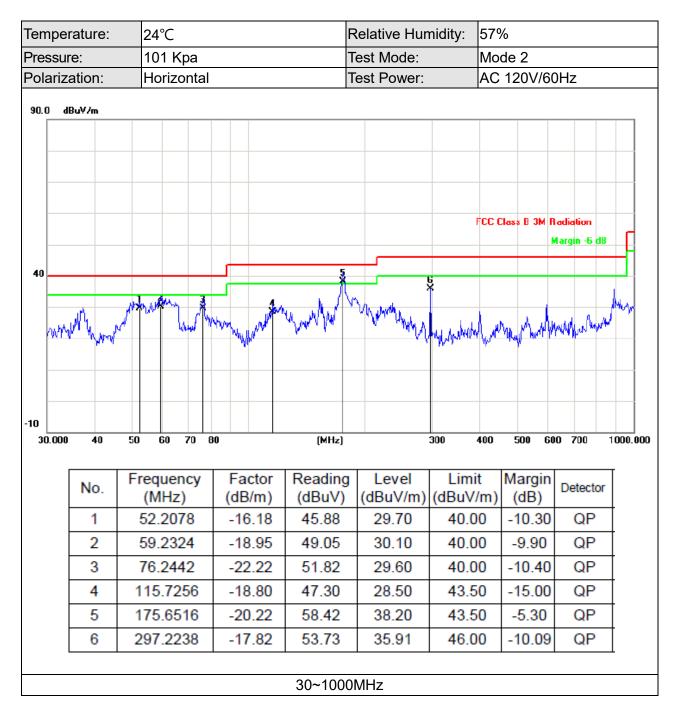

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax.: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <u>yz.cncaic.cn</u>



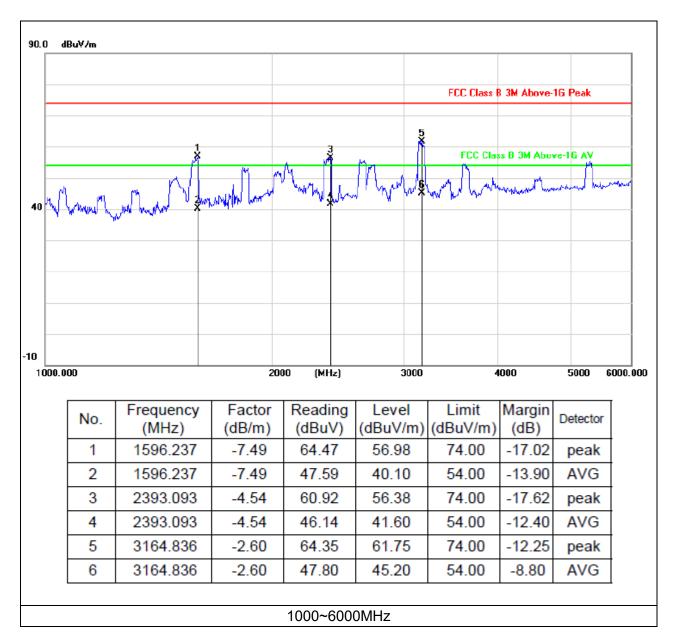

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax.: (86)755-27521011 Http://www.sz-ctc.org.cn 证认可监督管理委员会 For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : yz.cncaic.cn





#### 5 Antenna Power Conduction Measurement

lest Mode:	Node 4				
Channel	Frequency	Measured Frequency	Reading	Limit	Margin
Channel	(MHz)	(MHz)	(dBµV)	(dBµV)	(dB)
2	101.000	101.000	<30.0	50.0	<-20.0
2	202.000	202.000	<30.0	50.0	<-20.0
3	107.000	107.000	<30.0	50.0	<-20.0
5	214.000	214.000	<30.0	50.0	<-20.0
4	113.000	113.000	<30.0	50.0	<-20.0
4	226.000	226.000	<30.0	50.0	<-20.0
5	123.000	123.000	<30.0	50.0	<-20.0
5	246.000	246.000	<30.0	50.0	<-20.0
6	129.000	129.000	<30.0	50.0	<-20.0
0	258.000	258.000	<30.0	50.0	<-20.0
7	221.000	221.000	<30.0	50.0	<-20.0
'	442.000	442.000	<30.0	50.0	<-20.0
8	227.000	227.000	<30.0	50.0	<-20.0
0	454.000	454.000	<30.0	50.0	<-20.0
9	233.000	233.000	<30.0	50.0	<-20.0
9	466.000	466.000	<30.0	50.0	<-20.0
10	239.000	239.000	<30.0	50.0	<-20.0
10	478.000	478.000	<30.0	50.0	<-20.0
11	245.000	245.000	<30.0	50.0	<-20.0
	490.000	490.000	<30.0	50.0	<-20.0
12	251.000	251.000	<30.0	50.0	<-20.0
12	502.000	502.000	<30.0	50.0	<-20.0

# Test Mode<sup>.</sup> Mode 4

Note: Negative signs (-) in the margin column signify levels below the limit.

Limit (50 dBµV) was converted from the limit (2nW) at the 50 $\Omega$  measurement impedance.



Test Mode:					
Channel	Frequency	Measured	Reading	Limit	Margin
Onanner	(MHz)	Frequency(MHz)	(dBµV)	(dBµV)	(dB)
13	257.000	257.000	<30.0	50.0	<-20.0
15	514.000	514.000	<30.0	50.0	<-20.0
14	517.000	517.000	<30.0	50.0	<-20.0
14	1034.000	1034.000	<30.0	50.0	<-20.0
15	523.000	523.000	<30.0	50.0	<-20.0
15	1046.000	1046.000	<30.0	50.0	<-20.0
20	553.000	553.000	<30.0	50.0	<-20.0
20	1106.000	1106.000	<30.0	50.0	<-20.0
28	601.000	601.000	<30.0	50.0	<-20.0
20	1202.000	1202.000	<30.0	50.0	<-20.0
36	649.000	649.000	<30.0	50.0	<-20.0
30	1298.000	1298.000	<30.0	50.0	<-20.0
45	703.000	703.000	<30.0	50.0	<-20.0
45	1406.000	1406.000	<30.0	50.0	<-20.0
53	751.000	751.000	<30.0	50.0	<-20.0
55	1502.000	1502.000	<30.0	50.0	<-20.0
61	799.000	799.000	<30.0	50.0	<-20.0
01	1598.000	1598.000	<30.0	50.0	<-20.0
60	847.000	847.000	<30.0	50.0	<-20.0
69	1694.000	1694.000	<30.0	50.0	<-20.0

#### Test Mode<sup>.</sup> Mode 4

Note: Negative signs (-) in the margin column signify levels below the limit.

Limit (50 dB $\mu$ V) was converted from the limit (2nW) at the 50 $\Omega$  measurement impedance.



#### 6 Antenna Power Conduction Measurement

Fest Mode:	Frequency	Measured	Reading	Limit	Margin
Channel	(MHz)	Frequency(MHz)	(dBµV)	(dBµV)	(dB)
2	101.000	101.000	<30.0	50.0	<-20.0
2	202.000	202.000	<30.0	50.0	<-20.0
3 -	107.000	107.000	<30.0	50.0	<-20.0
3	214.000	214.000	<30.0	50.0	<-20.0
4	113.000	113.000	<30.0	50.0	<-20.0
4	226.000	226.000	<30.0	50.0	<-20.0
5 -	123.000	123.000	<30.0	50.0	<-20.0
0	246.000	246.000	<30.0	50.0	<-20.0
6	129.000	129.000	<30.0	50.0	<-20.0
0	258.000	258.000	<30.0	50.0	<-20.0
7	221.000	221.000	<30.0	50.0	<-20.0
1	442.000	442.000	<30.0	50.0	<-20.0
8	227.000	227.000	<30.0	50.0	<-20.0
0	454.000	454.000	<30.0	50.0	<-20.0
9	233.000	233.000	<30.0	50.0	<-20.0
9	466.000	466.000	<30.0	50.0	<-20.0
10	239.000	239.000	<30.0	50.0	<-20.0
10	478.000	478.000	<30.0	50.0	<-20.0
11	245.000	245.000	<30.0	50.0	<-20.0
	490.000	490.000	<30.0	50.0	<-20.0
12	251.000	251.000	<30.0	50.0	<-20.0
12	502.000	502.000	<30.0	50.0	<-20.0

Note: Negative signs (-) in the margin column signify levels below the limit.

Limit (50 dB $\mu$ V) was converted from the limit (2nW) at the 50 $\Omega$  measurement impedance.



Test Mode:		Measured	Peoding	Limit	Morgin
Channel	Frequency (MHz)	Frequency(MHz)	Reading (dBµV)	(dBµV)	Margin (dB)
40	257.000	257.000	<30.0	50.0	<-20.0
13	514.000	514.000	<30.0	50.0	<-20.0
14	517.000	517.000	<30.0	50.0	<-20.0
14	1034.000	1034.000	<30.0	50.0	<-20.0
15	523.000	523.000	<30.0	50.0	<-20.0
15	1046.000	1046.000	<30.0	50.0	<-20.0
20	553.000	553.000	<30.0	50.0	<-20.0
20	1106.000	1106.000	<30.0	50.0	<-20.0
28	601.000	601.000	<30.0	50.0	<-20.0
20	1202.000	1202.000	<30.0	50.0	<-20.0
36	649.000	649.000	<30.0	50.0	<-20.0
30	1298.000	1298.000	<30.0	50.0	<-20.0
45	703.000	703.000	<30.0	50.0	<-20.0
45	1406.000	1406.000	<30.0	50.0	<-20.0
53	751.000	751.000	<30.0	50.0	<-20.0
55	1502.000	1502.000	<30.0	50.0	<-20.0
61	799.000	799.000	<30.0	50.0	<-20.0
UI	1598.000	1598.000	<30.0	50.0	<-20.0
69	847.000	847.000	<30.0	50.0	<-20.0
09	1694.000	1694.000	<30.0	50.0	<-20.0

#### Test Mode<sup>-</sup> Mode 5

Note: Negative signs (-) in the margin column signify levels below the limit.

Limit (50 dB $\mu$ V) was converted from the limit (2nW) at the 50 $\Omega$  measurement impedance.



#### 7 Picture Sensitivity Measurement

#### Test Mode: Mode 4

VHF	Band	Antenna	UHF	Band	Antenna	
Channel	Frequency Range (MHz)	Input Level (dBµV)	Channel	Frequency Range (MHz)	Input Level (dBµV)	
2	55.250	23	14	471.250	28	
3	61.250	24	20	507.250	26	
4	67.250	27	26	543.250	25	
5	77.250	26	32	579.250	27	
6	83.250	25	38	615.250	26	
7	175.250	23	44	651.250	24	
8	181.250	22	50	687.250	26	
9	187.250	24	56	723.250	28	
10	193.250	22	62	759.250	27	
11	199.250	25	69	801.250	28	
12	205.250	23	/	/	/	
13	211.250	24	1	/	/	
Avera	ge(VHF)	24.0	Averag	ge(UHF)	26.5	
	Average(UHF)-Average(VHF)= 2.5 dB(Limit 8.0dB)					



#### 8 Noise Figure Measurement

#### Test Mode: Mode 4

Channel	Measured Frequency (MHz)	Gain (dB)	Noise Figure (dB)	Limit (dB)
14	471.250	>30.0	4.3	14
20	507.250	>30.0	4.5	14
26	543.250	>30.0	4.2	14
32	579.250	>30.0	4.1	14
38	615.250	>30.0	4.2	14
44	651.250	>30.0	4.3	14
50	687.250	>30.0	4.5	14
56	723.250	>30.0	4.2	14
62	759.250	>30.0	4.1	14
69	801.250	>30.0	4.0	14


Remark: The specification was provided by tuner manufacturer.



Page 25 of 34

#### 9 EUT TEST PHOTO

#### **Conducted Measurement Photo**

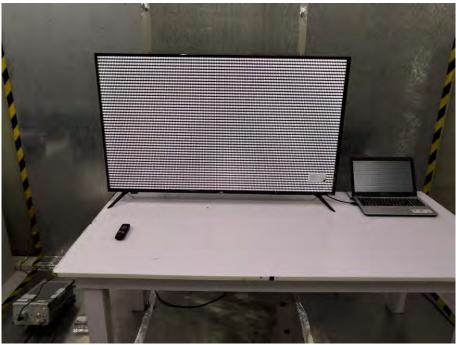

Radiated Measurement Photo 30~1000MHz



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 中国国家认证认可监督管理委员会 Certification and Accreditation Administration of the People's Republic of China : <u>yz.cncaic.cn</u>



#### Radiated Measurement Photo 1000~6000MHz

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 中国国家认证认可监督管理委员会 Centration and Accessitation Administration of the December 2019 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <u>yz.cncaic.cn</u>



#### **10 ATTACHMENT PHOTOGRAPHS OF EUT**

1. Photo



2. Photo



CTC Laboratories, Inc.


 

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059

 中国国家认证认可监督管理委员会 Certification Administration of the People's Republic of China : <u>yz.cncaic.cn</u>



#### 3. Photo

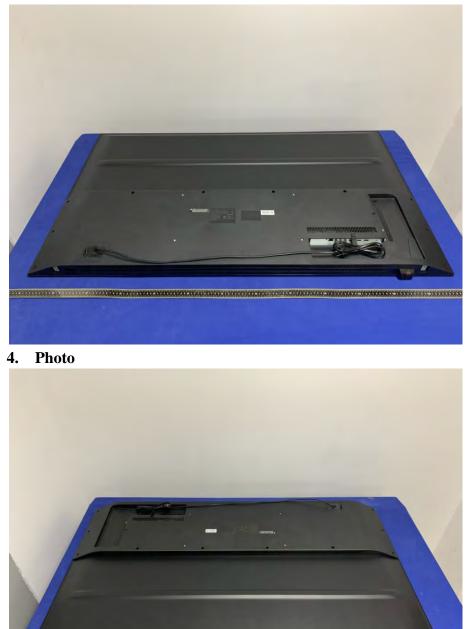


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 中国国家认证认可监督管理委员会 Certification Administration of the People's Republic of China : <u>yz.cncaic.cn</u>







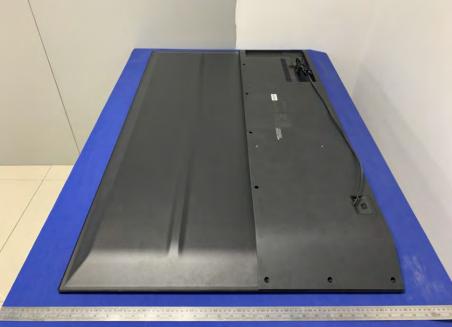

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 中国国家认证认可监督管理委员会 Certification Administration of the People's Republic of China : <u>yz.cncaic.cn</u>



#### 7. Photo



CTC Laboratories, Inc.


 

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059

 中国国家认证认可监督管理委员会 Centrication and Accreditation Administration of the People's Republic of China : <u>yz.cncaic.cn</u>



#### 9. Photo

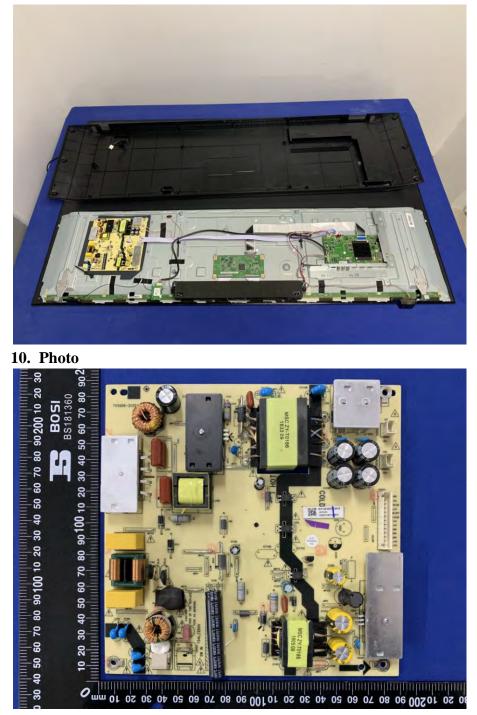

CTC Laboratories, Inc.


 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

 Tel.: (86)755-27521059

 中国国家认证认可监督管理委员会

 Certification Administration of the People's Republic of China : yz.cncaic.cn




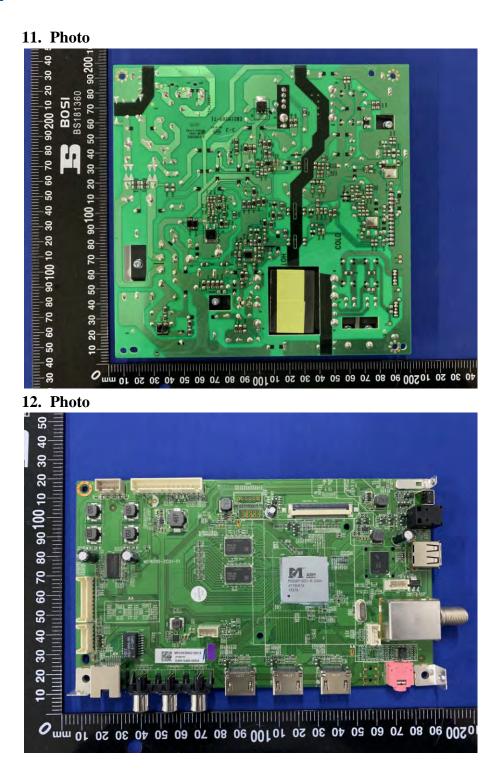

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax.: (86)755-27521011 Http://www.sz-ctc.org.cn For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cncaic.cn

中国国家认证认可监督管理委员会 EN




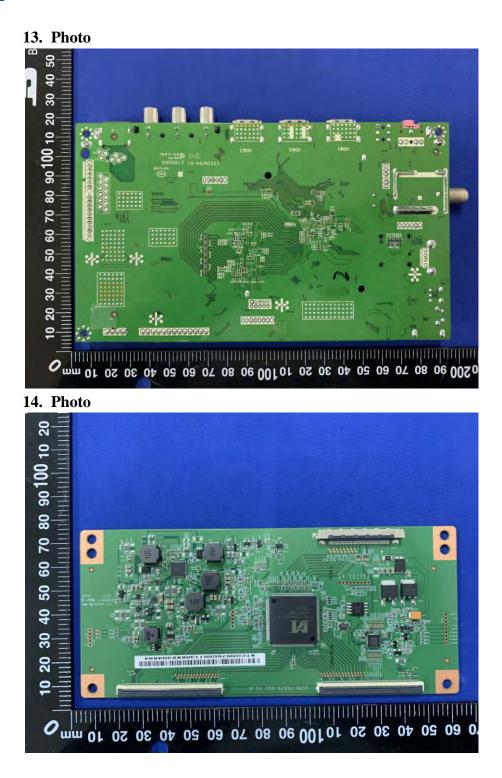

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax.: (86)755-27521011 Http://www.sz-ctc.org.cn For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cncaic.cn

中国国家认证认可监督管理委员会 EN



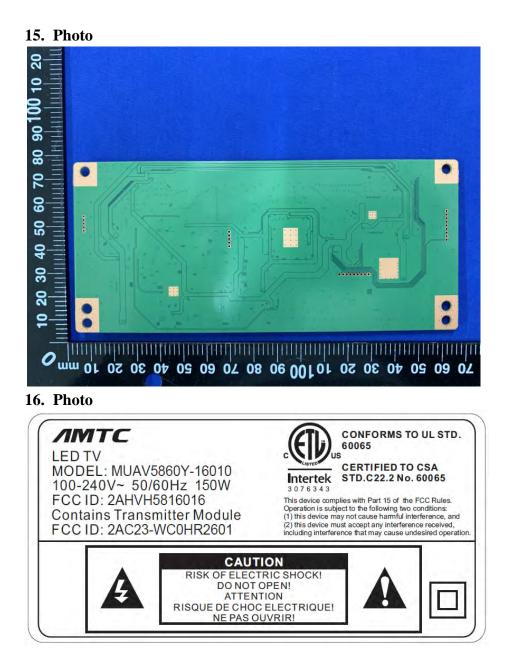

## ===== End of Test Report =====

CTC Laboratories, Inc.

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059

 中国国家认证认可监督管理委员会 Certification Administration of the People's Republic of China : yz.cncaic.cn