



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

LED TV

Model: MUAV5801-6586A

Brand: AMTC, WESTINGHOUSE

Test Report Number:

C180918Z01-RP1

Issued for

Shen Zhen MTC Co.,LTD

MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street,
Longgang district, Shenzhen, China

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1, Mingkeda Logistics Park, No.18 Huanguan South RD., Guan Lan Town,
Longhuaxin District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com

Issued Date: Sep 18, 2018



Certificate Number: 2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	Sep 18, 2018	Initial Issue	ALL	Anna Liu



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 DESCRIPTION OF TEST MODES	6
3.2 SETUP CONFIGURATION OF EUT	6
3.3 SUPPORT EQUIPMENT	6
4. FACILITIES AND ACCREDITATIONS.....	7
4.1 FACILITIES.....	7
4.2 ACCREDITATIONS.....	7
4.3 MEASUREMENT UNCERTAINTY	7
5. FCC PART 15.247	8
5.1 RADIATED EMISSIONS	8



1. TEST RESULT CERTIFICATION

Product	LED TV
Model	MUAV5801-6586A
Brand	AMTC,WESTINGHOUSE
Test time	Sep 18, 2018
Applicant	Shen Zhen MTC Co.,LTD
Manufacturer	MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	PASS
RSS 247 Issue 2	PASS

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207,15.209,15.249.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Eve Wang
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Nancy Fu
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2. EUT DESCRIPTION

Product	LED TV
Model Number	MUAV5801-6586A
Brand	AMTC,WESTINGHOUSE
Model Discrepancy	MUAV50**Y-6586A(* can from 0 to 9, A to Z); E4SJ5018 ; WE50UB4417
Model difference	All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name, appearance and trade mark.
Identify Number	C180918Z01-RP1
Received Date	Sep 18, 2018
Power Supply	AC120V 150W 60Hz
Frequency Range	802.11b/g/n(HT20):2412MHz~2462MHz 802.11n(HT40):2422MHz~2452MHz
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 07 Channels
Antenna type:	Internal Metal Antenna
Antenna gain 1:	1.21dBis
Antenna gain 2:	1.21dBi
Hardware Version	W2HM2001_V1.0
Software Version	JEDI.L0.MP1.mt7603u.v1.13.m.0.3

Note: This submittal(s) (test report) is intended for FCC ID: **2AHVH586586A1**, filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Use engineering mode to control EUT to maintain continuous transmission and reception mode.

Test Item	Test mode
Radiated Emission	WIFI TX(802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40))

Note:

WIFI 802.11B/G/N20 test channel: 2412MHz, 2437MHz, 2462MHz.

802.11N40 test channel: 2422MHz, 2437MHz, 2452MHz.

3.2 SETUP CONFIGURATION OF EUT

See test photographs.

3.3 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook	TianYi310-14ISK	NA	DoC	Lenovo	NA	NA

Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.10-1, Mingkeda Logistics Park, No.18 Huanguan South RD., Guan Lan Town, Longhuaxin District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-4815, R-4320, T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Radiated Emission, 18 to 26 GHz	+/-5.6512dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. FCC PART 15.247

5.1 RADIATED EMISSIONS

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	02/18/2018	02/19/2019
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/18/2018	02/19/2019
Amplifier	EMEC	EM330	060661	02/17/2018	03/16/2019
High Noise Amplifier	Agilent	8449B	3008A01838	02/20/2018	02/19/2019
Loop Antenna	COM-POWER	AL-130	121044	09/25/2017	09/24/2018
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/20/2018	02/19/2019
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/20/2018	02/19/2019
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/20/2018	02/19/2019
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/202018	02/19/2019
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

Above 1 GHz

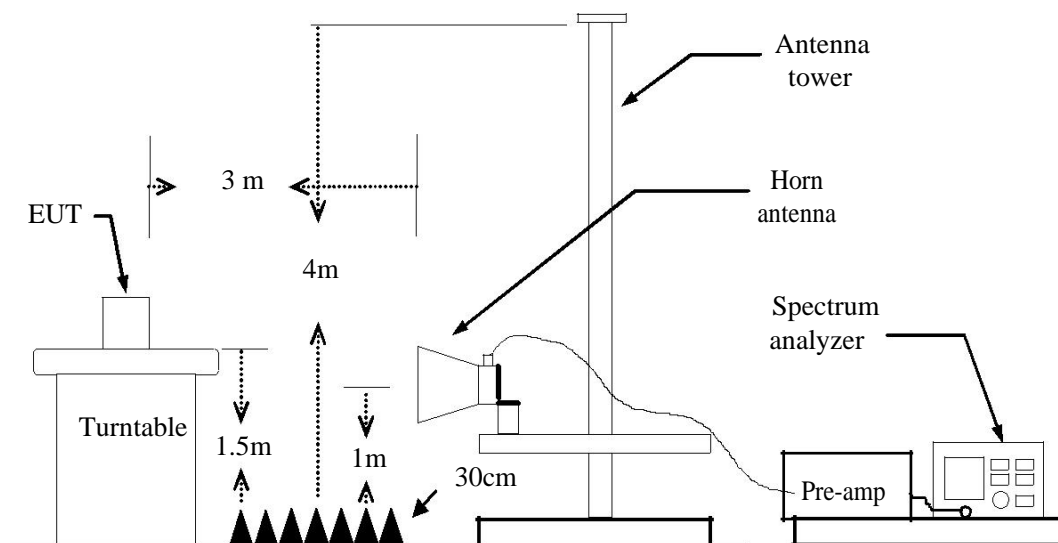



MEASURING SETTING

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/T for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

TEST PROCEDURE

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions



Final measurement:

--- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0°to 360°) and by rotating the elevation axes (0°to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0°to 315°using 45°steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.



Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.



Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

Pre measurement:

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



TEST RESULTS

Above 1GHz

Only show worse case

Test Mode: TX / IEEE 802.11b (CH Low) Ant1

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1621	43.55	-3.42	40.13	74	-33.87	V	peak
1936	41.47	-3.11	38.36	74	-35.64	V	peak
4824	46.94	1.31	48.25	74	-25.75	V	peak
7236	43.51	4.15	47.66	74	-26.34	V	peak
1729	44.84	-3.41	41.43	74	-32.57	H	peak
1966	44.88	-3.12	41.76	74	-32.24	H	peak
4824	47.85	1.31	49.16	74	-24.84	H	peak
7236	42.83	4.15	46.98	74	-27.02	H	peak

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Spectrum setting:
 - Peak Setting 1GHz - 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - AV Setting 1GHz - 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- | | |
|------------------------|--|
| Frequency (MHz). | = Emission frequency in MHz |
| Reading (dBuV/m) | = Uncorrected Analyzer / Receiver Reading |
| Correction Factor (dB) | = Antenna factor + Cable loss – Amplifier gain |
| Limit (dBuV/m) | = Limit stated in standard |
| Margin (dB) | = Result (dBuV/m)- Limit (dBuV/m) |
| Peak | =Peak Reading |
| AVG. | =Average Reading |
| Remark | = Mark Peak Reading or Average Reading |



Test Mode: TX / IEEE 802.11b (CH Mid) Ant1

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1532	46.90	-3.42	43.48	74	-30.52	V	peak
1901	42.15	-3.11	39.04	74	-34.96	V	peak
4874	42.40	1.31	43.71	74	-30.29	V	peak
7311	44.13	4.15	48.28	74	-25.72	V	peak
1633	44.99	-3.41	41.58	74	-32.42	H	peak
1763	44.60	-3.12	41.48	74	-32.52	H	peak
4874	45.46	1.31	46.77	74	-27.23	H	peak
7311	41.63	4.15	45.78	74	-28.22	H	peak

Remark:

5. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
 6. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
 7. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
 8. Spectrum setting:
 - a. Peak Setting 1GHz - 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz). = Emission frequency in MHz
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)
 Peak =Peak Reading
 AVG. =Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX / IEEE 802.11b (CH High) Ant1

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1652	42.80	-5.91	36.89	74	-37.11	V	peak
2020	40.29	-2.29	38.00	74	-36.00	V	peak
4924	42.82	1.31	44.13	74	-29.87	V	peak
7386	41.82	4.15	45.97	74	-28.03	V	peak
1653	43.97	-5.84	38.13	74	-35.87	H	peak
1986	44.20	-2.07	42.13	74	-31.87	H	peak
4924	43.99	1.31	45.30	74	-28.70	H	peak
7386	42.75	4.15	46.90	74	-27.10	H	peak

Remark:

9. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
10. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
12. Spectrum setting:
 - a. Peak Setting 1GHz - 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz). = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Peak =Peak Reading
 AVG. =Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX / IEEE 802.11N20MIMO (CH Low)

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1725	45.38	-5.91	39.47	74	-34.53	V	peak
1921	44.59	-2.29	42.30	74	-31.70	V	peak
4824	47.85	1.31	49.16	74	-24.84	V	peak
7236	40.48	4.15	44.63	74	-29.37	V	peak
1344	41.11	-5.84	35.27	74	-38.73	H	peak
1926	44.09	-2.07	42.02	74	-31.98	H	peak
4824	47.52	1.31	48.83	74	-25.17	H	peak
7236	46.10	4.15	50.25	74	-23.75	H	peak

Remark:

13. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
14. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
15. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
16. Spectrum setting:
 - a. Peak Setting 1GHz - 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz). = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Peak =Peak Reading
 AVG. =Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX / IEEE 802.11N20MIMO (CH Mid)

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1621	46.19	-5.91	40.28	74	-33.72	V	peak
2030	44.57	-2.29	42.28	74	-31.72	V	peak
4874	41.56	1.31	42.87	74	-31.13	V	peak
7311	42.51	4.15	46.66	74	-27.34	V	peak
1562	46.43	-5.84	40.59	74	-33.41	H	peak
1762	44.09	-2.07	42.02	74	-31.98	H	peak
4874	45.15	1.31	46.46	74	-27.54	H	peak
7311	46.84	4.15	50.99	74	-23.01	H	peak

Remark:

- 17. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 18. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 19. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 20. Spectrum setting:
 - a. Peak Setting 1GHz - 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- 5. Frequency (MHz). = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Peak =Peak Reading
 AVG. =Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX / IEEE 802.11N20MIMO (CH High)

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1524	44.34	-5.91	38.43	74	-35.57	V	peak
1762	42.48	-2.29	40.19	74	-33.81	V	peak
4924	40.87	1.31	42.18	74	-31.82	V	peak
7386	46.43	4.15	50.58	74	-23.42	V	peak
1765	47.86	-5.84	42.02	74	-31.98	H	peak
2011	44.07	-2.07	42.00	74	-32.00	H	peak
4924	46.11	1.31	47.42	74	-26.58	H	peak
7386	40.96	4.15	45.11	74	-28.89	H	peak

Remark:

21. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
22. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
23. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
24. Spectrum setting:
 - a. Peak Setting 1GHz - 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz). = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Peak =Peak Reading
 AVG. =Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX / IEEE 802.11N40MIMO (CH Low)

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1623	45.90	-5.91	39.99	74	-34.01	V	peak
1986	44.76	-2.29	42.47	74	-31.53	V	peak
4844	45.98	1.31	47.29	74	-26.71	V	peak
7266	43.95	4.15	48.10	74	-25.90	V	peak
1541	44.27	-5.84	38.43	74	-35.57	H	peak
1936	45.46	-2.07	43.39	74	-30.61	H	peak
4844	46.57	1.31	47.88	74	-26.12	H	peak
7266	40.89	4.15	45.04	74	-28.96	H	peak

Remark:

- 25. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 26. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 27. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 28. Spectrum setting:
 - a. Peak Setting 1GHz - 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- 5. Frequency (MHz). = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Peak =Peak Reading
 AVG. =Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX / IEEE 802.11N40MIMO (CH Mid)

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1621	43.88	-5.91	37.97	74	-36.03	V	peak
1936	45.72	-2.29	43.43	74	-30.57	V	peak
4874	45.07	1.31	46.38	74	-27.62	V	peak
7311	44.69	4.15	48.84	74	-25.16	V	peak
1729	45.69	-5.84	39.85	74	-34.15	H	peak
1966	45.62	-2.07	43.55	74	-30.45	H	peak
4874	47.80	1.31	49.11	74	-24.89	H	peak
7311	43.82	4.15	47.97	74	-26.03	H	peak

Remark:

- 29. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 30. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 31. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 32. Spectrum setting:
 - a. Peak Setting 1GHz - 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- 5. Frequency (MHz). = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Peak =Peak Reading
 AVG. =Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX / IEEE 802.11N40MIMO (CH High)

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1731	40.04	-3.42	36.62	74	-37.38	V	peak
1957	41.76	-3.11	38.65	74	-35.35	V	peak
4904	45.84	1.31	47.15	74	-26.85	V	peak
7356	47.99	4.15	52.14	74	-21.86	V	peak
1793	44.90	-3.41	41.49	74	-32.51	H	peak
1920	43.05	-3.12	39.93	74	-34.07	H	peak
4904	43.85	1.31	45.16	74	-28.84	H	peak
7356	47.13	4.15	51.28	74	-22.72	H	peak

Remark:

- 33. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 34. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 35. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 36. Spectrum setting:
 - a. Peak Setting 1GHz - 25GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 25GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- 5. Frequency (MHz). = Emission frequency in MHz
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBμV/m) = Limit stated in standard
 Margin (dB) = Result (dBμV/m)- Limit (dBμV/m)
 Peak =Peak Reading
 AVG. =Average Reading
 Remark = Mark Peak Reading or Average Reading