



# Test Report - FCC PART 90 Booster Class B (B9B)

## Applicant: Radio Solutions, Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 5/17/2023

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

1. APPLICANT INFORMATION.....5

1.1 TEST RESULT SUMMARY ..... 5

2. LOCATION OF TESTING .....7

2.1 TEST LABORATORY.....7

2.2 TESTING WAS PERFORMED, REVIEWED BY ..... 7

3. TEST SAMPLE(S) (EUT/DUT).....8

3.1 DEFINITIONS .....8

3.2 DESCRIPTION OF THE EUT .....9

3.3 CONFIGURATION OF EUT .....10

3.4 TEST SETUP OF EUT .....10

4. TEST METHODS & APPLICABLE REGULATORY LIMITS.....11

4.1 TEST METHODS/STANDARDS/GUIDANCE:.....11

4.2 APPLIED LIMITS AND REGULATORY LIMITS:.....11

5. MEASUREMENT UNCERTAINTY.....11

6. ENVIRONMENTAL CONDITIONS .....11

6.1 TEMPERATURE & HUMIDITY .....11

7. LIST OF TEST EQUIPMENT AND TEST FACILITY.....12

7.1 LIST OF TEST EQUIPMENT .....12

8. TEST RESULTS .....13

8.1 POWER AT THE FINAL AMPLIFIER.....14

8.2 RF OUTPUT POWER & GAIN.....15

8.3 OUT-OF-BAND REJECTION.....17

8.3.1 Uplink, 772 MHz.....18

8.3.2 Uplink, 802 MHz .....19

8.3.3 Uplink, 815 MHz.....20

8.3.4 Downlink, 860 MHz.....21

8.4 BANDWIDTH & EMISSION .....22

8.5 INPUT VS OUTPUT SIGNAL COMPARISON .....23

8.5.1 6.25 kHz FM, Input Signal .....26

8.5.2 12.5 kHz FM, Input Signal.....27

8.5.3 25 kHz FM, Input Signal.....28

8.5.4 C4FM, Input Signal.....29

8.5.5 H-CPM, Input Signal.....30

8.5.6 H-DQPSK, Input Signal.....31

8.5.7 6.25 kHz, FM, DL Mask C, AGC, 772 MHz.....32

8.5.8 6.25 kHz, FM, DL Mask C, AGC +3, 772 MHz .....33

8.5.9 12.5 kHz, FM, DL Mask C, AGC, 772 MHz .....34

8.5.10 12.5 kHz, FM, DL Mask C, AGC+3, 772 MHz .....35



8.5.11	25 kHz FM, DL Mask C, AGC, 772 MHz.....	36
8.5.12	25 kHz FM, DL Mask C, AGC+3, 772 MHz.....	37
8.5.13	C4FM, DL Mask C, AGC, 772 MHz.....	38
8.5.14	C4FM, DL Mask C, AGC+3, 772 MHz.....	39
8.5.15	H-CPM, DL Mask C, AGC, 772 MHz.....	40
8.5.16	H-CPM, DL Mask C, AGC+3, 772 MHz.....	41
8.5.17	H-DQPSK, DL Mask C, AGC, 772 MHz.....	42
8.5.18	H-DQPSK, DL Mask C, AGC+3, 772 MHz.....	43
8.5.19	6.25 kHz, FM, UL Mask C, AGC, 802 MHz.....	44
8.5.20	6.25 kHz, FM, UL Mask C, AGC +3, 802 MHz.....	45
8.5.21	12.5 kHz, FM, UL Mask C, AGC, 802 MHz.....	46
8.5.22	12.5 kHz, FM, UL Mask C, AGC+3, 802 MHz.....	47
8.5.23	25 kHz FM, UL Mask C, AGC, 802 MHz.....	48
8.5.24	25 kHz FM, UL Mask C, AGC+3, 802 MHz.....	49
8.5.25	C4FM, UL Mask C, AGC, 802 MHz.....	50
8.5.26	C4FM, UL Mask C, AGC+3, 802 MHz.....	51
8.5.27	H-CPM, UL Mask C, AGC, 802 MHz.....	52
8.5.28	H-CPM, UL Mask C, AGC+3, 802 MHz.....	53
8.5.29	H-DQPSK, UL Mask C, AGC, 802 MHz.....	54
8.5.30	H-DQPSK, UL Mask C, AGC+3, 802 MHz.....	55
8.5.31	6.25 kHz, FM, UL Mask C, AGC, 815 MHz.....	56
8.5.32	6.25 kHz, FM, UL Mask C, AGC+3, 815 MHz.....	57
8.5.33	12.5 kHz, FM, UL Mask D, AGC, 815 MHz.....	58
8.5.34	12.5 kHz, FM, UL Mask D, AGC+3, 815 MHz.....	59
8.5.35	25 kHz FM, UL Mask G, AGC, 815 MHz.....	60
8.5.36	25 kHz FM, UL Mask G, AGC+3, 815 MHz.....	61
8.5.37	C4FM, UL Mask D, AGC, 815 MHz.....	62
8.5.38	C4FM, UL Mask D, AGC+3, 815 MHz.....	63
8.5.39	H-CPM, UL Mask D, AGC, 815 MHz.....	64
8.5.40	H-CPM, UL Mask D, AGC+3, 815 MHz.....	65
8.5.41	H-DQPSK, UL Mask D, AGC, 815 MHz.....	66
8.5.42	H-DQPSK, UL Mask D, AGC+3, 815 MHz.....	67
8.5.43	6.25 kHz, FM, DL Mask C, AGC, 860 MHz.....	68
8.5.44	6.25 kHz, FM, DL Mask C, AGC +3, 860 MHz.....	69
8.5.45	12.5 kHz, FM, DL Mask D, AGC, 860 MHz.....	70
8.5.46	12.5 kHz, FM, DL Mask D, AGC+3, 860 MHz.....	71
8.5.47	25 kHz FM, DL Mask G, AGC, 860 MHz.....	72
8.5.48	25 kHz FM, DL Mask G, AGC+3, 860 MHz.....	73
8.5.49	C4FM, DL Mask D, AGC, 860 MHz.....	74
8.5.50	C4FM, DL Mask D, AGC+3, 860 MHz.....	75
8.5.51	H-CPM, DL Mask D, AGC, 860 MHz.....	76
8.5.52	H-CPM, DL Mask D, AGC+3, 860 MHz.....	77
8.5.53	H-DQPSK, DL Mask D, AGC, 860 MHz.....	78
8.5.54	H-DQPSK, DL Mask D, AGC+3, 860 MHz.....	79
8.6	NOISE FIGURE.....	80
8.7	OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS (INTERMODULATION PRODUCTS).....	81



8.7.1	6.25 kHz Signal, Downlink, AGC, 772 MHz	82
8.7.2	6.25 kHz Signal, Downlink, AGC+3dB, 772 MHz	83
8.7.3	12.5 kHz Signal, Downlink, AGC, 772 MHz	84
8.7.4	12.5 kHz Signal, Downlink, AGC+3dB, 772 MHz	85
8.7.5	25 kHz Signal, Downlink, AGC, 772 MHz	86
8.7.6	25 kHz Signal, Downlink, AGC+3dB, 772 MHz	87
8.7.7	6.25 kHz Signal, Uplink, AGC, 802 MHz	88
8.7.8	6.25 kHz Signal, Uplink, AGC+3dB, 802 MHz	89
8.7.9	12.5 kHz Signal, Uplink, AGC, 802 MHz	90
8.7.10	12.5 kHz Signal, Uplink, AGC+3dB, 802 MHz	91
8.7.11	25 kHz Signal, Uplink, AGC, 802 MHz	92
8.7.12	25 kHz Signal, Uplink, AGC+3dB, 802 MHz	93
8.7.13	6.25 kHz Signal, Uplink, AGC, 815 MHz	94
8.7.14	6.25 kHz Signal, Uplink, AGC+3dB, 815 MHz	95
8.7.15	12.5 kHz Signal, Uplink, AGC, 815 MHz	96
8.7.16	12.5 kHz Signal, Uplink, AGC+3dB, 815 MHz	97
8.7.17	25 kHz Signal, Uplink, AGC, 815 MHz	98
8.7.18	25 kHz Signal, Uplink, AGC+3dB, 815 MHz	99
8.7.19	6.25 kHz Signal, Downlink, AGC, 860 MHz	100
8.7.20	6.25 kHz Signal, Downlink, AGC+3dB, 860 MHz	101
8.7.21	12.5 kHz Signal, Downlink, AGC, 860 MHz	102
8.7.22	12.5 kHz Signal, Downlink, AGC+3dB, 860 MHz	103
8.7.23	25 kHz Signal, Downlink, AGC, 860 MHz	104
8.7.24	25 kHz Signal, Downlink, AGC+3dB, 860 MHz	105
8.8	EMISSION MASK, OUT-OF-BAND	106
8.8.1	30 MHz to 1 GHz, 772 MHz	107
8.8.2	1 GHz to 10 <sup>th</sup> Harmonic, 772 MHz	108
8.8.3	30 MHz to 1 GHz, 802 MHz	109
8.8.4	1 GHz to 10 <sup>th</sup> Harmonic, 802 MHz	110
8.8.5	30 MHz to 1 GHz, 815 MHz	111
8.8.6	1 GHz to 10 <sup>th</sup> Harmonic, 815 MHz	112
8.8.7	30 MHz to 1 GHz, 860 MHz	113
8.8.8	1 GHz to 10 <sup>th</sup> Harmonic, 860 MHz	114
8.9	SPURIOUS RADIATED EMISSIONS	115
8.9.1	Downlink, 772 MHz	116
8.9.2	Uplink, 802 MHz	117
8.9.3	Uplink, 815 MHz	118
8.9.4	Downlink, 860 MHz	119
8.10	ADJACENT CHANNEL POWER LIMITS	120
8.10.1	ACP, Uplink, 815 MHz	121
8.10.2	ACP, Downlink, 860 MHz	122
9.	ANNEX-A - PHOTOGRAPHS OF THE EUT	123
10.	ANNEX-B – TEST SETUP PHOTOGRAPHS	123
11.	HISTORY OF TEST REPORT CHANGES	123



## 1. Applicant Information

**Applicant:** Radio Solutions, Inc.  
**Address:** 55 Accord Park Drive,  
Norwell, Massachusetts, 02061, United States

### 1.1 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 90 (PRIVATE LAND MOBILE RADIO SERVICES) known as Licensed Land Mobile; ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

Applicable Clauses from Part 2		
FCC Part 2 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.202	Bandwidth & Emission	Pass
2.1033 (c)(8)	Power at the Final Amplifier	Pass
2.1046 (a)	RF Output Power	Pass
2.1047	Modulation characteristics	n/a
2.1049	Occupied Bandwidth	Pass
2.1051	Spurious emissions at antenna terminals	Pass
2.1053	Field strength of spurious radiation	Pass
2.1055	Frequency stability	n/a



Applicable Clauses from Part 90 Subpart I		
FCC Part 90 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
90.205	Transmitter Power	Pass
90.207	Types of Emissions	Pass
90.209	Bandwidth limitations	Pass
90.210	Emission masks, In-band	Pass
90.210	Emission masks, Out-of-band	Pass
90.213	Frequency stability	n/a
90.214	Transient Frequency Behavior	n/a
90.219 (d)(6)(i)	ERP of intermodulation products	n/a <sup>1</sup>
90.219 (d)(6)(ii)	ERP of noise within the passband	n/a <sup>1</sup>
90.219 (d)(6)(iii)	ERP of noise on spectrum < 1 MHz outside of the passband	n/a <sup>1</sup>
90.219 (d)(3)(i), (e)(1)	ERP of Radiated Power	n/a <sup>1</sup>
90.219 (e)(2)	Noise figure	Pass
90.219 (e)(3)	Spurious emissions	Pass
90.219 (e)(4)(i)(ii)(iii)	Retransmitted Signals	Pass
90.221	Adjacent channel power limits	Pass

**Note 1:** Requirements in Part 90.219 (d) apply at deployment of this EUT, therefore are not applicable at certification.

KDB 935210 D05 v01r04		
FCC KDB 935210 D05 Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
4.1	Test Signals for PLMRS (Input Signals)	Pass
4.2	AGC Threshold	Reported
4.3	Out-of-Band Rejection	Reported
4.4	Input-versus-Output Signal Comparison	Pass
4.5	Output Power	Pass
4.5	Amplifier/Booster Gain (optional)	Reported
4.6	Noise Figure	Pass
4.7.2	Out-of-band/Out-of-block Conducted Emissions (Intermodulation Products)	Pass
4.7.3	EUT Spurious Conducted Emissions	Pass
4.8	Frequency Stability	n/a
4.9	Spurious Radiated Emissions	Pass



Timco Engineering, Inc., an IIA Company  
 849 NW State Road 45, Newberry, Florida 32669  
 (352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

## 2. Location of Testing

### 2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").  
 Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780  
 FCC Designation # US1070  
 FCC site registration is under A2LA certificate # 0955.01  
 ISED Canada test site registration # 2056A  
 EU Notified Body # 1177  
 For all designations see A2LA scope # 0955.01

### 2.2 Testing was performed, reviewed by

Dates of Testing: 4/19/2023- 4/21-2023

Signature: \_\_\_\_\_




Sr. EMC Engineer  
 EMC-003838-NE



Name & Title: Tim Royer, EMC Engineer

Date of Signature 5/17/2023

Signature: \_\_\_\_\_



Name & Title: Kristoffer Costa, EMC Technician

Date of Signature 5/17/2023



Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

### 3. Test Sample(s) (EUT/DUT)

The test sample was received: 4/18/2023

#### 3.1 Definitions

*Signal booster:* A device or system that automatically receives, amplifies, and retransmits signals from wireless stations into and out of building interiors, tunnels, shielded outdoor areas and other locations where these signals would otherwise be too weak for reliable communications. Signal booster systems may contain both Class A and Class B signal boosters as components.

*Class A signal booster:* A signal booster designed to retransmit signals on one or more specific channels. A signal booster is deemed to be a Class A signal booster if none of its passbands exceed 75 kHz.

*Class B signal booster:* A signal booster designed to retransmit any signals within a wide frequency band. A signal booster is deemed to be a Class B signal booster if it has a passband that exceeds 75 kHz.





### 3.2 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	2AHVPSB7800M5BANA
Brief Description	Signal Booster, Class B with Analog Filters
Model(s) #	SB7800M5B-ANA
Firmware version	N/A
Software version	N/A
Serial Number	N/A

Technical Characteristics	
Frequency Range	769-775 MHz, 799-805 MHz, 806-824 MHz, 851-869 MHz
RF O/P Power (Max.)	37.07 dB/ 5.09 W
Modulation	FM
Bandwidth & Emission Class	4K05F3E, 7K85F3E, 12K4F3E, 8K23F1D, 8K23F1E, 8K23F1W, 9K85F1D, 9K85F1E, 9K85D7W
Duty Cycle	100%
Antenna Connector	SMA
Voltage Rating (AC or Batt.)	120 VAC

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	n/a	n/a	0 dBi

- Note: Information such as antenna gain, firmware/software numbers are provided by the manufacturer and cannot be validated by the test lab.



### 3.3 Configuration of EUT

Test Modes		
Band (MHz)	Link Direction	Test Frequencies (MHz)
769 MHz- 775 MHz	Downlink	772 MHz
799 MHz- 805 MHz	Uplink	802 MHz
806 MHz- 824 MHz	Uplink	815 MHz
851 MHz-869 MHz	Downlink	860 MHz

#### Operating conditions during Testing:

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

#### Peripherals used during Testing:

No peripherals used.

### 3.4 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



#### 4. Test methods & Applicable Regulatory Limits

##### 4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 90 Licensed device:

- 1) ANSI C63.26-2015
- 2) FCC KDB 935210 D05 v01r04 Industrial Signal Boosters

##### 4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 90 Subpart I, 90.219

#### 5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
<b>Note:</b> The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

#### 6. Environmental Conditions

##### 6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
<b>Note:</b> Specific environmental conditions that are applicable to a specific test are available in the test result section.	



## 7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer’s model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

### 7.1 List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	5/4/21	5/3/2024
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	2/25/20	5/25/2023
CHAMBER	CHAMBER	Panashield	3M	N/A	3/12/19	12/21/2023
Pre-amp	Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	2/27/19	7/26/2025
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	5/26/2024
Receiver	EMI Test Receiver R&S ESW44	Rohde & Schwarz	ESW44	103049	10/13/21	10/12/2024
Signal Generator	Signal Generator HP 8648C	HP	8648C	35537A01679	3/29/19	8/03/2025

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016



## 8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dBμV. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dBμV/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dBμV if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

### Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dBμV	+ 10.36 dB/m	+0.40 dB	=30.36 dBμV/m @ 3m

$$EIRP = P_{cond} \text{ (dBm)} + dBi$$



### 8.1 Power at the Final Amplifier

Limits from FCC Part 2.1033 (c)(8).


No method of measurement is specified. The result has been calculated based on all available information.

Test Results		
EUT Operating Voltage (V)	EUT Current (A)	Power at the Final Amplifier (W)
24	15	360



## 8.2 RF Output Power & Gain

Limits from FCC Parts 2.1046(a), and 90.205 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

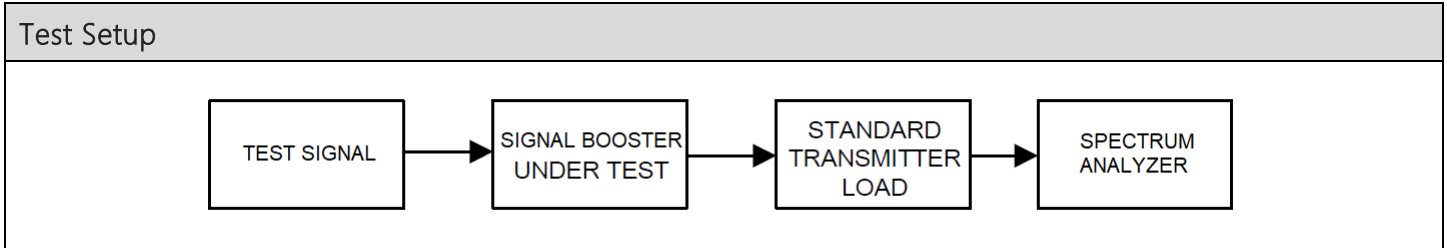

Test Results, Power Output		
Link Direction	Max Power Output (dBm)	Max Power Output (W)
769-775 MHz Downlink	36.94	4.943
799-805 MHz Uplink	36.11	4.083
806- 824 MHz Uplink	36.81	4.797
851- 869 MHz Downlink	37.07	5.093



Gain

Test Results, Gain					
Link Direction	Tuned Frequency (MHz)	Input Level	Power Input (dBm)	Power Output (dBm)	Gain (dB)
Downlink	772	AGC	-51.2	36.85	94.05
		AGC+3	-48.2	36.94	91.14
Uplink	802	AGC	-52.8	35.83	94.63
		AGC+3	-49.8	36.11	91.91
Uplink	815	AGC	-52	36.66	94.66
		AGC+3	-49	36.81	91.81
Downlink	860	AGC	-52.8	37.05	95.85
		AGC+3	-49.8	37.07	92.87


6dB adjustment from splitter included in calculation





### 8.3 Out-of-band Rejection


Limits and test method from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

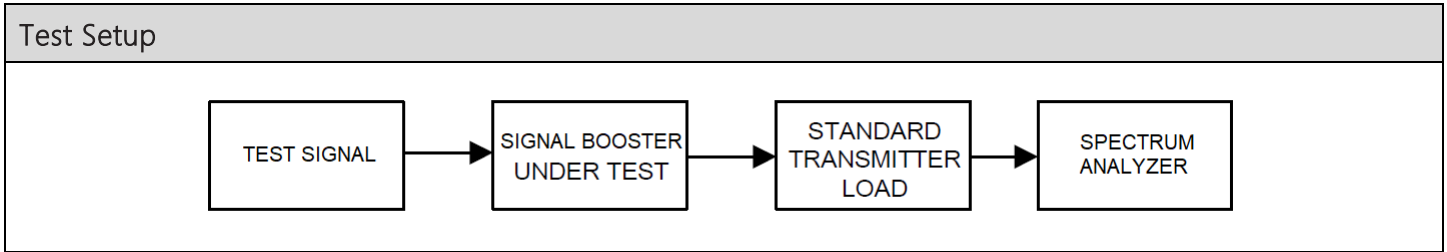

Test Results, Out-of-band Rejection and Class of Operation			
Operating Band (MHz)	Link Direction	Passband (kHz)	Class of Operation
769- 775 MHz	Downlink	> 75 kHz	Class B
799- 805 MHz	Uplink	> 75 kHz	Class B
806- 824 MHz	Uplink	> 75 kHz	Class B
851- 869 MHz	Downlink	> 75 kHz	Class B


Out-of-band Rejection, Spectrum Plots

8.3.1 Uplink, 772 MHz

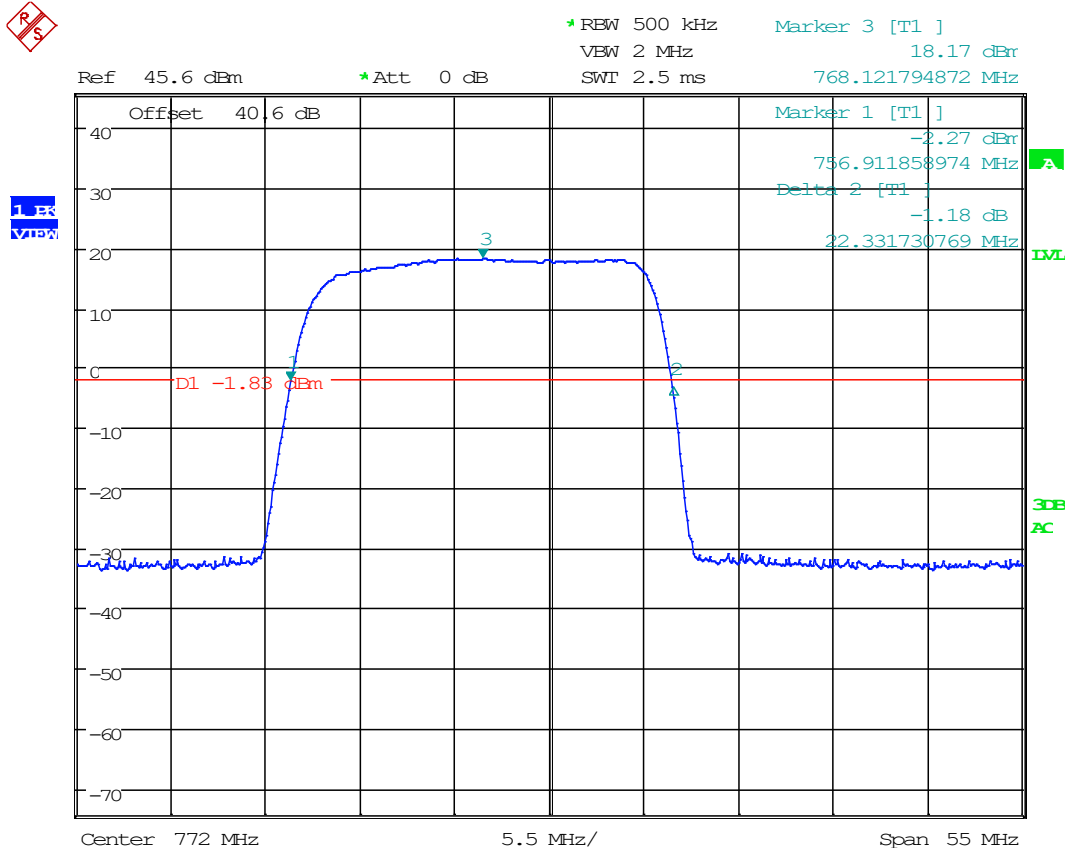

Date: 27.APR.2023 17:09:52


### 8.3.2 Uplink, 802 MHz

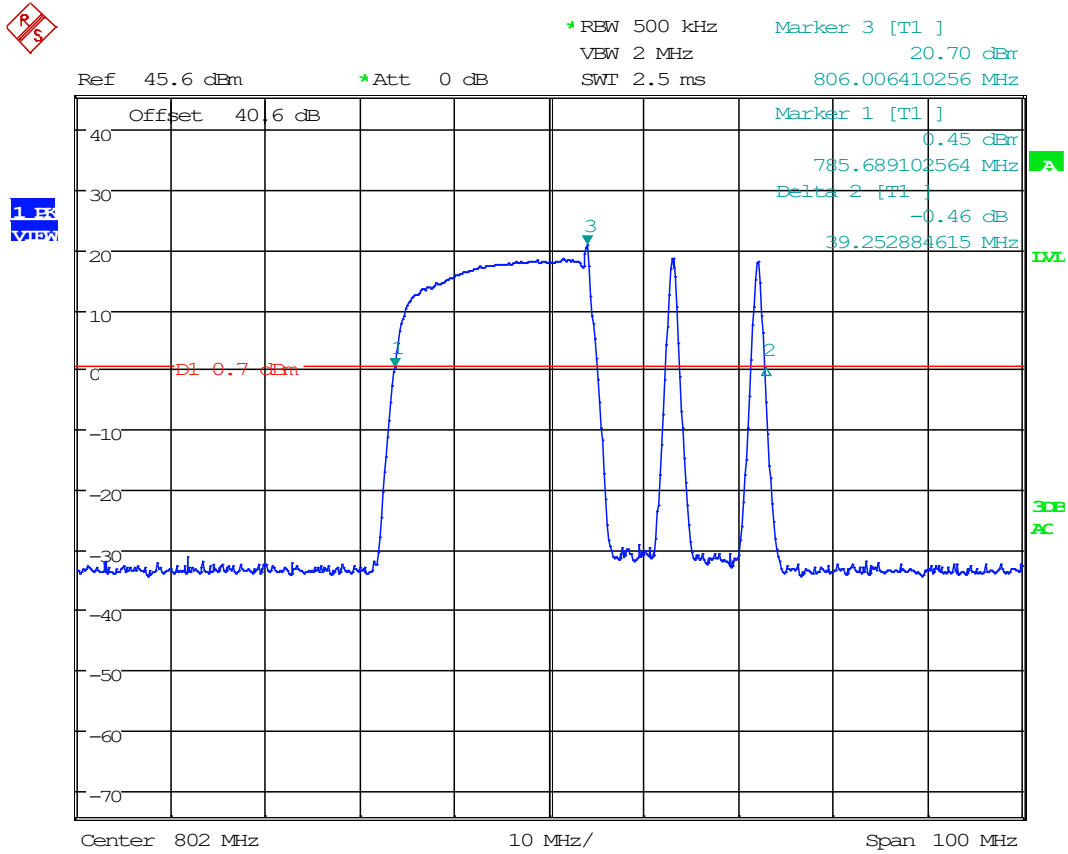

Date: 27.APR.2023 17:27:14




### 8.3.3 Uplink, 815 MHz

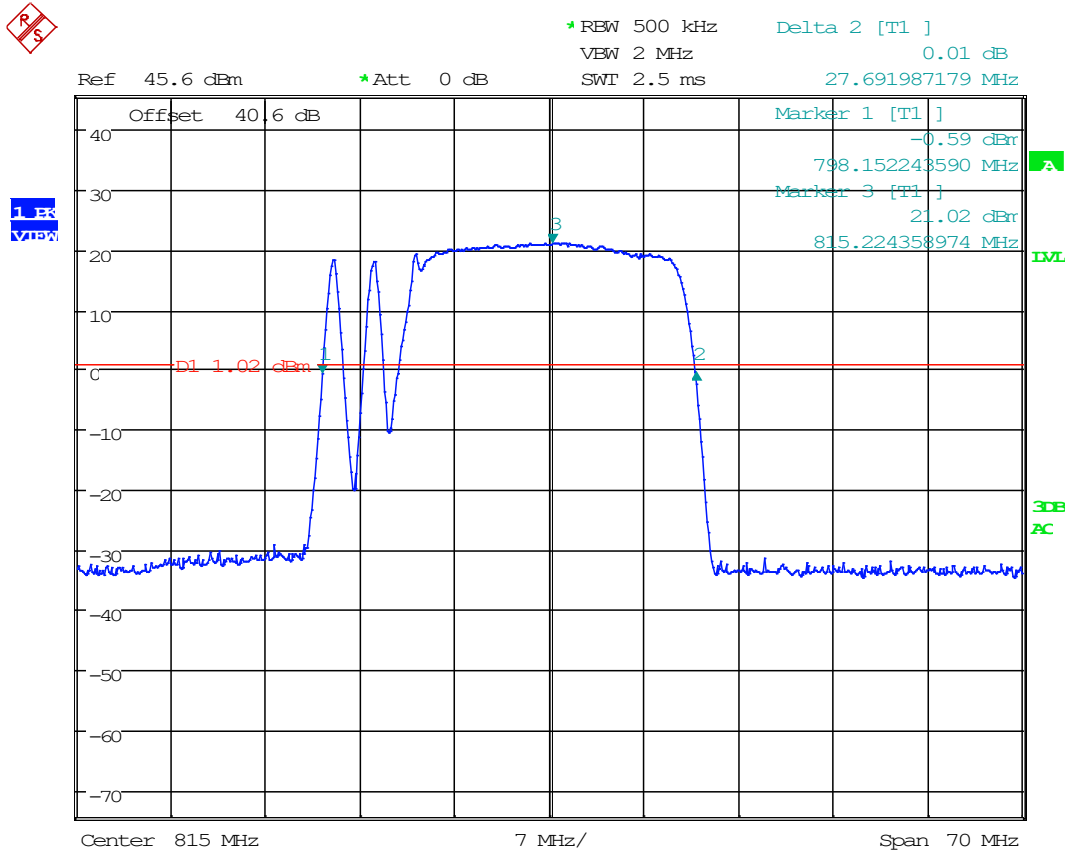

Date: 27.APR.2023 17:20:46



### 8.3.4 Downlink, 860 MHz

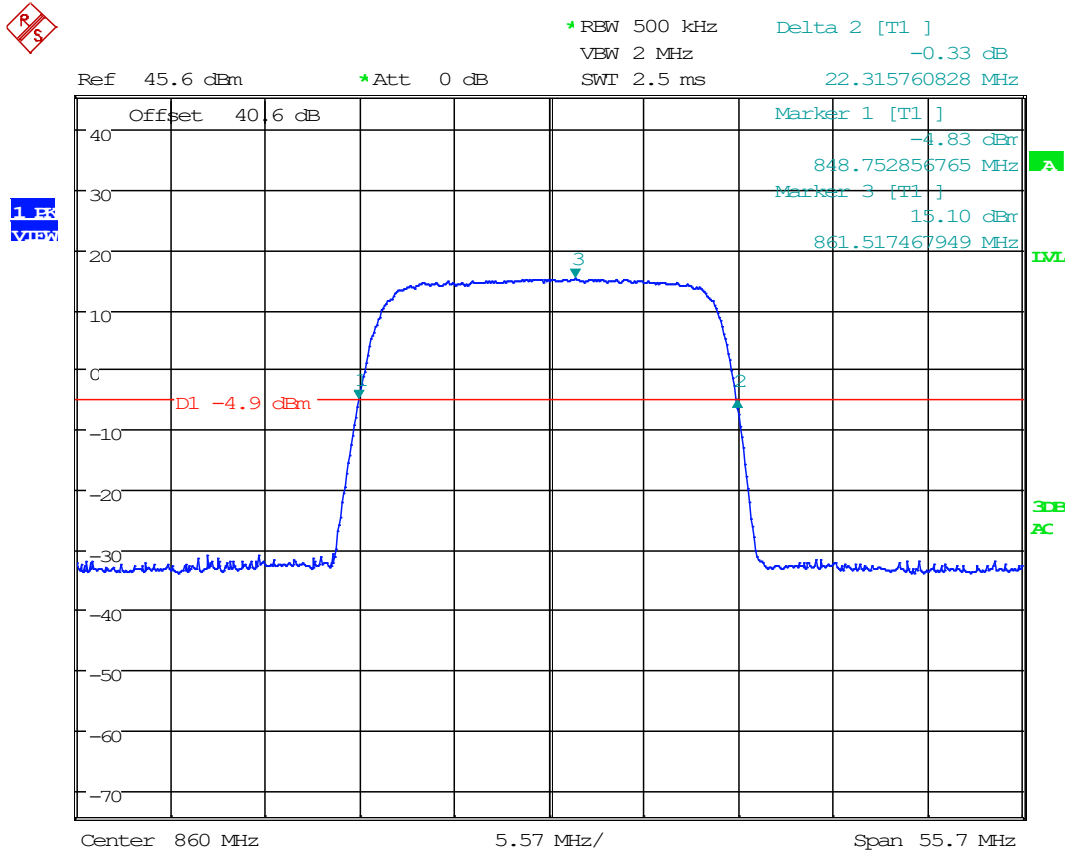

Date: 27.APR.2023 17:17:55



### 8.4 Bandwidth & Emission

Limits from FCC Parts 90.209 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.


Authorized Bandwidth		
Rule Part	Operating Range	Authorized Bandwidth (kHz)
Part 90	769- 775 MHz	6/11.25/20
Part 90	799- 805 MHz	6/11.25/20
Part 90	806- 824 MHz	6/11.25/20
Part 90	851-869 MHz	6/11.25/20

Applicable Input Signals		
Signal	Occupied Bandwidth (kHz)	Representative Emission Designator(s)
CW	N/A	N/A
6.25 kHz FM	4.048	4K05F3E
12.5 kHz FM	7.851	7K85F3E
25 kHz FM	12.363	12K4F3E
C4FM (P25 Phase I)	8.229	8K23F1D, 8K23F1E
HCPM (P25 Phase II SU)	8.229	8K23F1W
HDQPSK (P25 Phase II BS)	9.848	9K85F1D, 9K85F1E, 9K85D7W



### 8.5 Input VS Output Signal Comparison

Limits from FCC Parts 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

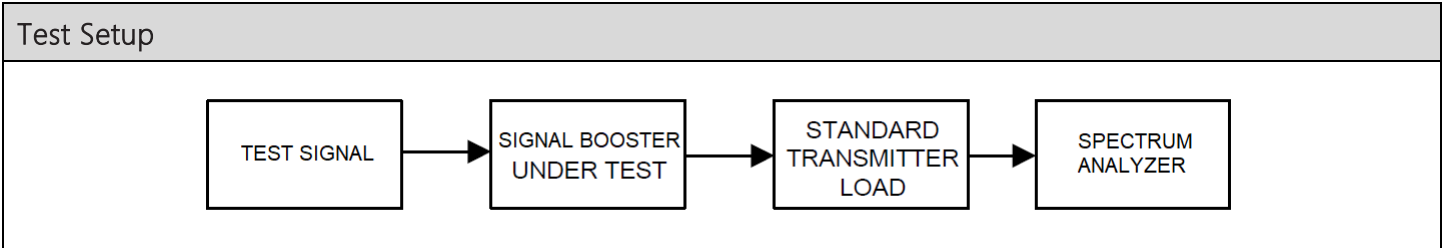



Input VS Output Comparison

Test Results, Input VS Output Comparison						
Link Direction	Tuned Frequency (MHz)	Input Signal	AGC Level	99% OBW of Input (kHz)	99% OBW of Output (kHz)	Change (%)
Downlink	772	6.25 kHz FM	@ AGC	4.038	4.048	0.01
		12.5 kHz FM	@ AGC	6.209	7.850	1.641
		25 kHz FM	@ AGC	12.304	12.304	0
Uplink	802	6.25 kHz FM	@ AGC	4.038	4.048	0.01
		12.5 kHz FM	@ AGC	6.209	7.816	1.607
		25 kHz FM	@ AGC	12.304	12.363	0.059






Input VS Output Comparison

Test Results, Input VS Output Comparison						
Link Direction	Tuned Frequency (MHz)	Input Signal	AGC Level	99% OBW of Input (kHz)	99% OBW of Output (kHz)	Change (%)
Uplink	815	6.25 kHz FM	@ AGC	4.038	4.048	0.01
		12.5 kHz FM	@ AGC	6.209	7.851	1.822
		25 kHz FM	@ AGC	12.304	12.363	0.059
		C4FM	@ AGC	7.712	8.229	0.517
		HCPM	@ AGC	7.712	8.229	0.517
		HDQPSK	@ AGC	9.915	9.848	0.067
Downlink	860	6.25 kHz FM	@ AGC	4.038	4.048	0.01
		12.5 kHz FM	@ AGC	6.209	7.850	1.641
		25 kHz FM	@ AGC	12.304	12.363	0.059
		C4FM	@ AGC	7.712	8.229	0.517
		HCPM	@ AGC	7.712	8.057	0.345
		HDQPSK	@ AGC	9.915	9.675	0.24


Input VS Output, Input Spectrum Plots

8.5.1 6.25 kHz FM, Input Signal

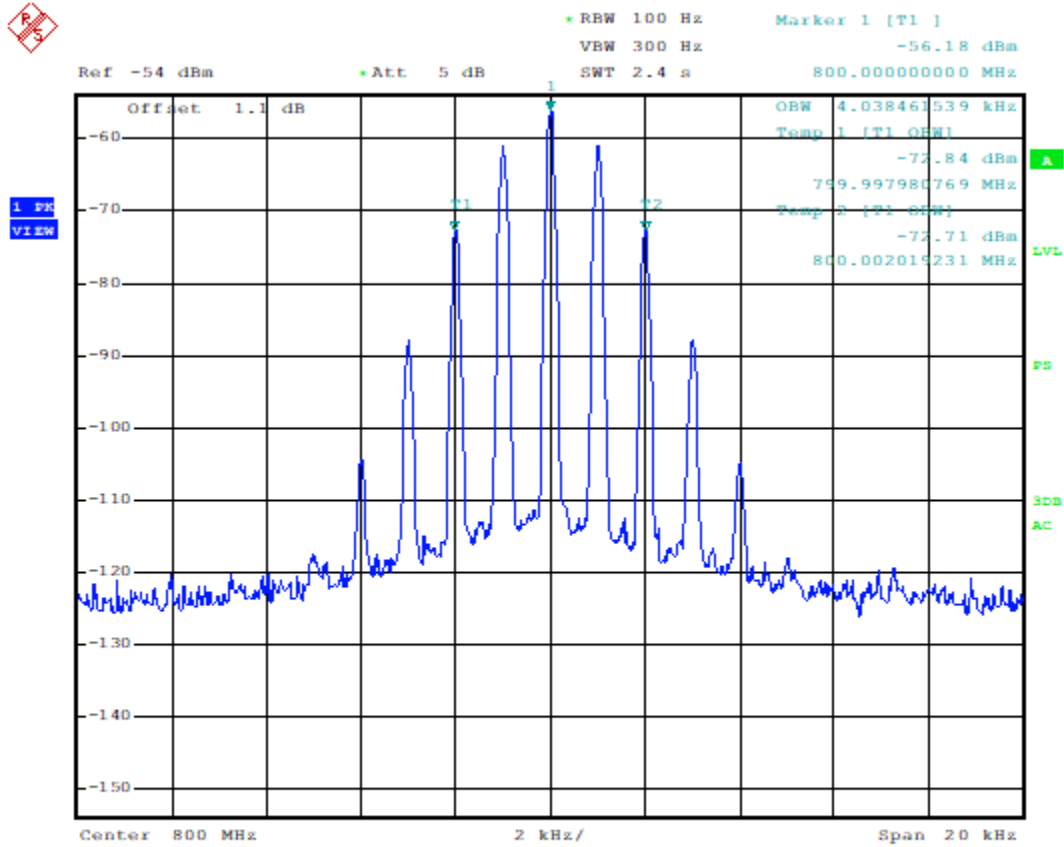


Date: 30. JAN. 2019 13:10:11

### 8.5.2 12.5 kHz FM, Input Signal

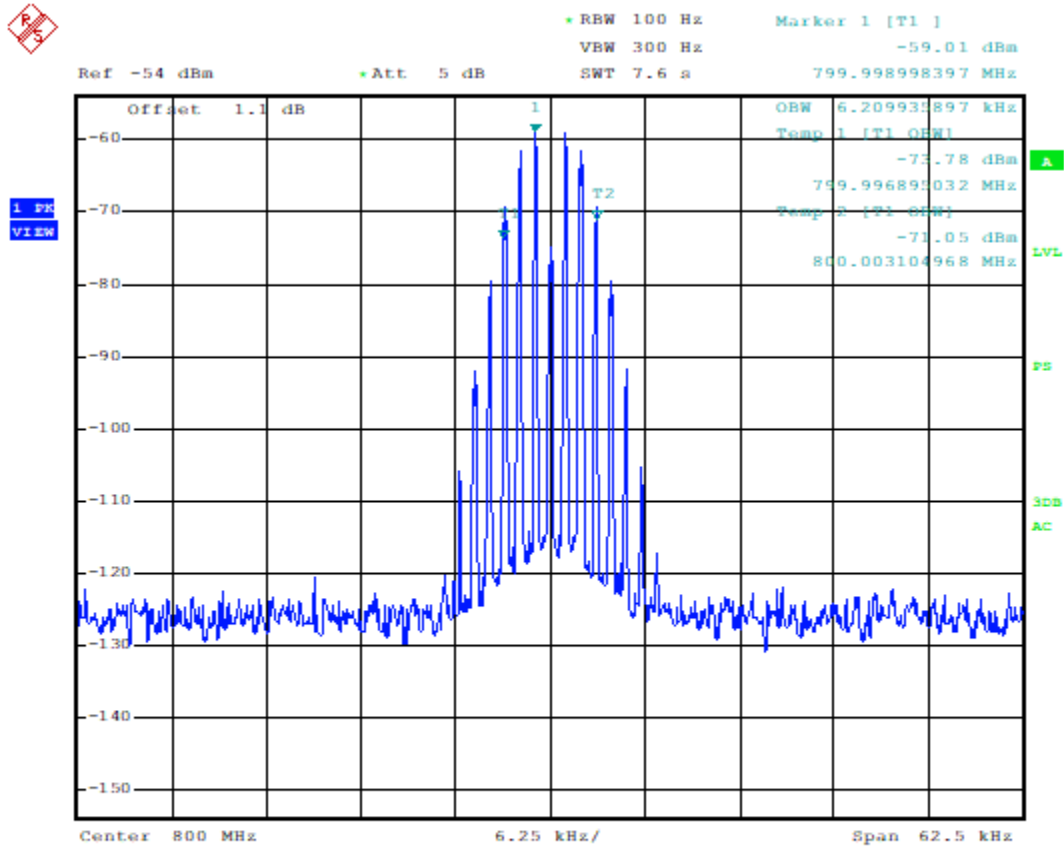


Date: 30.JAN.2019 14:19:45

### 8.5.3 25 kHz FM, Input Signal

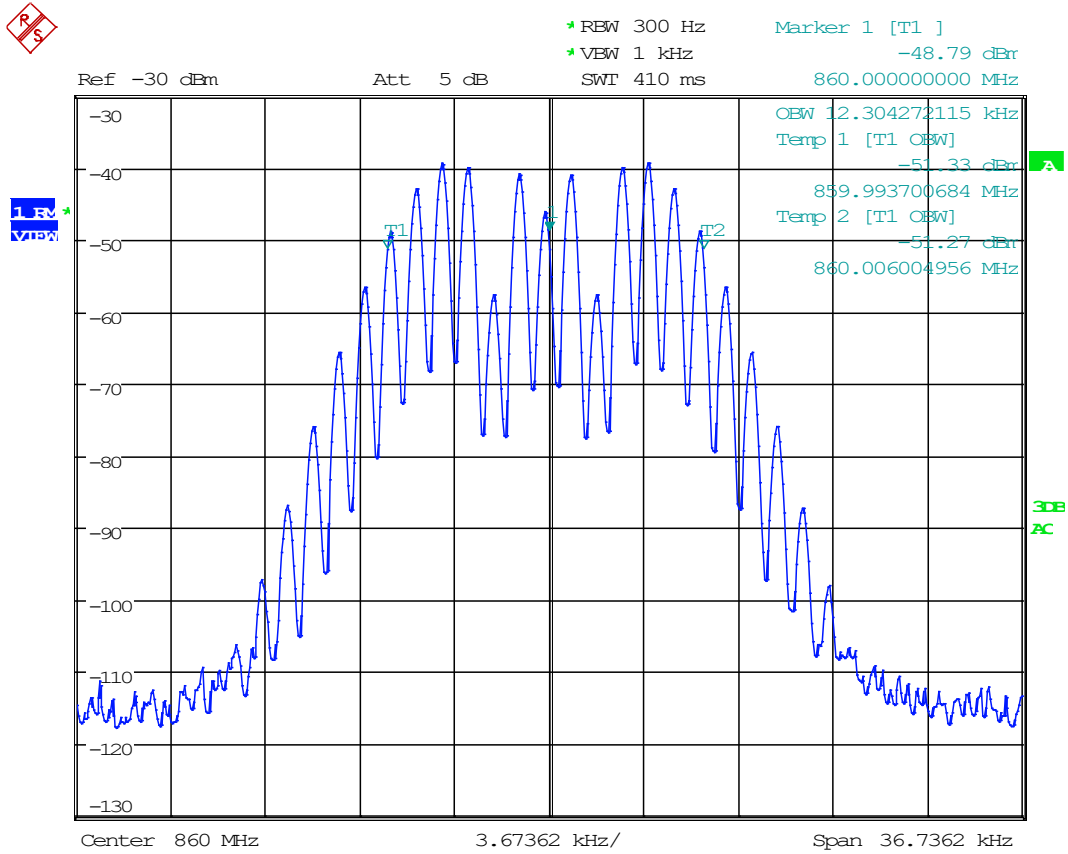


Date: 26.APR.2023 14:17:10

### 8.5.4 C4FM, Input Signal

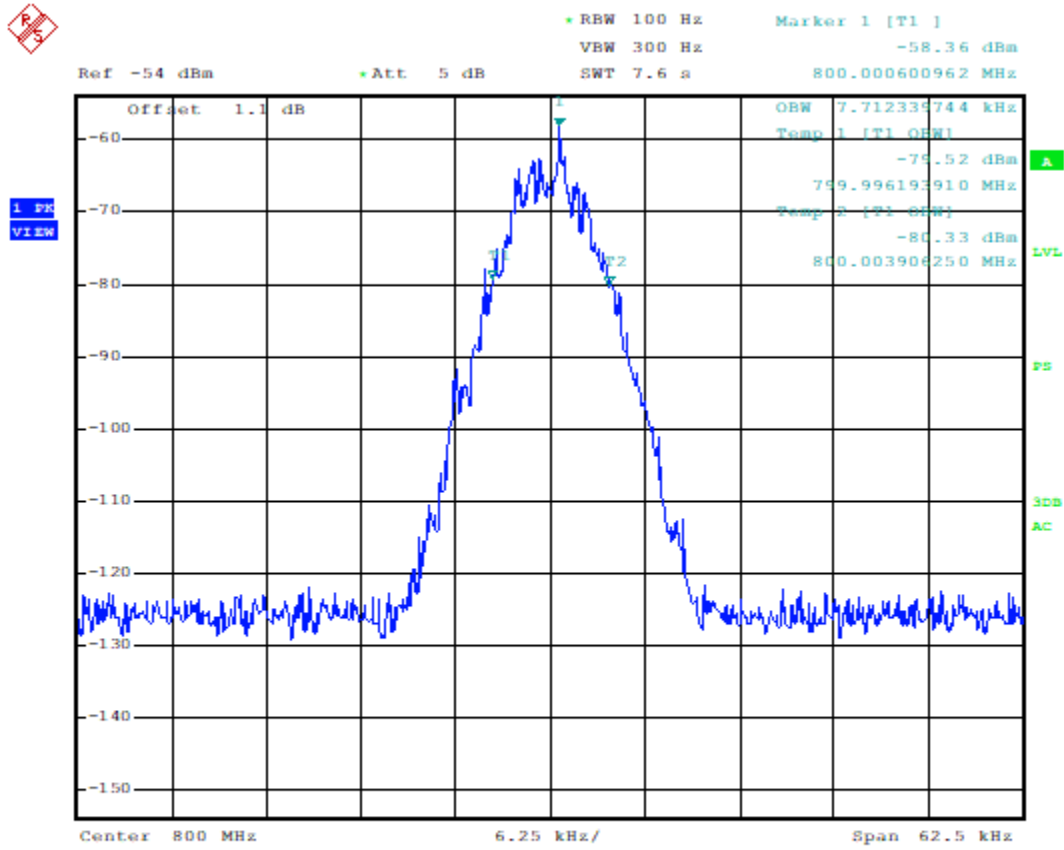


Date: 30.JAN.2019 14:28:58

### 8.5.5 H-CPM, Input Signal

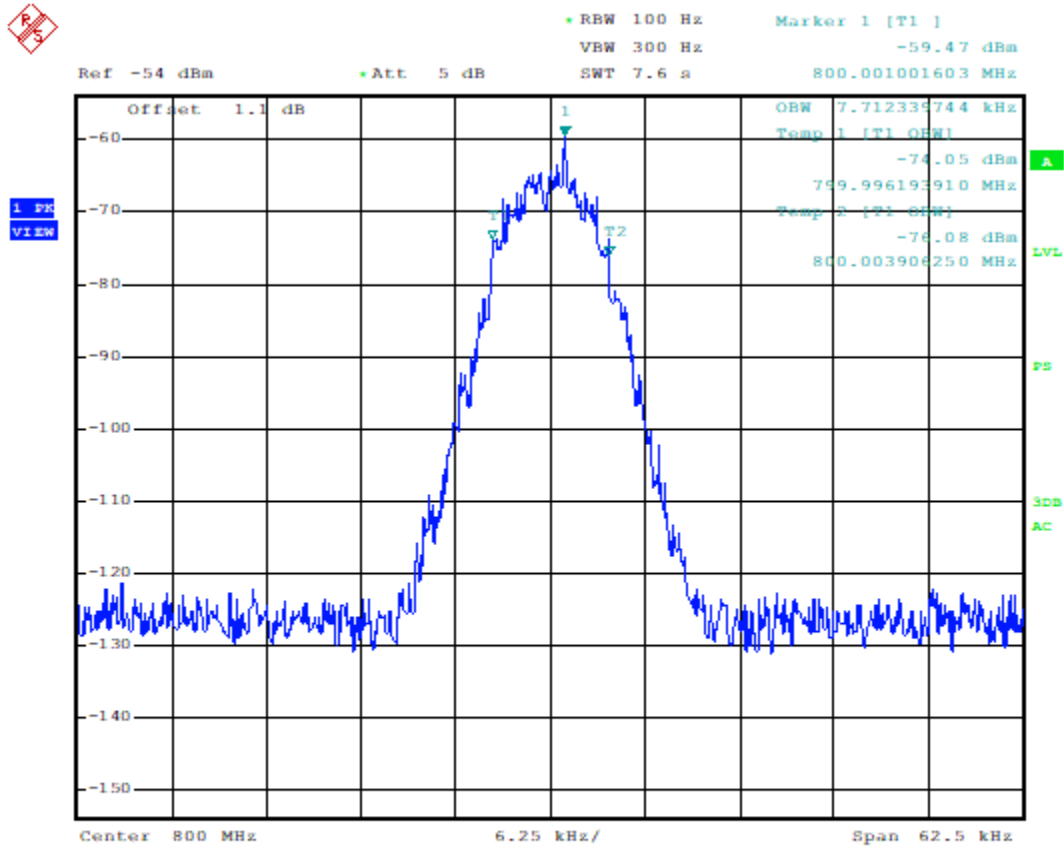

Date: 30.JAN.2019 14:30:47


### 8.5.6 H-DQPSK, Input Signal

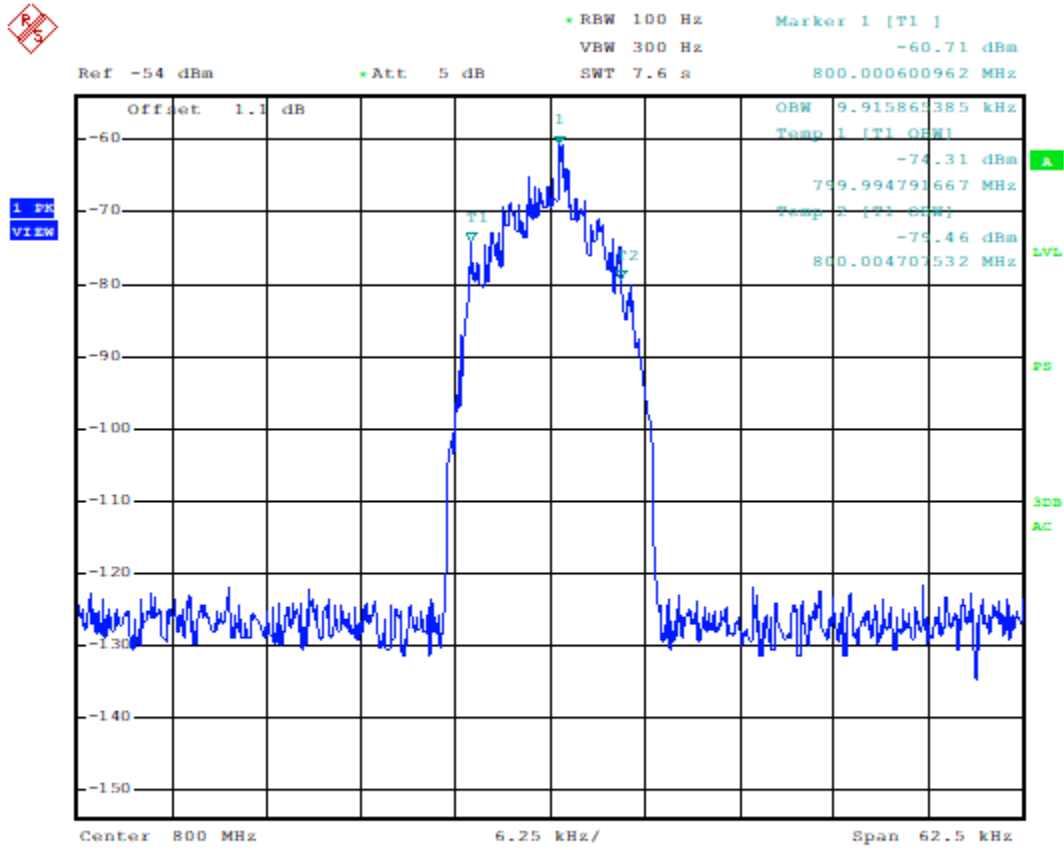

Date: 30.JAN.2019 14:32:35




### 8.5.7 6.25 kHz, FM, DL Mask C, AGC, 772 MHz

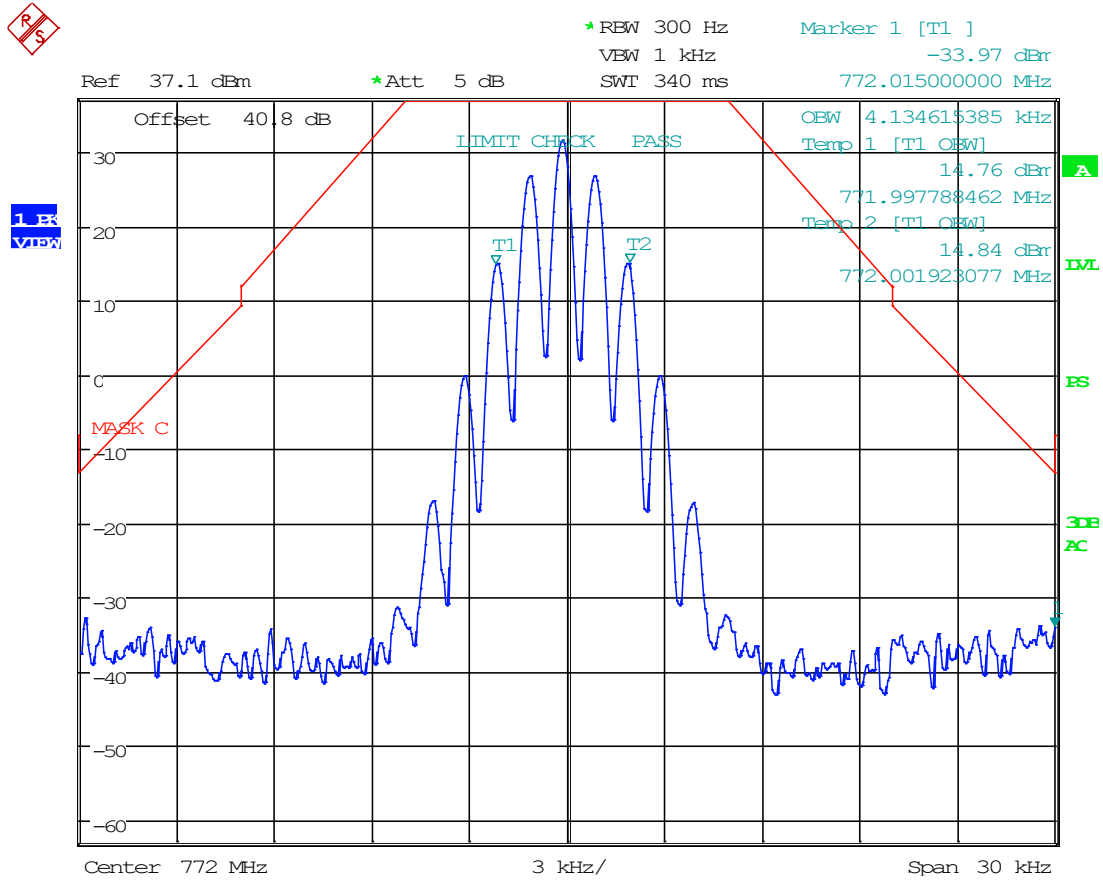

Date: 21.APR.2023 16:34:46




### 8.5.8 6.25 kHz, FM, DL Mask C, AGC +3, 772 MHz

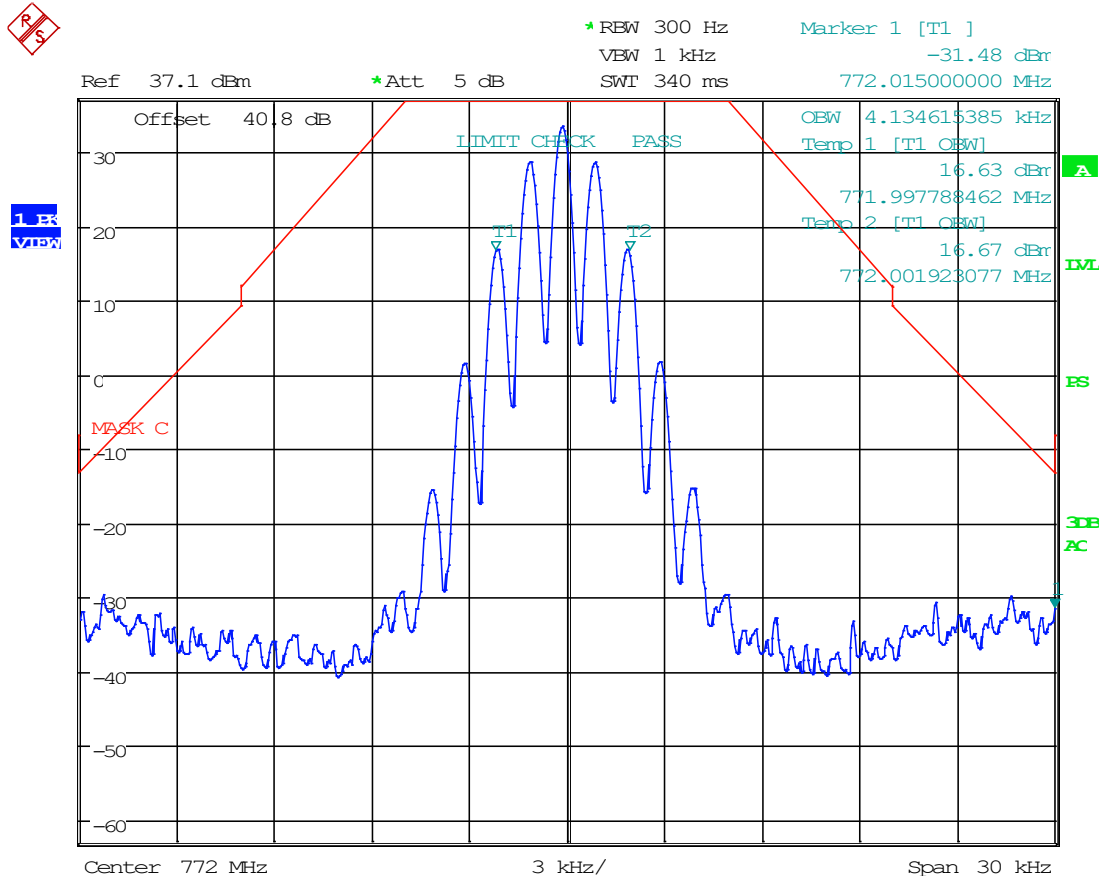

Date: 21.APR.2023 16:35:15




### 8.5.9 12.5 kHz, FM, DL Mask C, AGC, 772 MHz

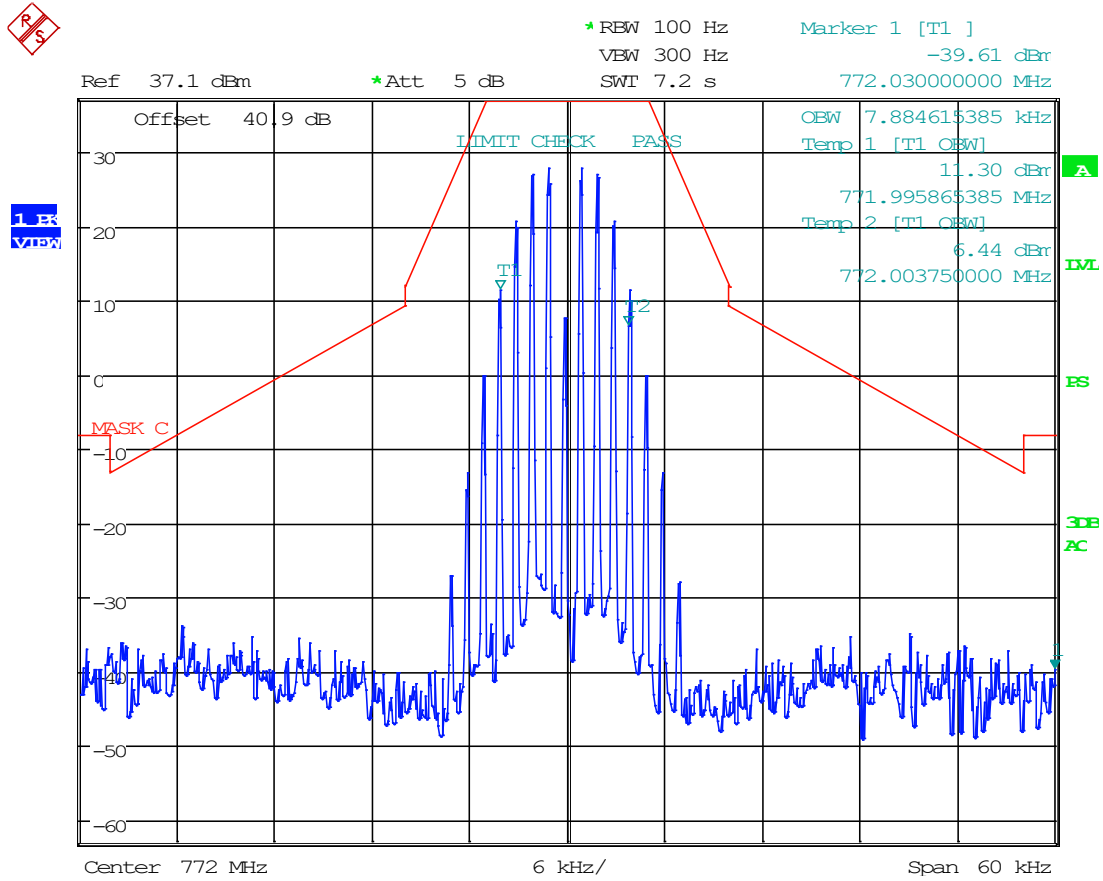

Date: 21.APR.2023 16:18:14




### 8.5.10 12.5 kHz, FM, DL Mask C, AGC+3, 772 MHz

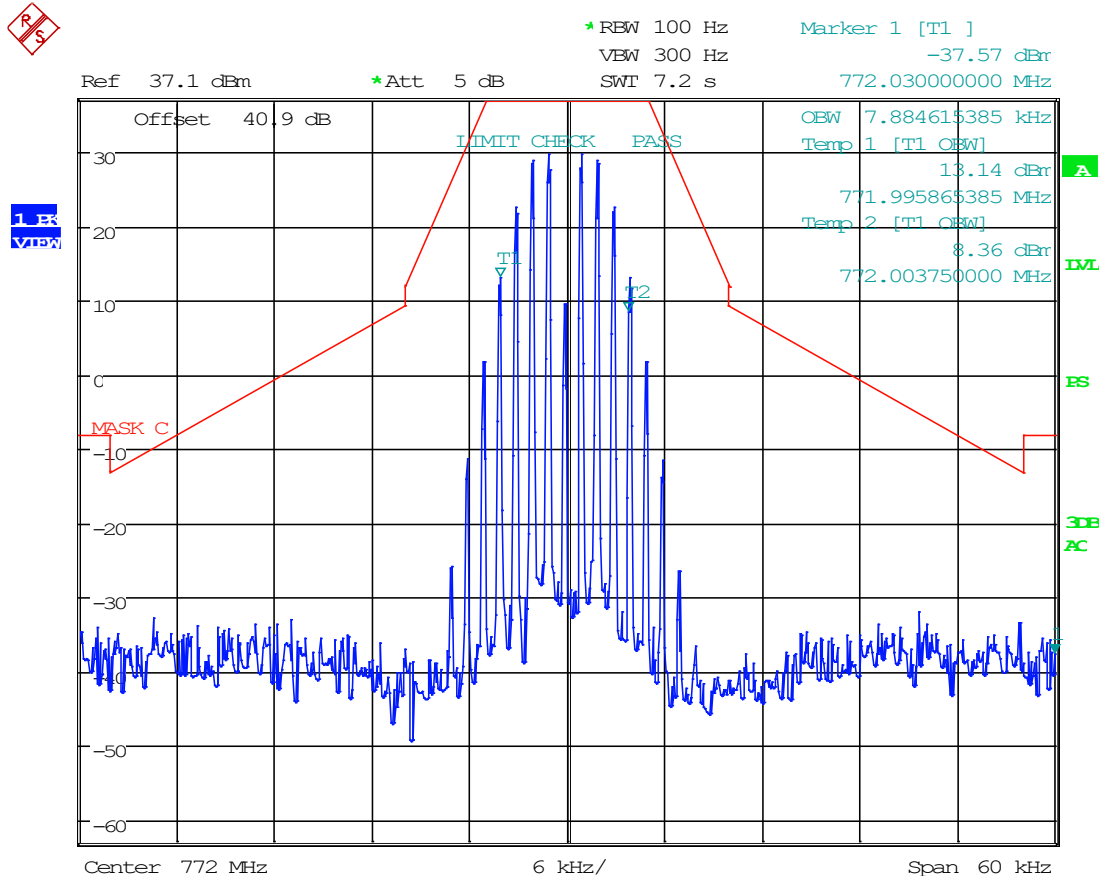

Date: 21.APR.2023 16:17:32




### 8.5.11 25 kHz FM, DL Mask C, AGC, 772 MHz

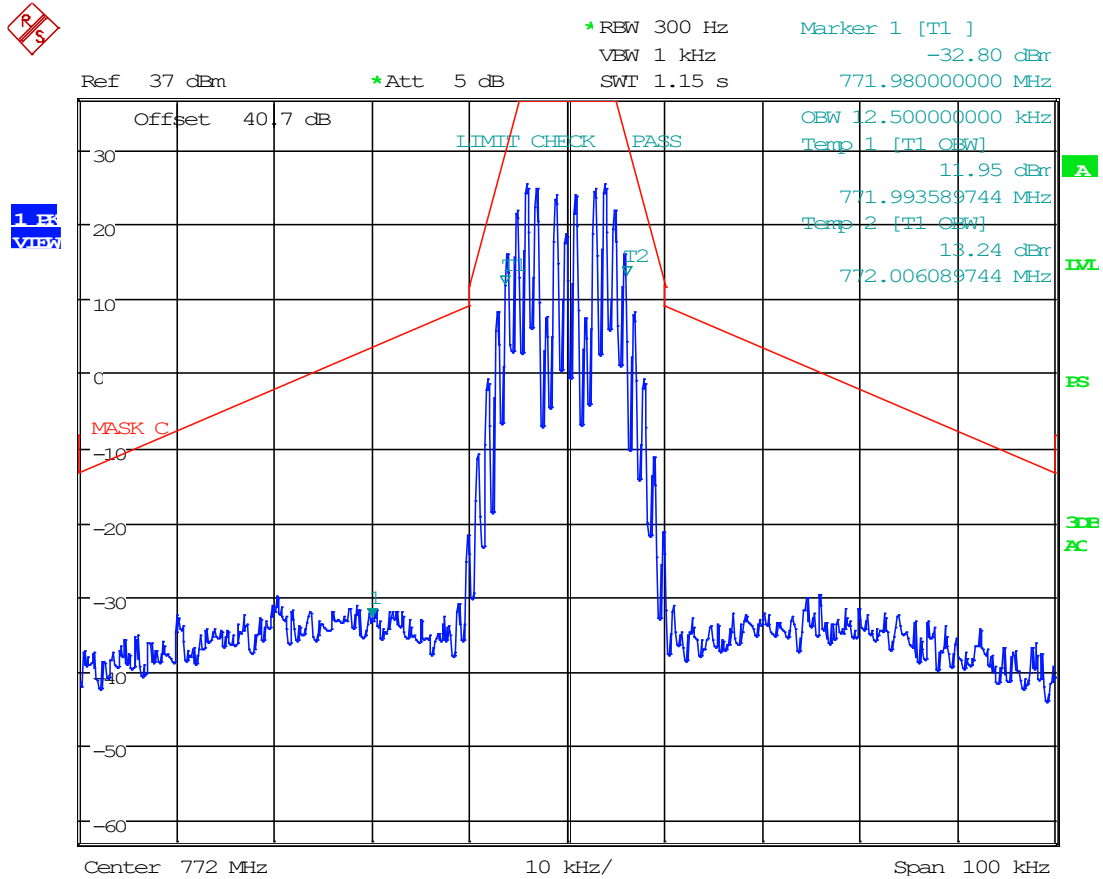

Date: 21.APR.2023 16:23:41




### 8.5.12 25 kHz FM, DL Mask C, AGC+3, 772 MHz

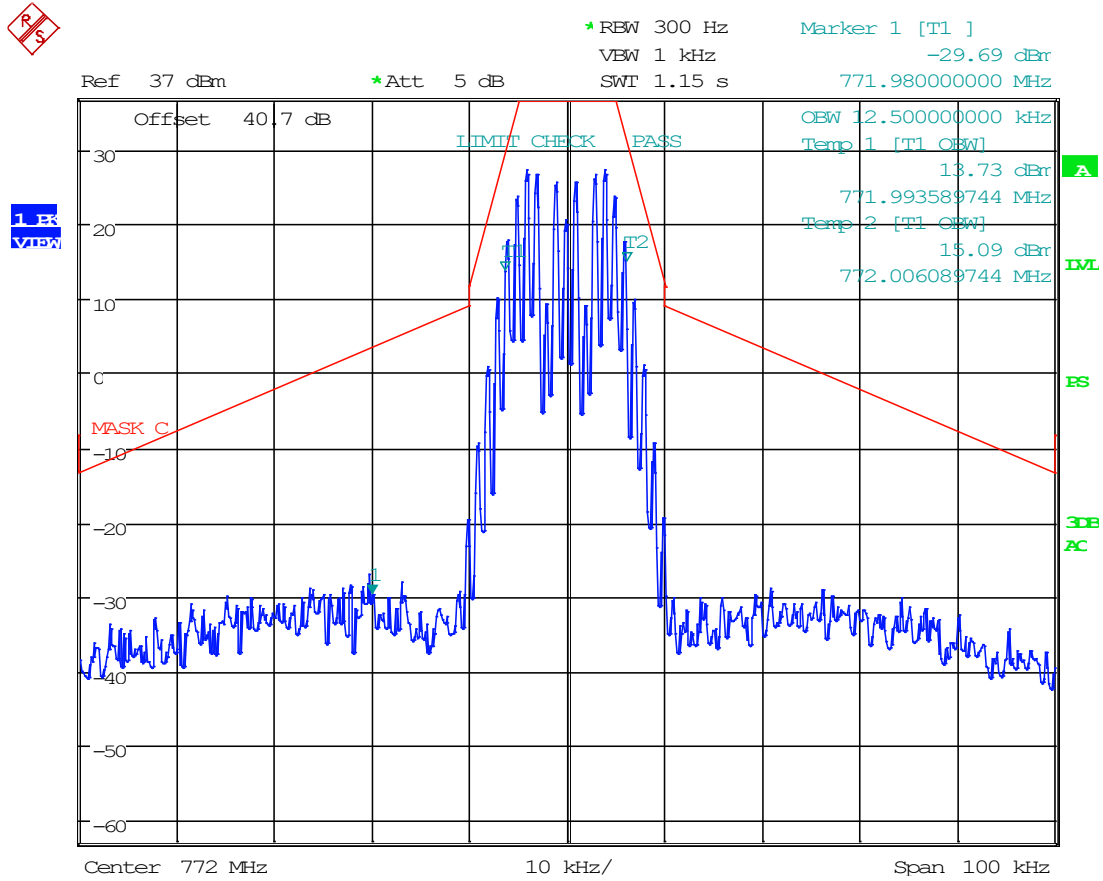

Date: 21.APR.2023 16:24:33




### 8.5.13 C4FM, DL Mask C, AGC, 772 MHz

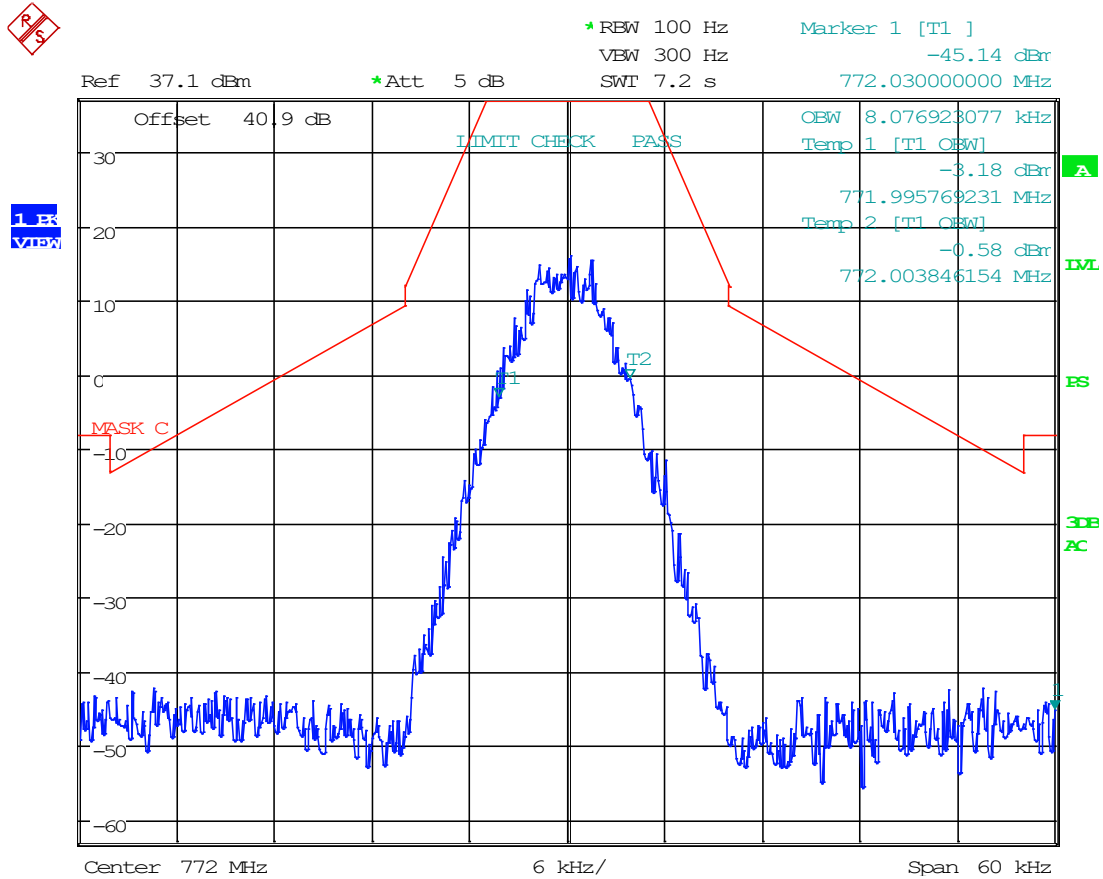

Date: 21.APR.2023 16:18:57




### 8.5.14 C4FM, DL Mask C, AGC+3, 772 MHz

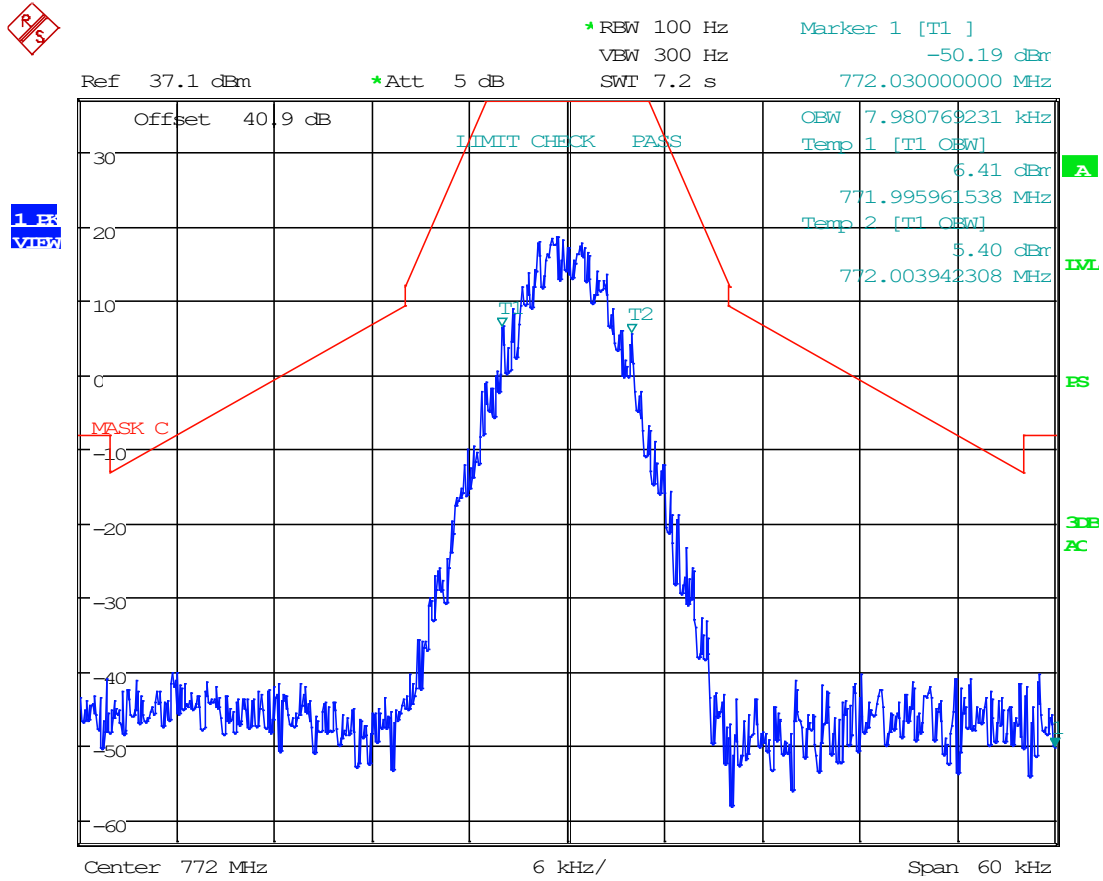

Date: 21.APR.2023 16:19:28




### 8.5.15 H-CPM, DL Mask C, AGC, 772 MHz

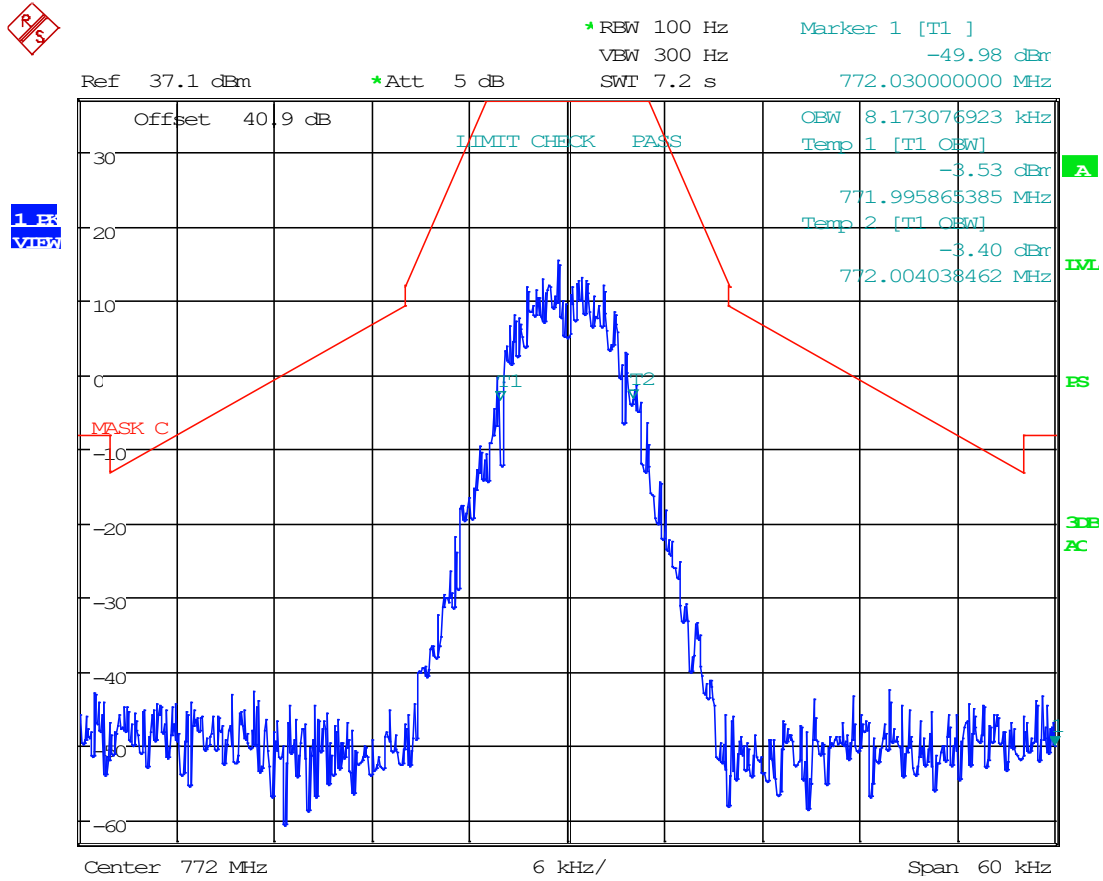

Date: 21.APR.2023 16:20:35




### 8.5.16 H-CPM, DL Mask C, AGC+3, 772 MHz

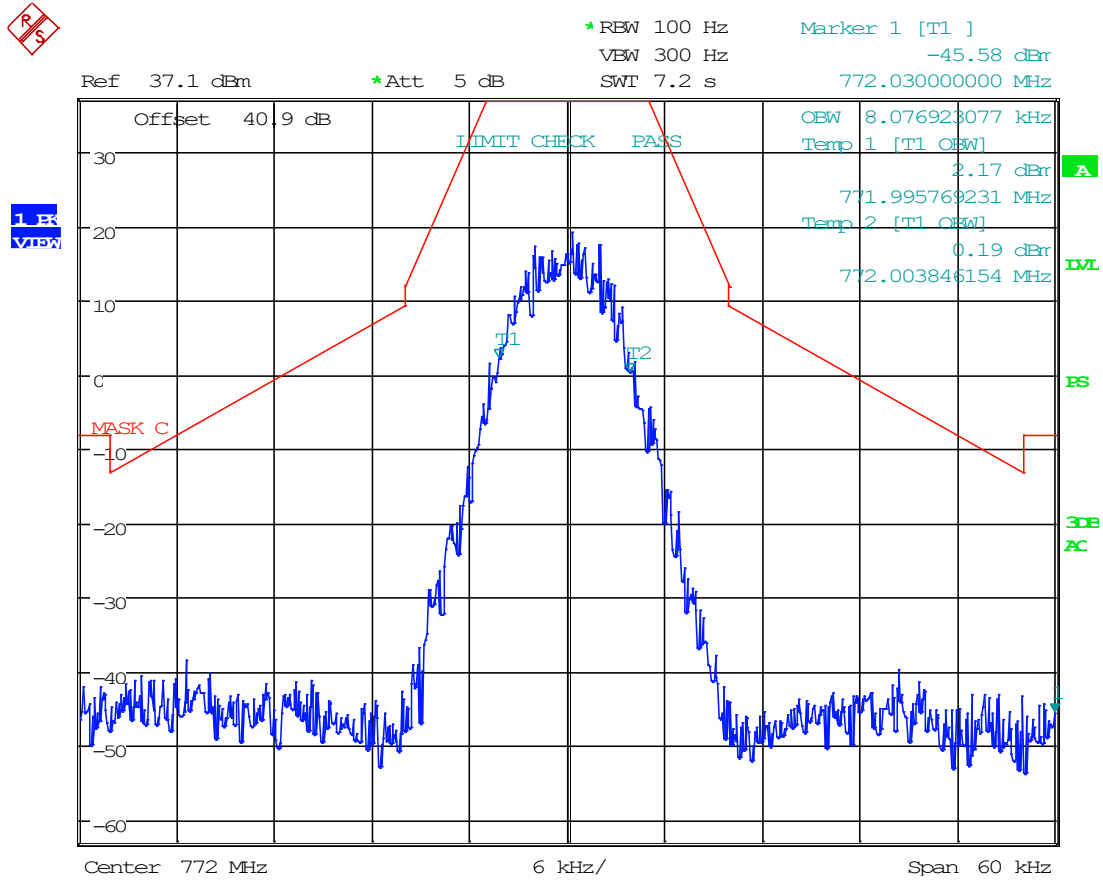

Date: 21.APR.2023 16:20:06




### 8.5.17 H-DQPSK, DL Mask C, AGC, 772 MHz

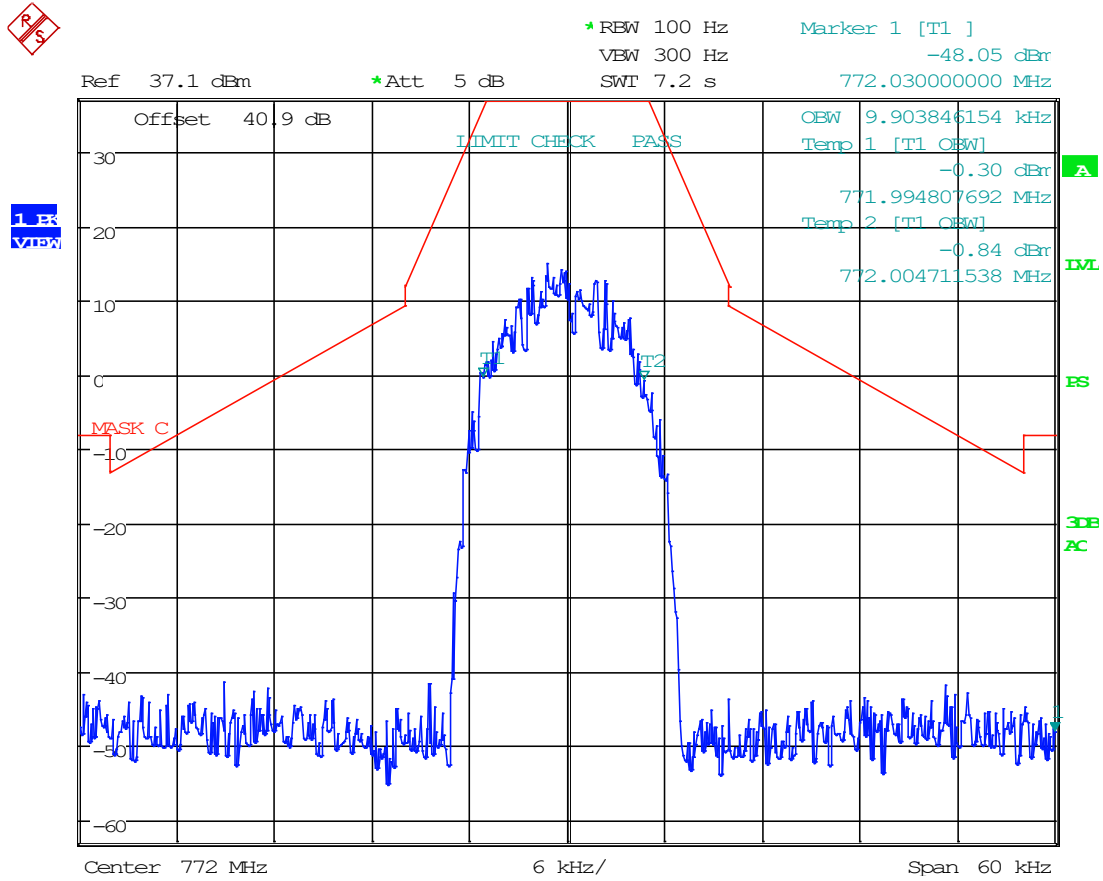

Date: 21.APR.2023 16:21:19




### 8.5.18 H-DQPSK, DL Mask C, AGC+3, 772 MHz

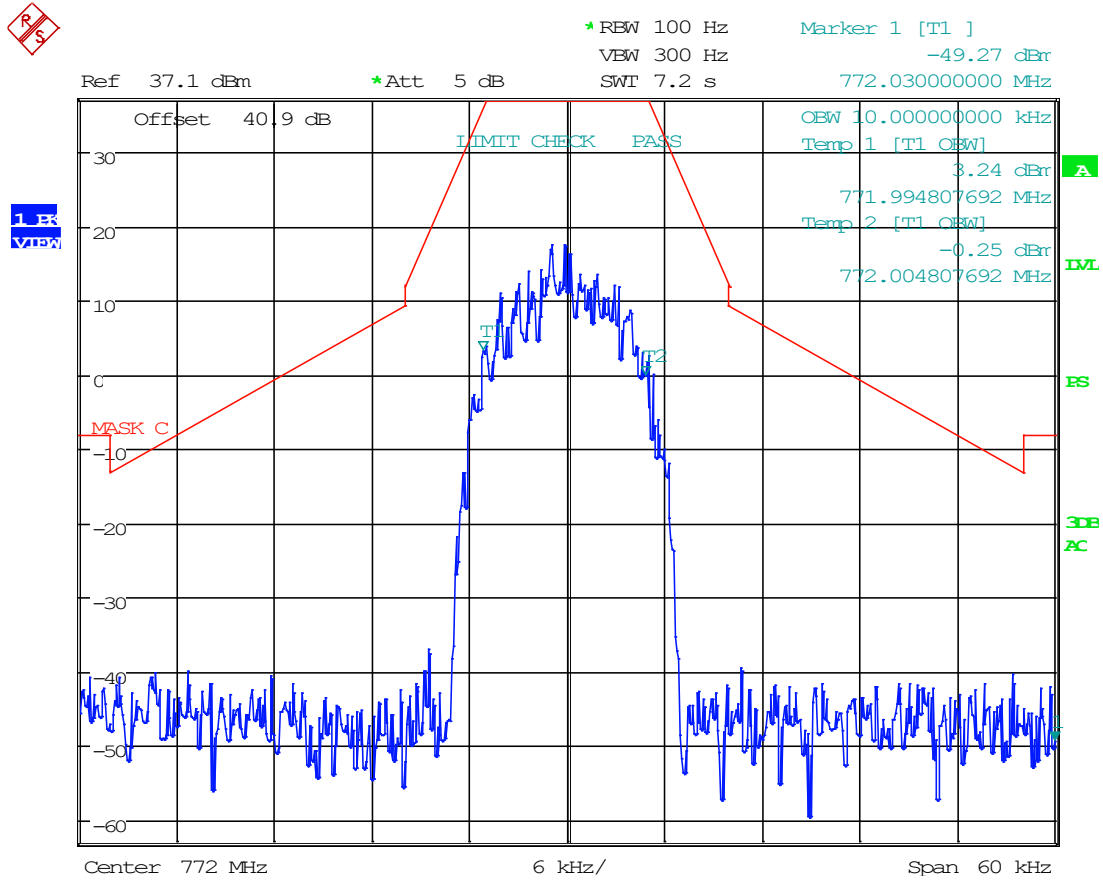

Date: 21.APR.2023 16:21:46




### 8.5.19 6.25 kHz, FM, UL Mask C, AGC, 802 MHz

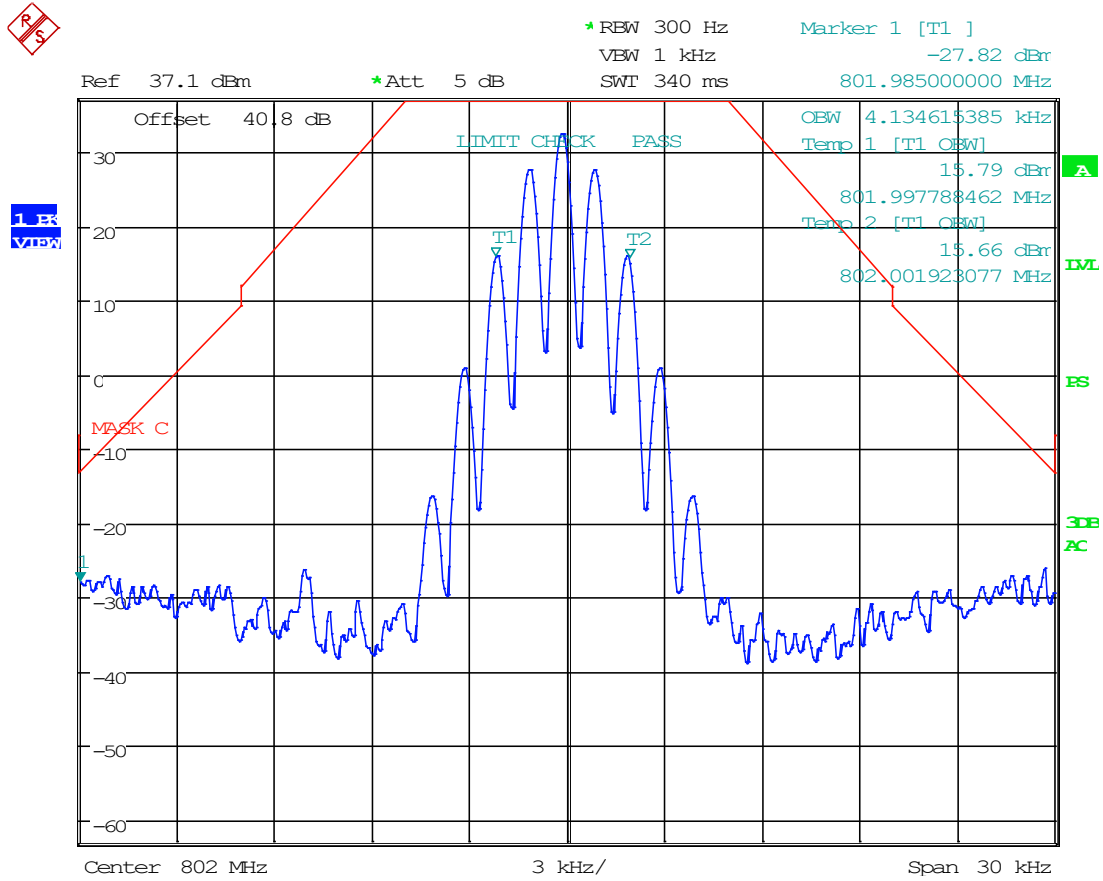

Date: 21.APR.2023 16:33:54




### 8.5.20 6.25 kHz, FM, UL Mask C, AGC +3, 802 MHz

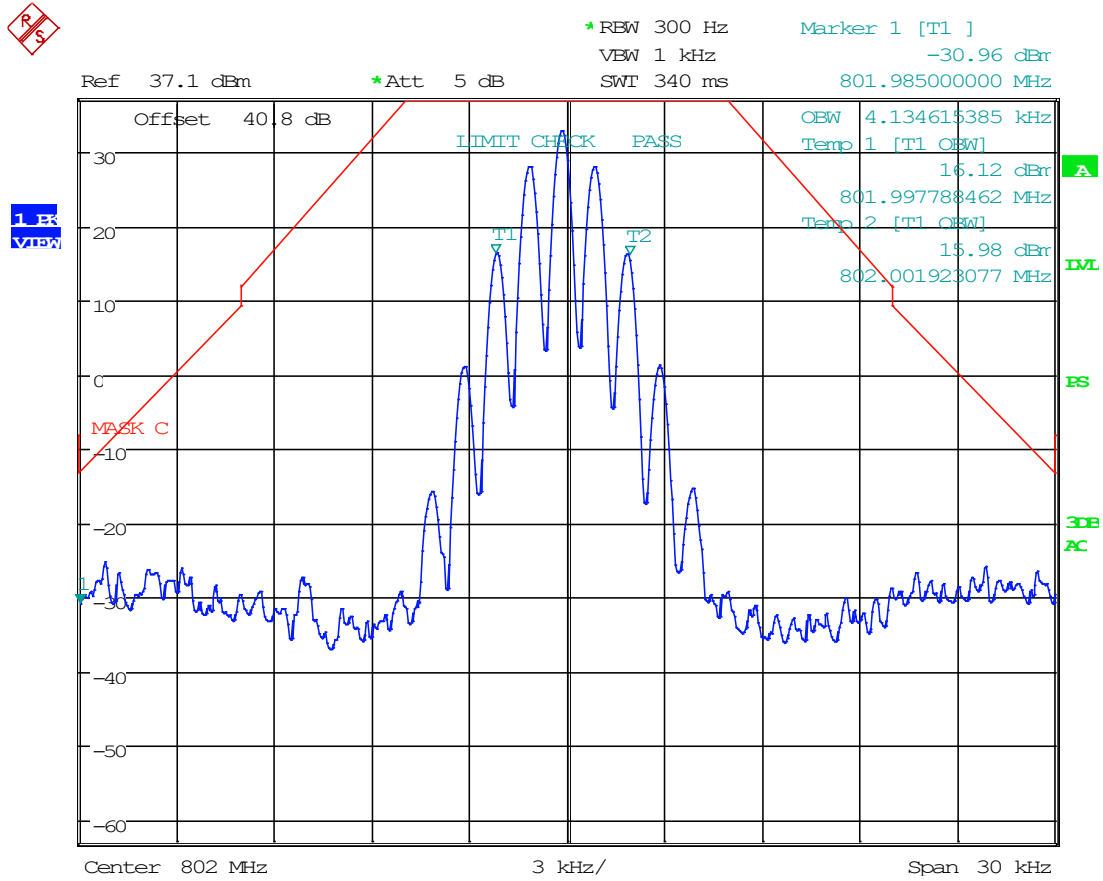

Date: 21.APR.2023 16:33:20




### 8.5.21 12.5 kHz, FM, UL Mask C, AGC, 802 MHz

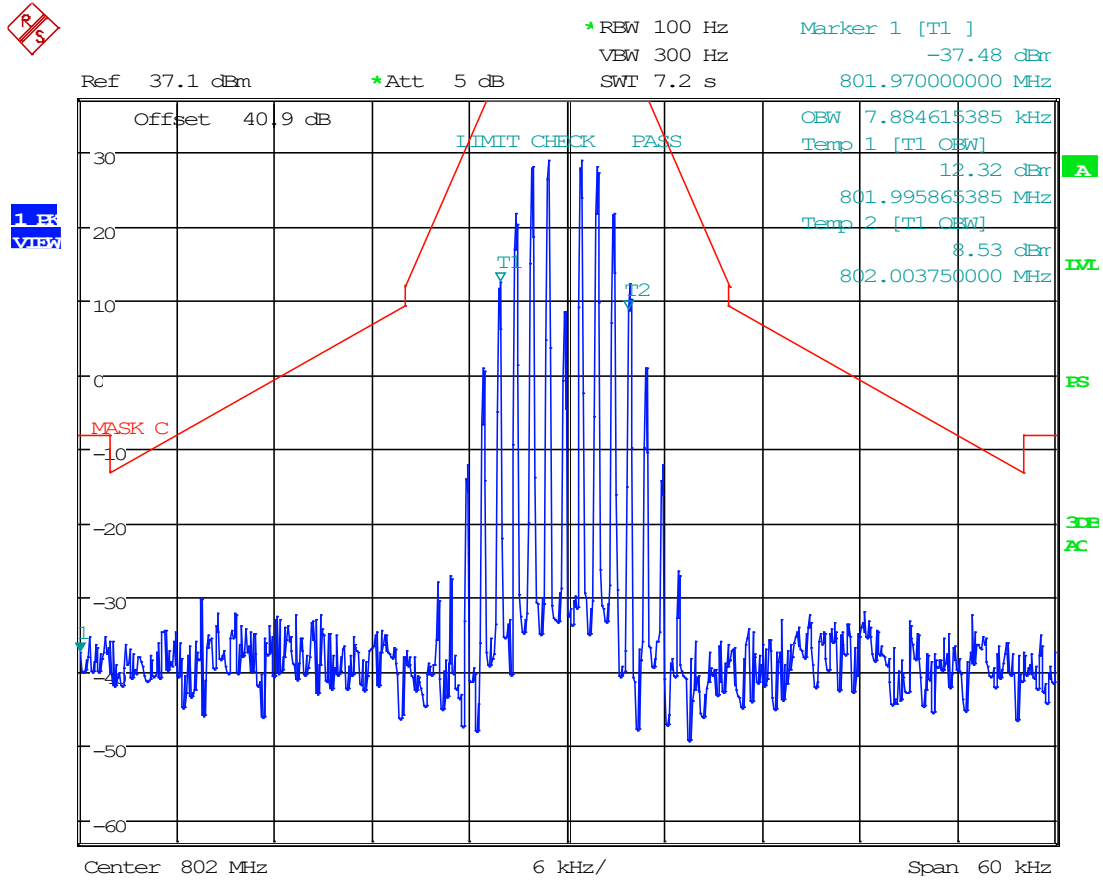

Date: 21.APR.2023 16:01:34




### 8.5.22 12.5 kHz, FM, UL Mask C, AGC+3, 802 MHz

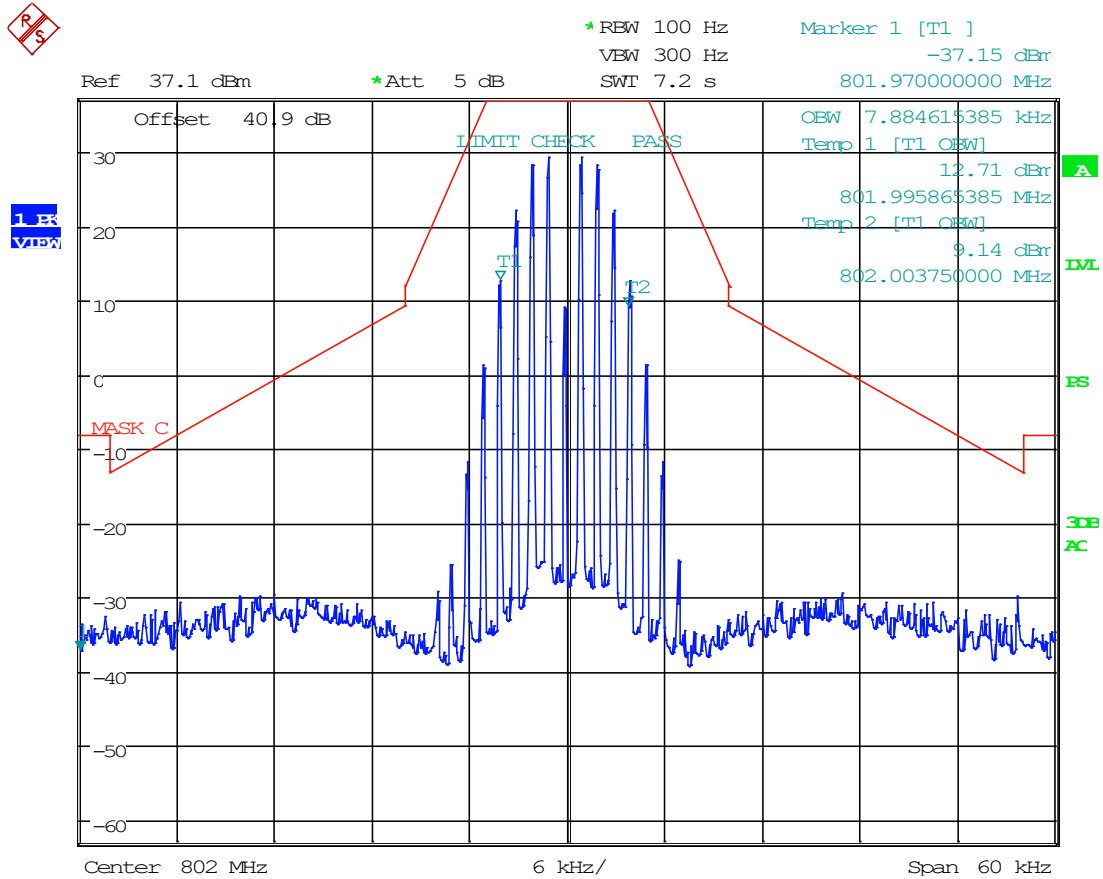

Date: 21.APR.2023 15:59:40

### 8.5.23 25 kHz FM, UL Mask C, AGC, 802 MHz

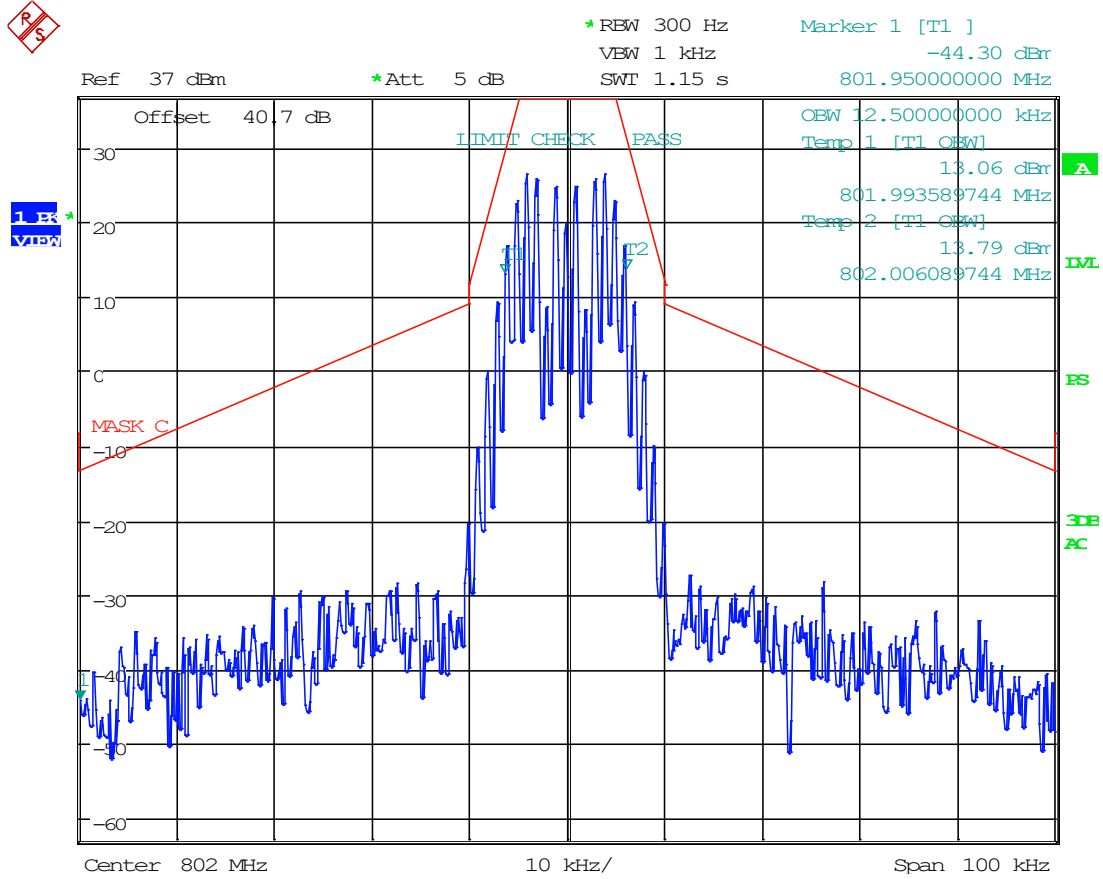


Date: 21.APR.2023 16:29:46






### 8.5.24 25 kHz FM, UL Mask C, AGC+3, 802 MHz

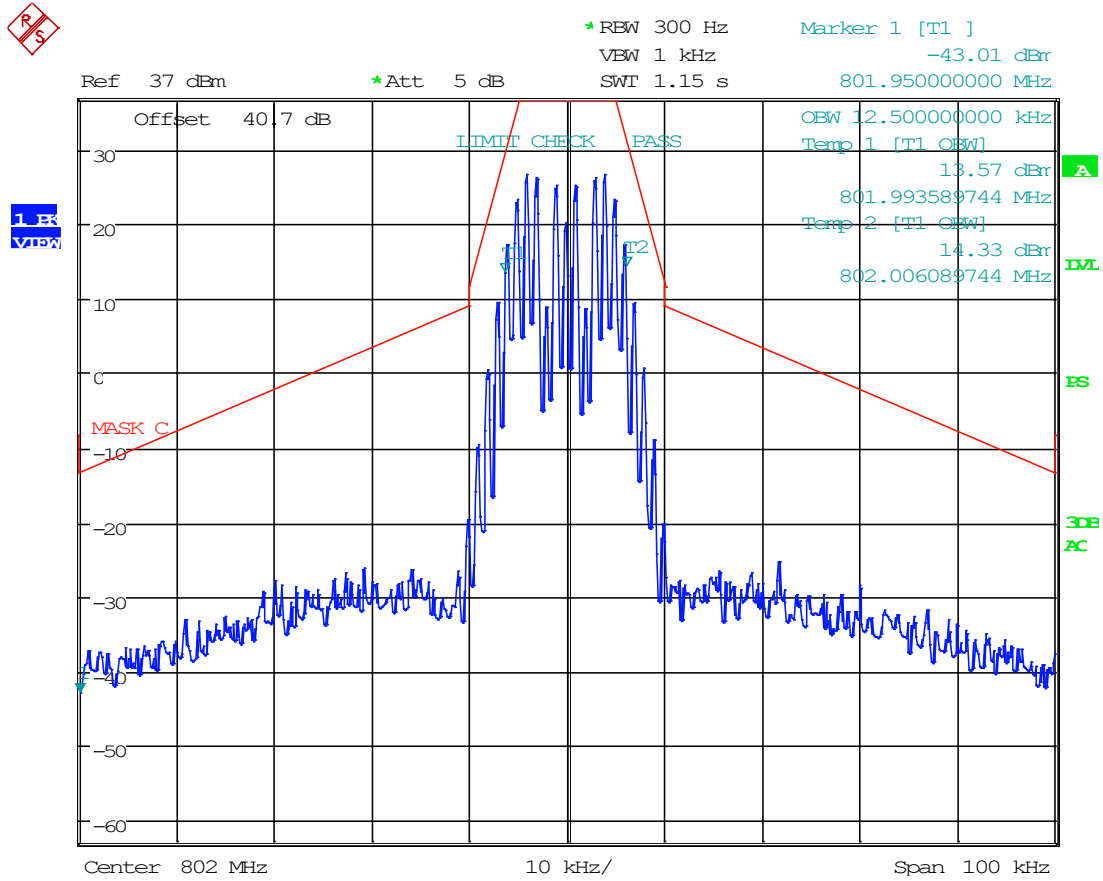

Date: 21.APR.2023 16:30:29




### 8.5.25 C4FM, UL Mask C, AGC, 802 MHz

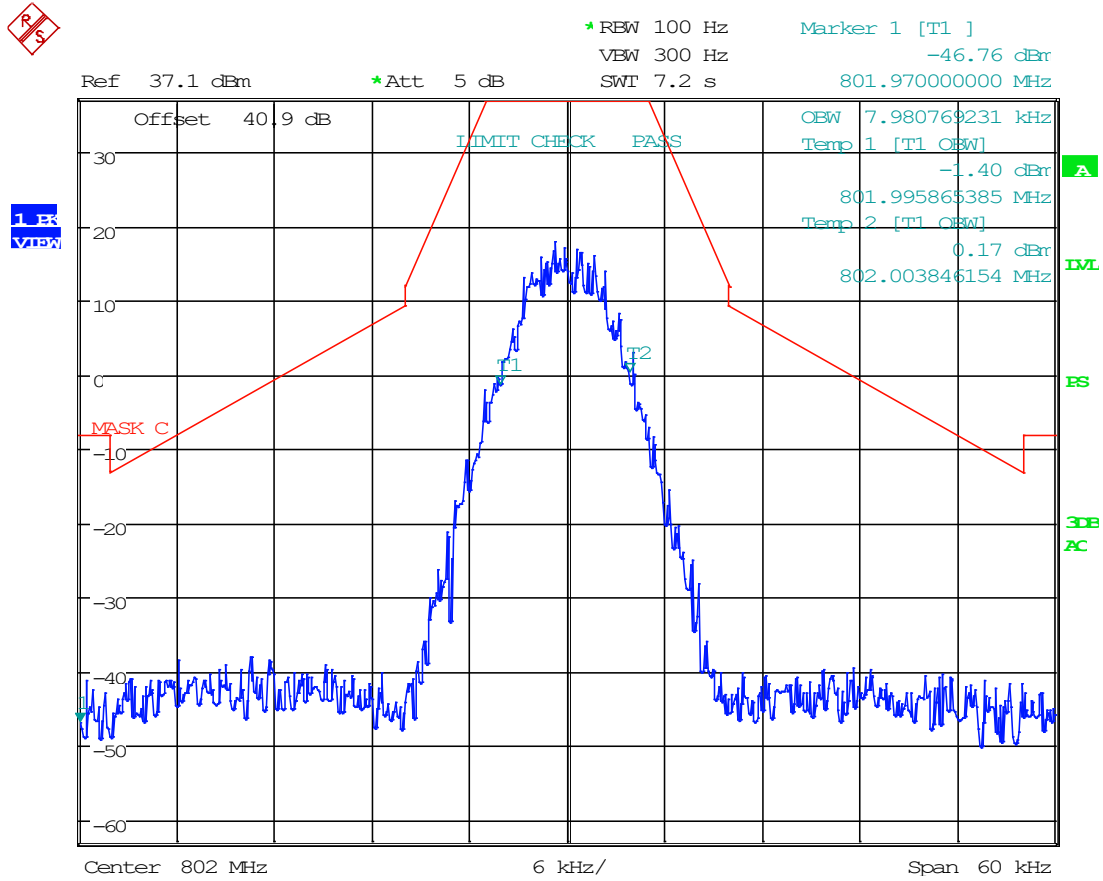

Date: 21.APR.2023 15:54:06




### 8.5.26 C4FM, UL Mask C, AGC+3, 802 MHz

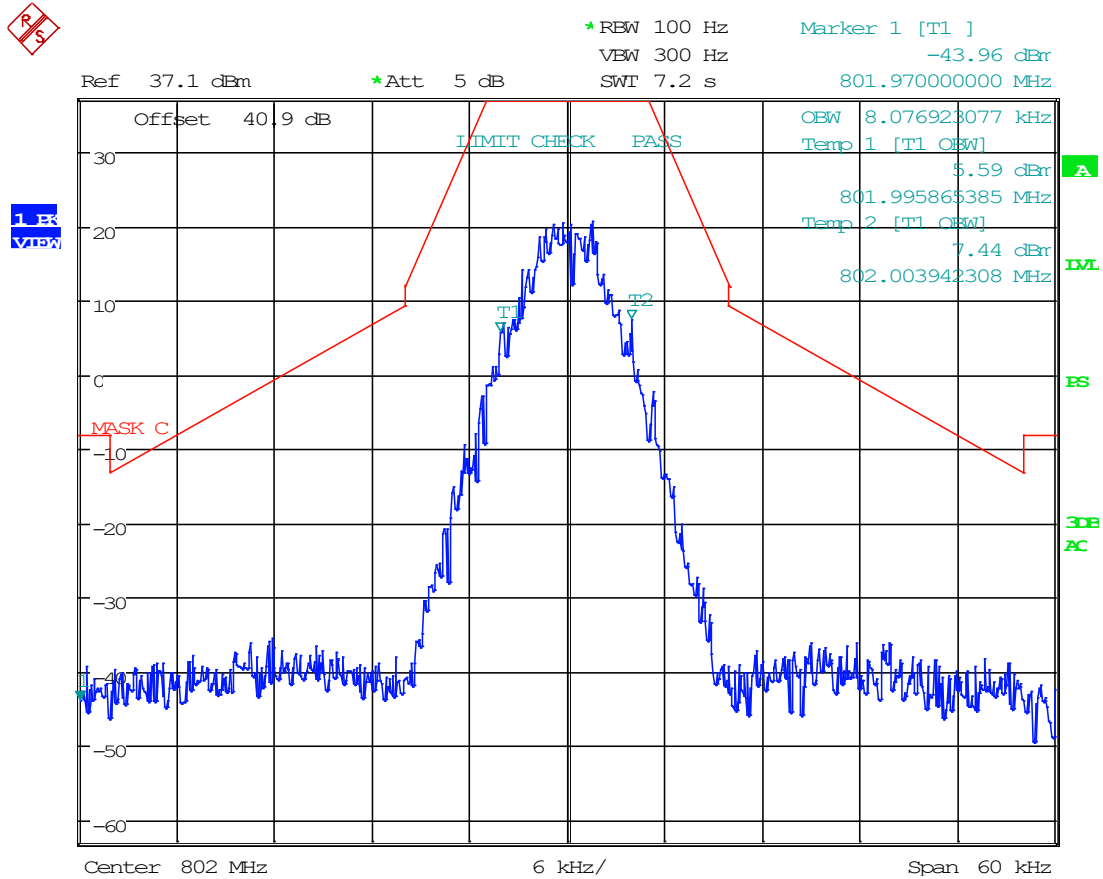

Date: 21.APR.2023 15:53:21




### 8.5.27 H-CPM, UL Mask C, AGC, 802 MHz

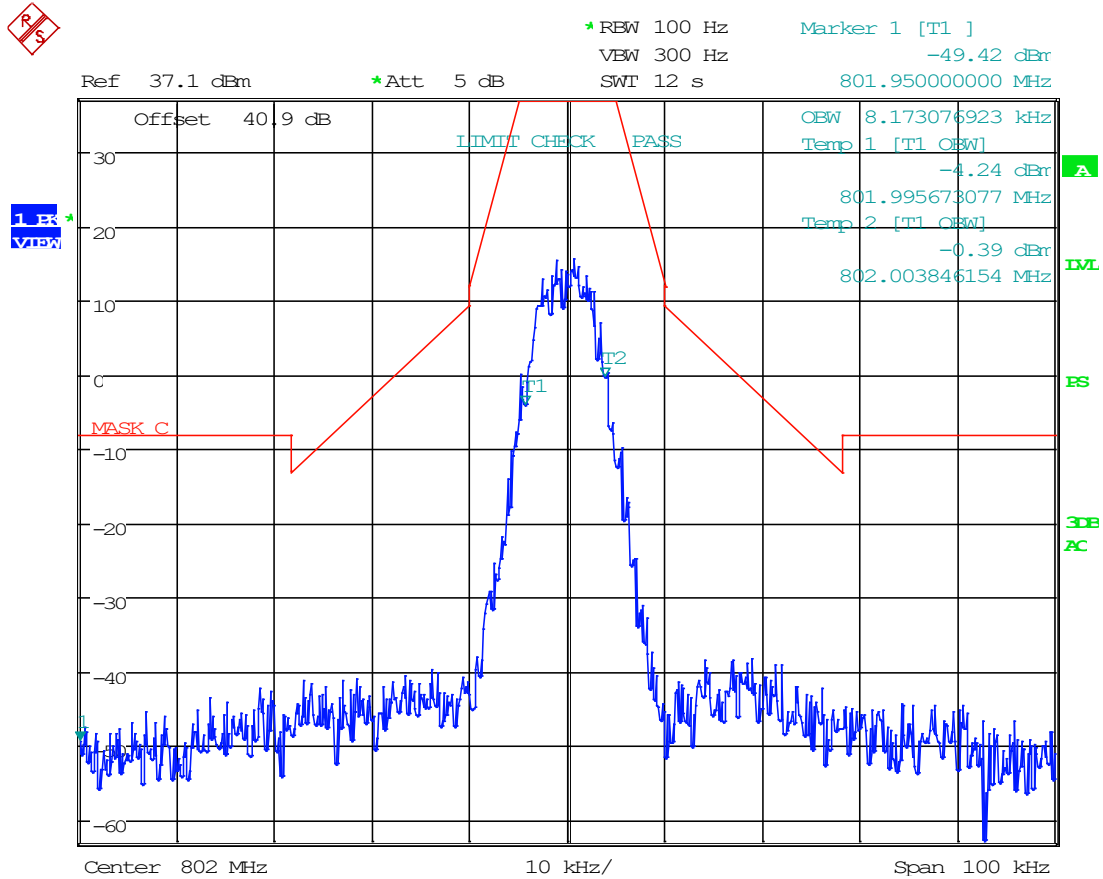

Date: 21.APR.2023 15:50:37




### 8.5.28 H-CPM, UL Mask C, AGC+3, 802 MHz

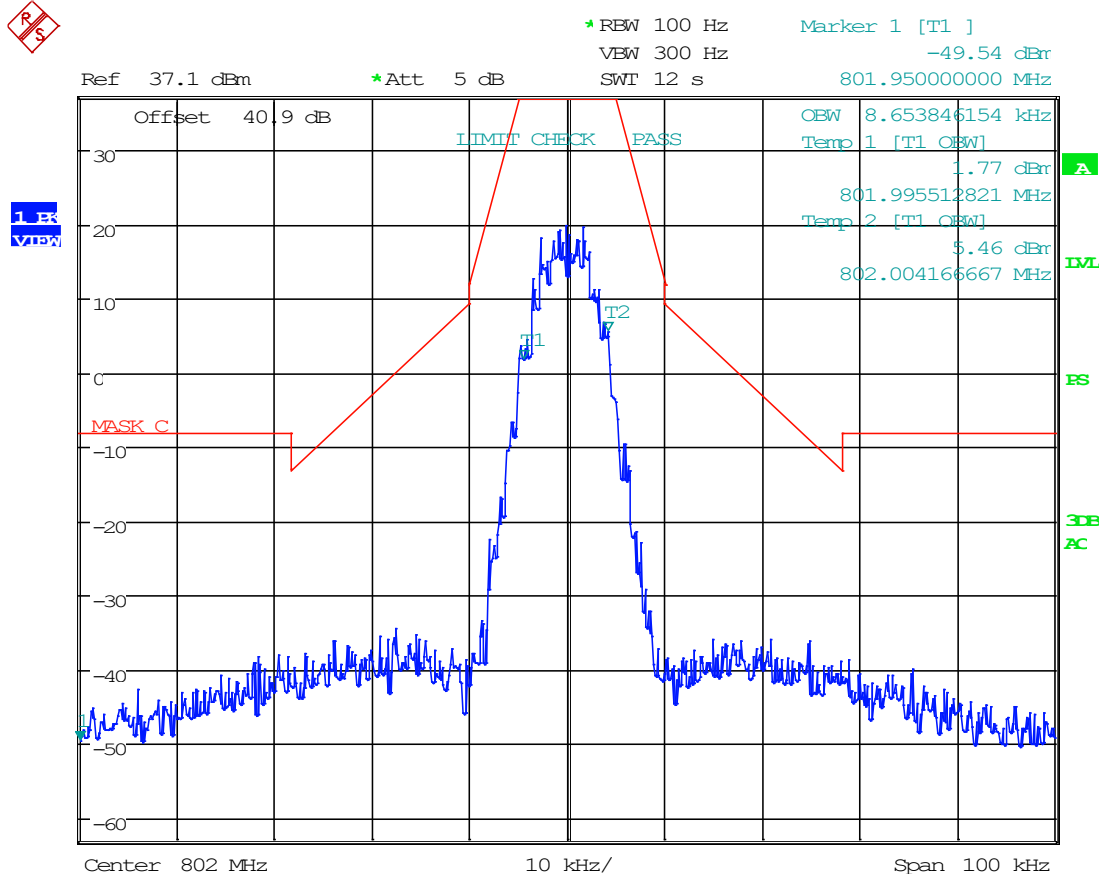

Date: 21.APR.2023 15:51:59




### 8.5.29 H-DQPSK, UL Mask C, AGC, 802 MHz

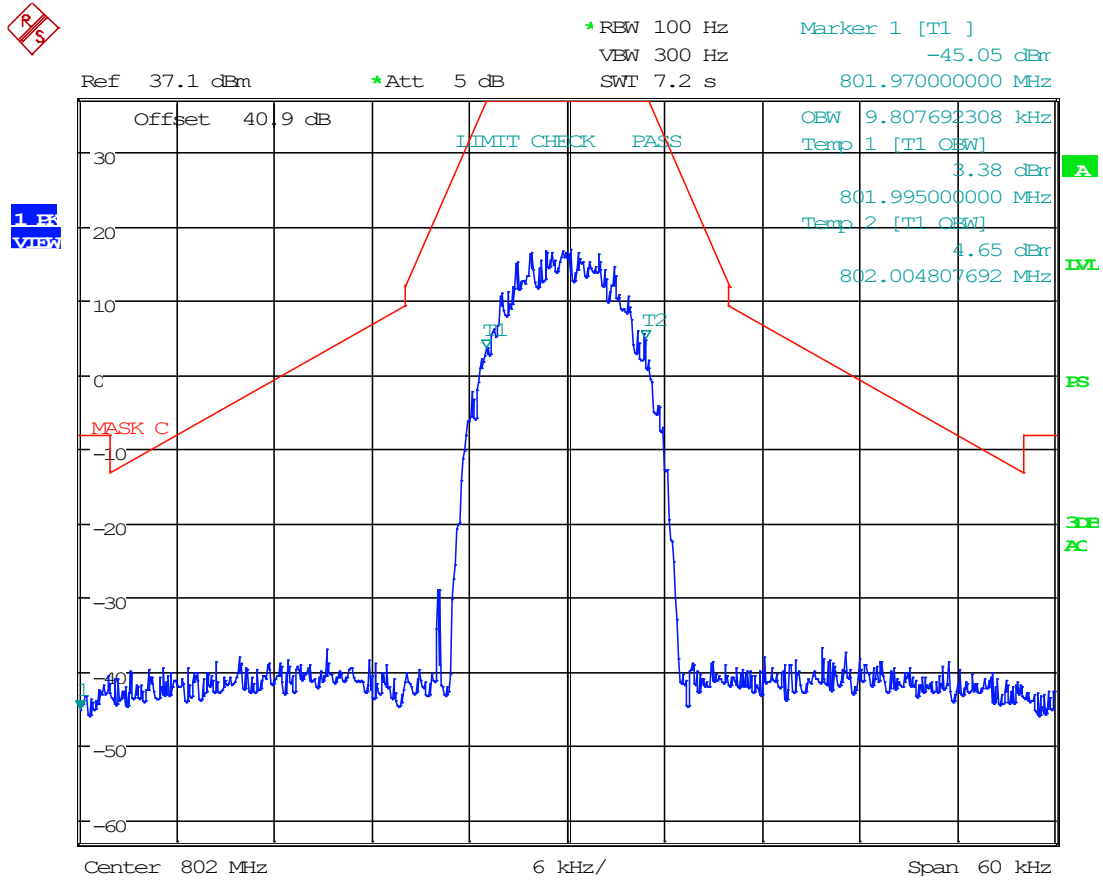

Date: 21.APR.2023 15:56:36


### 8.5.30 H-DQPSK, UL Mask C, AGC+3, 802 MHz

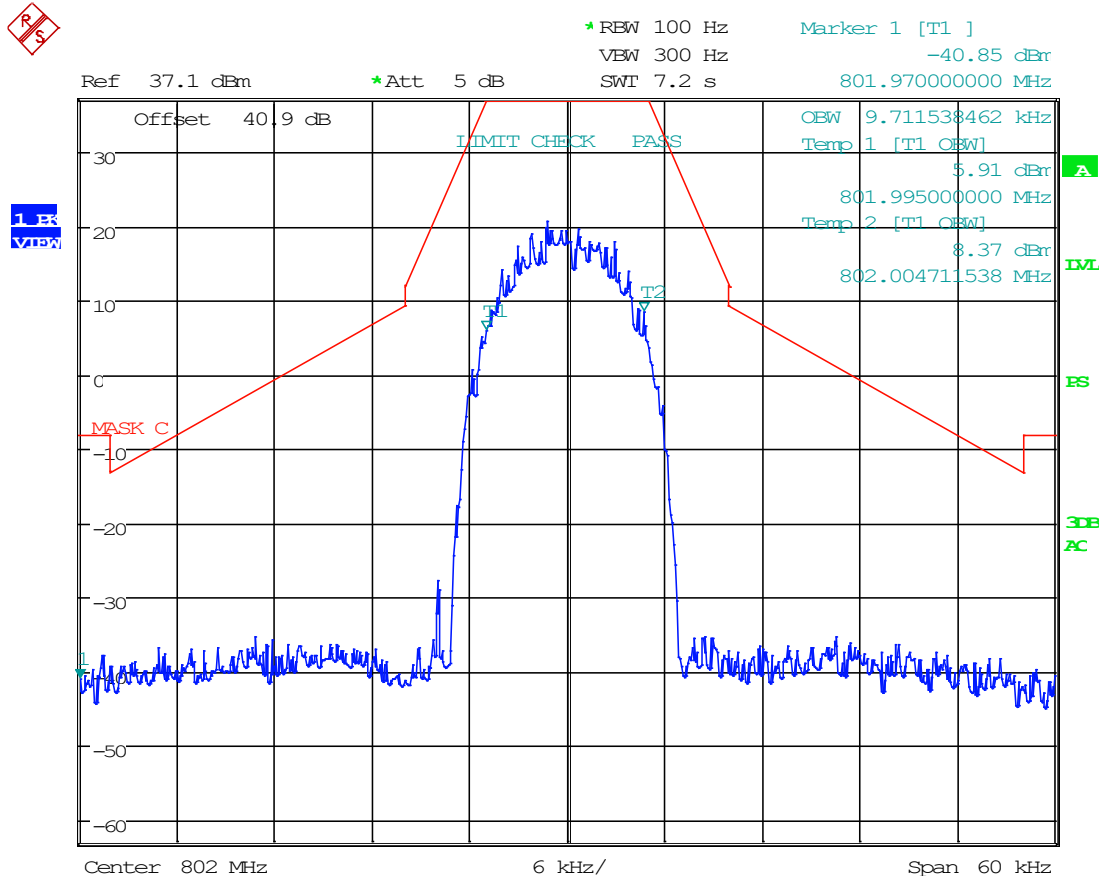

Date: 21.APR.2023 15:57:54




### 8.5.31 6.25 kHz, FM, UL Mask C, AGC, 815 MHz

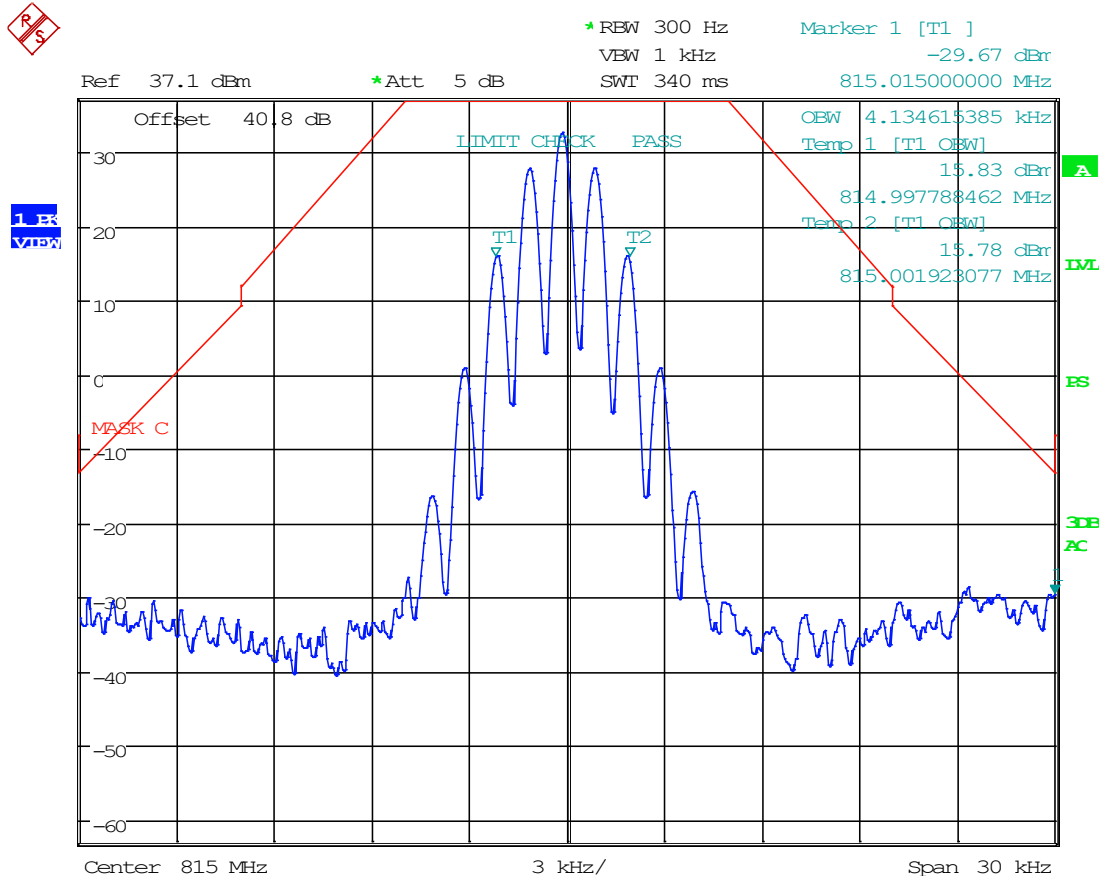

Date: 21.APR.2023 16:37:33




8.5.32 6.25 kHz, FM, UL Mask C, AGC+3, 815 MHz

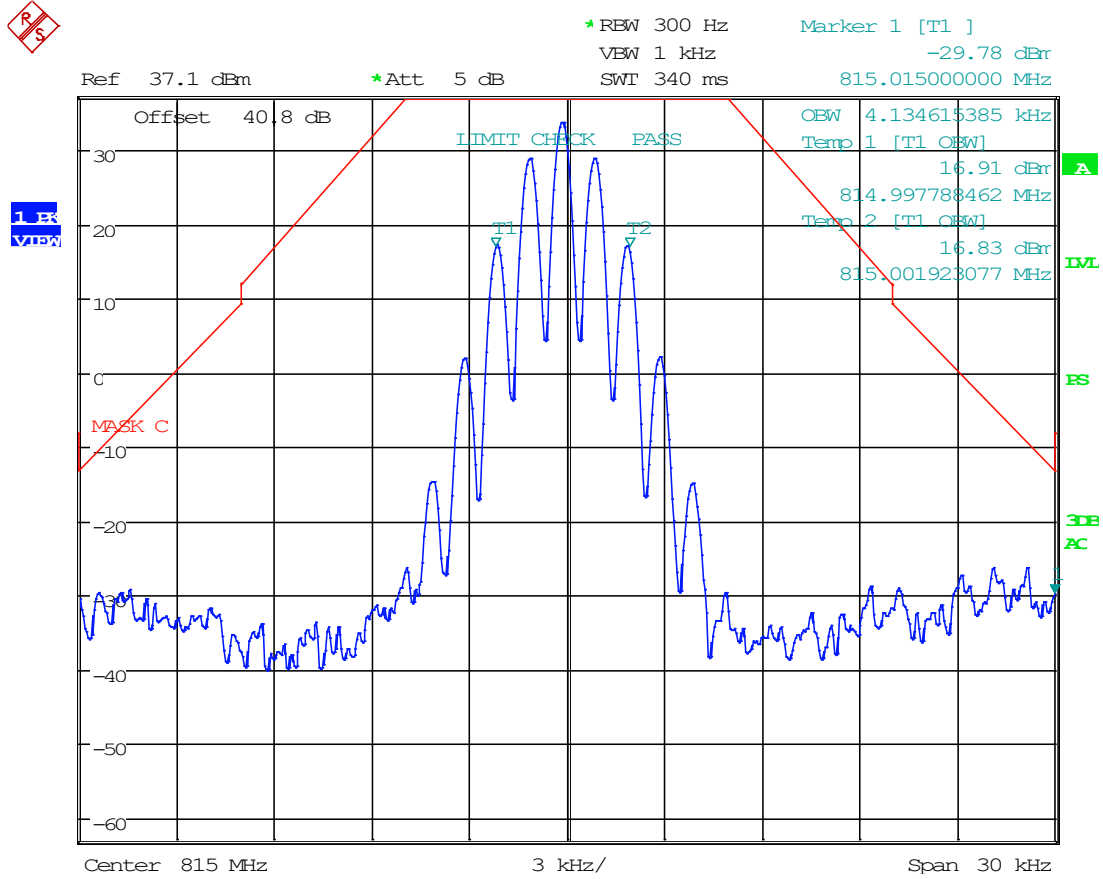

Date: 21.APR.2023 16:37:58




### 8.5.33 12.5 kHz, FM, UL Mask D, AGC, 815 MHz

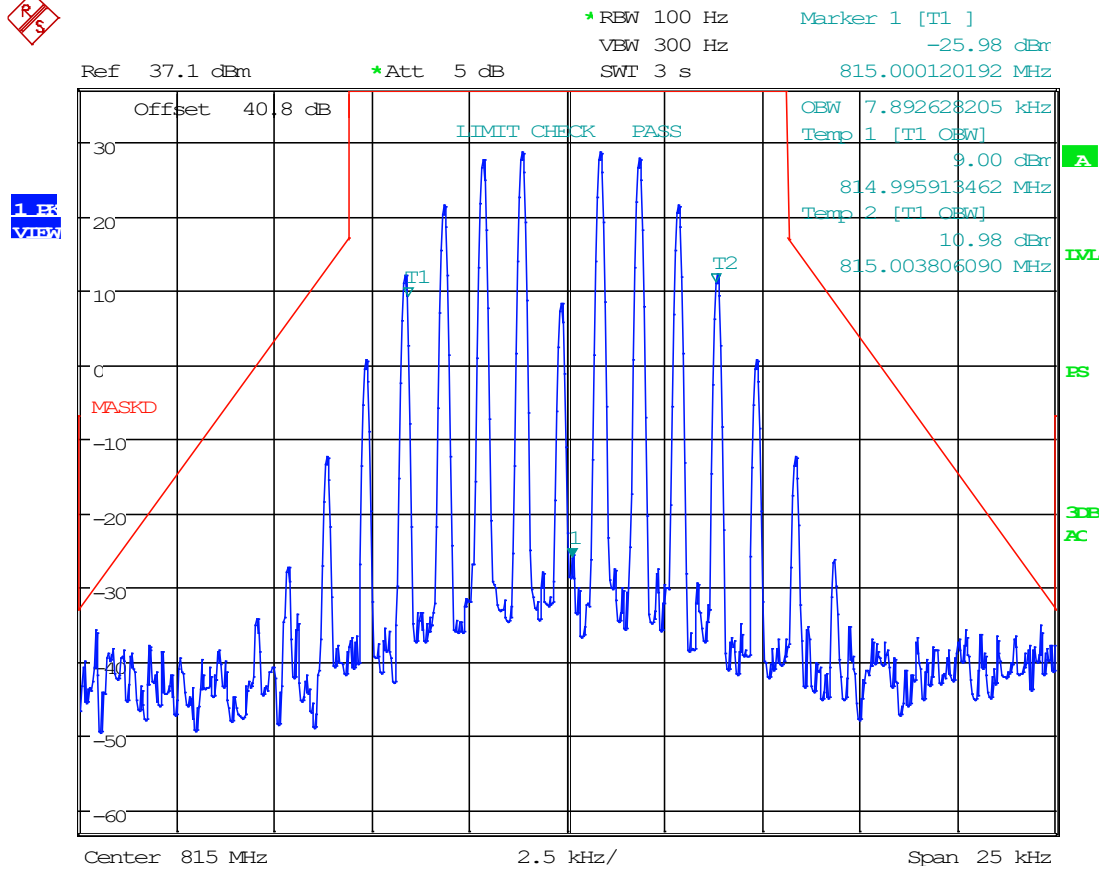

Date: 21.APR.2023 16:53:09




### 8.5.34 12.5 kHz, FM, UL Mask D, AGC+3, 815 MHz

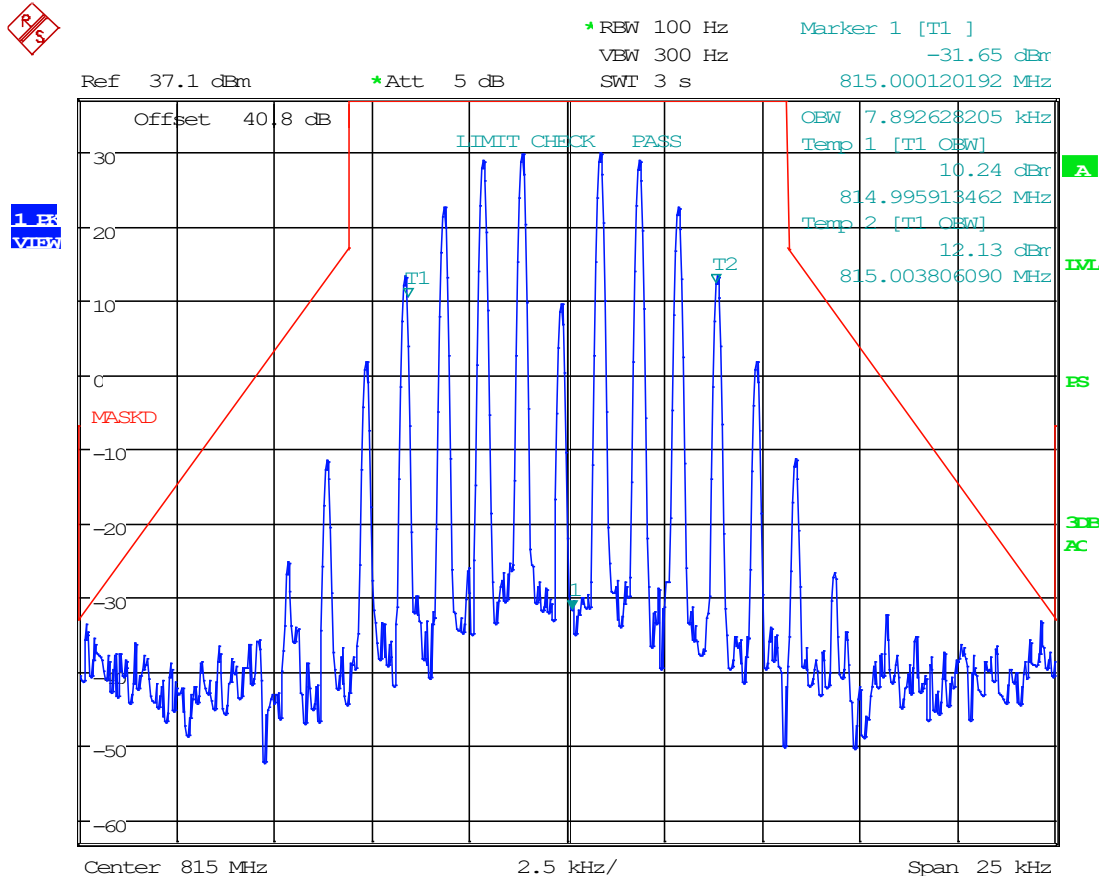

Date: 21.APR.2023 16:53:38




### 8.5.35 25 kHz FM, UL Mask G, AGC, 815 MHz

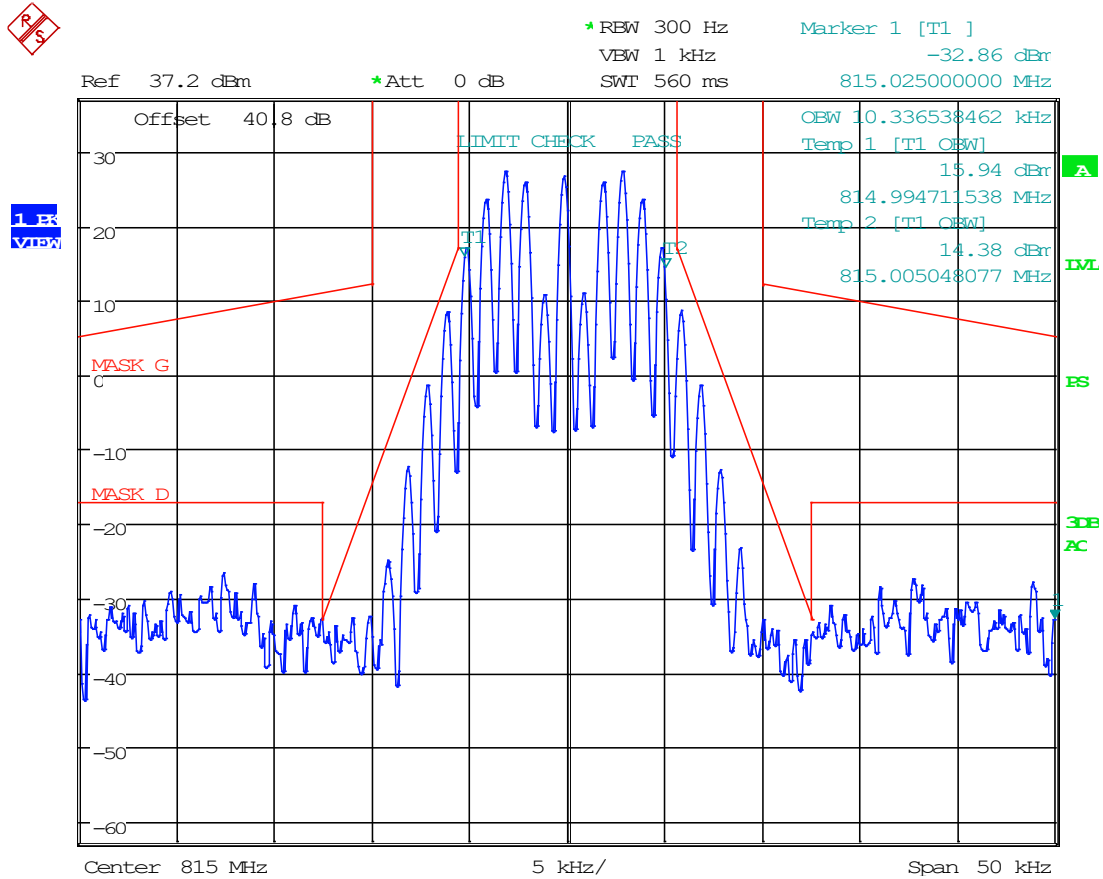

Date: 21.APR.2023 16:40:37




### 8.5.36 25 kHz FM, UL Mask G, AGC+3, 815 MHz

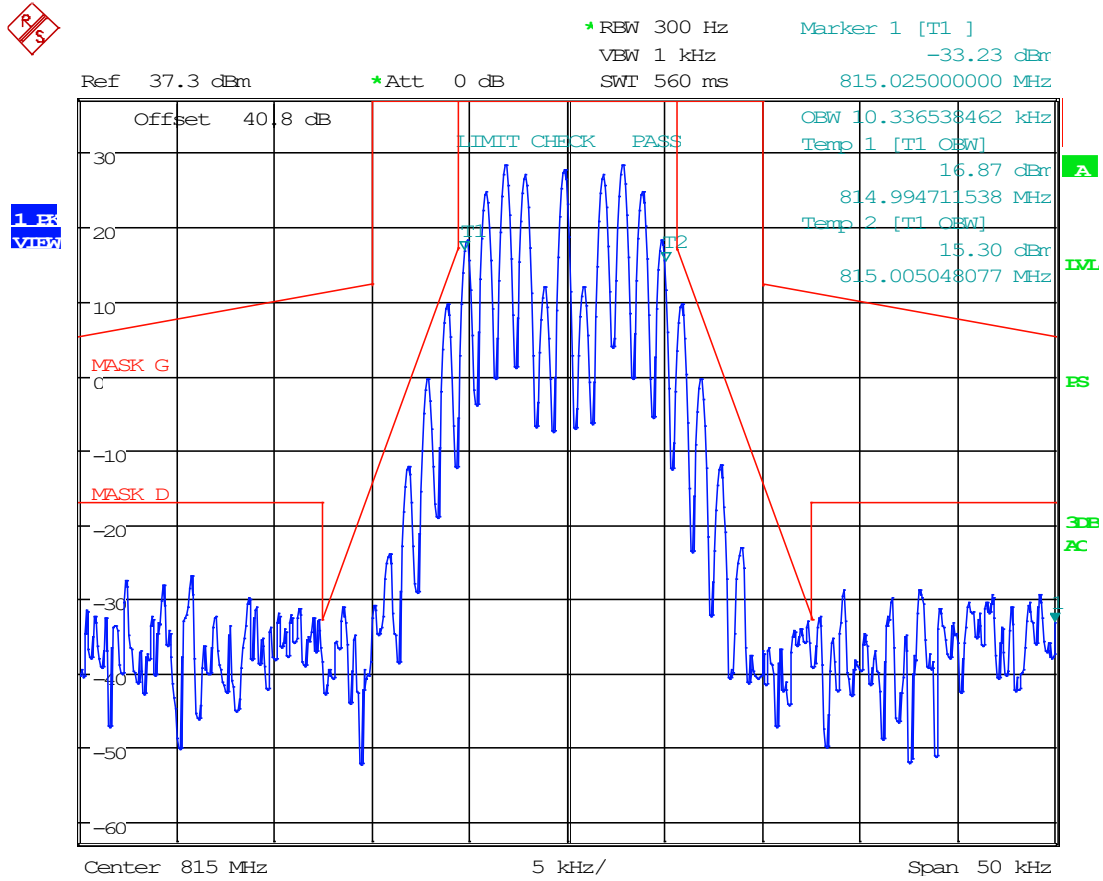

Date: 21.APR.2023 16:42:08




### 8.5.37 C4FM, UL Mask D, AGC, 815 MHz

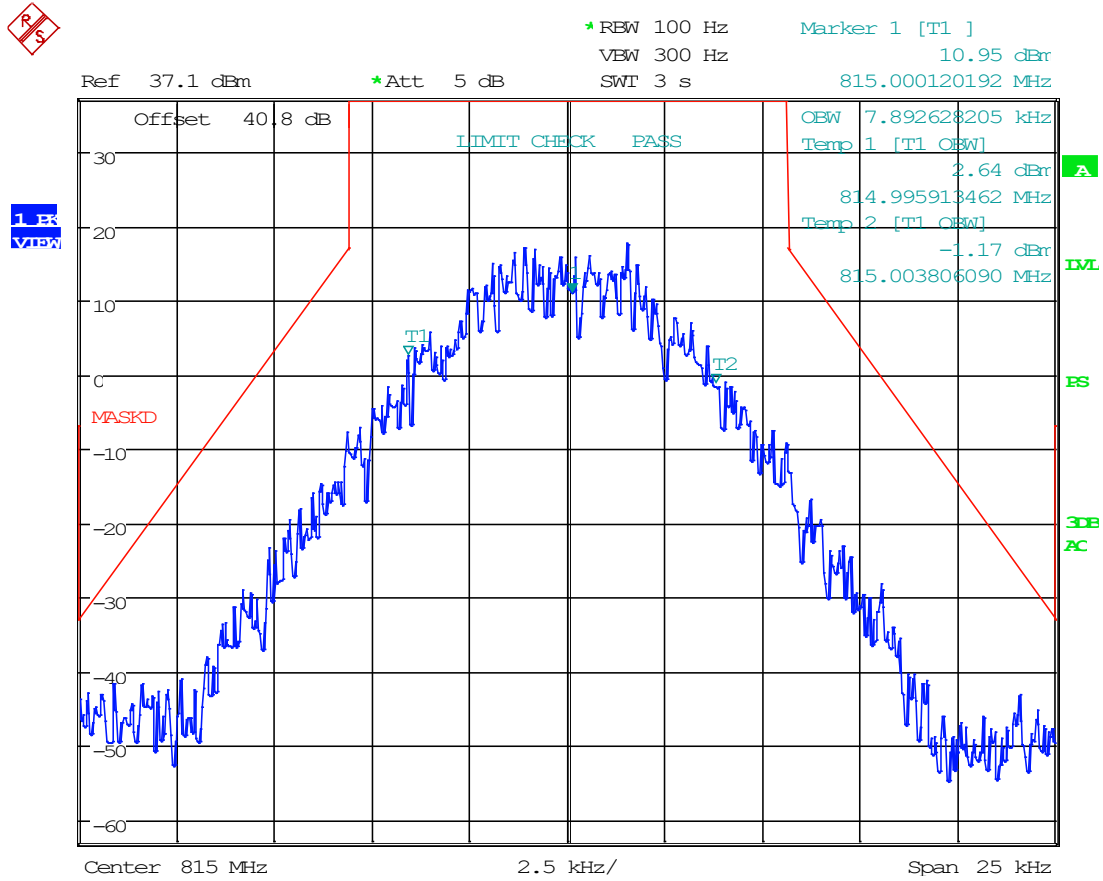

Date: 21.APR.2023 16:52:39


### 8.5.38 C4FM, UL Mask D, AGC+3, 815 MHz

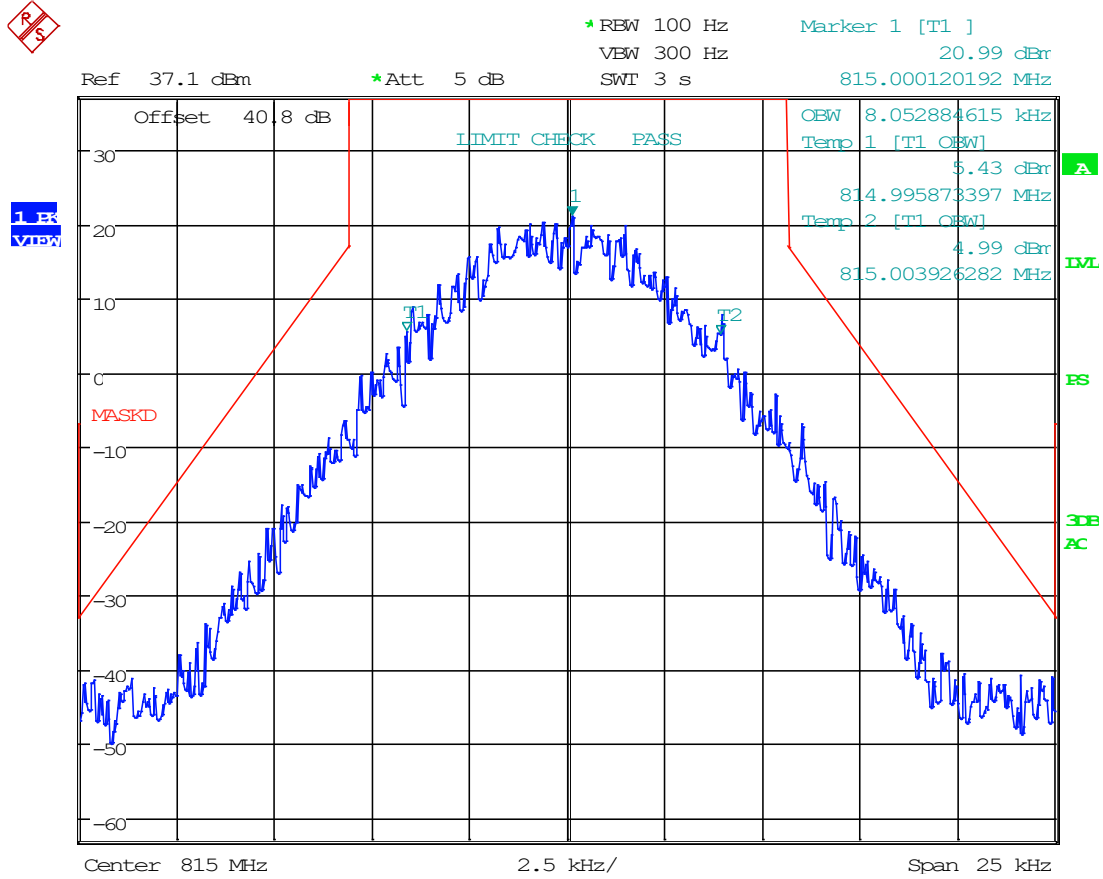

Date: 21.APR.2023 16:52:12



### 8.5.39 H-CPM, UL Mask D, AGC, 815 MHz

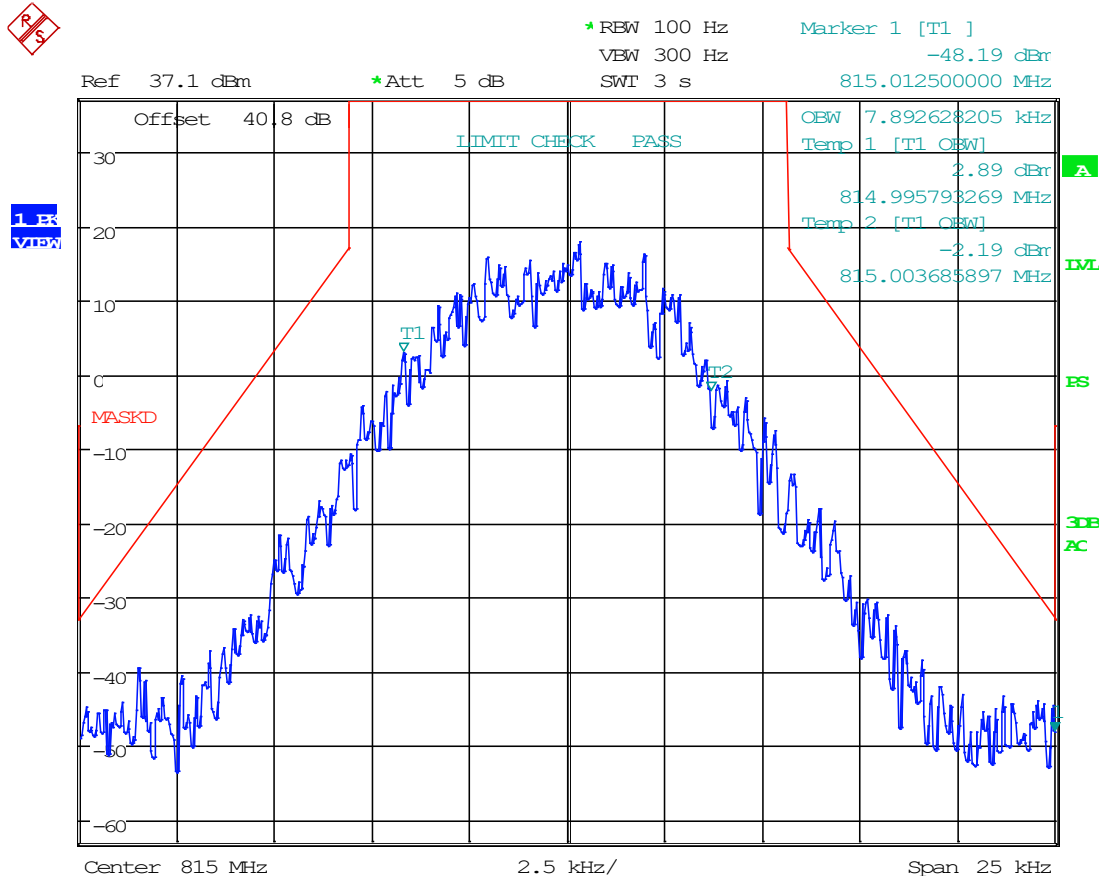


Date: 21.APR.2023 16:51:13






### 8.5.40 H-CPM, UL Mask D, AGC+3, 815 MHz

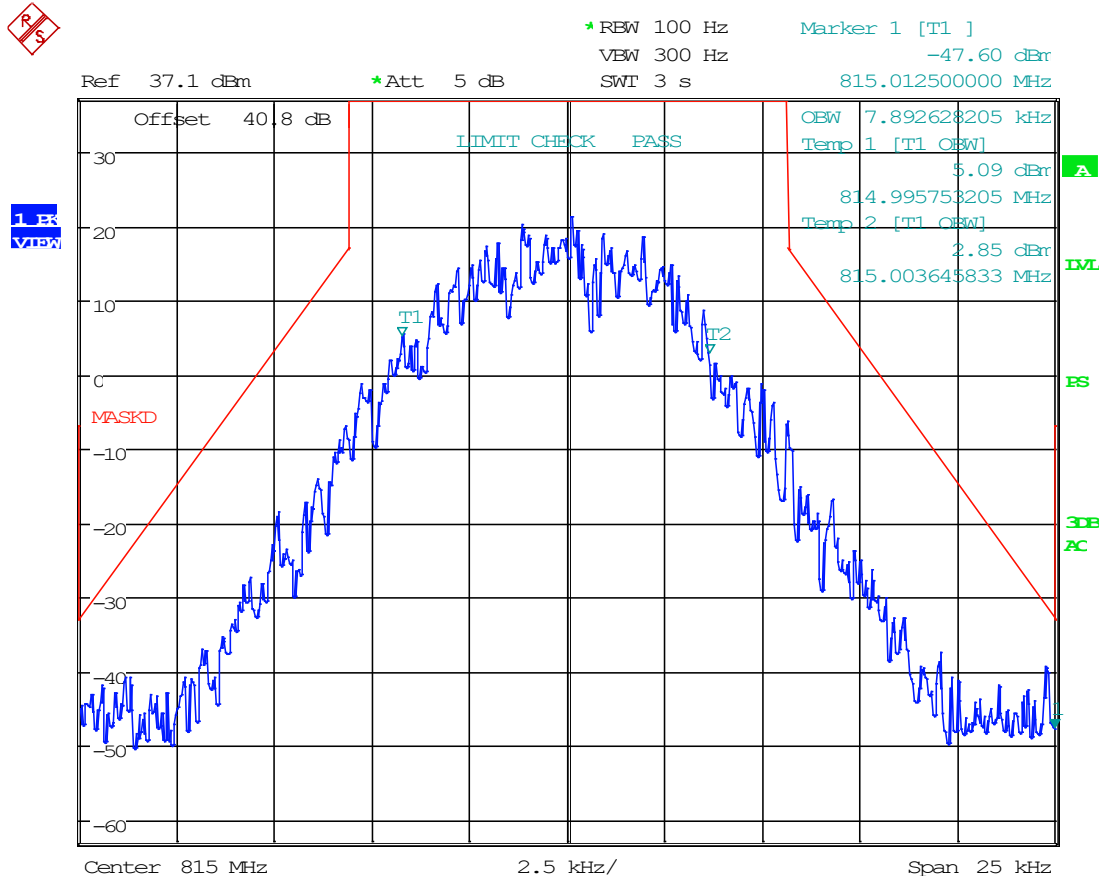

Date: 21.APR.2023 16:51:37




### 8.5.41 H-DQPSK, UL Mask D, AGC, 815 MHz

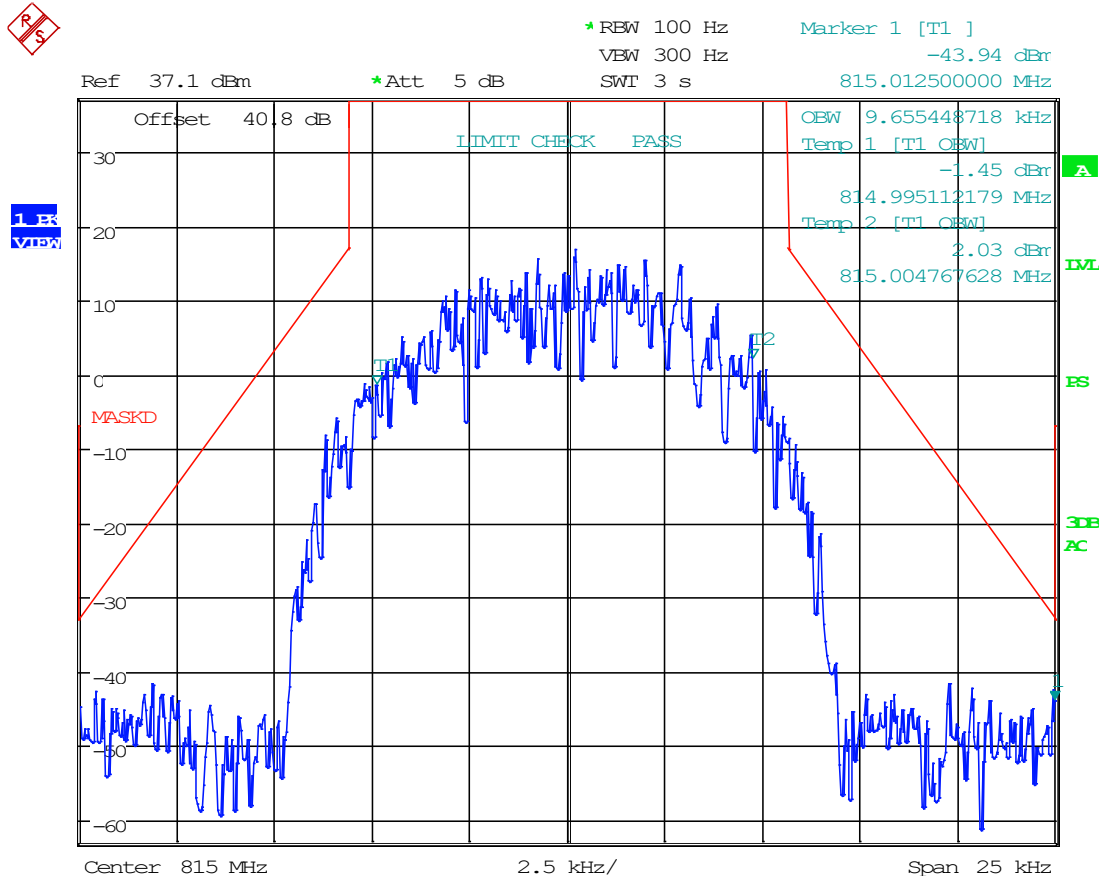

Date: 21.APR.2023 16:50:40




### 8.5.42 H-DQPSK, UL Mask D, AGC+3, 815 MHz

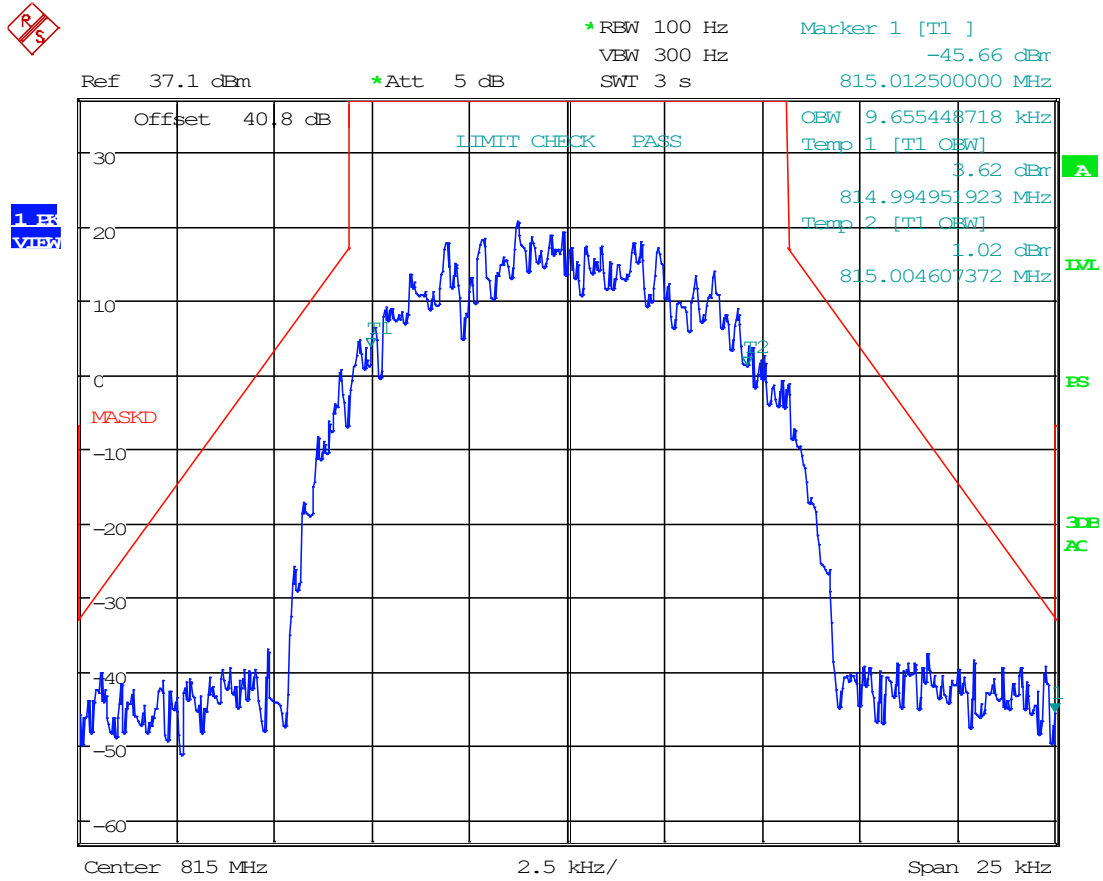

Date: 21.APR.2023 16:50:15




### 8.5.43 6.25 kHz, FM, DL Mask C, AGC, 860 MHz

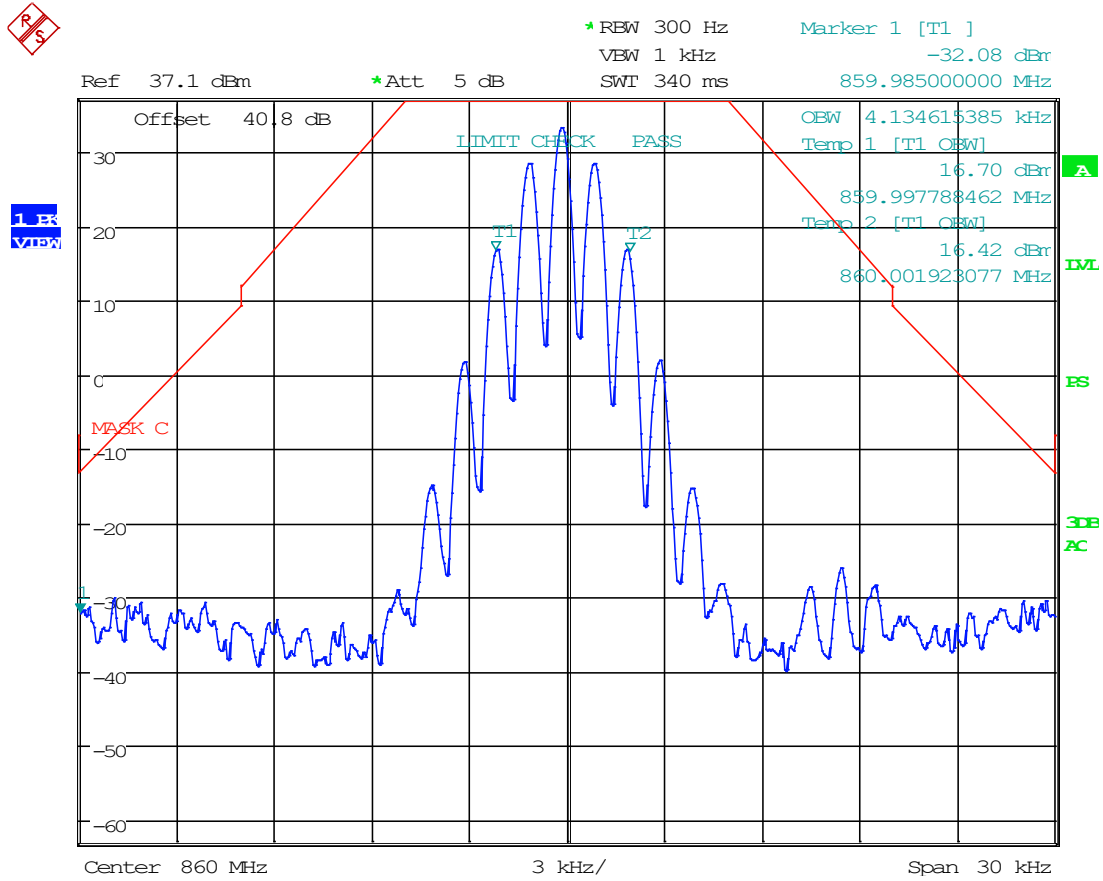

Date: 21.APR.2023 16:36:38




### 8.5.44 6.25 kHz, FM, DL Mask C, AGC +3, 860 MHz

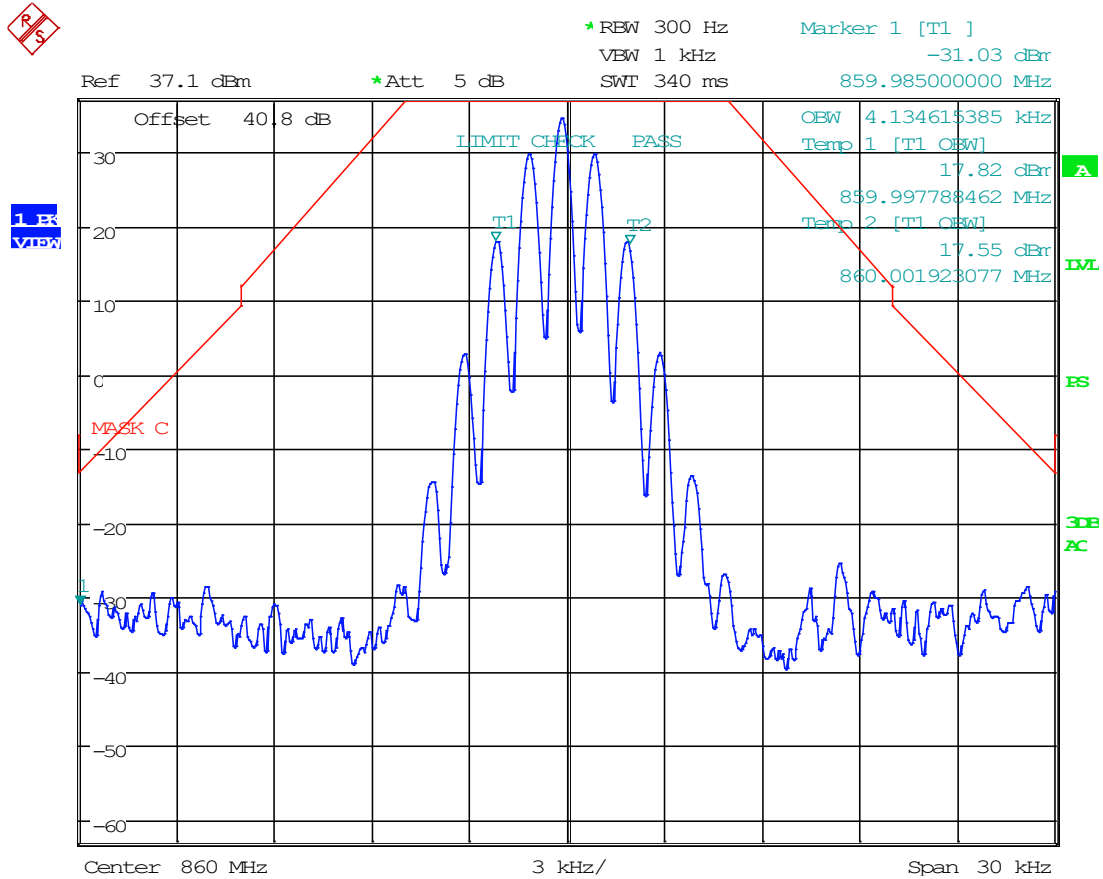

Date: 21.APR.2023 16:36:08




### 8.5.45 12.5 kHz, FM, DL Mask D, AGC, 860 MHz

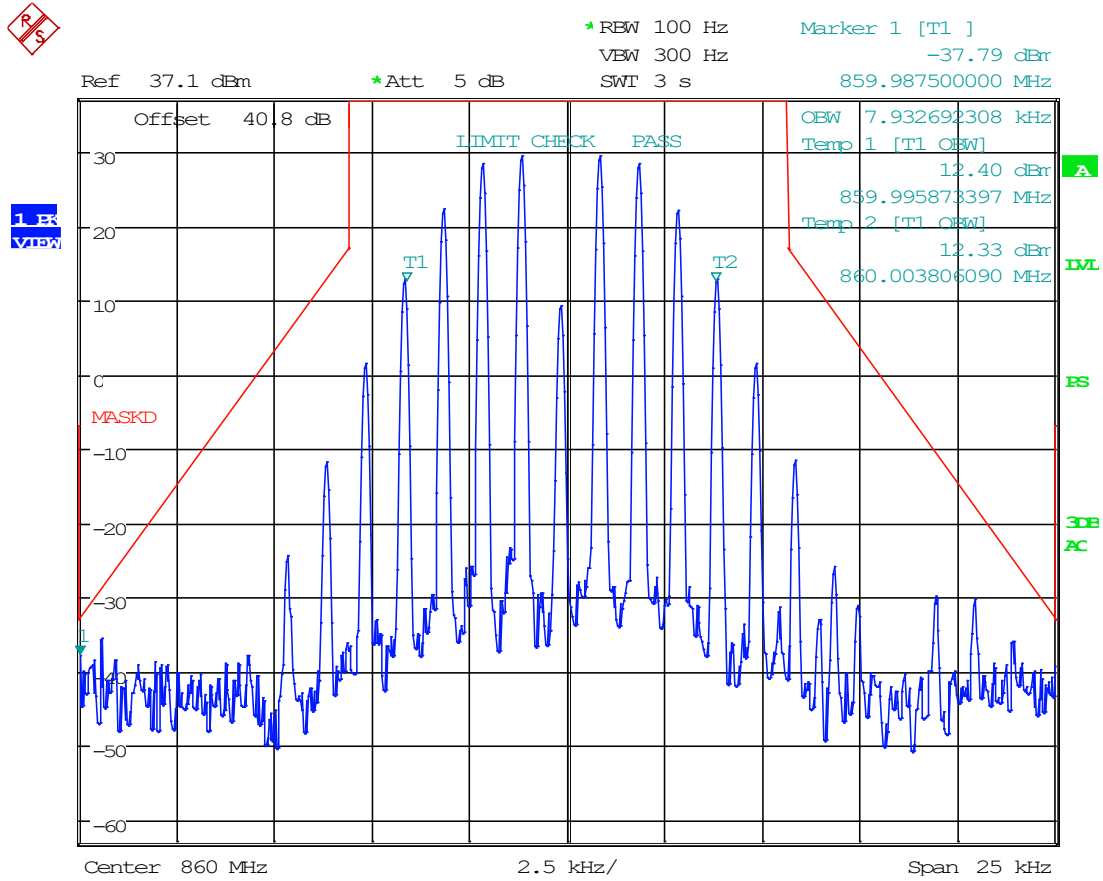

Date: 21.APR.2023 16:45:15




### 8.5.46 12.5 kHz, FM, DL Mask D, AGC+3, 860 MHz

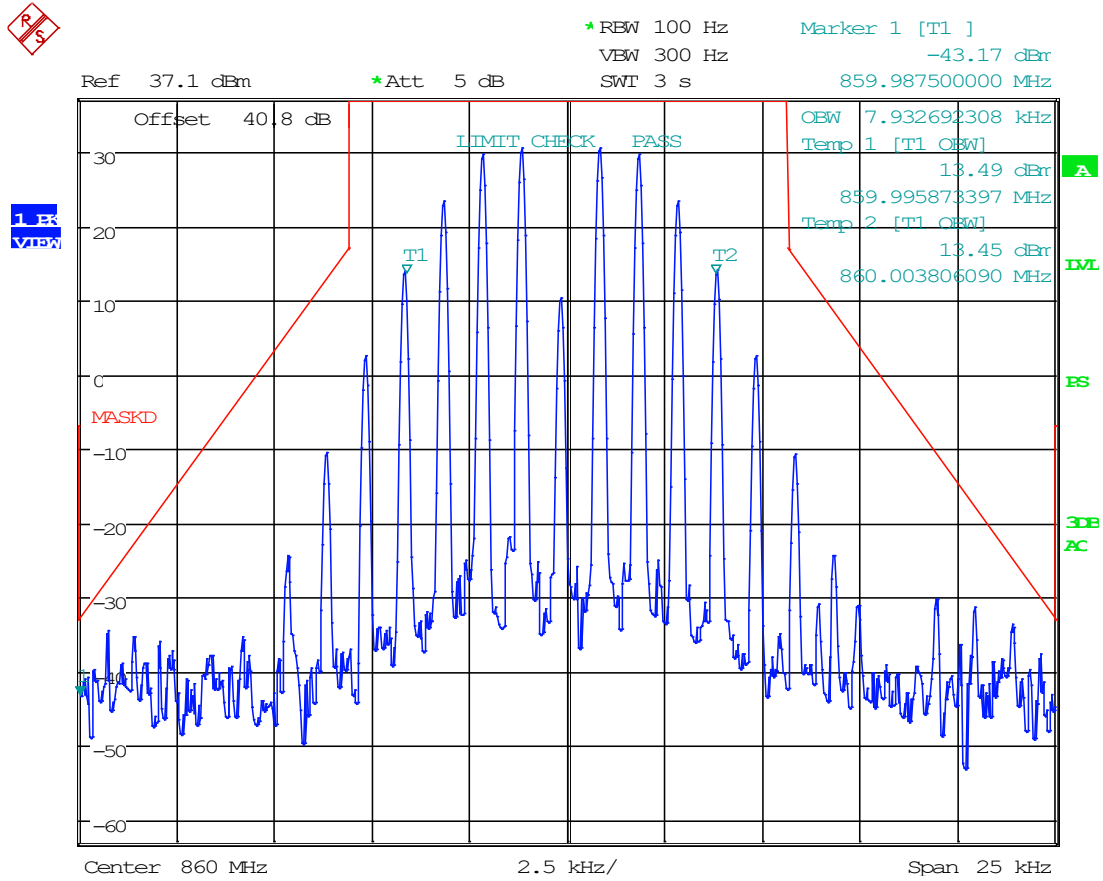

Date: 21.APR.2023 16:45:43



### 8.5.47 25 kHz FM, DL Mask G, AGC, 860 MHz

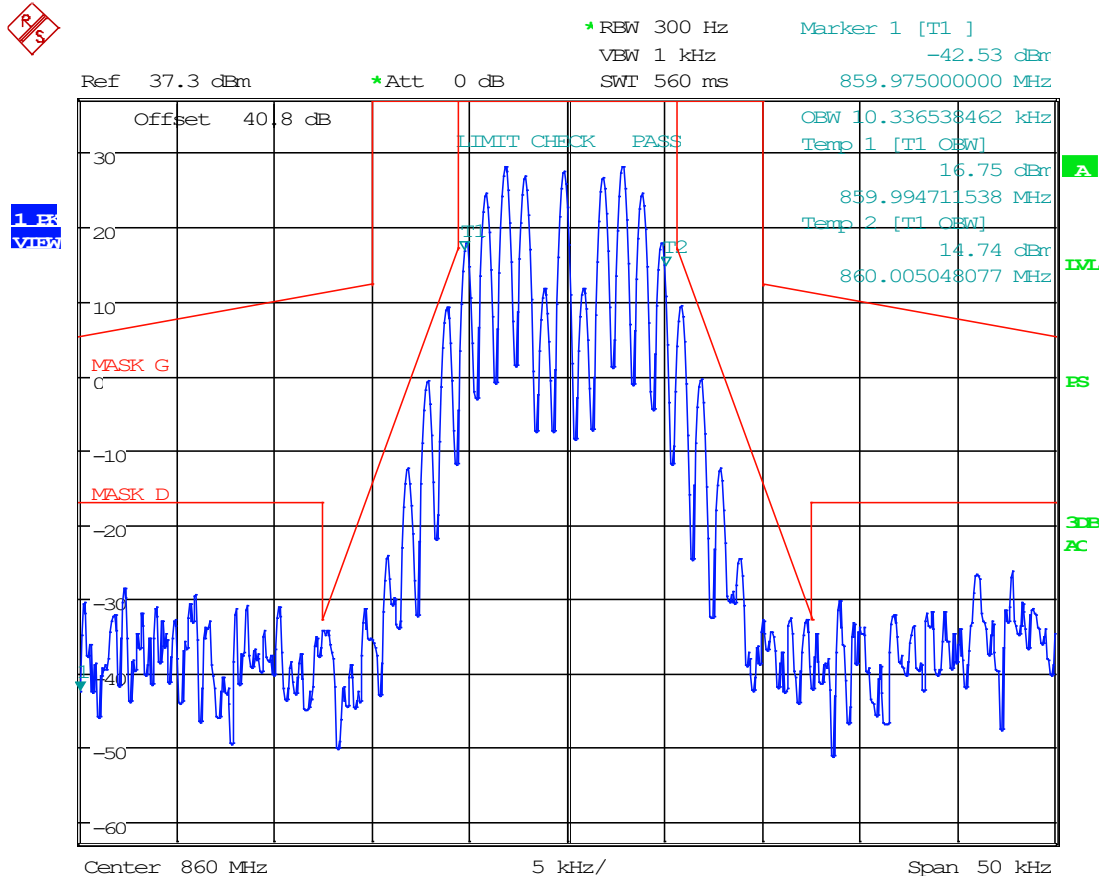


Date: 21.APR.2023 16:43:31






### 8.5.48 25 kHz FM, DL Mask G, AGC+3, 860 MHz

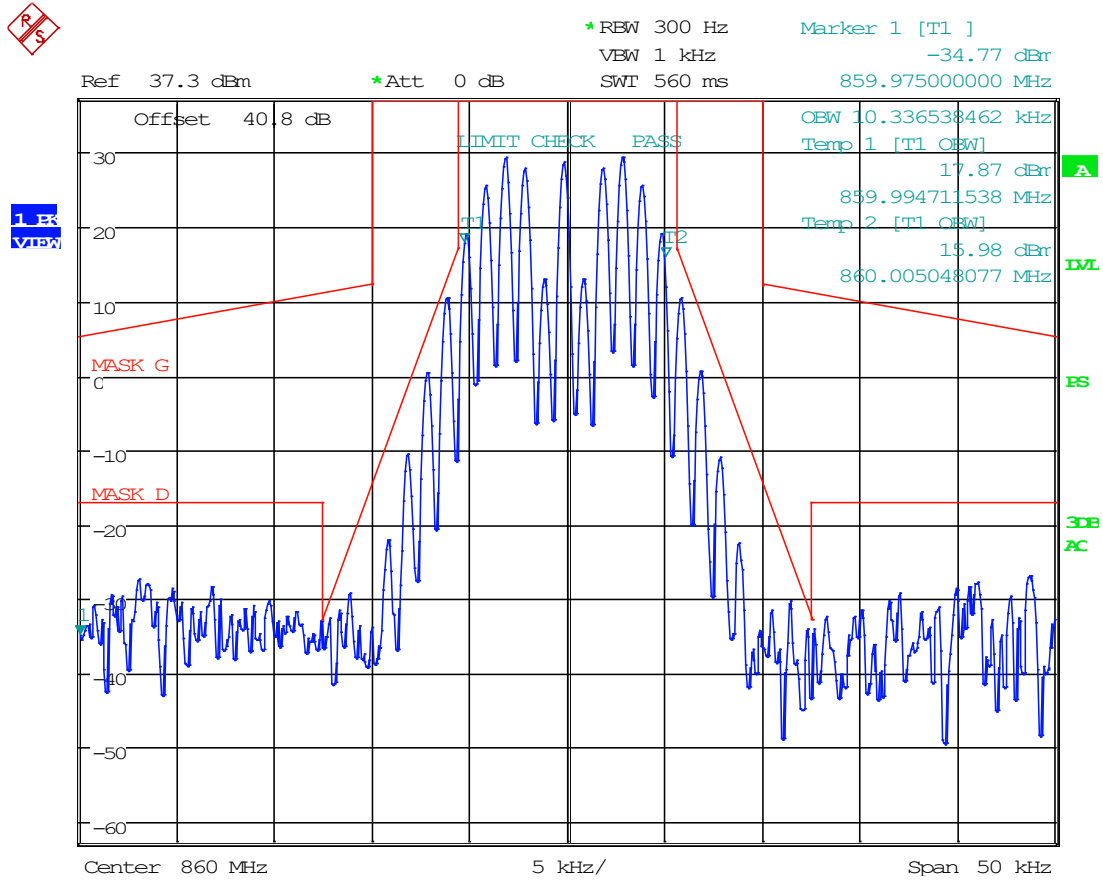

Date: 21.APR.2023 16:43:06




### 8.5.49 C4FM, DL Mask D, AGC, 860 MHz

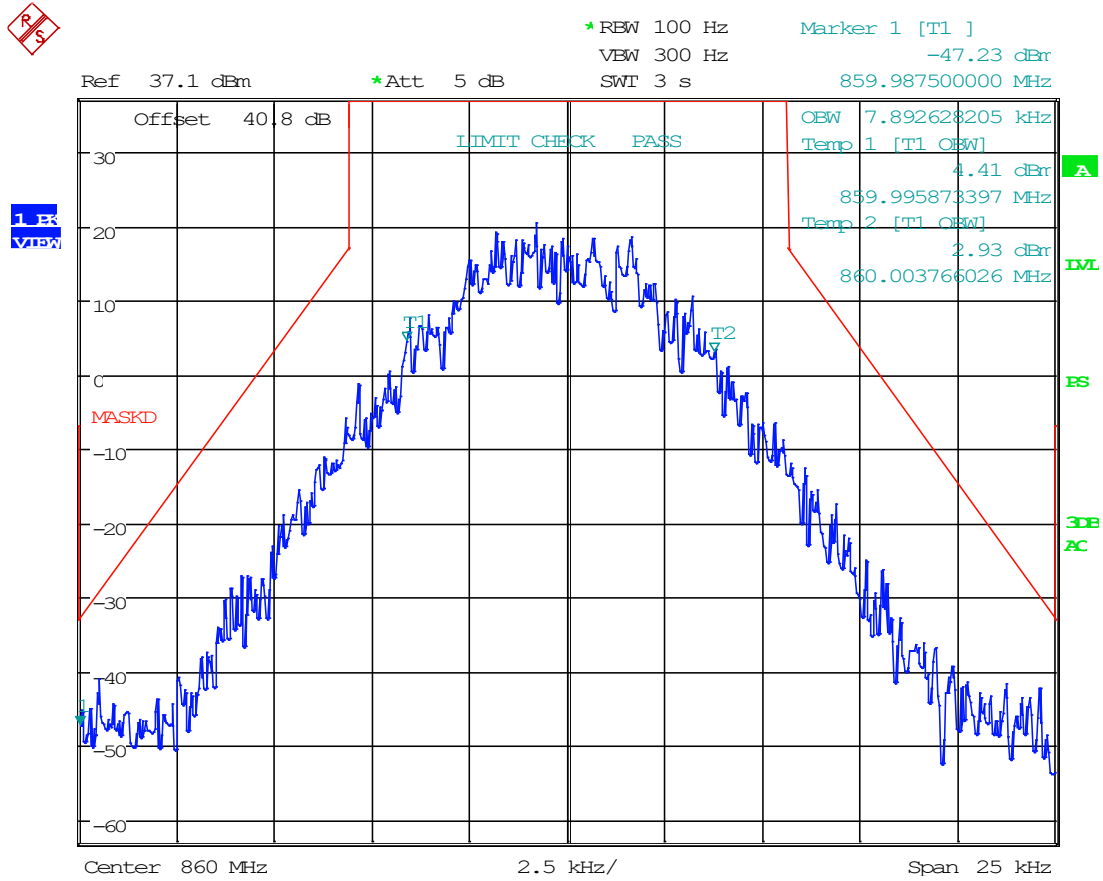

Date: 21.APR.2023 16:46:52




### 8.5.50 C4FM, DL Mask D, AGC+3, 860 MHz

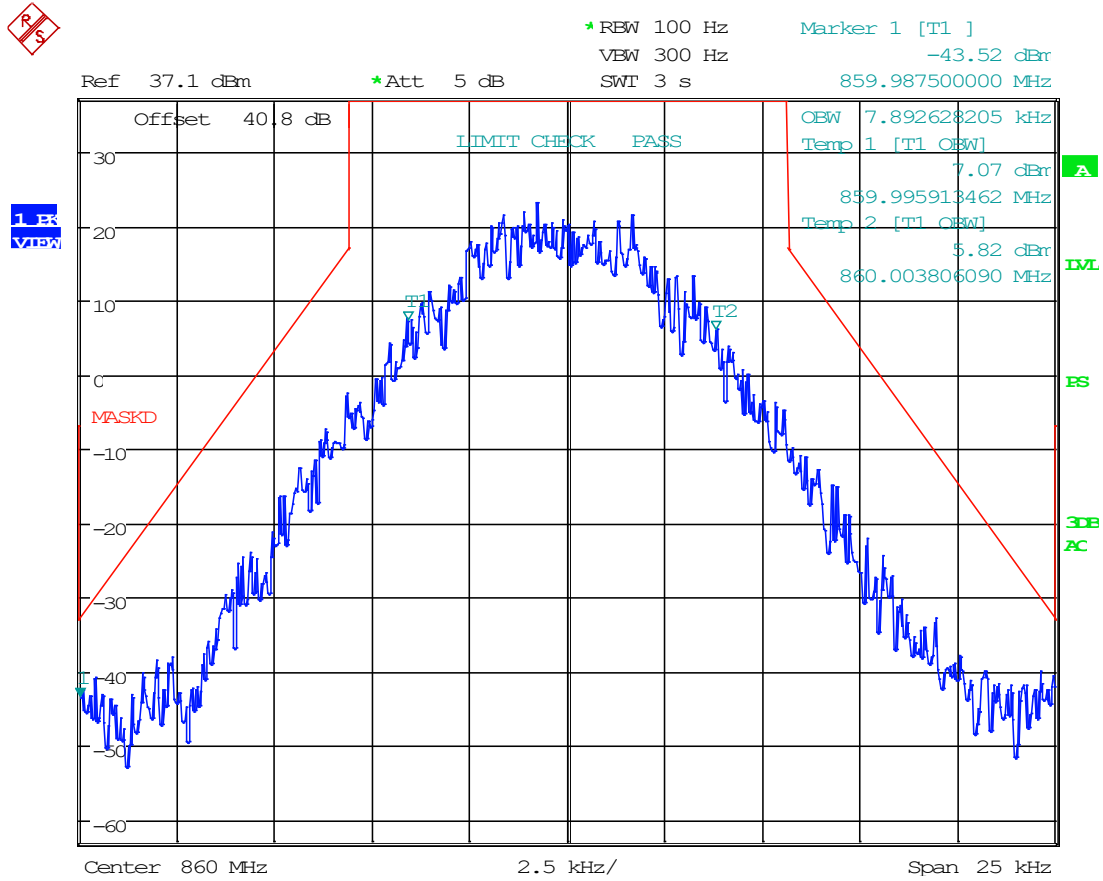

Date: 21.APR.2023 16:46:20




### 8.5.51 H-CPM, DL Mask D, AGC, 860 MHz

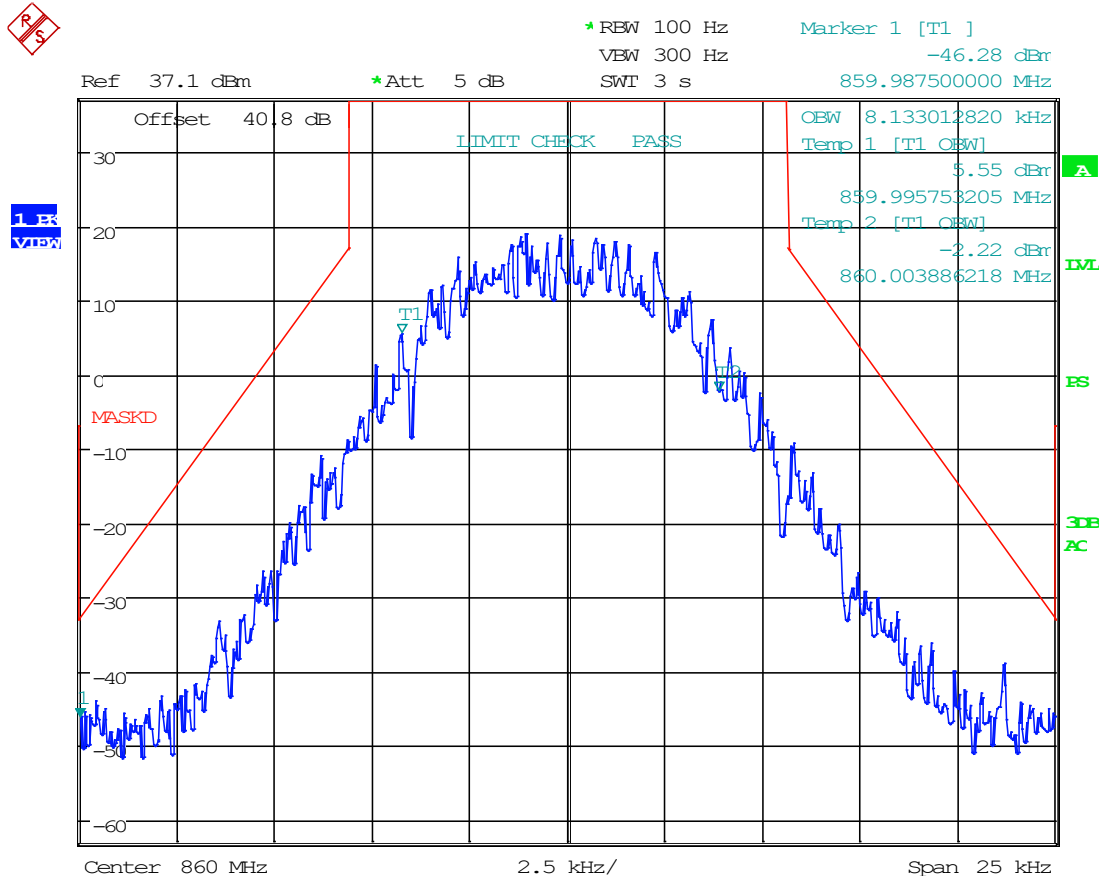

Date: 21.APR.2023 16:47:57




### 8.5.52 H-CPM, DL Mask D, AGC+3, 860 MHz

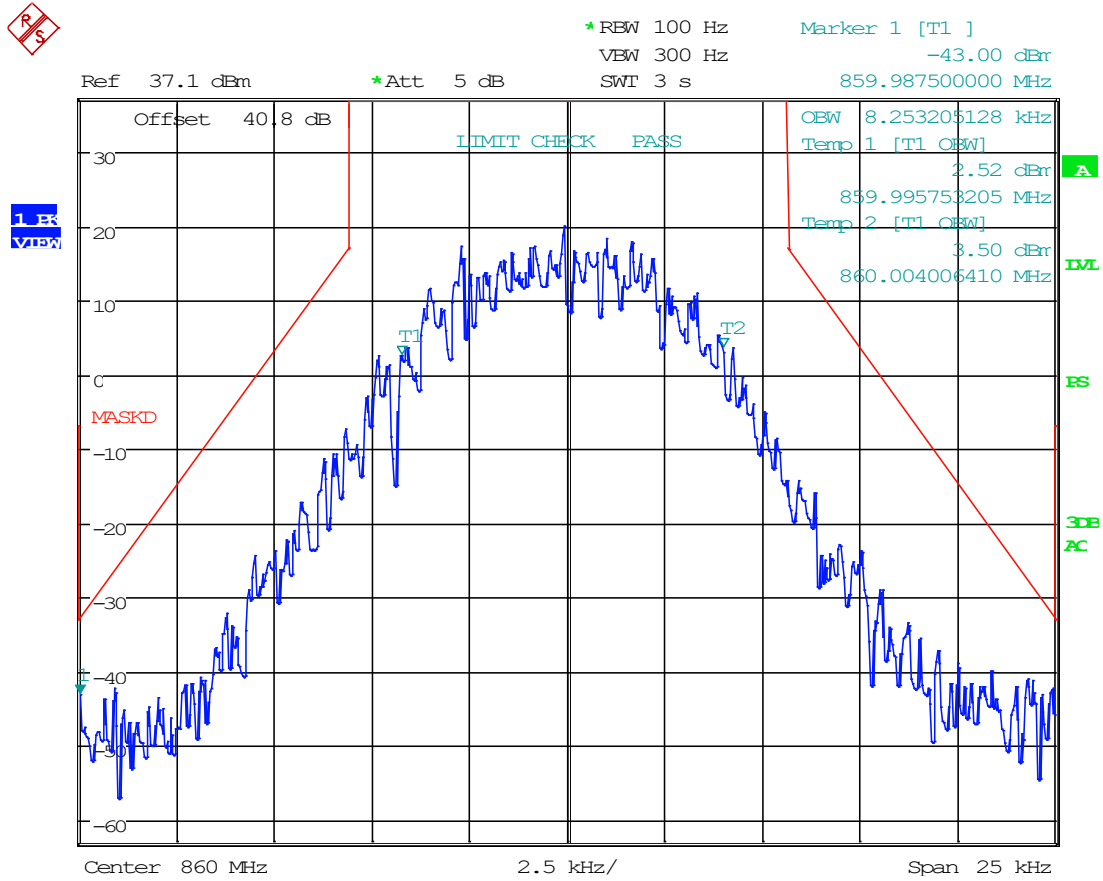

Date: 21.APR.2023 16:47:19




### 8.5.53 H-DQPSK, DL Mask D, AGC, 860 MHz

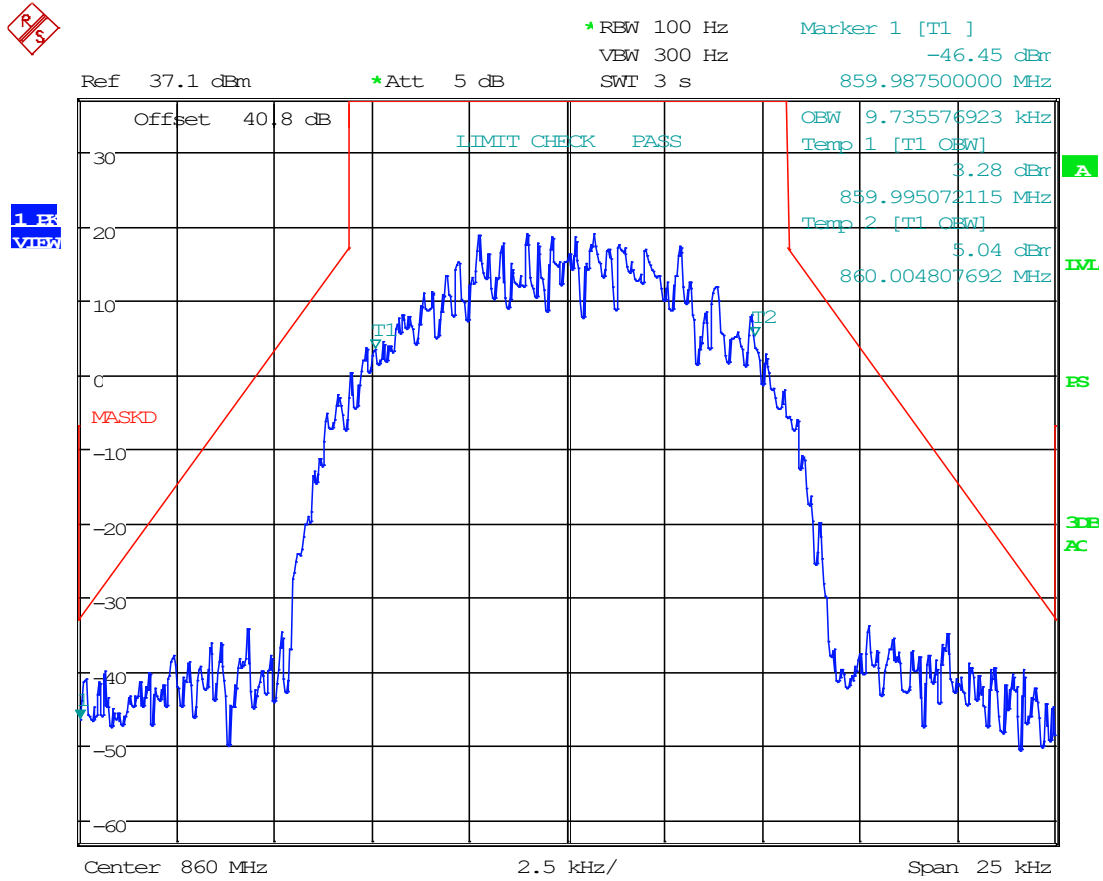

Date: 21.APR.2023 16:48:31




### 8.5.54 H-DQPSK, DL Mask D, AGC+3, 860 MHz

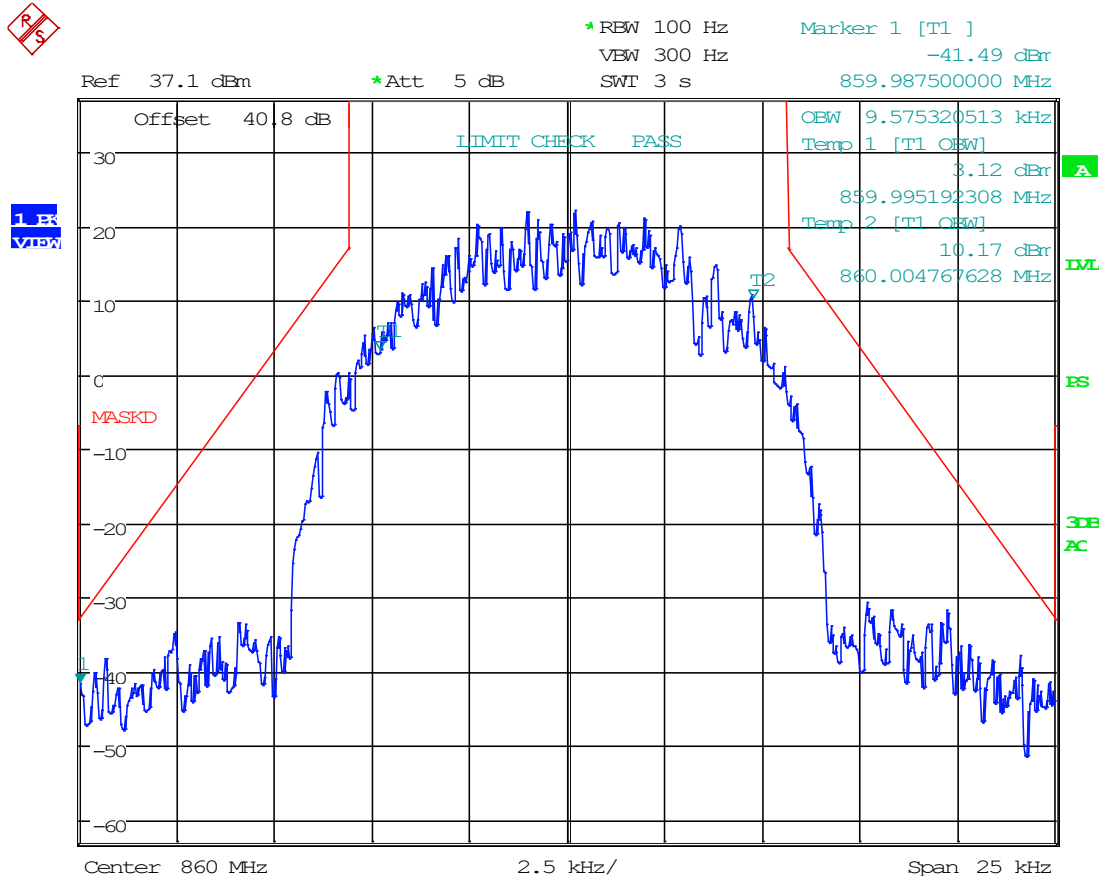

Date: 21.APR.2023 16:49:06

## 8.6 Noise Figure

Limits from FCC KDB 935210 D05 v01r04 Industrial Signal Boosters. Test method from "Noise Figure Measurement Accuracy: The Y-Factor Method" by Keysight Technologies.

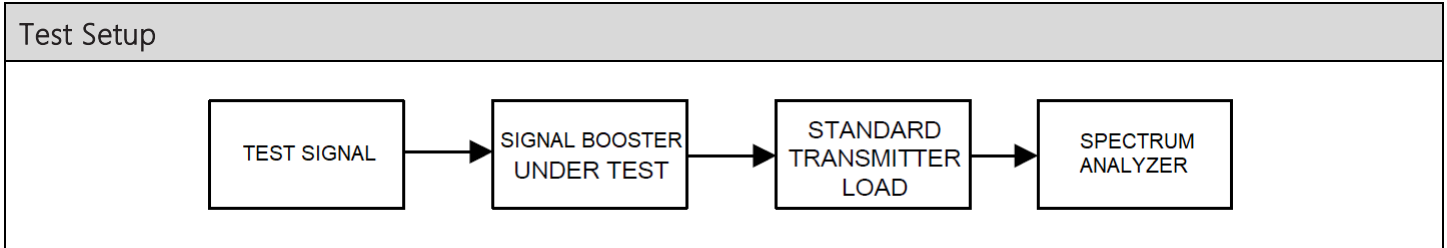


Test Results, Out-of-band Rejection and Class of Operation			
Operating Band (MHz)	Link Direction	Noise Figure (dB)	Limit (dB)
769- 775 MHz	Downlink	3.31	< 9 dB
799- 805 MHz	Uplink	5.47	< 9 dB
806- 824 MHz	Uplink	3.31	< 9 dB
851- 869 MHz	Downlink	3.24	< 9 dB



### 8.7 Out-of-Band/Out-of-Block Emissions (Intermodulation Products)


Limits from FCC Parts 2.1051, FCC Pt. 90.219(d)(6)(i), and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

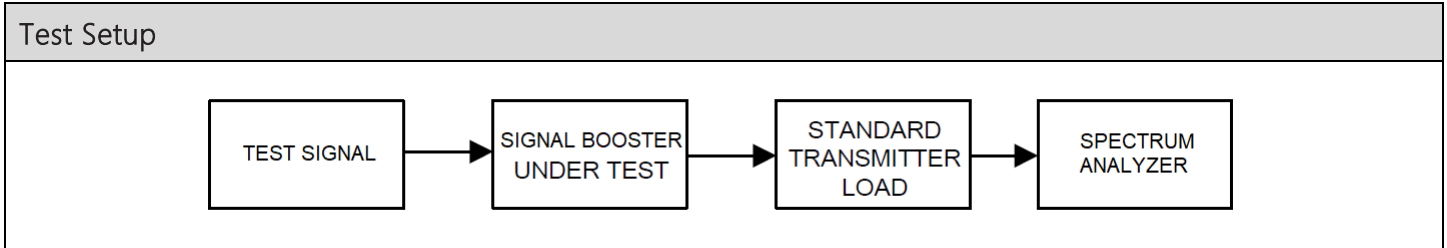



Intermodulation Products Spectrum Plots


8.7.1 6.25 kHz Signal, Downlink, AGC, 772 MHz

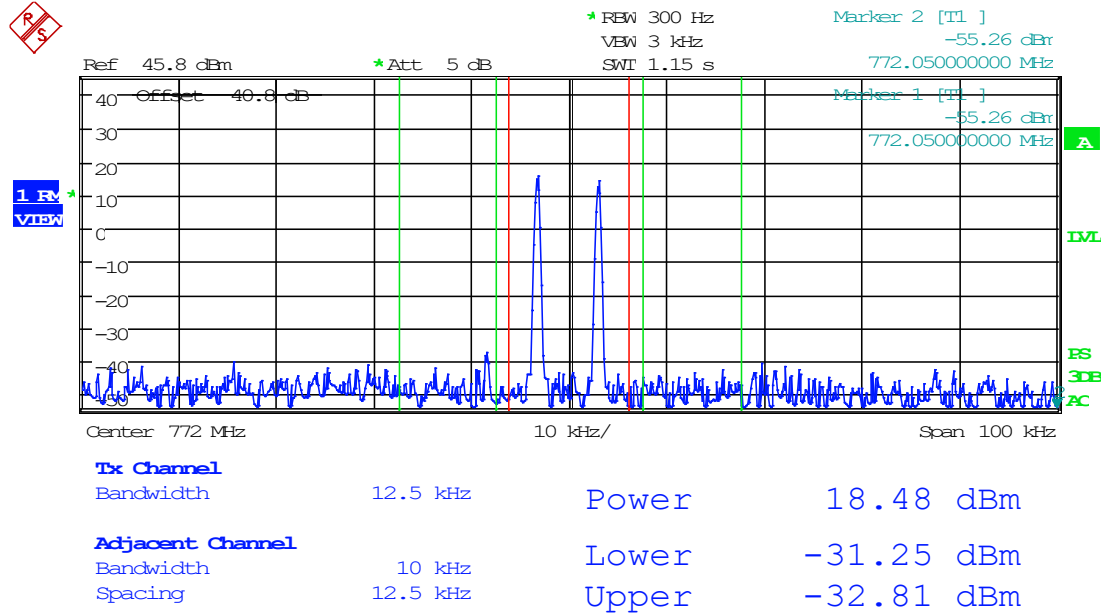

Date: 24.APR.2023 14:18:26




### 8.7.2 6.25 kHz Signal, Downlink, AGC+3dB, 772 MHz

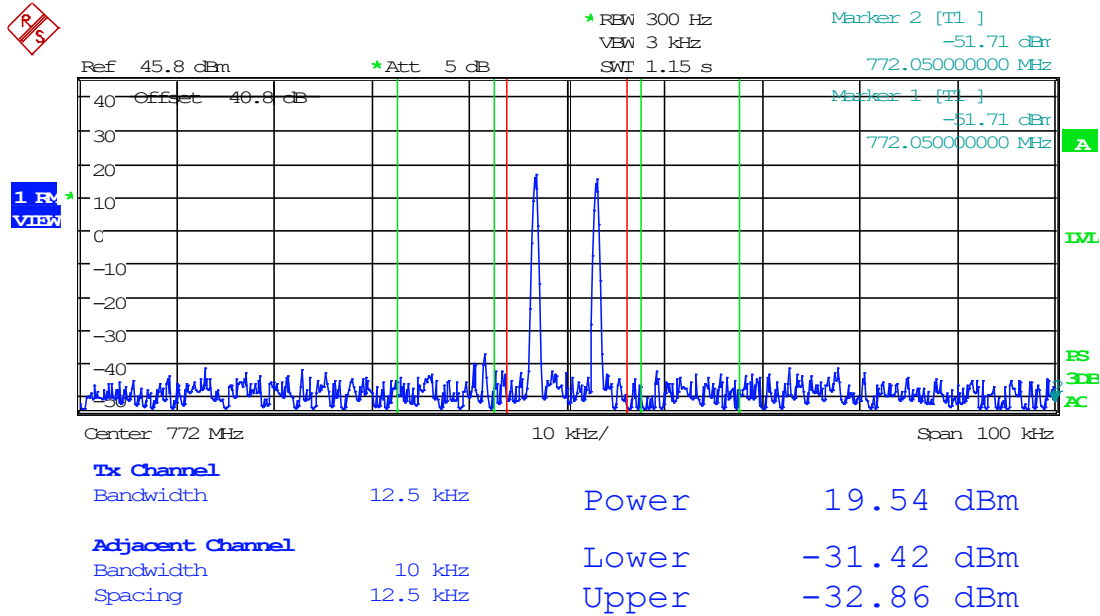

Date: 24.APR.2023 14:17:58




### 8.7.3 12.5 kHz Signal, Downlink, AGC, 772 MHz

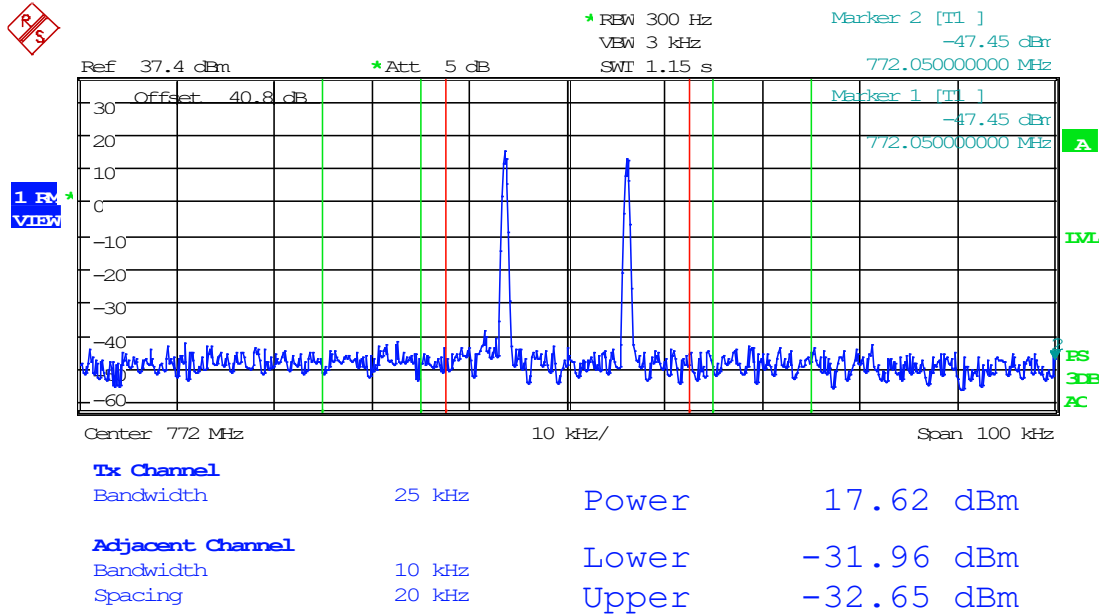

Date: 24.APR.2023 14:40:04




### 8.7.4 12.5 kHz Signal, Downlink, AGC+3dB, 772 MHz

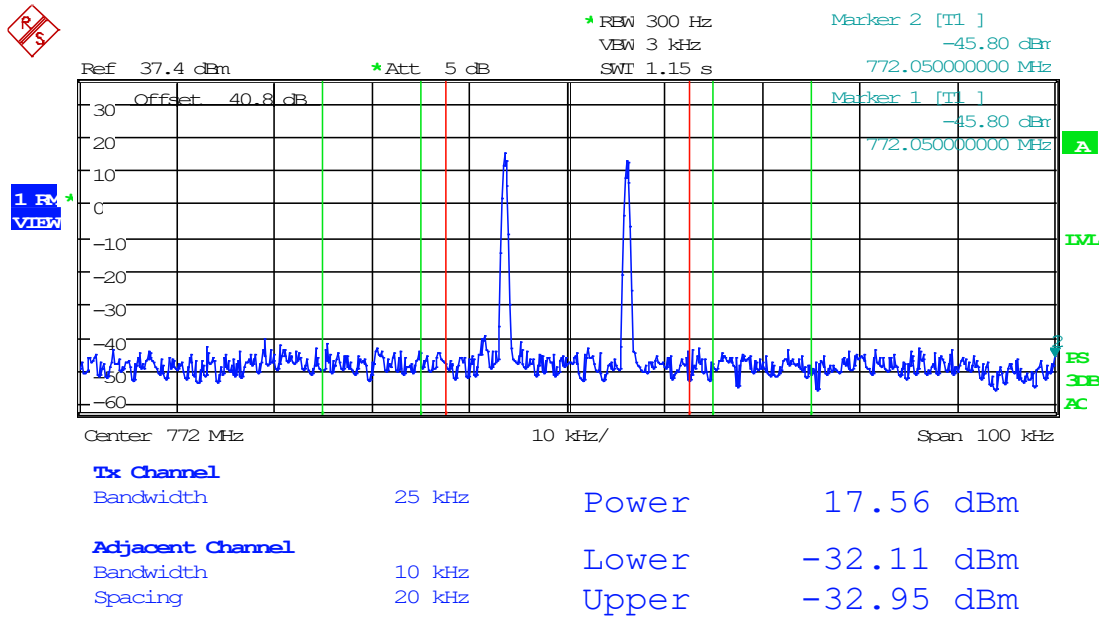

Date: 24.APR.2023 14:40:31




### 8.7.5 25 kHz Signal, Downlink, AGC, 772 MHz

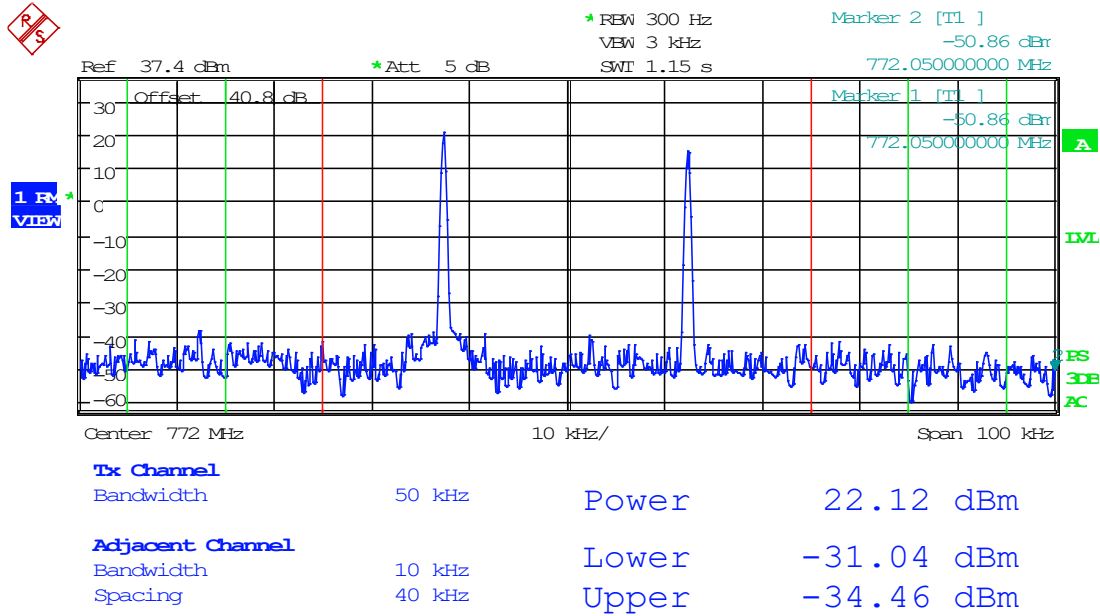

Date: 24.APR.2023 14:55:11




### 8.7.6 25 kHz Signal, Downlink, AGC+3dB, 772 MHz

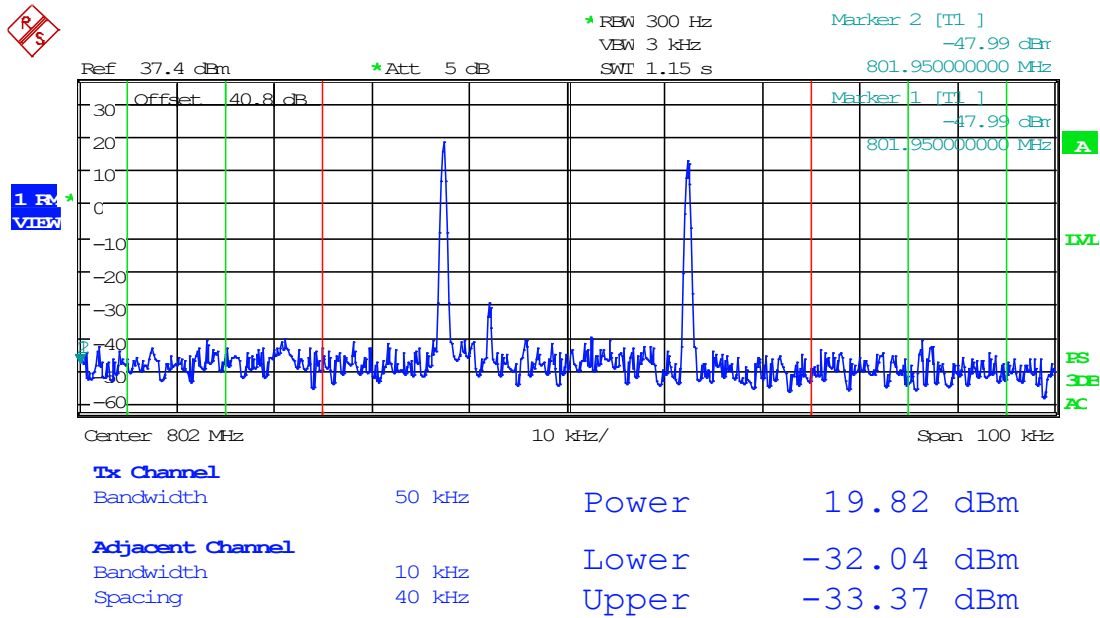

Date: 24.APR.2023 14:51:01



### 8.7.7 6.25 kHz Signal, Uplink, AGC, 802 MHz

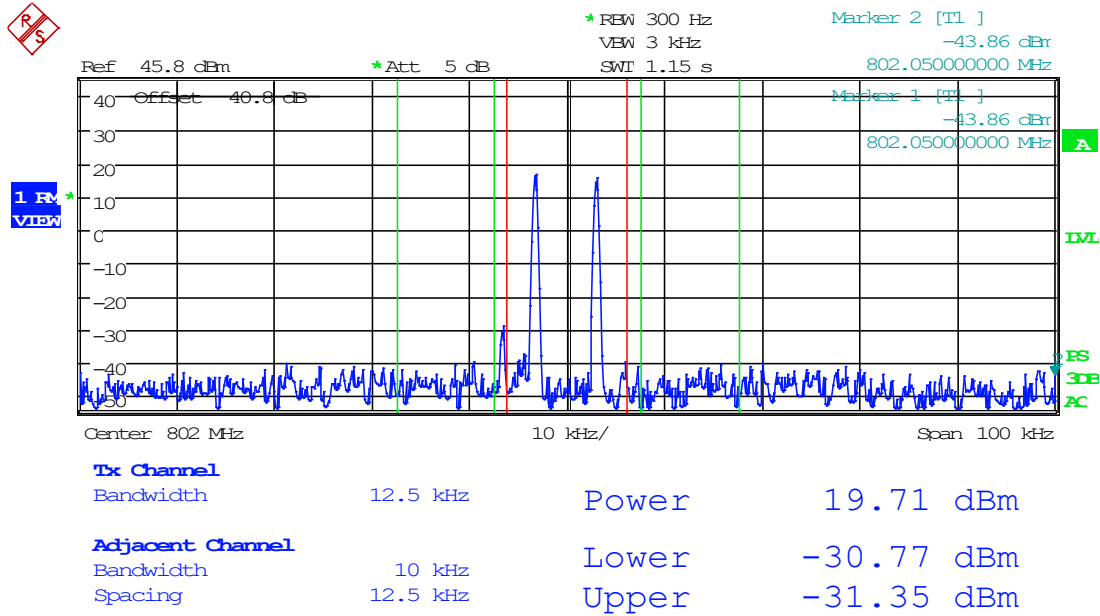


Date: 24.APR.2023 14:14:12






### 8.7.8 6.25 kHz Signal, Uplink, AGC+3dB, 802 MHz

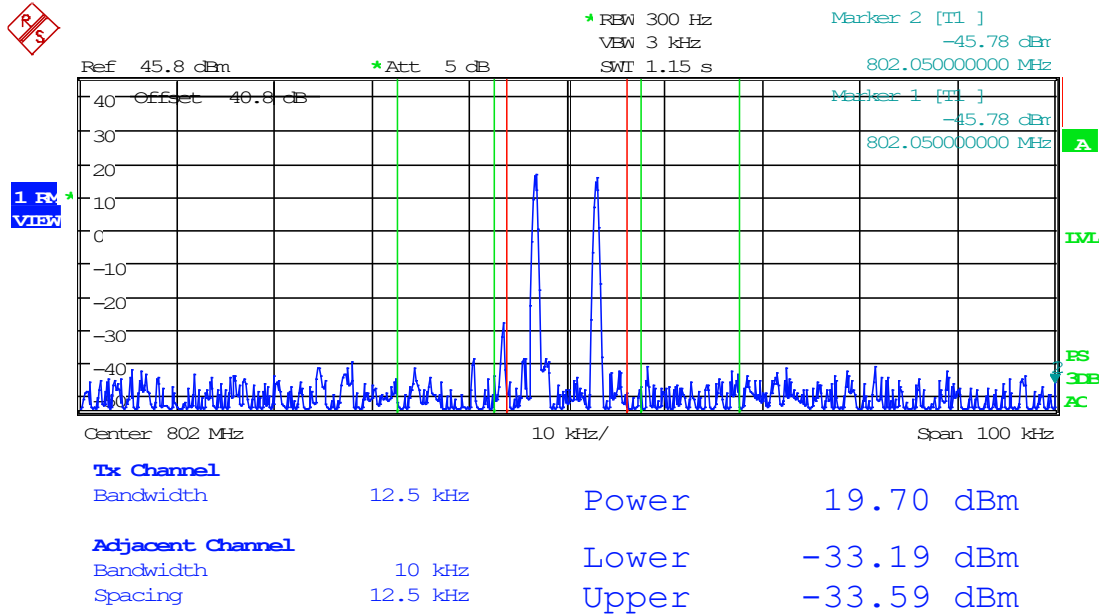

Date: 24.APR.2023 14:13:43




### 8.7.9 12.5 kHz Signal, Uplink, AGC, 802 MHz

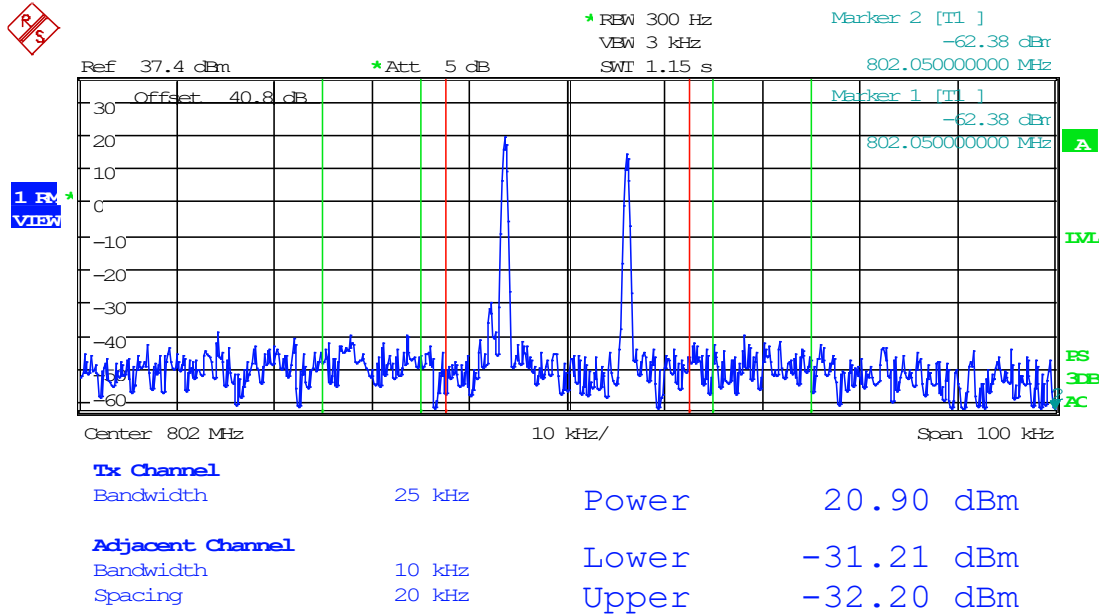

Date: 24.APR.2023 14:48:11

### 8.7.10 12.5 kHz Signal, Uplink, AGC+3dB, 802 MHz

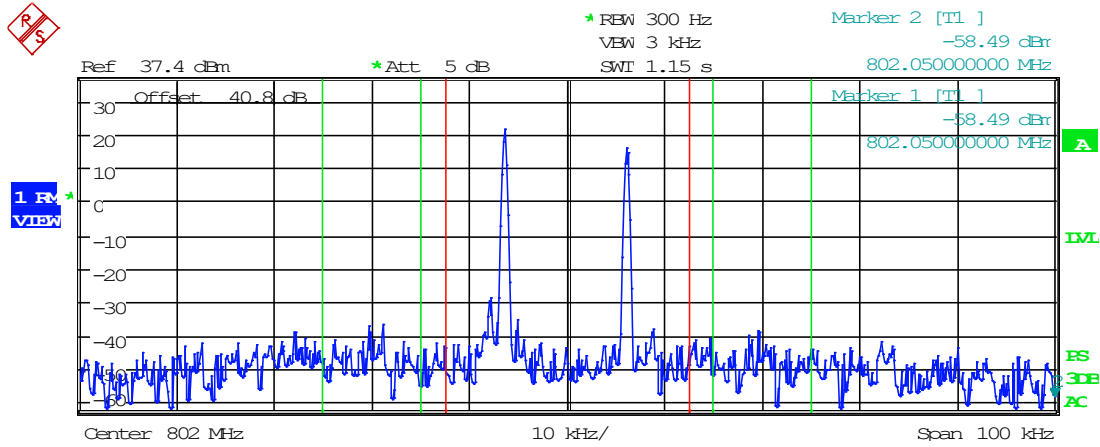


<b>Tx Channel</b>			
Bandwidth	25 kHz	Power	22.94 dBm
<b>Adjacent Channel</b>			
Bandwidth	10 kHz	Lower	-30.26 dBm
Spacing	20 kHz	Upper	-31.55 dBm

Date: 24.APR.2023 14:47:42




### 8.7.11 25 kHz Signal, Uplink, AGC, 802 MHz

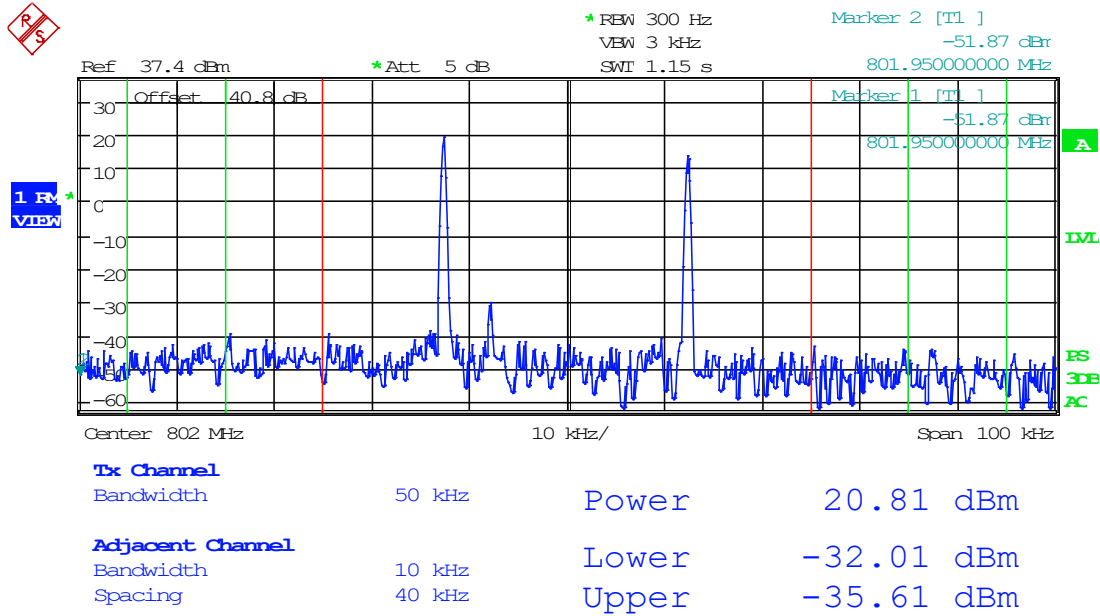

Date: 24.APR.2023 14:50:18




### 8.7.12 25 kHz Signal, Uplink, AGC+3dB, 802 MHz

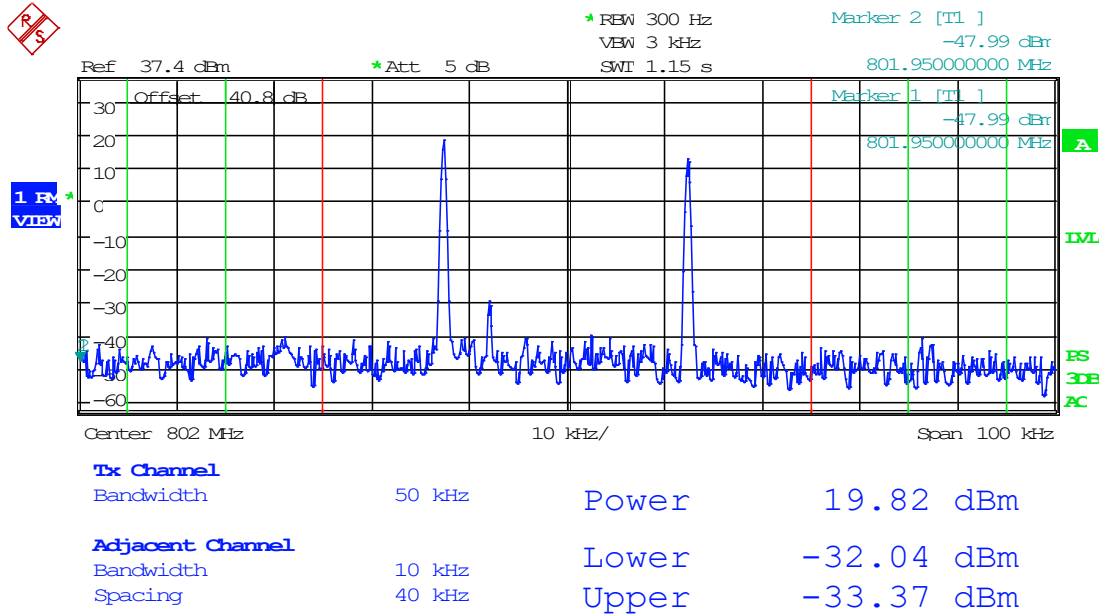

Date: 24.APR.2023 14:51:01




### 8.7.13 6.25 kHz Signal, Uplink, AGC, 815 MHz

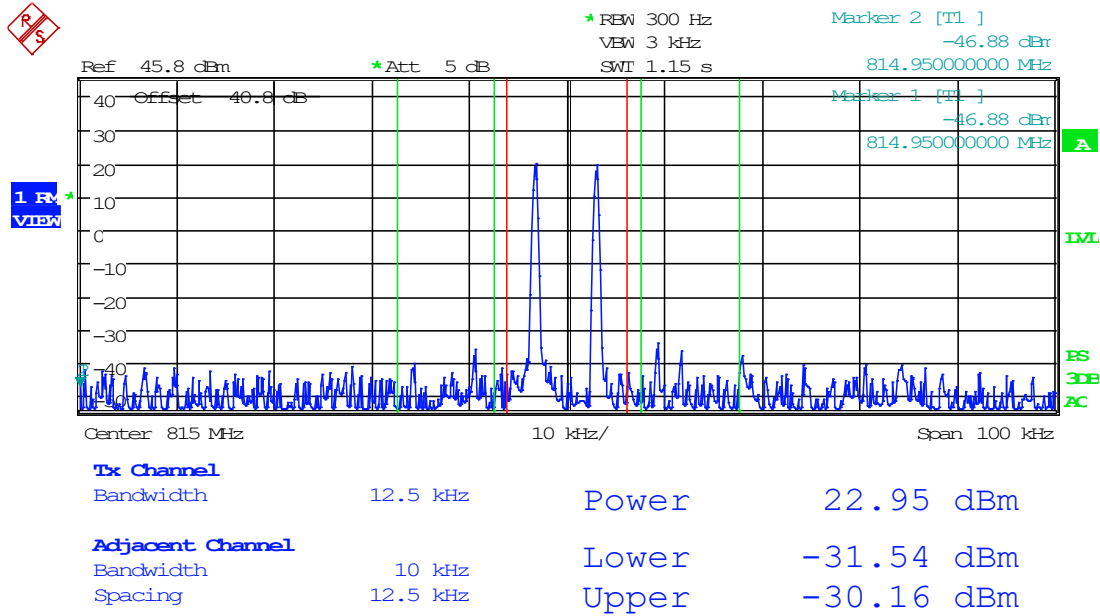

Date: 24.APR.2023 14:09:31




### 8.7.14 6.25 kHz Signal, Uplink, AGC+3dB, 815 MHz

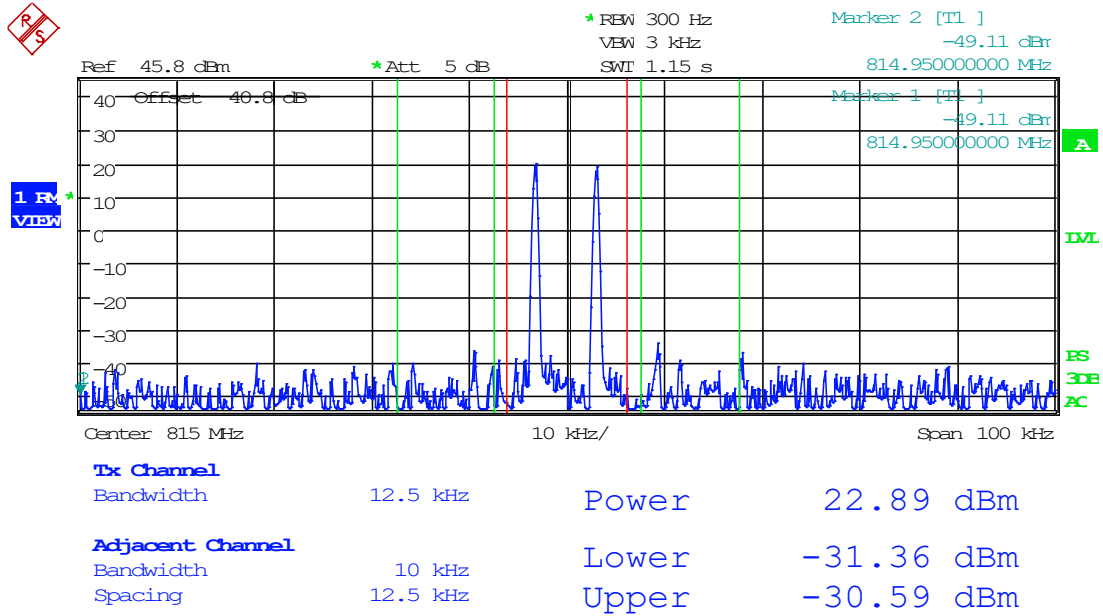

Date: 24.APR.2023 14:10:05



### 8.7.15 12.5 kHz Signal, Uplink, AGC, 815 MHz

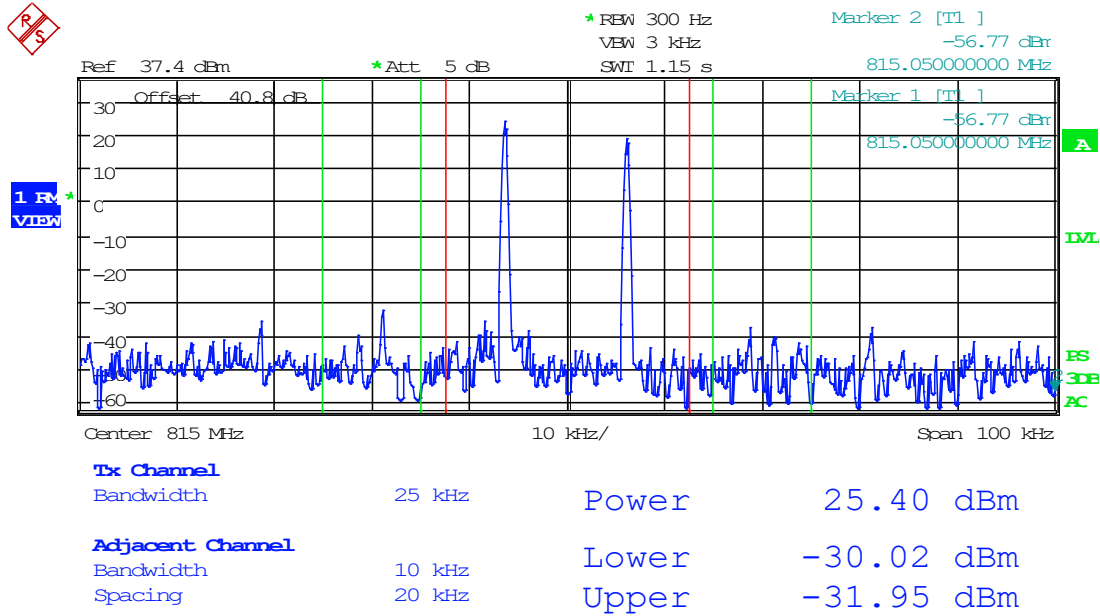


Date: 24.APR.2023 14:46:05






### 8.7.16 12.5 kHz Signal, Uplink, AGC+3dB, 815 MHz

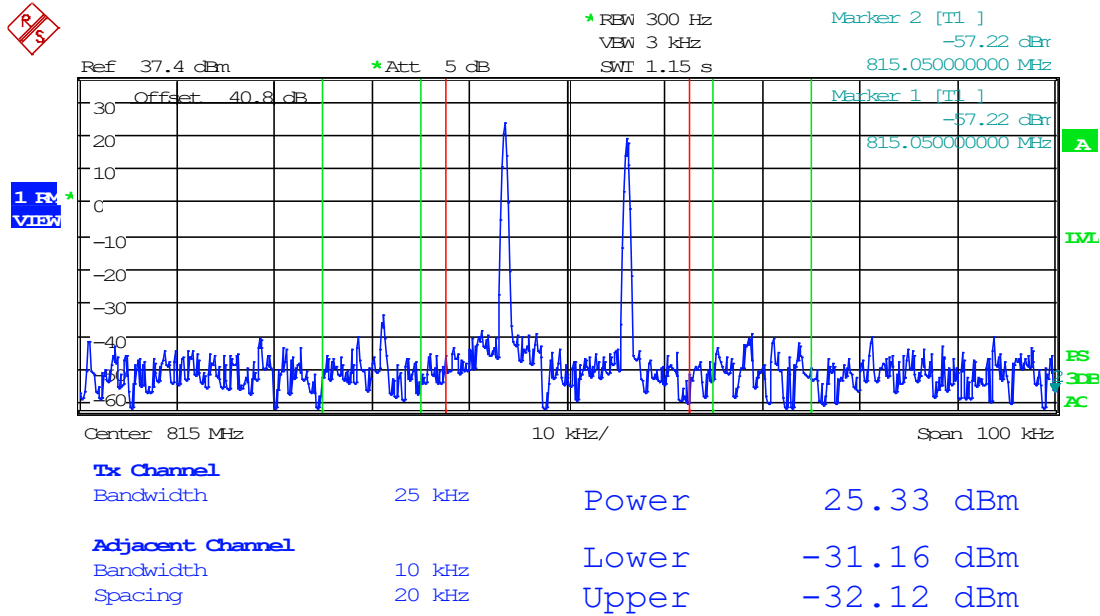

Date: 24.APR.2023 14:46:37




### 8.7.17 25 kHz Signal, Uplink, AGC, 815 MHz

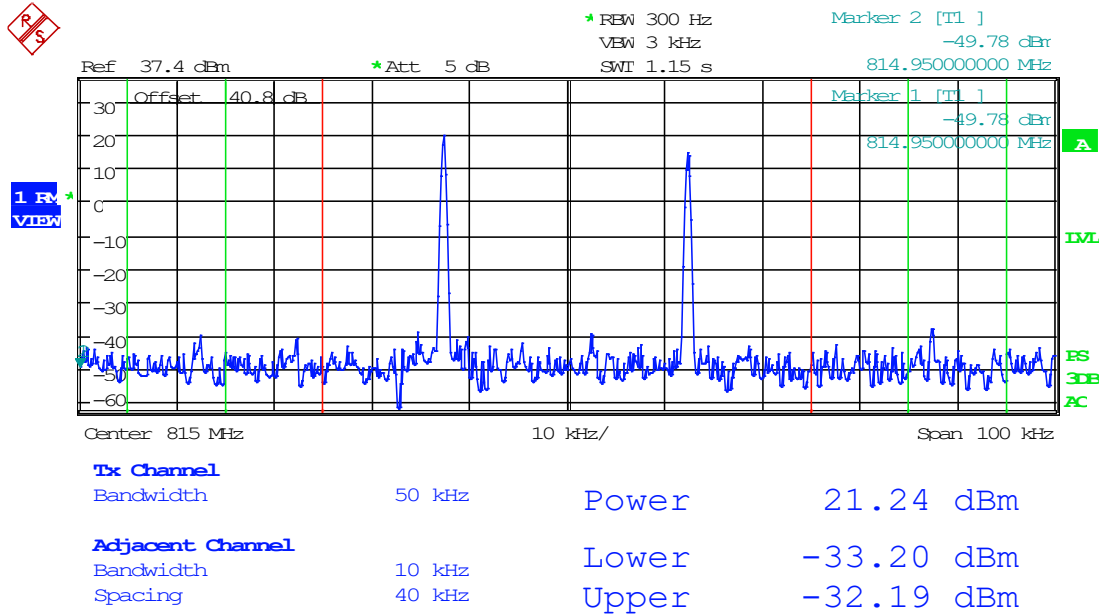

Date: 24.APR.2023 14:52:18




### 8.7.18 25 kHz Signal, Uplink, AGC+3dB, 815 MHz

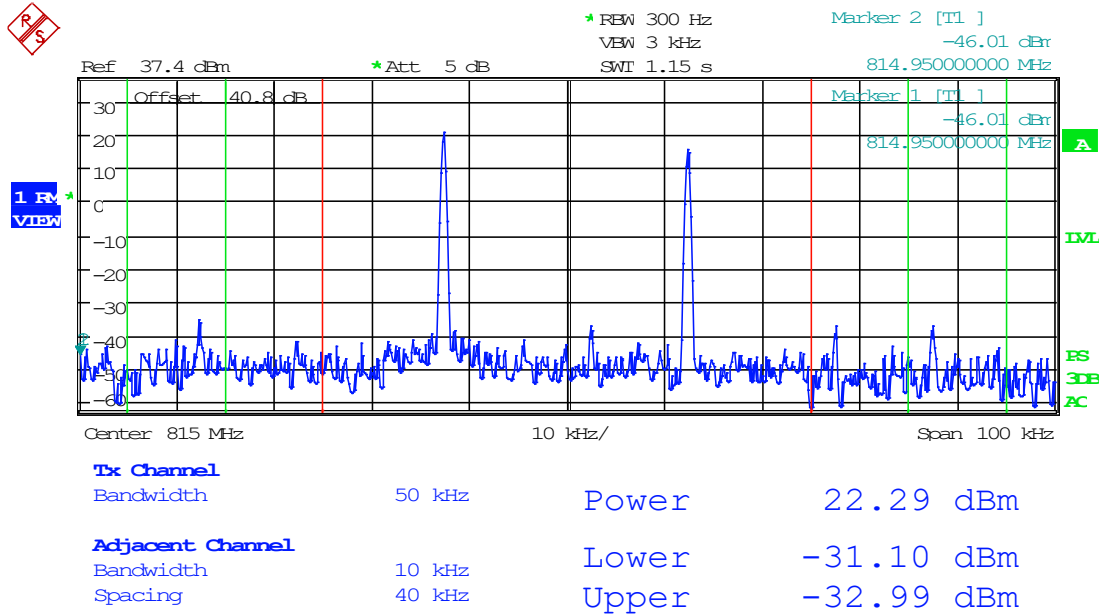

Date: 24.APR.2023 14:51:55



### 8.7.19 6.25 kHz Signal, Downlink, AGC, 860 MHz

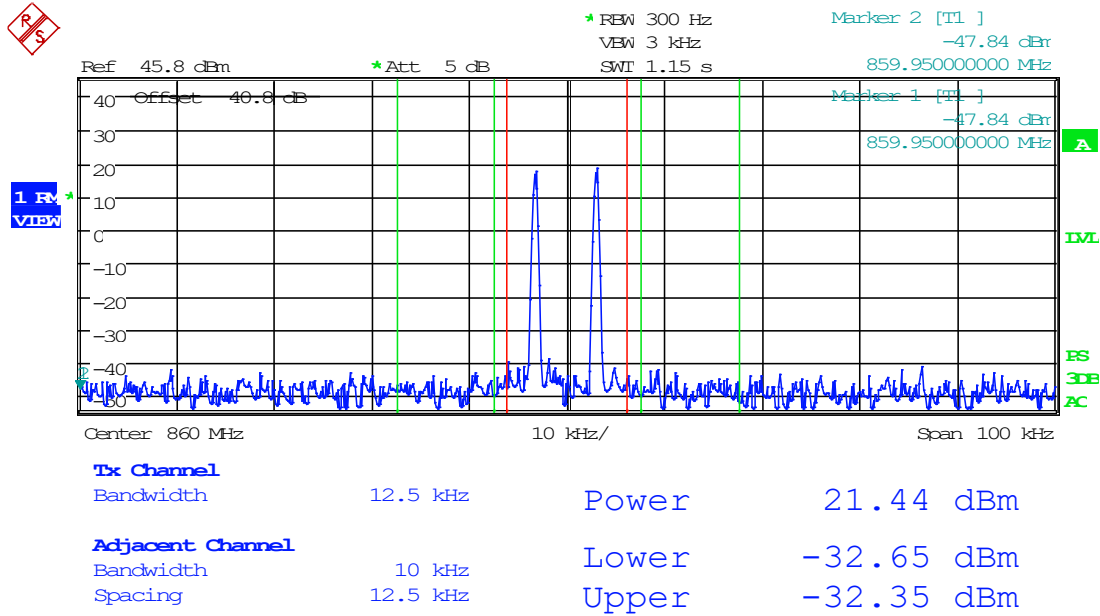


Date: 24.APR.2023 14:15:42



Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)


### 8.7.20 6.25 kHz Signal, Downlink, AGC+3dB, 860 MHz

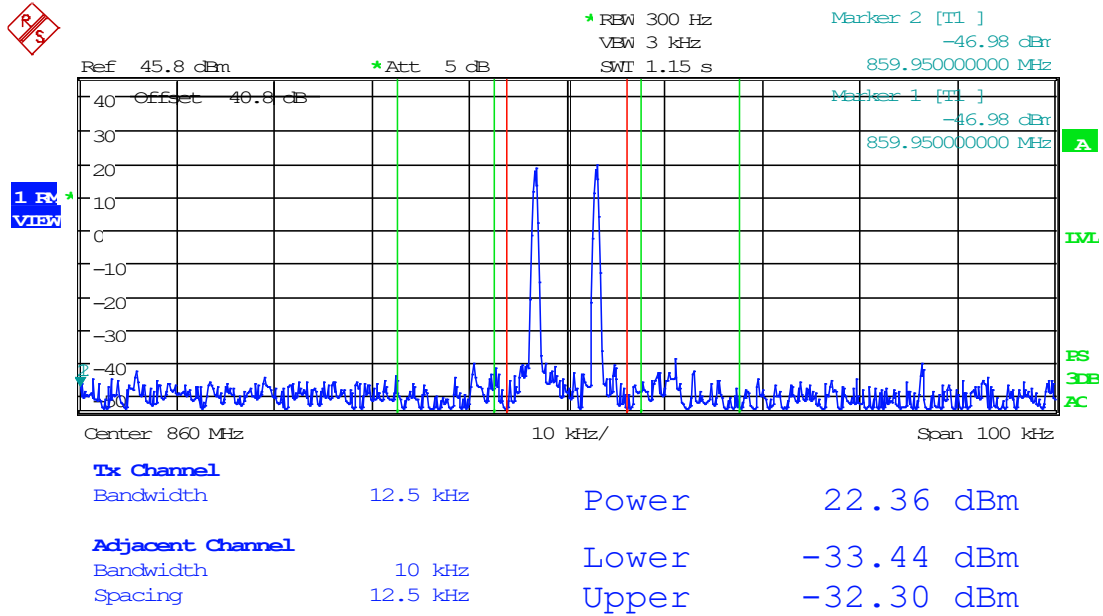

Date: 24.APR.2023 14:16:07




### 8.7.21 12.5 kHz Signal, Downlink, AGC, 860 MHz

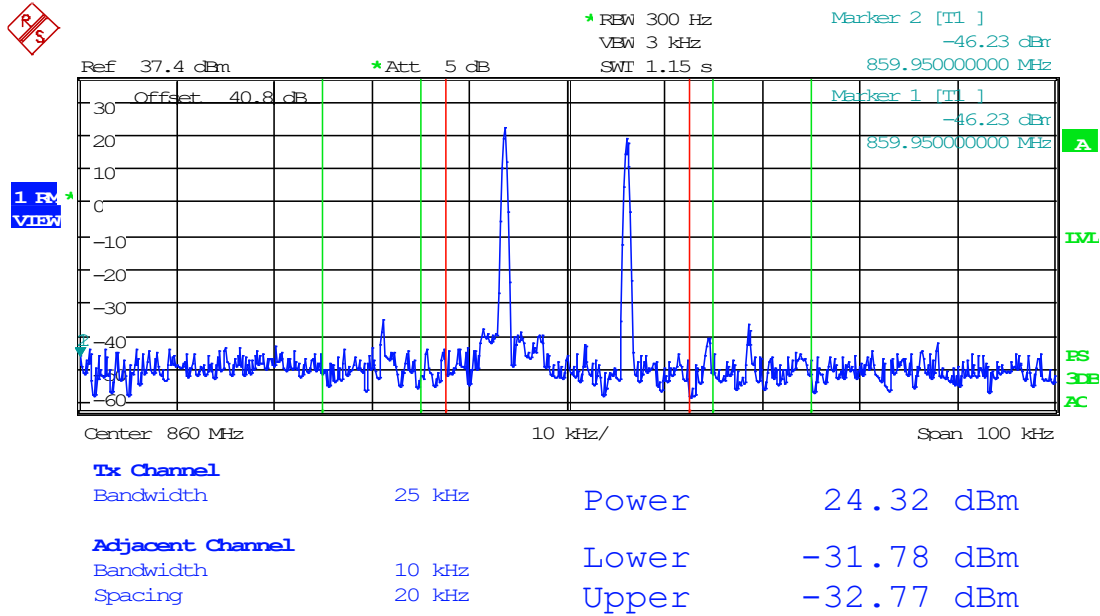

Date: 24.APR.2023 14:42:41




### 8.7.22 12.5 kHz Signal, Downlink, AGC+3dB, 860 MHz

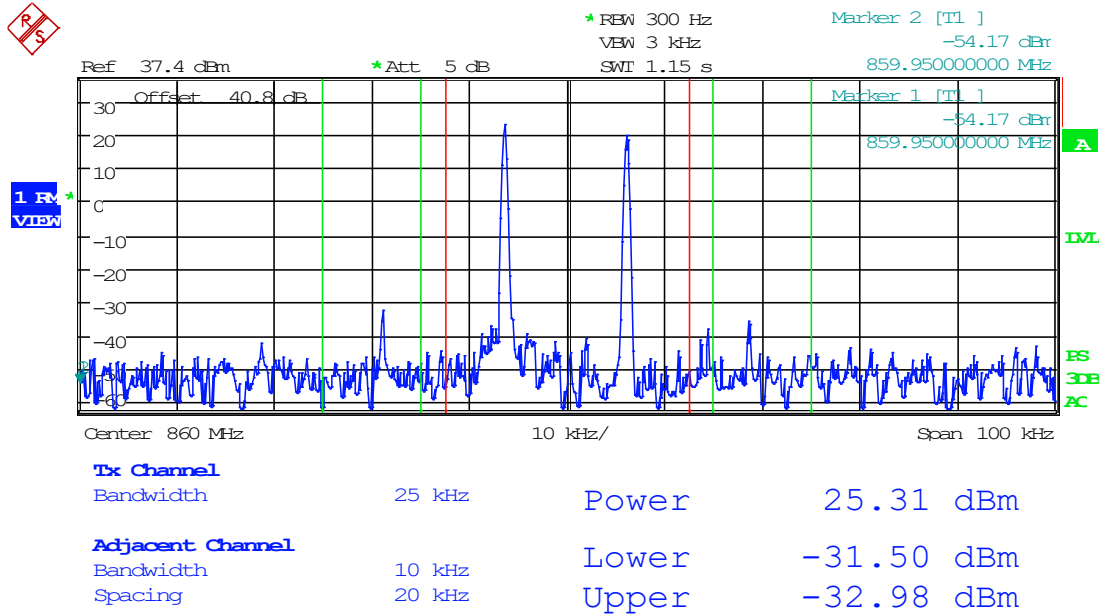

Date: 24.APR.2023 14:42:11



### 8.7.23 25 kHz Signal, Downlink, AGC, 860 MHz

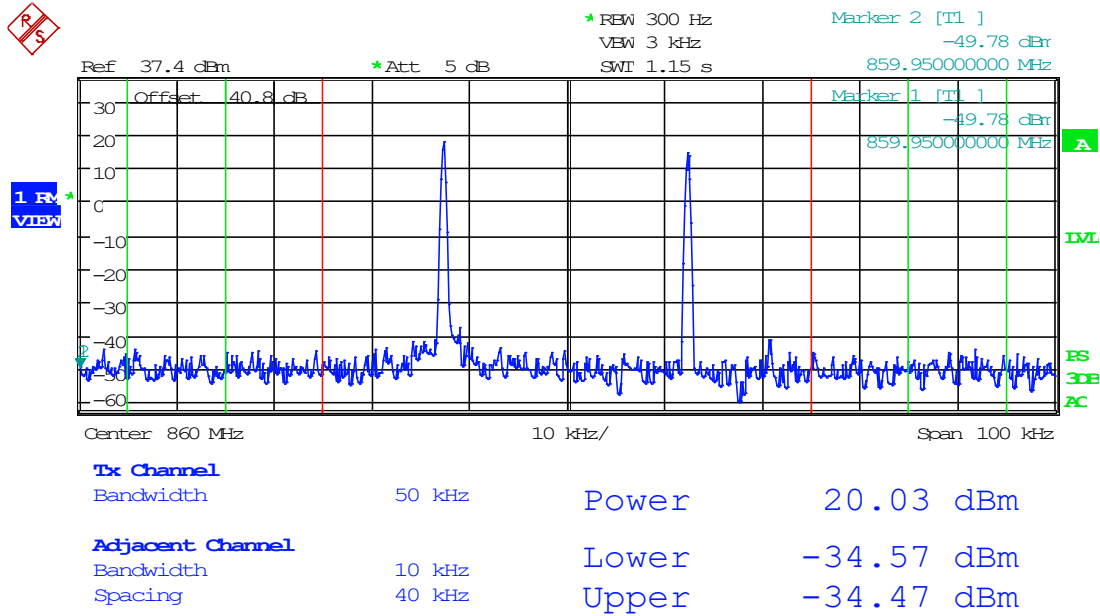


Date: 24.APR.2023 14:53:12






### 8.7.24 25 kHz Signal, Downlink, AGC+3dB, 860 MHz

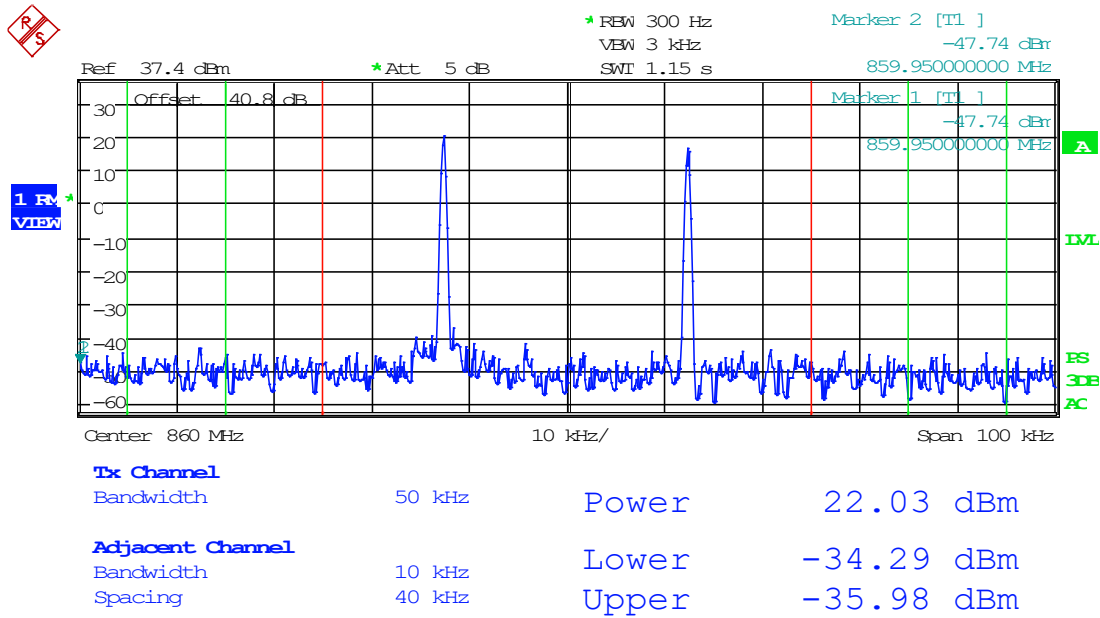

Date: 24.APR.2023 14:53:40

## 8.8 Emission Mask, Out-of-Band

Limits from FCC Parts 2.1051, FCC Pt. 90.219(e)(3) and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

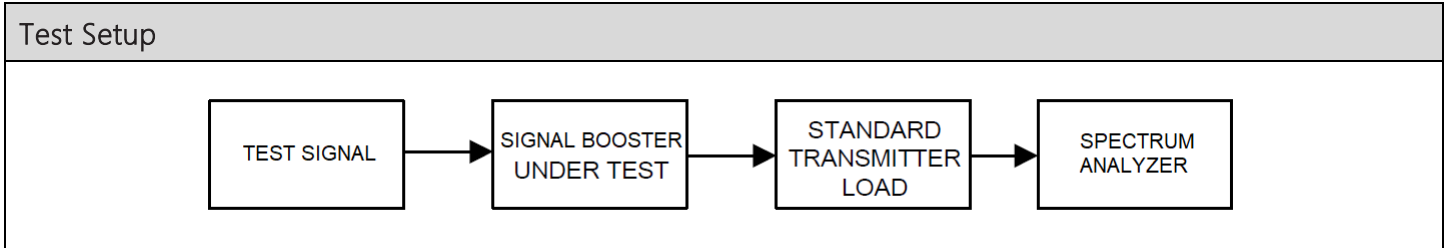


**Note:** Testing was done simultaneously on all combinations of Uplinks and Downlinks to address co-location of signals.



### Conducted Emissions Spectrum Plots


#### 8.8.1 30 MHz to 1 GHz, 772 MHz

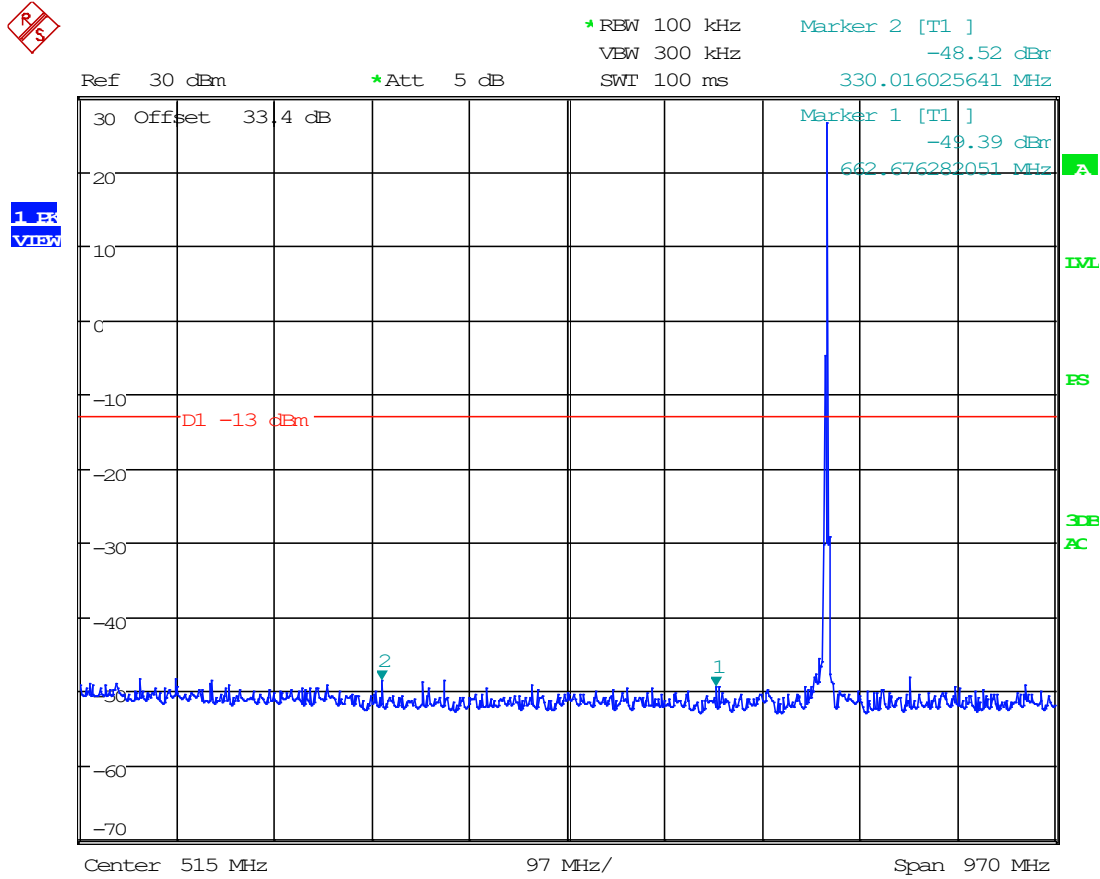

Date: 24.APR.2023 15:02:56




### 8.8.2 1 GHz to 10<sup>th</sup> Harmonic, 772 MHz

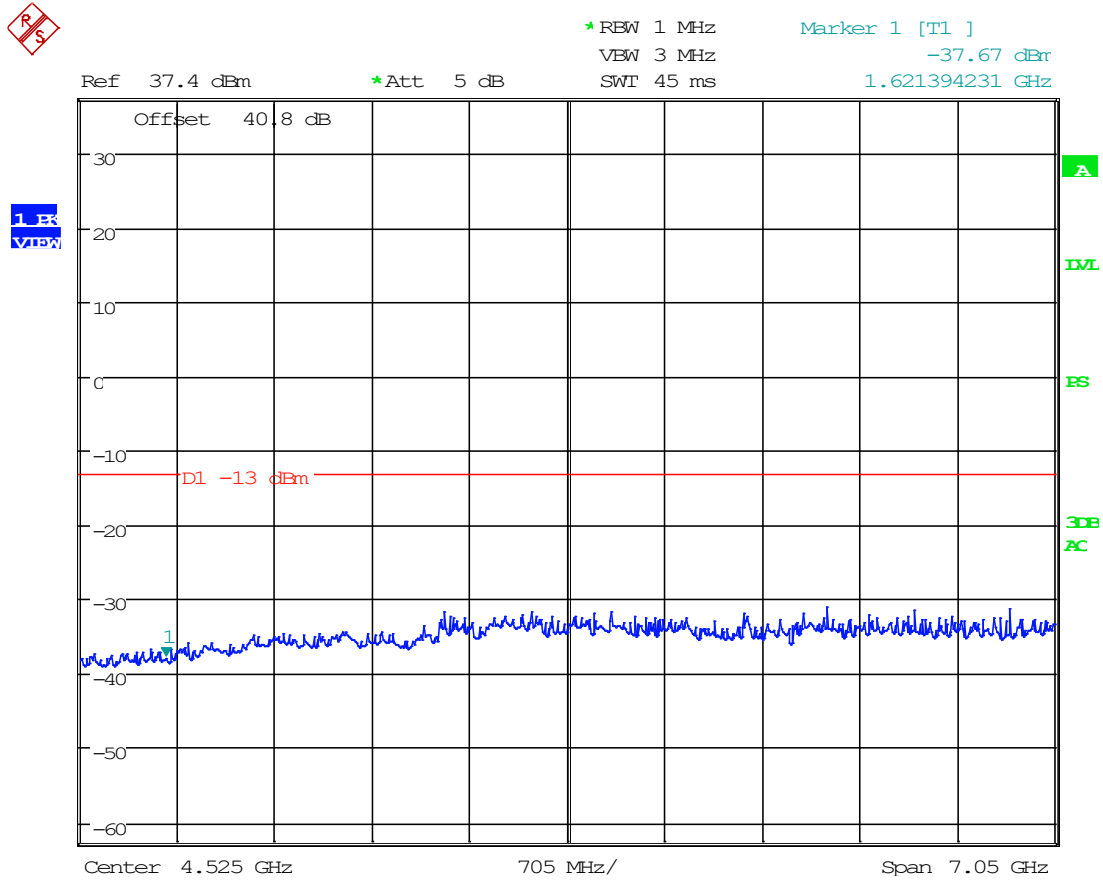

Date: 24.APR.2023 15:11:27




### 8.8.3 30 MHz to 1 GHz, 802 MHz

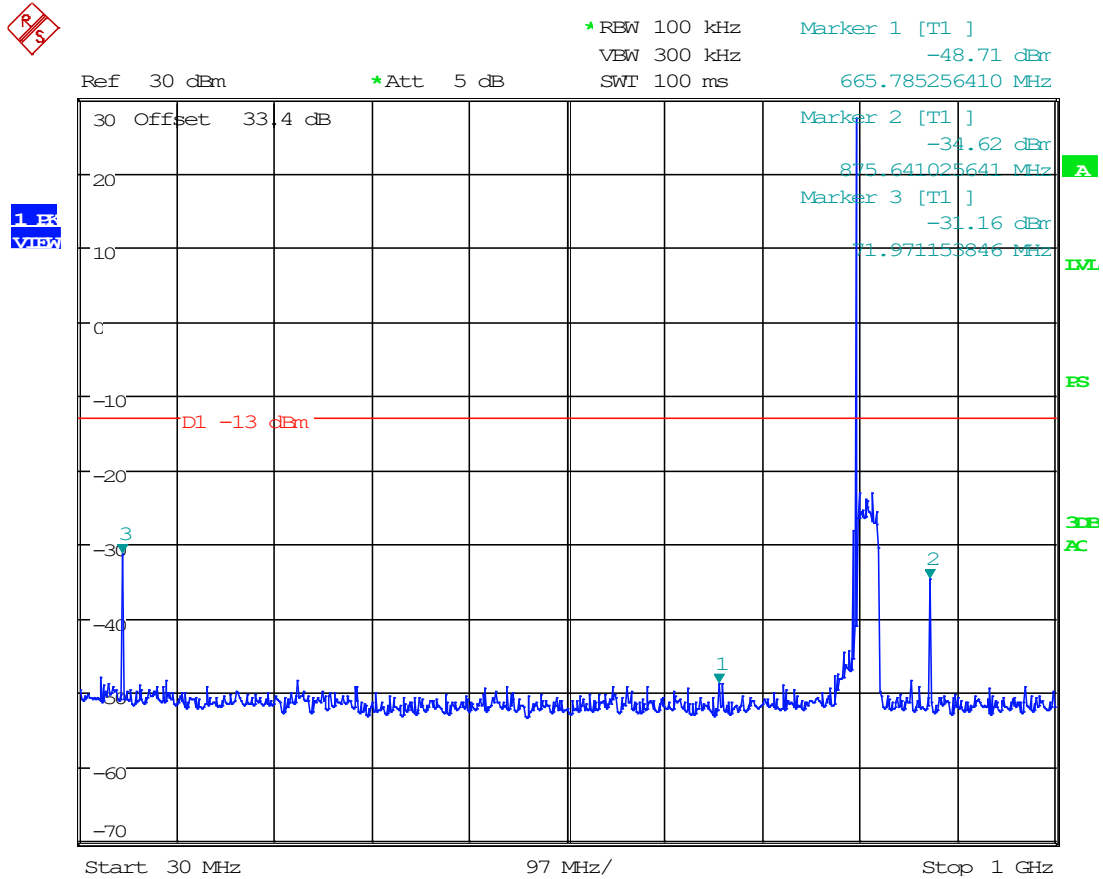

Date: 24.APR.2023 15:07:15




### 8.8.4 1 GHz to 10<sup>th</sup> Harmonic, 802 MHz

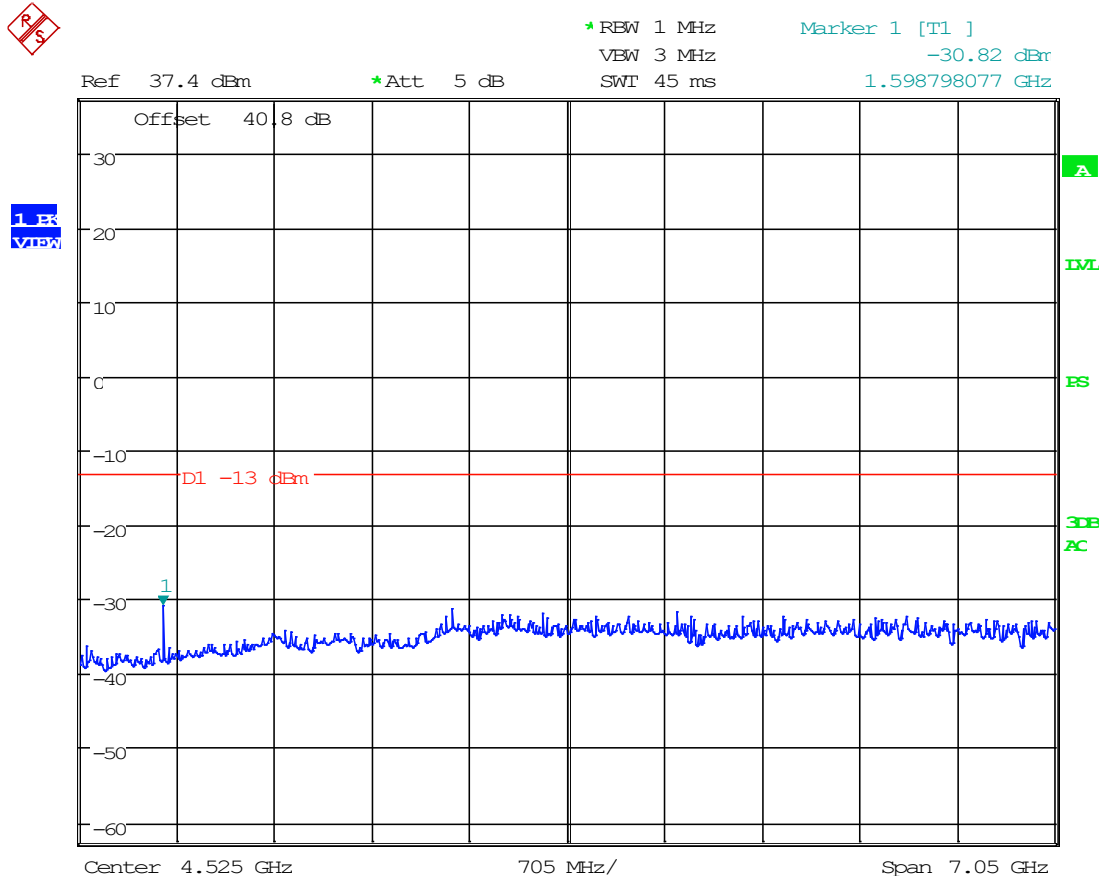

Date: 24.APR.2023 15:08:06




### 8.8.5 30 MHz to 1 GHz, 815 MHz

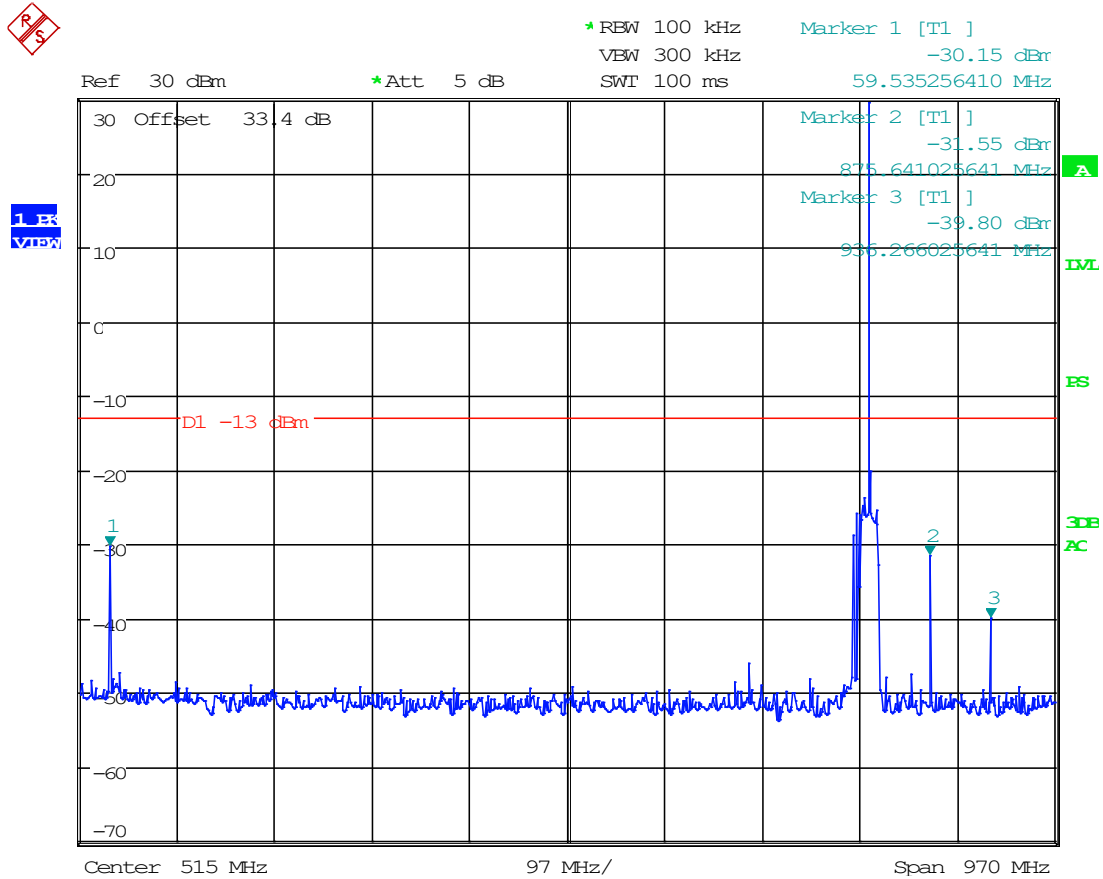

Date: 24.APR.2023 15:04:44



### 8.8.6 1 GHz to 10<sup>th</sup> Harmonic, 815 MHz

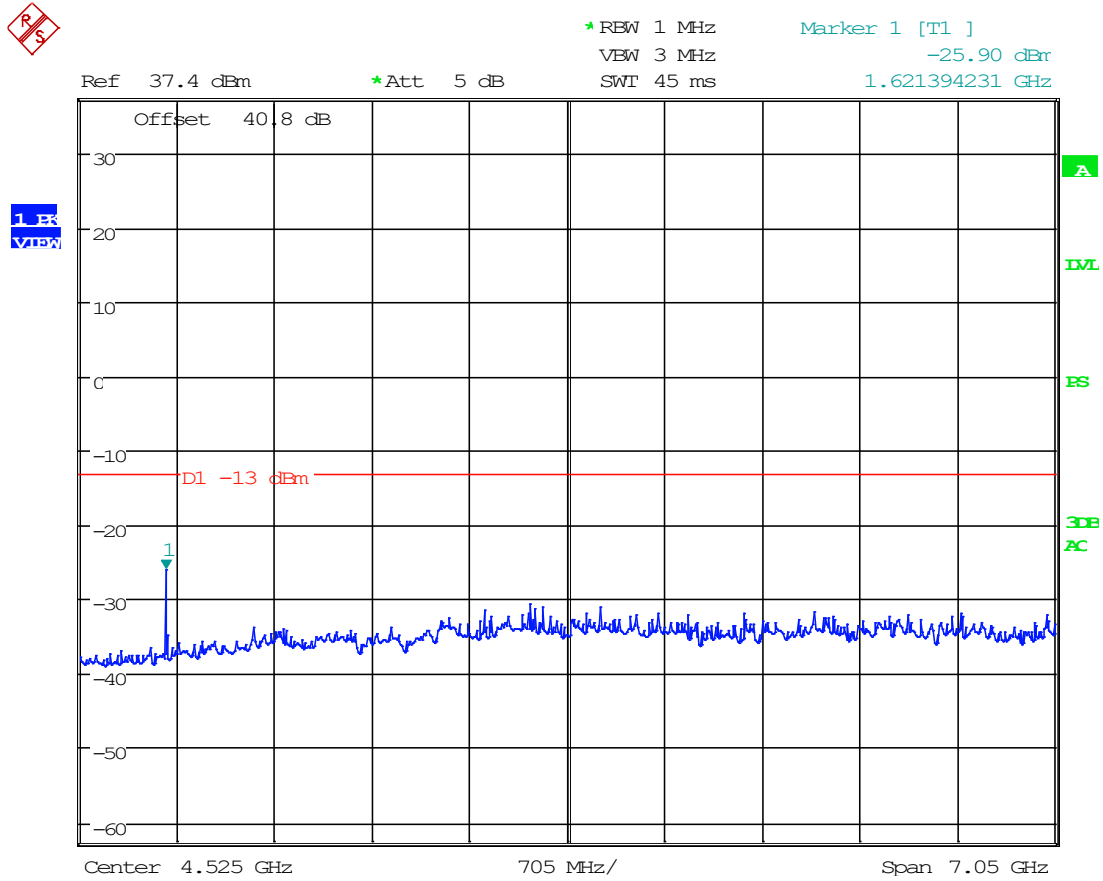


Date: 24.APR.2023 15:09:46






### 8.8.7 30 MHz to 1 GHz, 860 MHz

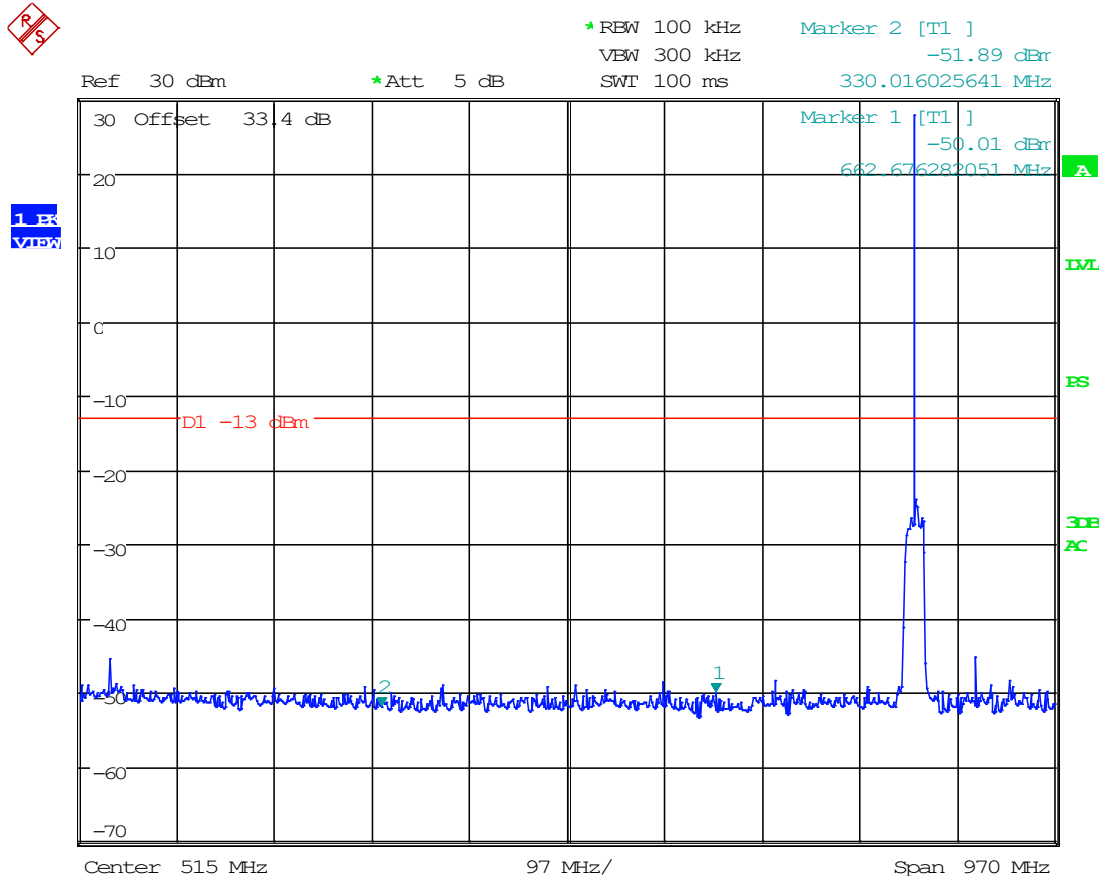

Date: 24.APR.2023 15:03:43





### 8.8.8 1 GHz to 10<sup>th</sup> Harmonic, 860 MHz

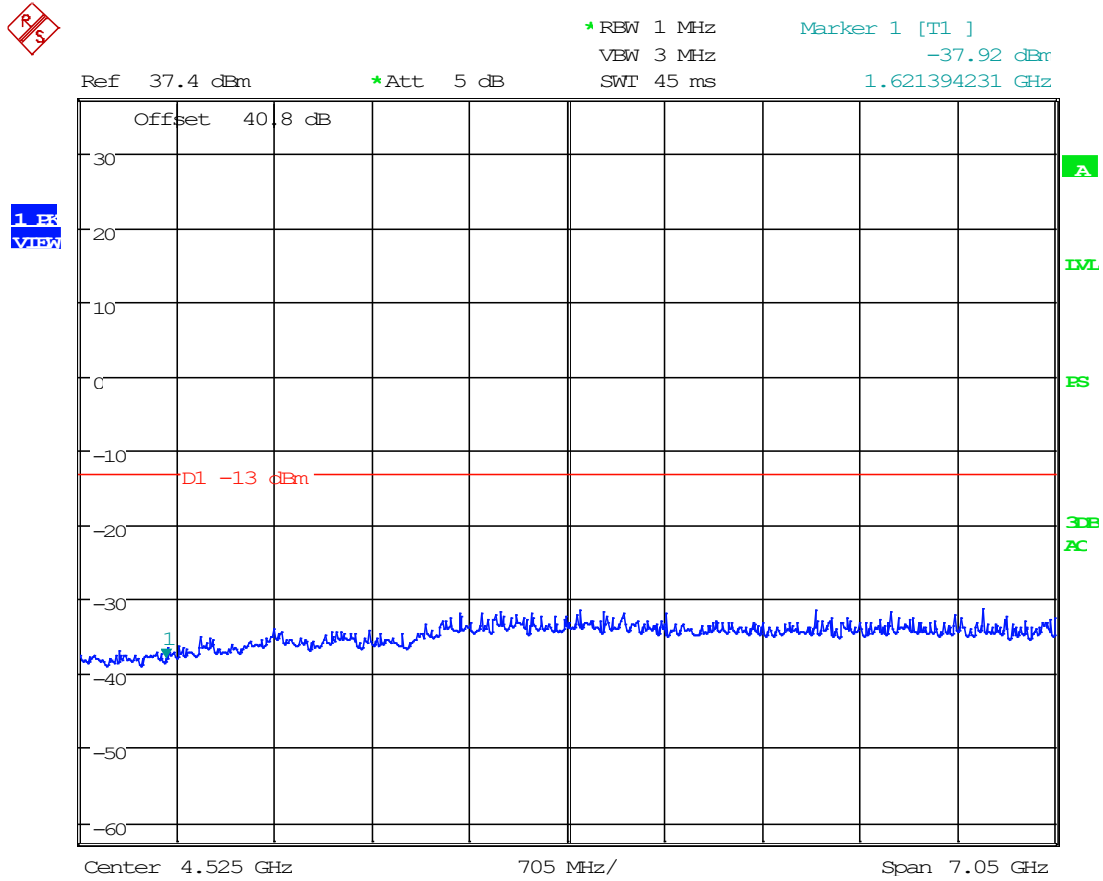

Date: 24.APR.2023 15:10:54

### 8.9 Spurious Radiated Emissions

Limits from FCC Parts 2.1053, 90.210 and test procedure from ANSI C63.26-2015 and FCC KDB 935210 D05 v01r04 Industrial Signal Boosters.

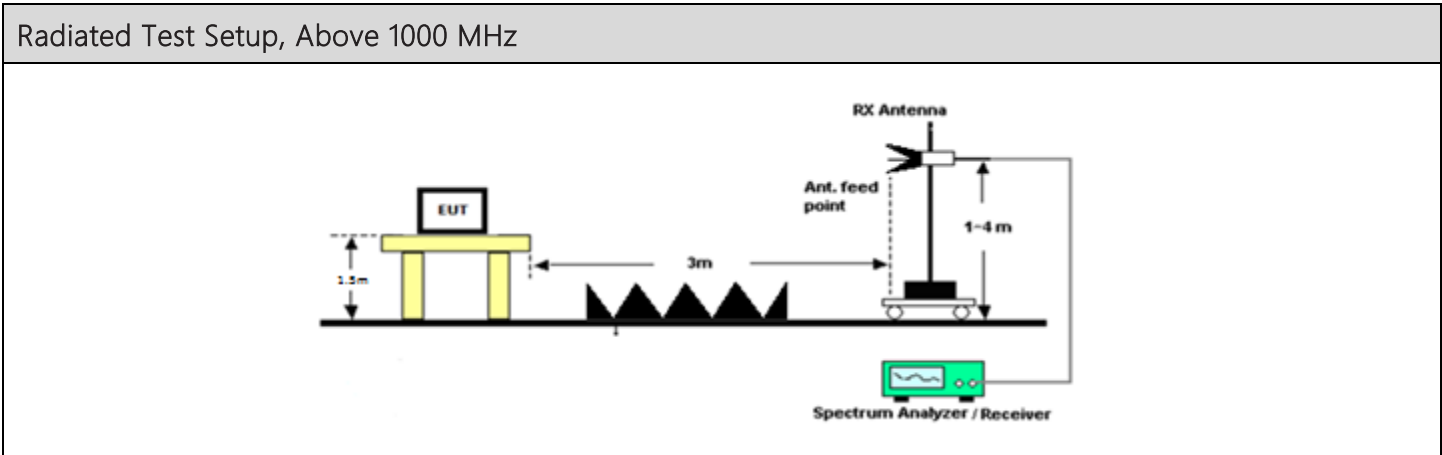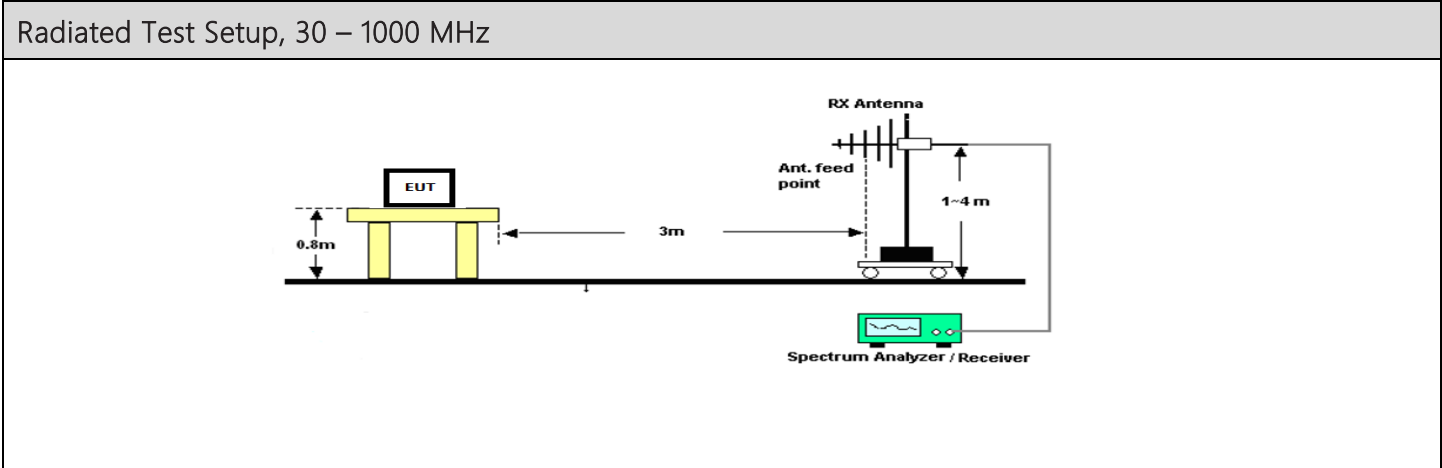



Radiated Emissions, Tabular Data

8.9.1 Downlink, 772 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
772.00	1544.00	PK	11.40	H	4.56	22.04	3.00	38.00	-59.38	-13.00	46.38
772.00	1544.00	PK	10.90	V	4.56	22.04	3.00	37.50	-59.88	-13.00	46.88
772.00	2316.00	PK	11.80	H	5.52	26.45	3.00	43.77	-53.61	-13.00	40.61
772.00	2316.00	PK	12.20	V	5.52	26.45	3.00	44.17	-53.21	-13.00	40.21
772.00	3088.00	PK	13.10	H	6.44	30.87	3.00	50.41	-46.97	-13.00	33.97
772.00	3088.00	PK	13.30	V	6.44	30.87	3.00	50.61	-46.77	-13.00	33.77
772.00	3860.00	PK	15.50	H	6.65	33.21	3.00	55.35	-42.02	-13.00	29.02
772.00	3860.00	PK	15.70	V	6.65	33.21	3.00	55.55	-41.82	-13.00	28.82
772.00	4632.00	PK	14.80	H	7.53	33.96	3.00	56.29	-41.09	-13.00	28.09
772.00	4632.00	PK	15.00	V	7.53	33.96	3.00	56.49	-40.89	-13.00	27.89
772.00	5404.00	PK	15.30	H	8.16	34.36	3.00	57.82	-39.56	-13.00	26.56
772.00	5404.00	PK	14.50	V	8.16	34.36	3.00	57.02	-40.36	-13.00	27.36
772.00	6176.00	PK	15.40	H	8.65	35.33	3.00	59.38	-38.00	-13.00	25.00
772.00	6176.00	PK	14.70	V	8.65	35.33	3.00	58.68	-38.70	-13.00	25.70
772.00	6948.00	PK	14.00	H	9.22	36.11	3.00	59.32	-38.05	-13.00	25.05
772.00	6948.00	PK	14.60	V	9.22	36.11	3.00	59.92	-37.45	-13.00	24.45
772.00	7720.00	PK	14.40	H	10.12	35.87	3.00	60.39	-36.99	-13.00	23.99
772.00	7720.00	PK	14.00	V	10.12	35.87	3.00	59.99	-37.39	-13.00	24.39



Timco Engineering, Inc., an IIA Company  
 849 NW State Road 45, Newberry, Florida 32669  
 (352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

### 8.9.2 Uplink, 802 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
802.00	1604.00	PK	21.00	H	4.66	22.38	3.00	48.04	-49.33	-13.00	36.33
802.00	1604.00	PK	19.60	V	4.66	22.38	3.00	46.64	-50.73	-13.00	37.73
802.00	2406.00	PK	12.30	H	5.61	26.97	3.00	44.88	-52.49	-13.00	39.49
802.00	2406.00	PK	13.70	V	5.61	26.97	3.00	46.28	-51.09	-13.00	38.09
802.00	3208.00	PK	14.00	H	6.63	31.55	3.00	52.18	-45.20	-13.00	32.20
802.00	3208.00	PK	14.30	V	6.63	31.55	3.00	52.48	-44.90	-13.00	31.90
802.00	4010.00	PK	14.70	H	7.25	33.39	3.00	55.34	-42.04	-13.00	29.04
802.00	4010.00	PK	14.80	V	7.25	33.39	3.00	55.44	-41.94	-13.00	28.94
802.00	4812.00	PK	14.00	H	7.12	33.94	3.00	55.05	-42.32	-13.00	29.32
802.00	4812.00	PK	14.10	V	7.12	33.94	3.00	55.15	-42.22	-13.00	29.22
802.00	5614.00	PK	14.70	H	8.20	34.47	3.00	57.38	-40.00	-13.00	27.00
802.00	5614.00	PK	15.10	V	8.20	34.47	3.00	57.78	-39.60	-13.00	26.60
802.00	6416.00	PK	14.50	H	8.95	35.47	3.00	58.93	-38.45	-13.00	25.45
802.00	6416.00	PK	15.10	V	8.95	35.47	3.00	59.53	-37.85	-13.00	24.85
802.00	7218.00	PK	14.80	H	9.53	36.37	3.00	60.70	-36.68	-13.00	23.68
802.00	7218.00	PK	14.40	V	9.53	36.37	3.00	60.30	-37.08	-13.00	24.08
802.00	8020.00	PK	14.90	H	9.93	35.74	3.00	60.57	-36.81	-13.00	23.81
802.00	8020.00	PK	14.90	V	9.93	35.74	3.00	60.57	-36.81	-13.00	23.81



Timco Engineering, Inc., an IIA Company  
 849 NW State Road 45, Newberry, Florida 32669  
 (352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

### 8.9.3 Uplink, 815 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
815.00	1630.00	PK	20.30	H	4.71	22.53	3.00	47.54	-49.84	-13.00	36.84
815.00	1630.00	PK	16.20	V	4.71	22.53	3.00	43.44	-53.94	-13.00	40.94
815.00	2445.00	PK	14.30	H	5.61	27.19	3.00	47.10	-50.28	-13.00	37.28
815.00	2445.00	PK	14.80	V	5.61	27.19	3.00	47.60	-49.78	-13.00	36.78
815.00	3260.00	PK	14.10	H	6.66	31.85	3.00	52.61	-44.76	-13.00	31.76
815.00	3260.00	PK	13.90	V	6.66	31.85	3.00	52.41	-44.96	-13.00	31.96
815.00	4075.00	PK	14.20	H	7.15	33.39	3.00	54.74	-42.64	-13.00	29.64
815.00	4075.00	PK	13.70	V	7.15	33.39	3.00	54.24	-43.14	-13.00	30.14
815.00	4890.00	PK	15.00	H	7.41	33.92	3.00	56.33	-41.05	-13.00	28.05
815.00	4890.00	PK	14.80	V	7.41	33.92	3.00	56.13	-41.25	-13.00	28.25
815.00	5705.00	PK	14.10	H	8.06	34.61	3.00	56.77	-40.60	-13.00	27.60
815.00	5705.00	PK	14.10	V	8.06	34.61	3.00	56.77	-40.60	-13.00	27.60
815.00	6520.00	PK	14.40	H	9.13	35.55	3.00	59.07	-38.30	-13.00	25.30
815.00	6520.00	PK	14.60	V	9.13	35.55	3.00	59.27	-38.10	-13.00	25.10
815.00	7335.00	PK	14.60	H	9.56	36.20	3.00	60.36	-37.01	-13.00	24.01
815.00	7335.00	PK	15.50	V	9.56	36.20	3.00	61.26	-36.11	-13.00	23.11
815.00	8150.00	PK	14.00	H	9.91	35.80	3.00	59.71	-37.67	-13.00	24.67
815.00	8150.00	PK	14.00	V	9.91	35.80	3.00	59.71	-37.67	-13.00	24.67




Timco Engineering, Inc., an IIA Company  
 849 NW State Road 45, Newberry, Florida 32669  
 (352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

### 8.9.4 Downlink, 860 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
860.00	1720.00	PK	11.10	H	4.81	23.05	3.00	38.95	-58.42	-13.00	45.42
860.00	1720.00	PK	11.10	V	4.81	23.05	3.00	38.95	-58.42	-13.00	45.42
860.00	2580.00	PK	12.20	H	5.75	27.96	3.00	45.91	-51.47	-13.00	38.47
860.00	2580.00	PK	12.20	V	5.75	27.96	3.00	45.91	-51.47	-13.00	38.47
860.00	3440.00	PK	13.40	H	6.88	32.61	3.00	52.88	-44.49	-13.00	31.49
860.00	3440.00	PK	13.00	V	6.88	32.61	3.00	52.48	-44.89	-13.00	31.89
860.00	4300.00	PK	14.50	H	7.48	33.46	3.00	55.44	-41.94	-13.00	28.94
860.00	4300.00	PK	14.30	V	7.48	33.46	3.00	55.24	-42.14	-13.00	29.14
860.00	5160.00	PK	14.10	H	7.87	34.11	3.00	56.08	-41.30	-13.00	28.30
860.00	5160.00	PK	13.90	V	7.87	34.11	3.00	55.88	-41.50	-13.00	28.50
860.00	6020.00	PK	14.70	H	8.66	35.15	3.00	58.51	-38.86	-13.00	25.86
860.00	6020.00	PK	14.50	V	8.66	35.15	3.00	58.31	-39.06	-13.00	26.06
860.00	6880.00	PK	14.00	H	9.22	35.90	3.00	59.12	-38.26	-13.00	25.26
860.00	6880.00	PK	14.10	V	9.22	35.90	3.00	59.22	-38.16	-13.00	25.16
860.00	7740.00	PK	14.20	H	10.12	35.87	3.00	60.19	-37.19	-13.00	24.19
860.00	7740.00	PK	13.80	V	10.12	35.87	3.00	59.79	-37.59	-13.00	24.59
860.00	8600.00	PK	15.00	H	10.13	36.04	3.00	61.17	-36.21	-13.00	23.21
860.00	8600.00	PK	15.70	V	10.13	36.04	3.00	61.87	-35.51	-13.00	22.51

## 8.10 Adjacent channel power limits


Limits from FCC Part 90.221, and test procedure from ANSI C63.26-2015.

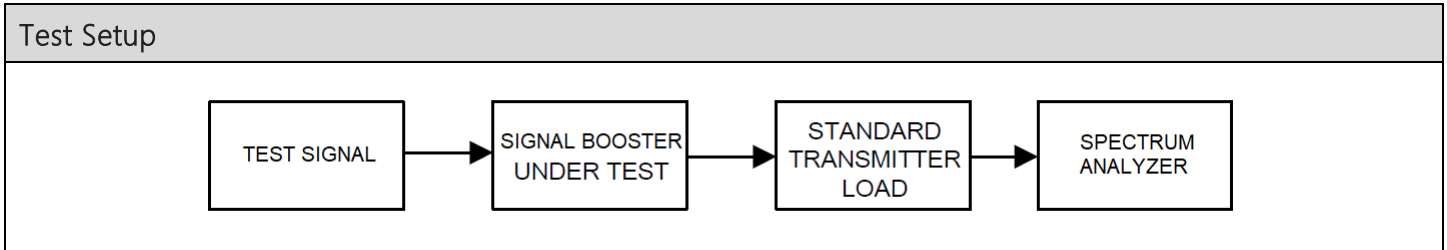






### 8.10.1 ACP, Uplink, 815 MHz

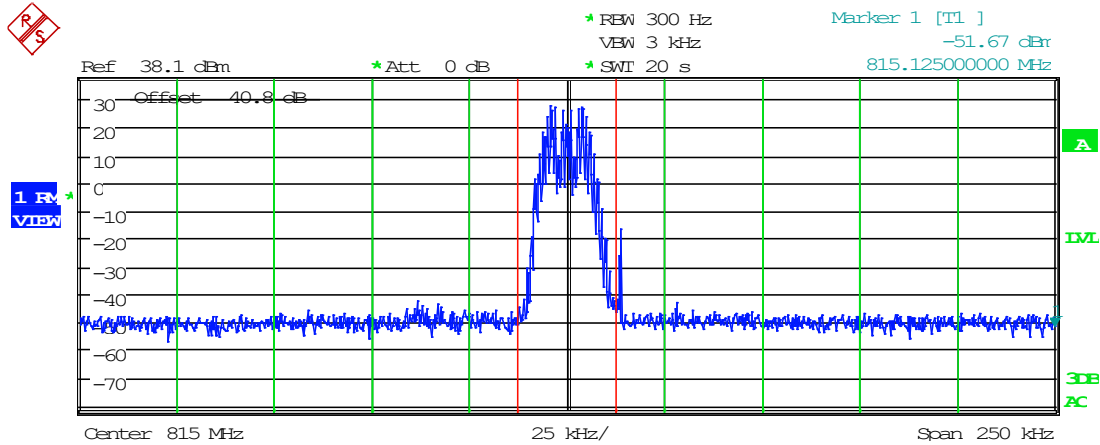

Tx Channel			
Bandwidth	25 kHz	Power	36.60 dBm
Adjacent Channel			
Bandwidth	25 kHz	Lower	-66.75 dB
Spacing	37.5 kHz	Upper	-67.05 dB
Alternate Channel			
Bandwidth	25 kHz	Lower	-67.93 dB
Spacing	62.5 kHz	Upper	-68.06 dB
2nd Alternate Channel			
Bandwidth	25 kHz	Lower	-68.60 dB
Spacing	87.5 kHz	Upper	-68.11 dB

Date: 24.APR.2023 15:21:32

### 8.10.2 ACP, Downlink, 860 MHz

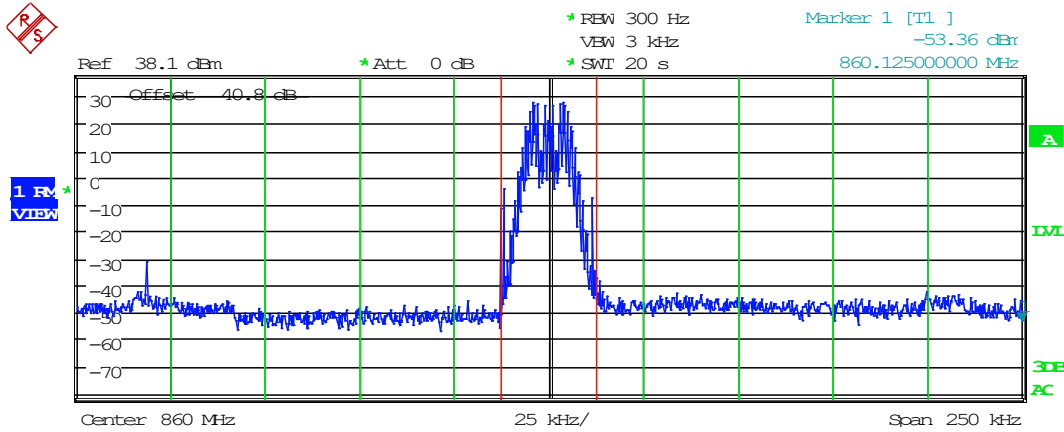

Tx Channel			
Bandwidth	25 kHz	Power	37.00 dBm
Adjacent Channel			
Bandwidth	25 kHz	Lower	-69.80 dB
Spacing	37.5 kHz	Upper	-65.25 dB
Alternate Channel			
Bandwidth	25 kHz	Lower	-70.31 dB
Spacing	62.5 kHz	Upper	-66.33 dB
2nd Alternate Channel			
Bandwidth	25 kHz	Lower	-67.49 dB
Spacing	87.5 kHz	Upper	-66.73 dB

Date: 24.APR.2023 15:20:17



### 9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

### 10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

### 11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_7555-23_FCC 90_Booster Class B_	1	Initial release	5/15/2023



Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

---

END OF TEST REPORT

---