

12/16/2020

BlueCats  
106 E. 6th Street, Suite 900  
Austin, TX 78701

Dear Kris Milam,

Enclosed is the EMC Wireless test report for compliance testing of the BlueCats, BC2510 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15 Subpart C for Intentional Radiators.

Thank you for using the services of Eurofins E&E North America. If you have any questions regarding these results or if we can be of further service to you, please feel free to contact me.

Sincerely yours,  
EUROFINS E&E NORTH AMERICA



Joel Huna  
Documentation Department

Reference: (\BlueCats\WIRA108524-FCC247 Rev. 3)

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins E&E North America. While use of the A2LA logo in this report reflects Eurofins accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.



## Electromagnetic Compatibility Criteria Test Report

for the

**BlueCats  
BC2510**

**Tested under**  
the FCC Certification Rules  
contained in  
15.247 Subpart C for Intentional Radiators

**Report: WIRA108524-FCC247 Rev. 3**

12/16/2020

**Prepared For:**

**BlueCats  
106 E. 6th Street, Suite 900  
Austin, TX 78701**


**Prepared By:**  
**Eurofins E&E North America**  
13501 McCallen Pass, Austin, TX 78753

**Electromagnetic Compatibility Criteria  
Test Report**

for the

**BlueCats  
BC2510****Tested under**  
the FCC Certification Rules  
contained in  
15.247 Subpart C for Intentional RadiatorsAdan Arab, Project Engineer  
Electromagnetic Compatibility LabJoel Huna  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.

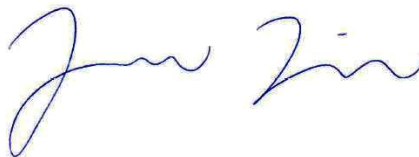Jonathan Tavira,  
Manager, Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	10/27/2020	Initial Issue.
1	11/05/2020	TCB corrections.
2	11/20/2020	TCB corrections.
3	12/16/2020	TCB corrections.

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview .....	4
	B. References.....	5
	C. Test Site .....	5
	D. Measurement Uncertainty .....	5
	E. Description of Test Sample.....	6
	F. Equipment Configuration.....	7
	G. Support Equipment .....	7
	H. Ports and Cabling Information.....	7
	I. Mode of Operation.....	7
	J. Method of Monitoring EUT Operation .....	8
	K. Modifications .....	8
	a) Modifications to EUT.....	8
	b) Modifications to Test Standard.....	8
	L. Disposition of EUT .....	8
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>9</b>
	§ 15.203 Antenna Requirement .....	10
	RSS-247 (6.2.4.1) Duty Cycle.....	11
	§ 15.247(a)(a) 6 dB and 99% Bandwidth .....	12
	§ 15.247(b) Peak Power Output .....	15
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge .....	18
	§ 15.247(c) Spurious Emissions in Non-restricted Bands .....	35
	§ 15.247(e) Peak Power Spectral Density .....	42
	§ 15.247(i) Maximum Permissible Exposure .....	45
<b>IV.</b>	<b>Test Equipment .....</b>	<b>46</b>
<b>V.</b>	<b>Certification &amp; User’s Manual Information.....</b>	<b>48</b>
	A. Certification Information .....	49
	B. Label and User’s Manual Information .....	53

## List of Tables

Table 1: Executive Summary of EMC Part 15.247 Compliance Testing .....	2
Table 2: EUT Summary Table .....	4
Table 3: References .....	5
Table 4: Uncertainty Calculations Summary .....	5
Table 5: Equipment Configuration .....	7
Table 6: Support Equipment .....	7
Table 7: 6 dB Occupied Bandwidth, Test Results .....	12
Table 8: Output Power Requirements from §15.247(b) .....	15
Table 9: Peak Power Output, Test Results .....	15
Table 10: Restricted Bands of Operation .....	18
Table 11: Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a) .....	19
Table 12: Peak Power Spectral Density, Test Results .....	42
Table 13: Test Equipment List .....	47

## List of Figures

Figure 1: Block Diagram of EUT Configuration .....	6
Figure 2: Block Diagram, Duty Cycle Measurement Test Setup .....	11
Figure 3: Duty Cycle, DC, 2402 MHz - BLE >98% .....	11
Figure 4: Block Diagram, Occupied Bandwidth Test Setup .....	12
Figure 5: 6 dB Occupied Bandwidth, 2402 MHz - 1 Mbps - 755.301 KHz .....	13
Figure 6: 6 dB Occupied Bandwidth, 2440 MHz - 1 Mbps - 755.844 KHz .....	13
Figure 7: 6 dB Occupied Bandwidth, 2480 MHz - 1 Mbps - 751.419 KHz .....	13
Figure 8: 6 dB Occupied Bandwidth, 2402 MHz - 2 Mbps - 1.213 MHz .....	14
Figure 9: 6 dB Occupied Bandwidth, 2440 MHz - 2 Mbps - 1.203 MHz .....	14
Figure 10: 6 dB Occupied Bandwidth, 2480 MHz - 2 Mbps - 1.204 MHz .....	14
Figure 11: Power Output Test Setup .....	15
Figure 12: Peak Output Power, 2402 MHz - 1 Mbps - (8.91 dBm) .....	16
Figure 13: Peak Output Power, 2440 MHz - 1 Mbps - (9.00 dBm) .....	16
Figure 14: Peak Output Power, 2480 MHz - 1 Mbps - (9.11 dBm) .....	16
Figure 15: Peak Output Power, 2402 MHz - 2 Mbps - (9.42 dBm) .....	17
Figure 16: Peak Output Power, 2440 MHz - 2 Mbps - (9.50 dBm) .....	17
Figure 17: Peak Output Power, 2480 MHz - 2 Mbps - (9.62 dBm) .....	17
Figure 18: Radiated Emissions Test Setup .....	19
Figure 19: Radiated Spurious Emissions, 2402 MHz - 30-1000 MHz - Horizontal Plot .....	20
Figure 20: Radiated Spurious Emissions, 2402 MHz - 30-1000 MHz - Vertical Plot .....	20
Figure 21: Radiated Spurious Emissions, 2402 MHz - 30-1000 MHz .....	20
Figure 22: Radiated Spurious Emissions, 2402 MHz - 1-18GHz - Average - Horizontal Plot .....	21
Figure 23: Radiated Spurious Emissions, 2402 MHz - 1-18GHz - Average - Vertical Plot .....	21
Figure 24: Radiated Spurious Emissions, 2402 MHz - 1-18GHz - Peak - Horizontal Plot .....	21
Figure 25: Radiated Spurious Emissions, 2402 MHz - 1-18GHz - Peak - Vertical Plot .....	22
Figure 26: Radiated Spurious Emissions, 2402 MHz - 18-25 GHz - Average - Horizontal Plot .....	22
Figure 27: Radiated Spurious Emissions, 2402 MHz - 18-25 GHz - Average - Vertical Plot .....	22
Figure 28: Radiated Spurious Emissions, 2402 MHz - 18-25 GHz - Peak - Horizontal Plot .....	23
Figure 29: Radiated Spurious Emissions, 2402 MHz - 18-25 GHz - Peak - Vertical Plot .....	23
Figure 30: Radiated Emissions, 2402 MHz - 1-25 GHz .....	23
Figure 31: Radiated Spurious Emissions, 2440 MHz - 30-1000 MHz - Horizontal Plot .....	24
Figure 32: Radiated Spurious Emissions, 2440 MHz - 30-1000 MHz - Vertical Plot .....	24
Figure 33: Radiated Spurious Emissions, 2440 MHz - 30-1000 MHz .....	24
Figure 34: Radiated Spurious Emissions, 2440 MHz - 1-18GHz - Average - Horizontal Plot .....	25

Figure 35: Radiated Spurious Emissions, 2440 MHz - 1-18GHz - Average - Vertical Plot .....	25
Figure 36: Radiated Spurious Emissions, 2440 MHz - 1-18GHz - Peak - Horizontal Plot.....	25
Figure 37: Radiated Spurious Emissions, 2440 MHz - 1-18GHz - Peak - Vertical Plot .....	26
Figure 38: Radiated Spurious Emissions, 2440 MHz - 18-25 GHz - Average - Horizontal Plot .....	26
Figure 39: Radiated Spurious Emissions, 2440 MHz - 18-25 GHz - Average - Vertical Plot .....	26
Figure 40: Radiated Spurious Emissions, 2440 MHz - 18-25 GHz - Peak - Horizontal Plot .....	27
Figure 41: Radiated Spurious Emissions, 2440 MHz - 18-25 GHz - Peak - Vertical Plot .....	27
Figure 42: Radiated Emissions, 2440 MHz - 1-25 GHz.....	27
Figure 43: Radiated Spurious Emissions, 2480 MHz - 30-1000 MHz - Horizontal Plot .....	28
Figure 44: Radiated Spurious Emissions, 2480 MHz - 30-1000 MHz - Vertical Plot .....	28
Figure 45: Radiated Spurious Emissions, 2480 MHz - 30-1000 MHz.....	28
Figure 46: Radiated Spurious Emissions, 2480 MHz - 1-18GHz - Average - Horizontal Plot .....	29
Figure 47: Radiated Spurious Emissions, 2480 MHz - 1-18GHz - Average - Vertical Plot .....	29
Figure 48: Radiated Spurious Emissions, 2480 MHz - 1-18GHz - Peak - Horizontal Plot.....	29
Figure 49: Radiated Spurious Emissions, 2480 MHz - 1-18GHz - Peak - Vertical Plot .....	30
Figure 50: Radiated Spurious Emissions, 2480 MHz - 18-25 GHz - Average - Horizontal Plot .....	30
Figure 51: Radiated Spurious Emissions, 2480 MHz - 18-25 GHz - Average - Vertical Plot .....	30
Figure 52: Radiated Spurious Emissions, 2480 MHz - 18-25 GHz - Peak - Horizontal Plot .....	31
Figure 53: Radiated Spurious Emissions, 2480 MHz - 18-25 GHz - Peak - Vertical Plot .....	31
Figure 54: Radiated Emissions, 2480 MHz - 1-25 GHz.....	31
Figure 55: Radiated Lower Band Edge, 2402 MHz - Average - Horizontal Plot.....	32
Figure 56: Radiated Lower Band Edge, 2402 MHz - Average - Vertical Plot.....	32
Figure 57: Radiated Lower Band Edge, 2402 MHz - Peak - Horizontal Plot.....	32
Figure 58: Radiated Lower Band Edge, 2402 MHz - Peak - Vertical Plot.....	33
Figure 59: Radiated Upper Band Edge, 2480 MHz - Average - Horizontal Plot .....	33
Figure 60: Radiated Upper Band Edge, 2480 MHz - Average - Vertical Plot .....	33
Figure 61: Radiated Upper Band Edge, 2480 MHz - Peak - Horizontal Plot.....	34
Figure 62: Radiated Upper Band Edge, 2480 MHz - Peak - Vertical Plot .....	34
Figure 72: Conducted Spurious Emissions, 2402 MHz – 30-10000 MHz - 1 Mbps.....	36
Figure 73: Conducted Spurious Emissions, 2402 MHz - 1-25 GHz - 1 Mbps .....	36
Figure 74: Conducted Spurious Emissions, 2440 MHz - 30-10000 MHz - 1 Mbps.....	36
Figure 75: Conducted Spurious Emissions, 2440 MHz - 1-25 GHz - 1 Mbps .....	37
Figure 76: Conducted Spurious Emissions, 2480 MHz - 30-10000 MHz - 1 Mbps.....	37
Figure 77: Conducted Spurious Emissions, 2480 MHz - 1-25 GHz - 1 Mbps .....	37
Figure 78: Conducted Spurious Emissions, 2402 MHz - 30-10000 MHz - 2 Mbps.....	38
Figure 79: Conducted Spurious Emissions, 2402 MHz - 1-25 GHz - 2 Mbps .....	38
Figure 80: Conducted Spurious Emissions, 2440 MHz - 30-10000 MHz - 2 Mbps.....	38
Figure 81: Conducted Spurious Emissions, 2440 MHz - 1-25 GHz - 2 Mbps .....	39
Figure 82: Conducted Spurious Emissions, 2480 MHz - 30-10000 MHz - 2 Mbps.....	39
Figure 83: Conducted Spurious Emissions, 2480 MHz - 1-25 GHz - 2 Mbps .....	39
Figure 84: Conducted Lower Band Edge, 2402 MHz - 1 Mbps.....	40
Figure 85: Conducted Upper Band Edge, 2480 MHz - 1 Mbps .....	40
Figure 86: Conducted Lower Band Edge, 2402 MHz - 2 Mbps.....	40
Figure 87: Conducted Upper Band Edge, 2480 MHz - 2 Mbps .....	41
Figure 88: Block Diagram, Power Spectral Density Test Setup.....	42
Figure 89: Peak Power Spectral Density, 2402 MHz - 1 Mbps - (7.375 dBm) .....	43
Figure 90: Peak Power Spectral Density, 2440 MHz - 1 Mbps - (7.581 dBm) .....	43
Figure 91: Peak Power Spectral Density, 2480 MHz - 1 Mbps - (7.564 dBm) .....	43
Figure 92: Peak Power Spectral Density, 2402 MHz - 2 Mbps - (7.382 dBm) .....	44
Figure 93: Peak Power Spectral Density, 2440 MHz - 2 Mbps - (7.502 dBm) .....	44
Figure 94: Peak Power Spectral Density, 2480 MHz - 2 Mbps - (7.557 dBm) .....	44





## List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB $\mu$ A	Decibels above one microamp
dB $\mu$ V	Decibels above one microvolt
dB $\mu$ A/m	Decibels above one microamp per meter
dB $\mu$ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
$\mu$ H	microhenry
$\mu$	microfarad
$\mu$ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

# I. Executive Summary

**A. Purpose of Test**

An EMC evaluation was performed to determine compliance of the BlueCats BC2510, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the BC2510. BlueCats should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the BC2510, has been **permanently** discontinued.

**B. Executive Summary**

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with BlueCats, purchase order number PO-BCUS-00523. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference 47 CFR Part 15.247:2020	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	Conducted Emission Limits	Not Applicable
Title 47 of the CFR, Part 15 §15.247(a)(2)	6dB Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)(3)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	Spurious Emissions in Non-restricted Bands	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	Peak Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	Maximum Permissible Exposure (MPE)	Compliant

**Table 1: Executive Summary of EMC Part 15.247 Compliance Testing**

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

## II. Equipment Configuration

**A. Overview**

Eurofins E&E North America was contracted by BlueCats to perform testing on the BC2510, under BlueCats’s purchase order number PO-BCUS-00523.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the BlueCats, BC2510.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	BC2510	
<b>Model(s) Covered:</b>	BC2510	
<b>EUT Specifications:</b>	Primary Power: 3 VDC	
	FCC ID: 2AHXCBC2510	
	Type of Modulations:	GFSK
	Equipment Code:	DTS
	Peak RF Output Power:	9.62 dBm
	EUT Frequency Ranges:	2402-2480 MHz
	Channels:	40
	Data Rates:	1 Mbps, 2 Mbps
	Antenna Type:	Built-In PCB Etched
	Antenna Gain:	0.7 dBi
	Power Setting:	+8 dBm
	Firmware Version:	Functional Test Mode Firmware
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Adan Arab	
<b>Report Date(s):</b>	10/27/2020	

**Table 2: EUT Summary Table**

**B. References**

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2017</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices
<b>KDB 558074 v0502</b>	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under Section 15.247

**Table 3: References**

**C. Test Site**

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

All testing was performed at Eurofins E&E North America, 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at Eurofins E&E North America.

**D. Measurement Uncertainty**

Test Method	Typical Expanded Uncertainty	K	Confidence Level
<b>RF Frequencies</b>	±4.52 Hz	2	95%
<b>RF Power Conducted Emissions</b>	±2.32 dB	2	95%
<b>RF Power Conducted Spurious Emissions</b>	±2.25 dB	2	95%
<b>RF Power Radiated Emissions</b>	±3.01 dB	2	95%

**Table 4: Uncertainty Calculations Summary**

### E. Description of Test Sample

The BlueCats BC2510, Equipment Under Test (EUT), is a Bluetooth beacon powered by a CR2477 primary lithium cell. It has an accelerometer to detect movement, and a magnet sensor to stay in a low power state before activation. It transmits short packets called advertisements containing identifiers, measurements, etc. It can be connected to for firmware and settings updates, as well as downloading any logged measurements or alerts. BC2510 is designed to be mounted to be connected to assets, and its transmissions are typically received by fixed infrastructure to determine the position of BC2510.

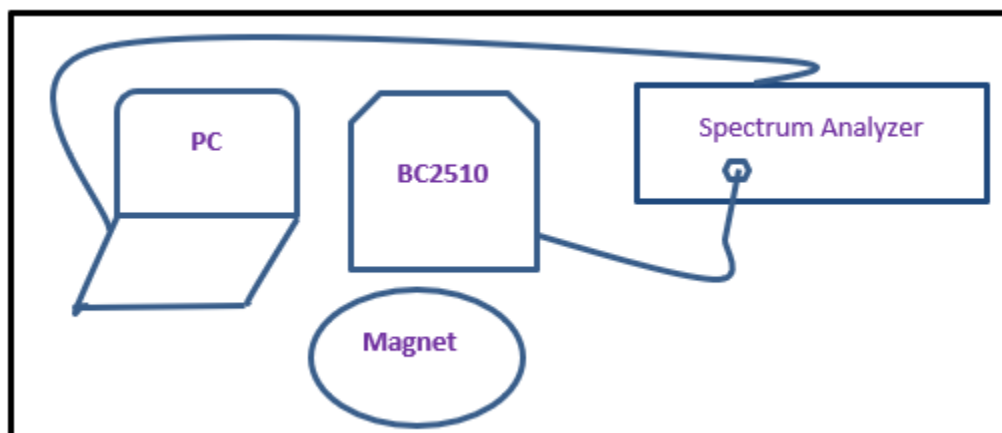


Figure 1: Block Diagram of EUT Configuration

## F. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Slot #	Name/Description	Model Number	Part Number	Serial Number	Rev. #
Conducted #1	N/A	Test Mode with SMA	BC2510	N/A	N/A	N/A
Radiated #2	N/A	Test Mode	BC2510	N/A	N/A	N/A
DTM Mode#3	N/A	DTM Mode	BC2510	N/A	N/A	N/A

**Table 5: Equipment Configuration**

## G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name/Description	Manufacturer	Model Number	Customer Supplied Calibration Data
N/A	Magnet for Changing the channels/Modes	N/A	N/A	N/A

The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

**Table 6: Support Equipment**

## H. Ports and Cabling Information

No ports and cabling were required for testing and monitoring.

## I. Mode of Operation

Test Mode: BC2510 will cycle through 9 states by placing a magnet close to the magnetic sensor. Once the indicator LED starts flashing, the magnet should be taken away to prevent jumping to another state right away. The EUT will continuously transmit a sequence that includes all symbols at a >95% duty cycle in the transmit modes, much greater than the worst case allowed by the BLE protocol. 1 Flashes - TX 2402 Mhz 1Mbps 2 Flashes - TX 2440 Mhz 1Mbps 3 Flashes - TX 2480 Mhz 1Mbps 4 Flashes - TX 2402 Mhz 2Mbps 5 Flashes - TX 2440 Mhz 2Mbps 6 Flashes - TX 2480 Mhz 2Mbps 7 Flashes - RX 2402 Mhz 8 Flashes - RX 2440 Mhz 9 Flashes - RX 2480 Mhz Normal mode: EUT will transmit a typical BLE advertisement periodically on all three advertising channels. DTM Mode: EUT will respond to standard DTM commands to begin RX blocker test, and get results.



## **J. Method of Monitoring EUT Operation**

LED flashing sequence will confirm which mode a test mode EUT is in. A BC510 Edge relay will be provided that will show BLE advertisements from a normal operation unit as they are received via the "Live View" webpage. DTM Mode EUT will communicate with PC running nRF Connect software via UART to begin RX Blocker test, and view results.

## **K. Modifications**

### **a) Modifications to EUT**

No modifications were made to the EUT.

### **b) Modifications to Test Standard**

No modifications were made to the test standard.

## **L. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to BlueCats upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

---

**Electromagnetic Compatibility Criteria for Intentional Radiators****§ 15.203 Antenna Requirement**

**Test Requirement:** § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203. The BC2510 - Asset Tracker used a PCB etched antenna of antenna gain 0.7 dBi as declared by the manufacturer, that is permanently attached. The BC2510 Asset Tracker satisfies all requirements in 15.203.


**Test Engineer(s):** Adan Arab

**Test Date(s):** 08/04/2020

**Electromagnetic Compatibility Criteria for Intentional Radiators**

**ANSI C63.10-2013 (11.6) Duty Cycle**


**Test Procedure:** The EUT was connected to a spectrum analyzer and was ran at the maximum achievable duty cycle for all modes. The duty cycle was measured in accordance with section 11.6 of ANSI C63.10-2013.

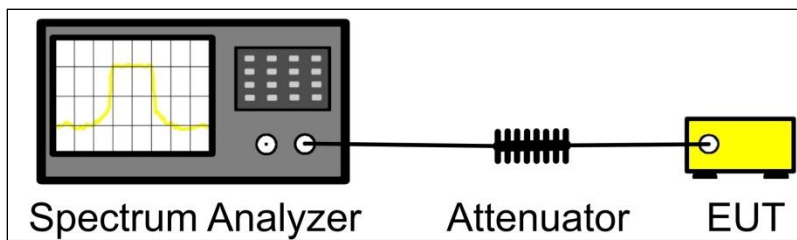

**Figure 2: Block Diagram, Duty Cycle Measurement Test Setup**

**Test Engineer(s):** Adan Arab

**Test Date(s):** 08/04/2020

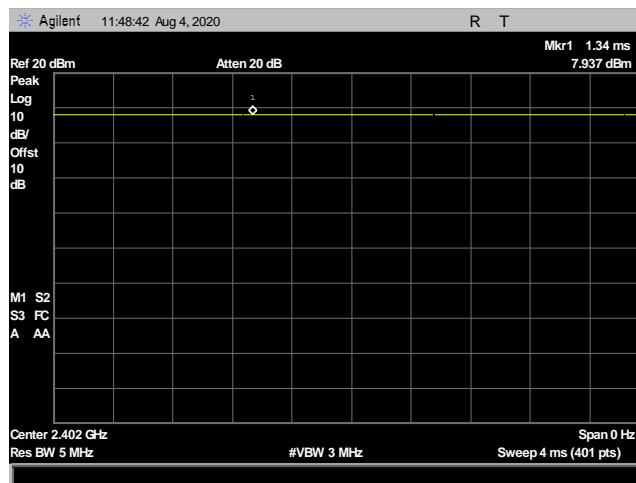

**Figure 3: Duty Cycle, DC, 2402 MHz - BLE >98%**

**§ 15.247(a)(2) 6 dB Bandwidth**

**Test Requirements:** § 15.247(a)(2): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.


**Test Procedure:** The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW = 100kHz, VBW = 3\*RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

**Test Results** The EUT was compliant with § 15.247 (a)(2).

The 6 dB Bandwidth was measured and recorded. Test result plots are on the following pages.

**Test Engineer(s):** Adan Arab

**Test Date(s):** 08/04/2020

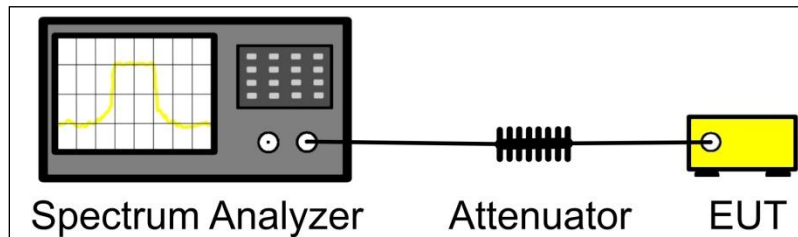

**Figure 4: Block Diagram, Occupied Bandwidth Test Setup**

**Occupied Bandwidth Test Results:**

Occupied Bandwidth			
Mode	Channel (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
1 Mbps	2402	0.7553	≥0.500
1 Mbps	2440	0.7558	≥0.500
1 Mbps	2480	0.7514	≥0.500
2 Mbps	2402	1.213	≥0.500
2 Mbps	2440	1.203	≥0.500
2 Mbps	2480	1.204	≥0.500

**Table 7: 6 dB Occupied Bandwidth, Test Results**

### 6 dB Occupied Bandwidth Test Results

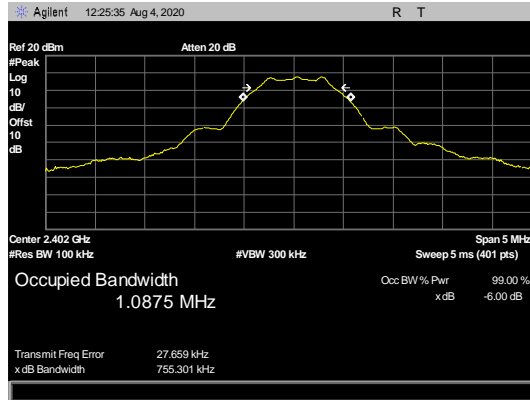


Figure 5: 6 dB Occupied Bandwidth, 2402 MHz - 1 Mbps - 755.301 KHz

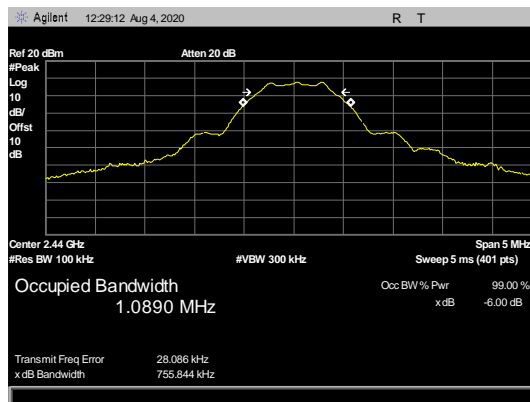


Figure 6: 6 dB Occupied Bandwidth, 2440 MHz - 1 Mbps - 755.844 KHz

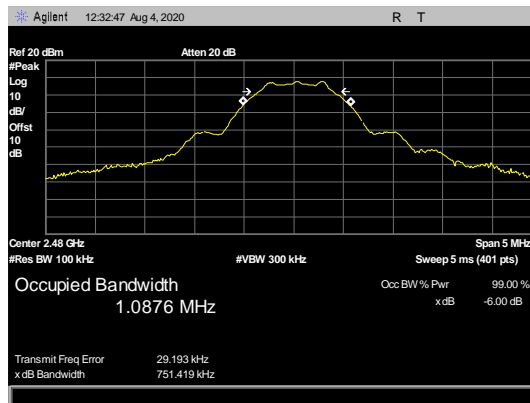


Figure 7: 6 dB Occupied Bandwidth, 2480 MHz - 1 Mbps - 751.419 KHz

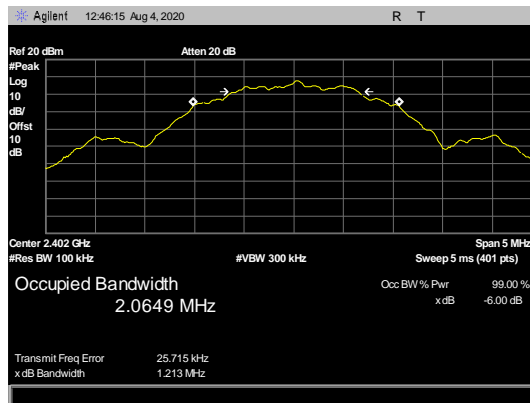


Figure 8: 6 dB Occupied Bandwidth, 2402 MHz - 2 Mbps - 1.213 MHz

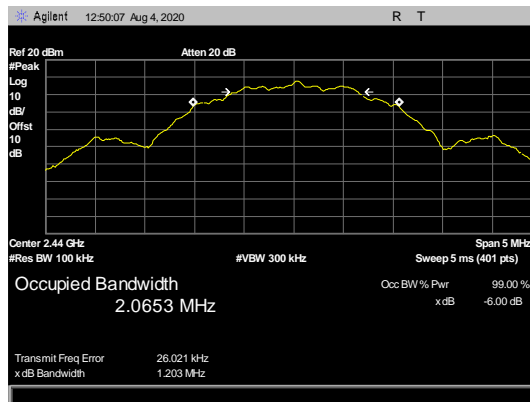


Figure 9: 6 dB Occupied Bandwidth, 2440 MHz - 2 Mbps - 1.203 MHz

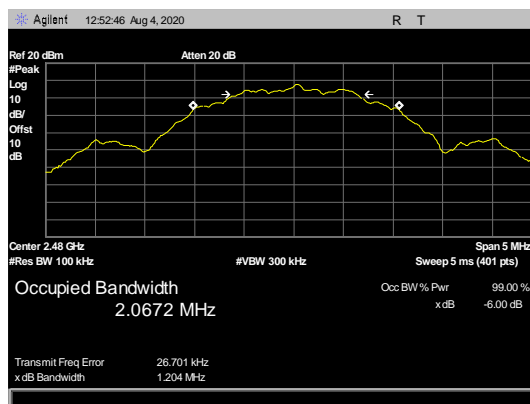


Figure 10: 6 dB Occupied Bandwidth, 2480 MHz - 2 Mbps - 1.204 MHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output

**Test Requirements:** §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
2400–2483.5	1.000

**Table 8: Output Power Requirements from §15.247(b)**


§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in Table 8, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Test Procedure:** The EUT was connected to a spectrum analyzer through a cable and an attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels for all its bandwidths at maximum power. Power was measured according to measurement method Maximum Conducted Output Power, as described in ANSI C63.10-2013, section 11.9.1 Attenuator and cable loss were programmed into the spectrum analyzer.

**Test Results:** The EUT was compliant with the Peak Power Output limits of §15.247(b). Peak Output Power was measured and recorded. The test result and plots on the following pages

**Test Engineer(s):** Adan Arab

**Test Date(s):** 08/04/2020

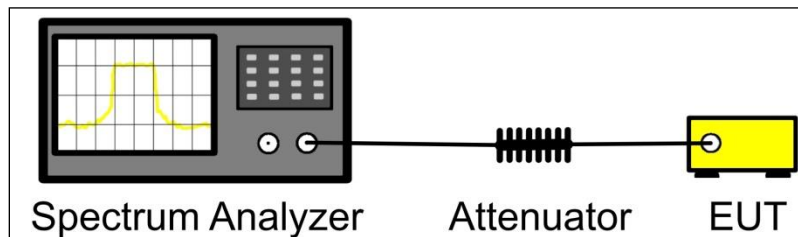

**Figure 11: Power Output Test Setup**


### Peak Power Output Test Results:

Peak Conducted Output Power			
Mode	Channel (MHz)	Peak Output Power (dBm)	Limit (dBm)
1 Mbps	2402	8.91	30
1 Mbps	2440	9.00	30
1 Mbps	2480	9.11	30
2 Mbps	2402	9.42	30
2 Mbps	2440	9.50	30
2 Mbps	2480	9.62	30


**Table 9: Peak Power Output, Test Results**




**Peak Power Output Test Results**

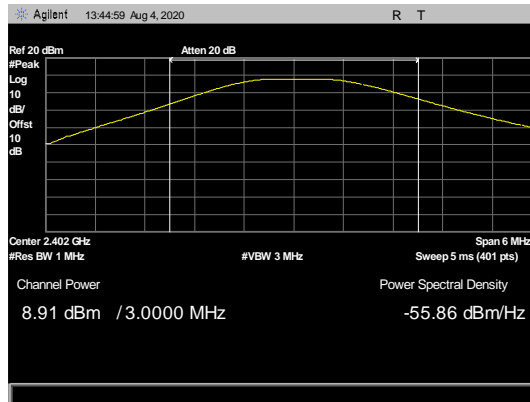

**Figure 12: Peak Output Power, 2402 MHz - 1 Mbps - (8.91 dBm)**

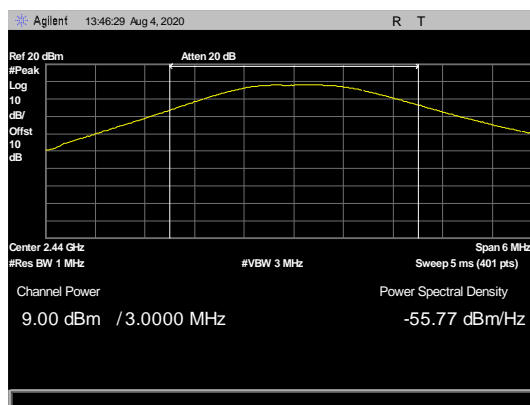

**Figure 13: Peak Output Power, 2440 MHz - 1 Mbps - (9.00 dBm)**

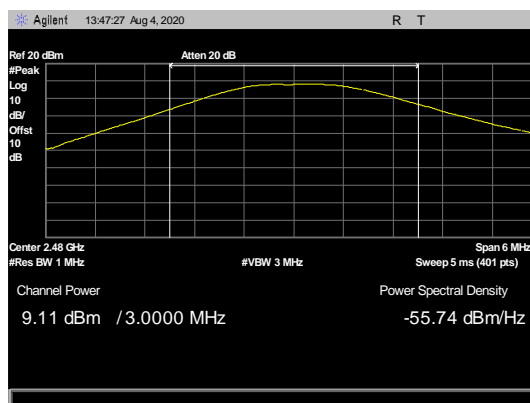

**Figure 14: Peak Output Power, 2480 MHz - 1 Mbps - (9.11 dBm)**

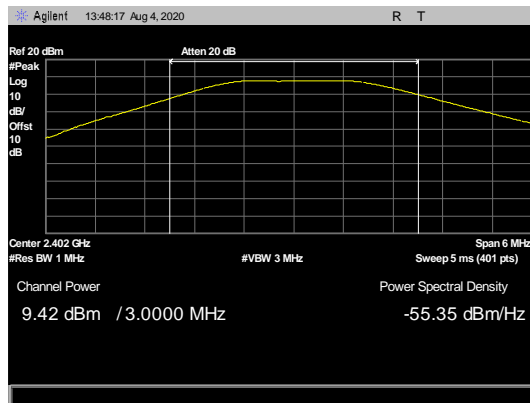


Figure 15: Peak Output Power, 2402 MHz - 2 Mbps - (9.42 dBm)

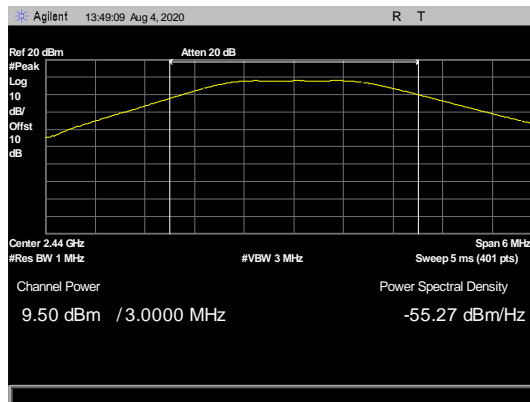


Figure 16: Peak Output Power, 2440 MHz - 2 Mbps - (9.50 dBm)

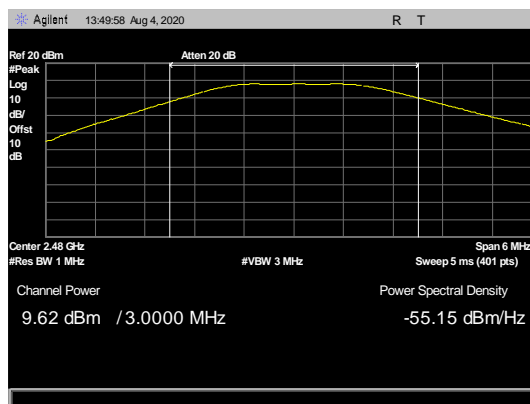


Figure 17: Peak Output Power, 2480 MHz - 2 Mbps - (9.62 dBm)

**Electromagnetic Compatibility Criteria for Intentional Radiators**

**§ 15.209 Radiated Spurious Emissions Requirements and Band Edge**

**Test Requirements:** §15.247(d); §15.205: Emissions outside the frequency band.

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358 36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	( <sup>2</sup> )

**Table 10: Restricted Bands of Operation**

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

<sup>2</sup> Above 38.6

**Test Requirement(s):** § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 11.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB $\mu$ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00


**Table 11: Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)**

**Test Procedures:** The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

**Test Results:** The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d) and § 15.209.


**Test Engineer(s):** Adan Arab

**Test Date(s):** 08/04/2020

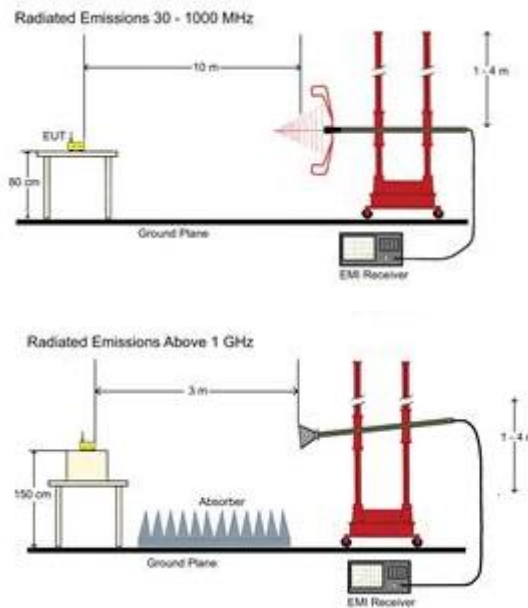


**Figure 18: Radiated Emissions Test Setup**

**Radiated Spurious Emissions, Test Results**

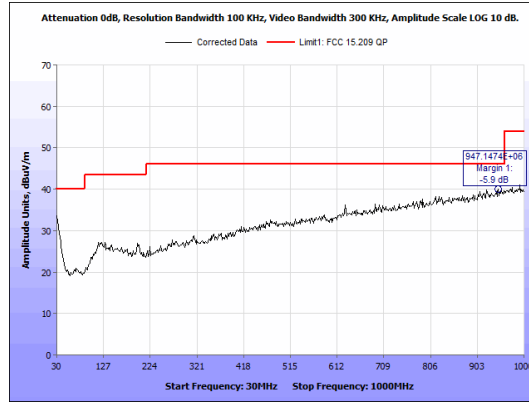

**Figure 19: Radiated Spurious Emissions, 2402 MHz - 30-1000 MHz - Horizontal Plot**

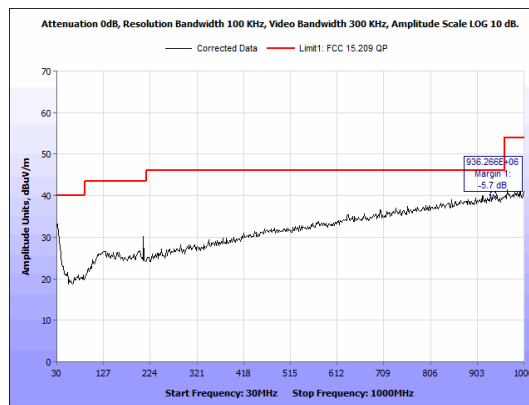

**Figure 20: Radiated Spurious Emissions, 2402 MHz - 30-1000 MHz - Vertical Plot**

Frequency (MHz)	Uncorrected Amplitude (dBuV)	Antenna polarity	Detector	RBW (KHz)	Distance Correction Factor (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Corrected Amplitude dBuV/m	Limit, 15.209 QP (dBuV/m)	Margin (dB)
936.2660	22.06	V	QP	100	10.46	27.1	-19.32	40.3	46	-5.7
931.6026	22.11	V	QP	100	10.46	27.06	-19.37	40.26	46	-5.74
947.1474	22.17	H	QP	100	10.46	26.71	-19.24	40.1	46	-5.9
937.8205	21.76	V	QP	100	10.46	27.1	-19.3	40.01	46	-5.99
922.2756	22.37	H	QP	100	10.46	26.5	-19.44	39.9	46	-6.1
953.3654	21.55	H	QP	100	10.46	26.8	-19.2	39.61	46	-6.39

**Figure 21: Radiated Spurious Emissions, 2402 MHz - 30-1000 MHz**

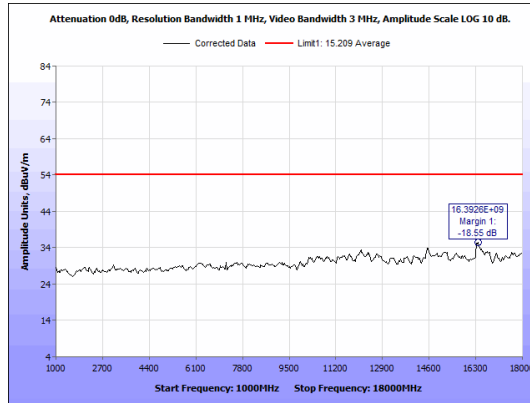


Figure 22: Radiated Spurious Emissions, 2402 MHz - 1-18GHz - Average - Horizontal Plot

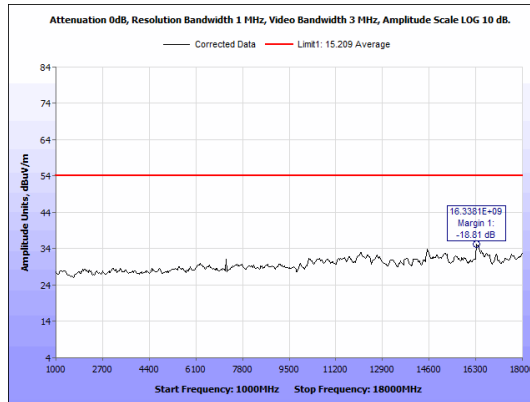


Figure 23: Radiated Spurious Emissions, 2402 MHz - 1-18GHz - Average - Vertical Plot

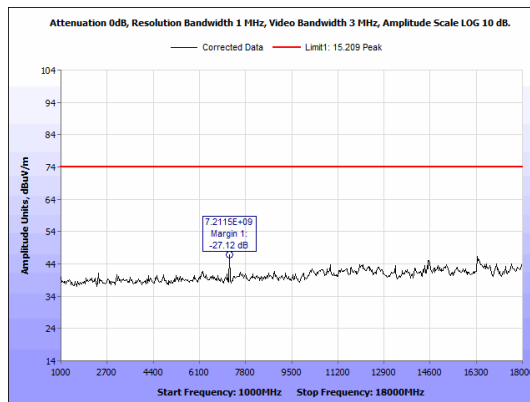


Figure 24: Radiated Spurious Emissions, 2402 MHz - 1-18GHz - Peak - Horizontal Plot

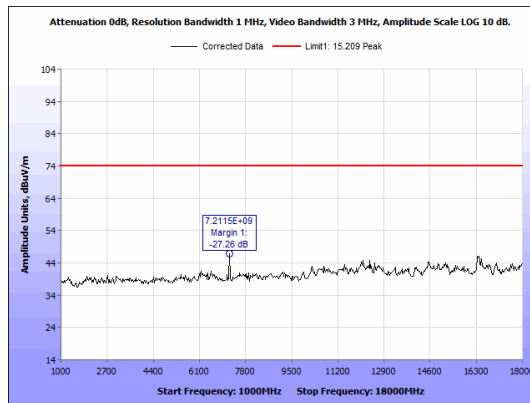


Figure 25: Radiated Spurious Emissions, 2402 MHz - 1-18GHz - Peak - Vertical Plot

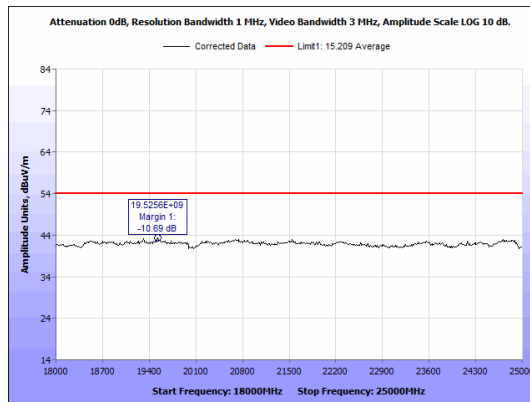


Figure 26: Radiated Spurious Emissions, 2402 MHz - 18-25 GHz - Average - Horizontal Plot

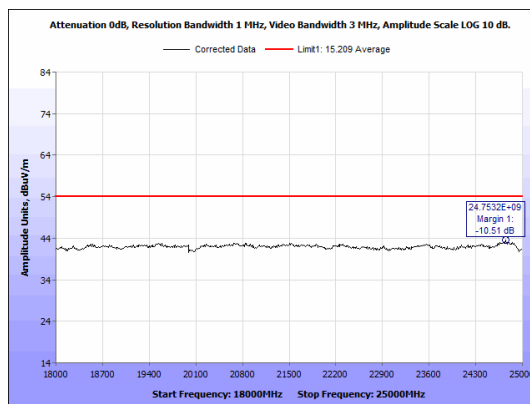


Figure 27: Radiated Spurious Emissions, 2402 MHz - 18-25 GHz - Average - Vertical Plot

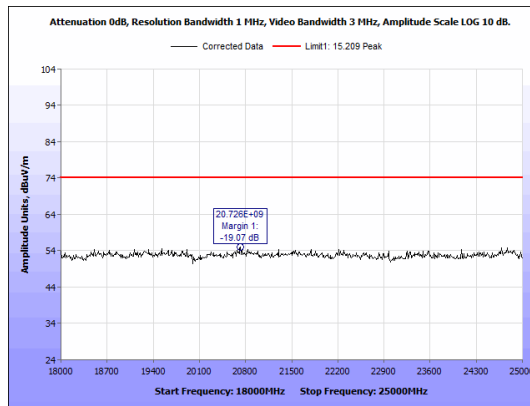


Figure 28: Radiated Spurious Emissions, 2402 MHz - 18-25 GHz - Peak - Horizontal Plot

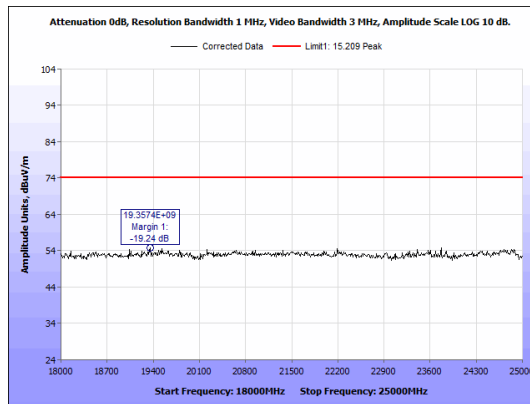


Figure 29: Radiated Spurious Emissions, 2402 MHz - 18-25 GHz - Peak - Vertical Plot

Frequency (GHz)	Uncorrected Amplitude (dBuV)	Antenna Polarity	Detector	RBW (MHz)	Antenna Factor (dB/m)	Preamp Factor (dB)	Corrected Amplitude (dBuV/m)	Limit 1, 15.209 Average (dBuV/m)	Limit 2, 15.209 Peak (dBuV/m)	Margin 1, (dB)	Margin 2, (dB)
16.3926	35.91	H	Average	1	40.57	-41.03	35.45	54	--	-18.55	--
16.3381	35.87	V	Average	1	40.48	-41.16	35.19	54	--	-18.81	--
7.2115	51.49	H	Peak	1	35.38	-40	46.88	--	74	--	-27.12
7.2115	51.38	V	Peak	1	35.35	-40	46.74	--	74	--	-27.26
19.5256	32.12	H	Average	1	44.55	33.01	43.31	54	--	-10.69	--
24.7532	30.06	V	Average	1	45.37	-31.94	43.49	54	--	-10.51	--
20.7260	43.59	H	Peak	1	45.17	-33.38	54.93	--	74	--	-19.07
19.3574	43.53	V	Peak	1	44.35	-33.1	54.76	--	74	--	-19.24

Figure 30: Radiated Emissions, 2402 MHz - 1-25 GHz.



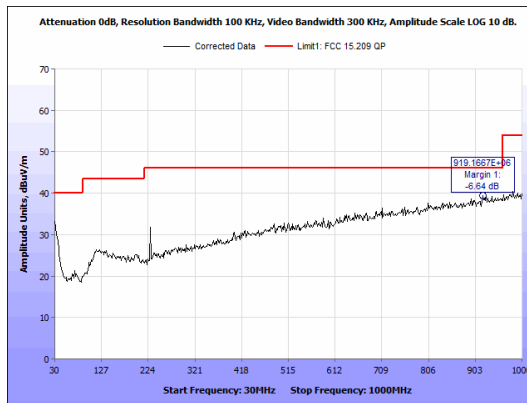


Figure 31: Radiated Spurious Emissions, 2440 MHz - 30-1000 MHz - Horizontal Plot

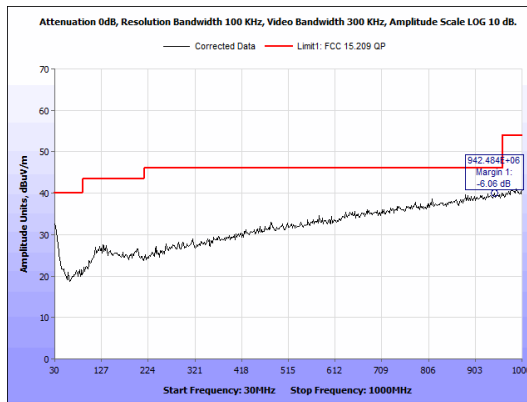


Figure 32: Radiated Spurious Emissions, 2440 MHz - 30-1000 MHz - Vertical Plot

Frequency (MHz)	Uncorrected Amplitude (dBuV)	Antenna polarity	Detector	RBW (KHz)	Distance Correction Factor (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Corrected Amplitude dBuV/m	Limit, 15.209 QP (dBuV/m)	Margin (dB)
942.4840	21.55	V	QP	100	10.46	27.2	-19.27	39.94	46	-6.06
958.0288	21.33	V	QP	100	10.46	27.3	-19.16	39.93	46	-6.07
930.0481	21.7	H	QP	100	10.46	27.1	-19.39	39.87	46	-6.13
919.1667	21.86	V	QP	100	10.46	26.5	-19.46	39.36	46	-6.64
925.3846	21.65	H	QP	100	10.46	26.64	-19.42	39.33	46	-6.67
937.8205	21.39	H	QP	100	10.46	26.7	-19.3	39.25	46	-6.75

Figure 33: Radiated Spurious Emissions, 2440 MHz - 30-1000 MHz

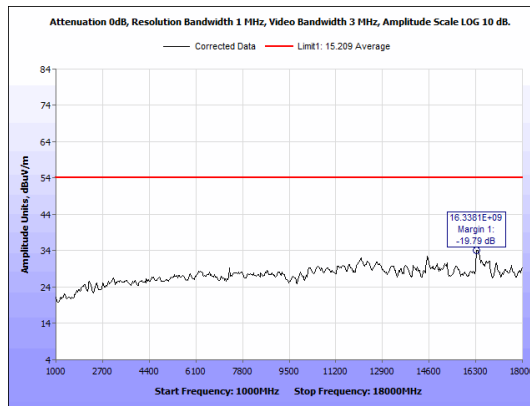


Figure 34: Radiated Spurious Emissions, 2440 MHz - 1-18GHz - Average - Horizontal Plot

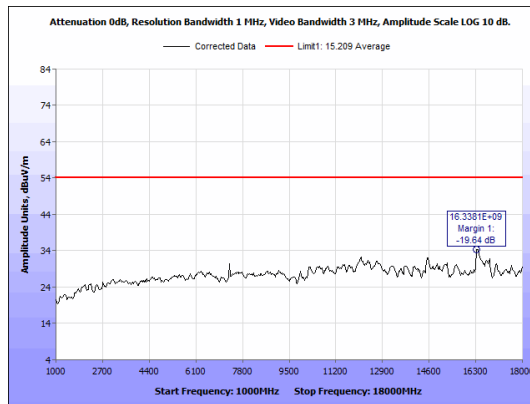


Figure 35: Radiated Spurious Emissions, 2440 MHz - 1-18GHz - Average - Vertical Plot

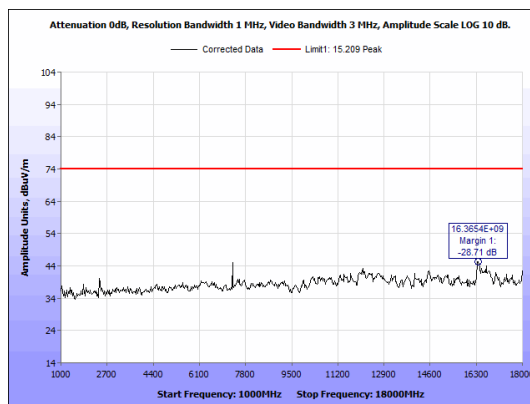


Figure 36: Radiated Spurious Emissions, 2440 MHz - 1-18GHz - Peak - Horizontal Plot

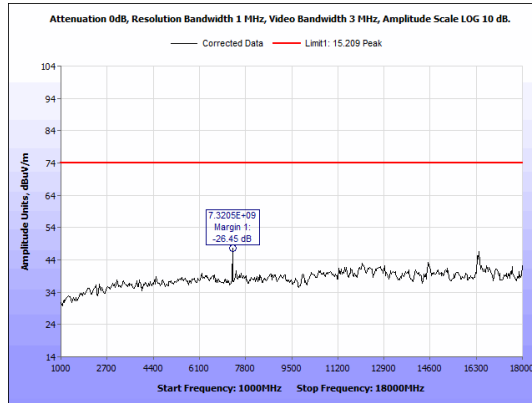


Figure 37: Radiated Spurious Emissions, 2440 MHz - 1-18GHz - Peak - Vertical Plot

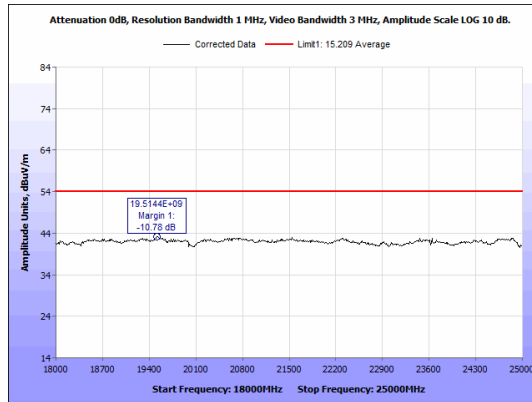


Figure 38: Radiated Spurious Emissions, 2440 MHz - 18-25 GHz - Average - Horizontal Plot

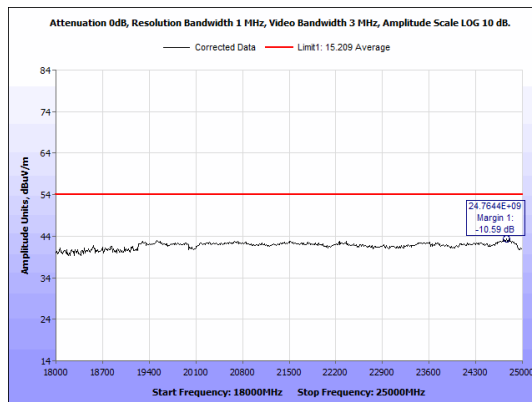


Figure 39: Radiated Spurious Emissions, 2440 MHz - 18-25 GHz - Average - Vertical Plot

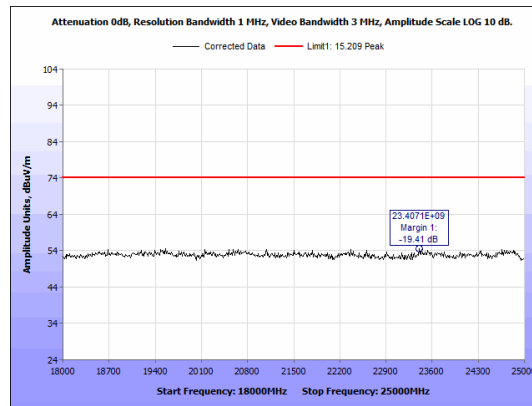


Figure 40: Radiated Spurious Emissions, 2440 MHz - 18-25 GHz - Peak - Horizontal Plot

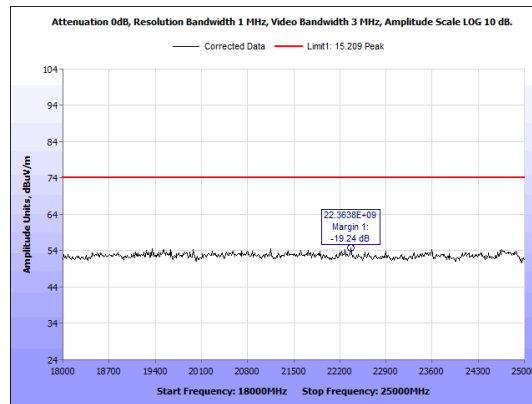


Figure 41: Radiated Spurious Emissions, 2440 MHz - 18-25 GHz - Peak - Vertical Plot

Frequency (GHz)	Uncorrected Amplitude (dBuV)	Antenna Polarity	Detector	RBW (MHz)	Antenna Factor (dB/m)	Preamp Factor (dB)	Corrected Amplitude (dBuV/m)	Limit 1, 15.209 Average (dBuV/m)	Limit 2, 15.209 Peak (dBuV/m)	Margin 1, (dB)	Margin 2, (dB)
16.3381	34.88	H	Average	1	40.5	-41.16	34.21	54	--	-19.79	--
16.3381	35.04	V	Average	1	40.48	-41.16	34.36	54	--	-19.64	--
16.3654	45.85	H	Peak	1	40.53	-41.1	45.29	--	74	--	-28.71
7.3205	52.09	V	Peak	1	35.39	-39.93	47.55	--	74	--	-26.45
19.5144	32.01	H	Average	1	44.55	-33.34	43.22	54	--	-10.78	--
24.7644	29.98	V	Average	1	45.38	-31.94	43.41	54	--	-10.59	--
23.4071	41.43	H	Peak	1	45.21	-32.06	54.59	--	74	--	-19.41
22.3638	42.32	V	Peak	1	45.09	-32.66	54.76	--	74	--	-19.24

Figure 42: Radiated Emissions, 2440 MHz - 1-25 GHz.

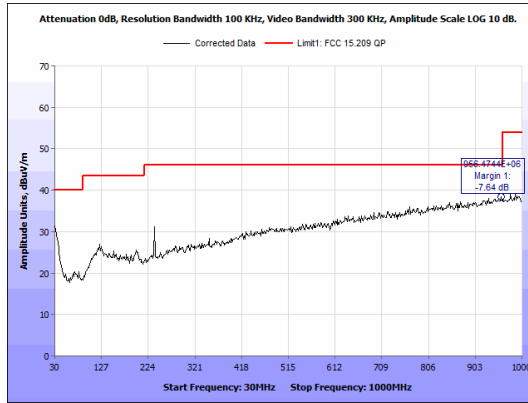


Figure 43: Radiated Spurious Emissions, 2480 MHz - 30-1000 MHz - Horizontal Plot

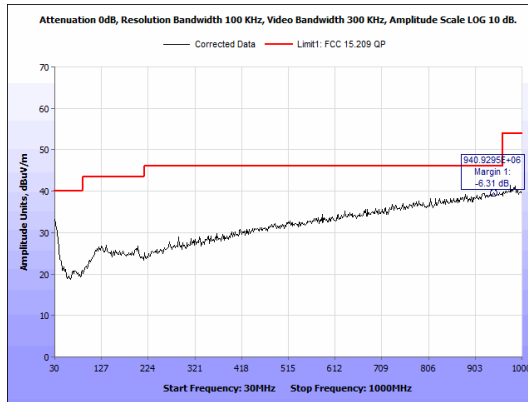


Figure 44: Radiated Spurious Emissions, 2480 MHz - 30-1000 MHz - Vertical Plot

Frequency (MHz)	Uncorrected Amplitude (dBuV)	Antenna polarity	Detector	RBW (KHz)	Distance Correction Factor (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Corrected Amplitude dBuV/m	Limit, 15.209 QP (dBuV/m)	Margin (dB)
940.9295	21.4	V	QP	100	10.46	27.11	-19.28	39.69	46	-6.31
953.3654	21.11	V	QP	100	10.46	27.2	-19.2	39.57	46	-6.43
942.484	21.01	H	QP	100	10.46	27.2	-19.27	39.4	46	-6.6
956.4744	20.27	V	QP	100	10.46	26.8	-19.17	38.36	46	-7.64
931.6026	20.38	H	QP	100	10.46	26.6	-19.37	38.07	46	-7.93
942.484	20.06	H	QP	100	10.46	26.65	-19.27	37.9	46	-8.1

Figure 45: Radiated Spurious Emissions, 2480 MHz - 30-1000 MHz

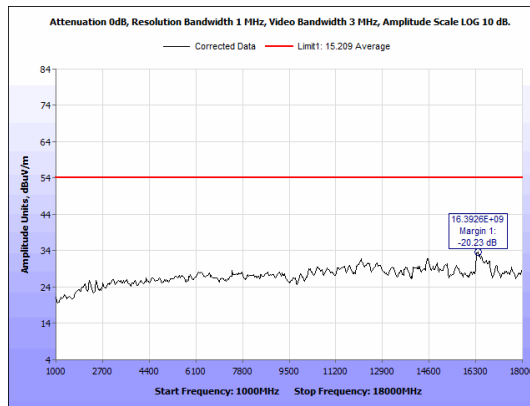


Figure 46: Radiated Spurious Emissions, 2480 MHz - 1-18GHz - Average - Horizontal Plot

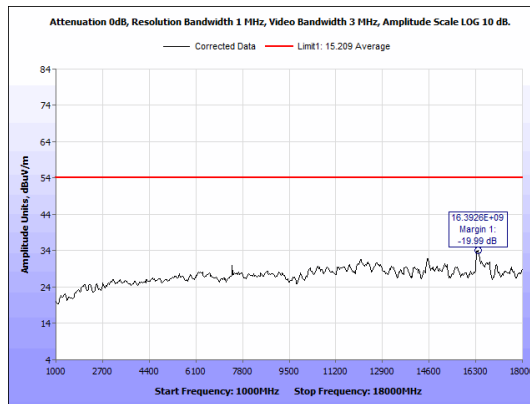


Figure 47: Radiated Spurious Emissions, 2480 MHz - 1-18GHz - Average - Vertical Plot

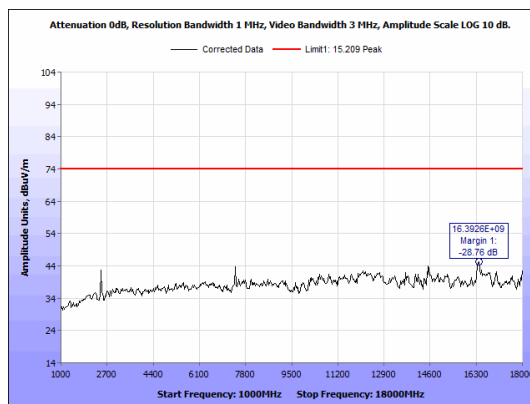


Figure 48: Radiated Spurious Emissions, 2480 MHz - 1-18GHz - Peak - Horizontal Plot

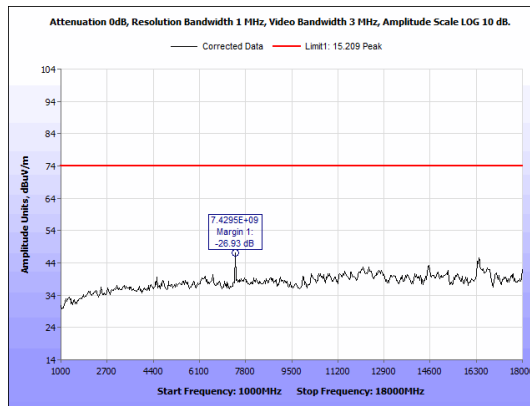


Figure 49: Radiated Spurious Emissions, 2480 MHz - 1-18GHz - Peak - Vertical Plot

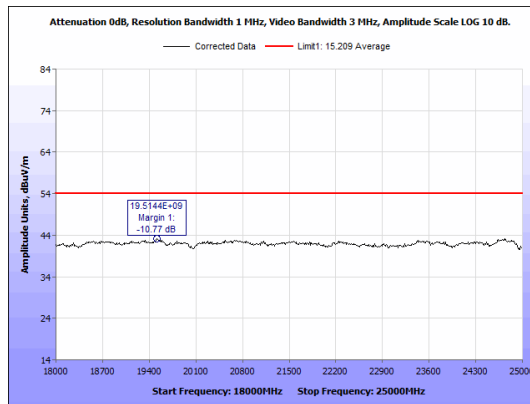


Figure 50: Radiated Spurious Emissions, 2480 MHz - 18-25 GHz - Average - Horizontal Plot

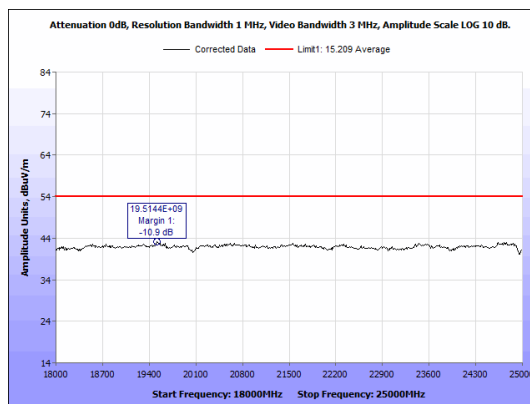


Figure 51: Radiated Spurious Emissions, 2480 MHz - 18-25 GHz - Average - Vertical Plot

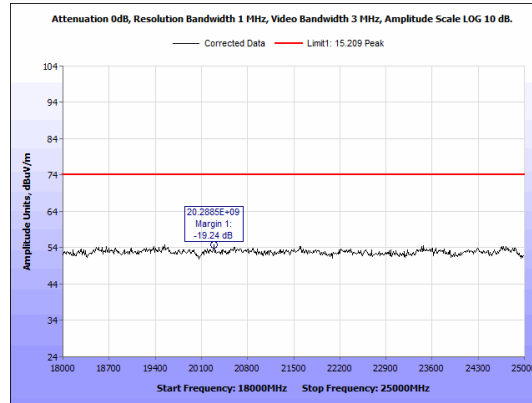


Figure 52: Radiated Spurious Emissions, 2480 MHz - 18-25 GHz - Peak - Horizontal Plot

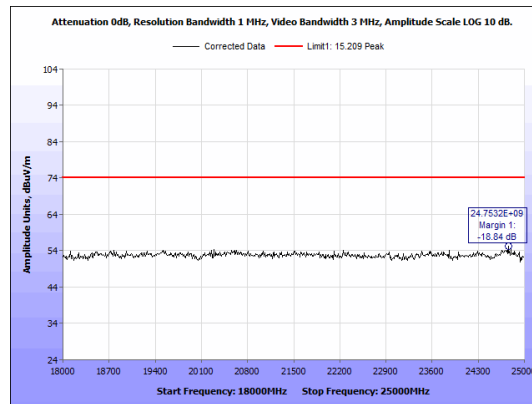


Figure 53: Radiated Spurious Emissions, 2480 MHz - 18-25 GHz - Peak - Vertical Plot

Frequency (GHz)	Uncorrected Amplitude (dBuV)	Antenna Polarity	Detector	RBW (MHz)	Antenna Factor (dB/m)	Preamp Factor (dB)	Corrected Amplitude (dBuV/m)	Limit 1, 15.209 Average (dBuV/m)	Limit 2, 15.209 Peak (dBuV/m)	Margin 1, (dB)	Margin 2, (dB)
16.3926	34.23	H	Average	1	40.57	-41.03	33.77	54	--	-20.23	--
16.3926	34.49	V	Average	1	40.55	-41.03	34.01	54	--	-19.99	--
16.3926	45.7	H	Peak	1	40.57	-41.03	45.24	--	74	--	-28.76
7.4295	51.24	V	Peak	1	35.38	-39.55	47.07	--	74	--	-26.93
19.5144	32.03	H	Average	1	44.55	-33.34	43.23	54	--	-10.77	--
19.5144	32.04	V	Average	1	44.4	-33.34	43.1	54	--	-10.9	--
20.2885	44.04	H	Peak	1	44.87	-34.16	54.76	--	74	--	-19.24
24.7532	41.73	V	Peak	1	45.37	-31.94	55.16	--	74	--	-18.84

Figure 54: Radiated Emissions, 2480 MHz - 1-25 GHz.



## Radiated Band Edge Measurements

**Test Procedures:** The transmitter was turned on. Measurements were performed of the low and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

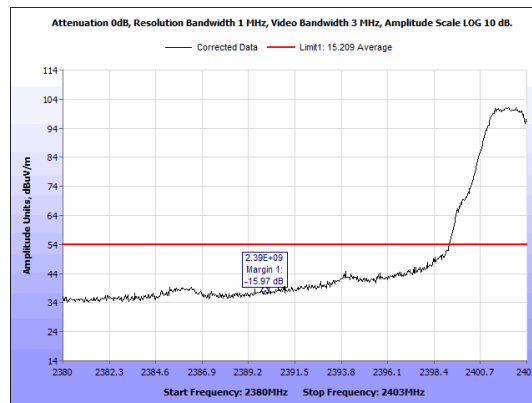


Figure 55: Radiated Lower Band Edge, 2402 MHz - Average - Horizontal Plot

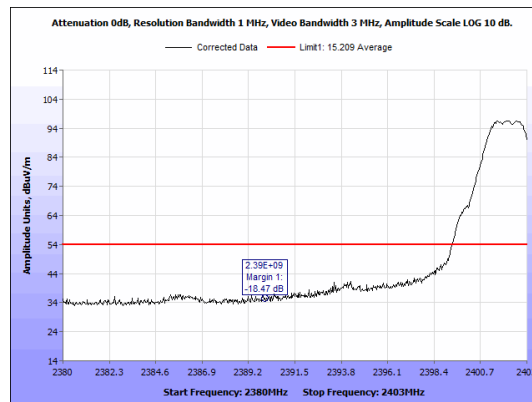


Figure 56: Radiated Lower Band Edge, 2402 MHz - Average - Vertical Plot

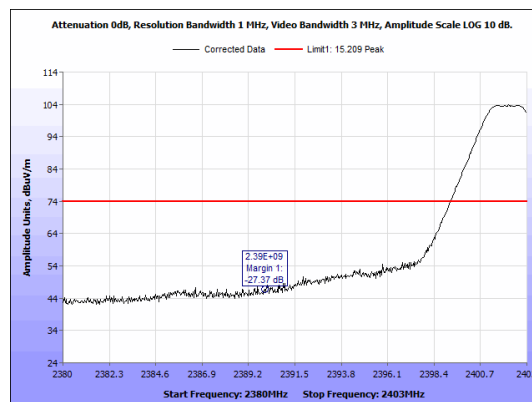


Figure 57: Radiated Lower Band Edge, 2402 MHz - Peak - Horizontal Plot

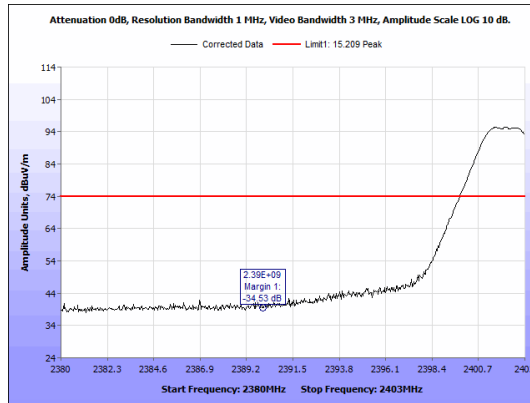


Figure 58: Radiated Lower Band Edge, 2402 MHz - Peak - Vertical Plot

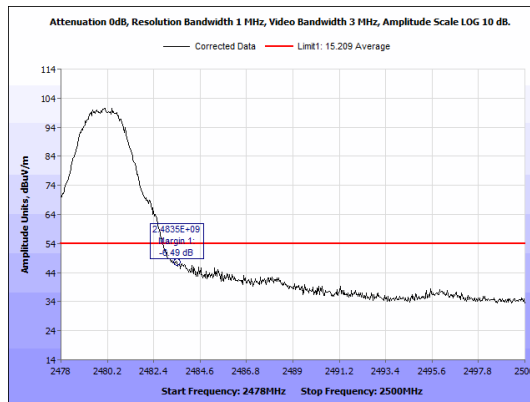


Figure 59: Radiated Upper Band Edge, 2480 MHz - Average - Horizontal Plot

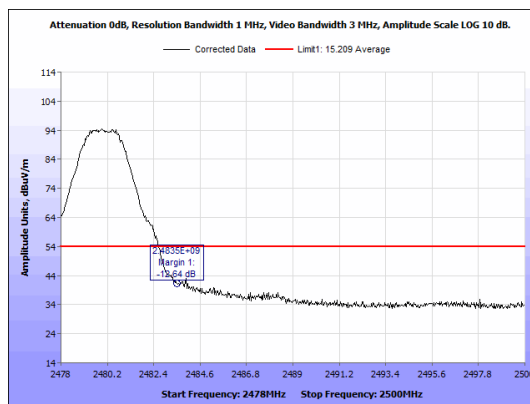


Figure 60: Radiated Upper Band Edge, 2480 MHz - Average - Vertical Plot

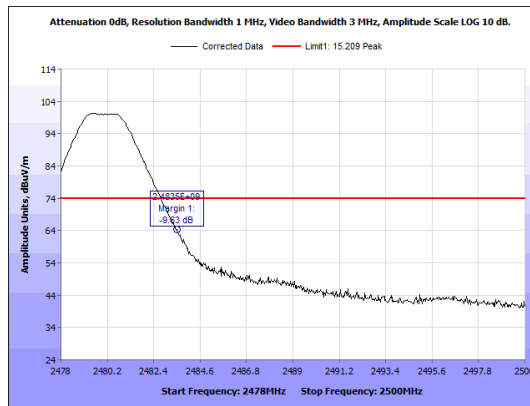


Figure 61: Radiated Upper Band Edge, 2480 MHz - Peak - Horizontal Plot

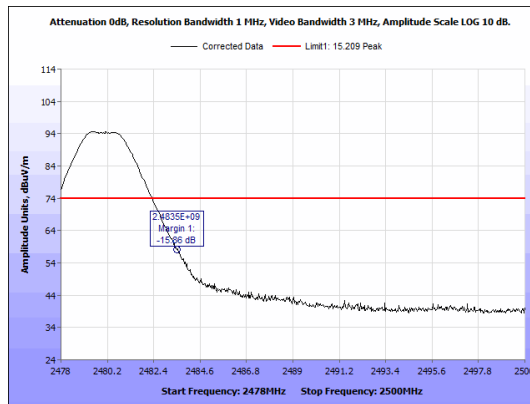


Figure 62: Radiated Upper Band Edge, 2480 MHz - Peak - Vertical Plot

---

**Electromagnetic Compatibility Criteria for Intentional Radiators****§ 15.247(d) Spurious Emissions in Non-restricted Bands**

**Test Requirement:** **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Test Procedure:** For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

The EUT was connected to a spectrum analyzer through a cable and an attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels for all its bandwidths at maximum power. Conducted spurious emissions were measured according to sections 11.11.2 and 11.11.3 of ANSI C63.10-2013.

Conducted measurements were performed and since the EUT demonstrates compliance with the peak conducted output power a 20 dB attenuation is used. The test result and plots are shown below.

**Test Results:** The EUT was compliant with the Spurious Emission limits of **§15.247(d)**.

**Test Engineer(s):** Adan Arab

**Test Date(s):** 08/04/2020

### Spurious Emissions in Non-restricted Bands, Test Results:

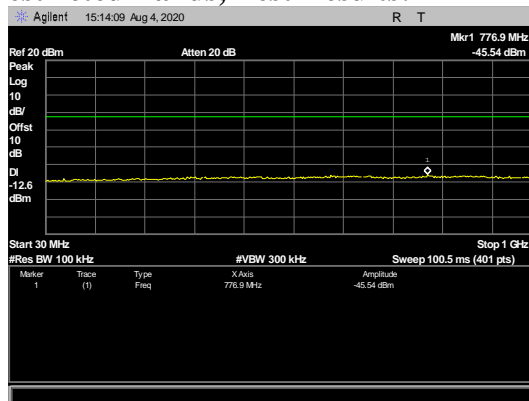


Figure 63: Conducted Spurious Emissions, 2402 MHz – 30-10000 MHz - 1 Mbps

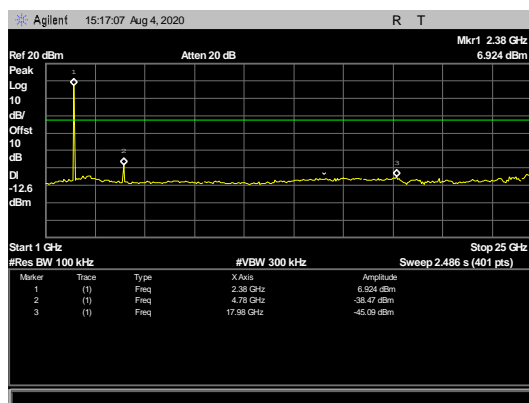


Figure 64: Conducted Spurious Emissions, 2402 MHz - 1-25 GHz - 1 Mbps

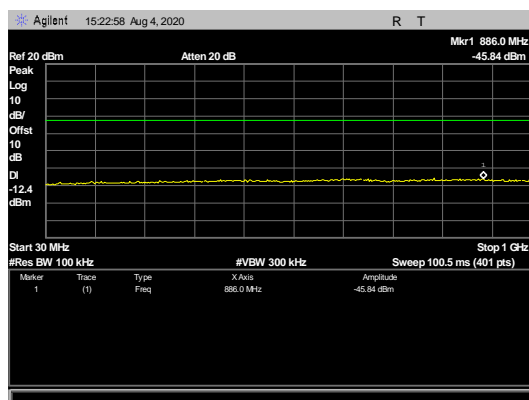


Figure 65: Conducted Spurious Emissions, 2440 MHz - 30-10000 MHz - 1 Mbps

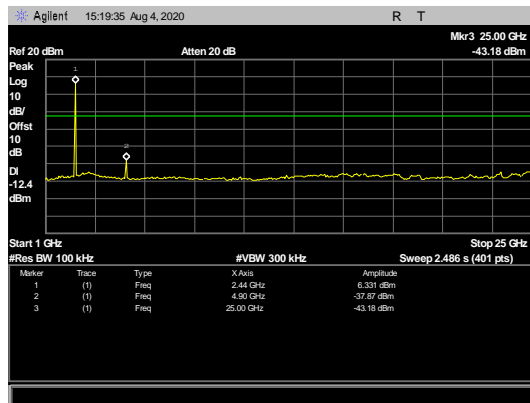


Figure 66: Conducted Spurious Emissions, 2440 MHz - 1-25 GHz - 1 Mbps

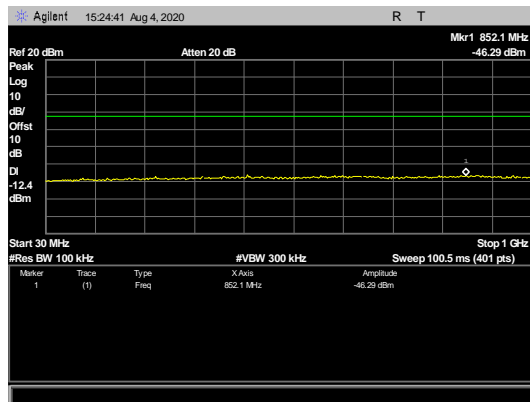


Figure 67: Conducted Spurious Emissions, 2480 MHz - 30-10000 MHz - 1 Mbps

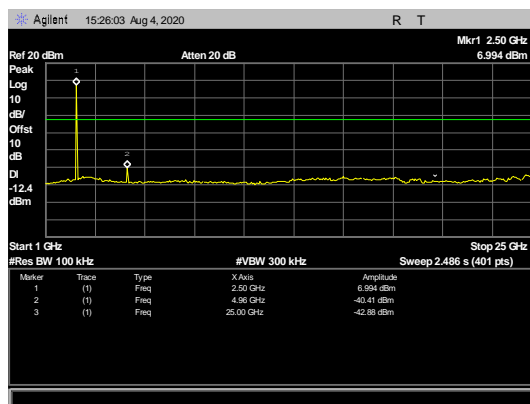


Figure 68: Conducted Spurious Emissions, 2480 MHz - 1-25 GHz - 1 Mbps

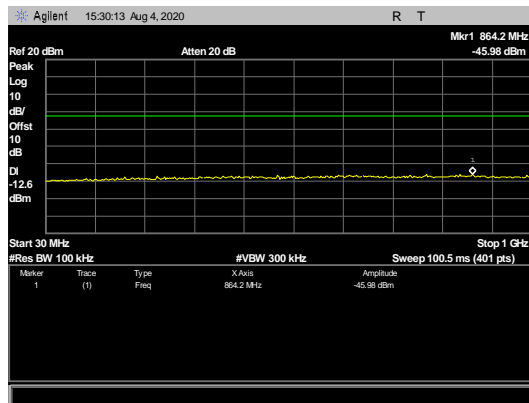


Figure 69: Conducted Spurious Emissions, 2402 MHz - 30-10000 MHz - 2 Mbps

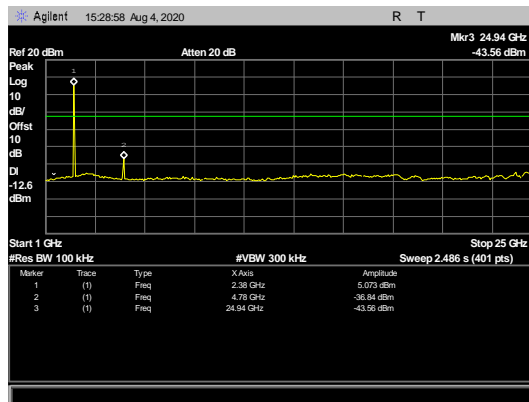


Figure 70: Conducted Spurious Emissions, 2402 MHz - 1-25 GHz - 2 Mbps

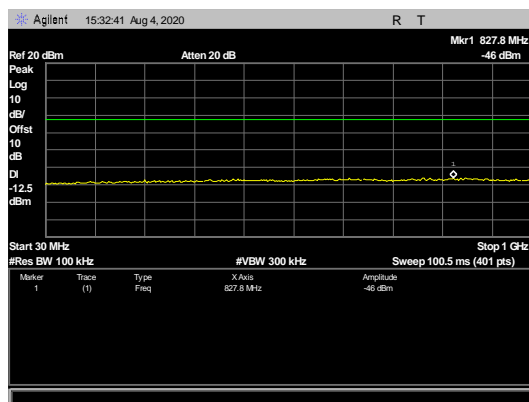


Figure 71: Conducted Spurious Emissions, 2440 MHz - 30-10000 MHz - 2 Mbps

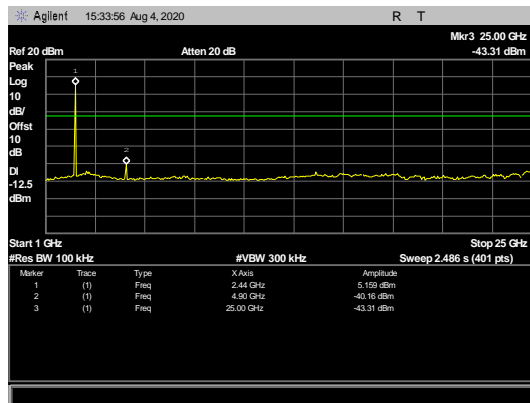


Figure 72: Conducted Spurious Emissions, 2440 MHz - 1-25 GHz - 2 Mbps

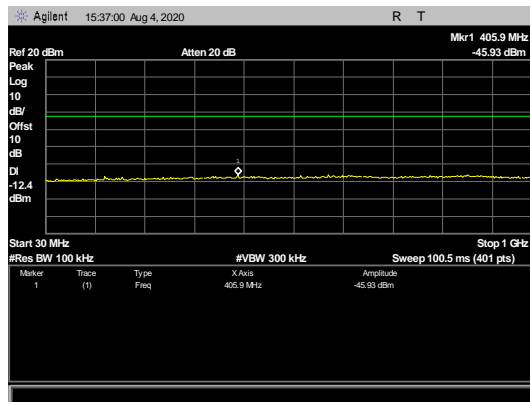


Figure 73: Conducted Spurious Emissions, 2480 MHz - 30-10000 MHz - 2 Mbps

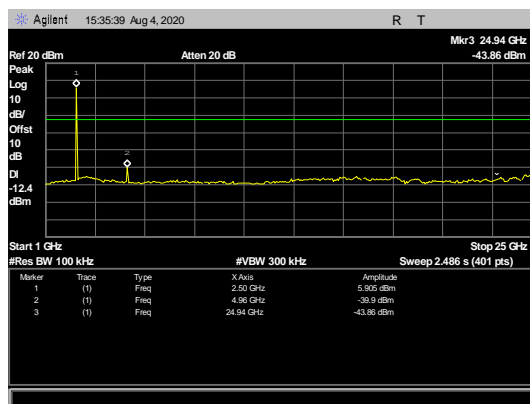


Figure 74: Conducted Spurious Emissions, 2480 MHz - 1-25 GHz - 2 Mbps



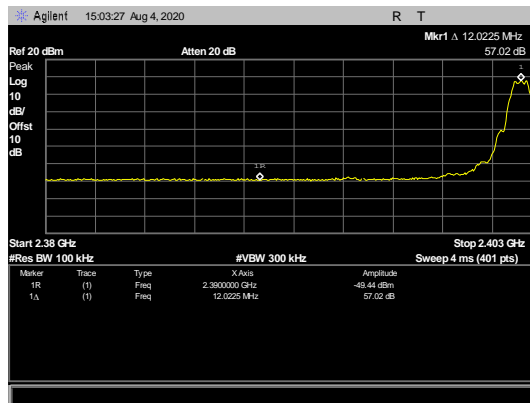


Figure 75: Conducted Lower Band Edge, 2402 MHz - 1 Mbps

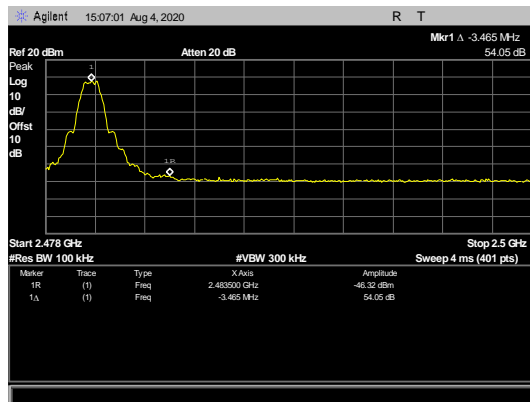


Figure 76: Conducted Upper Band Edge, 2480 MHz - 1 Mbps

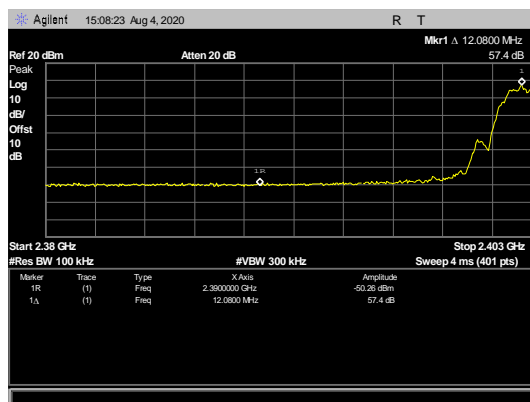


Figure 77: Conducted Lower Band Edge, 2402 MHz - 2 Mbps

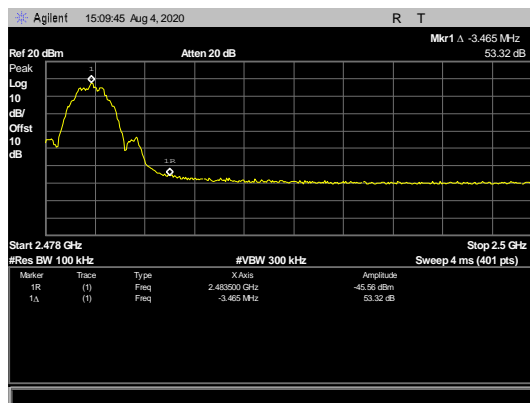


Figure 78: Conducted Upper Band Edge, 2480 MHz - 2 Mbps

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(e) Peak Power Spectral Density

**Test Requirements:** §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

**Test Procedure:** The EUT was connected to a spectrum analyzer through a cable and an attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels for all its bandwidths at Maximum Power. The Peak Power spectral density was measured according to measurement method of Peak Power, as described in ANSI C63.10-2013, section 11.10.2 Attenuator and cable loss were programmed into the spectrum analyzer.

**Test Results:** The EUT was compliant with the peak power spectral density limits of § 15.247 (e). The Peak Power Spectral Density was measured and recorded. Test result data and Plots are on the following page(s).

The peak power spectral density was determined from plots on the following page(s).

**Test Engineer:** Adan Arab

**Test Date:** 08/04/2020

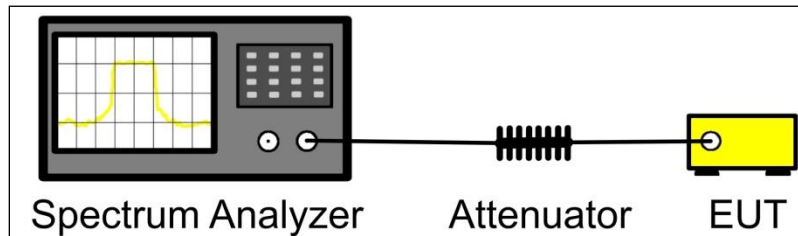


Figure 79: Block Diagram, Power Spectral Density Test Setup

### Peak Power Spectral Density Test Results

Mode	Channel (MHz)	Power Density (dBm)	Limit (dBm/3KHz)
1 Mbps	2402	7.375	8
1 Mbps	2440	7.581	8
1 Mbps	2480	7.564	8
2 Mbps	2402	7.382	8
2 Mbps	2440	7.502	8
2 Mbps	2480	7.557	8

Table 12: Peak Power Spectral Density, Test Results

### Peak Power Spectral Density

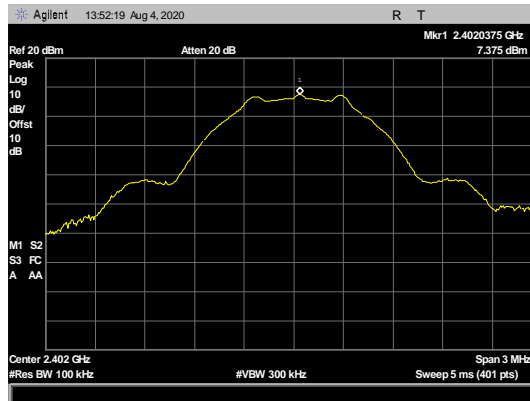


Figure 80: Peak Power Spectral Density, 2402 MHz - 1 Mbps - (7.375 dBm)

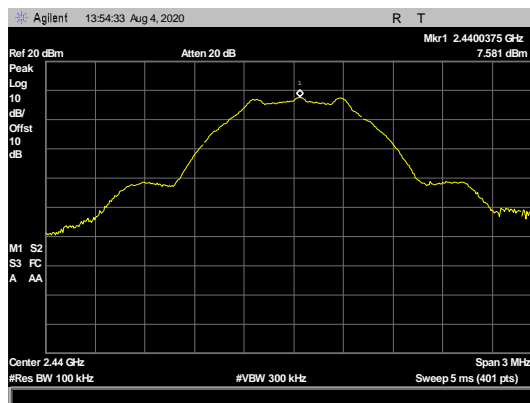


Figure 81: Peak Power Spectral Density, 2440 MHz - 1 Mbps - (7.581 dBm)

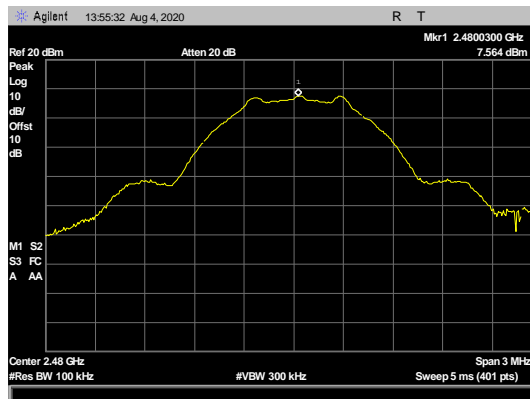


Figure 82: Peak Power Spectral Density, 2480 MHz - 1 Mbps - (7.564 dBm)

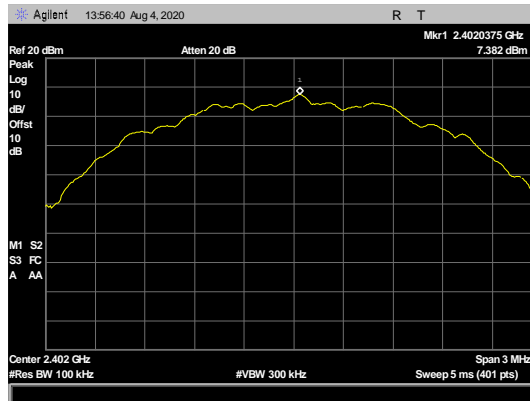


Figure 83: Peak Power Spectral Density, 2402 MHz - 2 Mbps - (7.382 dBm)

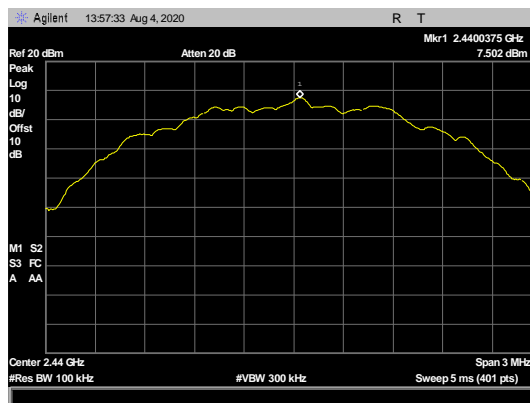


Figure 84: Peak Power Spectral Density, 2440 MHz - 2 Mbps - (7.502 dBm)

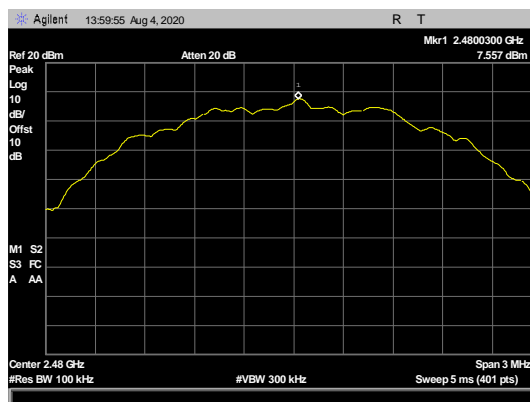


Figure 85: Peak Power Spectral Density, 2480 MHz - 2 Mbps - (7.557 dBm)

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(i) Maximum Permissible Exposure

**RF Exposure Requirements:** §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines.

**RF Radiation Exposure Limit:** §2.1093: As specified in this section, a portable device is defined as a transmitting device designed to be used so that the radiated structure(s) of the device is within 20 centimeters of the body of the user. Calculations below are in accordance with KDB 447498 D01 General RF Exposure Guidance v06, Section 4.3 General SAR test exclusion guidance. The SAR test exclusion thresholds are 3.0 for 1-g SAR and 7.5 for 10-g extremity SAR.

Note: The minimum separation distance from the end user to the transmitting antenna is 12mm. The plastic enclosure of the BC2510 has been designed to maintain a 12mm distance from the end user, when mounted in accordance with the manufacture’s installation instructions.

FCC											
Frequency (MHz)	Con. Pwr. (dBm)	Con. Pwr. (mW)	Tune-up Tolerance (dB)	Ant. Gain (dBi)	Ant. Gain numeric	Total Pwr. (mW)	Calculated SAR Threshold	1.0-g SAR Limit	Margin	Separation Distance Declared (mm)	Result
2480	9.62	9.162	1	0.7	1.175	11.337	1.488	3.0	-1.512	12	Exempt

Per KDB 447498, Section 4.3.1 (a), applicable for 100 MHz to 6 GHz and test separation distances ≤ 50 mm:

$$\frac{\text{max. power of channel, including tuneup tolerance [mW]}}{\text{min. test separation distance [mm]}} * \sqrt{f [GHz]} \leq 3.0 (1 - g \text{ SAR Limit})$$

$$\frac{11.337 \text{ mW}}{12 \text{ mm}} * \sqrt{2.480} = 1.49 \leq 3.0 (1 - g \text{ SAR})$$

**Figure: RF Human Exposure, Test Results**

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1A1191	Temp, Humidity, and Pressure Recorder	Omega	OM-CP-PRHTemp2000	1/31/2020	1/31/2021
1A1141	Spectrum Analyzer	Agilent Technologies	E4407B	08/05/2019	09/05/2020
1A1083	EMI Test Receiver	Rohde & Schwarz	ESU40	10/10/2019	10/10/2020
1A1147	Bilog Antenna (30-1000 MHz)	Sunol Sciences Corp	JB3	06/05/2019	12/05/2020
1A1183	Double Ridged Waveguide Antenna (1-18 GHz)	ETS Lindgren	3117	06/01/2020	06/01/2022
1A1161	DRG Horn Antenna	ETS Lindgren	3116C-PA	06/03/2020	06/03/2022
1A1099	1A1099	Generator	COM-Power Corp	SEE NOTE	
1A1044	1A1044	Generator	COM-Power Corp	SEE NOTE	
1A1088	PRE-AMP	ROHDE & SCHWARZ	TS-PR1	SEE NOTE	
1A1080	MULTI-DEVICE CONTROLLER	ETS-EMCO	2090	SEE NOTE	
1A1073	MULTI-DEVICE CONTROLLER	ETS-EMCO	2090	SEE NOTE	
1A1180	PRE-AMP	MITEQ	AMF-7D-01001800-22-10P	SEE NOTE	
1A1106	10M SEMI-ANECHOIC CHAMBER	LINDGREN	N/a	SEE NOTE	

**Table 13: Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



## V. Certification & User's Manual Information

## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing*;
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### 1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

# End of Report