


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C			



FLEXOGRAPHIC PRINT
USE GRAPHICS FILE "32G-0469C BC2611 SN Label.AI"

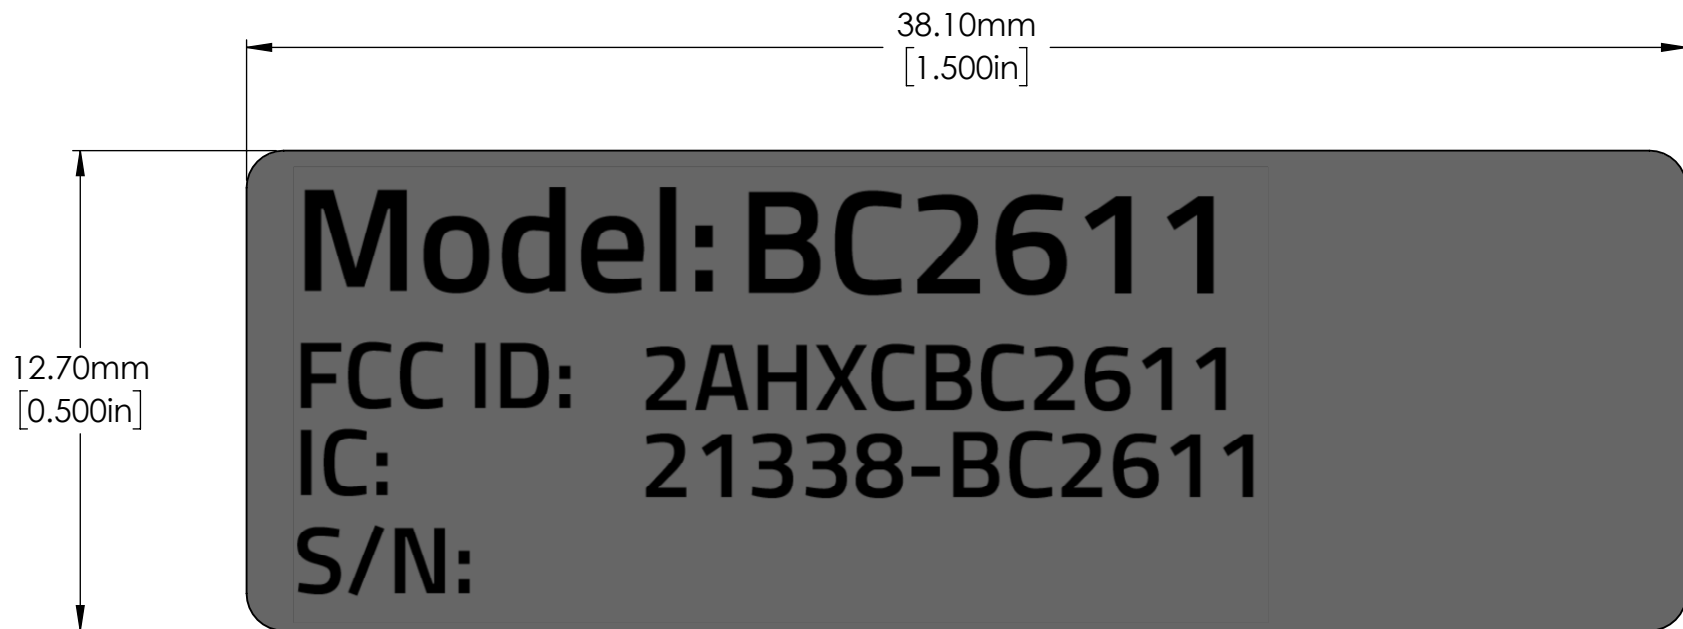

QR CODE CONFIGURATION:
VERSION 1 (21 X 21)
ERROR CORRECTION LEVEL Q (25%)

TEXT FORMAT:
Titillium Web 8pt SEMI-BOLD

FLOOR PRINTED INFORMATION USING THERMAL TRANSFER RIBBON


PROCEDURE 440-0060 "Procedure, BC2611 T2T TAG 2 FINAL UNIT S/N LABEL PRINT" TO PRINT LABELS.



FINAL LABEL APPLIED TO PRODUCT

NOTES:

- MATERIAL IS A PEARL WHITE, GLOSS POLYESTER THERMAL TRANSFER LABEL WITH A HIGH PERFORMANCE PERMANENT ACRYLIC ADHESIVE. UL RECOGNIZED FOR INDOOR AND OUTDOOR USE. OFFER HIGH RESISTANCE TO CHEMICALS AND UV EXPOSURE. ZEBRA Z-ULTIMATE 4000T IS A SIMILAR MATERIAL
- LABELS TO BE PROVIDED ON A 3" CORE AND IN THE DIRECTION SHOWN.
- USE WITH RIBBON 044-0097-9 "RIBBON, 2.37" ZEBRA 3200 RESIN RIBBON"

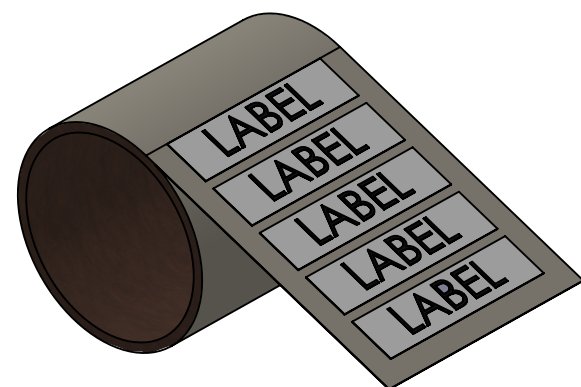

UNLESS OTHERWISE SPECIFIED		NAME	DATE	6767 OLD MADISON PIKE NW SUITE 300 HUNTSVILLE, AL 35806 USA		
PRIMARY DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ±0.5° BEND ±1.0° ONE PLACE DECIMAL ±0.3 TWO PLACE DECIMAL ±0.15 THREE PLACE DECIMAL ±0.015	SECONDARY DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ±0.5° TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.005 FOUR PLACE DECIMAL ±.0005	DESIGNED BY J. ANDERSON			TITLE: LABEL, BC2611 T2T, Serial Number	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BLUECATS US, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BLUECATS US, LLC IS PROHIBITED.	MATERIAL FINISH	DRAWN BY J. ANDERSON	10/9/2020			SIZE C
DO NOT SCALE DRAWING				SCALE: 5:1	SHEET 1 OF 1	