


# RF Exposure Report

**Project Number: 4694815****Proposal: 11548r2****Report Number: 4694815EMC09****Revision Level: 0****Client: BlueCats US, LLC****Equipment Under Test: BC2611****Model: BC2611****FCC ID: 2AHXCBC2611****Applicable Standards: 47 CFR §§ 2.1093;****FCC KDB 447498 D01 General RF Exposure Guidance v06****Report issued on: 12 January 2021****Result: Exempt**

Evaluated by:

  
\_\_\_\_\_  
Jeremy Pickens, RF Lab Manager

Reviewed by:

  
\_\_\_\_\_  
David Schramm, Operations Manager

*Remarks: This report details the results of the testing carried out on one sample; the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.*

*This document is issued by the Company under its General Conditions of Service accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.*

*Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful, and offenders may be prosecuted to the fullest extent of the law.*

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION</b>	<b>3</b>
1.1	CLIENT INFORMATION	3
1.2	TEST LABORATORY	3
1.3	GENERAL INFORMATION OF EUT	3
1.4	TRANSMITTER SPECIFICATION - BLE	3
1.5	TRANSMITTER SPECIFICATION - UWB	3
1.6	OPERATING MODES AND CONDITIONS	3
<b>2</b>	<b>SAR EXCLUSION CALCULATIONS</b>	<b>4</b>
2.1	BLUETOOTH LOW ENERGY	4
2.2	UWB	4
2.3	SIMULTANEOUS TRANSMISSIONS	5
<b>3</b>	<b>REVISION HISTORY</b>	<b>6</b>

## 1 General Information

### 1.1 Client Information

Name: BlueCats US, LLC  
 Address: 6767 Old Madison Pike Suite 300  
 City, State, Zip, Country: Huntsville, AL 35806

### 1.2 Test Laboratory

Name: SGS North America, Inc.  
 Address: 620 Old Peachtree Road NW, Suite 100  
 City, State, Zip, Country: Suwanee, GA 30024, USA

Accrediting Body: A2LA  
 Type of lab: Testing Laboratory  
 Certificate Number: 3212.01

### 1.3 General Information of EUT

Product Marketing Name (PMN): BC2611  
 Model Number (HVIN): BC2611

Serial Number: D42CC7015D2 (UWB), D42CC701523 (BLE)

Rated Voltage: 5 Vdc (Input)  
 Test Voltage: 3.6 Vdc (Battery)

### 1.4 Transmitter Specification - BLE

Modulation Techniques: GFSK,  $\pi/4$  DQPSK, 8DPSK  
 Data Rates: S2, S8 PHY, 1M, 2M  
 Frequency Range: 2402-2480 MHz

Antenna Gain: 0.71 dBi (2400-2500 MHz)  
 Antenna Type PCB Trace  
 Antenna Frequency Range: 2400 - 2500 MHz

### 1.5 Transmitter Specification - UWB

Modulation Techniques: UWB  
 Data Rates: HRP (850Kbps and 6.8Mbps)  
 Frequency Range: 6000-8500 MHz (Channel 5 and 9)

Antenna Gain: 0.0 dBi  
 Antenna Type Integrated PCB Trace  
 Antenna Frequency Range: 6000-9000 MHz

### 1.6 Operating Modes and Conditions

Maximum Conducted Power levels were utilized for all calculations. Simultaneous transmission is possible.

## 2 SAR Exclusion Calculations

### 2.1 Bluetooth Low Energy

447498 D01 General RF Exposure Guidance v06

SAR test exclusion calculations

Section 4.3: General SAR test exclusion guidance / Section 4.3.1: Standalone SAR test exclusion considerations

	Input	Select Units	
Max Power:	3.75	dBm	
Antenna Gain:	0.71	dBi	
Duty Cycle:	100.0%		<== Source based time average duty cycle
Min separation distance:	5	mm	
Frequency, f:	2480	MHz	

Value reference Number	Values used for Calculation	Reference number definition
v1	2.79	mW [max. power of channel, including tune-up tolerance, mW] 'Rounded to nearest mW
v2	5	mm [min. test separation distance, mm] 'Rounded to nearest mm
v3	1.575	[ $\sqrt{f}$ (GHz)]


- a) For 100 MHz to 6 GHz and test separation distances  $\leq 50$  mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:  
 $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot \sqrt{f}(\text{GHz})] \leq 3.0$  for 1-g SAR, and  $\leq 7.5$  for 10-g extremity SAR,

Exclusion Calculation(1g):	0.9	number	<== $[v2 / v3]$ must be less than 3
Exclusion Calculation(10g):	2.2	number	<== $[v2 / v3]$ must be less than 7.5

Conclusions (Body):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Body applications
Conclusions (Extremity):	The EUT max power is BELOW the threshold. SAR Testing is NOT required for Extremity applications

### 2.2 UWB

Above 6GHz, any device with an output power of less than 1mW is excluded from further evaluation.

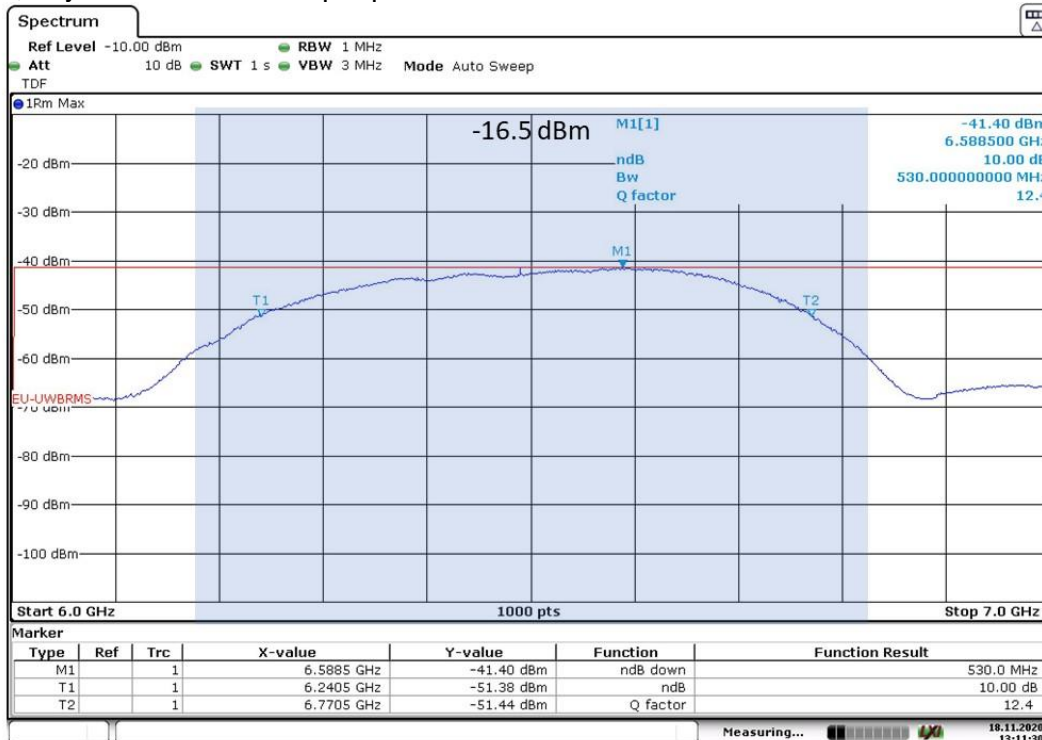

Integrated RMS Power = -16.5dBm = 0.022mW

### 2.3 *Simultaneous Transmissions*

The Bluetooth radio operates at 30% of the Body Application exclusion limit and the UWB operates at 2.2% of the 1mW exclusion limit. The sum of these is 32.2% compared to a limit of 100%.

### 3 Revision History

Revision Level	Description of changes	Revision Date
0	Initial release	12 January 2021