



RF Test Report

Applicant : Redpine Signals Inc
Product Type : Dual Band 802.11 a/b/g/n, Bluetooth 5.0, ZigBee Module
Trade Name : Redpine Signals Inc
Model Number : M7DB6
Test Specification : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Oct. 24, 2018
Test Period : Dec. 27, 2018 ~ Jan. 02, 2019
Issue Date : Jan. 11, 2019

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Test Firm MRA designation number: TW0010

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jan. 11, 2019	Initial Issue	Shelly Chen



Verification of Compliance

Issued Date: Jan. 11, 2017

Applicant : Redpine Signals Inc

Product Type : Dual Band 802.11 a/b/g/n, Bluetooth 5.0, ZigBee Module

Trade Name : Redpine Signals Inc

Model Number : M7DB6

FCC ID : XF6-M7DB6

EUT Rated Voltage : DC 1.8 V 0.4 A / DC 3.3 V 0.4 A

Test Voltage : DC 3.3 V

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)



TABLE OF CONTENTS

1	General Information.....	5
2	EUT Description	7
3	Test Methodology.....	8
	3.1. Mode of Operation.....	8
	3.2. EUT Test Step.....	9
	3.3. Configuration of Test System Details.....	10
	3.4. Test Instruments	11
	3.5. Test Site Environment.....	11
4	Measurement Procedure.....	12
	4.1. Radiated Emission Measurement.....	12
	4.2. Maximum Conducted Output Power Measurement.....	16
	4.3. 6 dB RF Bandwidth Measurement.....	17
	4.4. Maximum Power Density Measurement.....	18
	4.5. Out of Band Conducted Emissions Measurement.....	19
	4.6. Antenna Measurement	19
5	Test Results	20
	Annex A. Conducted Test Results	20
	Annex B. Radiated Emission Measurement	46



1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
FCC			
15.207	AC Power Conducted Emission	N/A	The device uses DC power source.
15.247(d)	Transmitter Radiated Emissions	PASS	----
15.247(b)(3)	Max. Output Power	PASS	----
15.247(a)(2)	6 dB RF Bandwidth	PASS	----
15.247(e)	Maximum Power Spectral Density	PASS	----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	----
15.203	Antenna Requirement	PASS	----

The test results of this report relate only to the tested sample(s) identified in this report.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v05	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES



1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9 kHz ~ 150 kHz	2.7
	150 kHz ~ 30 MHz	2.7
Radiated Emission	9 kHz ~ 30 MHz	1.7
	30 MHz ~ 1000 MHz	5.7
	1000 MHz ~ 18000 MHz	5.5
	18000 MHz ~ 26500 MHz	4.8
	26500 MHz ~ 40000 MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96 %	
Power Spectral Density	+0.71 dB / -0.77 dB	



2 EUT Description

Applicant	Redpine Signals, Inc 2107 N.First Street, Suite 680, San Jose, California, 95131-2019, United States				
Manufacturer	Redpine Signals, Inc 2107 N.First Street, Suite 680, San Jose, California, 95131-2019, United States				
Product Type	Single Band 802.11 b/g/n, Bluetooth 5.0, ZigBee Module				
Trade Name	Redpine Signals Inc				
Model No.	M15SB				
FCC ID	XF6-M7DB6				
Frequency Range	2402 ~ 2480 MHz				
Modulation Type	GFSK				
Antenna information	Model	Type	Connector	Max. Gain (dBi)	
	RSIA7	PCB Trace Antenna	Internal	0.712	
	GW.71.5153	Dipole Antenna	SMA Reverse	Straight	3.3
				Bent	3.8
Operate Temp. Range	-40 ~ +85 °C				

Frequency Band	Max. RF Output Power (W)
Power setting 1_Antenna Type: PCB Trace Antenna	
LE, GFSK	0.02203
2LE, GFSK	0.02612
BLR C2, GFSK	0.02188
BLR C8, GFSK	0.02178
Power setting 2_Antenna Type: Dipole Antenna	
LE, GFSK	0.01479
2LE, GFSK	0.01866
BLR C2, GFSK	0.01472
BLR C8, GFSK	0.01466



3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: LE, GFSK Continuous TX Mode
Mode 3: 2LE, GFSK Continuous TX Mode
Mode 4: BLR C2, GFSK Continuous TX Mode
Mode 5: BLR C8, GFSK Continuous TX Mode

Final-Test Mode
Mode 1: Transmit Mode
Mode 2: LE, GFSK Continuous TX Mode
Mode 3: 2LE, GFSK Continuous TX Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed. After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “X axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note: Antenna model: GW.71.5153(Bent) is the worst cast.

RF Power setting	Antenna Type	Antenna Max. Gain (dBi)	Test Mode	Antenna Delivery	Frequency (MHz)
1	PCB Trace Antenna	0.712	Mode 2	1TX	2402, 2440, 2480
			Mode 3	1TX	2402, 2440, 2480
			Mode 4	1TX	2402, 2440, 2480
			Mode 5	1TX	2402, 2440, 2480
2	Dipole Antenna	3.3 (Straight)/ 3.8 (Bent)	Mode 2	1TX	2402, 2440, 2480
			Mode 3	1TX	2402, 2440, 2480
			Mode 4	1TX	2402, 2440, 2480
			Mode 5	1TX	2402, 2440, 2480

Note: Redpine software has antenna selection parameter which enables the user to select the antenna and it internally adjusts the gain parameters. Default antenna type will be Redpine PCB antenna.




3.2. EUT Test Step

1	Setup the EUT shown on "Configuration of Test System Details".
2	Turn on the power of all equipment.
3	Turn on TX function
4	EUT run test program.


Measurement Software			
No.	Description	Software	Version
1	Radiated Emission	EZ EMC	1.1.4.4

3.3. Configuration of Test System Details

Radiated Emissions_ PCB Trace Antenna

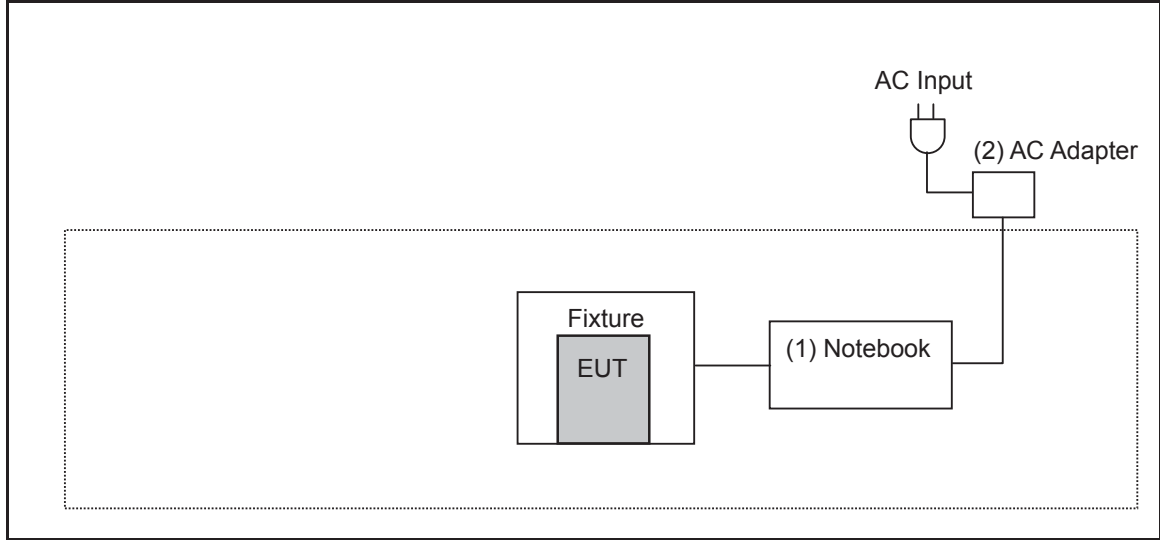

Radiated Emissions_ Dipole Antenna

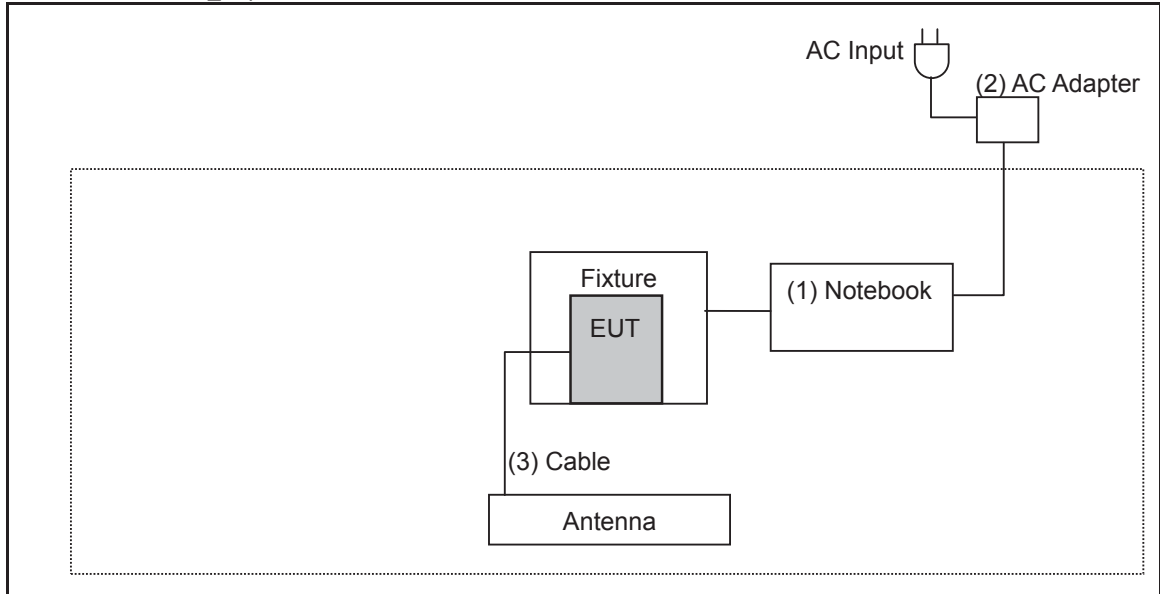

Devices Description						
	Product	Manufacturer	Model Number	Serial Number	Power Cord	Loss
(1)	Notebook	DELL	Inspiron 15	726RWN2	---	---
(2)	AC Adapter	DELL	LA65NS2-01	---	Non-Shielded, 0.8 m	---
(3)	Cable	Amphenol RF	336314-12-0100	---	---	0.38 dB



3.4. Test Instruments

For Radiated Emissions

Test Period: Dec. 27 ~ Dec. 28, 2018

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/15/2018	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/19/2018	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/10/2018	1 year
Pre Amplifier (26.5~40 GHz)	EMCI	EMC2654045	980028	08/23/2018	1 year
Trilog Broadband Antenna	SCHWARZBECK MESS-ELEKTRONIK	SB AC VULB	9168-0841	03/02/2018	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/23/2018	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/13/2018	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2018	1 year
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	02/20/2018	1 year
Broadband Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9170	9170-320	08/07/2018	1 year

For Conducted

Test Period: Jan. 02, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	08/29/2018	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2018	1 year
EXA Signal Analyzer	Keysight	N9010A	MY52221312	01/15/2018	1 year
Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	09/25/2018	1 year
Microwave Cable	EMCI	EMC104-SM-SM13000	170814	10/30/2018	1 year

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	990

4 Measurement Procedure

4.1. Radiated Emission Measurement

■ **Limit**


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ **Setup**


9 kHz ~ 30 MHz

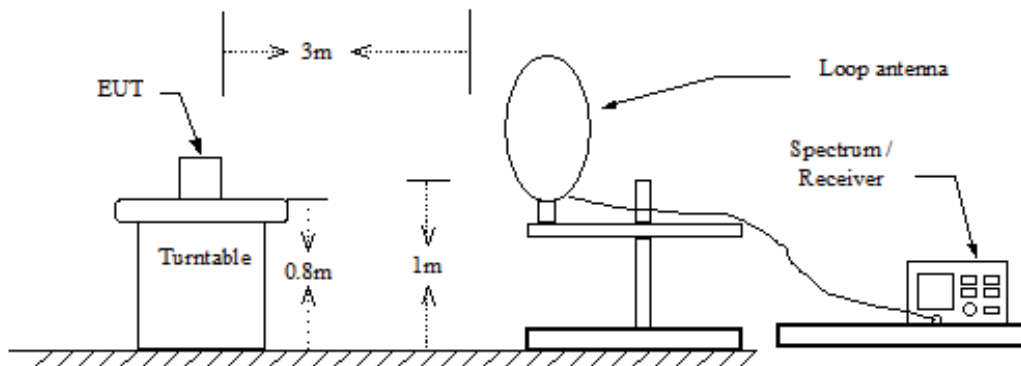

Below 1 GHz

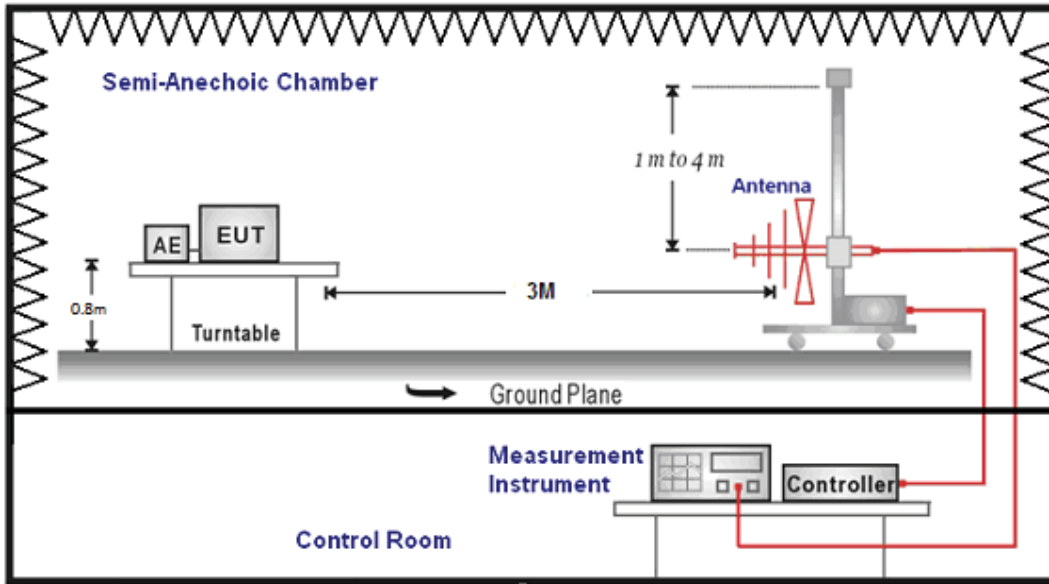

Above 1 GHz

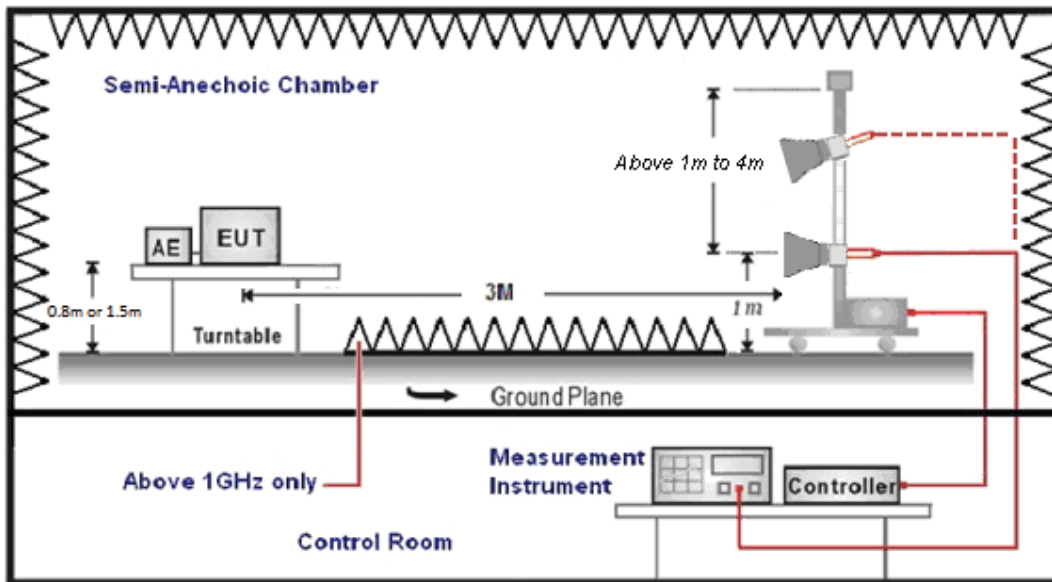



■ **Test Procedure**

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle $>0.98 / 1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).



The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

4.2. Maximum Conducted Output Power Measurement

■ Limit

For systems using digital modulation in the 2400-2483.5 MHz, the limit for peak output power is 30 dBm.

■ Test Setup

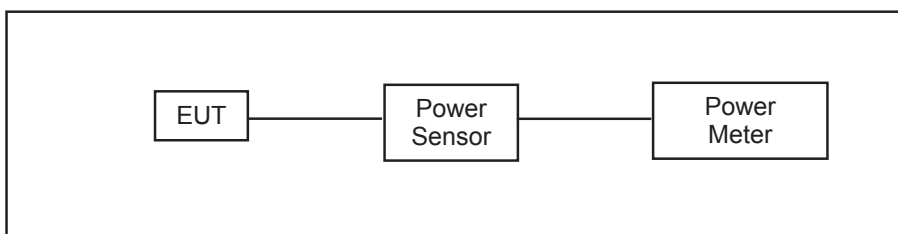

■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10-2013 section 11.9.2.3 Method AVGPM.

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor..


4.3. 6 dB RF Bandwidth Measurement

■ Limit

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

■ Test Setup

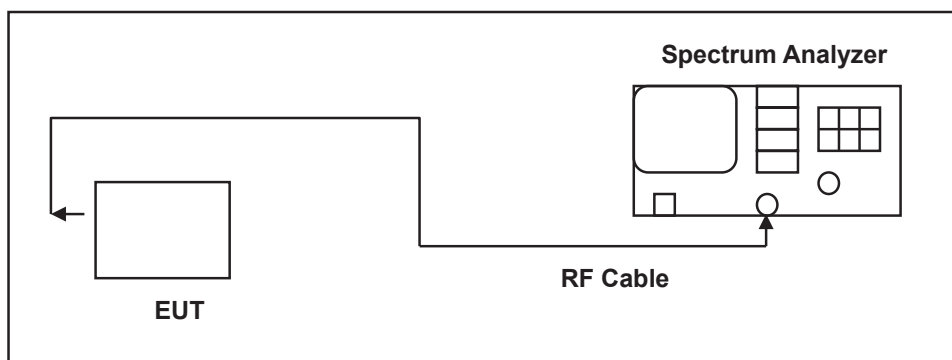

■ Test Procedure

The EUT tested to DTS test procedure of KDB 558074 D01 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

4.4. Maximum Power Density Measurement

■ **Limit**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ **Test Setup**

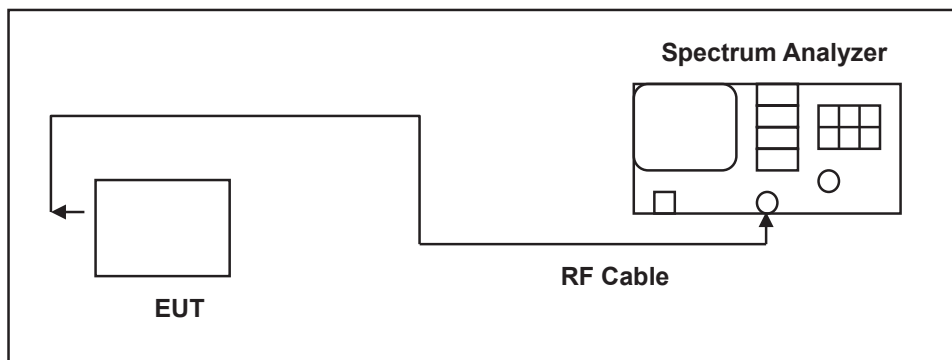

■ **Test Procedure**

The EUT tested to DTS test procedure of ANSI C63.10-2013 section 11.10.2 Method PKPSD.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.5. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

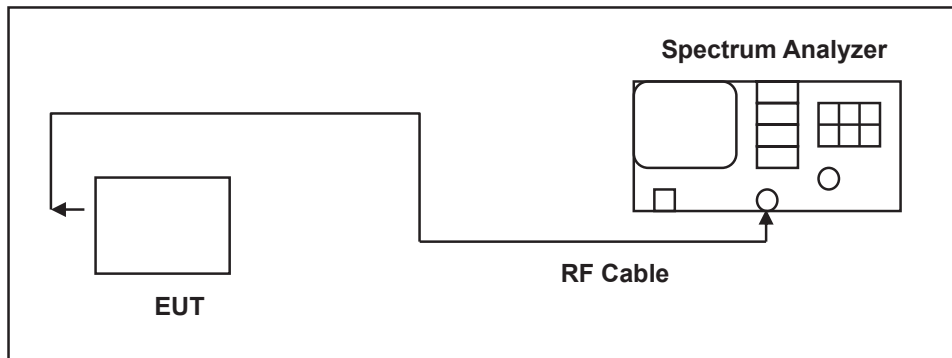

■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

4.6. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Connector Construction

See section 2 – antenna information.



5 Test Results

Annex A. Conducted Test Results

Power setting 1_Antenna Type: PCB Trace Antenna

Maximum Conducted Output Power Measurement

Modulation Type	Frequency (MHz)	RF Power setting in Test Software				Test Software Version
		Mode 2	Mode 3	Mode 4	Mode 5	
GFSK	2402	13.00	15.00	13.00	13.00	FCC Test App
	2440	14.00	15.00	14.00	14.00	
	2480	15.00	15.00	15.00	15.00	

Test Mode	Mode 2				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	11.32	0.01355	13.15	0.02065	≤ 30
2440	11.56	0.01432	13.43	0.02203	≤ 30
2480	11.43	0.01390	13.18	0.02080	≤ 30

Test Mode	Mode 3				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	11.35	0.01365	14.17	0.02612	≤ 30
2440	10.54	0.01132	13.27	0.02123	≤ 30
2480	9.19	0.00830	11.95	0.01567	≤ 30

Test Mode	Mode 4				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	11.29	0.01346	13.12	0.02051	≤ 30
2440	11.54	0.01426	13.40	0.02188	≤ 30
2480	11.40	0.01380	13.16	0.02070	≤ 30

Test Mode	Mode 5				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	11.26	0.01337	13.09	0.02037	≤ 30
2440	11.50	0.01413	13.38	0.02178	≤ 30
2480	11.38	0.01374	13.15	0.02065	≤ 30

Note: The relevant measured result has the offset with cable loss already.



6 dB RF Bandwidth Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	799.500	≥ 500
2440	800.800	≥ 500
2480	802.400	≥ 500

Test Mode	Mode 3	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	1615.000	≥ 500
2440	1613.000	≥ 500
2480	1613.000	≥ 500



■ Test Graphs

Mode 2	
2402 MHz	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold>10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 1.2301 MHz Total Power 17.5 dBm</p> <p>Transmit Freq Error 3.616 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 799.5 kHz x dB -6.00 dB</p>
2440 MHz	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold>10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 1.2288 MHz Total Power 17.7 dBm</p> <p>Transmit Freq Error 1.668 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 800.8 kHz x dB -6.00 dB</p>
2480 MHz	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold>10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 1.2317 MHz Total Power 17.5 dBm</p> <p>Transmit Freq Error 1.206 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 802.4 kHz x dB -6.00 dB</p>



Mode 3	
2402 MHz	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold>10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 2.3666 MHz Total Power 17.4 dBm</p> <p>Transmit Freq Error -10.730 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.615 MHz x dB -6.00 dB</p>
2440 MHz	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold>10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 2.3654 MHz Total Power 16.5 dBm</p> <p>Transmit Freq Error -11.674 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.613 MHz x dB -6.00 dB</p>
2480 MHz	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold>10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 2.3656 MHz Total Power 15.3 dBm</p> <p>Transmit Freq Error -11.416 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.613 MHz x dB -6.00 dB</p>



Maximum Power Density Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-7.113	≤ 8
2440	-5.867	≤ 8
2480	-6.699	≤ 8

Test Mode	Mode 3	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-6.871	≤ 8
2440	-7.511	≤ 8
2480	-8.892	≤ 8



■ Test Graphs

Mode 2	
2402 MHz	<p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 10.3 dB Ref 20.30 dBm Mkr1 2.401997075 GHz -7.113 dBm Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 5.333 ms (40001 pts) Span 1.500 MHz</p>
2440 MHz	<p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.44000000 GHz Ref Offset 10.3 dB Ref 20.30 dBm Mkr1 2.439997300 GHz -5.867 dBm Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 5.333 ms (40001 pts) Span 1.500 MHz</p>
2480 MHz	<p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 10.3 dB Ref 20.30 dBm Mkr1 2.479981887 GHz -6.699 dBm Center 2.4800000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 5.333 ms (40001 pts) Span 1.500 MHz</p>



Mode 3	
2402 MHz	
2440 MHz	
2480 MHz	



Out of Band Conducted Emissions Measurement

■ Test Graphs

Reference level

Mode 2	
2402 MHz	
2440 MHz	
2480 MHz	



Mode 3	
2402 MHz	<p>Keysight Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 10.3 dB Ref 20.30 dBm</p> <p>Mkr1 2.4021439375 GHz 7.447 dBm</p> <p>Center 2.402000 GHz #Res BW 100 kHz #VBW 300 kHz Span 2.500 MHz Sweep 2.667 ms (40001 pts)</p>
2440 MHz	<p>Keysight Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.44000000 GHz</p> <p>Ref Offset 10.3 dB Ref 20.30 dBm</p> <p>Mkr1 2.4396990625 GHz 6.682 dBm</p> <p>Center 2.440000 GHz #Res BW 100 kHz #VBW 300 kHz Span 2.500 MHz Sweep 2.667 ms (40001 pts)</p>
2480 MHz	<p>Keysight Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 10.3 dB Ref 20.30 dBm</p> <p>Mkr1 2.4796825625 GHz 5.419 dBm</p> <p>Center 2.480000 GHz #Res BW 100 kHz #VBW 300 kHz Span 2.500 MHz Sweep 2.667 ms (40001 pts)</p>



Out of Band Conducted Emissions


Mode 2																			
2402 MHz	<table border="1"><thead><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>Scl</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 0 GHz</td><td>10.008 dBm</td><td></td><td></td><td></td></tr></tbody></table>	Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value	1	N	1	f	2.402 0 GHz	10.008 dBm			
Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value											
1	N	1	f	2.402 0 GHz	10.008 dBm														
2440 MHz	<table border="1"><thead><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>Scl</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 0 GHz</td><td>10.361 dBm</td><td></td><td></td><td></td></tr></tbody></table>	Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value	1	N	1	f	2.440 0 GHz	10.361 dBm			
Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value											
1	N	1	f	2.440 0 GHz	10.361 dBm														
2480 MHz	<table border="1"><thead><tr><th>Mkr</th><th>Mode</th><th>Trc</th><th>Scl</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 0 GHz</td><td>10.004 dBm</td><td></td><td></td><td></td></tr></tbody></table>	Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value	1	N	1	f	2.480 0 GHz	10.004 dBm			
Mkr	Mode	Trc	Scl	X	Y	Function	Function Width	Function Value											
1	N	1	f	2.480 0 GHz	10.004 dBm														




Mode 3																			
<p>2402 MHz</p>	<p>Start Freq 30.000000 MHz</p> <p>Ref Offset 10.3 dB Ref 20.30 dBm</p> <p>Mkr1 2.402 0 GHz 7.778 dBm</p> <p>Start 0.03 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 26.50 GHz Sweep 88.00 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 0 GHz</td> <td>7.778 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 0 GHz	7.778 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE											
1	N	1	f	2.402 0 GHz	7.778 dBm														
<p>2440 MHz</p>	<p>Start Freq 30.000000 MHz</p> <p>Ref Offset 10.3 dB Ref 20.30 dBm</p> <p>Mkr1 2.440 0 GHz 6.756 dBm</p> <p>Start 0.03 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 26.50 GHz Sweep 88.00 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 0 GHz</td> <td>6.756 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 0 GHz	6.756 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE											
1	N	1	f	2.440 0 GHz	6.756 dBm														
<p>2480 MHz</p>	<p>Start Freq 30.000000 MHz</p> <p>Ref Offset 10.3 dB Ref 20.30 dBm</p> <p>Mkr1 2.480 0 GHz 5.620 dBm</p> <p>Start 0.03 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 26.50 GHz Sweep 88.00 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 0 GHz</td> <td>5.620 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 0 GHz	5.620 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE											
1	N	1	f	2.480 0 GHz	5.620 dBm														



Conducted Band Edge

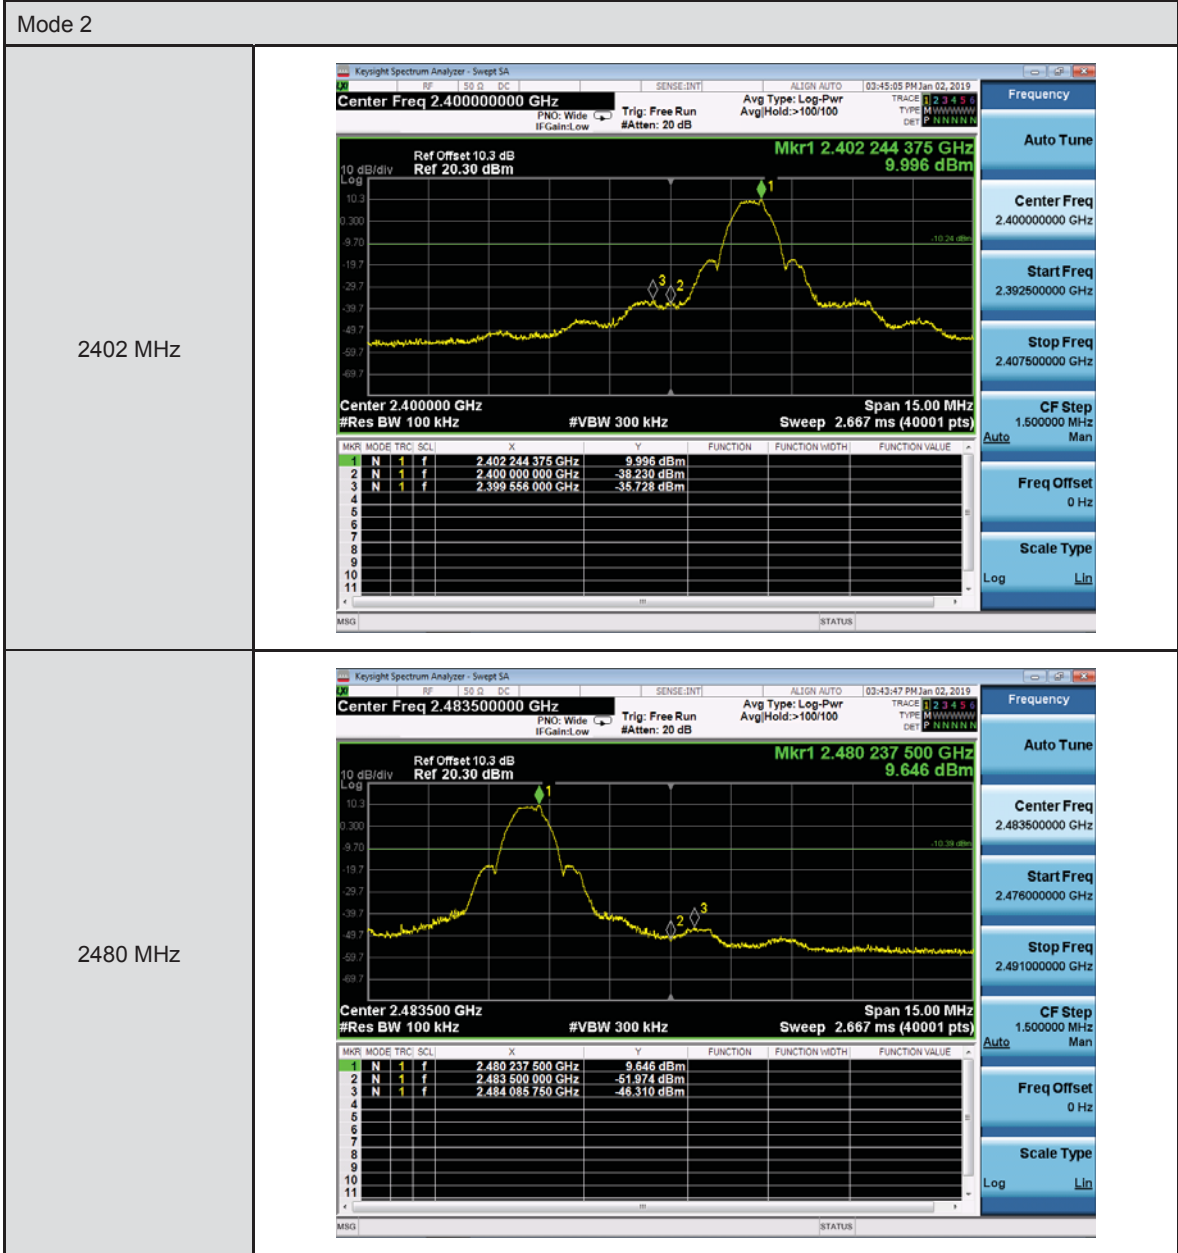

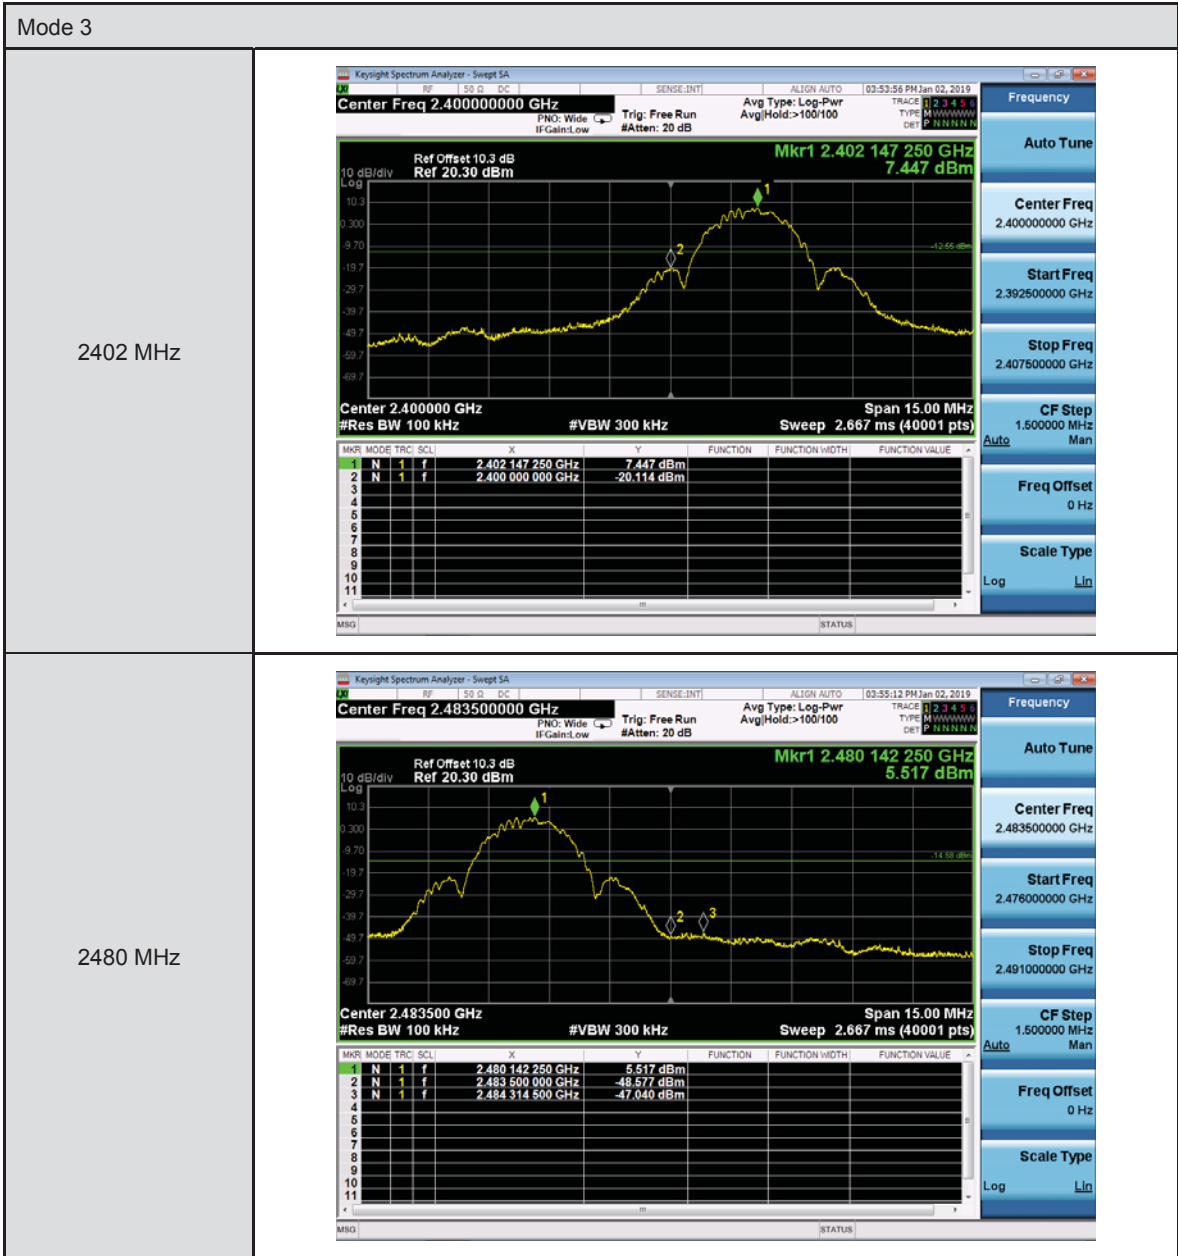



Power setting 2_Antenna Type: Heavy Duty Screw Mount Antenna

Maximum Conducted Output Power Measurement

Modulation Type	Frequency (MHz)	RF Power setting in Test Software				Test Software Version
		Mode 2	Mode 3	Mode 4	Mode 5	
GFSK	2402	11.00	13.00	11.00	11.00	FCC Test App
	2440	12.00	14.00	12.00	12.00	
	2480	13.00	13.00	13.00	13.00	

Test Mode	Mode 2				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	9.61	0.00914	11.40	0.01380	≤ 30
2440	9.86	0.00968	11.70	0.01479	≤ 30
2480	9.68	0.00929	11.46	0.01400	≤ 30

Test Mode	Mode 3				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	9.66	0.00925	12.48	0.01770	≤ 30
2440	9.94	0.00986	12.71	0.01866	≤ 30
2480	7.39	0.00548	10.33	0.01079	≤ 30

Test Mode	Mode 4				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	9.58	0.00908	11.36	0.01368	≤ 30
2440	9.84	0.00964	11.68	0.01472	≤ 30
2480	9.65	0.00923	11.42	0.01387	≤ 30

Test Mode	Mode 5				
Frequency (MHz)	Average Power		Peak Power		Limit (dBm)
	(dBm)	(W)	(dBm)	(W)	
2402	9.55	0.00902	11.33	0.01358	≤ 30
2440	9.82	0.00959	11.66	0.01466	≤ 30
2480	9.63	0.00918	11.40	0.01380	≤ 30

Note: The relevant measured result has the offset with cable loss already.



6 dB RF Bandwidth Measurement

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	802.600	≥ 500
2440	810.200	≥ 500
2480	804.500	≥ 500

Test Mode	Mode 3	
Frequency (MHz)	Measurement Results (kHz)	Limit (kHz)
2402	1617.000	≥ 500
2440	1606.000	≥ 500
2480	1608.000	≥ 500



■ Test Graphs

Mode 2	
2402 MHz	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold>10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 1.2349 MHz Total Power 16.3 dBm</p> <p>Transmit Freq Error 6.976 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 802.6 kHz x dB -6.00 dB</p>
2440 MHz	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold>10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 1.2314 MHz Total Power 16.5 dBm</p> <p>Transmit Freq Error 7.787 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 810.2 kHz x dB -6.00 dB</p>
2480 MHz	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold>10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 1.2327 MHz Total Power 16.1 dBm</p> <p>Transmit Freq Error 5.787 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 804.5 kHz x dB -6.00 dB</p>



Mode 3	
2402 MHz	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold: >10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 2.3642 MHz Total Power 15.6 dBm</p> <p>Transmit Freq Error -6.839 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.617 MHz x dB -6.00 dB</p>
2440 MHz	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold: >10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 2.3651 MHz Total Power 15.9 dBm</p> <p>Transmit Freq Error -7.424 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.606 MHz x dB -6.00 dB</p>
2480 MHz	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgJHold: >10/10</p> <p>#F Gain: Low #Atten: 20 dB Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.533 ms</p> <p>Occupied Bandwidth 2.3641 MHz Total Power 13.5 dBm</p> <p>Transmit Freq Error -7.750 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.608 MHz x dB -6.00 dB</p>

**Maximum Power Density Measurement**

Test Mode	Mode 2	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-8.444	≤ 8
2440	-8.147	≤ 8
2480	-8.485	≤ 8

Test Mode	Mode 3	
Frequency (MHz)	Measurement Results (dBm/ 3kHz)	Limit (dBm)
2402	-8.557	≤ 8
2440	-8.233	≤ 8
2480	-10.641	≤ 8



■ Test Graphs

Mode 2	
2402 MHz	<p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 10.3 dB Ref 20.30 dBm Mkr1 2.4019924625 GHz -8.444 dBm Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 5.333 ms (40001 pts) Span 1.500 MHz</p>
2440 MHz	<p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.44000000 GHz Ref Offset 10.3 dB Ref 20.30 dBm Mkr1 2.4400006750 GHz -8.147 dBm Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 5.333 ms (40001 pts) Span 1.500 MHz</p>
2480 MHz	<p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 10.3 dB Ref 20.30 dBm Mkr1 2.4800009750 GHz -8.485 dBm Center 2.4800000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 5.333 ms (40001 pts) Span 1.500 MHz</p>



Mode 3	
2402 MHz	
2440 MHz	
2480 MHz	



Out of Band Conducted Emissions Measurement

■ Test Graphs

Reference level

Mode 2	
2402 MHz	
2440 MHz	
2480 MHz	