

FCC Part 15C Measurement and Test Report

For

HOPSUN INTERNATIONAL(H.K.)LTD.

FCC ID: 2AHY7M124

FCC Rule(s):	<u>FCC Part 15.247</u>	
Product Description:	<u>Portable speaker</u>	
Tested Model:	<u>HS-M124</u>	
Report No.:	<u>BSL18011042670005Y-ER-2</u>	
Tested Date:	<u>Jan. 10-19, 2018</u>	
Issued Date:	<u>Jan.22, 2018</u>	
Tested By:	<u>Lisa. Li / Engineer</u>	<i>Lisa . Li</i>
Reviewed By:	<u>arno. Liu / EMC Manager</u>	<i>Arno Liu</i>
Approved & Authorized By:	<u>Mike mo / PSQ Manager</u>	<i>Mike mo</i>
Prepared By:	BSL Testing Co.,LTD.	
	NO. 24, ZH Park, Nantou, Shenzhen, 518000 China	
	Tel: 86- 755-26508703	Fax: 86- 755-26508703

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS.....	8
3. RF EXPOSURE	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE.....	10
4.2 EVALUATION INFORMATION.....	10
5. FREQUENCY HOPPING SYSTEM REQUIREMENTS	11
5.1 STANDARD APPLICABLE.....	11
5.2 FREQUENCY HOPPING SYSTEM.....	11
5.3 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	12
6. QUANTITY OF HOPPING CHANNELS AND CHANNEL SEPARATION.....	13
6.1 STANDARD APPLICABLE.....	13
6.2 TEST PROCEDURE.....	13
6.3 ENVIRONMENTAL CONDITIONS	13
6.4 SUMMARY OF TEST RESULTS/PLOTS	14
7. DWELL TIME OF HOPPING CHANNEL.....	16
7.1 STANDARD APPLICABLE.....	16
7.2 TEST PROCEDURE.....	16
7.3 ENVIRONMENTAL CONDITIONS	16
7.4 SUMMARY OF TEST RESULTS/PLOTS	17
8. 20DB BANDWIDTH.....	19
8.1 STANDARD APPLICABLE.....	19
8.2 TEST PROCEDURE.....	19
8.3 ENVIRONMENTAL CONDITIONS	20
8.4 SUMMARY OF TEST RESULTS/PLOTS	20
9. RF OUTPUT POWER.....	26
9.1 STANDARD APPLICABLE.....	26
9.2 TEST PROCEDURE.....	26
9.3 ENVIRONMENTAL CONDITIONS	26
9.4 SUMMARY OF TEST RESULTS/PLOTS	26
10. FIELD STRENGTH OF SPURIOUS EMISSIONS	33
10.1 STANDARD APPLICABLE.....	33
10.2 TEST PROCEDURE.....	33
10.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	34
10.4 ENVIRONMENTAL CONDITIONS	34
10.5 SUMMARY OF TEST RESULTS/PLOTS	35
11. OUT OF BAND EMISSIONS	40
11.1 STANDARD APPLICABLE.....	40
11.2 TEST PROCEDURE.....	40
11.3 ENVIRONMENTAL CONDITIONS	41
11.4 SUMMARY OF TEST RESULTS/PLOTS	42
12. CONDUCTED EMISSIONS	44
12.1 TEST PROCEDURE.....	44

12.2 BASIC TEST SETUP BLOCK DIAGRAM.....44
12.3 ENVIRONMENTAL CONDITIONS44
12.4 TEST RECEIVER SETUP45
12.5 SUMMARY OF TEST RESULTS/PLOTS45
12.6 CONDUCTED EMISSIONS TEST DATA.....45

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: HOPSUN INTERNATIONAL (H. K.)LTD.
 Address of applicant: Room 1609, Building B, new day CBC, second street of SHIXIA, Futian District, Shenzhen, China

Manufacturer: HOPSUN INTERNATIONAL (H. K.)LTD.
 Address of manufacturer: Room 1609, Building B, new day CBC, second street of SHIXIA, Futian District, Shenzhen, China

General Description of EUT	
Product Name:	Portable speaker
Trade Name:	NA
Model No. :	HS-M124
Adding Model(s) :	HS-M104, HS-M154, HS-M164, HS-M174, HS-M184, HS-M194, HS-M204, HS-B105, HS-B115, HS-B125, HS-B135, HS-B145, HS-B155, HS-B165, HS-B175, BZBT-18, BTJ-13, BY-AU-BS-134-BK, BY-AU-BS-133-BK
Rated Voltage:	Input: DC 5.1V from USB
Power Adapter Model:	N/A
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The color and name of others models listed in the report is different from main-test model HS-M124, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V4.0
Frequency Range:	2402-2480MHz
RF Output Power:	1.89dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79
Channel Separation:	1MHz
Type of Antenna:	PCB
Antenna Gain:	0 dBi
Lowest Internal Frequency of EUT:	26MHz

1.2 Test Standards

The following report is prepared on behalf of the HOPSUN INTERNATIONAL(H.K.)LTD. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

BSL Testing Co.,LTD.

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Designation Number : CN1217

Test Firm Registration Number: 866035

Tel: 86- 755-26508703

Fax: 86- 755-26508703

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2441MHz
TM3	High Channel	2480MHz
TM4	Hopping	2402-2480MHz

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	27
	DH3	11	183
	DH5	15	339
Pi/4 DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	679
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021

Normal mode: the Bluetooth has been tested on the modulation of GFSK and (Pi/4)DQPSK, 8DPSK compliance test and record the worst case.

Accessories Equipment List and Details			
Description	Manufacturer	Model No.	Serial Number
/	/	/	/
Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
/	/	/	/
/	/	/	/
Auxiliary equipment Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
USB	1.5	Shielded	Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
Communication Tester	Rohde & Schwarz	CMW500	100358	2017-10-21	2018-10-20
Spectrum Analyzer	R&S	FSP40	100550	2017-10-21	2018-10-20
Test Receiver	R&S	ESCI7	US47140102	2017-10-21	2018-10-20
Signal Generator	HP	83630B	3844A01028	2017-10-22	2018-10-21
Test Receiver	R&S	ESPI-3	100180	2017-10-21	2018-10-20
Amplifier	Agilent	8449B	4035A00116	2017-10-22	2018-10-21
Amplifier	HP	8447E	2945A02770	2017-10-22	2018-10-21
Signal Generator	IFR	2023A	202307/242	2017-10-22	2018-10-21
Broadband Antenna	SCHAFFNER	2774	2774	2017-10-17	2018-10-16
Biconical and log periodic antennas	ELECTRO-METRICS	EM-6917B-1	171	2017-10-17	2018-10-16
Horn Antenna	R&S	HF906	100253	2017-10-17	2018-10-16
Horn Antenna	EM	EM-6961	6462	2017-10-17	2018-10-16
LISN	R&S	ESH3-Z5	100196	2017-10-17	2018-10-16
LISN	COM-POWER	LI-115	02027	2017-10-17	2018-10-16
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	2017-10-21	2018-10-20
Horn Antenna	A-INFOMW	LB-180400KF	BSL088	2017-10-21	2018-10-20

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)	Radiated Spurious Emissions	Compliant
§ 15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§ 15.247(a)(1)	Channel Separation	Compliant
§ 15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Compliant
§ 15.247(a)	20dB Bandwidth	Compliant
§ 15.247(b)(1)	RF Power Output	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant
§ 15.247(a)(1)	Frequency Hopping Sequence	Compliant
§ 15.247(g), (h)	Frequency Hopping System	Compliant

Note: Compliant: applicable, N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a PCB antenna, fulfill the requirement of this section.

5. Frequency Hopping System Requirements

5.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

5.2 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for DA 00-705 and FCC Part 15.247 rule.

5.3 EUT Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6. Quantity of Hopping Channels and Channel Separation

6.1 Standard Applicable

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

6.2 Test Procedure

According to ANSI C63.10-2013 section 7.8.3, the number of hopping frequencies test method as follows.

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

According to ANSI C63.10-2013 section 7.8.2, the EUT shall have its hopping function enabled, the Carrier frequency separation test method as follows:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


6.3 Environmental Conditions

Temperature:	24 ~C
Relative Humidity:	54~
ATM Pressure:	1011 mbar

6.4 Summary of Test Results/Plots

Note: Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst results has been recorded on the follow page., the worst data is GFSK


No. of Channel = 79

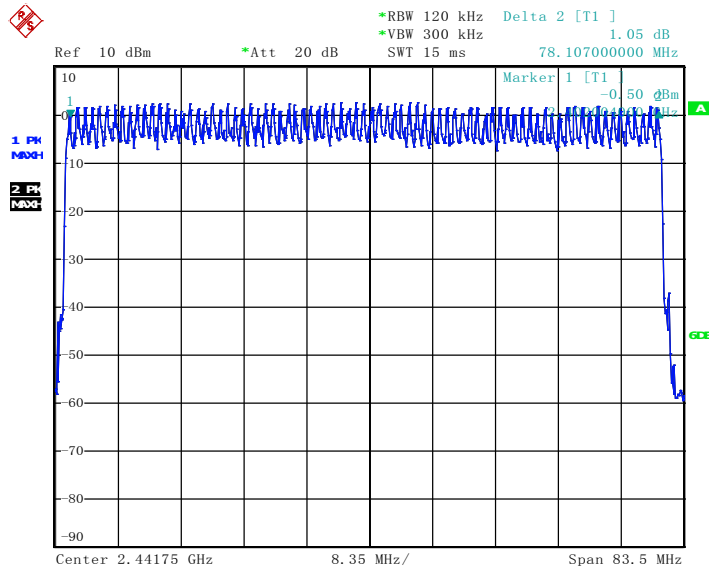

Date: 9. JAN. 2018 04:00:58


For GFSK (DH1) mode

Channel Spacing (Low CH=1.000MHz)

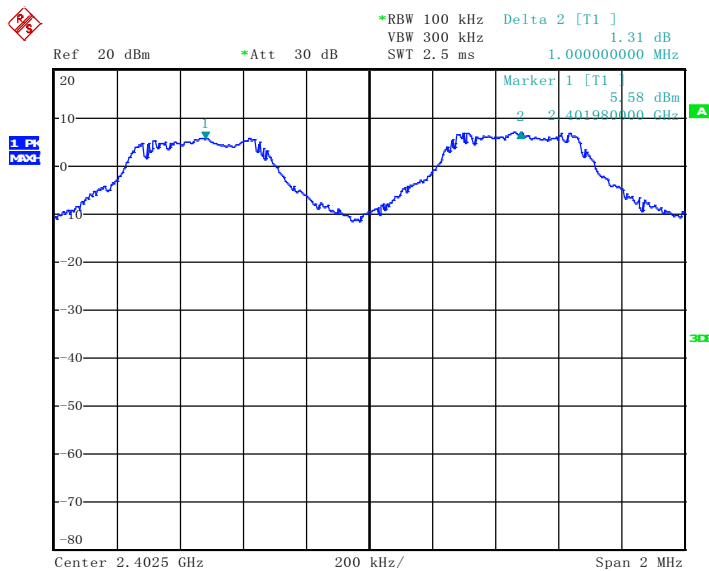


Date: 9. JAN. 2018 20:37:17

Channel Spacing (Middle CH=1.004MHz)

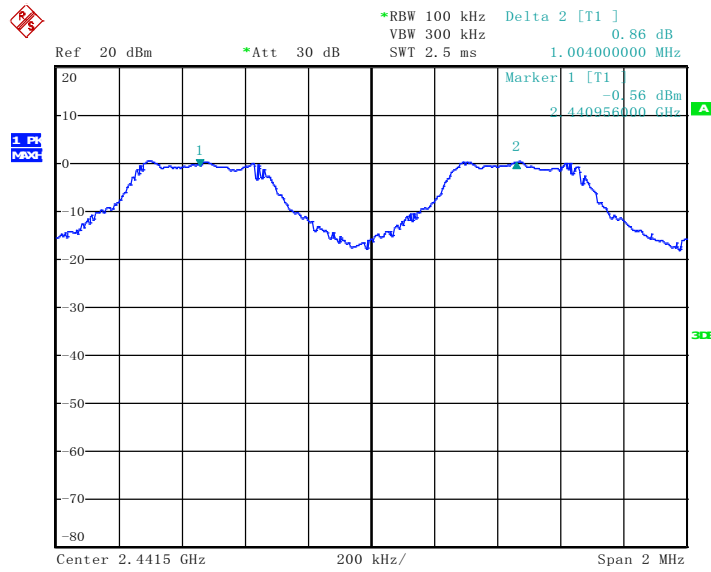

Date: 9. JAN. 2018 21:13:13

Channel Spacing (High CH=1MHz)

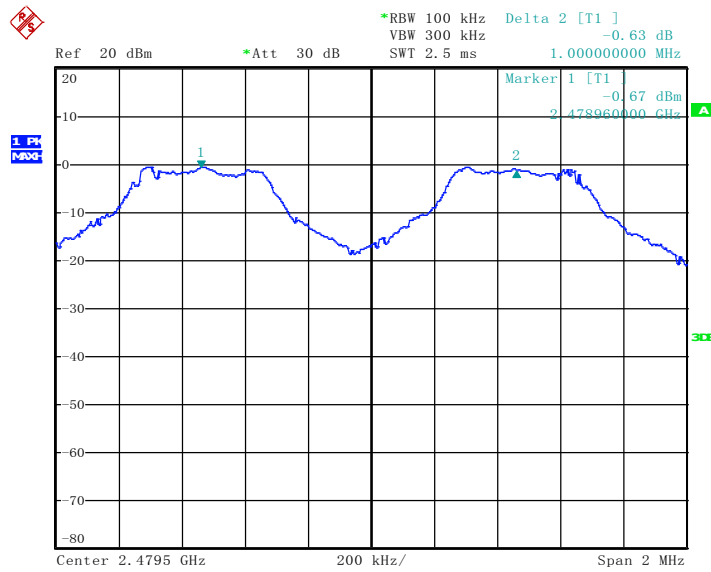

Date: 9. JAN. 2018 21:37:41

7. Dwell Time of Hopping Channel

7.1 Standard Applicable

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2 Test Procedure

According to ANSI C63.10-2013 section 7.8.4, the dwell time of a hopping channel test method as follows.

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned} &(\text{Number of hops in the period specified in the requirements}) = \\ &(\text{number of hops on spectrum analyzer}) \times (\text{period specified in the requirements} / \text{analyzer sweep time}) \end{aligned}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation. The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

7.3 Environmental Conditions

Temperature:	24 ~C
Relative Humidity:	54~
ATM Pressure:	1011 mbar

7.4 Summary of Test Results/Plots

The dwell time within a period in data mode is independent from the packet type (packet length).

Test data is corrected with the worse case, which the packet length is DH1, DH3, and DH5.


Modulation Mode	Channel Number	Packet type	Time Slot Length	dwell time	Limit	Verdict
			ms	(ms)	(ms)	
GFSK	0	DH1	0.44	140.8	<400	PASS
	0	DH3	1.735	277.6	<400	PASS
	0	DH5	3.02	322.13	<400	PASS

Note1: DwellTime(DH1)= Time Slot Length *(1600/2/79)*31.6
 DwellTime(DH3)= Time Slot Length *(1600/4/79)*31.6
 DwellTime(DH5)= Time Slot Length *(1600/6/79)*31.6
 The test period: T = 0.4 Second * 79 Channel = 31.6 s

Note2: Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst results of GFSK has been recorded on the follow page.


Please refer to the test plots as below:

GFSK time slot Low Channel: DH1

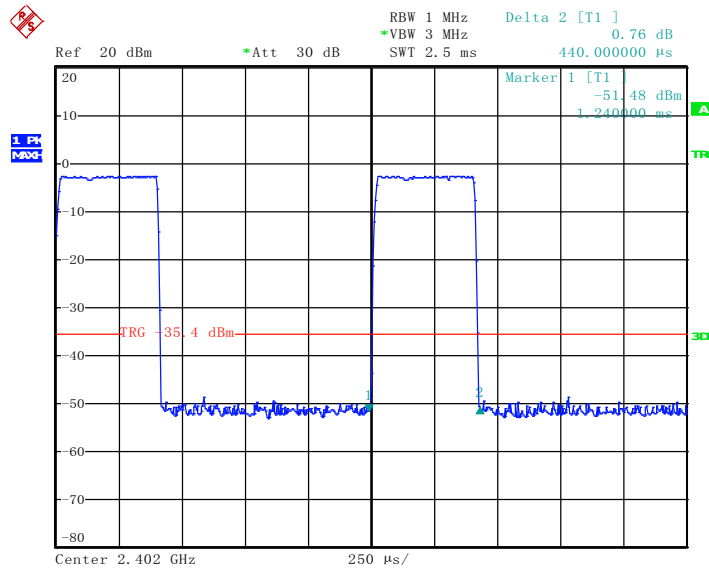


Date: 10. JAN. 2018 01:24:10

GFSK time slot Low Channel: DH3

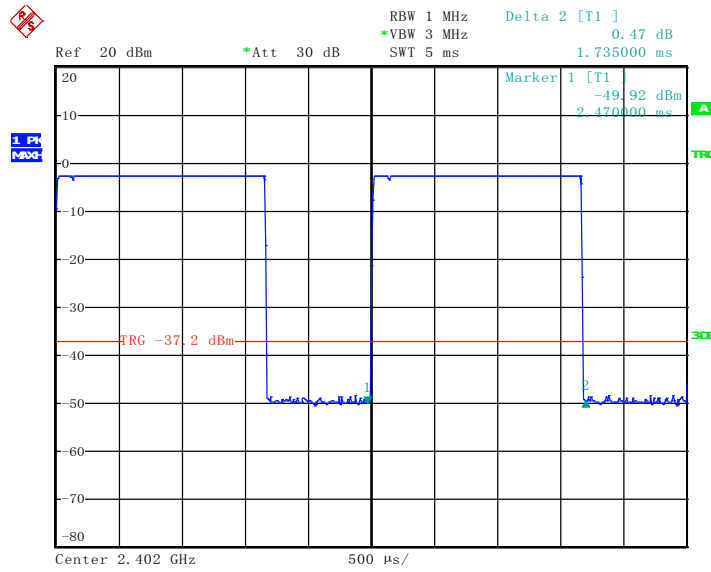

Date: 10. JAN. 2018 01:28:58

GFSK time slot Low Channel: DH5

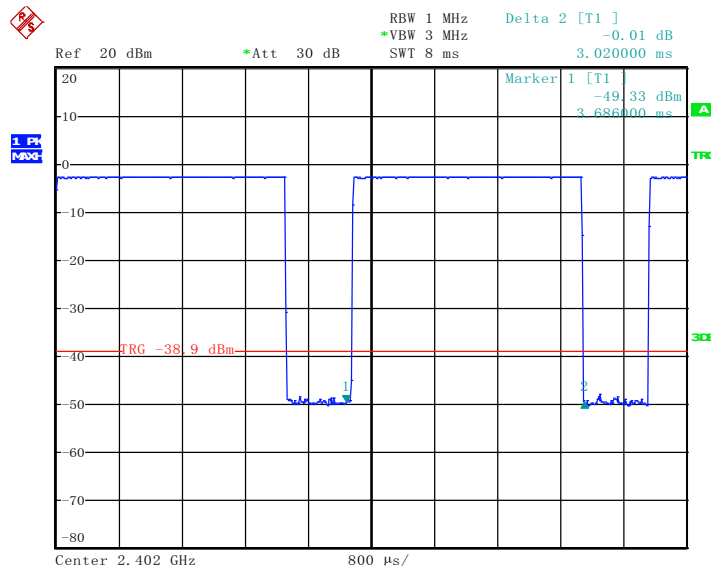

Date: 10. JAN. 2018 01:57:23

8. 20dB Bandwidth

8.1 Standard Applicable

According to 15.247(a) and 15.215(c). 20dB bandwidth is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.2 Test Procedure

According to ANSI C63.10-2013 section 6.9.2, the 20dB bandwidth test method as follows.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

8.3 Environmental Conditions

Temperature:	25 ~C
Relative Humidity:	53~
ATM Pressure:	1018 mbar


8.4 Summary of Test Results/Plots

Note: We pre-scan all mode, the worst data is DH1, 2DH1. 3DH1

Test Mode	Test Channel MHz	20 dB Bandwidth kHz	Result
GFSK	2402	1116	Pass
	2441	1100	Pass
	2480	1092	Pass
Pi/4 QDPSK	2402	1404	Pass
	2441	1506	Pass
	2480	1338	Pass
8DPSK	2402	1356	Pass
	2441	1344	Pass
	2480	1350	Pass


For GFSK(DH1)

Low Channel:

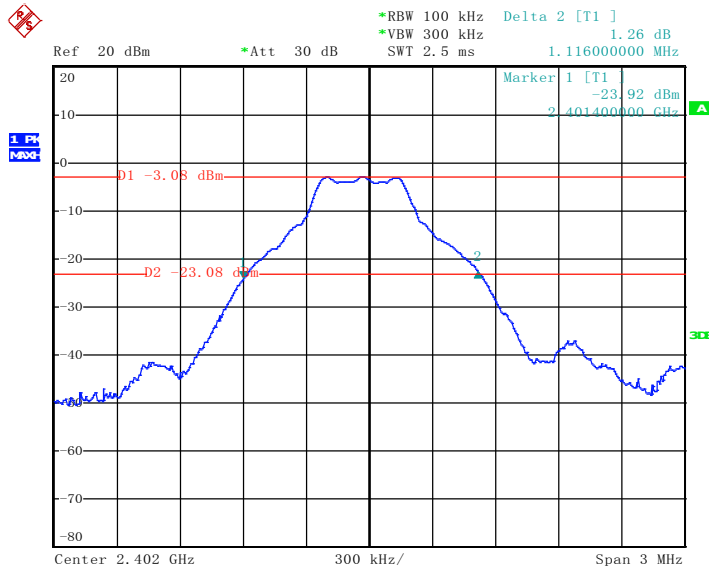


Date: 11. JAN. 2018 02:30:42

Middle Channel:

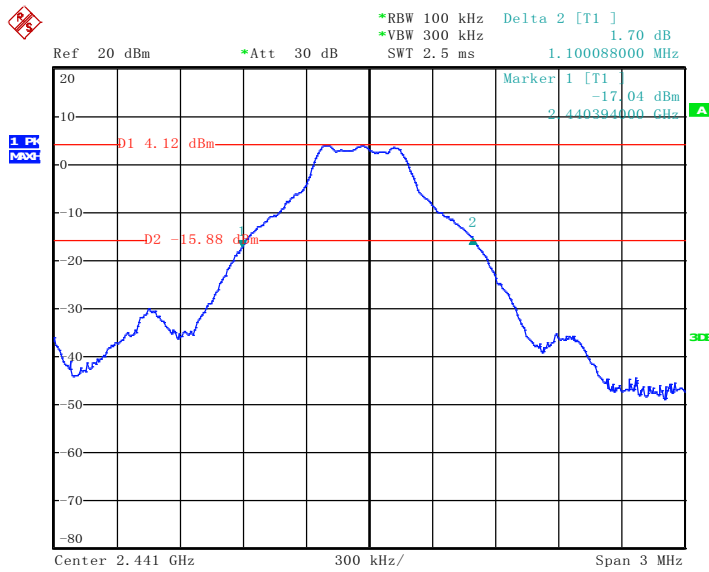

Date: 11. JAN. 2018 02:27:23


High Channel:

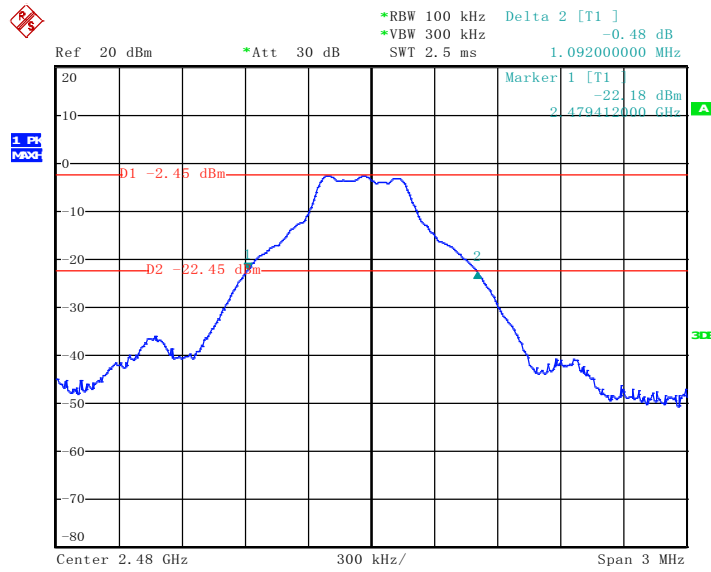

Date: 11. JAN. 2018 02:23:05


For Pi/4 QDPSK(2DH1)

Low Channel:

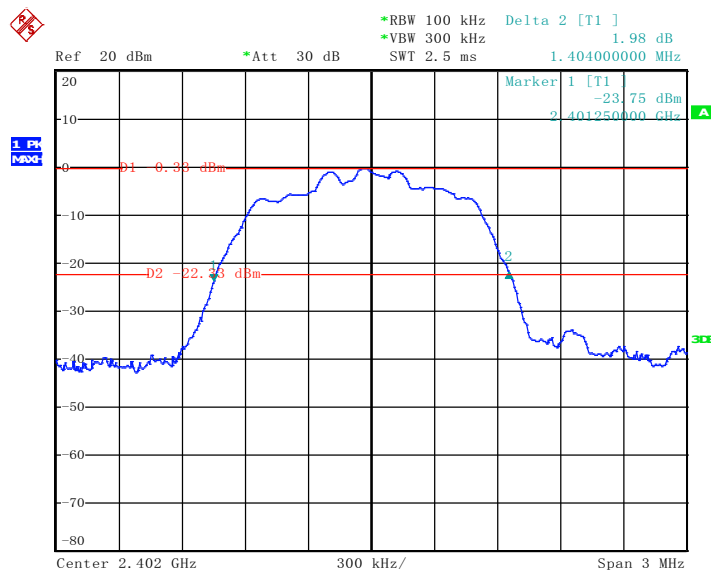


Date: 11. JAN. 2018 02:33:10

Middle Channel:

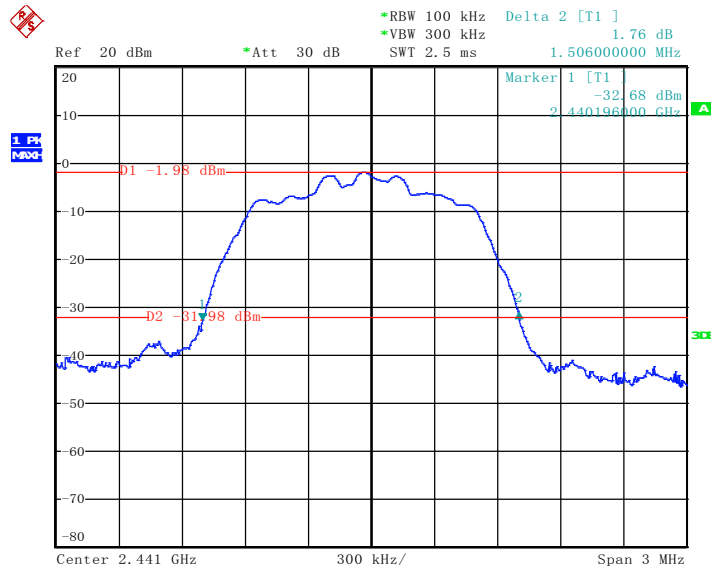

Date: 11. JAN. 2018 02:37:35


High Channel:

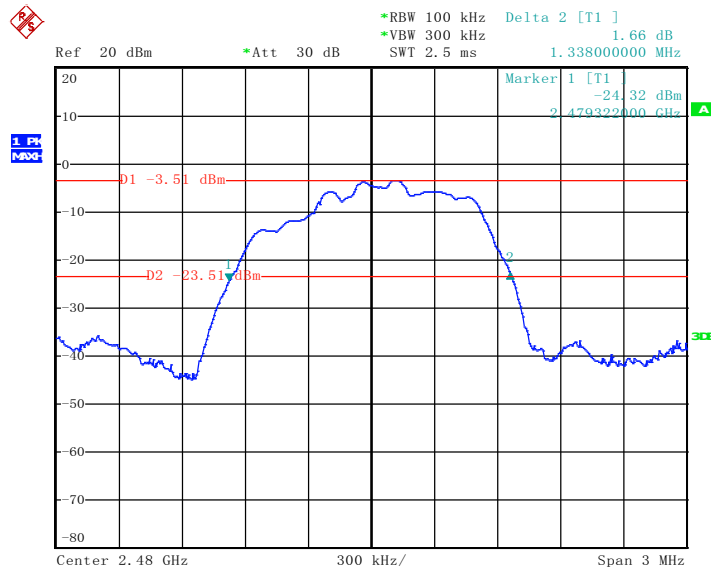

Date: 11. JAN. 2018 02:42:59


For 8DPSK (3DH1)

Low Channel:

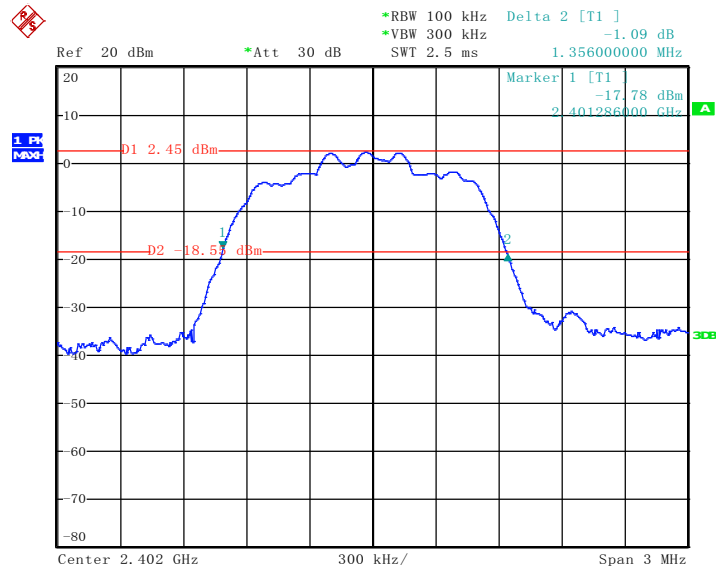


Date: 11. JAN. 2018 01:53:58

Middle Channel:

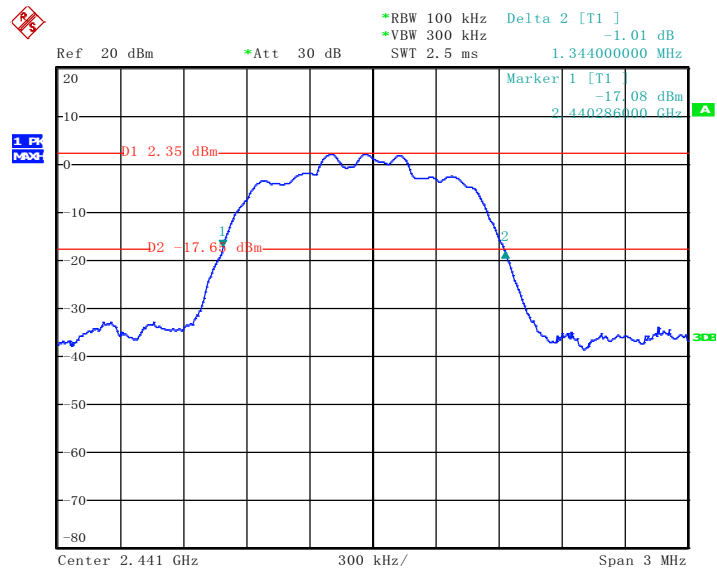

Date: 11. JAN. 2018 02:05:44

High Channel:

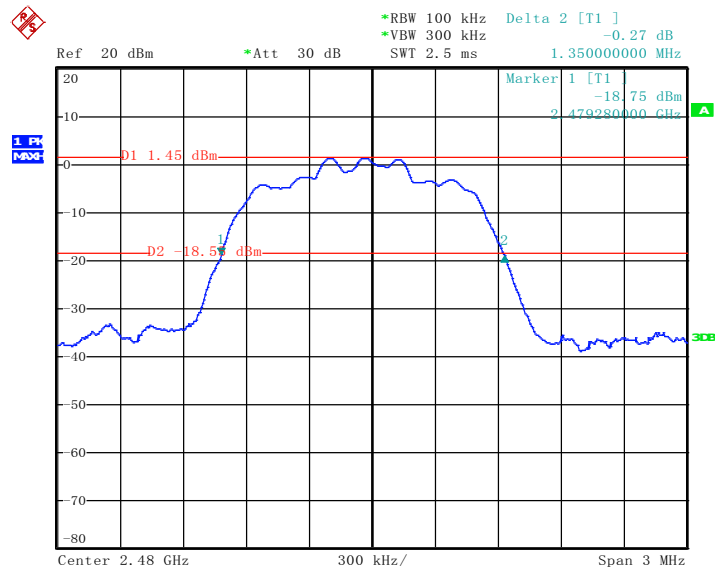

Date: 11. JAN. 2018 02:18:41

9. RF Output Power

9.1 Standard Applicable

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

9.2 Test Procedure

According to ANSI C63.10-2013 section 7.8.5, the output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

9.3 Environmental Conditions

Temperature:	24 ~C
Relative Humidity:	55~
ATM Pressure:	1011 mbar

9.4 Summary of Test Results/Plots

Note: We pre-scan all mode, the worst data is DH1, 2DH1. 3DH1

For GFSK(DH1)

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	0.6	1.15	125
Middle Channel	2441	1.89	1.55	125
High Channel	2480	0.74	1.19	125

For Pi/4 QDPSK(2DH1)


Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	-0.26	0.94	125
Middle Channel	2441	0.93	1.24	125
High Channel	2480	0.27	1.06	125

For 8 QDPSK(3DH1)

Channel	Frequency MHz	Measured Value dBm	Output Power mW	Limit mW
Low Channel	2402	0.39	1.09	125
Middle Channel	2441	0.83	1.21	125
High Channel	2480	0.80	1.20	125


*Note: the antenna gain of **0dBi** less than 6dBi maximum permission antenna gain value based on 0.125 watt peak output power limit.*

For GFSK(DH1)
Low Channel

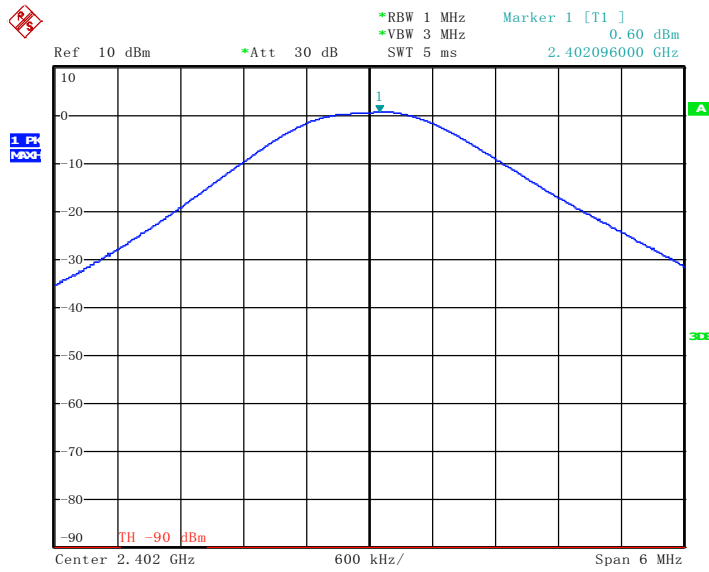


Date: 19. JAN. 2018 02:28:08

Middle Channel

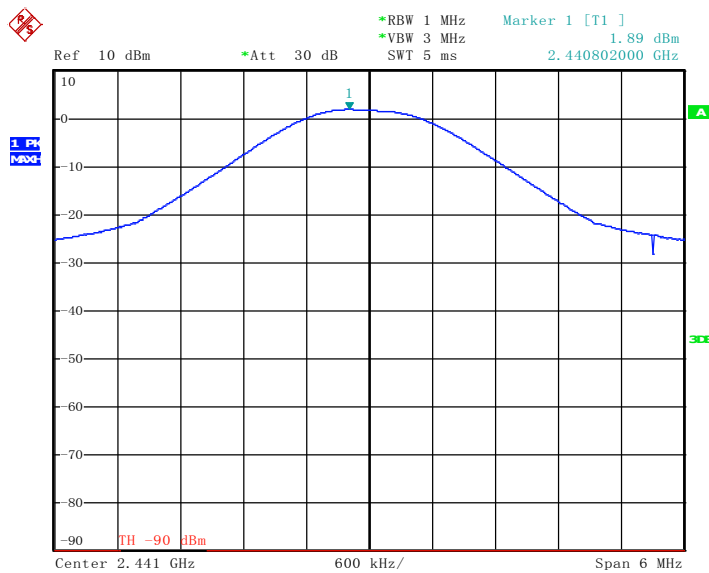

Date: 19. JAN. 2018 02:29:49


High Channel

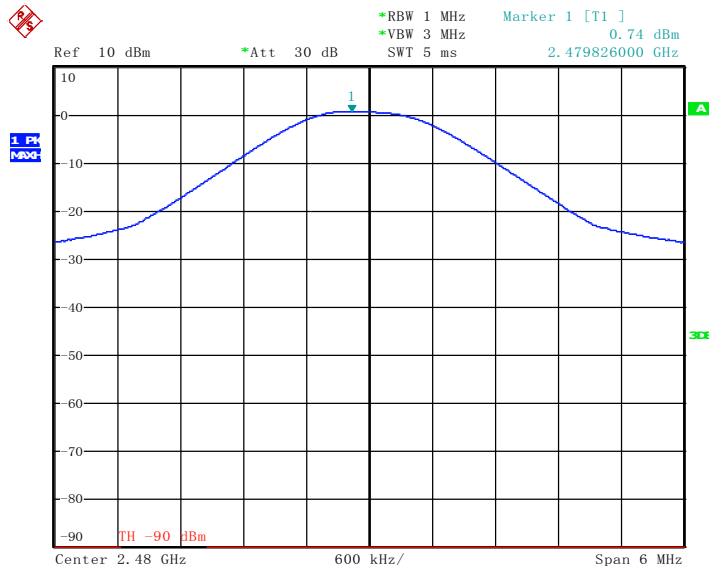

Date: 19. JAN. 2018 02:31:37


For Pi/4 QDPSK(2DH1)

Low Channel

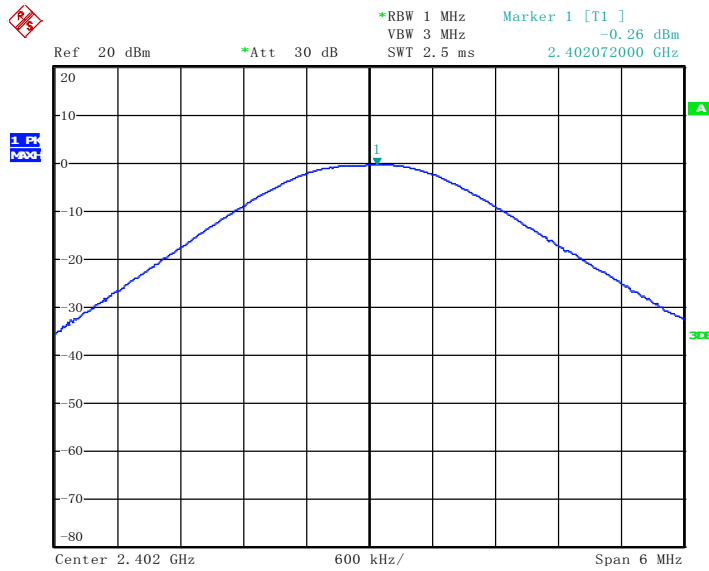


Date: 22. JAN. 2018 22:20:30

Middle Channel

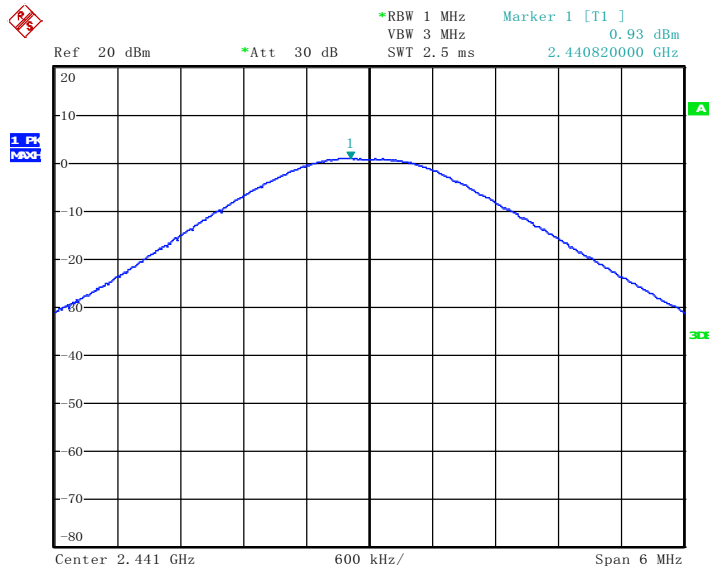

Date: 22. JAN. 2018 22:19:18


High Channel

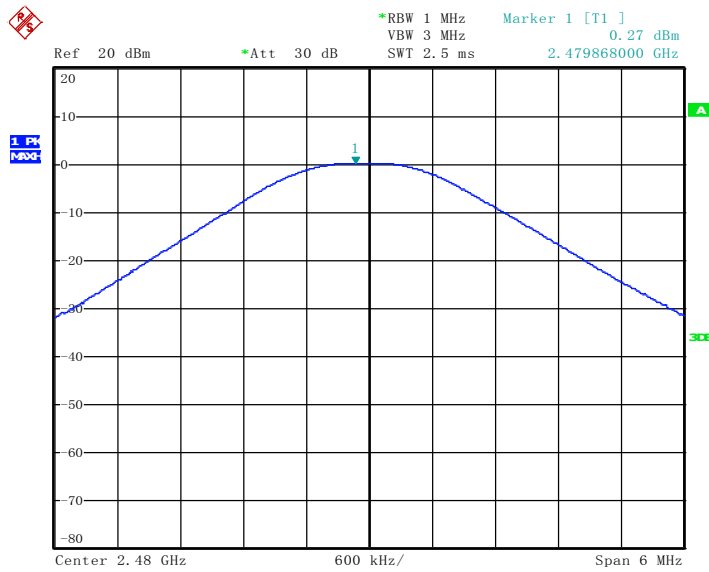

Date: 22. JAN. 2018 22:17:38


For 8 QDPSK(3DH1)

Low Channel

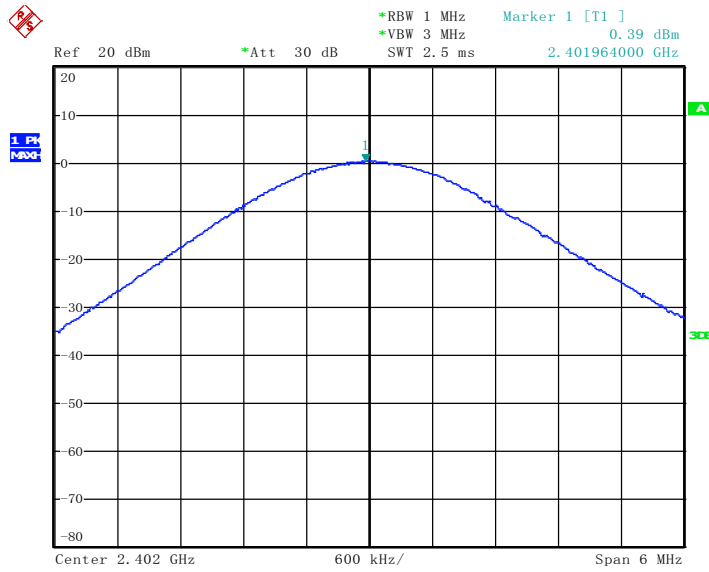


Date: 24. JAN. 2018 01:56:40

Middle Channel

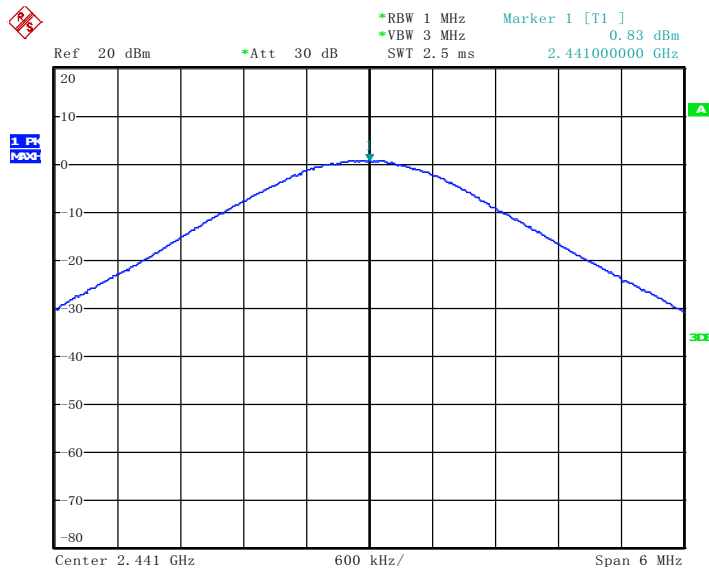

Date: 24. JAN. 2018 01:55:25

High Channel

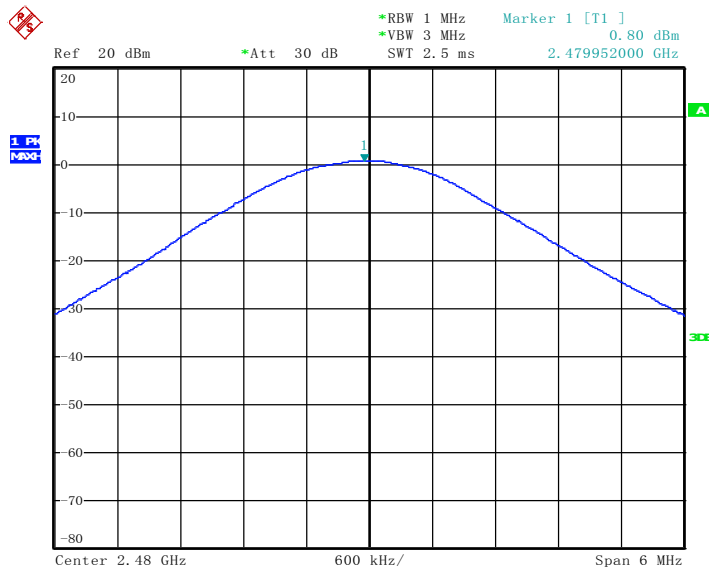

Date: 24. JAN. 2018 01:53:46

10. Field Strength of Spurious Emissions

10.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


10.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

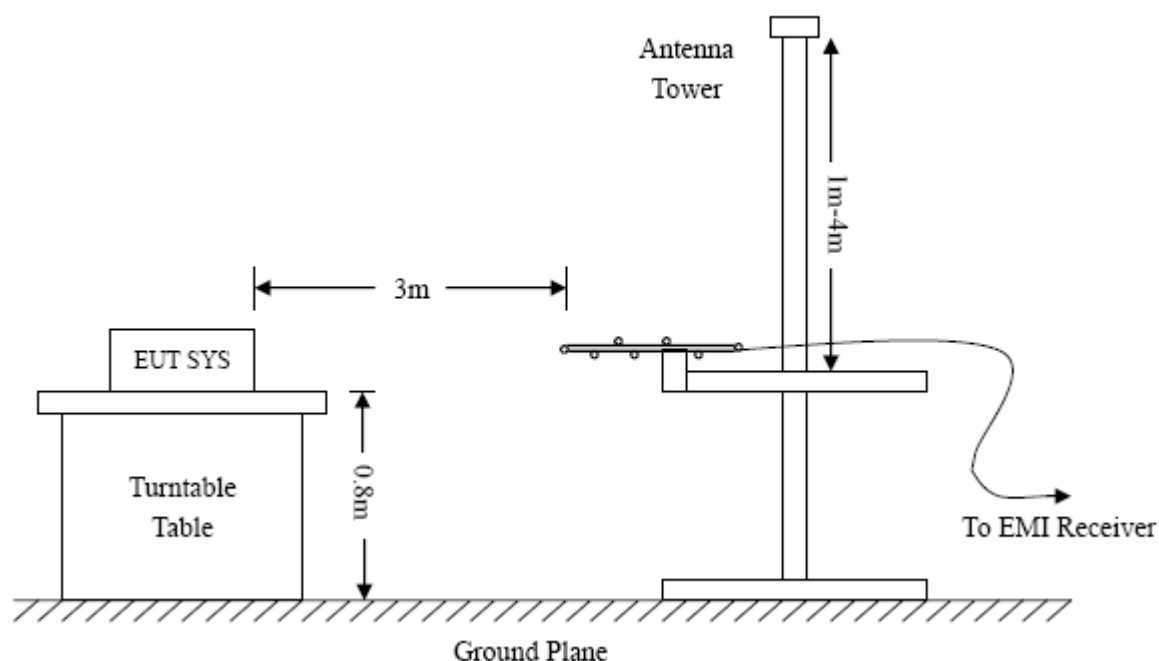

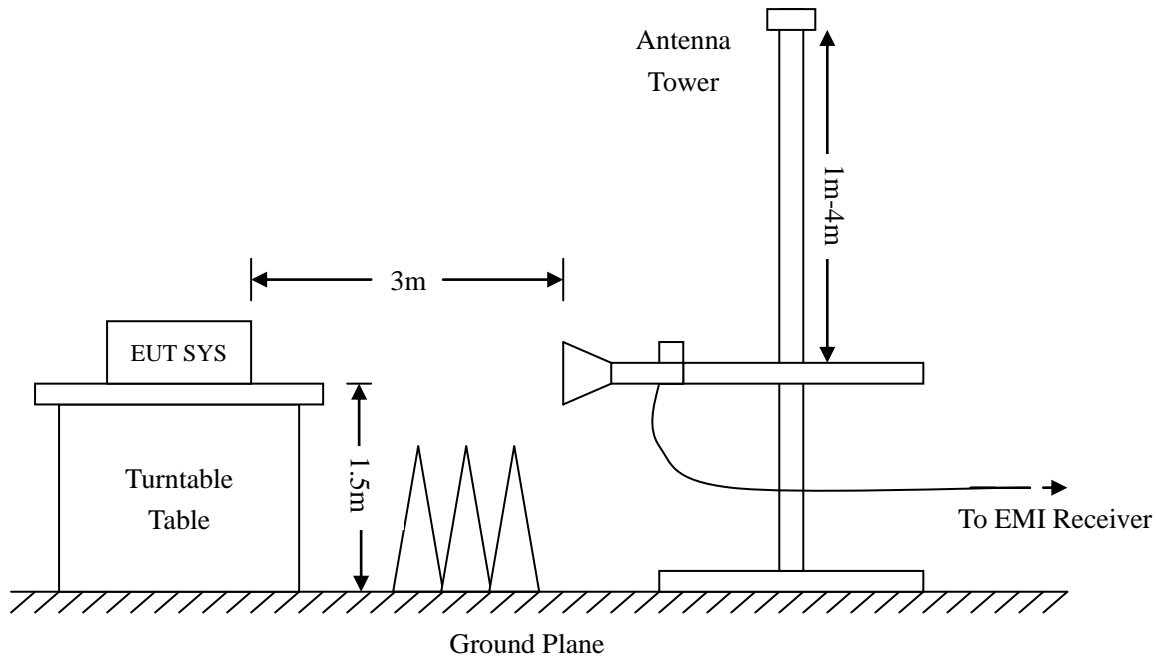

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

10.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB±V means the emission is 6dB±V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

10.4 Environmental Conditions

Temperature:	25 ~C
Relative Humidity:	52~
ATM Pressure:	1012 mbar

10.5 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

Note:

1. Worst-case radiated emission below 1GHz is Pi/4 QDPSK 2DH1 Low Channel mode.
2. Worst-case radiated emission above 1GHz is GFSK DH1(Low, Middle, High Channel) mode.


Plot of Radiated Emissions Test Data (30MHz to 1GHz): Pi/4 QDPSK 2DH1 (Low Channel) mode

Test Specification: Horizontal

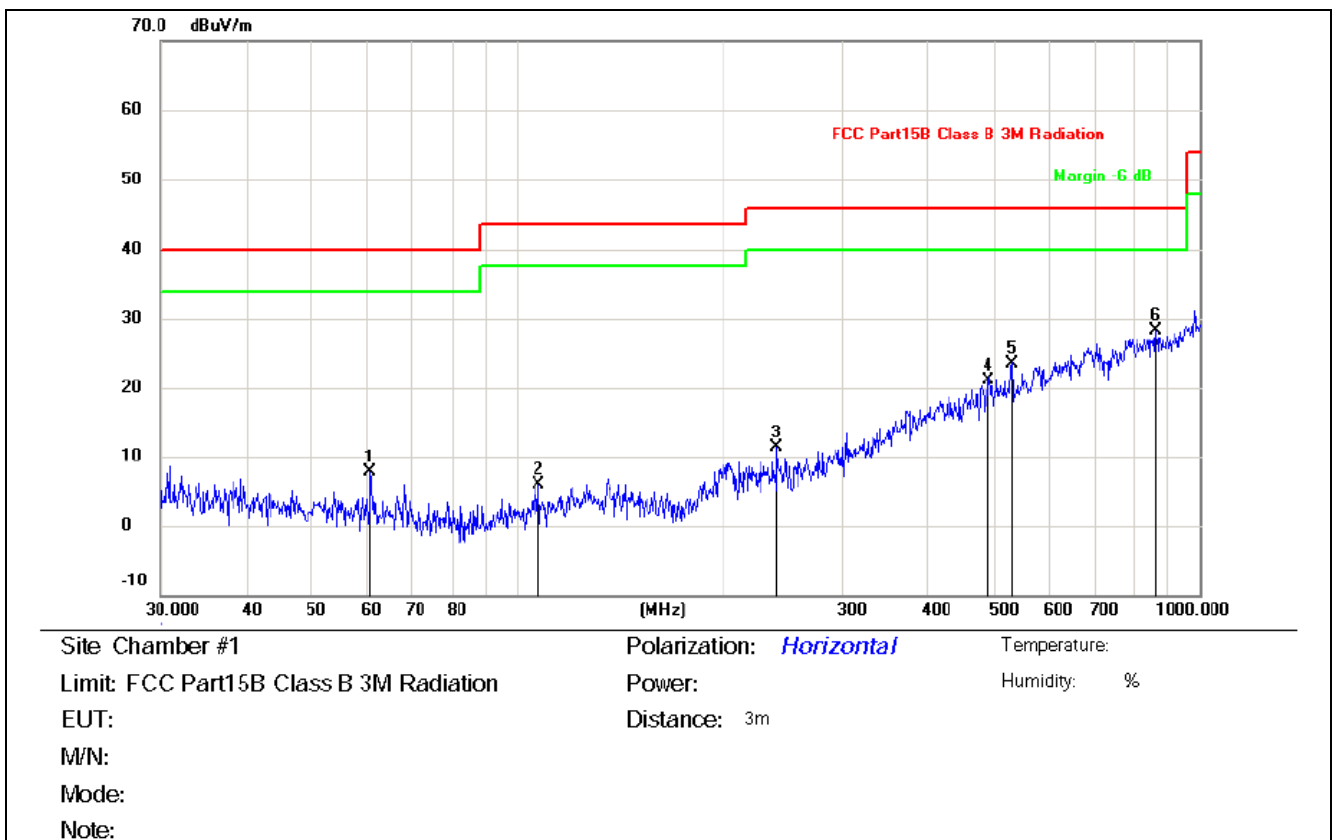

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	60.7044	17.75	-10.07	7.68	40.00	-32.32	peak			
2	107.1337	14.94	-9.07	5.87	43.50	-37.63	peak			
3	239.9874	15.26	-3.97	11.29	46.00	-34.71	peak			
4	490.7447	13.98	7.03	21.01	46.00	-24.99	peak			
5	530.1014	15.51	8.09	23.60	46.00	-22.40	peak			
6 *	863.0562	14.83	13.50	28.33	46.00	-17.67	peak			

Test Specification: Vertical

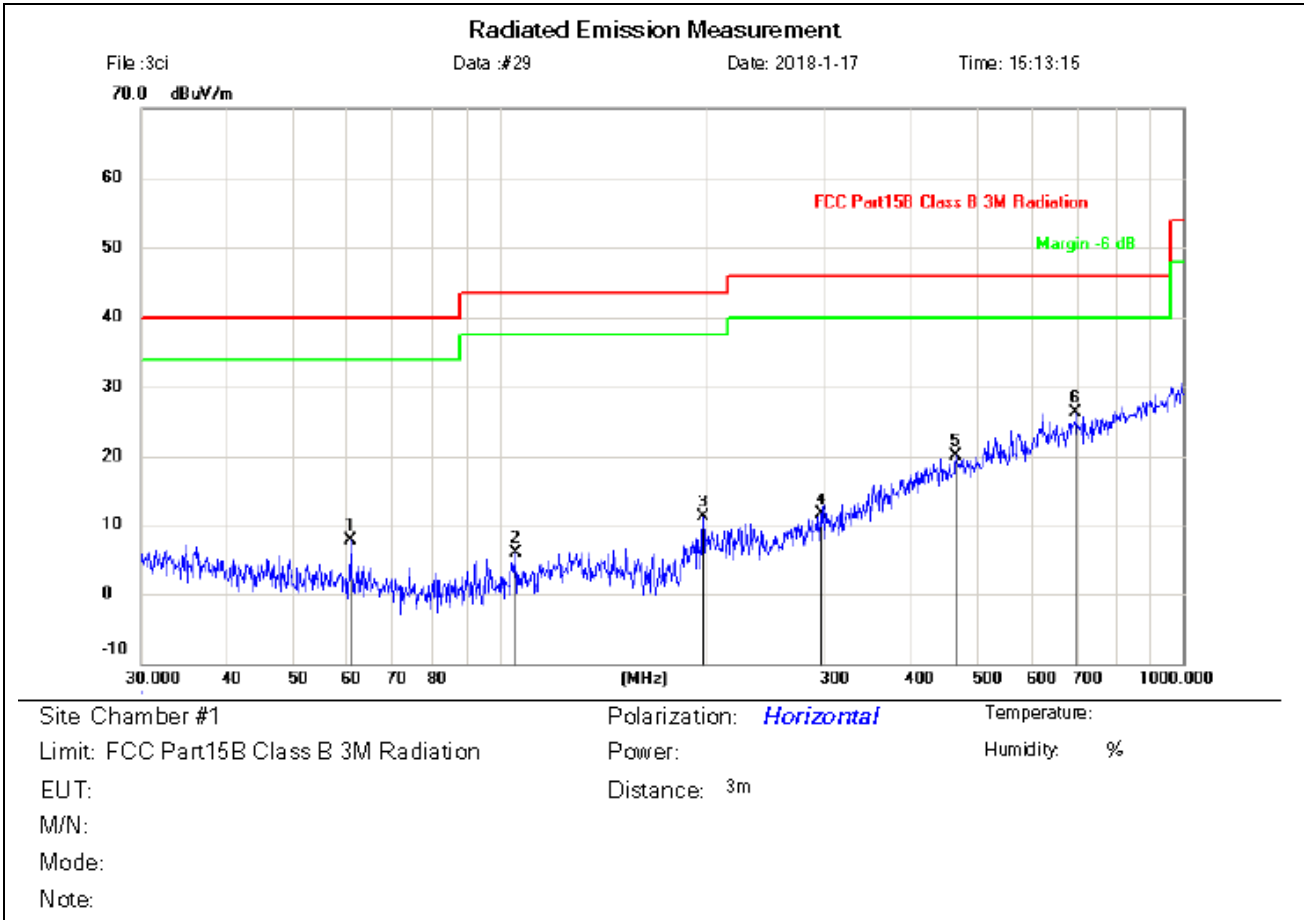

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	cm	degree	
1		60.7044	17.77	-10.07	7.70	40.00	-32.30	peak		
2		105.6415	15.19	-9.22	5.97	43.50	-37.53	peak		
3		198.5880	15.64	-4.58	11.06	43.50	-32.44	peak		
4		295.1469	13.33	-1.74	11.59	46.00	-34.41	peak		
5		465.5994	14.18	5.96	20.14	46.00	-25.86	peak		
6	*	696.8567	14.57	11.72	26.29	46.00	-19.71	peak		

Spurious Emissions Above 1GHz: GPSK DH1 mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4217	55.73	-3.63	52.86	74	-21.14	H	PK
4217	44.61	-3.63	42.15	54	-11.85	H	AV
6106	50.61	-0.57	50.19	74	-23.81	H	PK
6106	40.15	-0.57	39.28	54	-14.71	H	AV
4217	56.51	-3.63	52.72	74	-21.28	V	PK
4217	45.68	-3.63	42.29	54	-11.71	V	AV
6106	51.78	-0.57	51.27	74	-22.73	V	PK
6106	44.14	-0.57	43.19	54	-10.86	V	AV
Middle Channel-2441MHz							
4639	57.15	-3.52	55.49	74	-18.51	H	PK
4639	45.93	-3.52	42.38	54	-11.62	H	AV
7591	50.39	-0.48	48.2	74	-25.8	H	PK
7591	40.91	-0.48	44.34	54	-9.66	H	AV
4639	53.62	-3.52	50.68	74	-23.32	V	PK
4639	43.38	-3.52	38.29	54	-15.71	V	AV
7591	51.57	-0.48	54.35	74	-19.65	V	PK
7591	41.37	-0.48	42.29	54	-11.71	V	AV
High Channel-2480MHz							
4539	56.41	-3.45	52.58	74	-21.42	H	PK
4539	45.4	-3.45	41.15	54	-12.85	H	AV
7659	50.66	-0.42	50.64	74	-23.36	H	PK
7659	41.81	-0.42	41.63	54	-12.37	H	AV
4539	54.45	-3.45	51.49	74	-22.51	V	PK
4539	44.33	-3.45	40.53	54	-13.47	V	AV
7659	52.51	-0.42	51.28	74	-22.72	V	PK
7659	41.11	-0.42	40.12	54	-13.88	V	AV


Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Spurious Emission(Conducted)

Note: Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst results has been recorded on the follow page.


For GFSK(DH1)

Low channel:

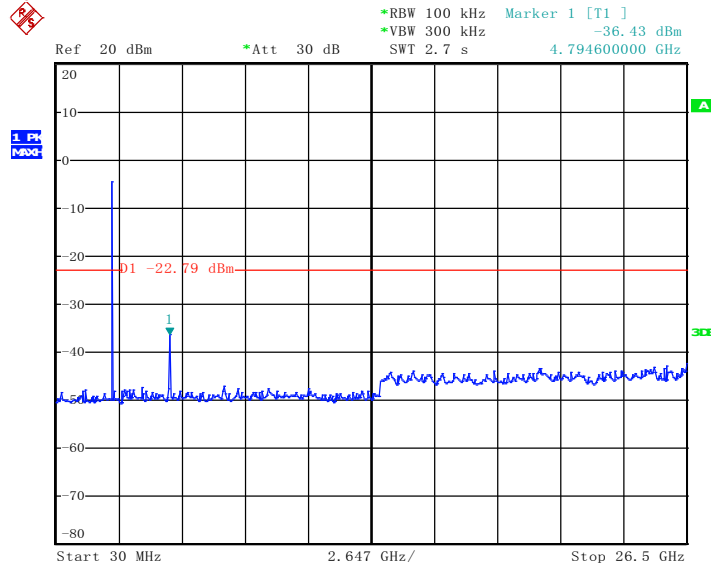


Date: 10. JAN. 2018 02:42:32

Middle channel:

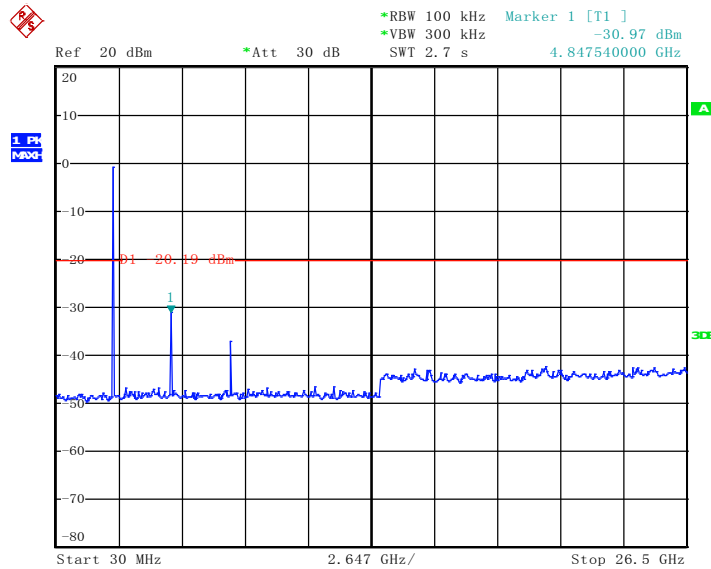

Date: 10. JAN. 2018 02:46:48

High channel:

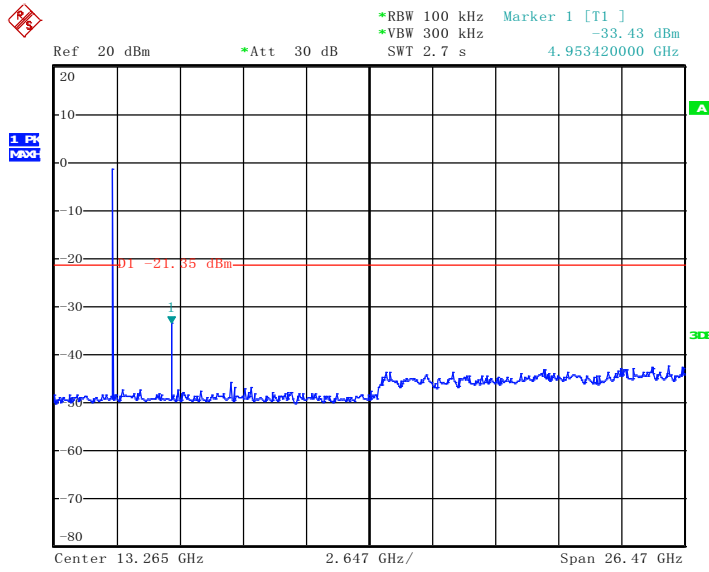

Date: 10. JAN. 2018 02:49:57

11. Out of Band Emissions

11.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

11.2 Test Procedure

According to ANSI C63.10-2013 section 7.8.6, the Band-edge measurements for RF conducted emissions test method as follows.

- a) Connect the EMI receiver or spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described in step e) (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).
- b) Set the EUT to the lowest frequency channel (for the hopping on test, the hopping sequence shall include the lowest frequency channel).
- c) Set the EUT to operate at maximum output power and 100% duty cycle, or equivalent “normal mode of operation” as specified in 6.10.3.
- d) If using the radiated method, then use the applicable procedure(s) of 6.4, 6.5, or 6.6, and orient the EUT and measurement antenna positions to produce the highest emission level.
- e) Perform the test as follows:
 - 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
 - 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
 - 3) Attenuation: Auto (at least 10 dB preferred).
 - 4) Sweep time: Coupled.
 - 5) Resolution bandwidth: 100 kHz.
 - 6) Video bandwidth: 300 kHz.
 - 7) Detector: Peak.
 - 8) Trace: Max hold.
- f) Allow the trace to stabilize. For the test with the hopping function turned ON, this can take several minutes to achieve a reasonable probability of intercepting any emissions due to oscillator overshoot.
- g) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak

function to move the marker to the peak of the in-band emission.

h) Repeat step c) through step e) for every applicable modulation.

i) Set the EUT to the highest frequency channel (for the hopping on test, the hopping sequence shall include the highest frequency channel) and repeat step c) through step d).

j) The band-edge measurement shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Restricted-band band-edge test method please refers to ANSI C63.10-2013 section 6.10.5. The emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated band-edge measurements.

According to ANSI C63.10-2013 section 7.8.8, Conducted spurious emissions shall be measured for the transmit frequency, per 5.5 and 5.6, and at the maximum transmit powers.

Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer. The instrument shall span 30 MHz to 10 times the operating frequency in GHz, with a resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector. The band 30 MHz to the highest frequency may be split into smaller spans, as long as the entire spectrum is covered.

11.3 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

11.4 Summary of Test Results/Plots


Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result (GFSK) was report as below:

GFSK (DH1)

Lowest

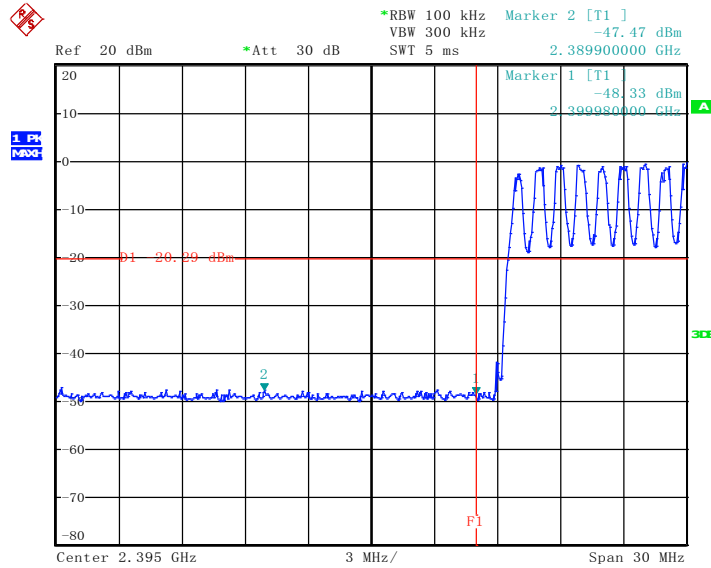


Date: 9. JAN. 2018 22:01:16

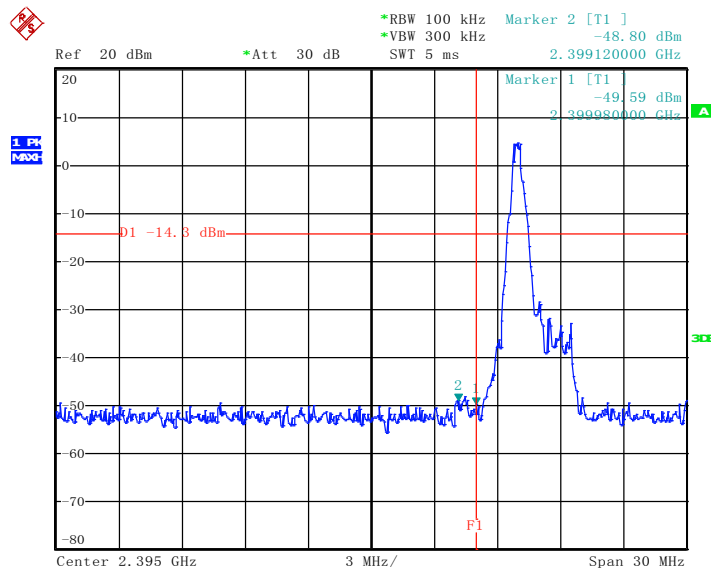


Date: 11. JAN. 2018 00:26:44

Highest

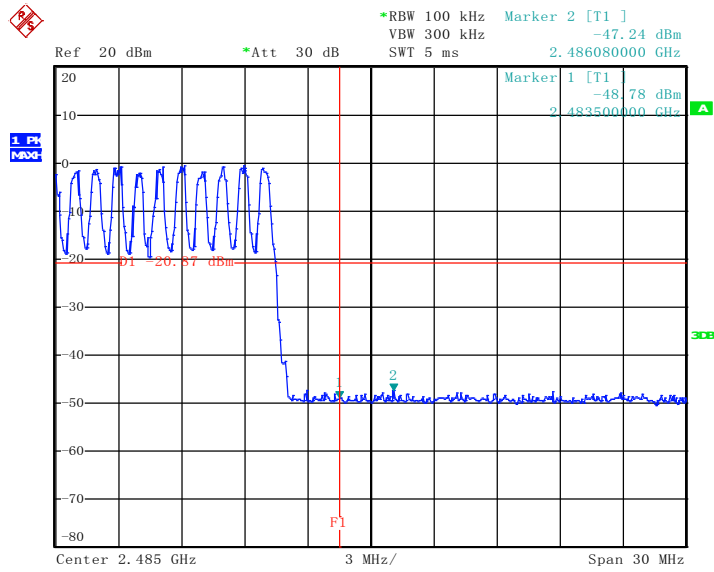

Date: 9. JAN. 2018 22:16:44

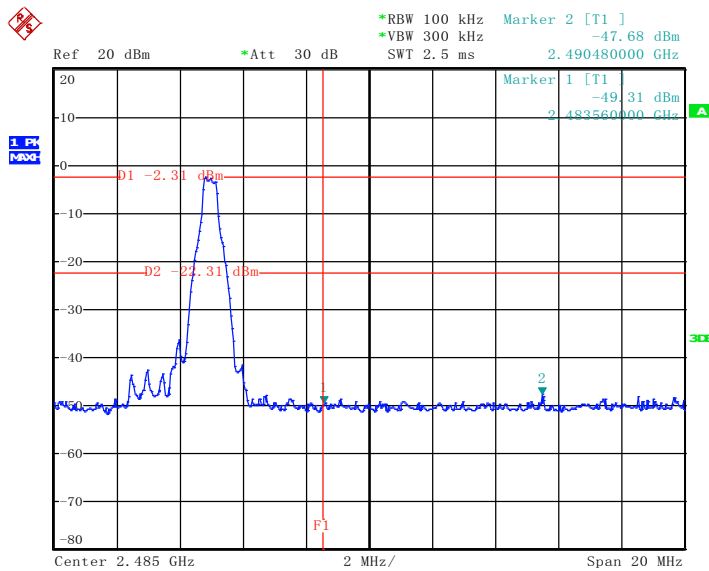

Date: 10. JAN. 2018 03:56:39


12. Conducted Emissions

12.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

12.2 Basic Test Setup Block Diagram

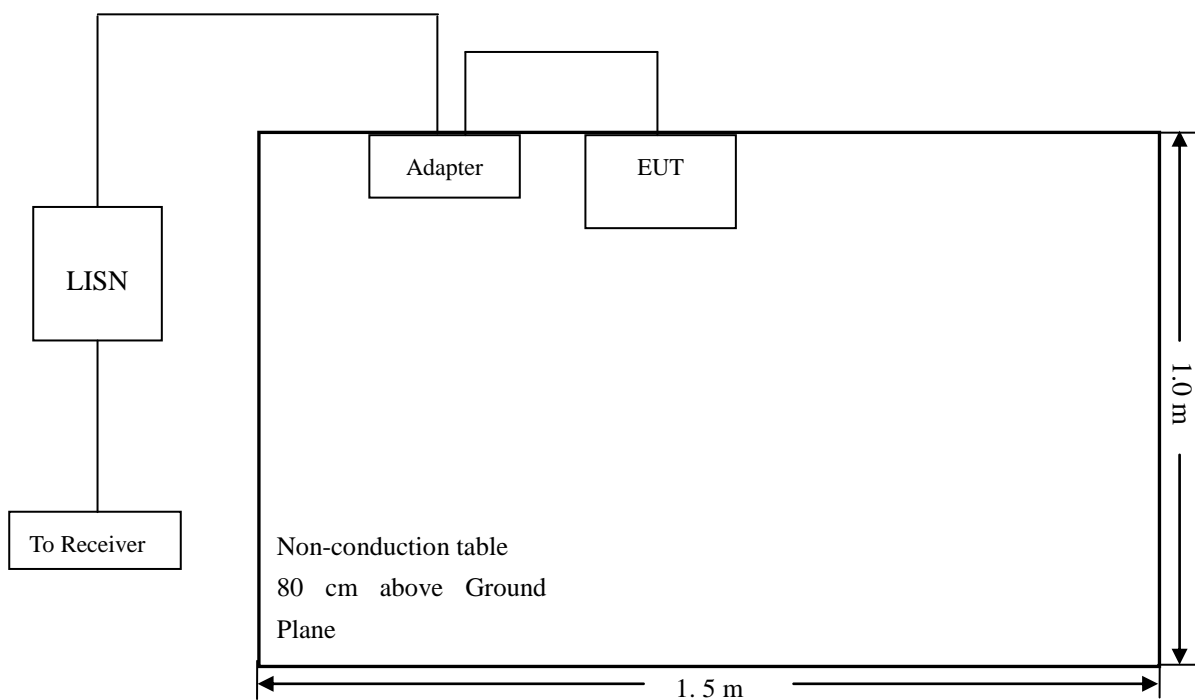

12.3 Environmental Conditions

Temperature:	25 ~C
Relative Humidity:	52~
ATM Pressure:	1012 mbar

12.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

12.5 Summary of Test Results/Plots


According to the data in section 12.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device.

12.6 Conducted Emissions Test Data

Note: all (GFSK, pi/4-DQPSK, 8DPSK) modes have been tested, and the worst result (GFSK) was report as below, the worst data is DH1(Low channel).

Plot of Conducted Emissions Test Data

Test Specification: Neutral

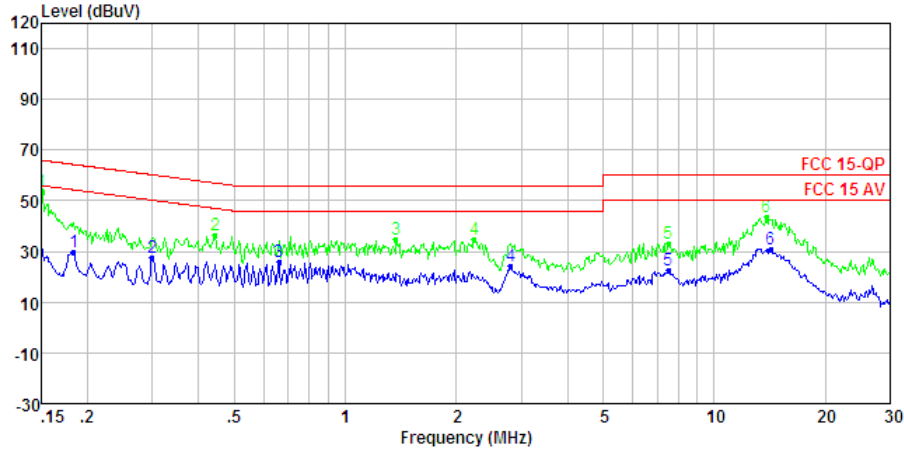

Site : Shenzhen BST Technology Co.,Ltd.

Condition: FCC 15-QP

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase	Level	Limit	Over	Remark	Pol/Phase
			Line	Limit				Line	Limit		
	MHz	dBuV	dBuV	dB			dBuV	dBuV	dB		
1 Max	0.183	30.0	54.3	-24.3	Average	NEUTRAL	30.0	54.3	-24.3	Average	NEUTRAL
2	0.300	27.8	50.2	-22.4	Average	NEUTRAL	27.8	50.2	-22.4	Average	NEUTRAL
3	0.661	25.7	46.0	-20.3	Average	NEUTRAL	25.7	46.0	-20.3	Average	NEUTRAL
4	2.809	24.0	46.0	-22.0	Average	NEUTRAL	24.0	46.0	-22.0	Average	NEUTRAL
5	7.526	22.8	50.0	-27.2	Average	NEUTRAL	22.8	50.0	-27.2	Average	NEUTRAL
6	14.213	31.2	50.0	-18.8	Average	NEUTRAL	31.2	50.0	-18.8	Average	NEUTRAL


Site : Shenzhen BST Technology Co.,Ltd.

Condition: FCC 15-QP

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase	Level	Limit	Over	Remark	Pol/Phase
			Line	Limit				Line	Limit		
	MHz	dBuV	dBuV	dB			dBuV	dBuV	dB		
1 Max	0.151	53.6	66.0	-12.4	Peak	NEUTRAL	53.6	66.0	-12.4	Peak	NEUTRAL
2	0.444	36.5	57.0	-20.5	Peak	NEUTRAL	36.5	57.0	-20.5	Peak	NEUTRAL
3	1.374	34.5	56.0	-21.5	Peak	NEUTRAL	34.5	56.0	-21.5	Peak	NEUTRAL
4	2.237	35.0	56.0	-21.0	Peak	NEUTRAL	35.0	56.0	-21.0	Peak	NEUTRAL
5	7.526	33.3	60.0	-26.7	Peak	NEUTRAL	33.3	60.0	-26.7	Peak	NEUTRAL
6	13.841	43.5	60.0	-16.5	Peak	NEUTRAL	43.5	60.0	-16.5	Peak	NEUTRAL

Test Specification: Line

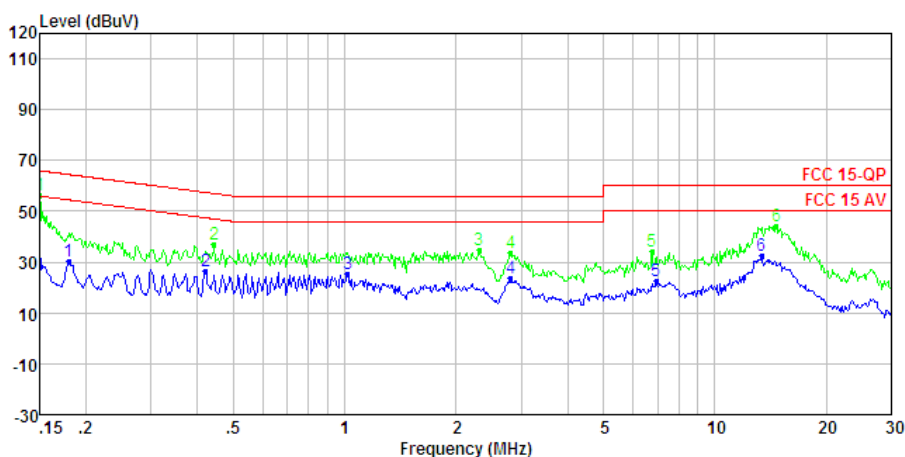

Site : Shenzhen BST Technology Co.,Ltd.
Condition: FCC 15-QP

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB			dBuV	dBuV	dB		
1 Max	0.180	30.3	54.5	-24.2	Average	LINE	30.3	54.5	-24.2	Average	LINE
2	0.421	26.3	47.4	-21.1	Average	LINE	26.3	47.4	-21.1	Average	LINE
3	1.021	25.1	46.0	-20.9	Average	LINE	25.1	46.0	-20.9	Average	LINE
4	2.809	23.5	46.0	-22.5	Average	LINE	23.5	46.0	-22.5	Average	LINE
5	6.951	22.3	50.0	-27.7	Average	LINE	22.3	50.0	-27.7	Average	LINE
6	13.408	32.7	50.0	-17.3	Average	LINE	32.7	50.0	-17.3	Average	LINE

Site : Shenzhen BST Technology Co.,Ltd.
Condition: FCC 15-QP

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB			dBuV	dBuV	dB		
1 Max	0.150	56.3	66.0	-9.7	Peak	LINE	56.3	66.0	-9.7	Peak	LINE
2	0.444	36.7	57.0	-20.3	Peak	LINE	36.7	57.0	-20.3	Peak	LINE
3	2.309	35.0	56.0	-21.0	Peak	LINE	35.0	56.0	-21.0	Peak	LINE
4	2.809	33.7	56.0	-22.3	Peak	LINE	33.7	56.0	-22.3	Peak	LINE
5	6.769	34.0	60.0	-26.0	Peak	LINE	34.0	60.0	-26.0	Peak	LINE
6	14.672	44.3	60.0	-15.7	Peak	LINE	44.3	60.0	-15.7	Peak	LINE

***** END OF REPORT *****