

FCC REPORT

Applicant: SHENZHEN GIEC DIGITAL CO., LTD

Address of Applicant: No.1 Building,Factory,No.7 District,Dayang Development Areas,FuYongStreet,Baoan Shenzhen China

Equipment Under Test (EUT)

Product Name: Tablet PC

Model No.: TM800A612R, GK-MWS8004C

FCC ID: 2AHYKTM800S

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249:2015

Date of sample receipt: August 10, 2016

Date of Test: August 11-16, 2016

Date of report issued: August 17, 2016

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



The image shows a circular blue stamp with the text 'GLOBAL UNITED TECHNOLOGY SERVICES CO., LTD.' around the perimeter and 'GTS' in the center. Overlaid on the stamp is a handwritten signature in black ink that appears to read 'Robinson Lo'.

Robinson Lo

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	August 17, 2016	Original

Prepared By: Yang, Liu **Date:** August 17, 2016
Project Engineer

Check By: Andy, Wu **Date:** August 17, 2016
Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	7
5.4 DESCRIPTION OF SUPPORT UNITS	7
5.5 TEST FACILITY.....	7
5.6 TEST LOCATION	7
5.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT.....	10
7.2 CONDUCTED EMISSIONS	11
7.3 RADIATED EMISSION METHOD.....	14
7.3.1 <i>Field Strength of The Fundamental Signal</i>	16
7.3.2 <i>Spurious emissions</i>	17
7.3.3 <i>Bandedge emissions</i>	21
7.4 20dB OCCUPY BANDWIDTH	22
8 TEST SETUP PHOTO.....	24
9 EUT CONSTRUCTIONAL DETAILS	25

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 Client Information

Applicant:	SHENZHEN GIEC DIGITAL CO., LTD
Address of Applicant:	No.1 Building,Factory,No.7 District,Dayang Development Areas, FuYongStreet,Baoan Shenzhen China
Manufacturer/Factory:	SHENZHEN GIEC DIGITAL CO., LTD
Address of Manufacturer/Factory:	No.1 Building,Factory,No.7 District,Dayang Development Areas, FuYongStreet,Baoan Shenzhen China

5.2 General Description of EUT

Product Name:	Tablet PC
Model No.:	TM800A612R, GK-MWS8004C
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	40
Channel separation:	2MHz
Modulation type:	GFSK
Antenna Type:	Integral antenna
Antenna gain:	2dBi(declare by Applicant)
Power supply:	Quick Charger: Model No. : A68-502000 Input: AC 100-240V, 50/60Hz, 0.35A Output: DC 5V, 2.0A Or DC 3.8 V, 3700mAh, 14.06Wh

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Pre-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	96.11	97.92	95.354

5.4 Description of Support Units

None.

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.7 Other Information Requested by the Customer

None.

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	June. 29 2016	June. 28 2017
4	Loop Antenna	Zhinan	ZN30900A	GTS534	June. 29 2016	June. 28 2017
5	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	June. 29 2016	June. 28 2017
6	Double-ridged horn antenna	SCHWARZBECK	9120D	GTS208	June. 29 2016	June. 28 2017
7	Horn Antenna	ETS-LINDGREN	3160-09	GTS218	June. 29 2016	June. 28 2017
8	RF Amplifier	HP	8347A	GTS204	June. 29 2016	June. 28 2017
9	RF Amplifier	HP	8349B	GTS206	June. 29 2016	June. 28 2017
10	Broadband Preampfier	SCHWARZBECK	BBV9718	GTS535	June. 29 2016	June. 28 2017
11	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	June. 29 2016	June. 28 2017
12	Universal Radio Communication tester	ROHDE&SCHWARZ	CMU 200	GTS538	June. 29 2016	June. 28 2017
13	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
14	Coaxial Cable	GTS	N/A	GTS210	June. 29 2016	June. 28 2017
15	Coaxial Cable	GTS	N/A	GTS211	June. 29 2016	June. 28 2017
16	Coaxial Cable	GTS	N/A	GTS210	June. 29 2016	June. 28 2017
17	Coaxial Cable	GTS	N/A	GTS212	June. 29 2016	June. 28 2017
18	Thermo meter	N/A	N/A	GTS256	June. 29 2016	June. 28 2017
19	D.C. Power Supply	Instek	PS-3030	GTS232	June. 29 2016	June. 28 2017

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 29 2016	June. 28 2017
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 29 2016	June. 28 2017
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 29 2016	June. 28 2017
5	High voltage probe	SCHWARZBECK	TK9420	GTS537	June. 29 2016	June. 28 2017
6	ISN	SCHWARZBECK	NTFM 8158	GTS565	June. 29 2016	June. 28 2017
7	Coaxial Cable	GTS	N/A	GTS227	June. 29 2016	June. 28 2017
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Thermo meter	KTJ	TA328	GTS233	June. 29 2016	June. 28 2017
10	10dB Pulse Limiter	Rohde & Schwarz	N/A	GTS224	June. 29 2016	June. 28 2017

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June. 29 2016	June. 28 2017

7 Test results and Measurement Data

7.1 Antenna requirement

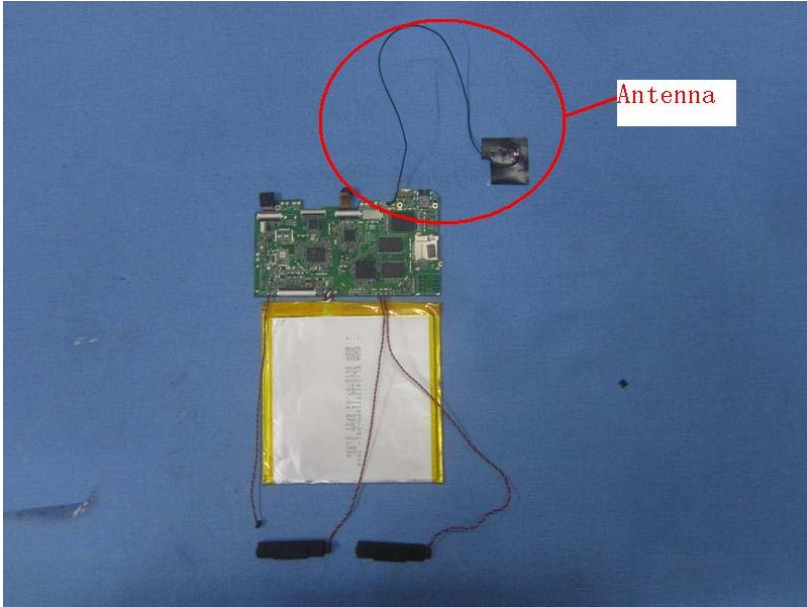
Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement:	
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
EUT Antenna:	
<p><i>The antenna is Integral antenna, the best case gain of the antenna is 2dBi</i></p>	
	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Pass														

Measurement data:


Line:

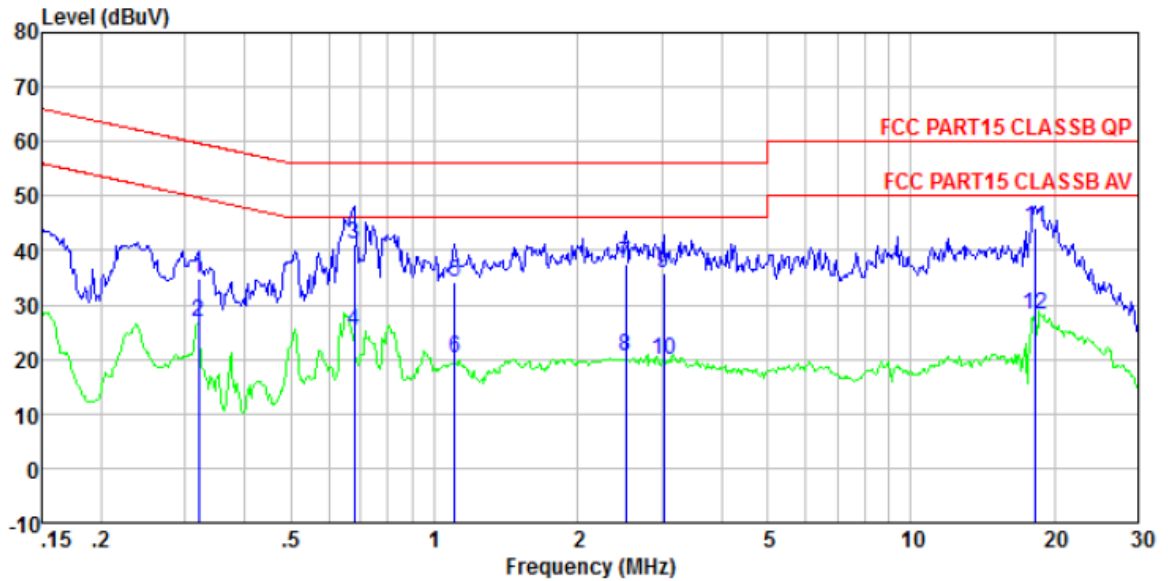

Site : Shielded room
 Condition : FCC PART15 CLASSB QP LISN-2013 LINE
 Job No. : 0155
 Test Mode : Bluetooth4.0 mode
 Test Engineer: Boy

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.320	34.62	34.83	0.11	0.10	59.71	-24.88	QP
2	0.320	26.62	26.83	0.11	0.10	49.71	-22.88	Average
3	0.679	40.81	41.08	0.14	0.13	56.00	-14.92	QP
4	0.679	24.81	25.08	0.14	0.13	46.00	-20.92	Average
5	1.106	33.93	34.19	0.13	0.13	56.00	-21.81	QP
6	1.106	19.93	20.19	0.13	0.13	46.00	-25.81	Average
7	2.527	37.31	37.59	0.13	0.15	56.00	-18.41	QP
8	2.527	20.31	20.59	0.13	0.15	46.00	-25.41	Average
9	3.025	35.54	35.85	0.16	0.15	56.00	-20.15	QP
10	3.025	19.54	19.85	0.16	0.15	46.00	-26.15	Average
11	18.232	43.54	44.28	0.52	0.22	60.00	-15.72	QP
12	18.232	27.54	28.28	0.52	0.22	50.00	-21.72	Average

Neutral:

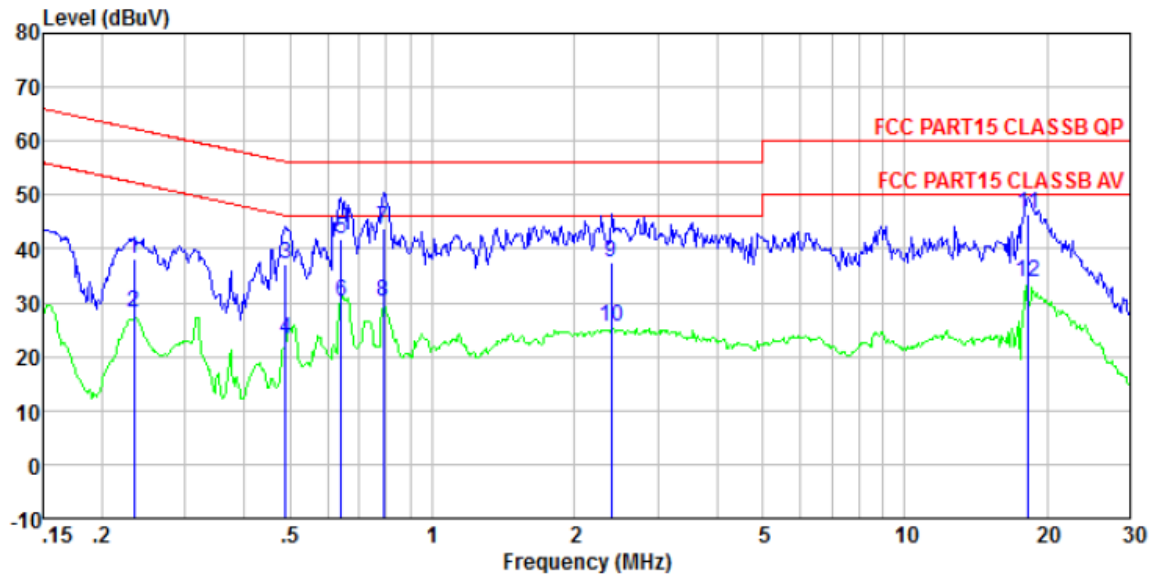


Site : Shielded room
 Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL
 Job No. : 0155
 Test Mode : Bluetooth4.0 mode
 Test Engineer: Boy

	Read	LISN	Cable	Limit	Over		
Freq	Level	Level	Factor	Line	Limit	Remark	
MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.234	38.11	38.29	0.06	0.12	62.30	-24.01 QP
2	0.234	27.90	28.08	0.06	0.12	52.30	-24.22 Average
3	0.489	36.84	37.01	0.06	0.11	56.19	-19.18 QP
4	0.489	22.98	23.15	0.06	0.11	46.19	-23.04 Average
5	0.641	41.76	41.96	0.07	0.13	56.00	-14.04 QP
6	0.641	29.99	30.19	0.07	0.13	46.00	-15.81 Average
7	0.788	43.64	43.84	0.07	0.13	56.00	-12.16 QP
8	0.788	29.83	30.03	0.07	0.13	46.00	-15.97 Average
9	2.396	37.24	37.49	0.10	0.15	56.00	-18.51 QP
10	2.396	25.40	25.65	0.10	0.15	46.00	-20.35 Average
11	18.232	45.84	46.48	0.42	0.22	60.00	-13.52 QP
12	18.232	33.16	33.80	0.42	0.22	50.00	-16.20 Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

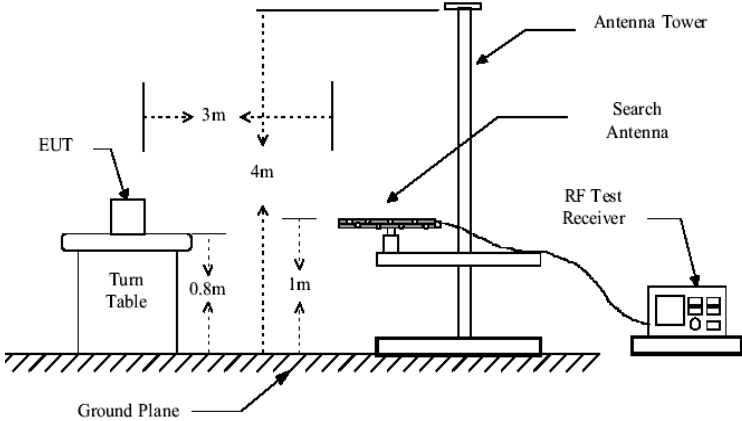Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
Limit: (Spurious Emissions)	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.00		Quasi-peak Value	
	88MHz-216MHz	43.50		Quasi-peak Value	
	216MHz-960MHz	46.00		Quasi-peak Value	
	960MHz-1GHz	54.00		Quasi-peak Value	
	Above 1GHz	54.00		Average Value	
74.00		Peak Value			
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>				

	<p>The diagram illustrates the test setup. On the left, an EUT (Equipment Under Test) is placed on a Turn Table. The table is positioned 3 meters away from an Antenna Tower. The antenna tower has a Horn Antenna mounted on it. The antenna height is varied from 1 meter to 4 meters above the ground. The Turn Table is 1.5 meters high, and the antenna is 1 meter high. A Spectrum Analyzer and an Amplifier are connected to the antenna tower.</p>
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Pass</p>

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	98.96	27.58	5.39	34.01	97.92	114.00	-16.08	Vertical
2402.00	91.07	27.58	5.39	34.01	90.03	114.00	-23.97	Horizontal
2440.00	98.51	27.48	5.43	33.96	97.46	114.00	-16.54	Vertical
2440.00	92.08	27.48	5.43	33.96	91.03	114.00	-22.97	Horizontal
2480.00	95.81	27.52	5.47	33.92	94.88	114.00	-19.12	Vertical
2480.00	89.63	27.52	5.47	33.92	88.70	114.00	-25.30	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	87.69	27.58	5.39	34.01	86.65	94.00	-7.35	Vertical
2402.00	81.93	27.58	5.39	34.01	80.89	94.00	-13.11	Horizontal
2440.00	89.18	27.48	5.43	33.96	88.13	94.00	-5.87	Vertical
2440.00	81.69	27.48	5.43	33.96	80.64	94.00	-13.36	Horizontal
2480.00	88.51	27.52	5.47	33.92	87.58	94.00	-6.42	Vertical
2480.00	82.29	27.52	5.47	33.92	81.36	94.00	-12.64	Horizontal

Remark: RBW 3MHz, VBW 10MHz , peak detector for PK value, RBW 3MHz, VBW 10MHz AV detector for AV value

7.3.2 Spurious emissions

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
36.90	45.24	14.82	0.63	30.06	30.63	40.00	-9.37	Vertical
43.20	40.53	15.56	0.70	30.03	26.76	40.00	-13.24	Vertical
48.33	39.06	15.35	0.75	30.01	25.15	40.00	-14.85	Vertical
94.10	33.65	14.67	1.14	29.73	19.73	43.50	-23.77	Vertical
180.02	40.21	11.68	1.74	29.27	24.36	43.50	-19.14	Vertical
588.91	27.19	20.29	3.68	29.30	21.86	46.00	-24.14	Vertical
40.28	30.49	15.58	0.66	30.04	16.69	40.00	-23.31	Horizontal
63.09	35.25	13.50	0.89	29.90	19.74	40.00	-20.26	Horizontal
83.23	35.05	11.72	1.06	29.78	18.05	40.00	-21.95	Horizontal
155.91	40.28	10.51	1.60	29.38	23.01	43.50	-20.49	Horizontal
170.79	40.30	11.03	1.69	29.31	23.71	43.50	-19.79	Horizontal
530.10	26.21	19.20	3.44	29.30	19.55	46.00	-26.45	Horizontal

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	37.48	31.78	8.60	32.09	45.77	74.00	-28.23	Vertical
7206.00	31.94	36.15	11.65	32.00	47.74	74.00	-26.26	Vertical
9608.00	31.57	37.95	14.14	31.62	52.04	74.00	-21.96	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	41.80	31.78	8.60	32.09	50.09	74.00	-23.91	Horizontal
7206.00	33.71	36.15	11.65	32.00	49.51	74.00	-24.49	Horizontal
9608.00	31.01	37.95	14.14	31.62	51.48	74.00	-22.52	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	26.26	31.78	8.60	32.09	34.55	54.00	-19.45	Vertical
7206.00	20.61	36.15	11.65	32.00	36.41	54.00	-17.59	Vertical
9608.00	19.68	37.95	14.14	31.62	40.15	54.00	-13.85	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	30.50	31.78	8.60	32.09	38.79	54.00	-15.21	Horizontal
7206.00	22.79	36.15	11.65	32.00	38.59	54.00	-15.41	Horizontal
9608.00	19.42	37.95	14.14	31.62	39.89	54.00	-14.11	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	37.11	31.85	8.67	32.12	45.51	74.00	-28.49	Vertical
7320.00	31.70	36.37	11.72	31.89	47.90	74.00	-26.10	Vertical
9760.00	31.36	38.35	14.25	31.62	52.34	74.00	-21.66	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	41.36	31.85	8.67	32.12	49.76	74.00	-24.24	Horizontal
7320.00	33.44	36.37	11.72	31.89	49.64	74.00	-24.36	Horizontal
9760.00	30.76	38.35	14.25	31.62	51.74	74.00	-22.26	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	25.98	31.85	8.67	32.12	34.38	54.00	-19.62	Vertical
7320.00	20.42	36.37	11.72	31.89	36.62	54.00	-17.38	Vertical
9760.00	19.51	38.35	14.25	31.62	40.49	54.00	-13.51	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	30.18	31.85	8.67	32.12	38.58	54.00	-15.42	Horizontal
7320.00	22.58	36.37	11.72	31.89	38.78	54.00	-15.22	Horizontal
9760.00	19.22	38.35	14.25	31.62	40.20	54.00	-13.80	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *“*”*, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	35.81	31.93	8.73	32.16	44.31	74.00	-29.69	Vertical
7440.00	30.84	36.59	11.79	31.78	47.44	74.00	-26.56	Vertical
9920.00	30.58	38.81	14.38	31.88	51.89	74.00	-22.11	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	39.79	31.93	8.73	32.16	48.29	74.00	-25.71	Horizontal
7440.00	32.46	36.59	11.79	31.78	49.06	74.00	-24.94	Horizontal
9920.00	29.87	38.81	14.38	31.88	51.18	74.00	-22.82	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.95	31.93	8.73	32.16	33.45	54.00	-20.55	Vertical
7440.00	19.72	36.59	11.79	31.78	36.32	54.00	-17.68	Vertical
9920.00	18.89	38.81	14.38	31.88	40.20	54.00	-13.80	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	29.01	31.93	8.73	32.16	37.51	54.00	-16.49	Horizontal
7440.00	21.80	36.59	11.79	31.78	38.40	54.00	-15.60	Horizontal
9920.00	18.50	38.81	14.38	31.88	39.81	54.00	-14.19	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *“*”, means this data is too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	41.14	27.59	5.38	30.18	43.93	74.00	-30.07	Horizontal
2400.00	57.68	27.58	5.39	30.18	60.47	74.00	-13.53	Horizontal
2390.00	41.53	27.59	5.38	30.18	44.32	74.00	-29.68	Vertical
2400.00	59.53	27.58	5.39	30.18	62.32	74.00	-11.68	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	32.09	27.59	5.38	30.18	34.88	54.00	-19.12	Horizontal
2400.00	43.22	27.58	5.39	30.18	46.01	54.00	-7.99	Horizontal
2390.00	31.91	27.59	5.38	30.18	34.70	54.00	-19.30	Vertical
2400.00	44.70	27.58	5.39	30.18	47.49	54.00	-6.51	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	43.04	27.53	5.47	29.93	46.11	74.00	-27.89	Horizontal
2500.00	42.54	27.55	5.49	29.93	45.65	74.00	-28.35	Horizontal
2483.50	43.59	27.53	5.47	29.93	46.66	74.00	-27.34	Vertical
2500.00	43.38	27.55	5.49	29.93	46.49	74.00	-27.51	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.89	27.53	5.47	29.93	37.96	54.00	-16.04	Horizontal
2500.00	33.14	27.55	5.49	29.93	36.25	54.00	-17.75	Horizontal
2483.50	35.96	27.53	5.47	29.93	39.03	54.00	-14.97	Vertical
2500.00	32.92	27.55	5.49	29.93	36.03	54.00	-17.97	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor


7.4 20dB Occupy Bandwidth

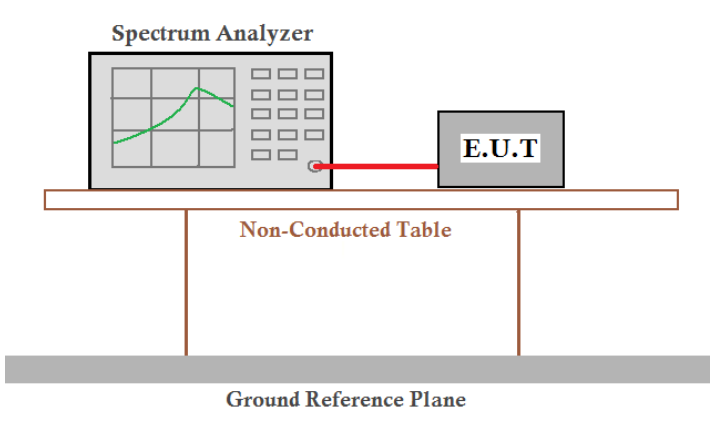Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	1.232	Pass
Middle	1.231	Pass
Highest	1.229	Pass


Test plot as follows:

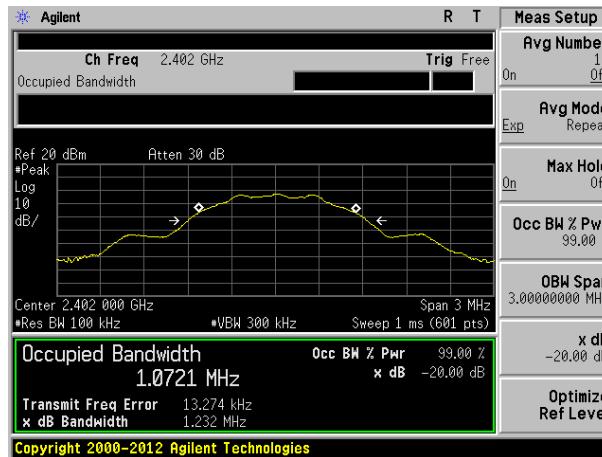

Lowest channel

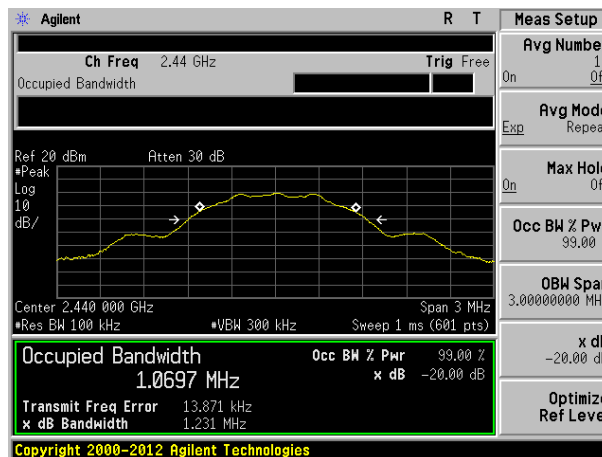


Middle channel

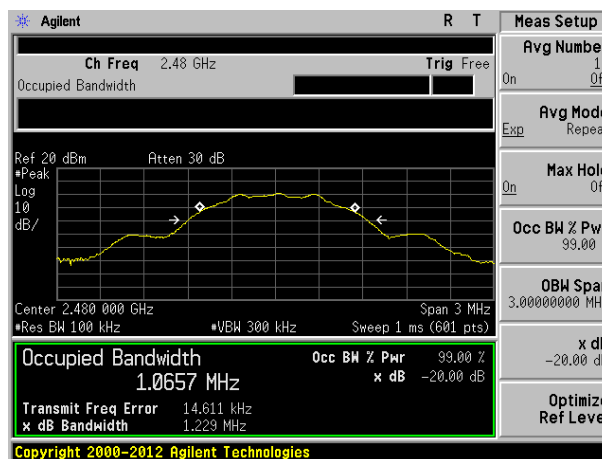

Highest channel

8 Test Setup Photo

Radiated Emission

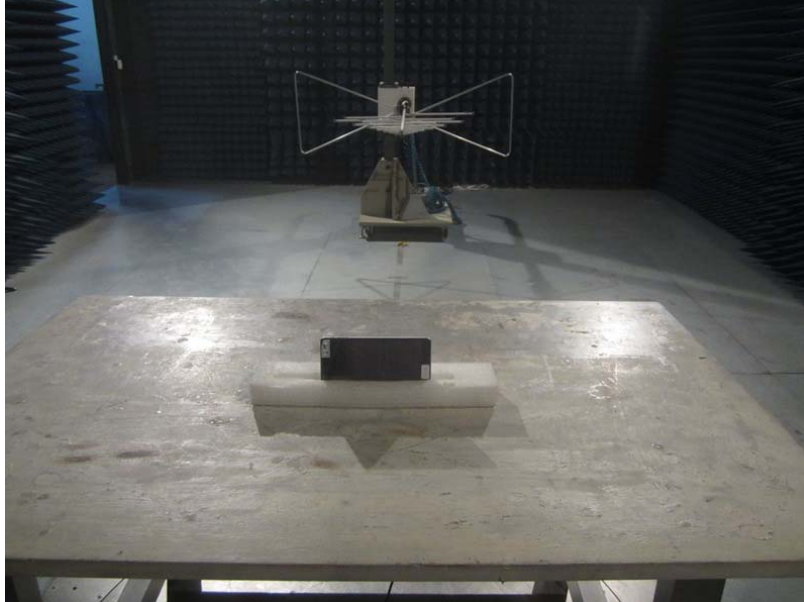

Conducted Emission



9 EUT Constructional Details

Reference to the test report No. GTS201608000155E01

----- End -----