


15. Band Edge Compliance

15.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200A	DDT-ZC01401	2024/09/20
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/07/08
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22

15.2. Block diagram of test setup

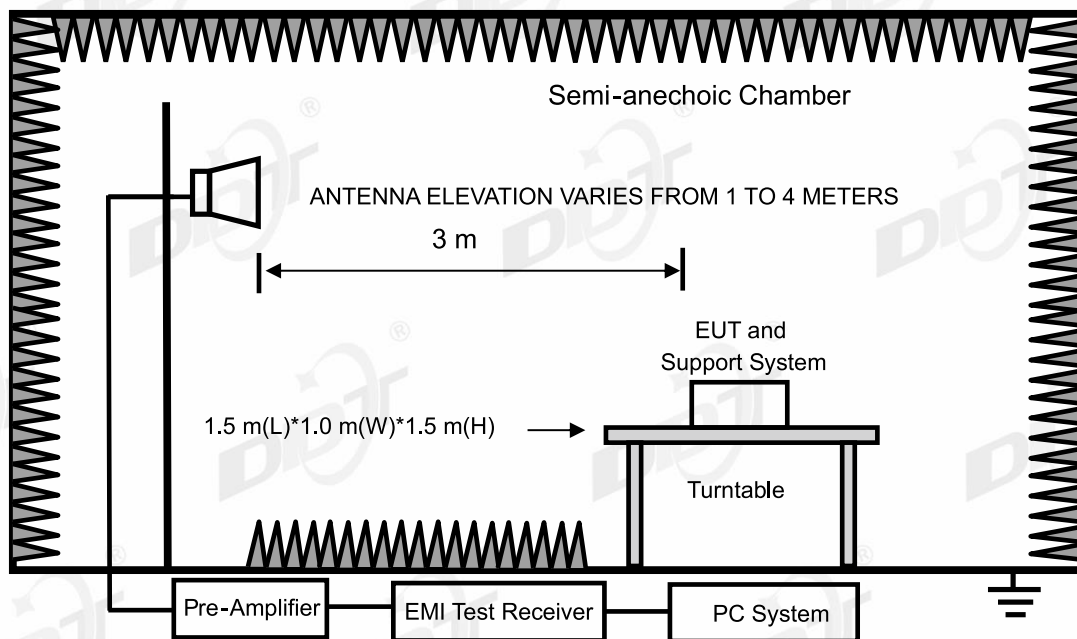

15.3. Limits

All restriction band should comply with 15.209 limit, other emission should be at least 20 dB below the fundamental.

15.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

15.5. Test procedure

Same with Radiated Emission except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.

15.6. Test result


PASS. (See below detailed test result)

15.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 3DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\15
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

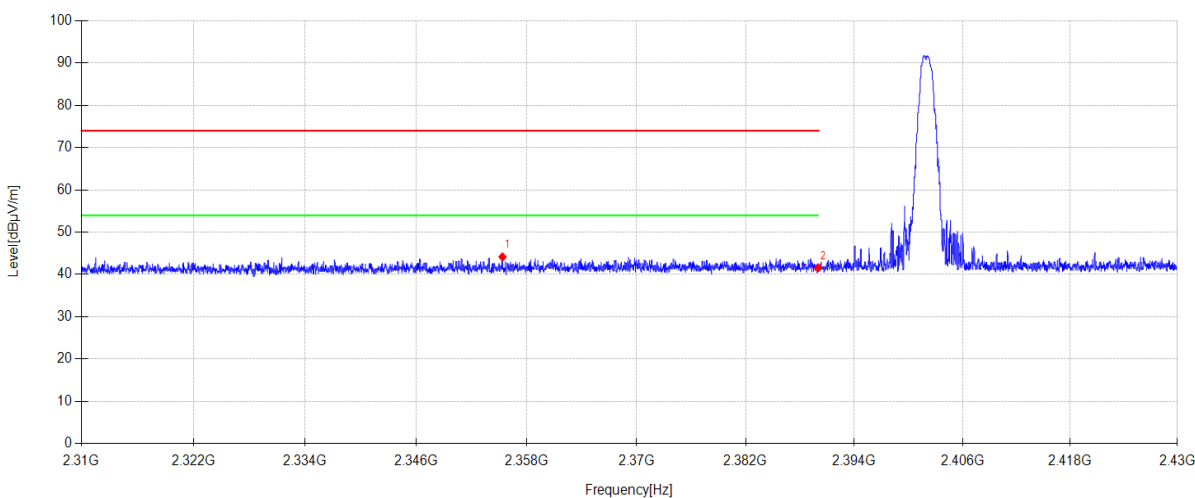

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2355.396	13.48	27.12	3.55	0.00	44.15	74.00	29.85	PK	Horizontal
2	2390.000	10.74	27.26	3.57	0.00	41.57	74.00	32.43	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 3DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\16
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

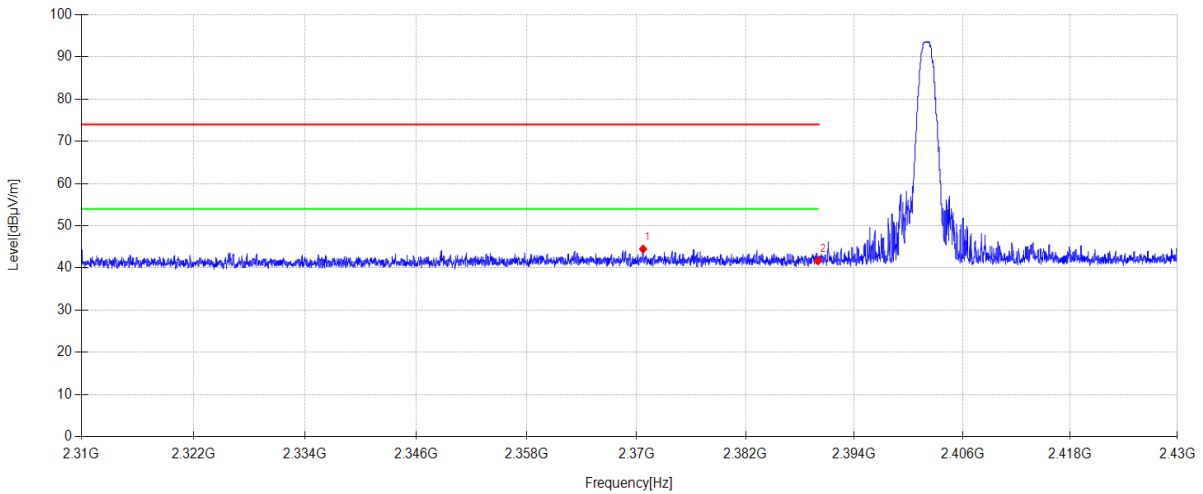

Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2370.744	13.73	27.18	3.56	0.00	44.47	74.00	29.53	PK	Vertical
2	2390.000	10.87	27.26	3.57	0.00	41.70	74.00	32.30	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 2DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\17
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

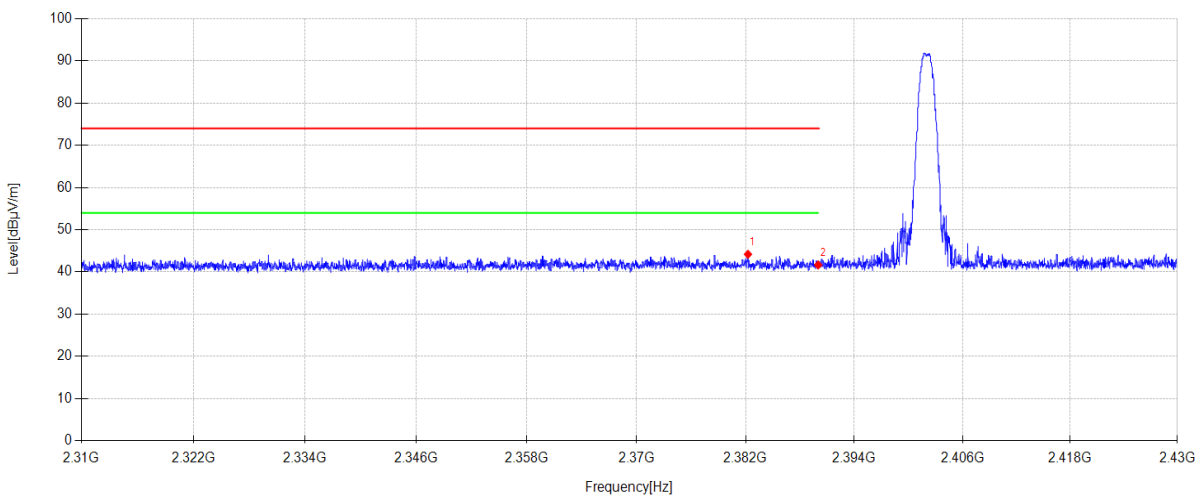

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2382.264	13.39	27.23	3.56	0.00	44.18	74.00	29.82	PK	Horizontal
2	2390.000	10.84	27.26	3.57	0.00	41.67	74.00	32.33	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 2DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\18
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

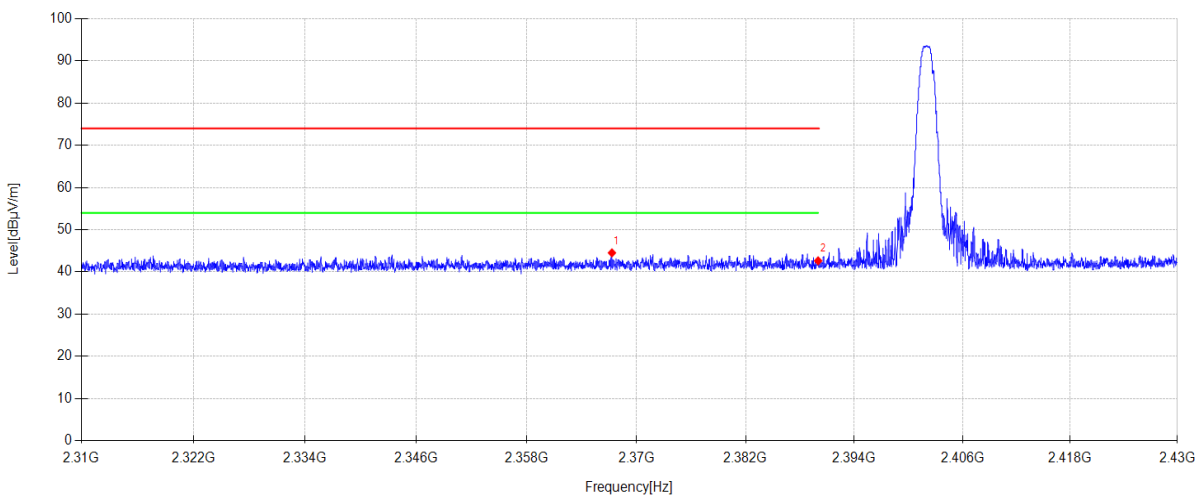

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2367.336	13.79	27.17	3.56	0.00	44.52	74.00	29.48	PK	Vertical
2	2390.000	11.80	27.26	3.57	0.00	42.63	74.00	31.37	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\19
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

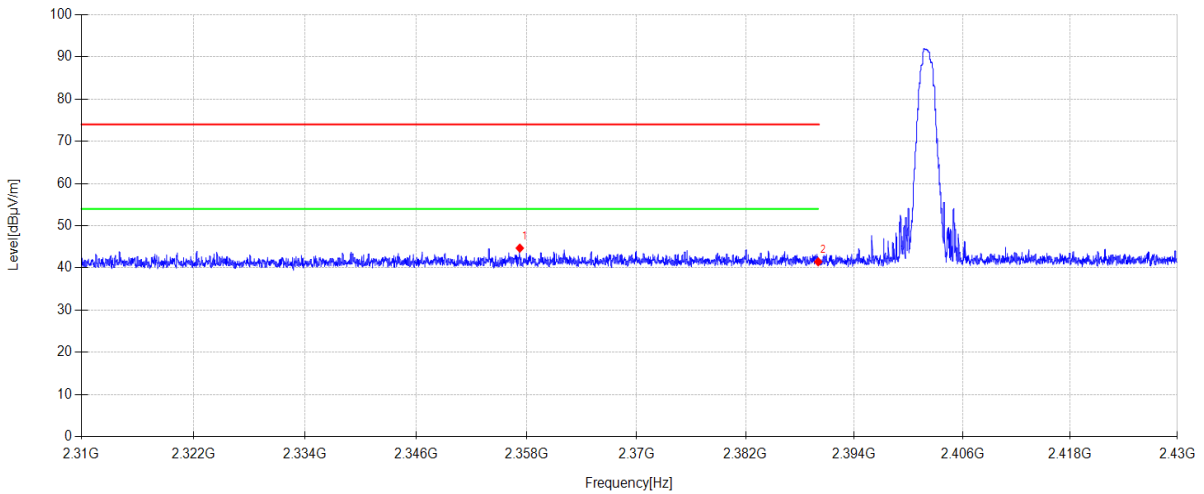

Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2357.280	14.01	27.13	3.55	0.00	44.69	74.00	29.31	PK	Horizontal
2	2390.000	10.62	27.26	3.57	0.00	41.45	74.00	32.55	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\20
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

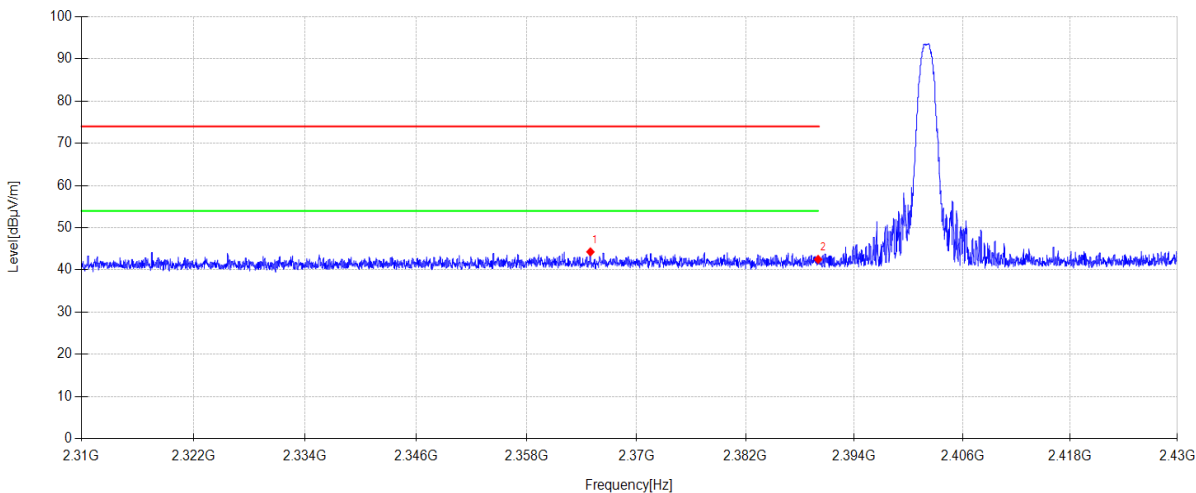

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2364.984	13.57	27.16	3.55	0.00	44.28	74.00	29.72	PK	Vertical
2	2390.000	11.67	27.26	3.57	0.00	42.50	74.00	31.50	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\21
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

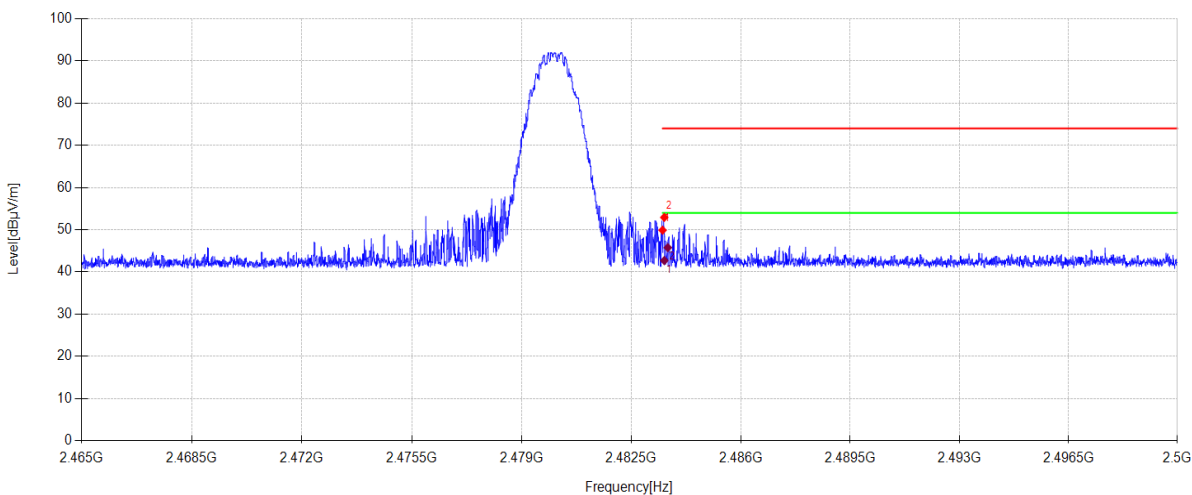

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.74	27.53	3.62	0.00	49.89	74.00	24.11	PK	Horizontal
2	2483.554	21.77	27.53	3.62	0.00	52.92	74.00	21.08	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.554	11.54	27.53	3.62	0.00	42.69	54.0	11.31	AV	Horizontal
2	2483.670	13.34	27.53	4.89	0.00	45.76	54.0	8.24	AV	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\22
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

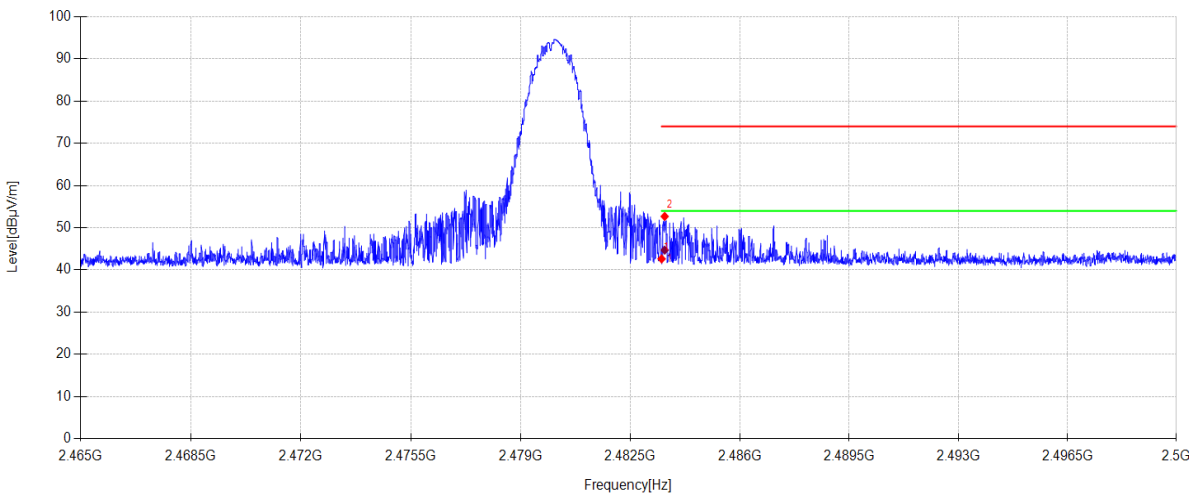

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.47	27.53	3.62	0.00	42.62	74.00	31.38	PK	Vertical
2	2483.599	21.53	27.53	3.62	0.00	52.68	74.00	21.32	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.599	13.54	27.53	3.62	0.00	44.69	54.0	9.31	AV	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 2DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\23
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

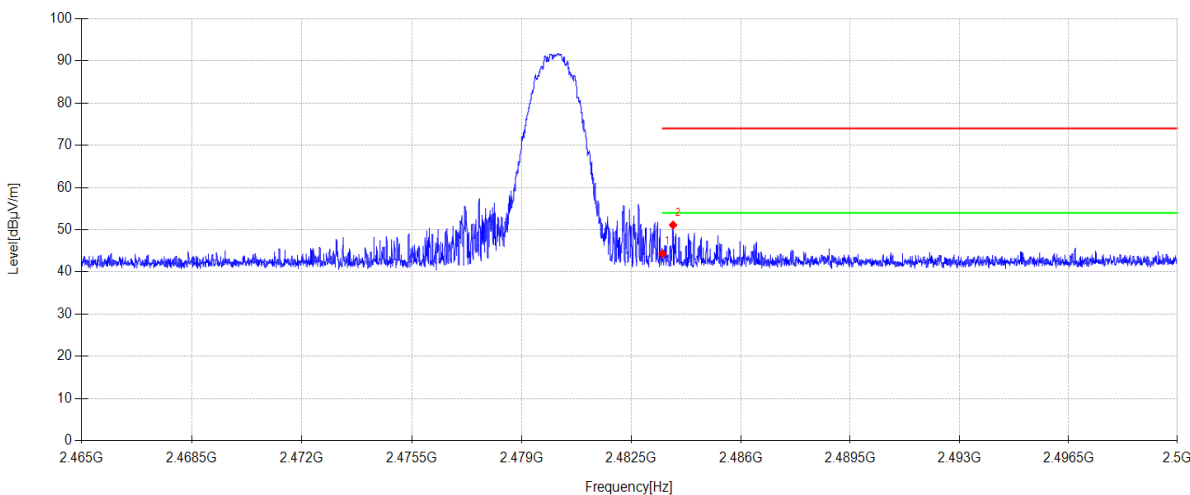

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	13.17	27.53	3.62	0.00	44.32	74.00	29.68	PK	Horizontal
2	2483.837	19.95	27.54	3.62	0.00	51.11	74.00	22.89	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 2DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\24
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

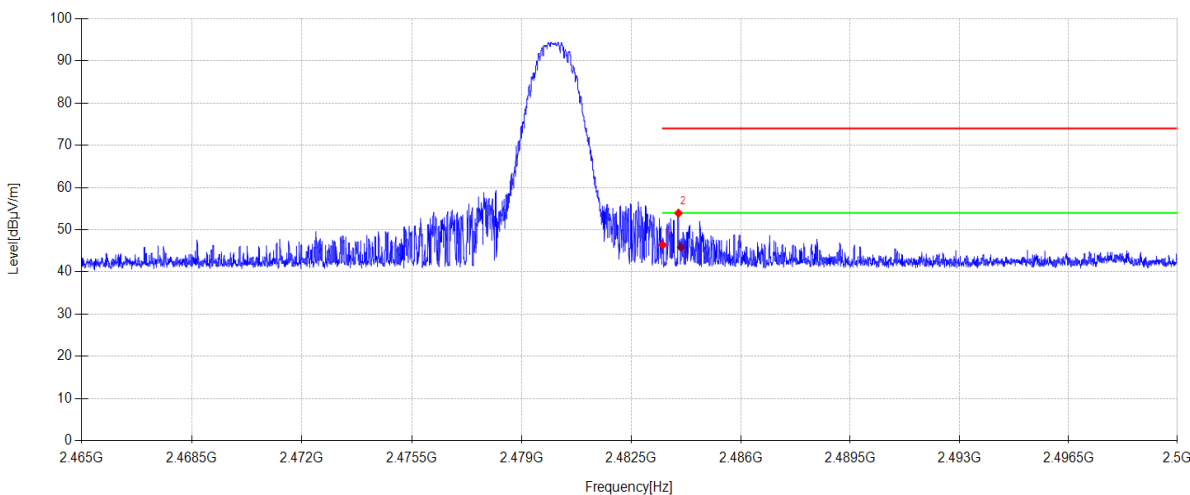

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	15.26	27.53	3.62	0.00	46.41	74.00	27.59	PK	Vertical
2	2484.009	22.77	27.54	3.62	0.00	53.93	74.00	20.07	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2484.093	13.40	27.54	4.89	0.00	45.83	54.0	8.17	AV	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 3DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\25
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

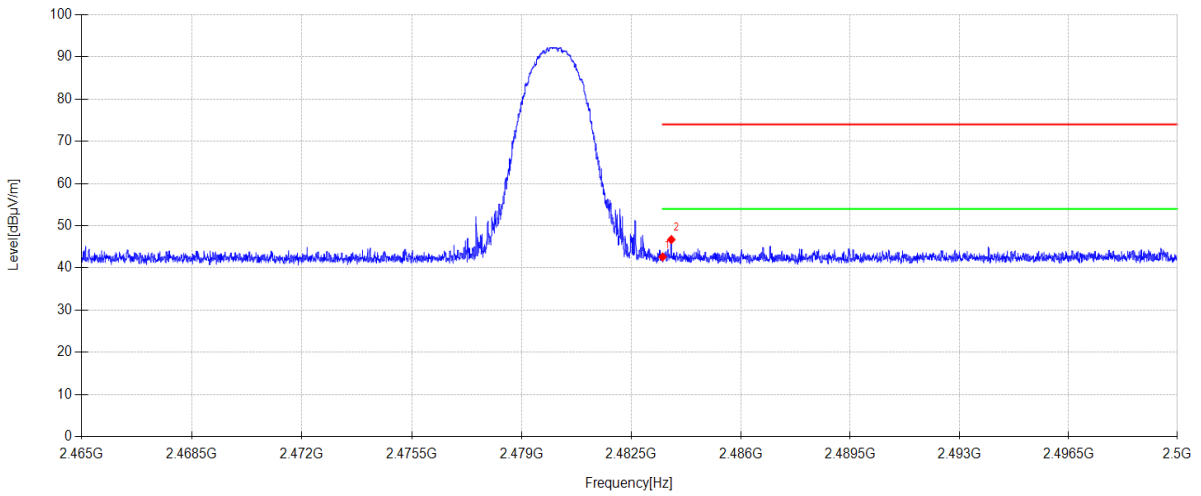

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.46	27.53	3.62	0.00	42.61	74.00	31.39	PK	Horizontal
2	2483.781	15.55	27.54	3.62	0.00	46.71	74.00	27.29	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 3DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\26
Memo: Left side Sample Number:S24040910-001 Power Setting:10

Test Graph

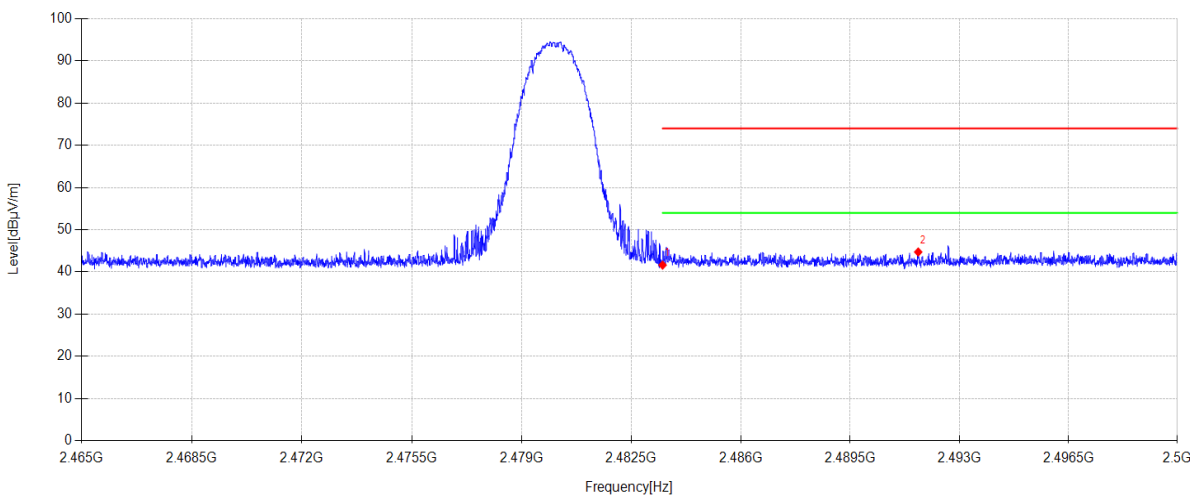

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.47	27.53	3.62	0.00	41.62	74.00	32.38	PK	Vertical
2	2491.681	13.52	27.57	3.63	0.00	44.72	74.00	29.28	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\41
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

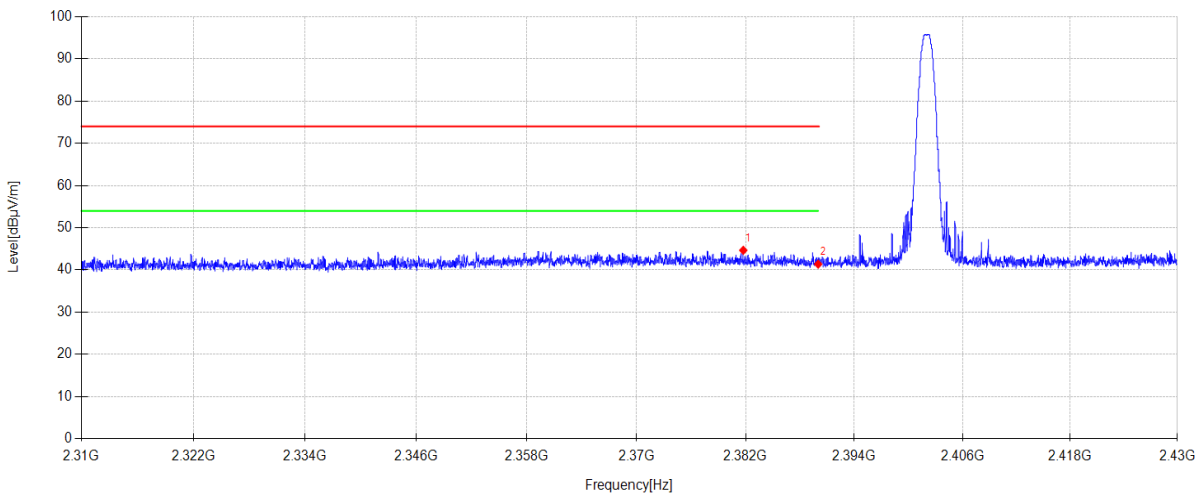

Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2381.748	13.86	27.23	3.56	0.00	44.65	74.00	29.35	PK	Horizontal
2	2390.000	10.55	27.26	3.57	0.00	41.38	74.00	32.62	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\42
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

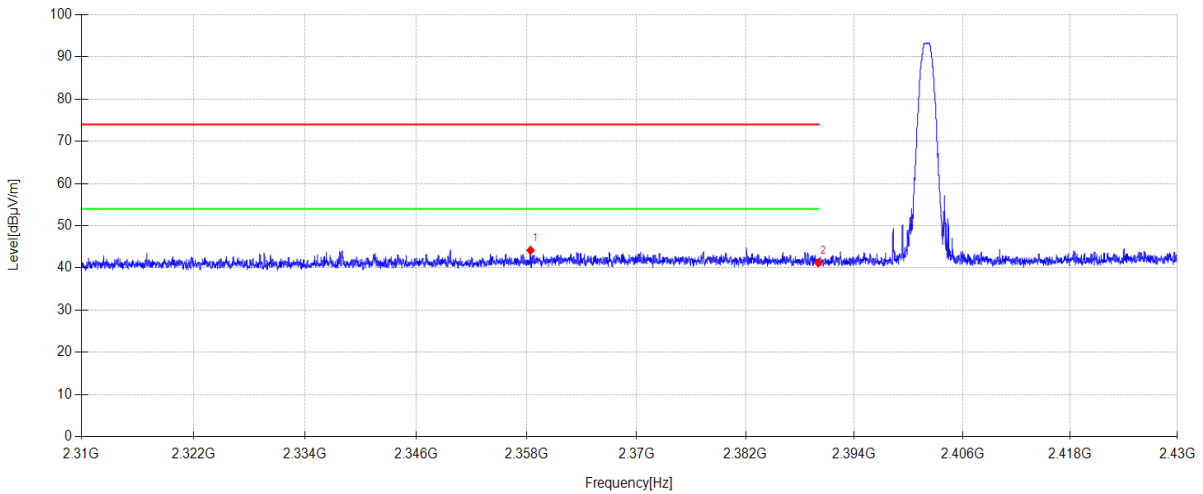

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2358.444	13.50	27.13	3.55	0.00	44.18	74.00	29.82	PK	Vertical
2	2390.000	10.39	27.26	3.57	0.00	41.22	74.00	32.78	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 2DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\43
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

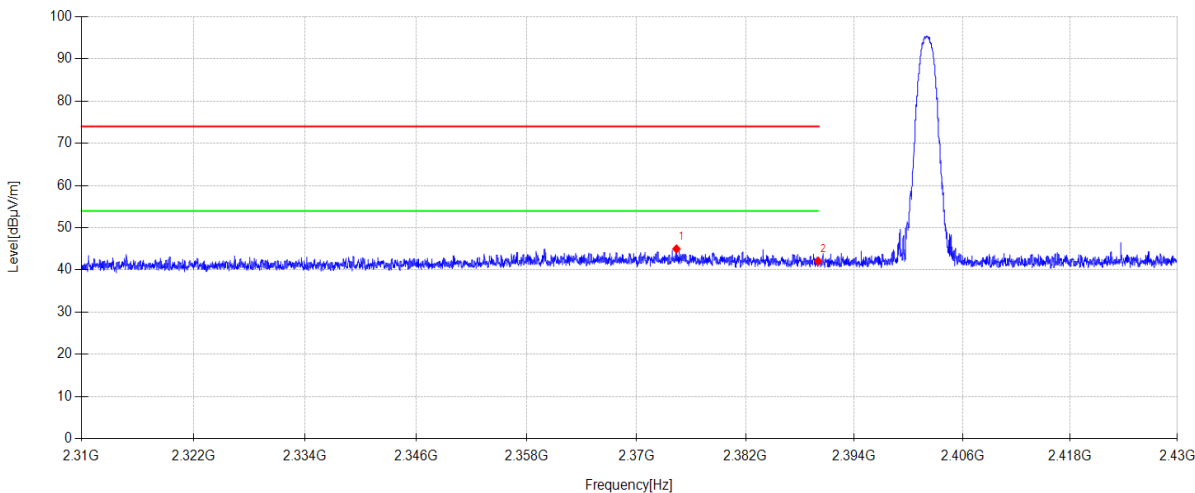

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2374.404	14.22	27.20	3.56	0.00	44.98	74.00	29.02	PK	Horizontal
2	2390.000	11.25	27.26	3.57	0.00	42.08	74.00	31.92	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 2DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\44
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

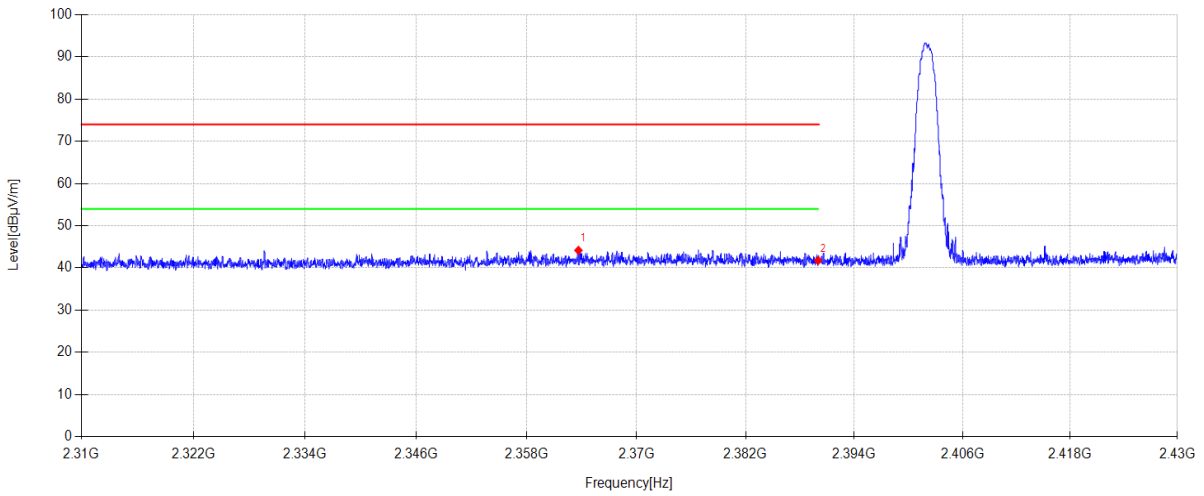

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2363.676	13.47	27.15	3.55	0.00	44.17	74.00	29.83	PK	Vertical
2	2390.000	10.94	27.26	3.57	0.00	41.77	74.00	32.23	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 3DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\45
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

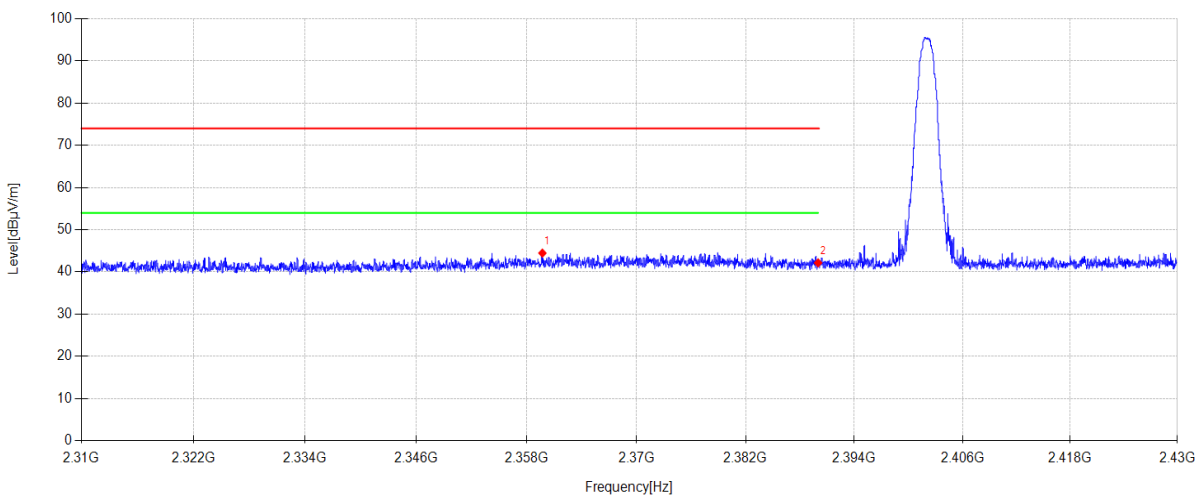

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2359.740	13.77	27.14	3.55	0.00	44.46	74.00	29.54	PK	Horizontal
2	2390.000	11.32	27.26	3.57	0.00	42.15	74.00	31.85	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 3DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\46
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

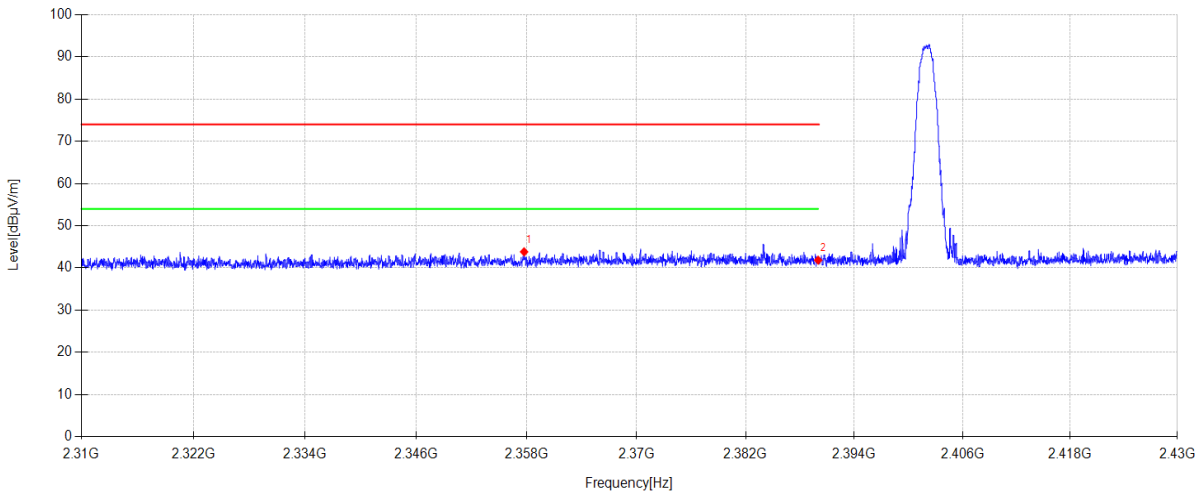

Data List

N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2357.748	13.14	27.13	3.55	0.00	43.82	74.00	30.18	PK	Vertical
2	2390.000	11.01	27.26	3.57	0.00	41.84	74.00	32.16	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 3DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\51
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

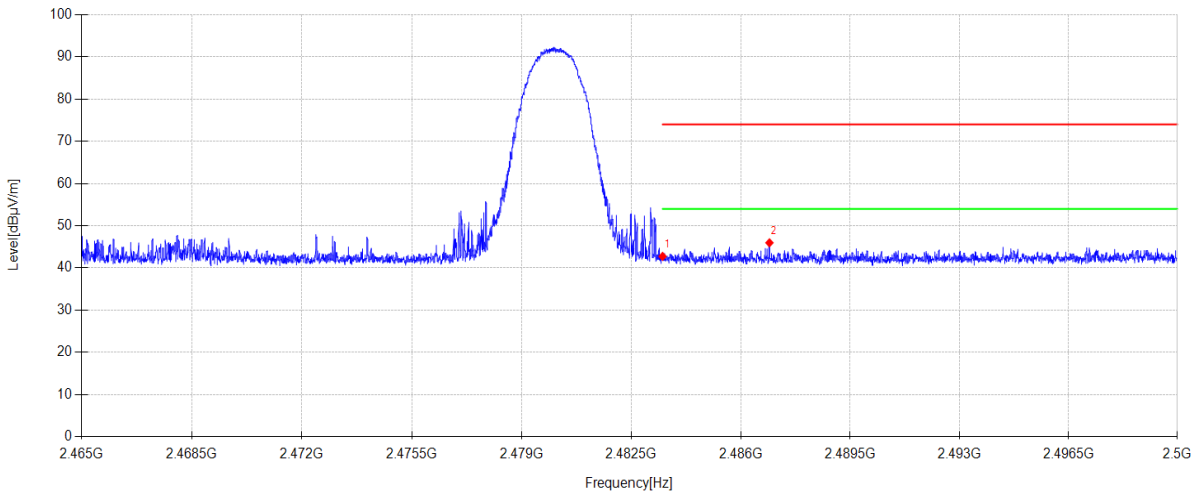

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.59	27.53	3.62	0.00	42.74	74.00	31.26	PK	Horizontal
2	2486.917	14.79	27.55	3.62	0.00	45.96	74.00	28.04	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 3DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\52
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

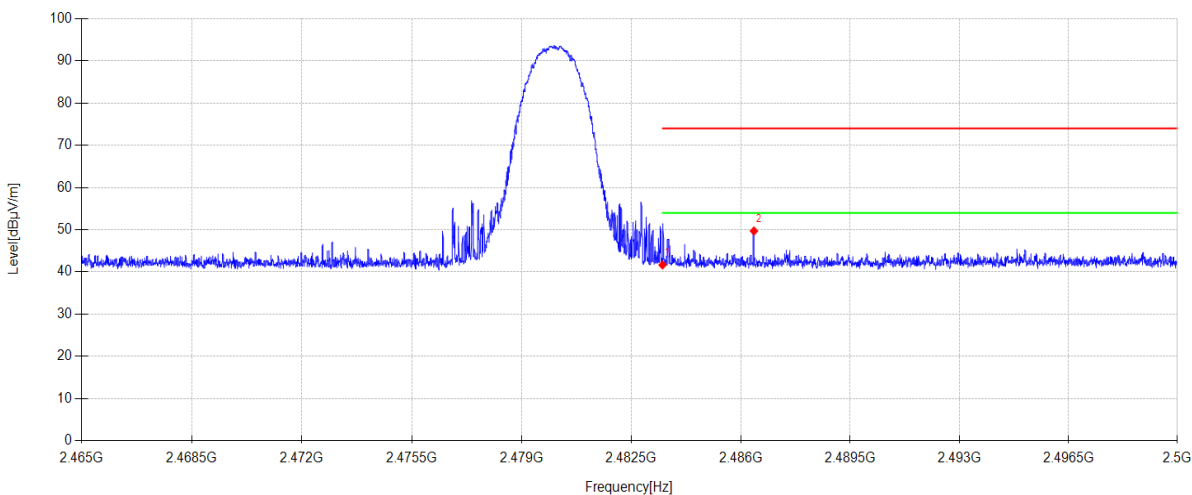

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.51	27.53	3.62	0.00	41.66	74.00	32.34	PK	Vertical
2	2486.420	18.53	27.55	3.62	0.00	49.70	74.00	24.30	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 2DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\53
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

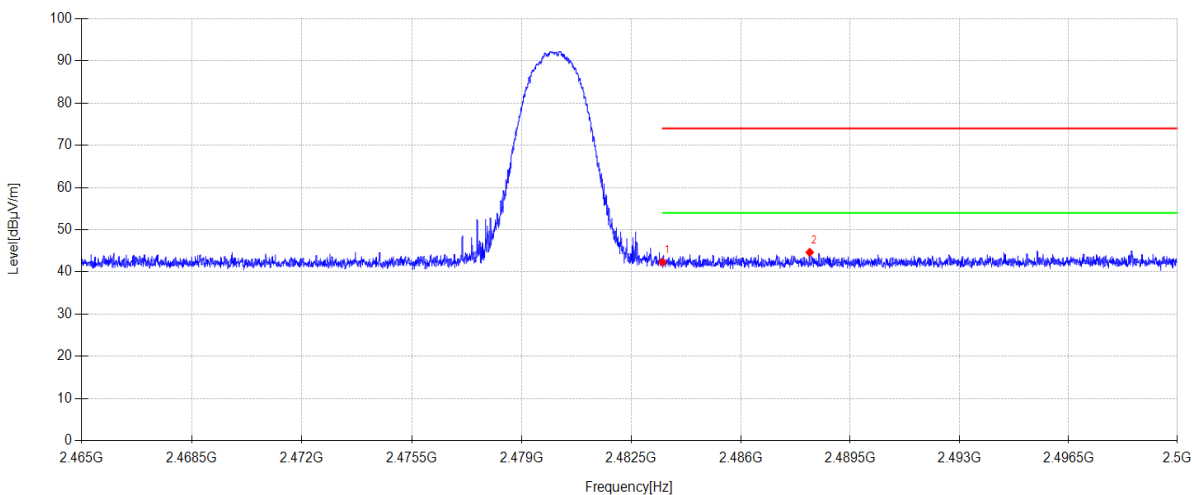

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.15	27.53	3.62	0.00	42.30	74.00	31.70	PK	Horizontal
2	2488.205	13.47	27.55	3.62	0.00	44.64	74.00	29.36	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: 2DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\54
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

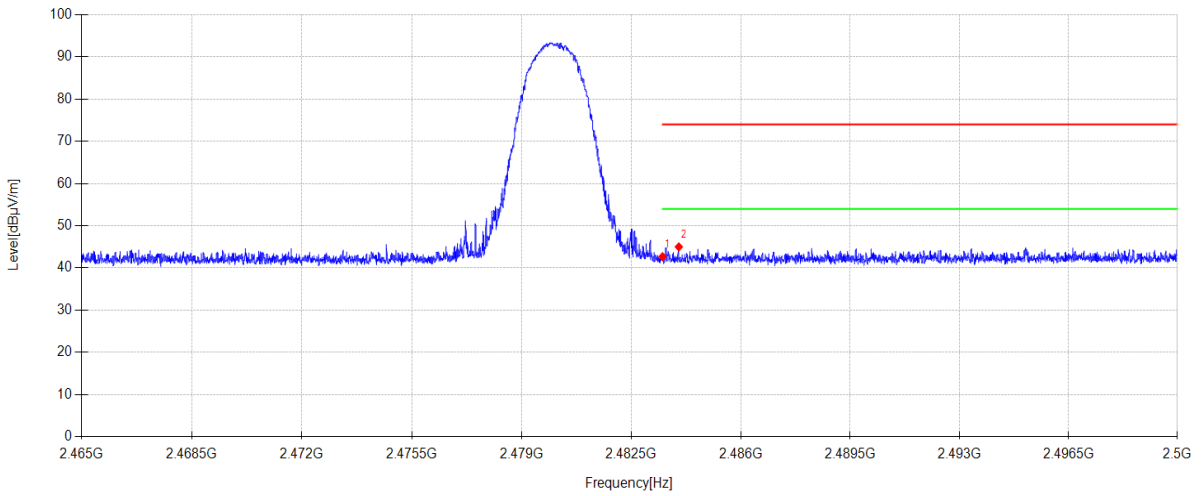

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.52	27.53	3.62	0.00	42.67	74.00	31.33	PK	Vertical
2	2484.019	13.84	27.54	3.62	0.00	45.00	74.00	29.00	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\55
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

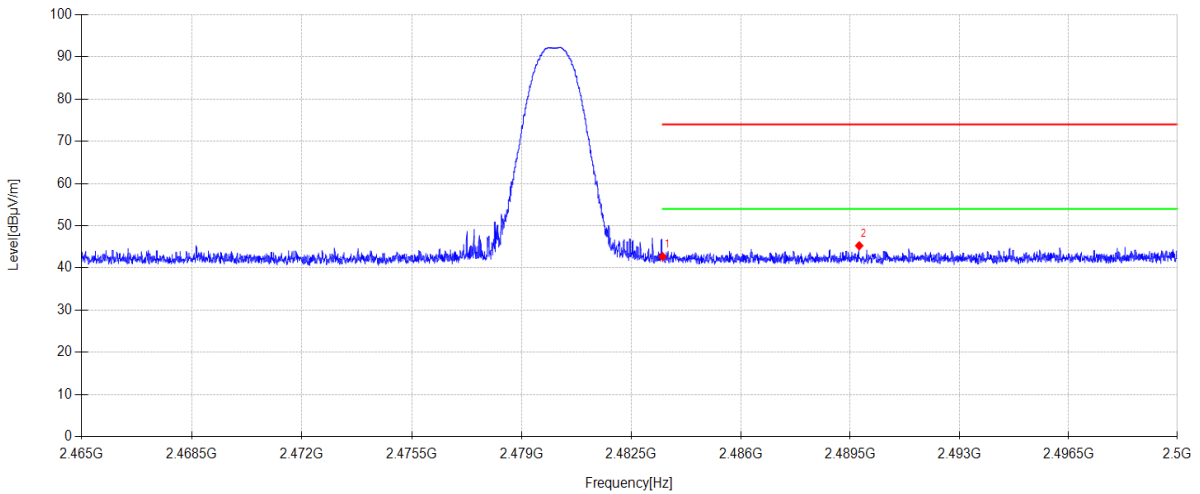

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.53	27.53	3.62	0.00	42.68	74.00	31.32	PK	Horizontal
2	2489.791	14.08	27.56	3.62	0.00	45.26	74.00	28.74	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-30 **Tested By:** Genliu
EUT: True Wireless Earbuds **Model Number:** GO Pop ANC
Test Mode: DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.2°C;Humi:62.8% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24040910-1E\FCC ABOVE1G\56
Memo: Right side Sample Number:S24040910-001 Power Setting:10

Test Graph

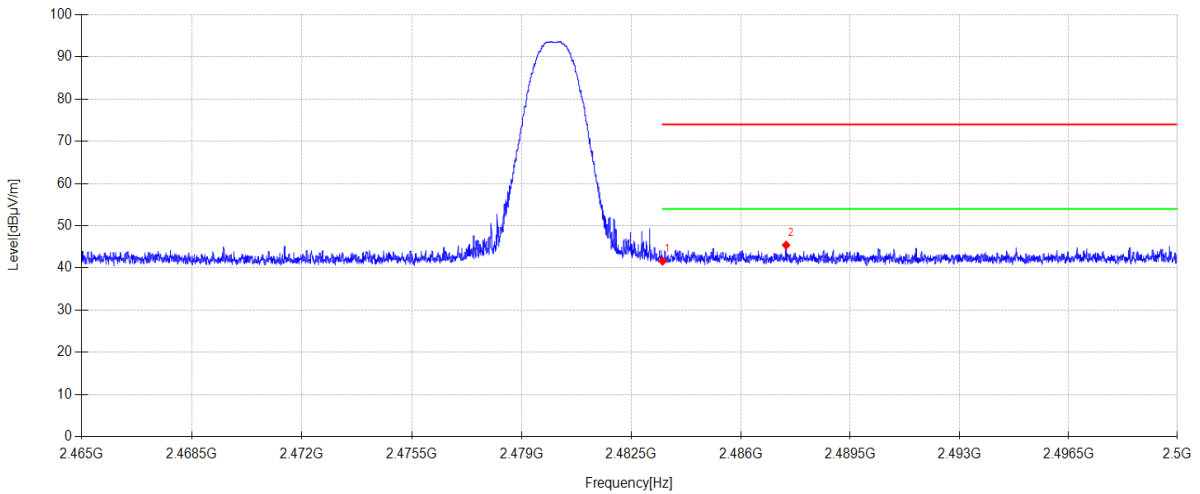

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.48	27.53	3.62	0.00	41.63	74.00	32.37	PK	Vertical
2	2487.449	14.24	27.55	3.62	0.00	45.41	74.00	28.59	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

16. Power Line Conducted Emissions

16.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Three-phase artificial power network	SCHWARZBEC K	NSLK 8163	DDT-ZC01572	2025/07/08
Two Line V-Network	R&S	ENV216	DDT-ZC02056	2025/07/08
EMI Test Receiver	R&S	ESCI/E3	DDT-ZC01297	2025/07/08
Two Line V-Network	R&S	ENV216	DDT-ZC02059	2025/07/08
RF Cable	Yuhu Technology	Z806-NJ-NJ-6M	DDT-ZC02004	2025/07/08
Δ -shaped artificial power network	SCHWARZBEC K	PVDC 8301	DDT-ZC03939	2025/03/31
Pulse Limiter	SCHWARZBEC K	VTSD 9561	DDT-ZC02128	2025/07/08
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/

16.2. Block diagram of test setup

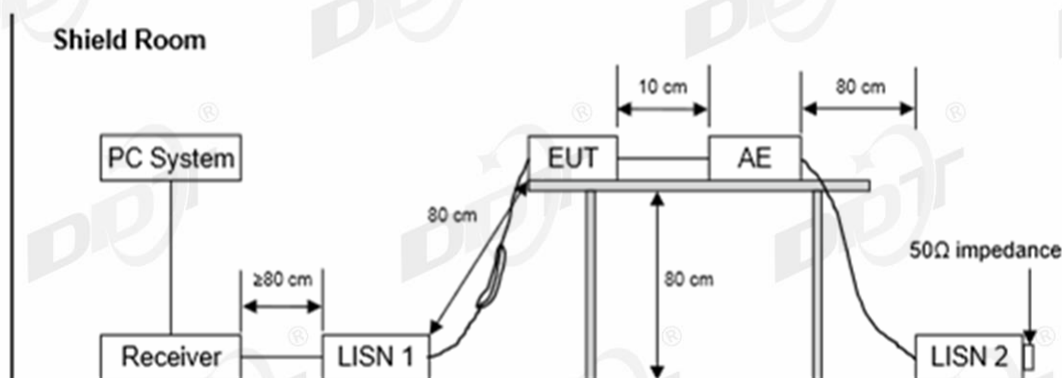

16.3. Limits

Frequency	Quasi-Peak Level dB(mV)	Average Level dB(mV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

16.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-100400C01	Huawei Fast Charge 2 #	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX

16.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

16.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means Peak detection; "----" means Average detection.


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

16.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site	: DDT 6# Shield Room	D:\2024 Report Date\Q24040910-2E\CE FCC.EM6	
Test Date	: 2024-08-03	Tested By	: Gen Liu
EUT	: True Wireless Earbuds	Model Number	: GO Pop ANC
Power Supply	: AC 120V/60Hz	Test Mode	: BT mode
Condition	: Temp:21.9°C,Humi:56.2%	LISN	: 2023 ENV 216 3#/LINE
Memo	:		

Data: 2

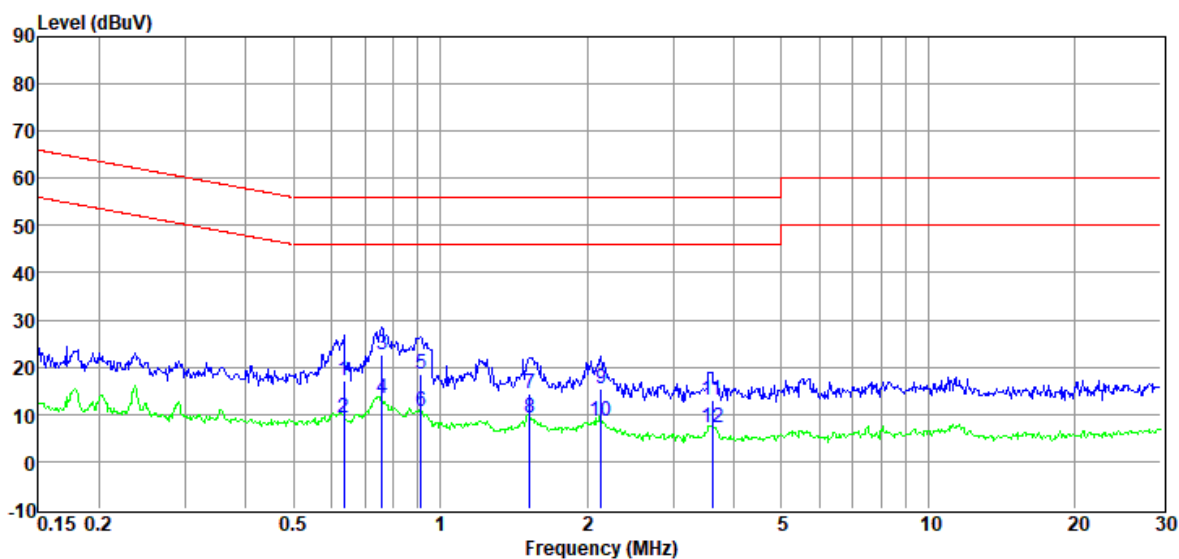


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.63	-2.75	9.67	0.14	9.96	17.02	56.00	-38.98	QP	LINE
2	0.63	-10.44	9.67	0.14	9.96	9.33	46.00	-36.67	Average	LINE
3	0.76	2.55	9.85	0.16	9.97	22.53	56.00	-33.47	QP	LINE
4	0.76	-6.61	9.85	0.16	9.97	13.37	46.00	-32.63	Average	LINE
5	0.91	-1.31	9.68	0.22	9.97	18.56	56.00	-37.44	QP	LINE
6	0.91	-9.38	9.68	0.22	9.97	10.49	46.00	-35.51	Average	LINE
7	1.53	-5.33	9.49	0.26	9.98	14.40	56.00	-41.60	QP	LINE
8	1.53	-10.32	9.49	0.26	9.98	9.41	46.00	-36.59	Average	LINE
9	2.13	-4.77	9.82	0.26	9.99	15.30	56.00	-40.70	QP	LINE
10	2.13	-11.48	9.82	0.26	9.99	8.59	46.00	-37.41	Average	LINE
11	3.60	-7.05	9.71	0.27	10.01	12.94	56.00	-43.06	QP	LINE
12	3.60	-12.72	9.71	0.27	10.01	7.27	46.00	-38.73	Average	LINE

- Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site	: DDT 6# Shield Room	D:\2024 Report Date\Q24040910-2E\CE FCC.EM6	
Test Date	: 2024-08-03	Tested By	: Gen Liu
EUT	: True Wireless Earbuds	Model Number	: GO Pop ANC
Power Supply	: AC 120V/60Hz	Test Mode	: BT mode
Condition	: Temp:21.9°C,Humi:56.2%	LISN	: 2023 ENV 216 3#/NEUTRAL
Memo	:		

Data: 4

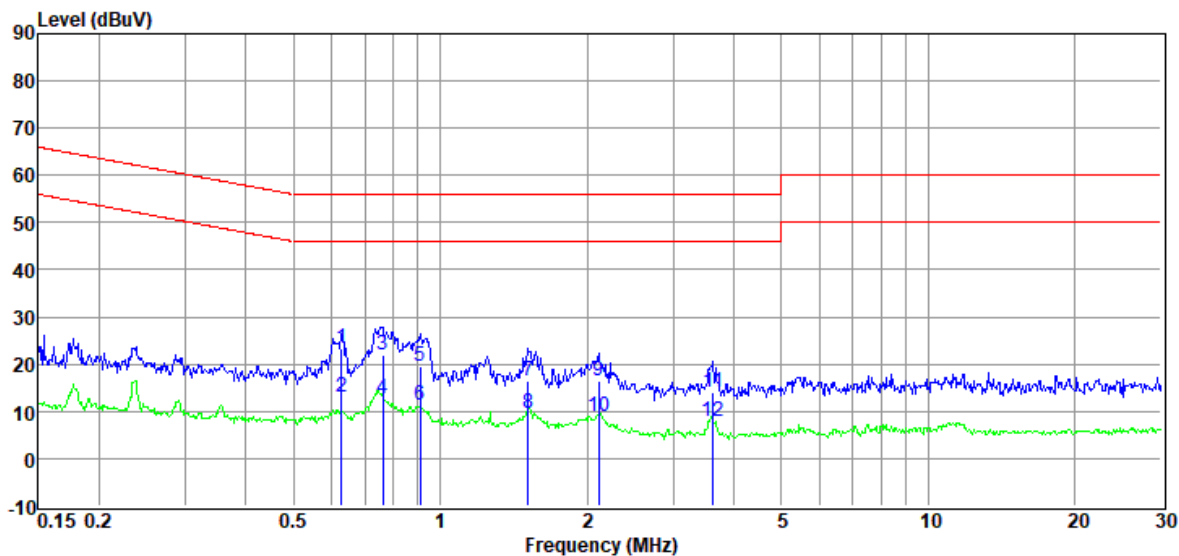

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.63	3.32	9.76	0.14	9.96	23.18	56.00	-32.82	QP	NEUTRAL
2	0.63	-6.95	9.76	0.14	9.96	12.91	46.00	-33.09	Average	NEUTRAL
3	0.76	1.88	9.88	0.17	9.97	21.90	56.00	-34.10	QP	NEUTRAL
4	0.76	-7.23	9.88	0.17	9.97	12.79	46.00	-33.21	Average	NEUTRAL
5	0.91	-0.69	10.03	0.22	9.97	19.53	56.00	-36.47	QP	NEUTRAL
6	0.91	-9.04	10.03	0.22	9.97	11.18	46.00	-34.82	Average	NEUTRAL
7	1.51	-3.95	10.03	0.26	9.98	16.32	56.00	-39.68	QP	NEUTRAL
8	1.51	-10.53	10.03	0.26	9.98	9.74	46.00	-36.26	Average	NEUTRAL
9	2.11	-3.78	9.90	0.26	9.99	16.37	56.00	-39.63	QP	NEUTRAL
10	2.11	-11.14	9.90	0.26	9.99	9.01	46.00	-36.99	Average	NEUTRAL
11	3.62	-5.93	9.54	0.27	10.01	13.89	56.00	-42.11	QP	NEUTRAL
12	3.62	-11.90	9.54	0.27	10.01	7.92	46.00	-38.08	Average	NEUTRAL

- Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

18.Photos of the EUT

Please refer to DDT-Q24040910-2E appendix I

-----End Report-----