

Appendix B

Highest Test Plots

Table of Contents

1.	BR/EDR front side 3DH5 0-channel head of Left EAR	3
2.	BR/EDR front side 3DH5 78-channel head of Right EAR	4

1. BR/EDR front side 3DH5 0-channel head of Left EAR

Date: 09.08.2022

Test Laboratory: Tianjin Dongdian Testing Service CO., Ltd

L Front Side 3DH5 CH0

DUT: TWS Earbuds; M/N: Open Sport

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2402 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.724$ S/m; $\epsilon_r = 38.009$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ConvF(7.69, 7.69, 7.69); Calibrated: 27.02.2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 21.01.2022
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1197
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Front Side 3DH5 CH0/Area Scan (9x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.182 W/kg


Configuration/Front Side 3DH5 CH0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.463 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.241 W/kg

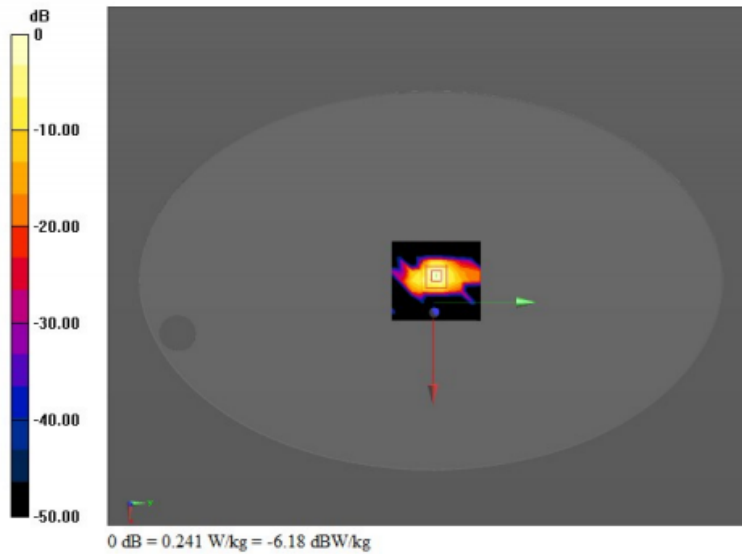

2. BR/EDR front side 3DH5 78-channel head of Right EAR

Date: 09.08.2022

Test Laboratory: Tianjin Dongdian Testing Service CO., Ltd

R Front Side 3DH5 CH78

DUT: TWS Earbuds; M/N: Open Sport

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2480 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.806$ S/m; $\epsilon_r = 37.778$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ConvF(7.69, 7.69, 7.69); Calibrated: 27.02.2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 21.01.2022
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1197
- DASYS2 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Front Side 3DH5 CH78/Area Scan (9x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.342 W/kg

Configuration/Front Side 3DH5 CH78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 3.497 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.580 W/kg
SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.070 W/kg
Maximum value of SAR (measured) = 0.395 W/kg

