


FCC Test Report

Report No.: AGC00947190201FE03

FCC ID	: 2AHYVSTUDIO
PRODUCT DESIGNATION	ON : Bluetooth Headphone
BRAND NAME	JLab [®] JLab [®]
	Studio BT 、HBASTUDIORBLK4、 HBASTUDIORGRYBLU4、HBASTUDIORWHT4、
MODEL NAME	iFCHBASTUDIORBLK4、IFCHBASTUDIORGRYBLU4、 iFCHBASTUDIORWHT4、IEUHBASTUDIORBLK4、 IEUHBASTUDIORGRYBLU4、IEUHBASTUDIORWHT4、 BT-857
APPLICANT	: PEAG, LLC dba JLab Audio
DATE OF ISSUE	: Mar. 29, 2019
STANDARD(S)	: 47 CFR FCC Part 15 Subpart C 15.247
REPORT VERSION	• V1.1

Attestation of Global Compliance (Shenzhen) Co., Ltd

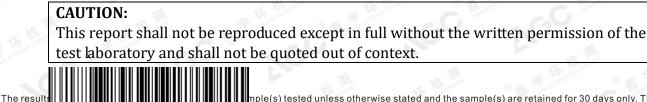

is issued by AGC confirmed at Attr

Attestation of Global Compliance

reproduced except in full with our prior written permission. The more details and the authenticity of the report will be

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bacan District, Shenzhen, Guangdong China



Report No.: AGC00947190201FE03 Page 2 of 69

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0		Mar. 18, 2019	Invalid	Initial Release
V1.1	1 st	Mar. 29, 2019	Valid	Revise report





Report No.: AGC00947190201FE03 Page 3 of 69

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	232 -1800 Allo
2. GENERAL INFORMATION	
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. RECEIVER INPUT BANDWIDTH	
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	
2.6. RELATED SUBMITTAL(S) / GRANT (S)	
2.7. TEST METHODOLOGY	
2.8. SPECIAL ACCESSORIES	
2.9. EQUIPMENT MODIFICATIONS	
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	
5.2. EQUIPMENT USED IN EUT SYSTEM	
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	
8. 20DB BANDWIDTH	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	
10. RADIATED EMISSION	
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SETUP 10.3. LIMITS AND MEASUREMENT RESULT	
10.3 LIMITS AND MEASUREMENT RESULT	41

环 检 测 鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC00947190201FE03 Page 4 of 69

11. NUMBER OF HOPPING FREQUENCY	
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
11.3. MEASUREMENT EQUIPMENT USED	
11.4. LIMITS AND MEASUREMENT RESULT	
12. TIME OF OCCUPANCY (DWELL TIME)	
12.1. MEASUREMENT PROCEDURE	
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
12.3. MEASUREMENT EQUIPMENT USED	
12.4. LIMITS AND MEASUREMENT RESULT	
13. FREQUENCY SEPARATION	
13.1. MEASUREMENT PROCEDURE	
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
13.3. MEASUREMENT EQUIPMENT USED	
13.4. LIMITS AND MEASUREMENT RESULT	
14. FCC LINE CONDUCTED EMISSION TEST	58
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	59
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF TEST SETUP	





Report No.: AGC00947190201FE03 Page 5 of 69

1. VERIFICATION OF CONFORMITY

Applicant	PEAG, LLC dba JLab Audio	
Address	2281 Las Palmas Drive, Suite 101, Carlsbad, CA 92011, USA	
Manufacturer	Kanen Electronics Co., Ltd	
Address	No.78, East Liuhua Rd, Xiakou Ind.Zone, Dongcheng District, Dongguan, GD, China	
Factory	Kanen Electronics Co., Ltd	
Address	No.78, East Liuhua Rd, Xiakou Ind.Zone, Dongcheng District, Dongguan, GD, China	
Product Designation	Bluetooth Headphone	
Brand Name	JLab	
Test Model	Studio BT	
Series Model	HBASTUDIORBLK4、HBASTUDIORGRYBLU4、HBASTUDIORWHT4、 IFCHBASTUDIORBLK4、IFCHBASTUDIORGRYBLU4、 IFCHBASTUDIORWHT4、IEUHBASTUDIORBLK4、 IEUHBASTUDIORGRYBLU4、IEUHBASTUDIORWHT4、BT-857	
Difference description	All the same except for the color in appearance.	
Date of test	Mar. 11, 2019 to Mar. 18, 2019	
Deviation	None	
Condition of Test Sample	Normal	
Report Template	AGCRT-US-BR/RF	
Markensky, and the these		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

donjon strong Tested By Donjon Huang(Huang Mar. 18, 2019 Dongyang) Korr xie **Reviewed By** Bart Xie(Xie Xiaobin) Mar. 29, 2019 Approved By spe Forrest Lei(Lei Yonggang) Mar. 29, 2019 Authorized Officer

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 🖉 C, this documents and the authenticity of the reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gert.com.

GC Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is "Bluetooth Headphones" designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following:

Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V5.0
Modulation	GFSK, π /4-DQPSK, 8DPSK
Number of channels	79(For BR/EDR)
Hardware Version	V1.0
Software Version	V1.6
Antenna Designation	PCB Antenna
Antenna Gain	0dBi
Power Supply	DC3.7V by Battery

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	O A Tobal O and O A A A A A A A A A A A A A A A A A A	2402MHZ
F St. Conder Conder		2403MHZ
GC in D		The The State
	38	2440 MHZ
2400~2483.5MHZ	39	2441 MHZ
C There C The	40	2442 MHZ
Ge No in		The Contract : 6 Francisco Contra
The the second	77 0 3 3 400	2479 MHZ
And Complete	78	2480 MHZ

AGC[®]鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC00947190201FE03 Page 7 of 69

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ, In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the

connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values: 1. LAP/UAP of the master of the connection.

2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For ehavior zation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us.The clock has a cycle of about one day(23h30).In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations)are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following ehavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us).The hopping sequence will always Differ from the first one.

AGC [®]鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC00947190201FE03 Page 8 of 69

2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AHYVSTUDIO** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.





3. MEASUREMENT UNCERTAINTY

Test	Measurement	Notes
1651	Uncertainty	NOLES
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance0.15~30MHz	±3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.





4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
· 私 1 · 私	Low channel TX
0 <u>2</u> 2	Middle channel TX
3	High channel TX
4	Normal Operating (BT)
Note:	


- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

The results showed hts test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document terror details and the authenticity of the report will be confirmed at http://www.agc-cert.com.



Report No.: AGC00947190201FE03 Page 11 of 69

5. SYSTEM TEST CONFIGURATION 5.1. CONFIGURATION OF EUT SYSTEM Configuration:



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1 ©	Bluetooth Headphone	Studio BT	2AHYVSTUDIO	EUT
2	Battery	N/A	DC3.7V/ 380mAh	Accessory
3	USB	N/A	N/A	Accessory

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Power Line Conduction Emission	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant



6. TEST FACILITY

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259	
FCC Test Firm Registration Number	975832	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA	

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 12, 2018	Jun. 11, 2019
LISN	R&S	ESH2-Z5	100086	Aug. 28, 2018	Aug. 27, 2019

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2018	Jun. 11, 2019
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
2.4GHz Fliter	Micro-tronics	087	N/A	Jun. 12, 2018	Jun. 11, 2019
Attenuator	Weinachel Corp	58-30-33	N/A	Jun. 12, 2018	Jun. 11, 2019
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2017	Sep. 20, 2020
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 14, 2018	Jun. 13, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2018	May. 25, 2020
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 25, 2018	Oct. 24, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 28, 2017	Sep. 27, 2019

The results shown the sample(s) are retained for 30 days only. The document is issued by AGC, this document is cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. Use the following spectrum analyzer settings:
 - 1) Span : Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- 4. Record the maximum power from the Spectrum Analyzer.

Note: The EUT was tested according for compliance ANSI C63.10 (2013) requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

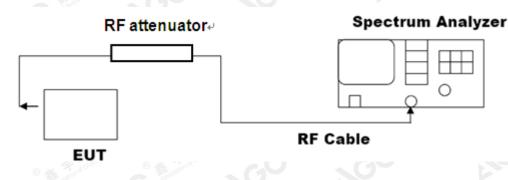



7.3. LIMITS AND MEASUREMENT RESULT

鑫 宇 环 检 测 Attestation of Global Compliance

R

AGC

Mode	Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
and Contra	2.402	-1.927	30	Pass
GFSK	2.441	-1.982	30	Pass
G.	2.480	-2.357	30	Pass





Report No.: AGC00947190201FE03 Page 15 of 69

Keysight Spectrum Analyzer - Swept SA				
RF 50 Ω AC larker 1 2.440940000000	CHZ PNO: Fast		0 PM Mar 14, 2019 RACE 1 2 3 4 5 6 TYPE MWWWWW	Peak Search
0 dB/div Ref 20.00 dBm	IFGain:Low #Atten: 30 dB	Mkr1 2.440 -1	940 GHz 982 dBm	NextPea
10.0				Next Pk Righ
				Next Pk Le
20.0		line in the second s	^N WIN-MARCHARCHARCHARCHARCHARCHARCHARCHARCHARCH	Marker Del
40.0				Mkr→C
50.0				Mkr→RefL
roo Senter 2.441000 GHz Res BW 1.5 MHz	#VBW 5.0 MHz	Spar Sweep 1.000 m	1 5.000 MHz	Мо 1 о

l Jarkor 1	RF 50 Ω AC 2.4798850000		SENSE:INT	Avg Type: Log-Pwr	04:44:21 PM Mar 14, 2019 TRACE 1 2 3 4 5 6	Peak Search
narker i	2.4798850000	PNO: Fast G IFGain:Low	Trig: Free Run #Atten: 30 dB	Avg Hold:>100/100		
0 dB/div	Ref 20.00 dBm			Mkr1	2.479 885 GHz -2.357 dBm	Next Pe
og 10.0						Next Pk Rig
3.00			1			
10.0						Next Pk L
0.0					unally after the state of the second	
30.0						Marker De
0.0						
0.0						Mkr→
0.0						Mkr→Refl
10.0						
						M d 1 d
	80000 GHz 1.5 MHz	#VBV	V 5.0 MHz	Sweep 1	Span 5.000 MHz .000 ms (1001 pts)	10

The results show the first report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Report No.: AGC00947190201FE03 Page 16 of 69

Mode	Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
Aba Complant Fr Good Com	2.402	0.239	30	Pass
π /4-DQPSK	2.441	0.163	30	Pass
<u>G</u>	2.480	-0.195	30	Pass



The results showed hts test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-gert.com.



R

6


环

宇

鑫 宇 环 检 测 Attestation of Global Compliance

测

Report No.: AGC00947190201FE03 Page 17 of 69

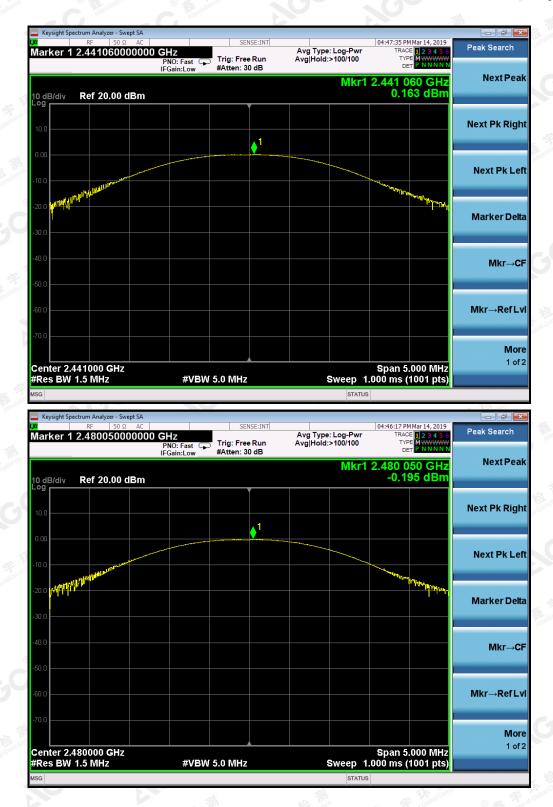

The results shown in the set report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Report No.: AGC00947190201FE03 Page 18 of 69

Mode	Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
Compliant Frank	2.402	0.511	30	Pass
8DPSK	2.441	0.578	30	Pass
3	2.480	0.211	30	Pass



The results show on the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



R

环


宇

鑫 宇 环 检 测 Attestation of Global Compliance

测

GC

Report No.: AGC00947190201FE03 Page 19 of 69

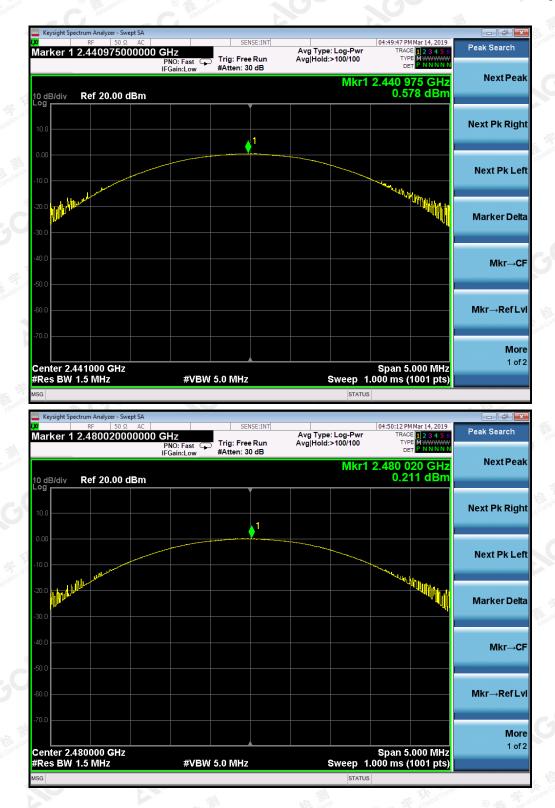

The results shown in the set report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

ACC [®]鑫 宇 环 检 测 Attestation of Global Compliance


Report No.: AGC00947190201FE03 Page 20 of 69

8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel
- $RBW \ge 1\%$ of the 20 dB bandwidth, $VBW \ge RBW$; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

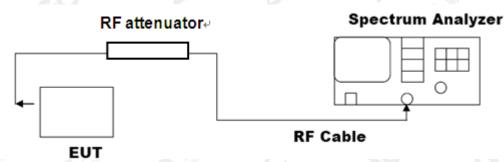



8.3. LIMITS AND MEASUREMENT RESULTS

鑫 宇 环 检 测 Attestation of Global Compliance

AGC


Mode	Channel.	20dB Bandwidth [MHz]	Verdict
GFSK	LCH	1.025	PASS
GFSK	МСН	1.023	PASS
GFSK	НСН	1.023	PASS







Report No.: AGC00947190201FE03 Page 22 of 69

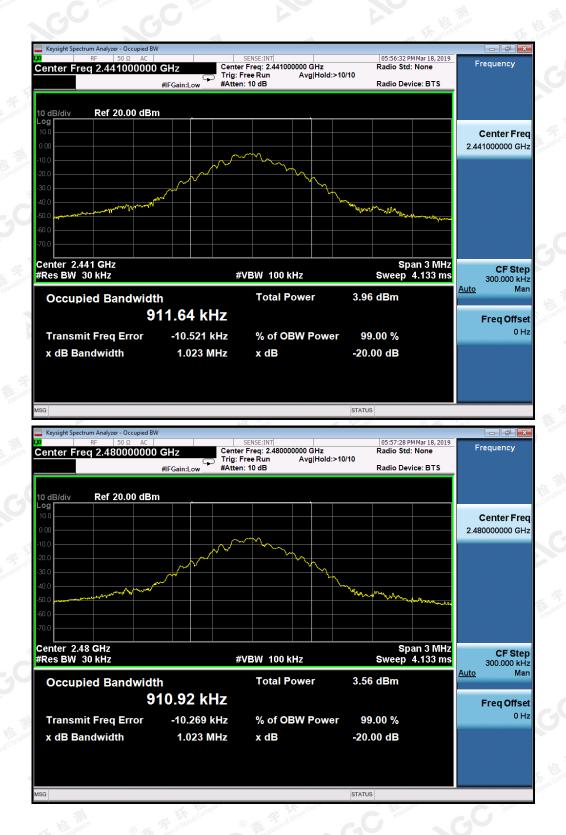


The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.




Report No.: AGC00947190201FE03 Page 23 of 69

Mode	Channel.	20dB Bandwidth [MHz]	Verdict
π/4DQPSK	LCH	1.356	PASS
π/4DQPSK	MCH	1.359	PASS
π/4DQPSK	HCH	1.315	PASS

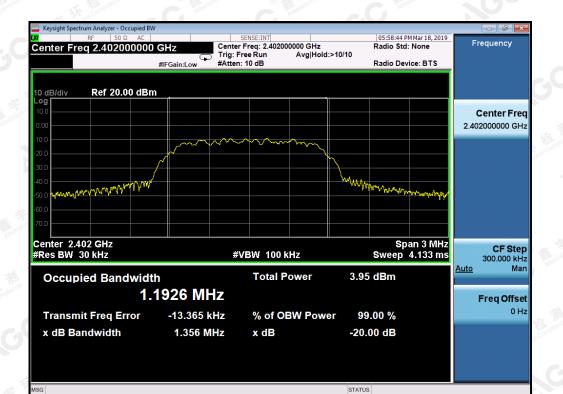



Report No.: AGC00947190201FE03 Page 24 of 69

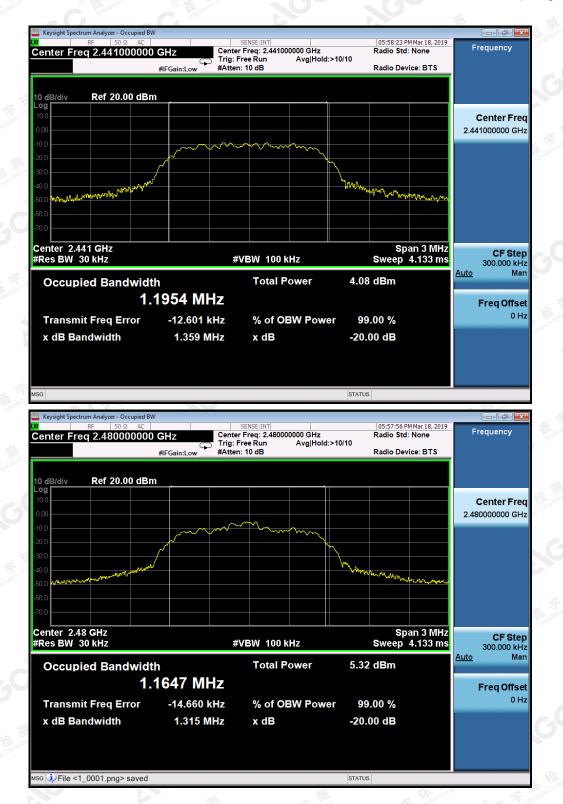

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.




Report No.: AGC00947190201FE03 Page 25 of 69

Attesta		The Conn	The Company
Mode	Channel.	20dB Bandwidth [MHz]	Verdict
8DPSK	LCH	1.344	PASS
8DPSK	MCH	1.343	PASS
8DPSK	НСН	1.342	PASS





Report No.: AGC00947190201FE03 Page 26 of 69

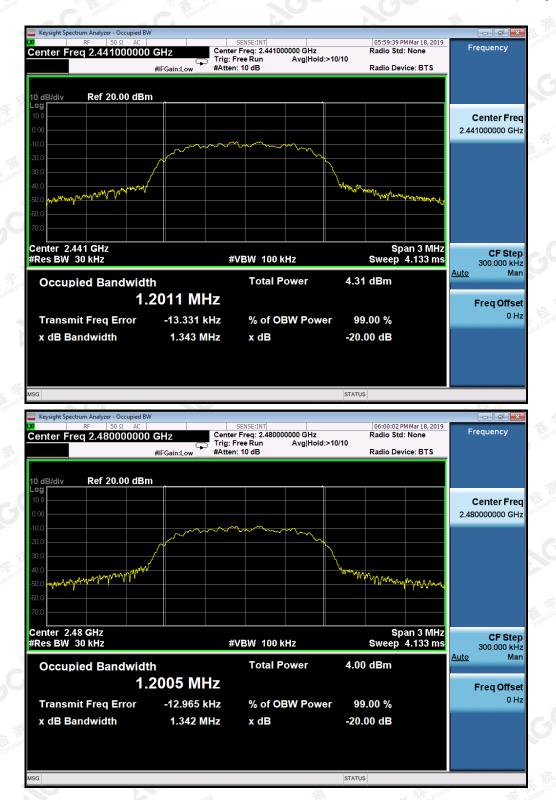

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



Report No.: AGC00947190201FE03 Page 27 of 69

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
 RBW = 100 kHz; VBW ≥ RBW; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according for compliance ANSI C63.10 (2013) requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW > RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW > RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2





9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT				
	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS		
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS		






Report No.: AGC00947190201FE03 Page 29 of 69

TEST RESULT FOR ENTIRE FREQUENCY RANGE TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

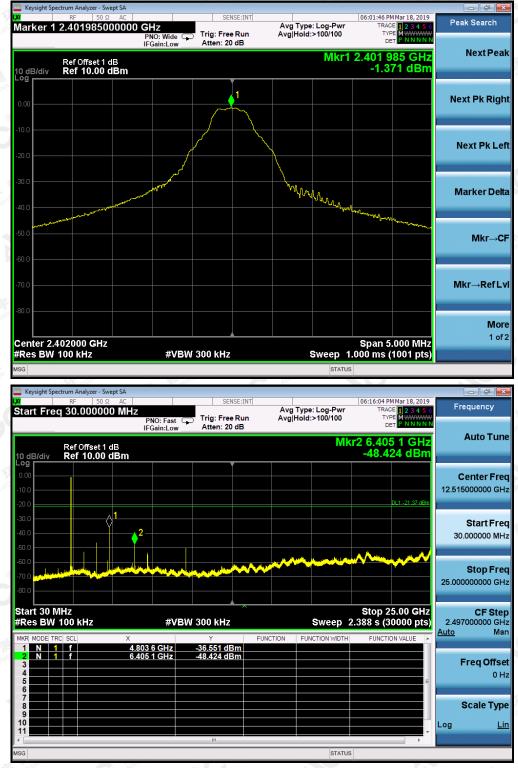




Report No.: AGC00947190201FE03 Page 30 of 69

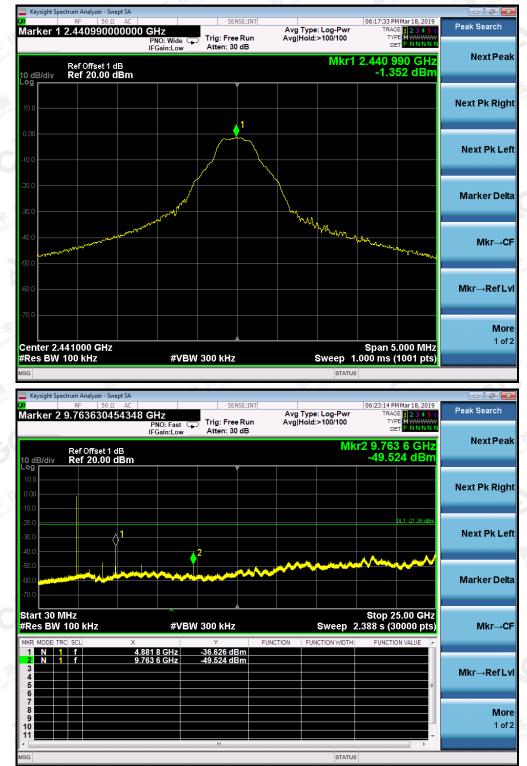

TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL



Report No.: AGC00947190201FE03 Page 31 of 69

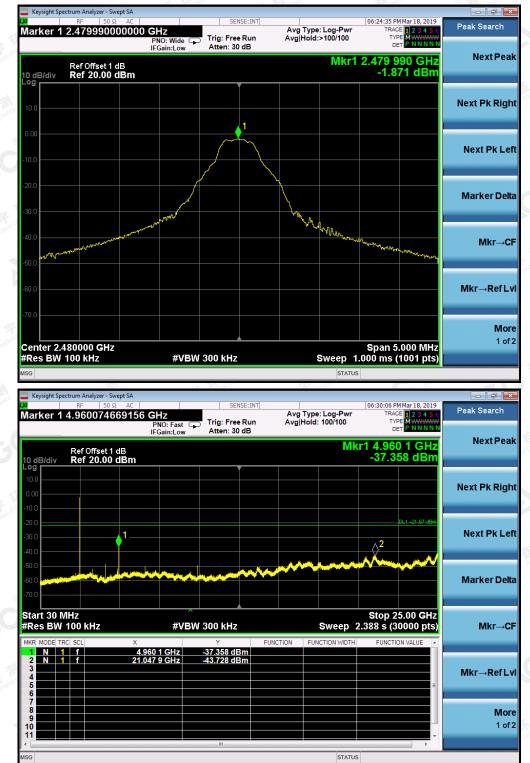

TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit. The GFSK modulation is the worst case and only those data recorded in the report.




Report No.: AGC00947190201FE03 Page 32 of 69


TEST RESULT FOR BAND EDGE

GFSK MODULATION IN LOW CHANNEL

Hopping off

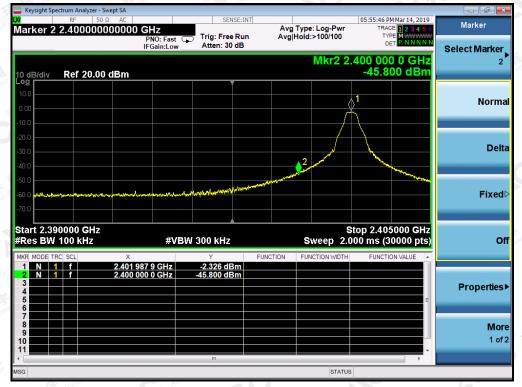


Hopping on

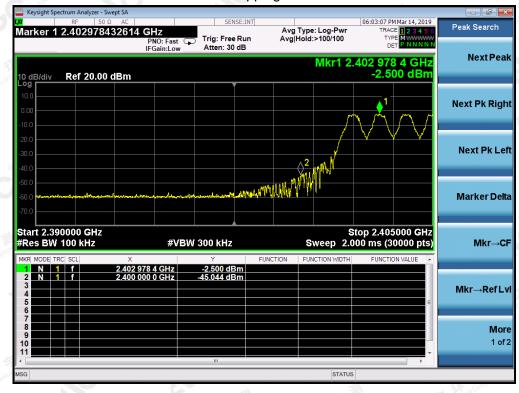


The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



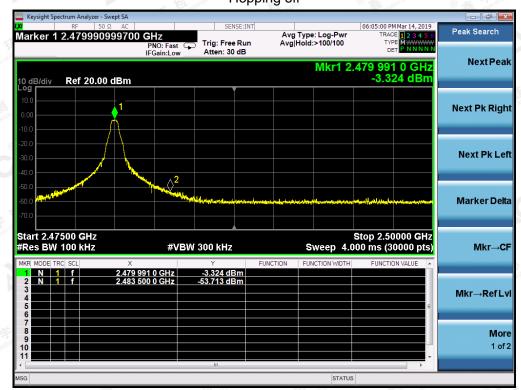

GFSK MODULATION IN HIGH CHANNEL Hopping off

Hopping on

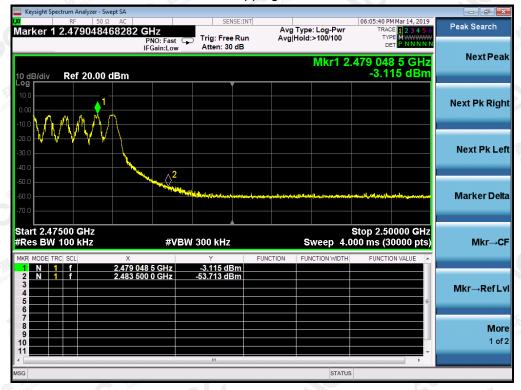






π /4-DQPSK MODULATION IN LOW CHANNEL

Hopping on






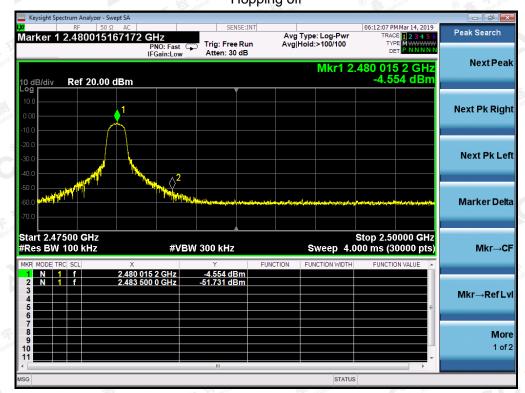


π /4-DQPSK MODULATION IN HIGH CHANNEL Hopping off

Hopping on

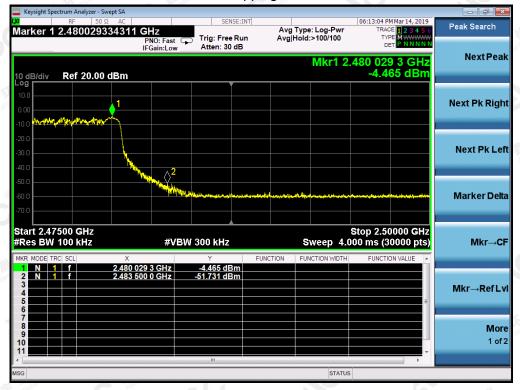



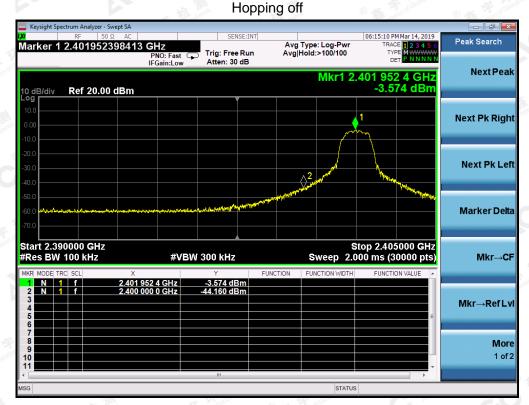


8-DPSK MODULATION IN LOW CHANNEL

Hopping on






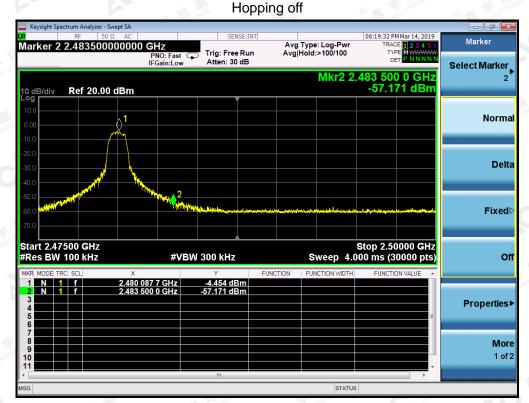

8-DPSK MODULATION IN HIGH CHANNEL

Hopping on

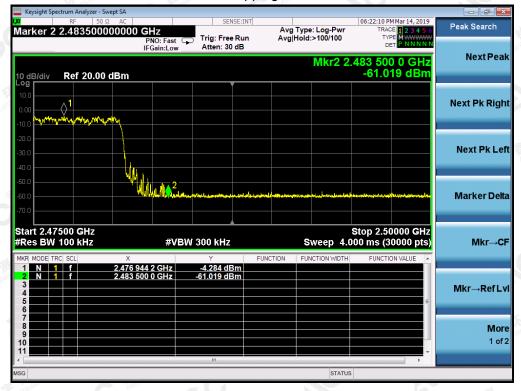

AGC[®]鑫宇环检测 Attestation of Global Compliance

Report No.: AGC00947190201FE03 Page 38 of 69

10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC00947190201FE03 Page 39 of 69

The following table is the setting of spectrum analyzer and receiver.

	Spectrum Parameter	Setting
annelance	Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
C The station of	Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
G *	Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
The the man	Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



AGC[®]鑫宇环检测 Attestation of Global Compliance

10.2. TEST SETUP

RADIATED EMISSION TEST-SETUP FREQUENCY BELOW 30MHZ

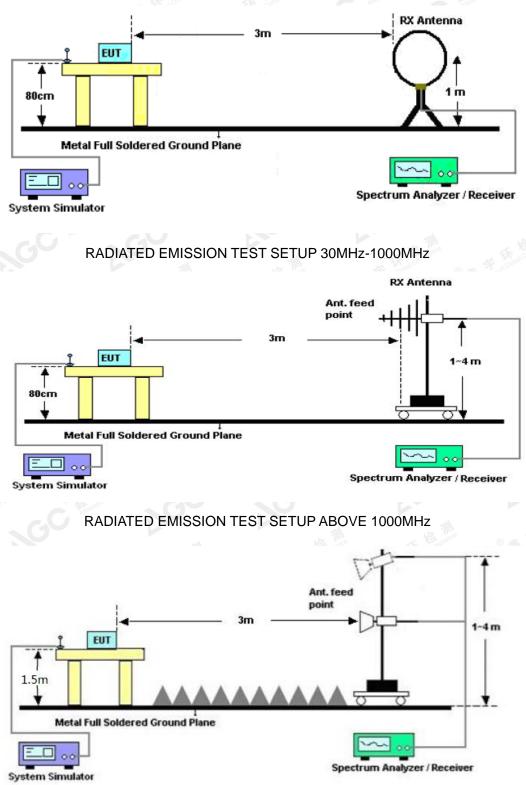

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.