




Test report No:  
 NIE: 64610RRF.001A1

**Partial Test report**  
**REFERENCE STANDARD:**  
**USA FCC Part 24 & Part 27**  
**CANADA IC RSS-130, RSS-133, RSS-139**

(*) Identification of item tested	nRF9160 IOT Module
(*) Trademark	nRF91
(*) Model and /or type reference tested	nRF9160
Other identification of the product	SW version: mfw_nrf9160_1.1.2-148 HW version: nRF9160-SICA-B1A FCC ID: 2ANPO00NRF9160 IC: 24529-NRF9160 IMEI TAC: 35265610
(*) Features	LTE Cat-M1, LTE-NB1, GPS
Applicant	NORDIC SEMICONDUCTOR ASA Otto Niensens Vel 12, 7052 Trondheim, Norway
Test method requested. standard	USA FCC Part 24 10-1-19 Edition. USA FCC Part 27 10-1-19 Edition. CANADA IC RSS-130 Issue 2, Feb 2019. CANADA IC RSS-133 Issue 6, Jan. 2013. CANADA IC RSS-139 Issue 3, Jul. 2015. ANSI C63.26 – 2015. KDB 971168 D01 Power Meas License Digital Systems v03r01, April. 2018.
Approved by (name / position & signature)	Rafael López Martín EMC Consumer & RF Lab. Manager  RAFAEL LÓPEZ MARTÍN 2020.09.02 09:05:32 +02'00'
Date of issue	2020-08-31
Report template No	FDT08_22 (*) "Data provided by the client"

# Index

Competences and guarantees .....	3
General conditions.....	3
Uncertainty.....	3
Data provided by the client .....	3
Usage of samples .....	4
Test sample description.....	4
Identification of the client .....	6
Testing period and place .....	6
Document history.....	6
Environmental conditions .....	6
Remarks and comments.....	7
Testing verdicts.....	8
Summary .....	8
Appendix A: Test results for FCC Part 24 / RSS-133.....	9
Appendix B: Test results for FCC Part 27 / RSS-139 / RSS-130.....	22

## Competences and guarantees

---

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor k=2) was calculated according to the DEKRA Testing and Certification internal document PODT000.

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of nRF9160 IOT Module.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: the client.

Sample S/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
64610D/002	nRF9160 IOT Module	nRF9160	IMEI: 352656102628230	2020/04/14

- Sample S/01 has undergone the following test(s):  
 All tests indicated in appendixes A and B for GEN2 device.

Auxiliary sample S/02 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
59965/011	nRF9160 IOT Module	nRF9160	IMEI: 352656100158248	2019/03/25

- Sample S/02 has undergone the following test(s):  
 Auxiliary sample to perform measurements for GEN1 device for conducted RF output power comparison indicated in appendixes A and B.

## Test sample description

Ports..... :	Port name and description	Cable				
		Specified length [m]	Attached during test	Shielded		
	LTE RF	2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
	GPS	2	<input type="checkbox"/>	<input type="checkbox"/>		
	BTLE		<input type="checkbox"/>	<input type="checkbox"/>		
Supplementary information to the ports..... :	N/A					
Rated power supply .....	Voltage and Frequency	Reference poles				
		L1	L2	L3	N	PE
	<input type="checkbox"/> AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/> DC: 3.0-5.5V						
Rated Power .....	1W					
Clock frequencies..... :	32kHz, 32MHz					
Other parameters .....	--					
Software version .....	mfw_nrf9160_1.1.2_148					

Hardware version .....	nRF9160-SICA-B1A		
Dimensions in cm (L x W x D).....	11x16x1.1mm		
Mounting position .....	<input type="checkbox"/>	Table top equipment	
	<input type="checkbox"/>	Wall/Ceiling mounted equipment	
	<input type="checkbox"/>	Floor standing equipment	
	<input type="checkbox"/>	Hand-held equipment	
	<input checked="" type="checkbox"/>	Other: SMD Module	
Modules/parts.....	Module/parts of test item	Type	Manufacturer
	N/A		
Accessories (not part of the test item) .....	Description	Type	Manufacturer
	N/A		
Documents as provided by the applicant .....	Description	File name	Issue date
	User manual	4418_1315-v1.2 /2020-04-30- nRF9160_Objective_ Product_Spec	30-Apr-2020
	Cover markings	nRF9160_SiP marking	15-Jun-2020

Copy of marking plate:



## Identification of the client

Nordic Semiconductor ASA  
 Otto Niensens Vei 12, 7052 Trondheim, NORWAY

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2020-04-17
Date (finish)	2020-05-18

## Document history

Report number	Date	Description
64610RRF.001	2020-07-08	First release
64610RRF.001A1	2020-08-31	Second release: modification of sw and hw version and DC voltage range declared by manufacturer in "Test sample description". Correction on Vnom voltage value in "Test conditions". Inclusion of conducted RF output power comparison between GEN2 and GEN1 devices.  This modification test report cancels and replaces the test report 64610RRF.001

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 35 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

## Remarks and comments

The tests have been performed by the technical personnel: Nicolás Salguero, José Manuel Jimenez, Miguel Ángel Torres and Cristina Calle.

Used instrumentation:

### Conducted Measurements

	Last Cal. date	Cal. due date
1. DC power supply R&S NGPE 40/40	2018/02	2021/02
2. Universal Radio communication Tester ROHDE AND SCHWARZ CMW500	2020/04	2021/04

### Radiated Measurements

	Last Cal. date	Cal. due date
1. Semianechoic Absorber Lined Chamber ETS FACT3 200STP	N.A.	N.A.
2. Hibrid Bilog antenna SUNOL SCIENCES CORPORATION JB6	2017/09	2020/09
3. Broadband Horn antenna 1-18 GHz SCHWARZBECK BBHA 9120 D	2019/11	2022/11
4. Broadband Horn antenna 18-40 GHz SCHWARZBECK BBHA 9170	2018/07	2021/07
5. Signal and Spectrum Analyser ROHDE AND SCHWARZ FSV40	2019/09	2021/09
6. EMI Test Receiver 9kHz – 7GHz ROHDE AND SCHWARZ ESR7	2019/10	2021/10
7. RF pre-amplifier, G>40dB, 1-18 GHz BONN ELEKTRONIK BLMA 0118-1M	2020/05	2021/05
8. RF pre-amplifier, G>30dB, 18-40 GHz BONN ELEKTRONIK BLMA 1840-1M	2019/02	2021/02
9. Universal Radio communication Tester ROHDE AND SCHWARZ CMW500	2020/04	2021/04

## Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

## Summary

FCC PART 24/IC RSS-133 PARAGRAPH		
Requirement – Test case	Verdict	Remark
Clause 24.232/RSS-133 Clause 6.4: RF output power	P	(2)
Clause 2.1047/RSS-133 Clause 6.2: Modulation characteristics	NM	(1)
Clause 24.235/RSS-133 Clause 6.3: Frequency stability	NM	(1)
Clause 2.1049: Occupied Bandwidth	NM	(1)
Clause 24.238/RSS-133 Clause 6.5: Spurious emissions at antenna terminals	NM	(1)
Clause 24.238/RSS-133 Clause 6.5: Radiated emissions	P	(2)
<u>Supplementary information and remarks:</u>		
(1) Test not requested. Only RF Output Power and Radiated emissions tests were tested in the worst case.		
(2) Peak-to-average power ratio (PAPR) was not tested.		

FCC PART 27 / RSS-139 / RSS-130 PARAGRAPH		
Requirement – Test case	Verdict	Remark
Clause 27.50 / RSS-139 Clause 6.5. / RSS-130 Clause 4.6: RF output power	P	(2)
Clause 2.1047 / RSS-139 Clause 6.2. / RSS-130 Clause 4.2: Modulation Characteristics	NM	(1)
Clause 27.54 / RSS-139 Clause 6.4. / RSS-130 Clause 4.5: Frequency stability	NM	(1)
Clause 2.1049: Occupied Bandwidth	NM	(1)
Clause 27.53 / RSS-139 Clause 6.6. / RSS-130 Clause 4.7: Spurious emissions at antenna terminals	NM	(1)
Clause 27.53 / RSS-139 Clause 6.6. / RSS-130 Clause 4.7: Radiated emissions	P	(2)
<u>Supplementary information and remarks:</u>		
(1) Test not requested. Only RF Output Power and Radiated emissions tests were tested in the worst case.		
(2) Peak-to-average power ratio (PAPR) was not tested.		



## Appendix A: Test results for FCC Part 24 / RSS-133

## INDEX

TEST CONDITIONS .....	11
RF Output Power .....	12
Radiated emissions .....	14

## TEST CONDITIONS

Power supply (V):

Vnominal = 3.8 Vdc

Type of power supply = DC Voltage from external power supply

Type of antenna = Integral antenna.

Declared Gain for antenna = +4.4 dBi.

### TEST FREQUENCIES:

LTE. QPSK AND 16QAM MODULATION (BAND 2)

	Channel (Frequency. MHz)					
	BW = 1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz	BW = 20 MHz
Lowest	18607 (1850.7)	18615 (1851.5)	18625 (1852.5)	18650 (1855.0)	18675 (1857.5)	18700 (1860.0)
Middle	28900 (1880.0)	28900 (1880.0)	28900 (1880.0)	28900 (1880.0)	28900 (1880.0)	28900 (1880.0)
Highest	19193 (1909.3)	19185 (1908.5)	19175 (1907.5)	19150 (1905.0)	19125 (1902.5)	19100 (1900.0)

NOTE: Band 2 is completely included in band 25, so the channels of band 25 were tested to give conformity to the assigned block.

LTE. QPSK AND 16QAM MODULATION (BAND 25)

	Channel (Frequency. MHz)					
	BW = 1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz	BW = 20 MHz
Lowest	26047 (1850.70)	26055 (1851.5)	26065 (1852.5)	26090 (1855.0)	26115 (1857.5)	26140 (1860.0)
Middle	26365 (1882.5)	26365 (1882.5)	26365 (1882.5)	26365 (1882.5)	26365 (1882.5)	26365 (1882.5)
Highest	26683 (1914.3)	26675 (1913.5)	26665 (1912.5)	26640 (1910.0)	26615 (1907.50)	26590 (1905.0)

## RF Output Power

### SPECIFICATION

FCC §2.1046 and §24.232

Mobile/portable stations are limited to 2 Watts (33 dBm) Effective Isotropic Radiated Power (E.I.R.P.).  
The peak-to-average ratio (PAR) of the transmission shall not exceed 13 dB.

### METHOD

The conducted RF output power measurements were made at the RF output terminals of the EUT using the power meter of the Universal Radio Communication tester R&S CMW500, selecting maximum transmission power of the EUT and different modes of modulation.

The maximum equivalent isotropically radiated power (e.i.r.p.) is calculated by adding the declared maximum antenna gain (dBi).

### TEST SETUP

Conducted average power.



**RESULTS**

**MAXIMUM OUTPUT POWER (CONDUCTED).**

**LTE. BAND 25.**

The results in the next tables shows the worst results for each modulation.

Preliminary measurements determined the narrow band = 1 and nominal bandwidth of 15 MHz as the worst case. The results in the next tables shows the results for this configuration.

Narrow band = 1

BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	MODULATION	RB SIZE	RB OFFSET	AVERAGE POWER (dBm)	Maximum effective radiated power E.I.R.P. (dBm)	Maximum effective radiated power E.R.P. (dBm)
15	26055	1851.5	QPSK	1	2	23.35	27.75	25.60
			16-QAM	1	2	22.45	26.85	24.70
	26365	1882.5	QPSK	1	2	23.38	27.78	25.63
			16-QAM	1	2	22.47	26.78	24.72
	26675	1913.5	QPSK	1	2	23.37	27.77	25.62
			16-QAM	1	2	22.32	26.72	24.57

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

Verdict: PASS

**GEN2 AND GEN1 OUTPUT POWER COMPARISON (CONDUCTED).**

**LTE. BAND 25.**

The results in the next table shows the maximum difference between GEN2 and GEN1 devices for conducted output power measurements.

<b>Maximum conducted output power difference between GEN2 and GEN1 (dB)</b>	0.50
---	------

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

## Radiated emissions

### SPECIFICATION

FCC § 24.238. RSS-133 Clause 6.5.

The power of emissions shall be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. P in watts.

### METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a non-conductive stand at a 3 meter distance from the measuring antenna.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum field strength (dB $\mu$ V/m) is measured and recorded.

The maximum field strength (dB $\mu$ V/m) of each detected emission at less than 20 dB respect to the limit is converted to an equivalent EIRP level (dBm) according to ANSI C63.26 with the formula:

$EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m. D = 3 m

#### Measurement Limit:


According to specification. the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. P in watts.

At  $P_o$  transmitting power. the specified minimum attenuation becomes  $43+10\log (P_o)$  and the level in dBm relative  $P_o$  becomes:


$P_o (dBm) - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$

## TEST SETUP


Radiated measurements below 1 GHz.

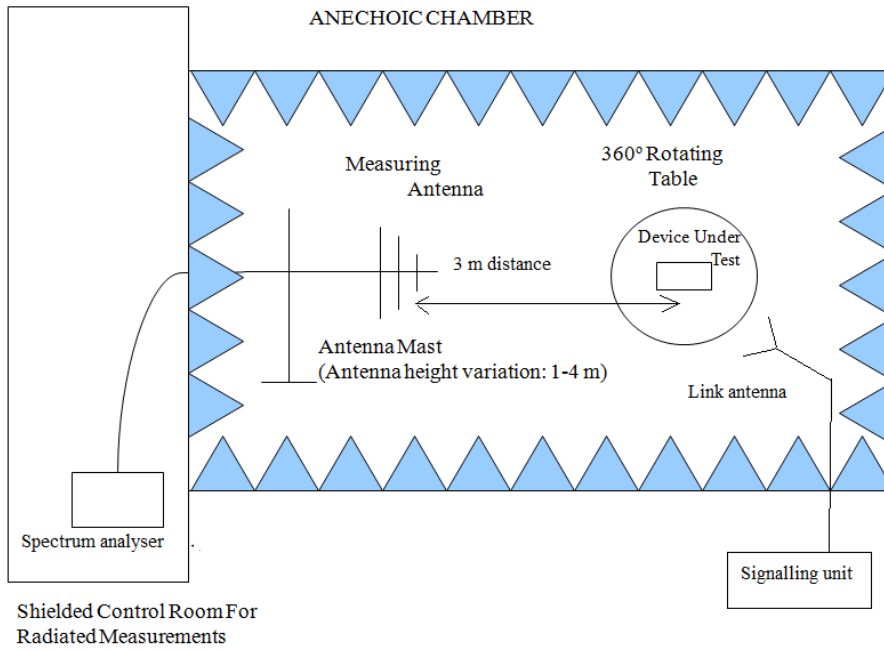

Radiated measurements between 1 GHz to 17GHz.

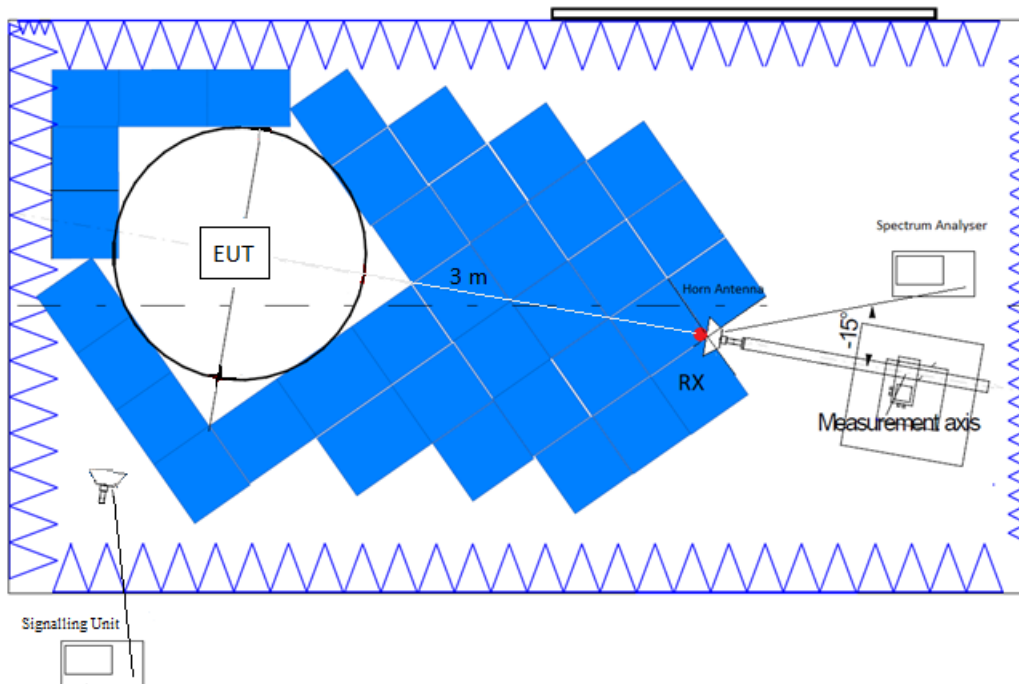

Radiated measurements above 17 GHz.

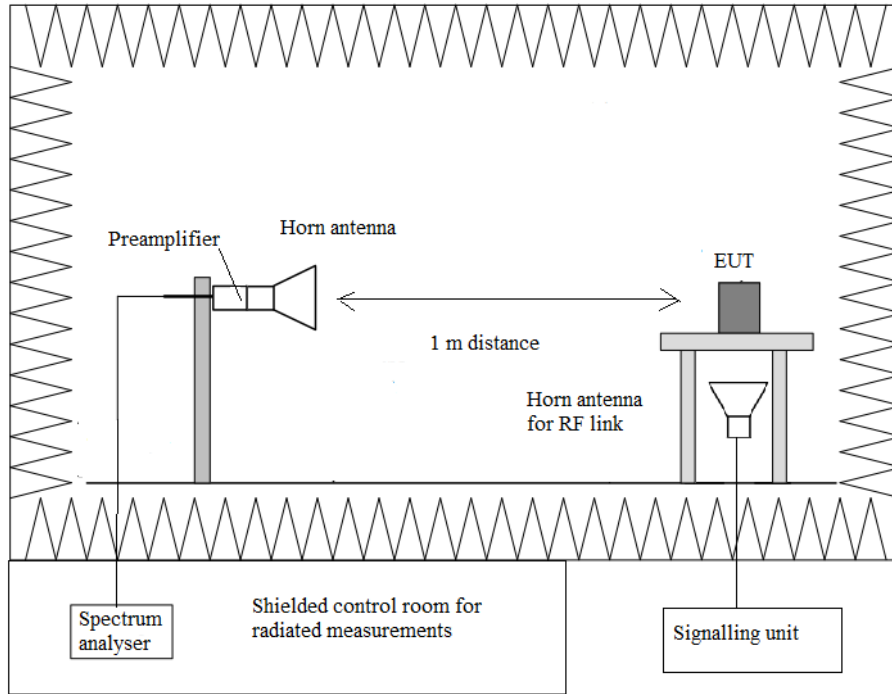



## RESULTS

### LTE. BAND 25.

A preliminary scan determined the QPSK 15 MHz bandwidth, Narrow band =2, RB = 1, as the worst case.

The following tables and plots show the results for this configuration.

#### 1. CHANNEL: LOWEST

##### **Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

##### **Frequency range 1 GHz-18 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

##### **Frequency range 18 GHz-20 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

#### 2. CHANNEL: MIDDLE

##### **Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

##### **Frequency range 1 GHz-18 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

##### **Frequency range 18 GHz-20 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

#### 3. CHANNEL: HIGHEST

##### **Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

##### **Frequency range 1 GHz-18 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.


##### **Frequency range 18 GHz-20 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

Measurement uncertainty (dB)	<±4.65 for f < 1GHz <±3.98 for f ≥ 1 GHz up to 3 GHz <±4.98 for f ≥ 3 GHz up to 17 GHz <±5.33 for f ≥ 17 GHz up to 20 GHz
------------------------------	--

Verdict: PASS


Frequency range 30 MHz-1000 MHz.

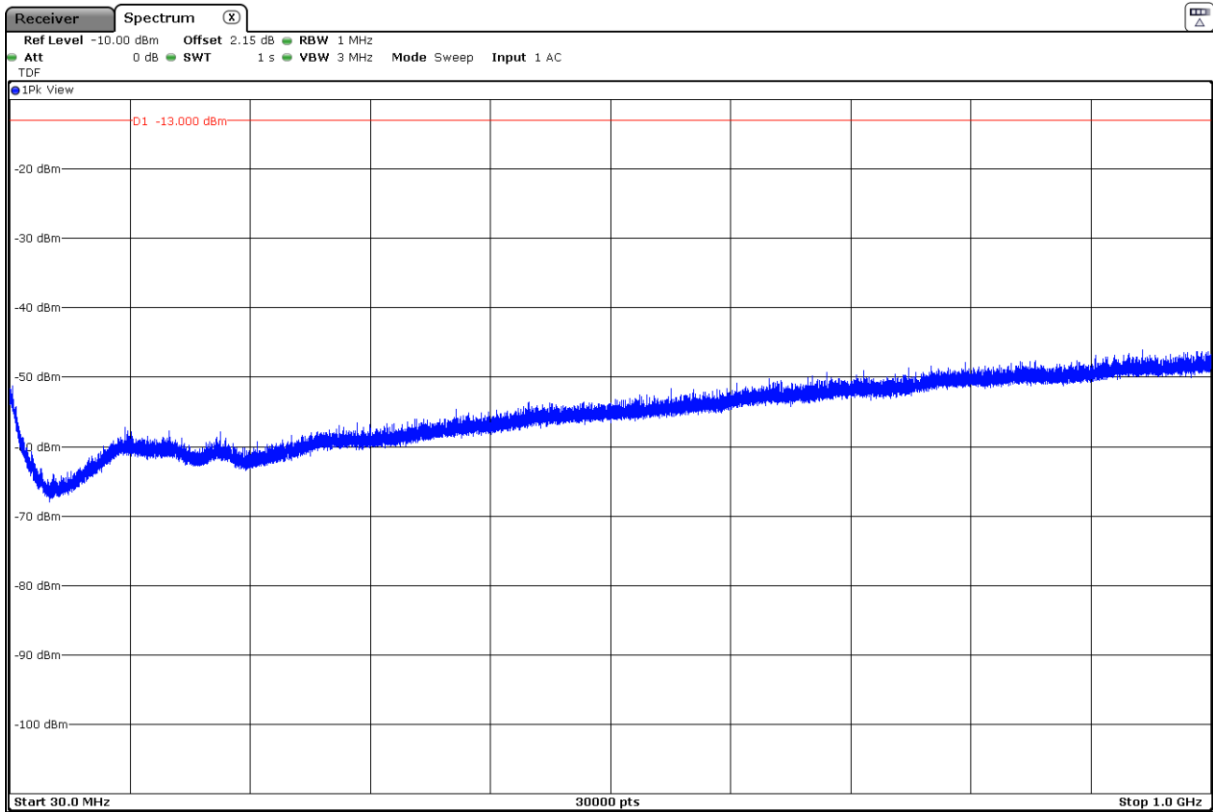

(This plot is valid for all three channels)


Frequency range 1 GHz to 3 GHz

CHANNEL: LOWEST

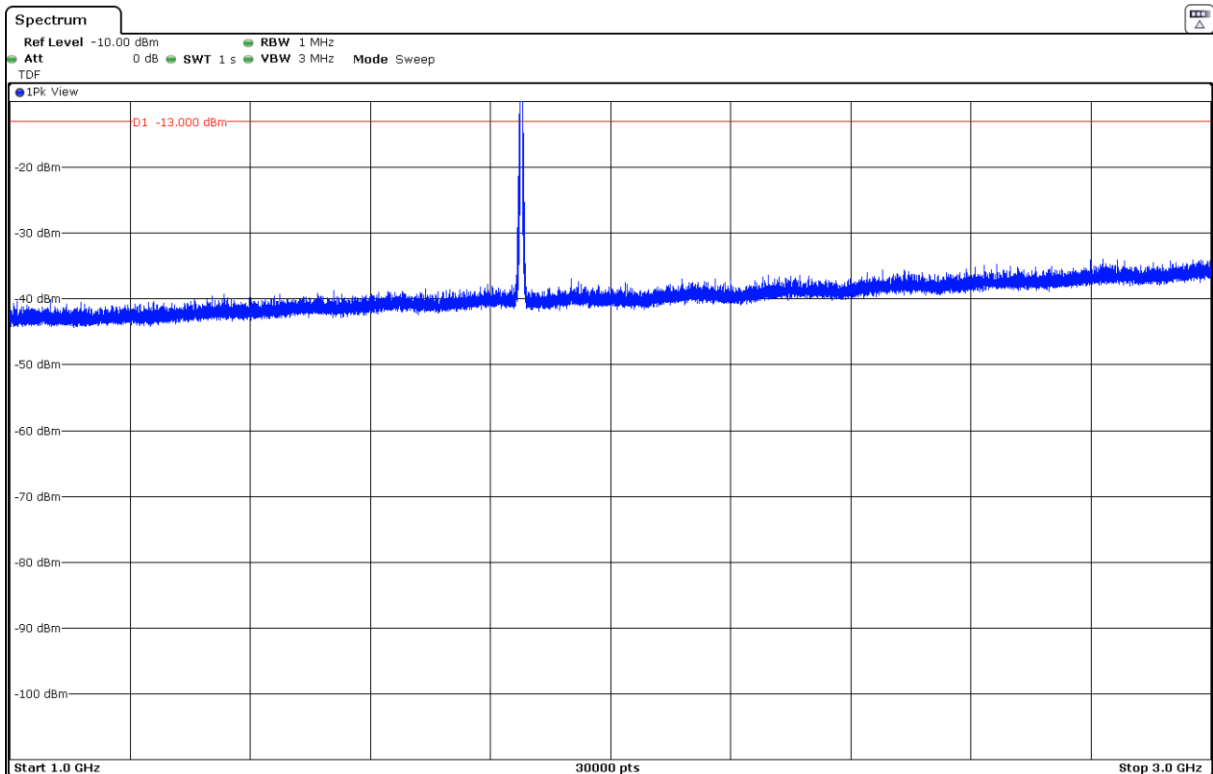


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

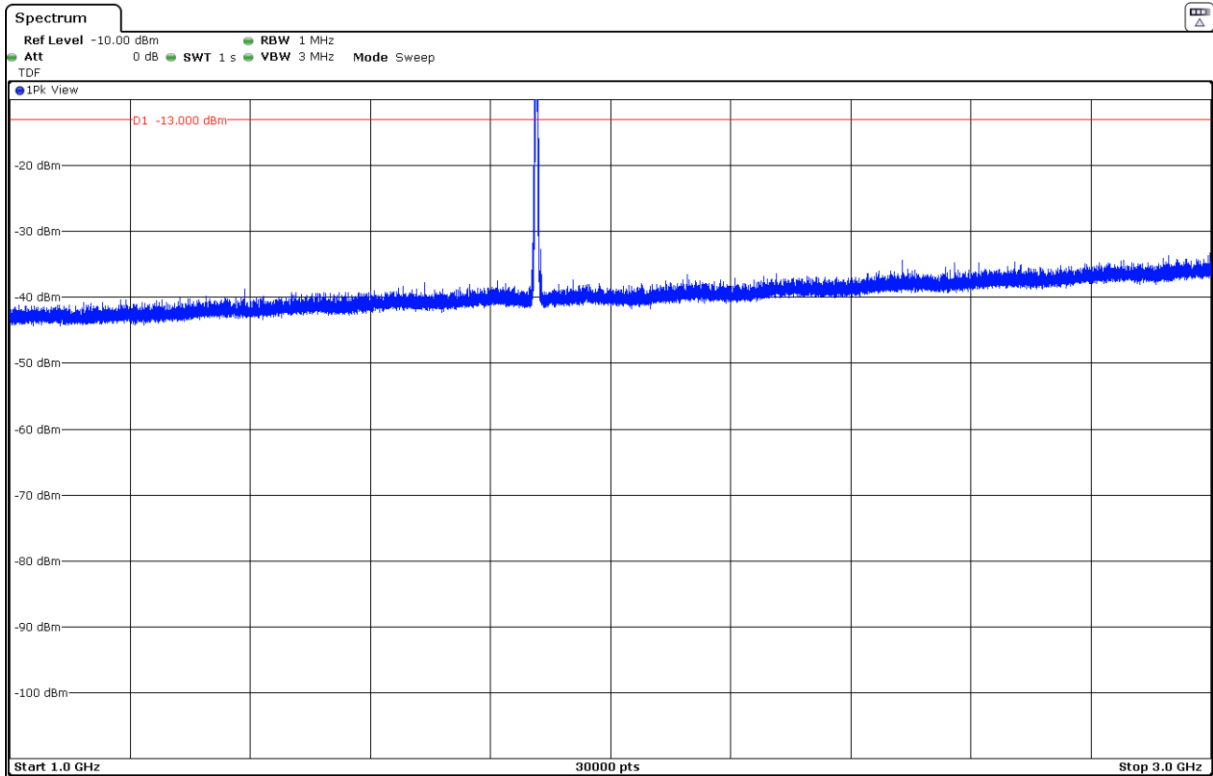

Note: The peak above the limit is the carrier frequency.


CHANNEL: HIGHEST

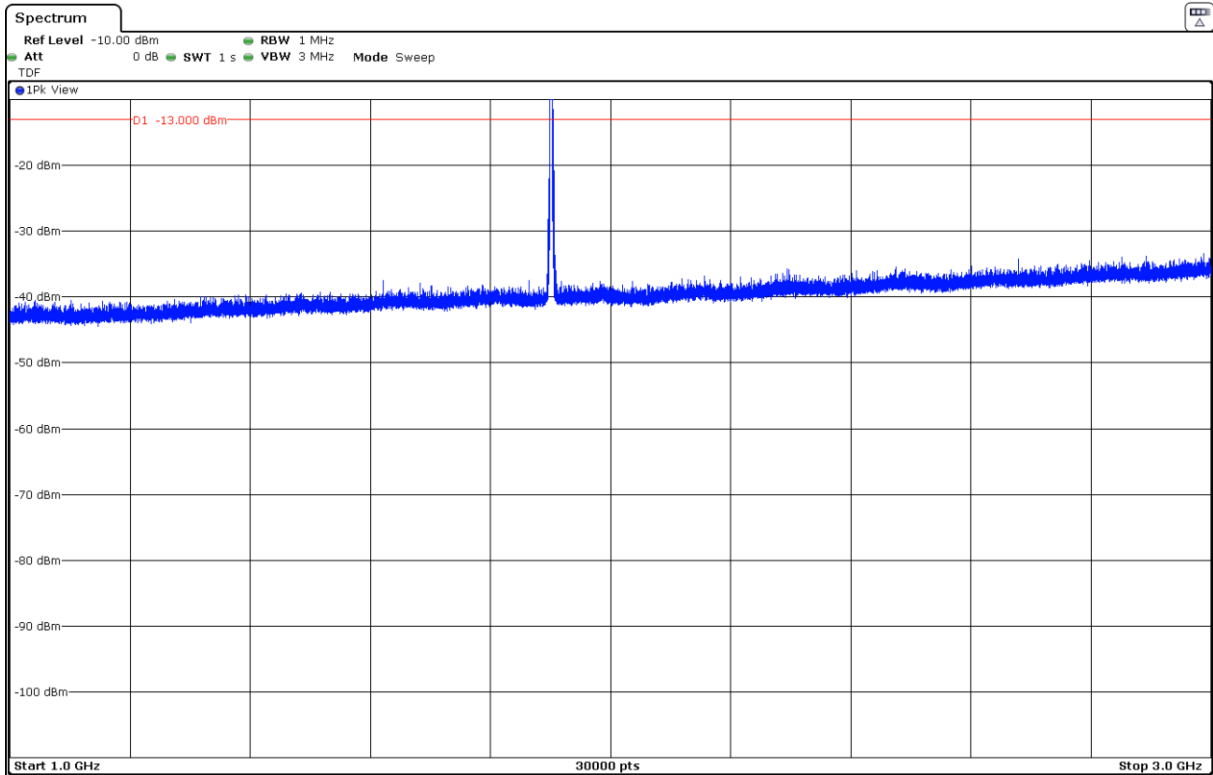


Note: The peak above the limit is the carrier frequency.

Frequency range 3 GHz to 17 GHz


CHANNEL: LOWEST

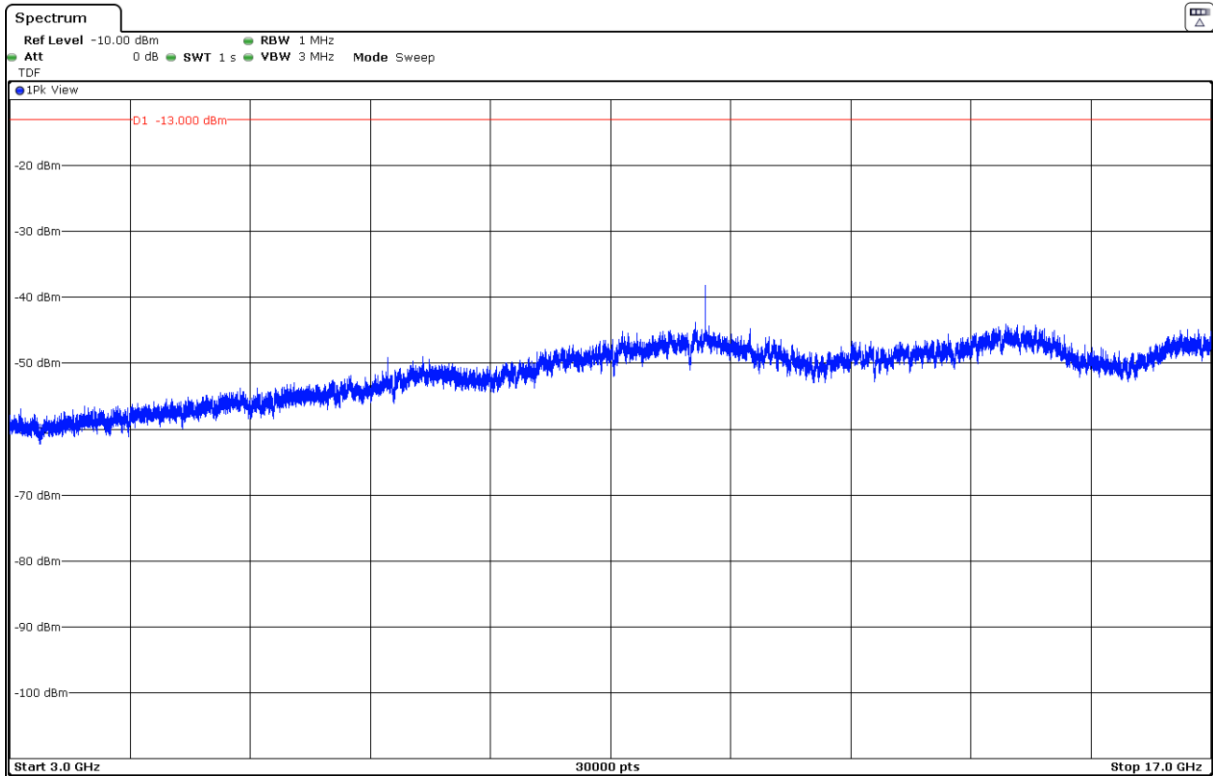


CHANNEL: MIDDLE

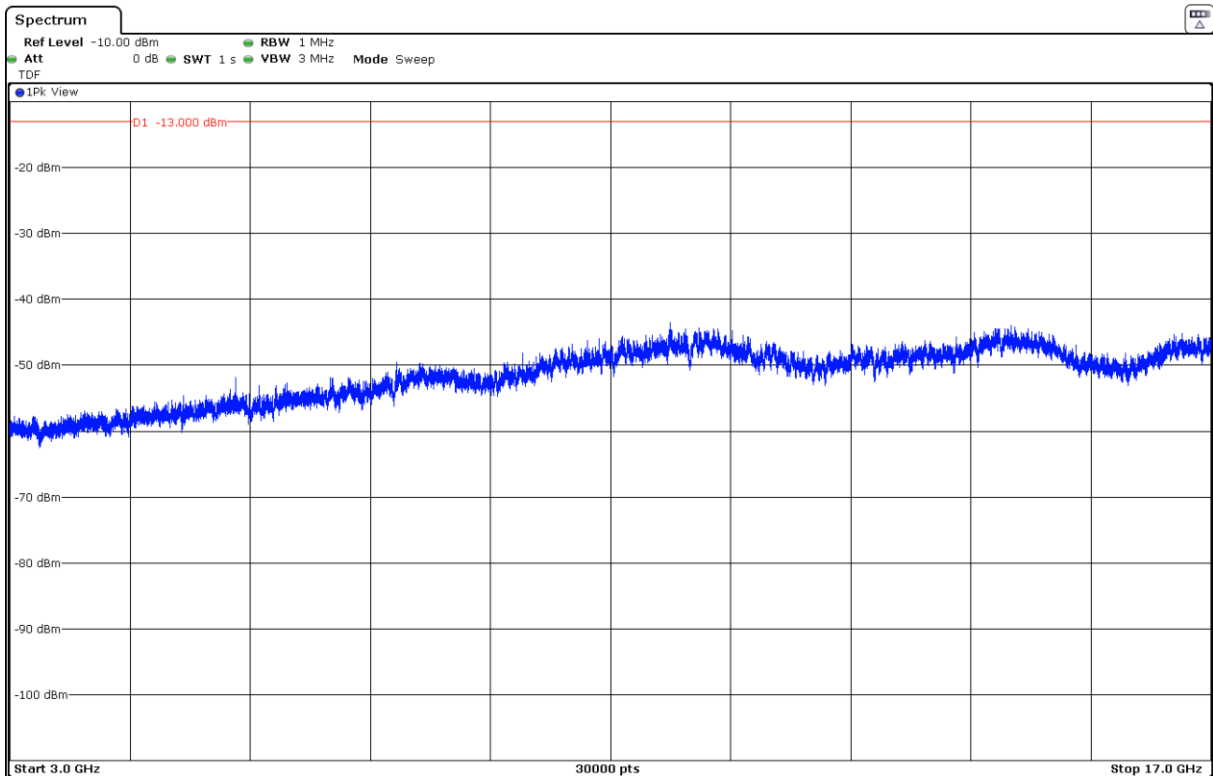

CHANNEL: HIGHEST

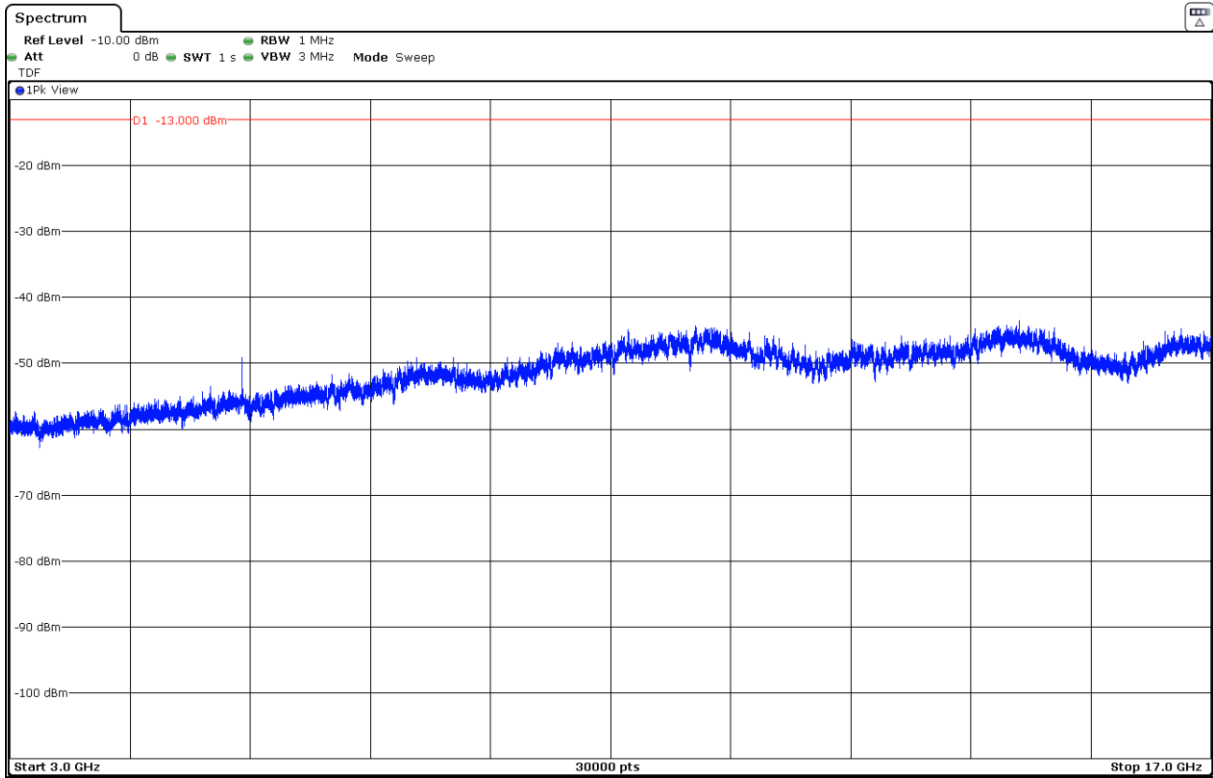

Frequency range 17 GHz to 20 GHz

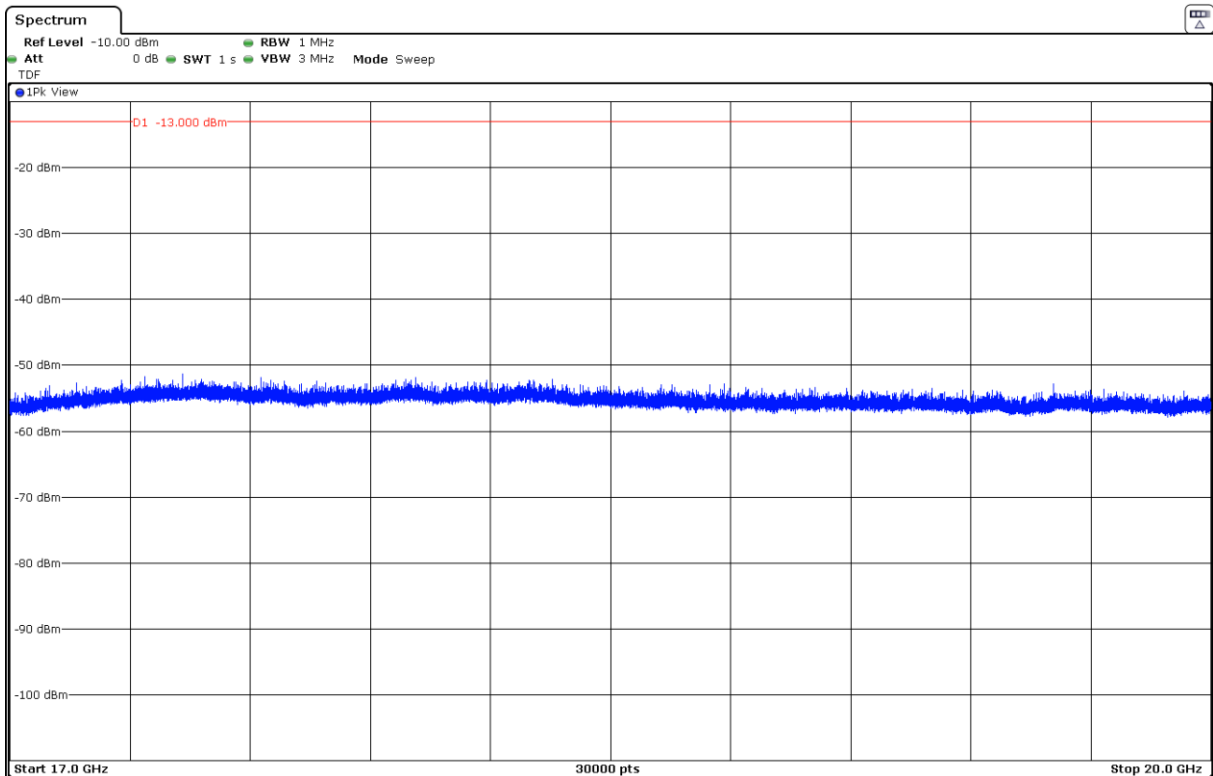

(This plot is valid for all three channels)

## **Appendix B: Test results for FCC Part 27 / RSS-139 / RSS-130**

## INDEX

TEST CONDITIONS .....	24
RF Output Power .....	26
Radiated emissions .....	30

## TEST CONDITIONS

Power supply (V):

Vnominal = 3.8 Vdc

Type of power supply = DC Voltage from external power supply

Type of antenna = Integral antenna.

Declared Gain for antenna = +2.6 dBi for Band 12 and Band 17 and +4.4 dBi for Band 66

Declared Gain for antenna = +4.4 dBi for Band 4 and +2.6 dBi for Band 13

### TEST FREQUENCIES:

#### LTE. QPSK AND 16QAM MODULATION (BAND 4)

	Channel (Frequency. MHz)					
	BW = 1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz	BW = 20 MHz
Lowest	19957 (1710.7)	19965 (1711.5)	19975 (1712.5)	20000 (1715.0)	20025 (1717.5)	20050 (1720.0)
Middle	20175 (1732.5)	20175 (1732.5)	20175 (1732.5)	20175 (1732.5)	20175 (1732.5)	20175 (1732.5)
Highest	20393 (1754.3)	20385 (1753.5)	20375 (1752.5)	20350 (1750.0)	20325 (1747.5)	20300 (1745.0)

NOTE: Band 4 is completely included in band 66, so the channels of band 66 were tested to give conformity to the assigned block.

#### LTE. QPSK AND 16QAM MODULATION (BAND 12)

	Channel (Frequency. MHz)			
	BW = 1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz
Lowest	23017 (699.7)	23025 (700.5)	23035 (701.5)	23060 (704.0)
Middle	23095 (707.5)	23095 (707.5)	23095 (707.5)	23095 (707.5)
Highest	23173 (715.3)	23165 (714.5)	23155 (713.5)	23130 (711.0)

#### LTE. QPSK AND 16QAM MODULATION (BAND 13)



	Channel (Frequency, MHz)	
	BW = 5 MHz	BW = 10 MHz
Lowest	23205 (779.5)	N/A
Middle	23230 (782.0)	23230 (782.0)
Highest	23255 (784.5)	N/A

LTE. QPSK AND 16QAM MODULATION (BAND 17)

	Channel (Frequency. MHz)	
	BW = 5 MHz	BW = 10 MHz
Lowest	23755 (706.5)	23780 (709.0)
Middle	23790 (710.0)	23790 (710.0)
Highest	23825 (713.5)	23800 (711.0)

NOTE: Band 17 is completely included in band 12, so the channels of band 12 were tested to give conformity to the assigned block.

LTE. QPSK AND 16QAM MODULATION (BAND 66)

	Channel (Frequency. MHz)					
	BW = 1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz	BW = 20 MHz
Lowest	131979 (1710.7)	131987 (1711.5)	131997 (1712.5)	132022 (1715.0)	132047 (1717.5)	132072 (1720.0)
Middle	132322 (1745.0)	132322 (1745.0)	132322 (1745.0)	132322 (1745.0)	132322 (1745.0)	132322 (1745.0)
Highest	132665 (1779.3)	132657 (1778.5)	132647 (1777.5)	132622 (1775.0)	132597 (1772.5)	132572 (1770.0)

## RF Output Power

### SPECIFICATION

FCC §27.50 (c) (10).

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

RSS-130 Clause 4.4.

The e.i.r.p. shall not exceed 50 watts (46.99 dBm) for mobile equipment or for outdoor fixed subscriber equipment nor shall it exceed 5 watts (36.99 dBm) for portable equipment or for indoor fixed subscriber equipment.

FCC §27.50 (d) (4) & (5). RSS-139 Clause 6.5.

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1 watt EIRP (30 dBm). Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

### METHOD

The conducted RF output power measurements were made at the RF output terminals of the EUT using the power meter of the Universal Radio Communication tester R&S CMW500, selecting maximum transmission power of the EUT and different modes of modulation.

The maximum equivalent isotropically radiated power (e.i.r.p.) is calculated by adding the declared maximum antenna gain (dBi).

The maximum effective radiated power e.r.p. is calculated from the maximum equivalent isotropically radiated power (e.i.r.p.) by subtracting 2.15 dB:

$$E.R.P. = E.I.R.P. - 2.15 \text{ dB}$$

### TEST SETUP

Conducted average power.



**RESULTS**

**MAXIMUM OUTPUT POWER (CONDUCTED).**

**LTE. BAND 12.**

Preliminary measurements determined the narrow band = 1 and nominal bandwidth of 3 MHz as the worst case. The results in the next tables shows the results for this configuration.

**Narrow band = 1**

BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	MODULATION	RB SIZE	RB OFFSET	AVERAGE POWER (dBm)	Maximum effective radiated power E.I.R.P. (dBm)	Maximum effective radiated power E.R.P. (dBm)
3	23025	700.5	QPSK	1	2	22.84	25.44	23.29
			16-QAM	1	2	21.90	24.30	22.15
	23095	707.5	QPSK	1	2	22.88	25.48	23.33
			16-QAM	1	2	21.92	24.52	22.37
	23165	714.5	QPSK	1	2	22.76	25.36	23.21
			16-QAM	1	2	21.84	24.44	22.29

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

Verdict: PASS

**GEN2 AND GEN1 OUTPUT POWER COMPARISON (CONDUCTED).**

**LTE. BAND 12.**

The results in the next table shows the maximum difference between GEN2 and GEN1 devices for conducted output power measurements.

<b>Maximum conducted output power difference between GEN2 and GEN1 (dB)</b>	0.50
---	------

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

LTE. BAND 13.

Preliminary measurements determined the narrow band = 1 and nominal bandwidth of 10 MHz as the worst case. The results in the next tables shows the results for this configuration.

Narrow band = 1

BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	MODULATION	RB SIZE	RB OFFSET	AVERAGE POWER (dBm)
10	23230	782	QPSK	1	2	23.02
			16-QAM	1	2	22.90

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

Verdict: PASS

GEN2 AND GEN1 OUTPUT POWER COMPARISON (CONDUCTED).

LTE. BAND 13.

The results in the next table shows the maximum difference between GEN2 and GEN1 devices for conducted output power measurements.

<b>Maximum conducted output power difference between GEN2 and GEN1 (dB)</b>	0.40
---	------

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

LTE. BAND 66.

Preliminary measurements determined the narrow band = 1 and nominal bandwidth of 20 MHz as the worst case. The results in the next tables shows the results for this configuration.

Narrow band = 1

BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	MODULATION	RB SIZE	RB OFFSET	AVERAGE POWER (dBm)	Maximum effective radiated power E.I.R.P. (dBm)	Maximum effective radiated power E.R.P. (dBm)
20	132072	1720	QPSK	1	2	23.26	27.66	25.51
			16-QAM	1	2	22.80	27.20	25.05
	132322	1745	QPSK	1	2	23.30	27.70	25.55
			16-QAM	1	2	22.81	27.72	25.06
	132572	1770	QPSK	1	2	23.29	27.69	25.54
			16-QAM	1	2	22.79	27.19	25.04

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

Verdict: PASS

LTE. BAND 66.

The results in the next table shows the maximum difference between GEN2 and GEN1 devices for conducted output power measurements.

<b>Maximum conducted output power difference between GEN2 and GEN1 (dB)</b>	0.50
---	------

Measurement uncertainty (dB)	<±1.58
------------------------------	--------

## Radiated emissions

### SPECIFICATION

LTE BAND 12.

FCC §27.53 (g).

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed

RSS-130 Clause 4.6.

The power of any unwanted emissions in any 100 kHz bandwidth on any frequency outside the frequency range(s) within which the equipment is designed to operate shall be attenuated below the transmitter power, P (dBW), by at least  $43 + 10 \log_{10} p$  (watts), dB.

LTE Band 13.

FCC §27.53 (f)(g):

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

RSS-130 Issue 1 Clause 4.6.:

The power of any unwanted emissions in any 100 kHz bandwidth on any frequency outside the frequency range(s) within which the equipment is designed to operate shall be attenuated below the transmitter power, P (dBW), by at least  $43 + 10 \log_{10} p$  (watts), dB. However, in the 100 kHz band immediately outside the equipment's operating frequency range, a resolution bandwidth of 30 kHz may be employed.

In addition to the limit outlined in Section 4.6.1 above, equipment operating in the frequency bands 746-756 MHz and 777-787 MHz shall also comply with the following restrictions:

(a) The power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:

- (i)  $76 + 10 \log_{10} p$ (watts), dB, for base and fixed equipment, and
- (ii)  $65 + 10 \log_{10} p$ (watts), dB, for mobile and portable equipment.

(b) The e.i.r.p. in the band 1559-1610 MHz shall not exceed  $-70$  dBW/MHz for wideband signal and  $-80$  dBW for discrete emission with bandwidth less than 700 Hz.

LTE BAND 66.  
FCC §27.53 (h). RSS-139 Clause 6.6.

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. P in watts.

At  $P_o$  transmitting power, the specified minimum attenuation becomes  $43+10 \log (P_o)$ , and the level in dBm relative  $P_o$  becomes:  
 $P_o$  (dBm) –  $[43 + 10 \log (P_o \text{ in mwatts}) - 30] = -13$  dBm.

## METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 1 GHz and at 1 m distance for measurements above 1 GHz.


Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum field strength (dB $\mu$ V/m) is measured and recorded.

The maximum field strength (dB $\mu$ V/m) of each detected emission at less than 20 dB respect to the limit is converted to an equivalent EIRP level (dBm) according to ANSI C63.26 with the formula:


$EIRP$  (dBm) =  $E$  (dB $\mu$ V/m) +  $20\log(D)$  - 104.8; where D is the measurement distance (in the far field region) in m. D = 3 m

## TEST SETUP

Radiated measurements below 1 GHz.

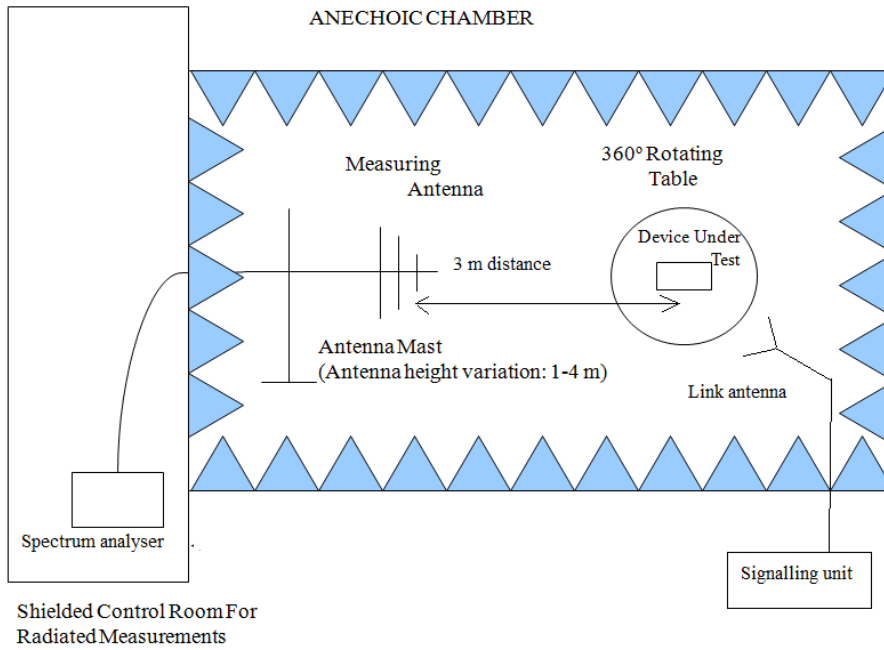

Radiated measurements above 1 GHz.

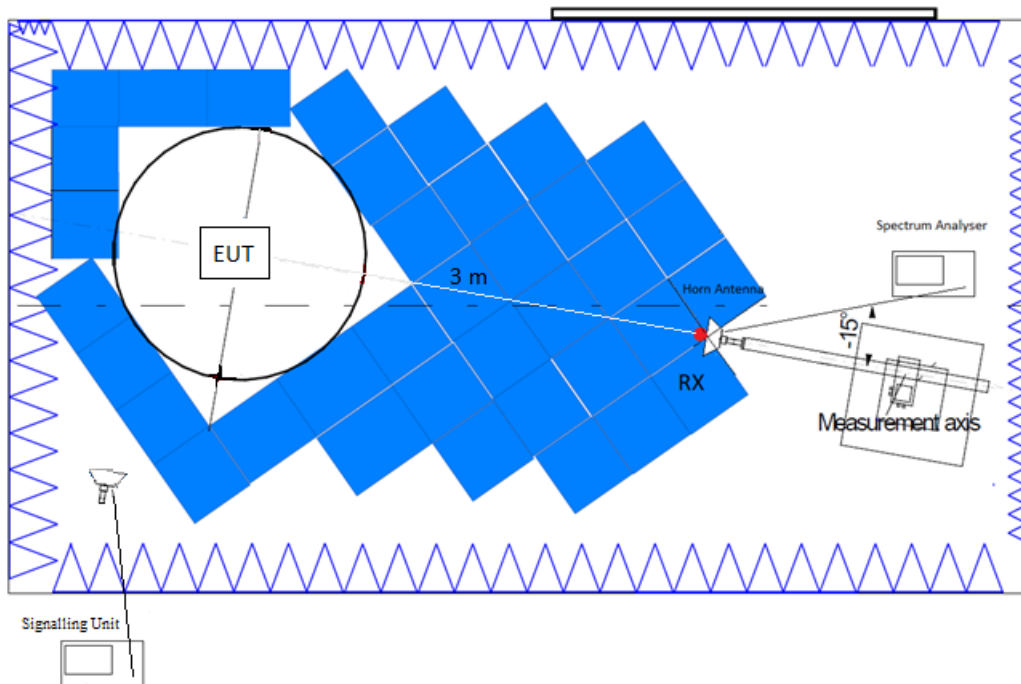



## RESULTS

### LTE. BAND 12.

A preliminary scan determined the QPSK 3 MHz bandwidth, Narrow band =2, RB = 1, as the worst case.  
The following tables and plots show the results for this configuration.

#### 1. CHANNEL: LOWEST

##### **Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

##### **Frequency range 1 GHz-8 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

#### 2. CHANNEL: MIDDLE

##### **Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected.

##### **Frequency range 1 GHz-8 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

#### 3. CHANNEL: HIGHEST

##### **Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected.

##### **Frequency range 1 GHz-8 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

Measurement uncertainty (dB)	<±4.65 for f < 1GHz <±4.98 for f ≥ 1 GHz up to 8 GHz
------------------------------	---

Verdict: PASS

### LTE. BAND 13.

A preliminary scan determined the QPSK 10 MHz bandwidth, Narrow band =2, RB = 1, as the worst case.  
The following tables and plots show the results for this configuration.

#### 1. CHANNEL: LOWEST

##### **Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

##### **Frequency range 1 GHz-8 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

##### **Frequency range 1559 MHz-1610 MHz. RBW = 1 MHz**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

#### 2. CHANNEL: MIDDLE

##### **Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected.

##### **Frequency range 1 GHz-8 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

3. CHANNEL: HIGHEST

**Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected.

**Frequency range 1 GHz-8 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

Measurement uncertainty (dB)	<±4.65 for $f < 1\text{GHz}$ <±4.98 for $f \geq 1\text{GHz}$ up to 8 GHz
------------------------------	---

Verdict: PASS

LTE. BAND 66.

A preliminary scan determined the QPSK 20 MHz bandwidth, Narrow band =2, RB = 1, as the worst case.

The following tables and plots show the results for this configuration.

1. CHANNEL: LOWEST

**Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

**Frequency range 1 GHz-18 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

2. CHANNEL: MIDDLE

**Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

**Frequency range 1 GHz-18 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

3. CHANNEL: HIGHEST

**Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

**Frequency range 1 GHz-18 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.


Measurement uncertainty (dB)	<±4.65 for $f < 1\text{GHz}$ <±3.98 for $f \geq 1\text{GHz}$ up to 3 GHz <±4.98 for $f \geq 3\text{GHz}$ up to 18 GHz
------------------------------	---

Verdict: PASS

### LTE Band 12


FREQUENCY RANGE 30 MHz-1000 MHz.

CHANNEL: LOWEST

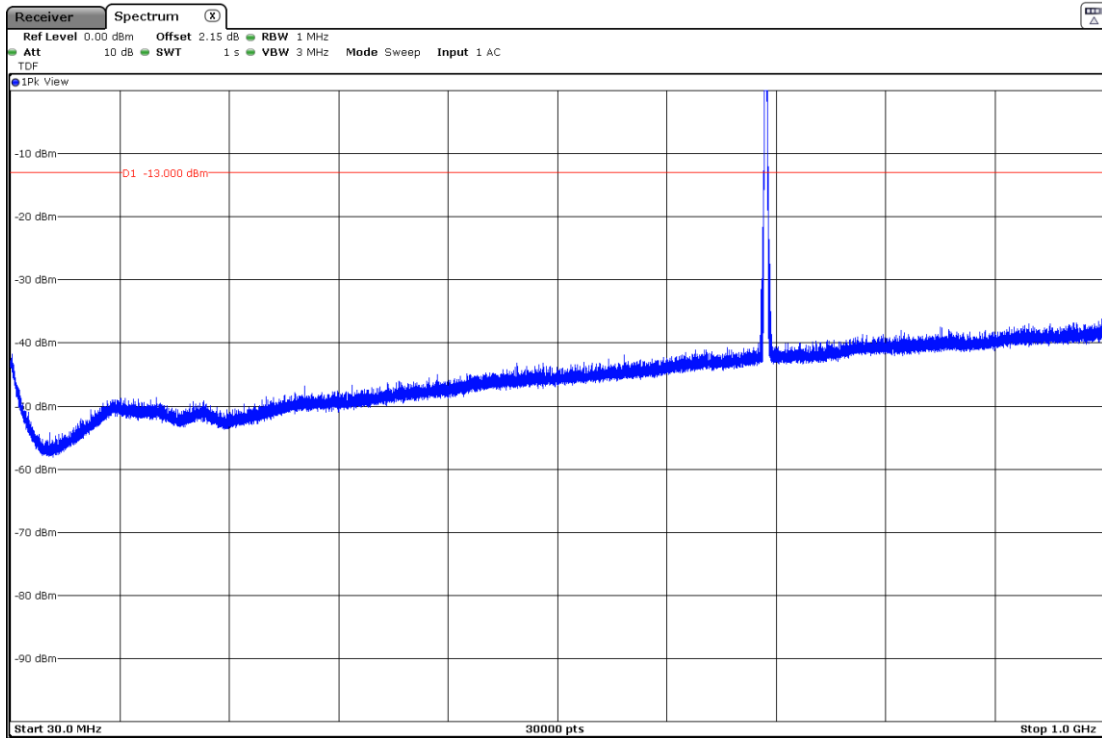


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

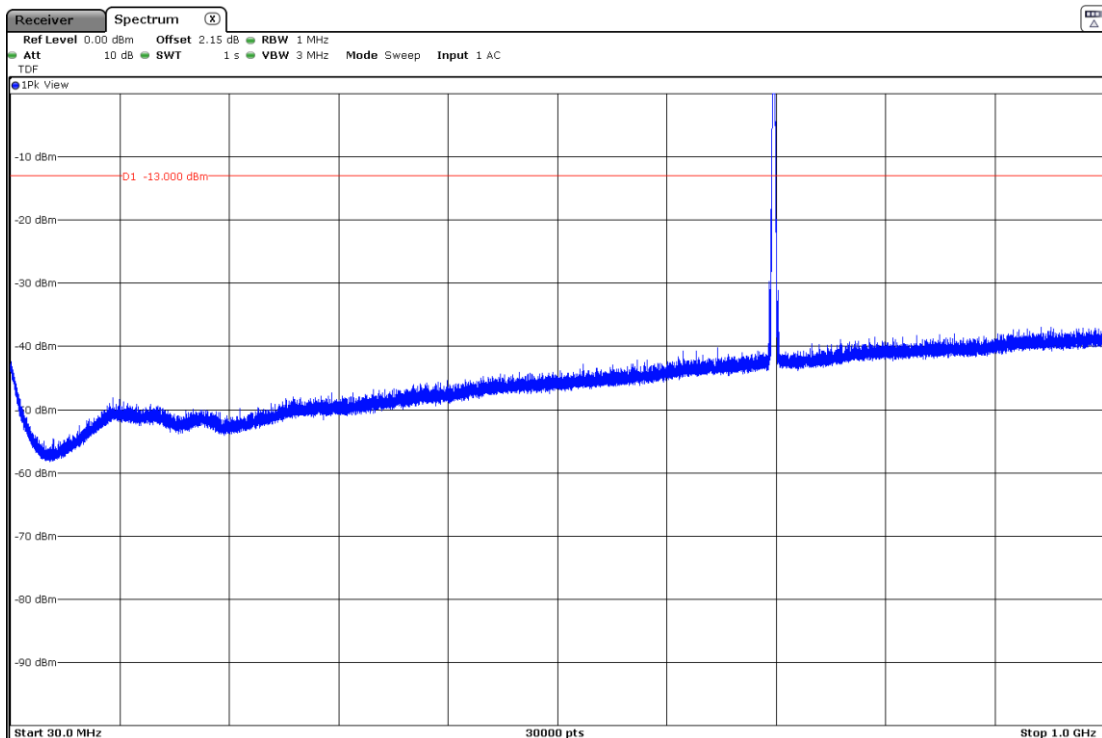

Note: The peak above the limit is the carrier frequency.


CHANNEL: HIGHEST

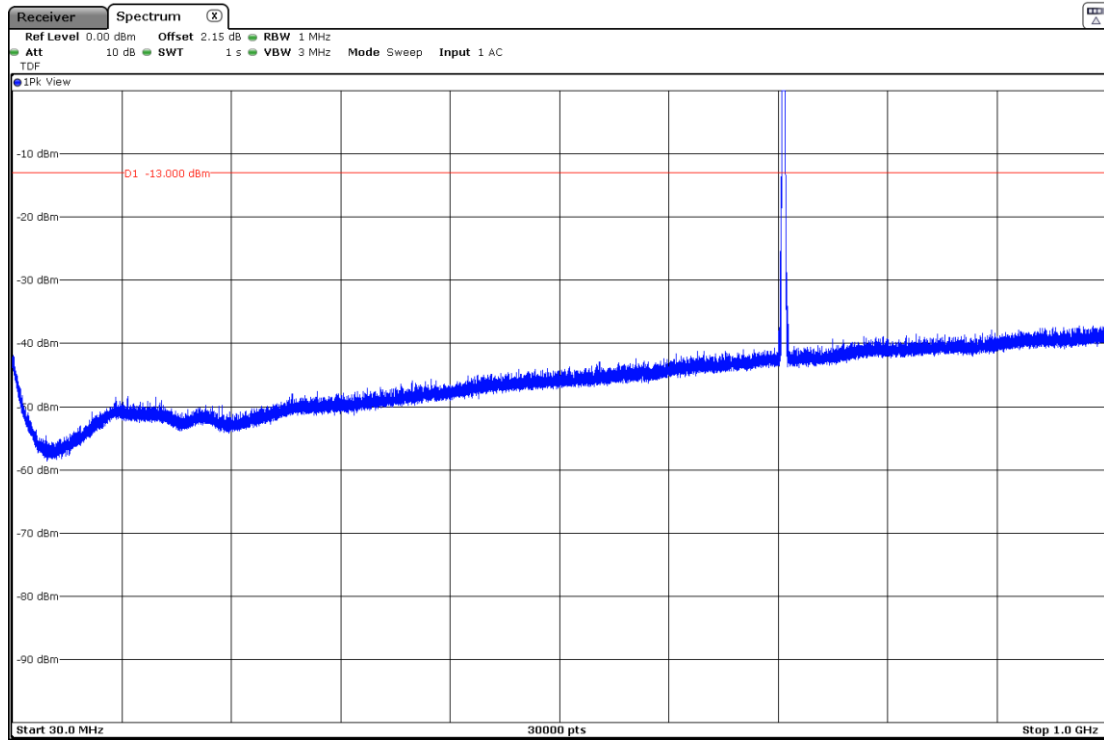


Note: The peak above the limit is the carrier frequency.

Frequency range 1 GHz to 3 GHz.


CHANNEL: LOWEST

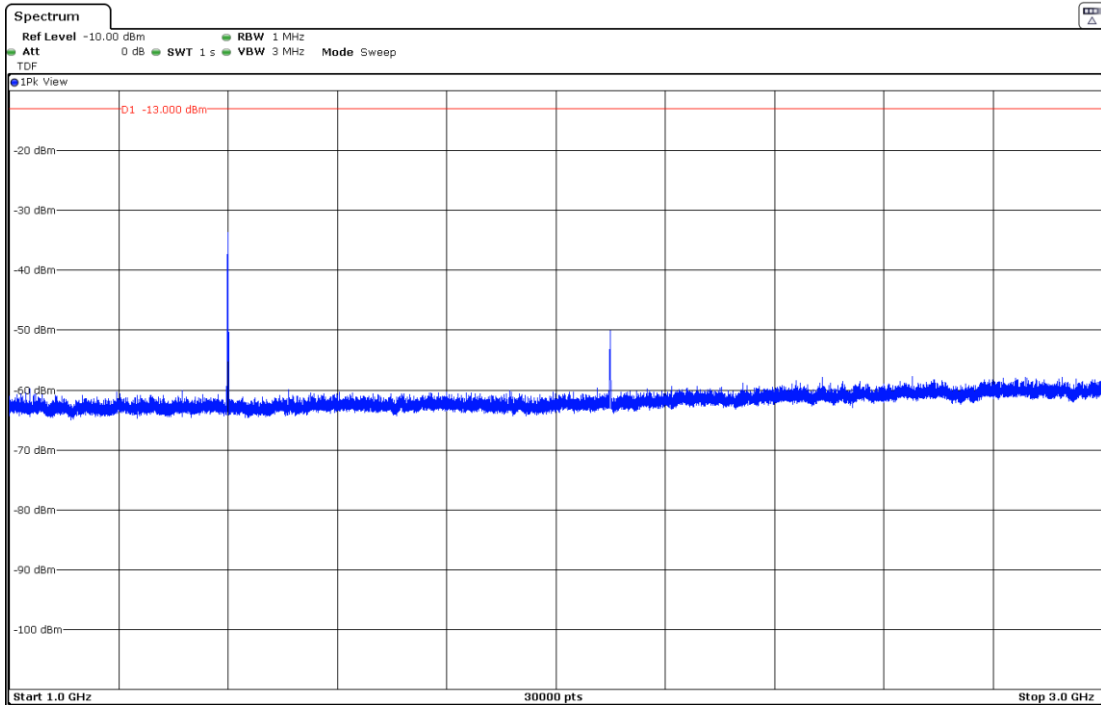

CHANNEL: MIDDLE

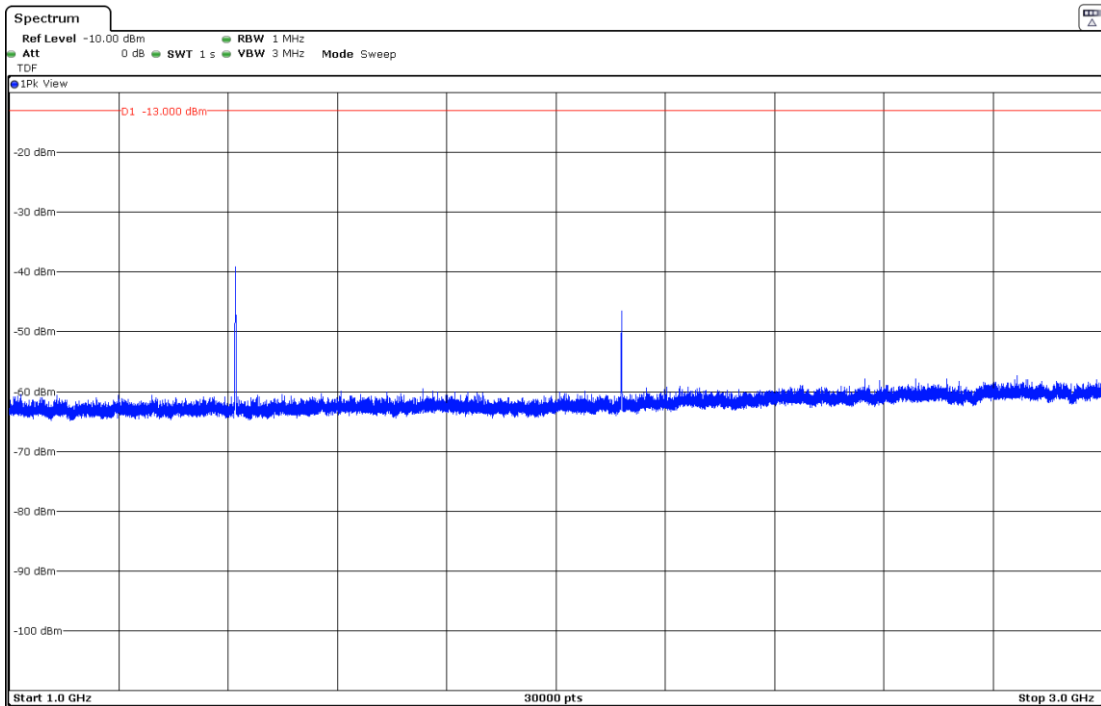


CHANNEL: HIGHEST

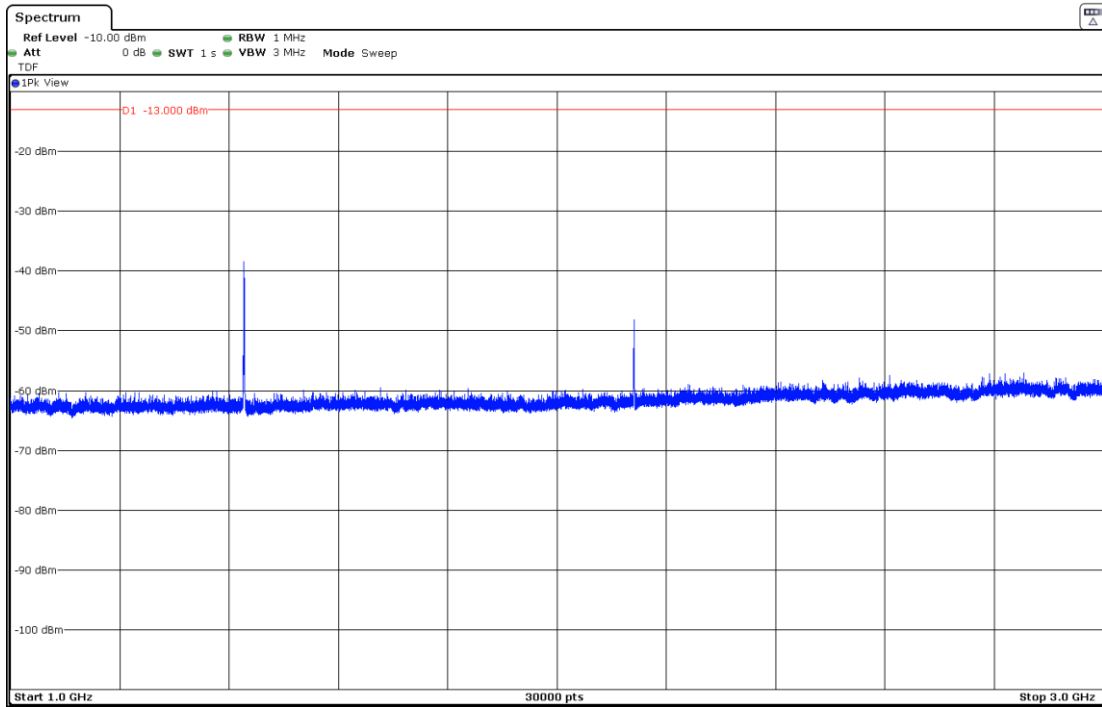


Frequency range 3 GHz to 8 GHz


CHANNEL: LOWEST

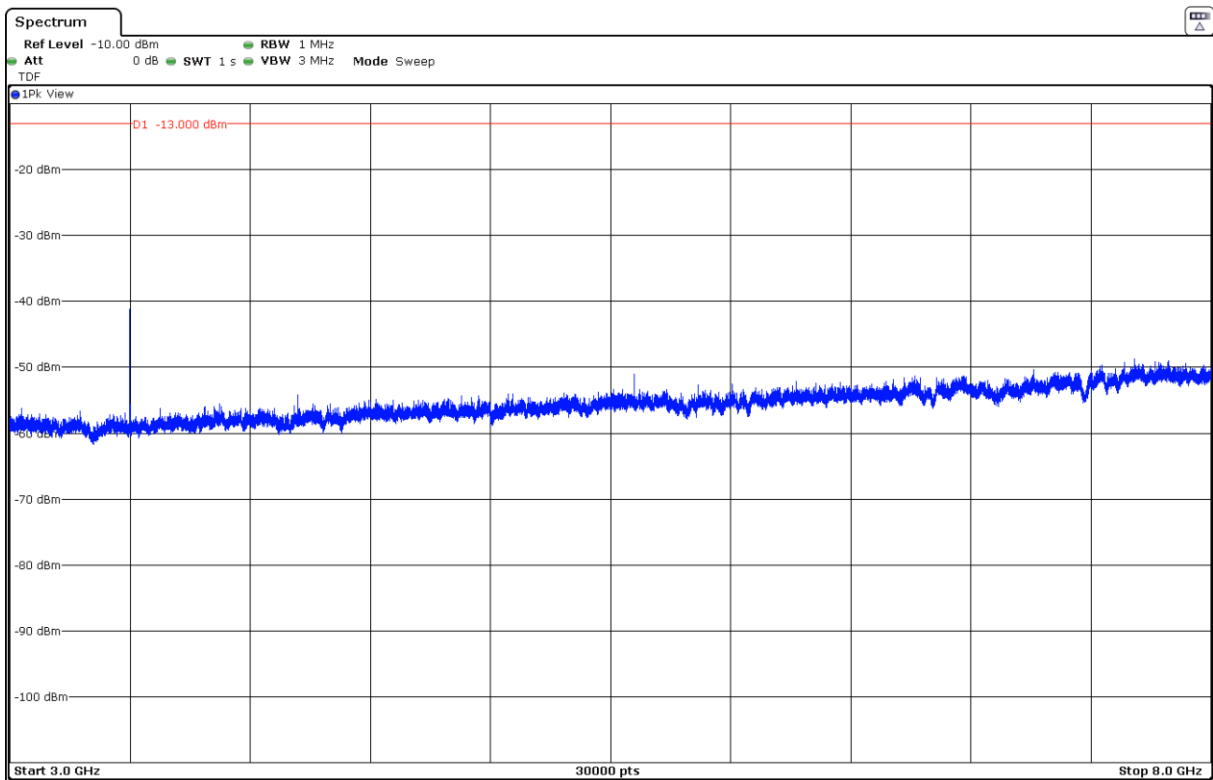

CHANNEL: MIDDLE

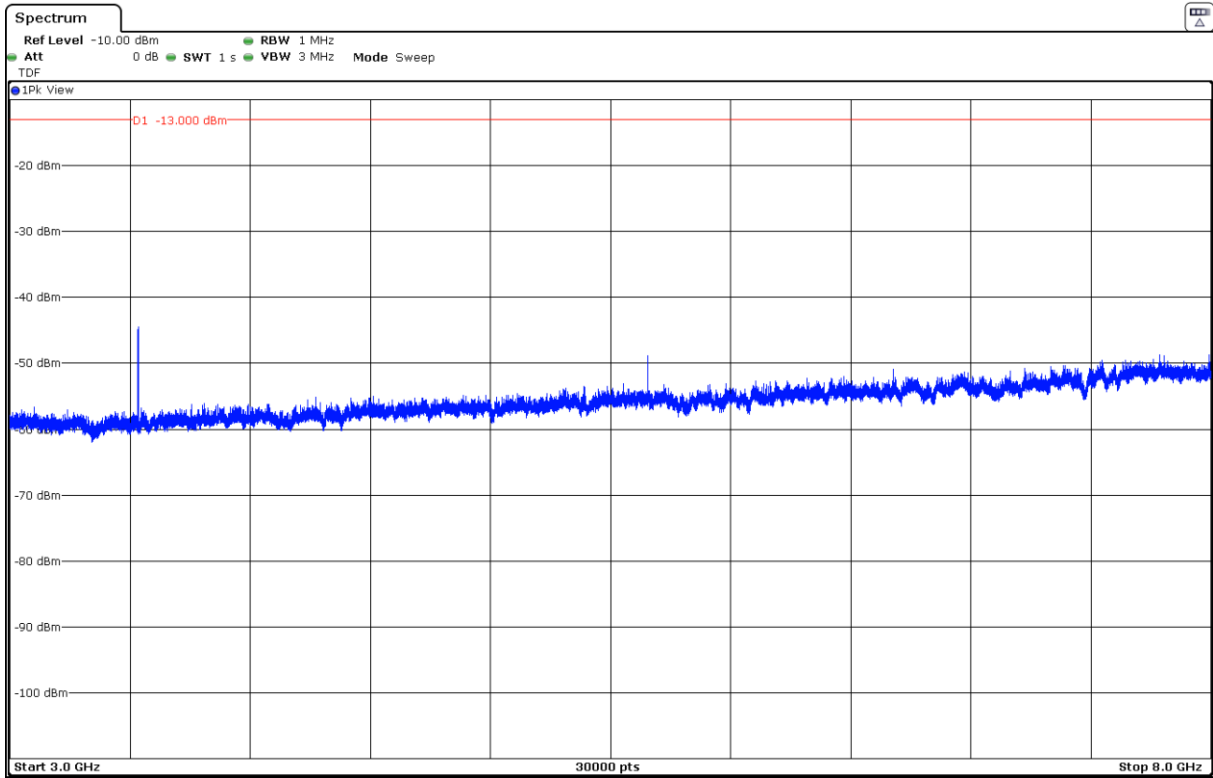


CHANNEL: HIGHEST

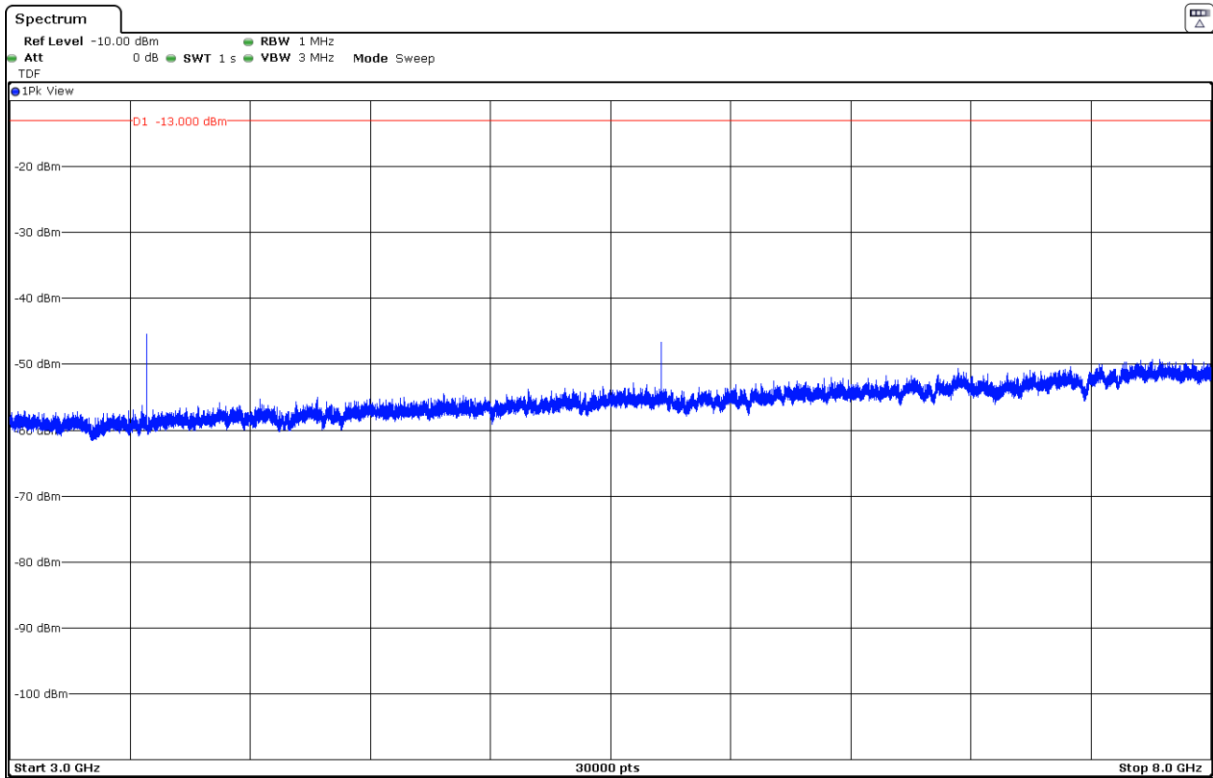

### LTE Band 13

FREQUENCY RANGE 30 MHz-1000 MHz.


CHANNEL: MIDDLE

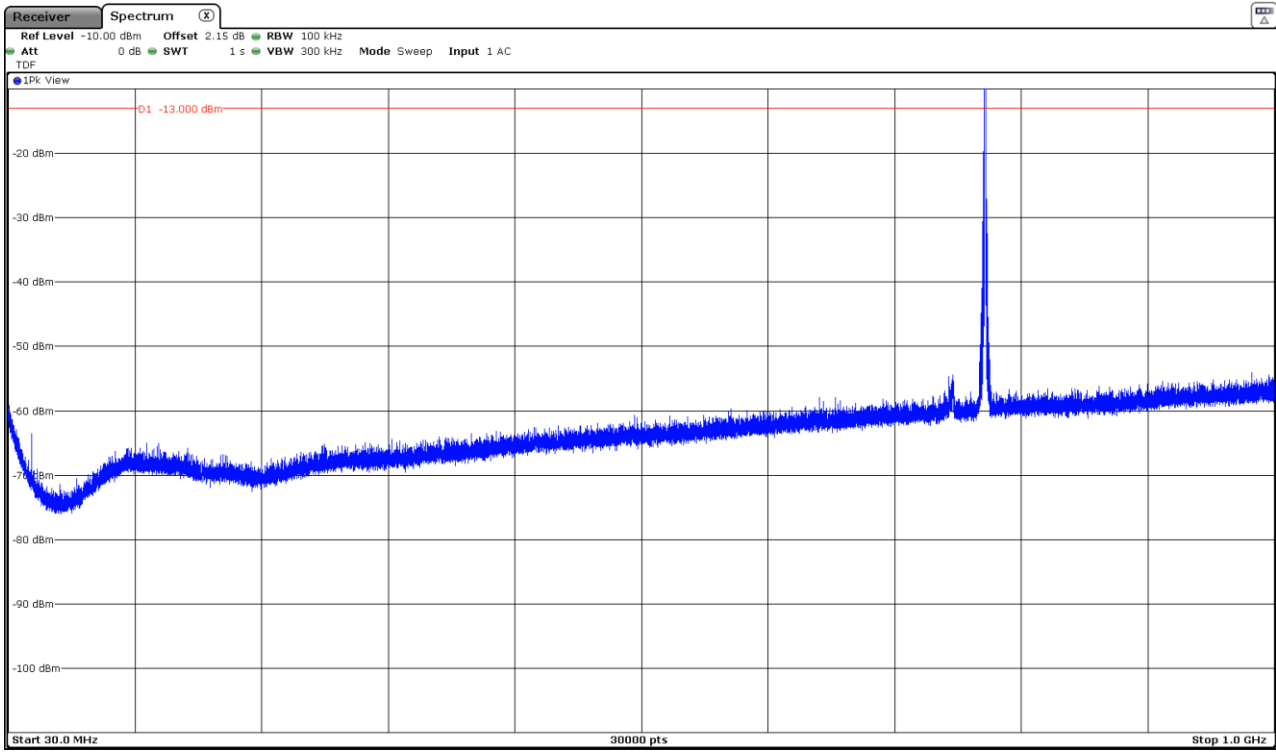

Note: The peak above the limit is the carrier frequency.

Frequency range 1 GHz to 3 GHz.


CHANNEL: MIDDLE

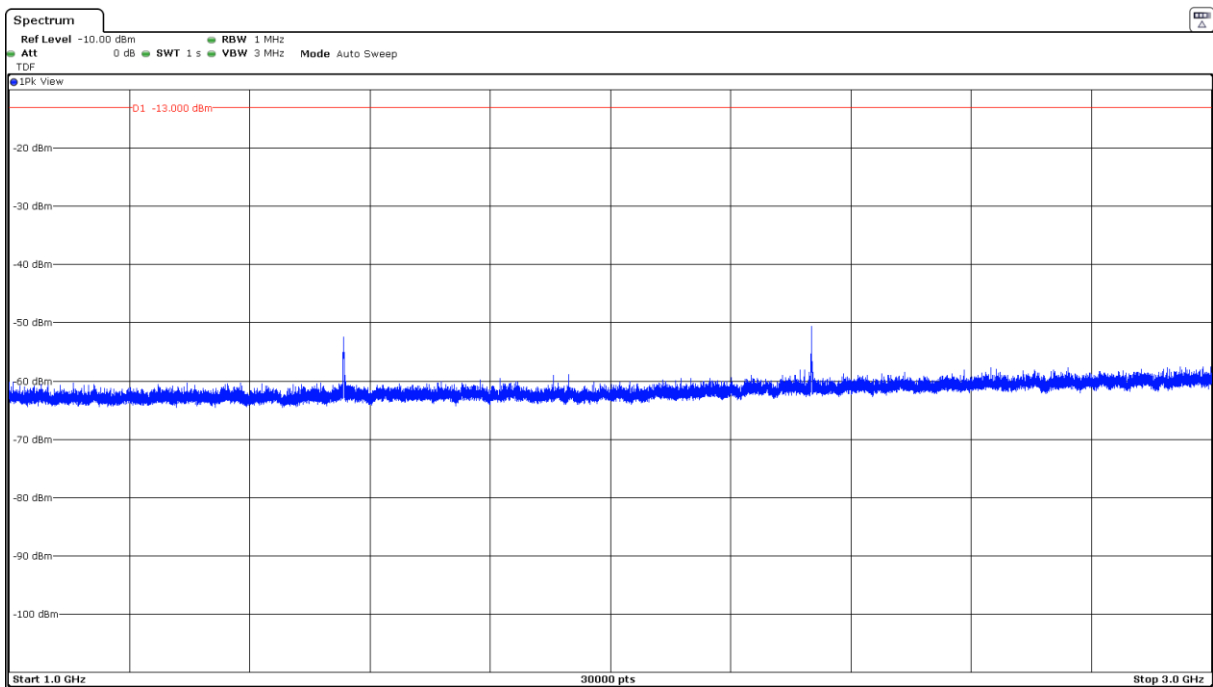




LTE Band XIII. Frequency range 1559 MHz to 1610 MHz.

CHANNEL: MIDDLE

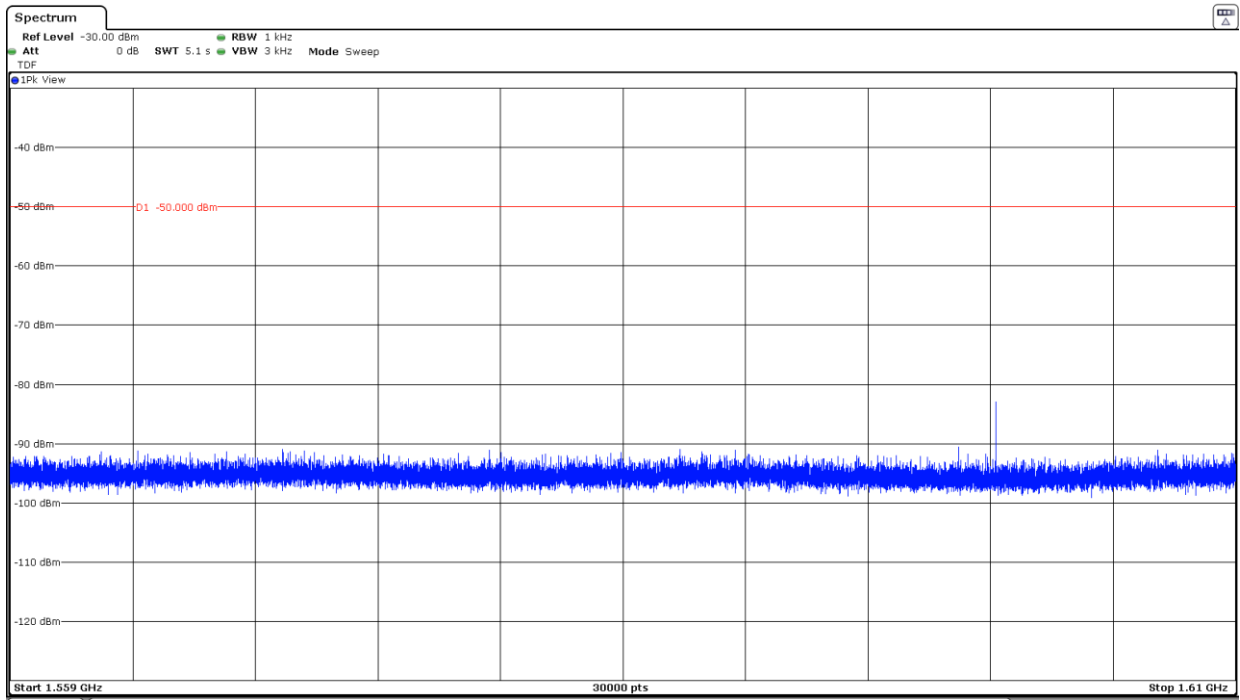


Frequency range 3 GHz to 8 GHz

CHANNEL: MIDDLE

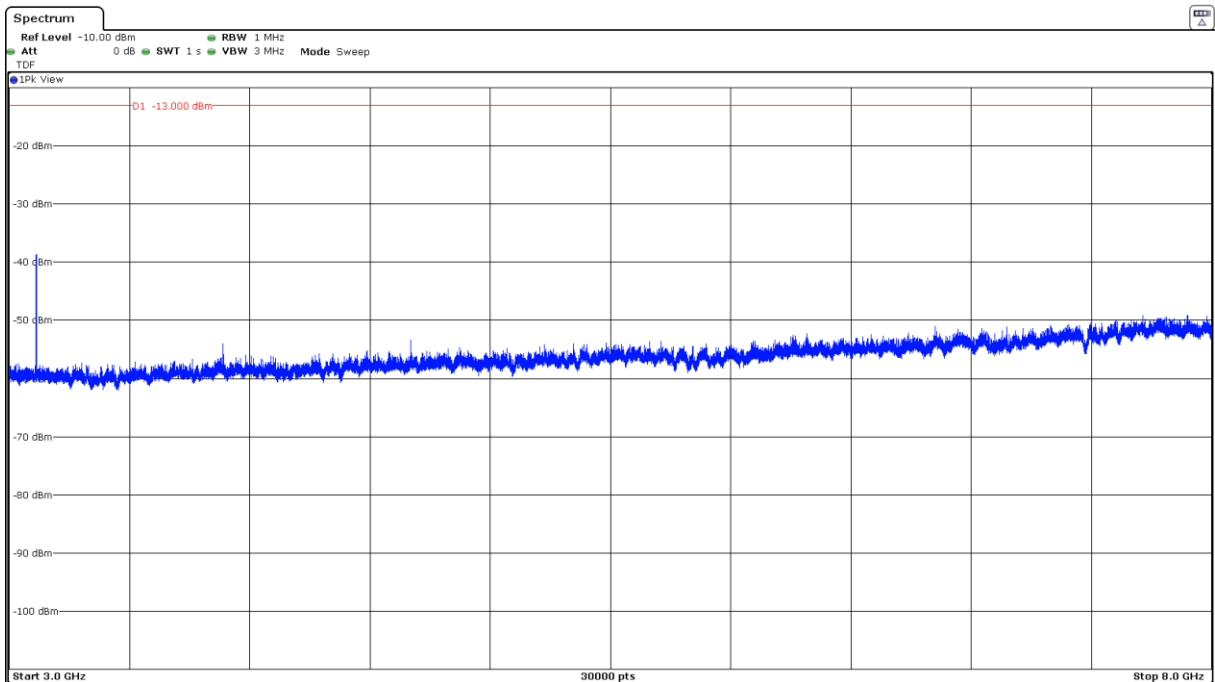

### LTE Band 66


### FREQUENCY RANGE 30 MHz-1000 MHz.

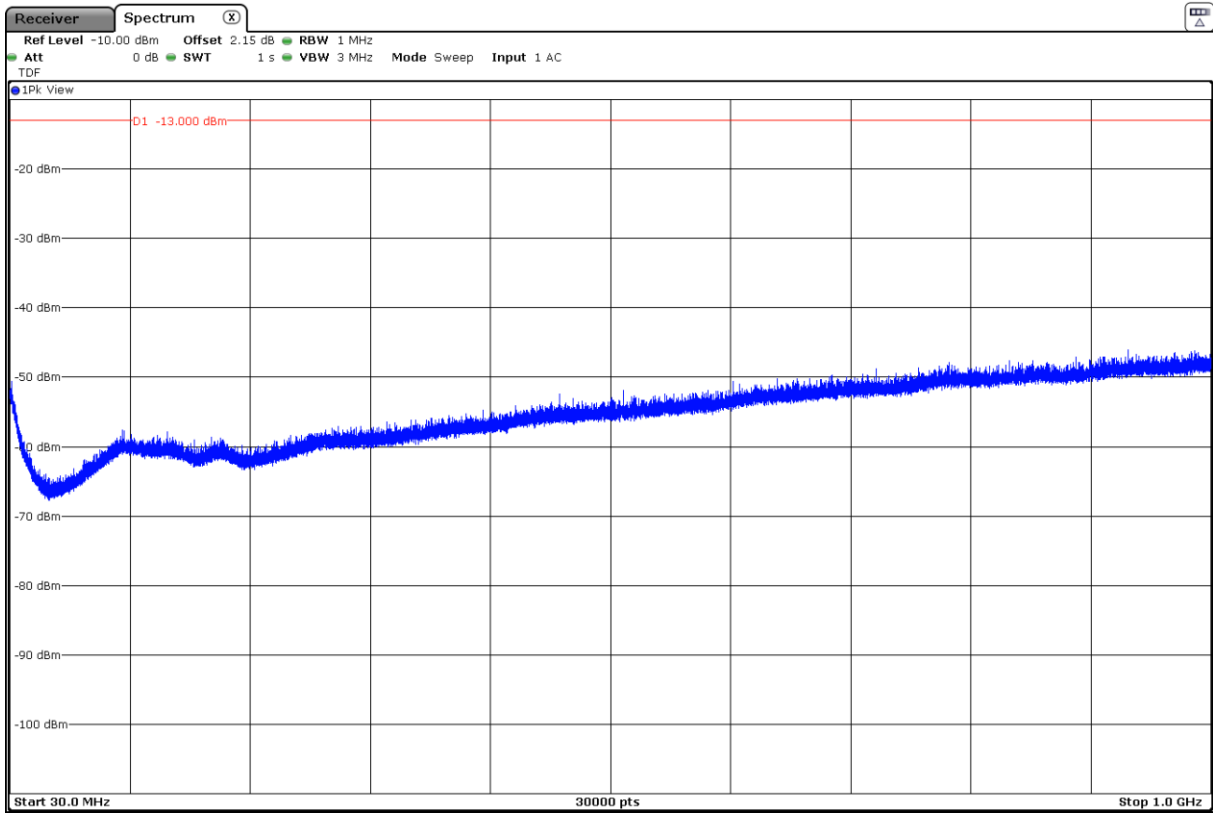

(This plot is valid for all three channels)


### Frequency range 1 GHz to 3 GHz.

### CHANNEL: LOWEST

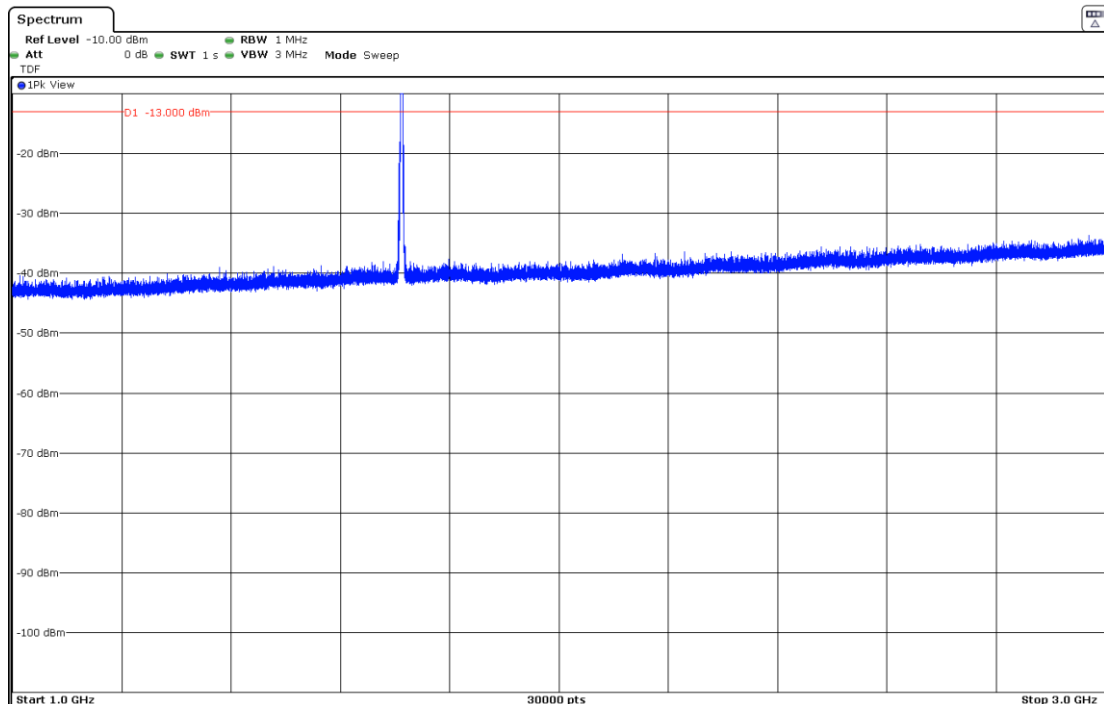


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

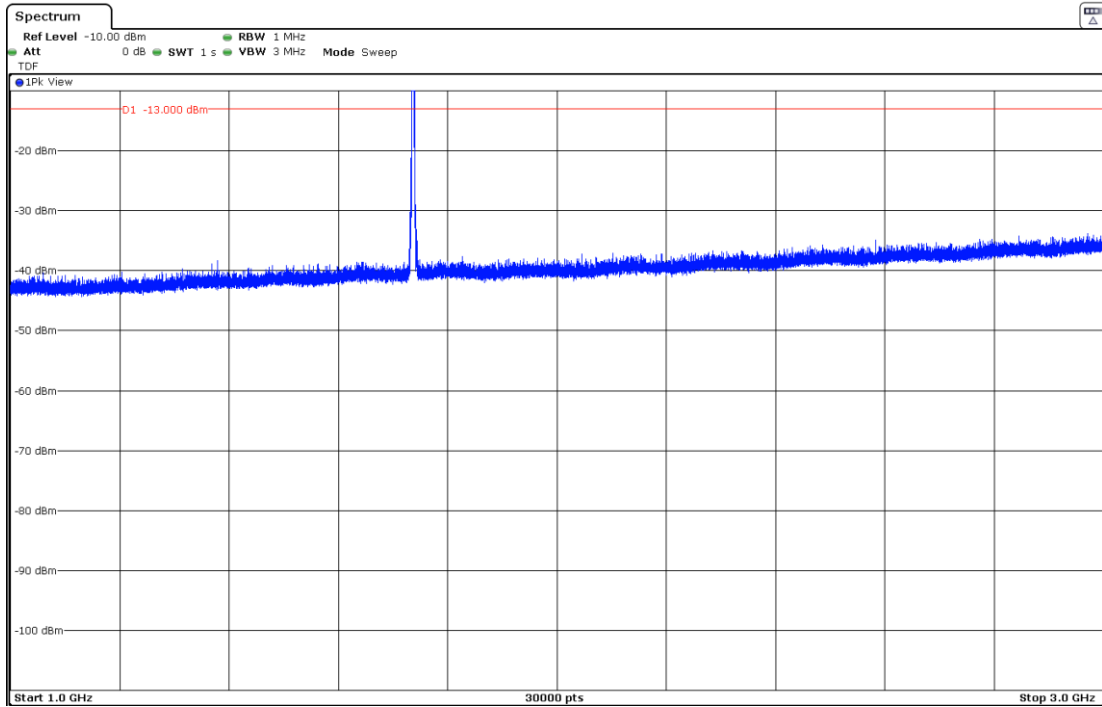

Note: The peak above the limit is the carrier frequency.


CHANNEL: HIGHEST

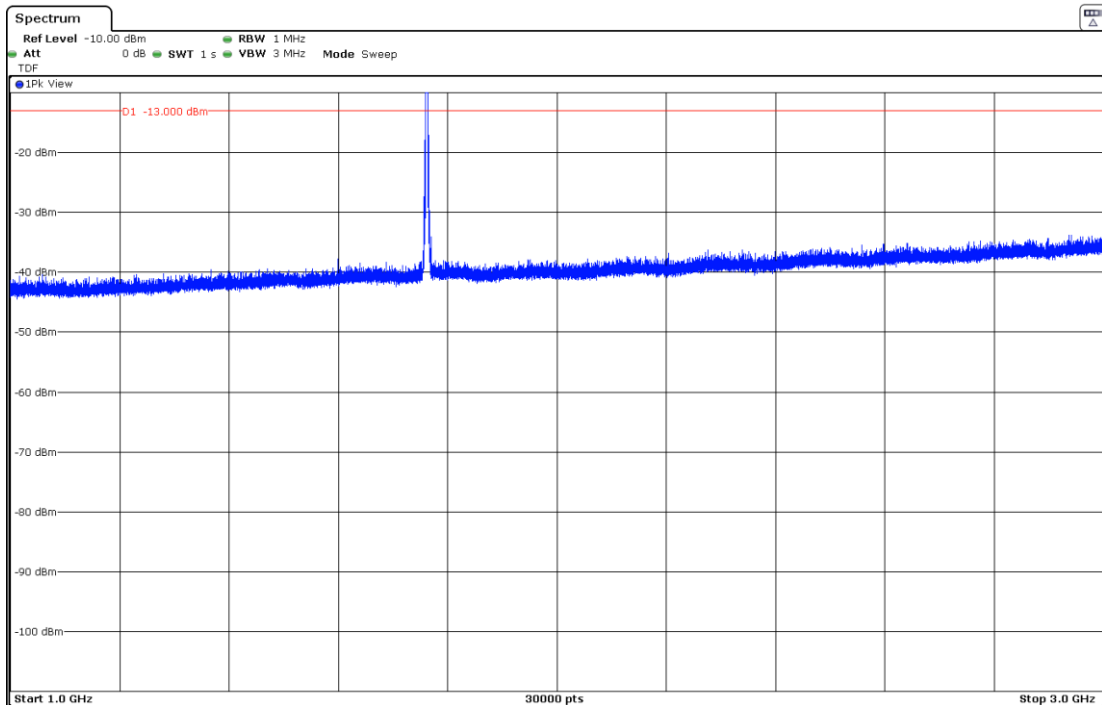


Note: The peak above the limit is the carrier frequency.

Frequency range 3 GHz to 18 GHz

CHANNEL: LOWEST

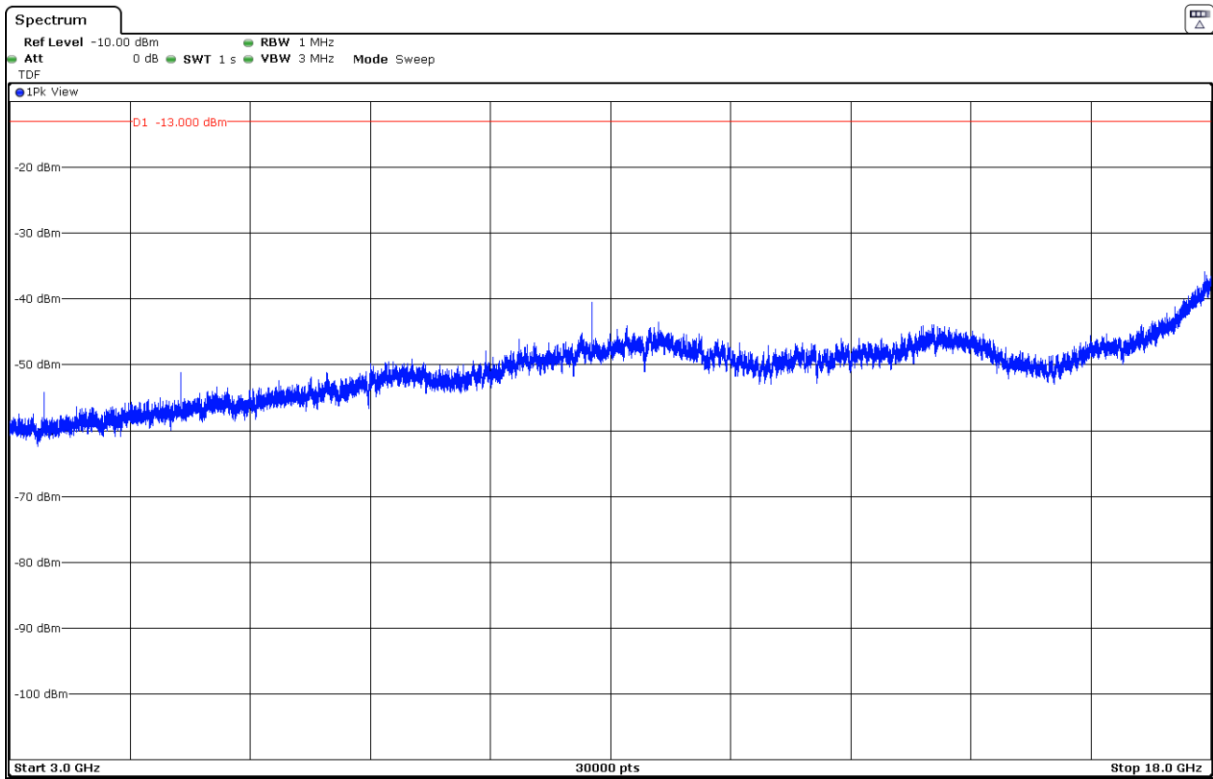

CHANNEL: MIDDLE

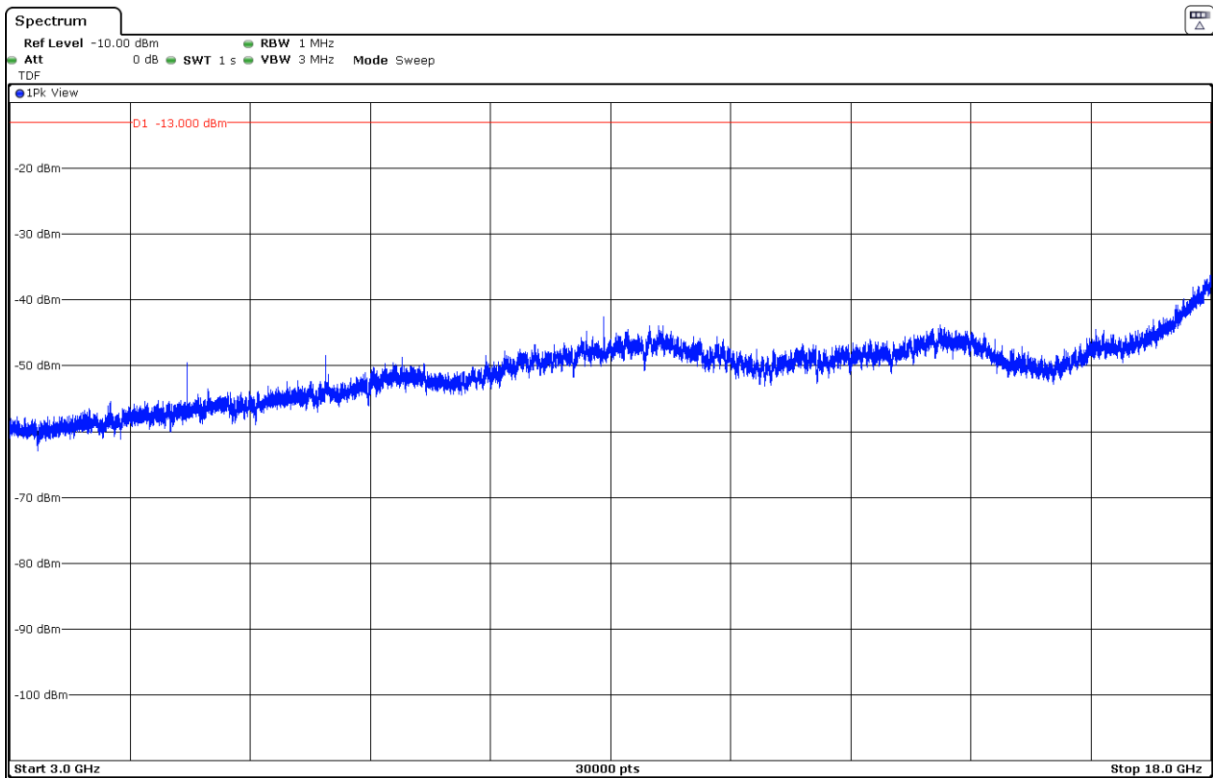

CHANNEL: HIGHEST

