




# TEST REPORT

<b>FCC ID</b> ..... :	2AHZ5TKK	
<b>Test Report No</b> ..... :	TCT230327E042	
<b>Date of issue</b> ..... :	May 09, 2023	
<b>Testing laboratory</b> .....	SHENZHEN TONGCE TESTING LAB	
<b>Testing location/ address:</b>	2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
<b>Applicant's name</b> ..... :	Shenzhen Huafurui Technology Co., Ltd	
<b>Address</b> ..... :	Unit 1401 14/F, Jin qi zhi gu mansion Liu xian, street, Xili, Nan shan district, Shenzhen, China	
<b>Manufacturer's name</b> ... :	Shenzhen Huafurui Technology Co., Ltd	
<b>Address</b> ..... :	Unit 1401 14/F, Jin qi zhi gu mansion Liu xian, street, Xili, Nan shan district, Shenzhen, China	
<b>Standard(s)</b> .....	FCC CFR Title 47 Part 15 Subpart E Section 15.407 KDB 662911 D01 Multiple Transmitter Output v02r01 KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
<b>Product Name</b> ..... :	Tablet	
<b>Trade Mark</b> .....	CUBOT	
<b>Model/Type reference</b> ..... :	TAB KINGKONG	
<b>Rating(s)</b> ..... :	Adapter Information: Model: HJ-FC018K7-US Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 2.0A/ DC 7.0V, 2.0A/ DC 9.0V, 2.0A, 18.0W Rechargeable Li-ion Battery DC 3.8V	
<b>Date of receipt of test item</b> .....	Mar. 27, 2023	
<b>Date (s) of performance of test</b> ..... :	Mar. 27, 2023 - May 09, 2023	
<b>Tested by (+signature)</b> ... :	Aaron MO	
<b>Check by (+signature)</b> .... :	Beryl ZHAO	
<b>Approved by (+signature):</b>	Tomsin	



**General disclaimer:**

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

**TABLE OF CONTENTS**

**1. General Product Information ..... 3**  
1.1. EUT description ..... 3  
1.2. Model(s) list..... 3  
1.3. Test Frequency ..... 4

**2. Test Result Summary ..... 5**

**3. General Information..... 6**  
3.1. Test environment and mode..... 6  
3.2. Description of Support Units ..... 7

**4. Facilities and Accreditations ..... 8**  
4.1. Facilities ..... 8  
4.2. Location ..... 8  
4.3. Measurement Uncertainty ..... 8

**5. Test Results and Measurement Data ..... 9**  
5.1. Antenna requirement ..... 9  
5.2. Conducted Emission ..... 10  
5.3. Maximum Conducted Output Power ..... 14  
5.4. 6dB Emission Bandwidth..... 16  
5.5. 26dB Bandwidth and 99% Occupied Bandwidth ..... 17  
5.6. Power Spectral Density ..... 18  
5.7. Band edge ..... 19  
5.8. Unwanted Emissions ..... 33  
5.9. Frequency Stability Measurement ..... 45

**Appendix A: Test Result of Conducted Test**  
**Appendix B: Photographs of Test Setup**  
**Appendix C: Photographs of EUT**

## 1. General Product Information

### 1.1. EUT description

Product Name.....:	Tablet
Model/Type reference.....:	TAB KINGKONG
Sample Number.....:	TCT230327E001-0101
Operation Frequency .....	Band 1: 5180 MHz ~ 5240 MHz Band 3: 5745 MHz ~ 5825 MHz
Channel Bandwidth.....:	802.11a: 20MHz 802.11n: 20MHz, 40MHz 802.11ac: 20MHz, 40MHz, 80MHz
Modulation Technology .....	Orthogonal Frequency Division Multiplexing(OFDM)
Modulation Type .....	256QAM, 64QAM, 16QAM, BPSK, QPSK
Antenna Type.....:	FPC Antenna
Antenna Gain.....:	Band 1: -2.3dBi Band 3: -0.42dBi
Rating(s).....:	Adapter Information: Model: HJ-FC018K7-US Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 2.0A/ DC 7.0V, 2.0A/ DC 9.0V, 2.0A, 18.0W Rechargeable Li-ion Battery DC 3.8V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

### 1.2. Model(s) list

None.

### 1.3. Test Frequency

#### Band 1

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180	38	5190	42	5210
40	5200	46	5230		
48	5240				

#### Band 3

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745	151	5755	155	5775
157	5785	159	5795		
165	5825				

**Note:**

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

## 2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a)	PASS
6dB Emission Bandwidth	§15.407(a)	PASS
26dB Emission Bandwidth & 99% Occupied Bandwidth	§15.407(a)	PASS
Power Spectral Density	§15.407(a)	PASS
Restricted Bands around fundamental frequency	§15.407(b)	PASS
Radiated Emission	§15.407(b)	PASS
Frequency Stability	§15.407(g)	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. For the band 5.15-5.25GHz, EUT meet the requirements of 15.407(a)(ii).

### 3. General Information

#### 3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineer mode:	Keep the EUT in continuous transmitting by select channel and modulations with max. duty cycle.
<p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

**Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.**

Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	6.5 Mbps
802.11n(HT40)	13.5 Mbps
802.11ac(VHT20)	6.5 Mbps
802.11ac(VHT40)	13.5 Mbps
802.11ac(VHT80)	29.3 Mbps

### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

## 4. Facilities and Accreditations

### 4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

### 4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

### 4.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 3.10$ dB
2	RF power, conducted	$\pm 0.12$ dB
3	Spurious emissions, conducted	$\pm 0.11$ dB
4	All emissions, radiated(<1 GHz)	$\pm 4.56$ dB
5	All emissions, radiated(1 GHz - 18 GHz)	$\pm 4.22$ dB
6	All emissions, radiated(18 GHz- 40 GHz)	$\pm 4.36$ dB



## 5. Test Results and Measurement Data

### 5.1. Antenna requirement

**Standard requirement:**


FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**E.U.T Antenna:**

The EUT antenna is FPC antenna which permanently attached, and the maximum gain of the antenna is -0.42dBi at UNII-B3.

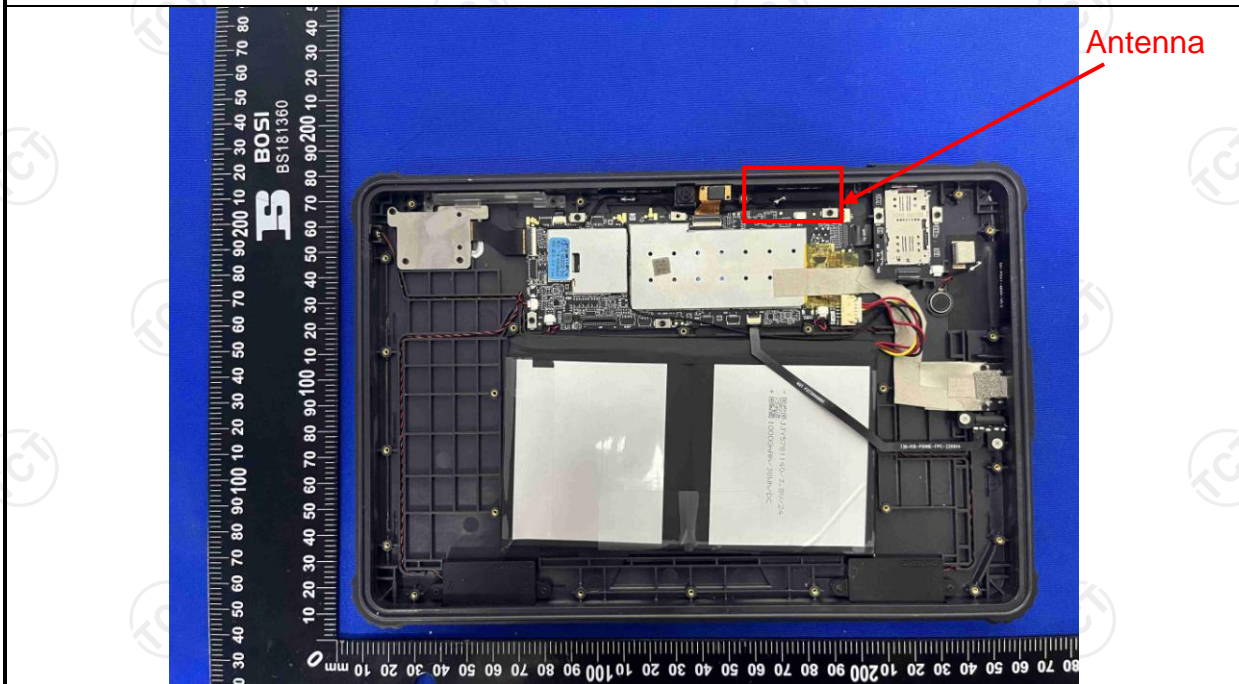

## 5.2. Conducted Emission

### 5.2.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2013														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
<b>Test Mode:</b>	Charging + Transmitting Mode														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	PASS														


**5.2.2. Test Instruments**

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI3	100898	Jul. 03, 2023
Line Impedance Stabilisation Newtork(LISN)	Schwarzbeck	NSLK 8126	8126453	Feb. 20, 2024
Line-5	TCT	CE-05	/	Jul. 03, 2024
EMI Test Software	Shurple Technology	EZ-EMC	/	/

5.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

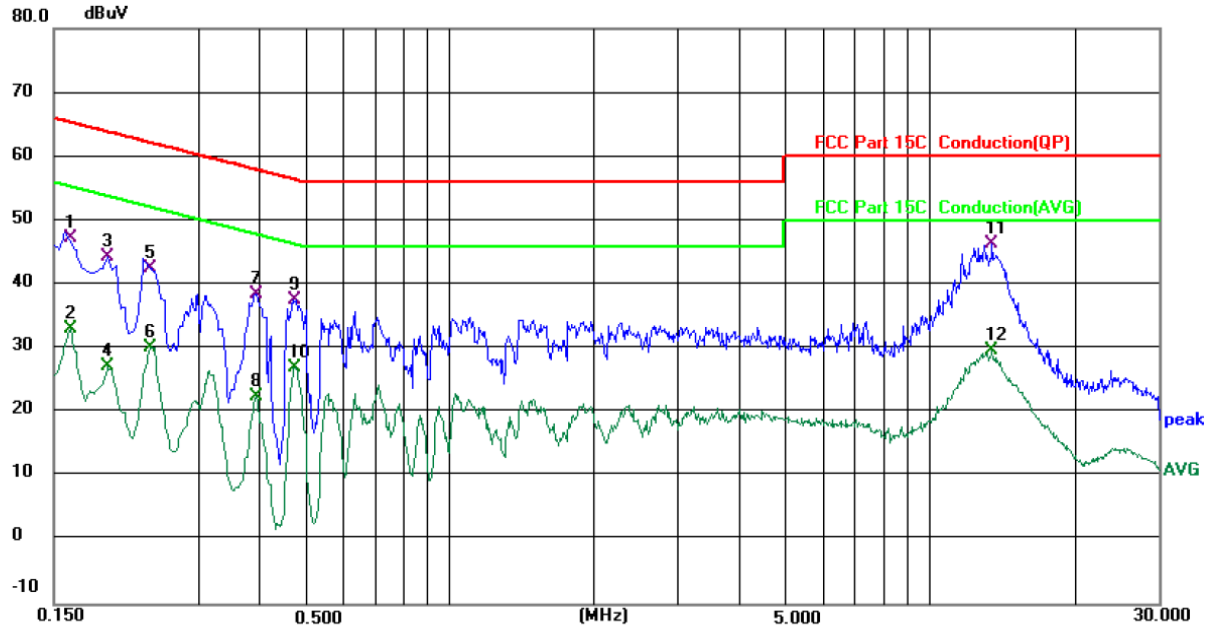

Site 844 Shielding Room

Phase: L1

Temperature: 23.5 (°C)

Humidity: 52 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	37.04	10.12	47.16	65.36	-18.20	QP	
2		0.1620	22.86	10.12	32.98	55.36	-22.38	AVG	
3		0.1940	34.20	10.14	44.34	63.86	-19.52	QP	
4		0.1940	17.01	10.14	27.15	53.86	-26.71	AVG	
5		0.2378	32.61	9.95	42.56	62.17	-19.61	QP	
6		0.2378	20.17	9.95	30.12	52.17	-22.05	AVG	
7		0.3940	28.99	9.56	38.55	57.98	-19.43	QP	
8		0.3940	13.02	9.56	22.58	47.98	-25.40	AVG	
9		0.4739	28.04	9.49	37.53	56.45	-18.92	QP	
10		0.4739	17.54	9.49	27.03	46.45	-19.42	AVG	
11	*	13.5100	36.13	10.16	46.29	60.00	-13.71	QP	
12		13.5100	19.54	10.16	29.70	50.00	-20.30	AVG	

**Note:**

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard


Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

## Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

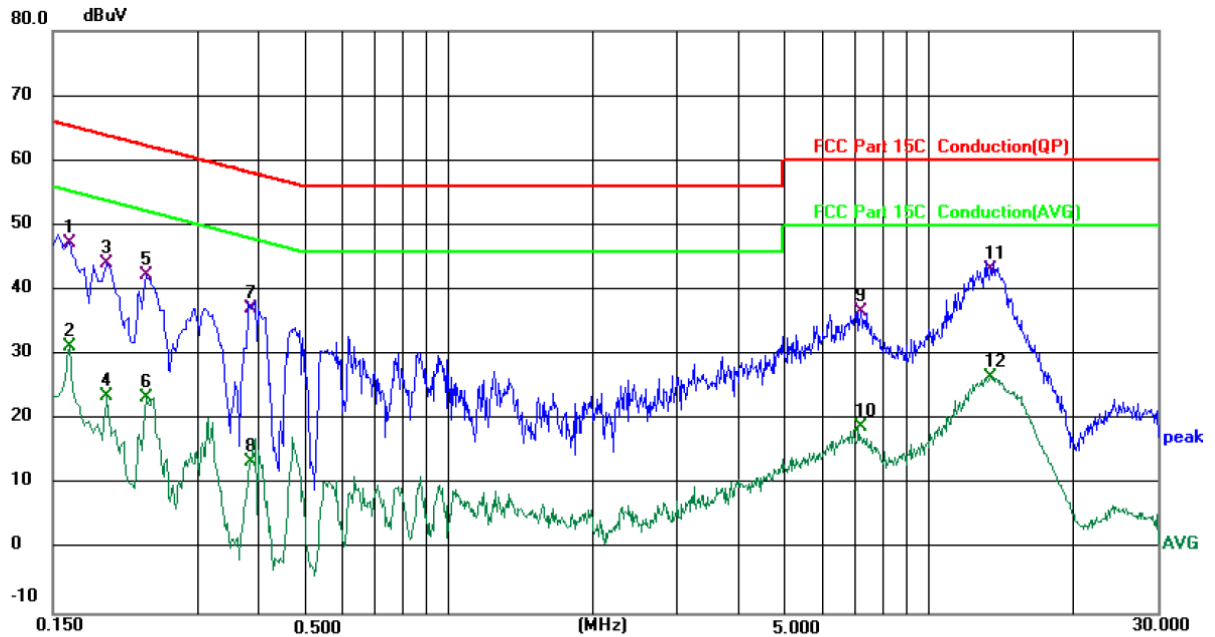

Site 844 Shielding Room

Phase: **N**

Temperature: 23.5 (°C)

Humidity: 52 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	37.20	10.10	47.30	65.36	-18.06	QP	
2		0.1620	21.19	10.10	31.29	55.36	-24.07	AVG	
3		0.1940	34.08	10.14	44.22	63.86	-19.64	QP	
4		0.1940	13.59	10.14	23.73	53.86	-30.13	AVG	
5		0.2340	32.41	9.95	42.36	62.31	-19.95	QP	
6		0.2340	13.49	9.95	23.44	52.31	-28.87	AVG	
7		0.3860	27.69	9.56	37.25	58.15	-20.90	QP	
8		0.3860	3.95	9.56	13.51	48.15	-34.64	AVG	
9		7.2259	26.58	10.13	36.71	60.00	-23.29	QP	
10		7.2259	8.80	10.13	18.93	50.00	-31.07	AVG	
11	*	13.5380	32.88	10.23	43.11	60.00	-16.89	QP	
12		13.5380	16.31	10.23	26.54	50.00	-23.46	AVG	

### Note:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. = Quasi-Peak


AVG = average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80) and the worst case Mode (Lowest channel and 802.11n(HT40)) was submitted only.

### 5.3. Maximum Conducted Output Power

#### 5.3.1. Test Specification
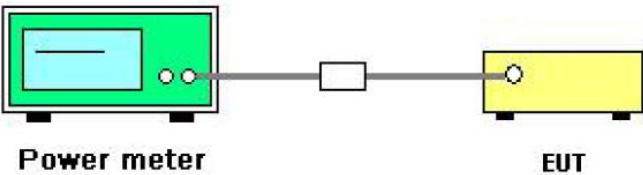
<b>Test Requirement:</b>	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046										
<b>Test Method:</b>	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E										
<b>Limit:</b>	<table border="1"> <thead> <tr> <th>Frequency Band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5180 - 5240</td> <td>24dBm(250mW) for client device</td> </tr> <tr> <td>5260 - 5320</td> <td>24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz</td> </tr> <tr> <td>5470 - 5725</td> <td>24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz</td> </tr> <tr> <td>5745 - 5825</td> <td>30dBm(1W)</td> </tr> </tbody> </table>	Frequency Band (MHz)	Limit	5180 - 5240	24dBm(250mW) for client device	5260 - 5320	24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz	5470 - 5725	24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz	5745 - 5825	30dBm(1W)
Frequency Band (MHz)	Limit										
5180 - 5240	24dBm(250mW) for client device										
5260 - 5320	24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz										
5470 - 5725	24dBm(250mW) or 11 dBm + 10 log B, B is the 26 dB emission bandwidth in megahertz										
5745 - 5825	30dBm(1W)										
<b>Test Setup:</b>	 <p style="text-align: center;"> <span style="margin-right: 100px;"><b>Power meter</b></span> <span><b>EUT</b></span> </p>										
<b>Test Mode:</b>	Transmitting mode with modulation										
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a</li> <li>2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>5. Measure the conducted output power and record the results in the test report.</li> </ol>										
<b>Test Result:</b>	PASS										
<b>Remark:</b>	<p>Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0</p> <p>Conducted output power= measurement power</p>										


**5.3.2. Test Instruments**

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023
Power Meter	Agilent	E4418B	MY45100357	Jul. 04, 2023
Power Sensor	Agilent	8481A	MY41091497	Jul. 04, 2023
Combiner Box	Ascentest	AT890-RFB	/	/



## 5.4. 6dB Emission Bandwidth

### 5.4.1. Test Specification

<b>Test Requirement:</b>	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
<b>Test Method:</b>	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
<b>Limit:</b>	>500kHz
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.</li> <li>4. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS


### 5.4.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023
Combiner Box	Ascentest	AT890-RFB	/	/



## 5.5. 26dB Bandwidth and 99% Occupied Bandwidth

### 5.5.1. Test Specification


<b>Test Requirement:</b>	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
<b>Test Method:</b>	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D
<b>Limit:</b>	No restriction limits
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW. Set the Video bandwidth (VBW) = 3 *RBW. In order to make an accurate measurement.</li> <li>4. Measure and record the results in the test report.</li> </ol>
<b>Test Result:</b>	PASS

### 5.5.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023
Combiner Box	Ascentest	AT890-RFB	/	/

## 5.6. Power Spectral Density

### 5.6.1. Test Specification

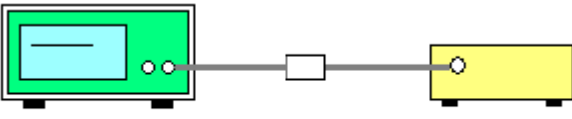
<b>Test Requirement:</b>	FCC Part15 E Section 15.407 (a)
<b>Test Method:</b>	KDB662911 D01 Multiple Transmitter Output v02r01 KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
<b>Limit:</b>	≤11.00dBm/MHz for Band 1 5150MHz-5250MHz(client device) ≤11.00dBm/MHz for Band 2A&2C 5250-5350&5470-5725 ≤30.00dBm/500KHz for Band 3 5725MHz-5850MHz The e.i,r,p spectral density for Band 1 5150MHz – 5250 MHz should not exceed 10dBm/MHz
<b>Test Setup:</b>	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.</li> <li>1. Set RBW = 510 kHz/1 MHz, VBW ≥ 3*RBW, Sweep time = Auto, Detector = RMS.</li> <li>2. Allow the sweeps to continue until the trace stabilizes.</li> <li>3. Use the peak marker function to determine the maximum amplitude level.</li> <li>4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.</li> </ol>
<b>Test Result:</b>	PASS

### 5.6.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023
Combiner Box	Ascentest	AT890-RFB	/	/

## 5.7. Band edge

### 5.7.1. Test Specification
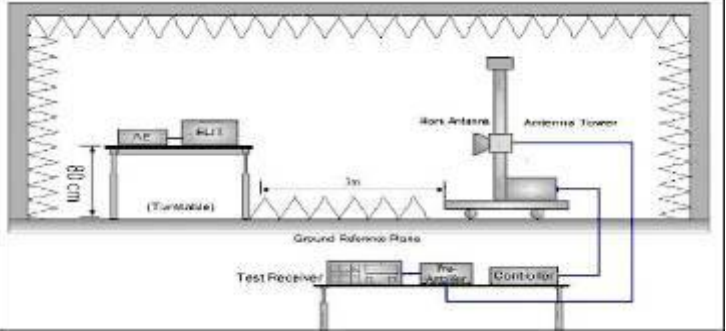
<b>Test Requirement:</b>	FCC CFR47 Part 15E Section 15.407																				
<b>Test Method:</b>	ANSI C63.10 2013																				
<b>Limit:</b>	In un-restricted band: For Band 1&2A&2C: -27dBm/MHz For Band 3:																				
	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Limit (dBm/MHz)</th> <th>Frequency (MHz)</th> <th>Limit (dBm/MHz)</th> </tr> </thead> <tbody> <tr> <td>&lt; 5650</td> <td>-27</td> <td>5850~5855</td> <td>27~15.6</td> </tr> <tr> <td>5650~5700</td> <td>-27~10</td> <td>5855~5875</td> <td>15.6~10</td> </tr> <tr> <td>5700~5720</td> <td>10~15.6</td> <td>5875~5925</td> <td>10~-27</td> </tr> <tr> <td>5720~5725</td> <td>15.6~27</td> <td>&gt; 5925</td> <td>-27</td> </tr> </tbody> </table>	Frequency (MHz)	Limit (dBm/MHz)	Frequency (MHz)	Limit (dBm/MHz)	< 5650	-27	5850~5855	27~15.6	5650~5700	-27~10	5855~5875	15.6~10	5700~5720	10~15.6	5875~5925	10~-27	5720~5725	15.6~27	> 5925	-27
	Frequency (MHz)	Limit (dBm/MHz)	Frequency (MHz)	Limit (dBm/MHz)																	
	< 5650	-27	5850~5855	27~15.6																	
	5650~5700	-27~10	5855~5875	15.6~10																	
5700~5720	10~15.6	5875~5925	10~-27																		
5720~5725	15.6~27	> 5925	-27																		
E[dBμV/m] = EIRP[dBm] + 95.2 @3m																					
In restricted band:																					
<table border="1"> <thead> <tr> <th>Detector</th> <th>Limit@3m</th> </tr> </thead> <tbody> <tr> <td>Peak</td> <td>74dBμV/m</td> </tr> <tr> <td>AVG</td> <td>54dBμV/m</td> </tr> </tbody> </table>		Detector	Limit@3m	Peak	74dBμV/m	AVG	54dBμV/m														
Detector	Limit@3m																				
Peak	74dBμV/m																				
AVG	54dBμV/m																				
<b>Test Setup:</b>	 <p>The diagram illustrates the test setup. An Under Test Equipment (EUT) is placed on a rotating table at a height of 0.8 meters. The table is positioned 3 meters away from a horn antenna mounted on an antenna tower. A ground reference plane is shown below the table. The test receiver system, including a test receiver, pre-amplifier, and controller, is connected to the antenna tower.</p>																				
<b>Test Mode:</b>	Transmitting mode with modulation																				
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold</li> </ol>																				


	<p>Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.</p>
<b>Test Result:</b>	PASS



**5.7.2. Test Instruments**

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESIB7	100197	Jul. 03, 2023
Spectrum Analyzer	R&S	FSQ40	200061	Jul. 03, 2023
Spectrum Analyzer	Agilent	N9020A	MY49100619	Jul. 04, 2023
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Feb. 20, 2024
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Feb. 20, 2024
Pre-amplifier	HP	8447D	2727A05017	Jul. 03, 2023
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jun. 11, 2023
Broadband Antenna	Schwarzbeck	VULB9163	340	Jul. 05, 2023
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jul. 05, 2023
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Feb. 24, 2024
Coaxial cable	SKET	RC-18G-N-M	/	Feb. 24, 2024
Coaxial cable	SKET	RC_40G-K-M	/	Feb. 24, 2024
Antenna Mast	Keleto	CC-A-4M	/	/
EMI Test Software	Shurple Technology	EZ-EMC	/	/


## 5.7.3. Test Data AC20-5180

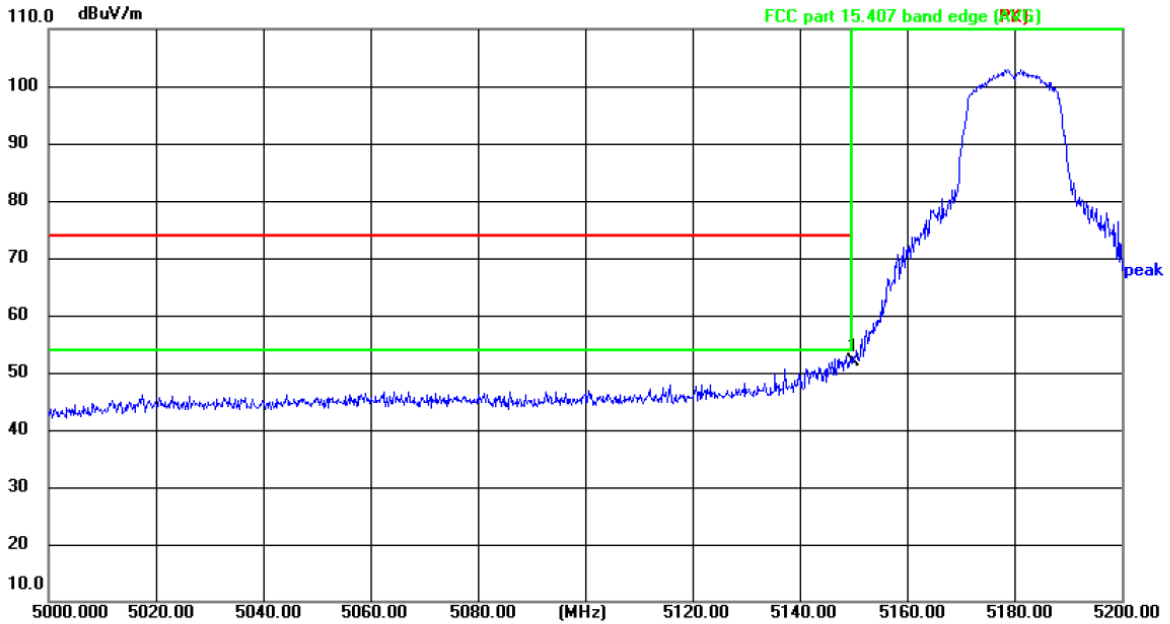

Site: #3 3m Anechoic Chamber      Polarization: **Horizontal**      Temperature: 23.8(°C)      Humidity: 54 %

Limit: FCC part 15.407 band edge (PK)      Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5150.000	60.61	-8.63	51.98	74.00	-22.02	peak	P	

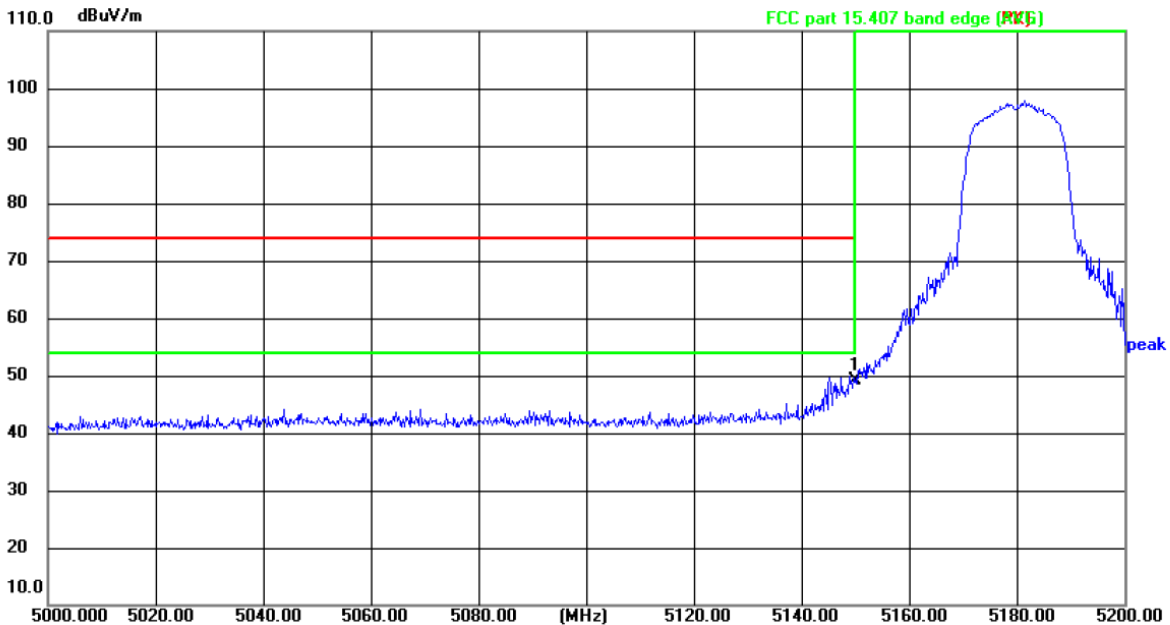


Site: #3 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 23.8(°C)      Humidity: 54 %

Limit: FCC part 15.407 band edge (PK)      Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5150.000	57.70	-8.63	49.07	74.00	-24.93	peak	P	


## AC20-5240

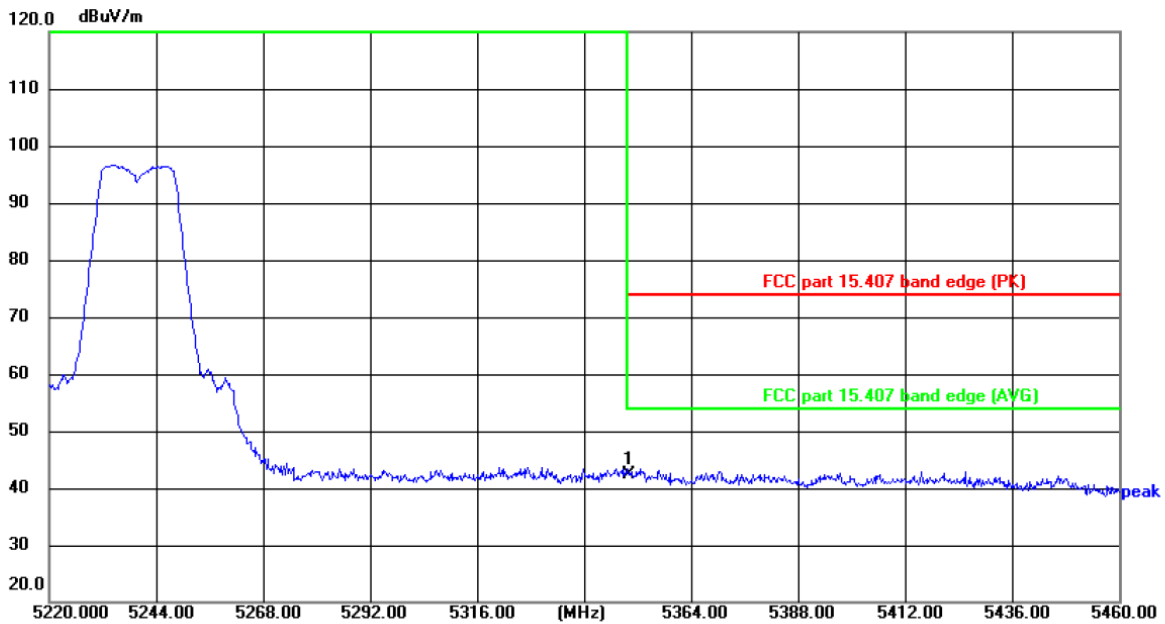

Site: #3 3m Anechoic Chamber      Polarization: **Horizontal**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge (PK)      Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5350.000	51.74	-9.43	42.31	74.00	-31.69	peak	P	

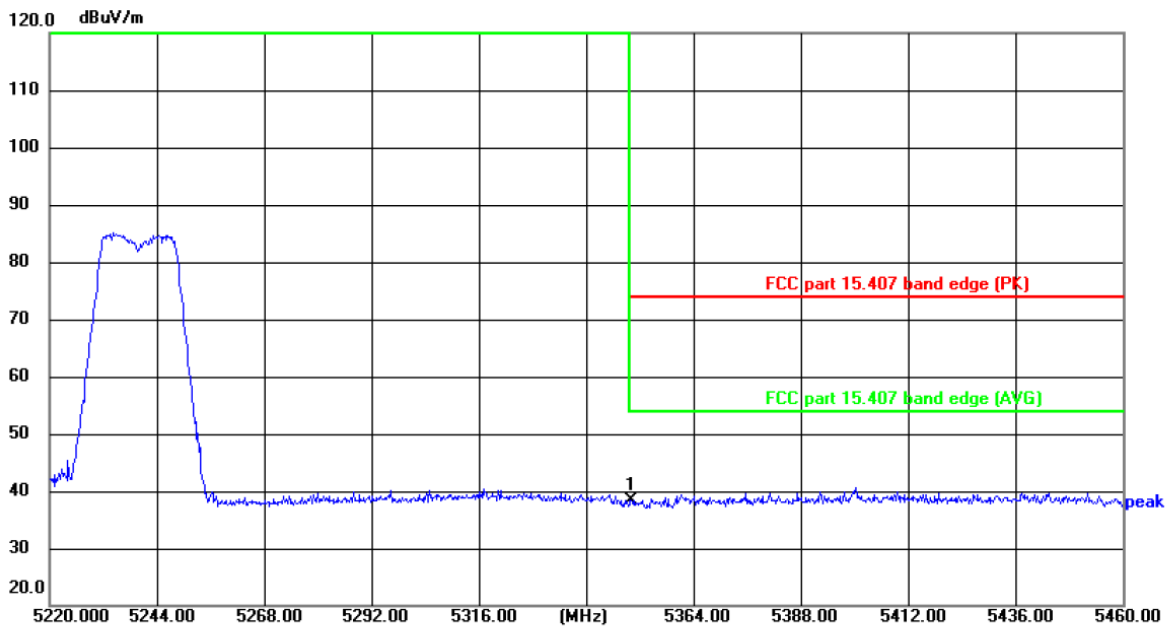


Site: #3 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge (PK)      Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5350.000	47.89	-9.43	38.46	74.00	-35.54	peak	P	


## AC40-5190

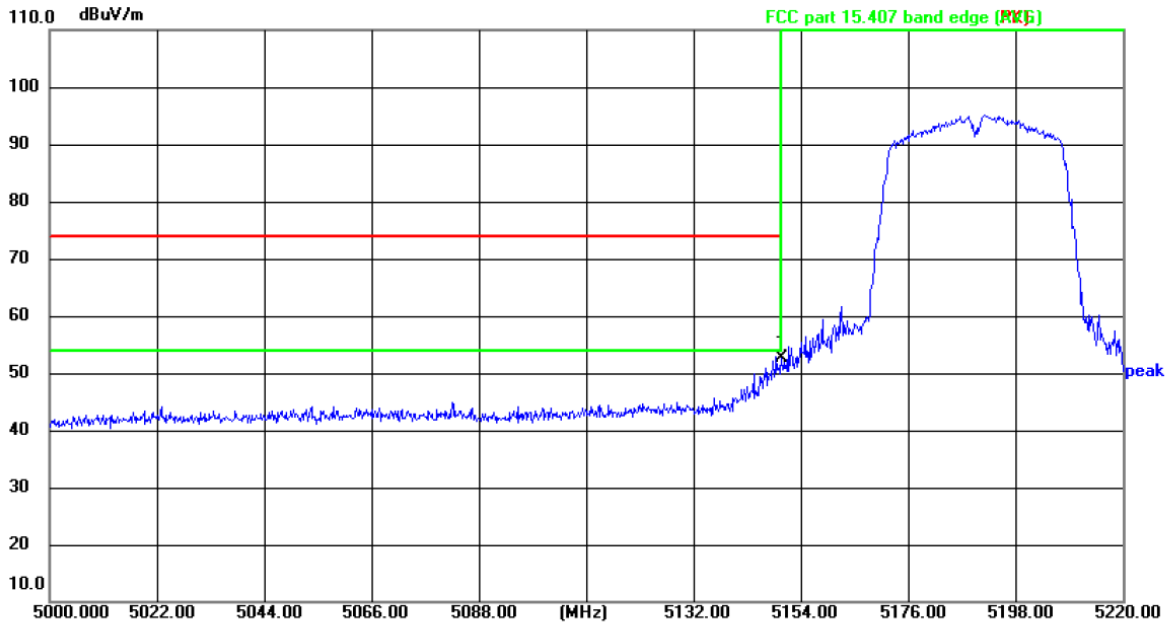

Site: #3 3m Anechoic Chamber      Polarization: **Horizontal**      Temperature: 23.8(°C)      Humidity: 54 %

Limit: FCC part 15.407 band edge (PK)      Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5150.000	61.23	-8.63	52.60	74.00	-21.40	peak	P	

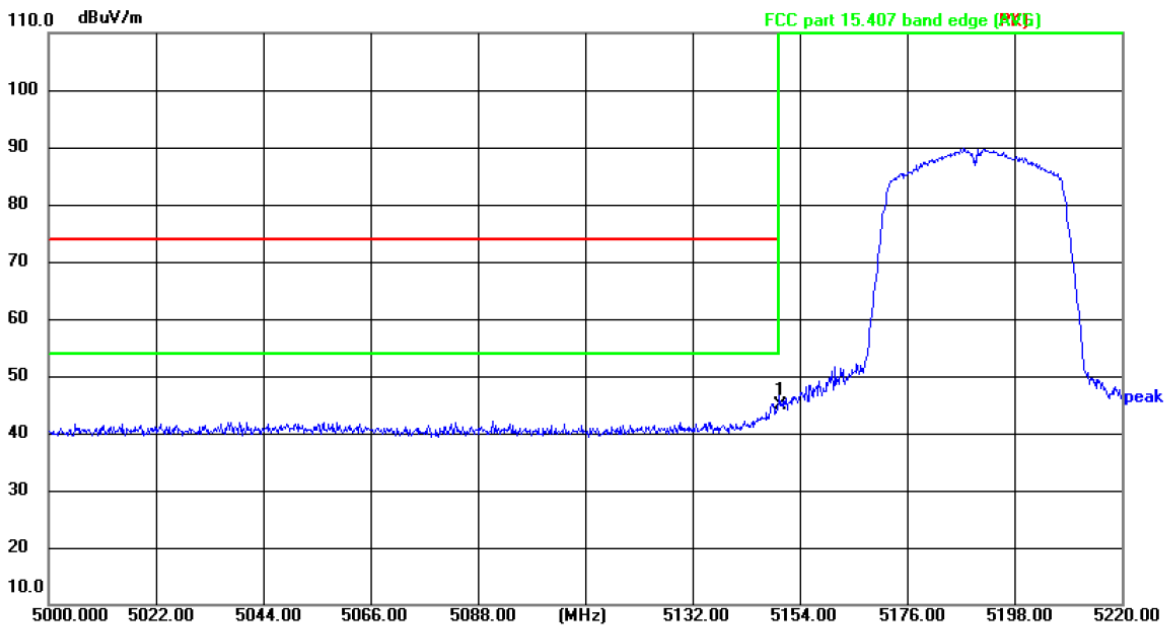


Site: #3 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 23.8(°C)      Humidity: 54 %

Limit: FCC part 15.407 band edge (PK)      Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5150.000	53.47	-8.63	44.84	74.00	-29.16	peak	P	




## AC40-5230

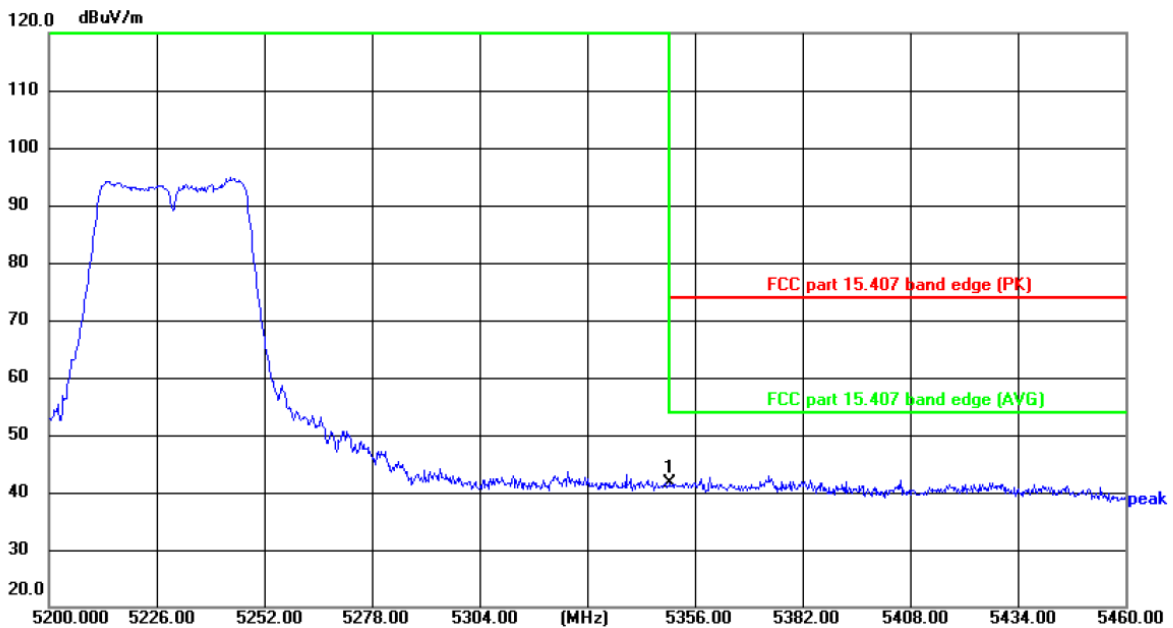

Site: #3 3m Anechoic Chamber      Polarization: **Horizontal**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5350.000	50.98	-9.43	41.55	74.00	-32.45	peak	P	

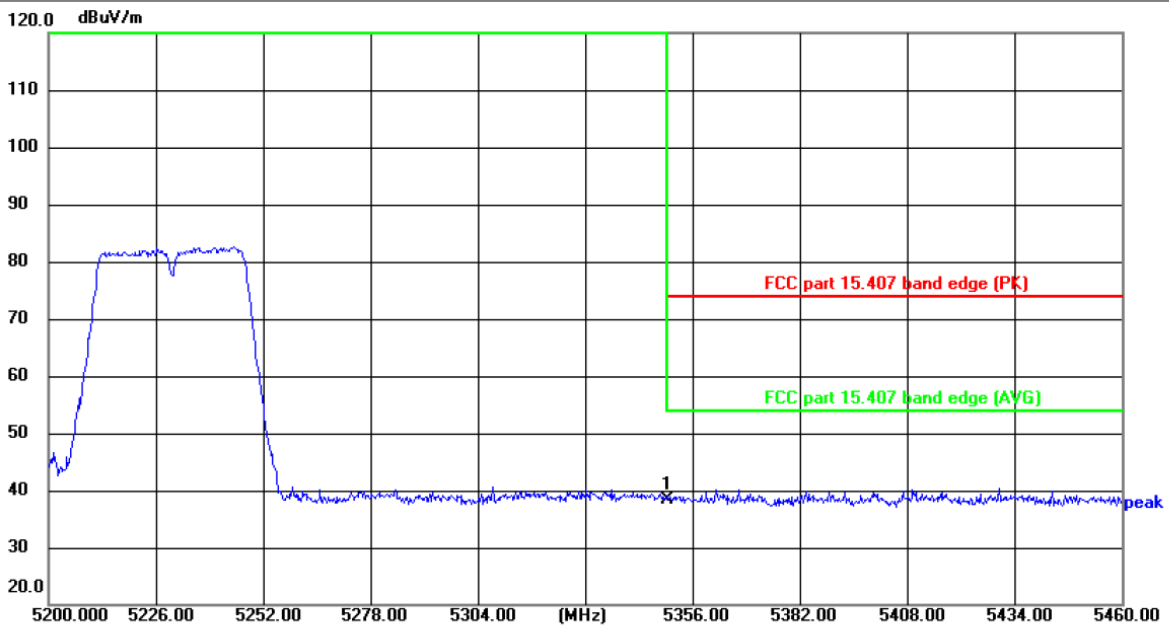


Site: #3 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5350.000	47.80	-9.43	38.37	74.00	-35.63	peak	P	


## AC80-5210

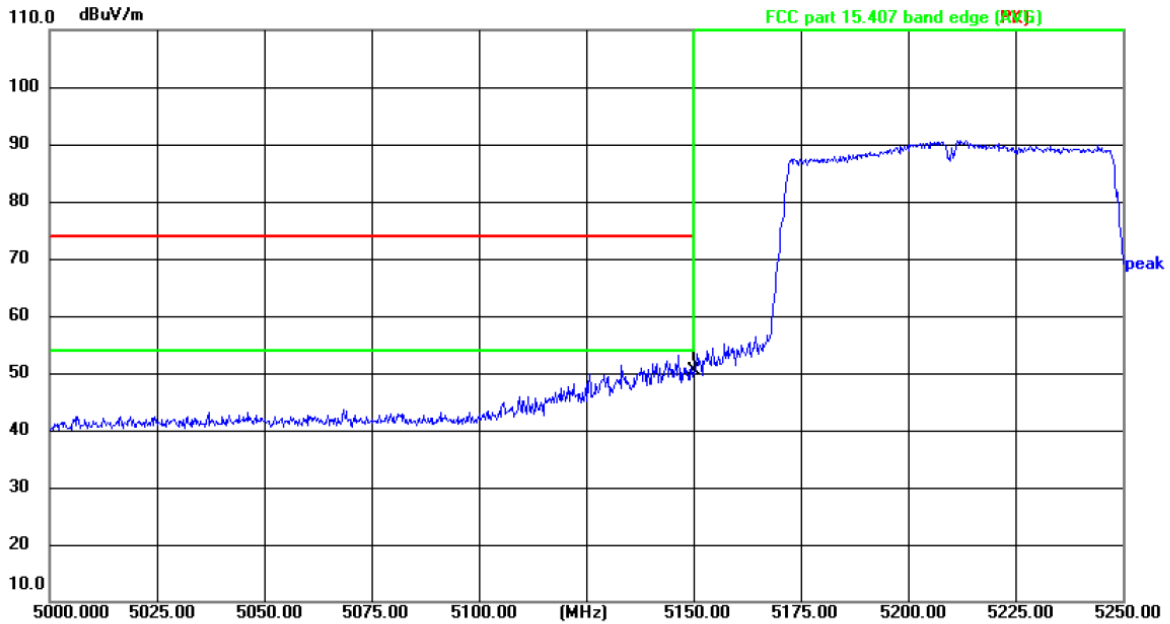

Site: #3 3m Anechoic Chamber      Polarization: **Horizontal**      Temperature: 23.8(°C)      Humidity: 54 %

Limit: FCC part 15.407 band edge (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5150.000	58.94	-8.63	50.31	74.00	-23.69	peak	P	

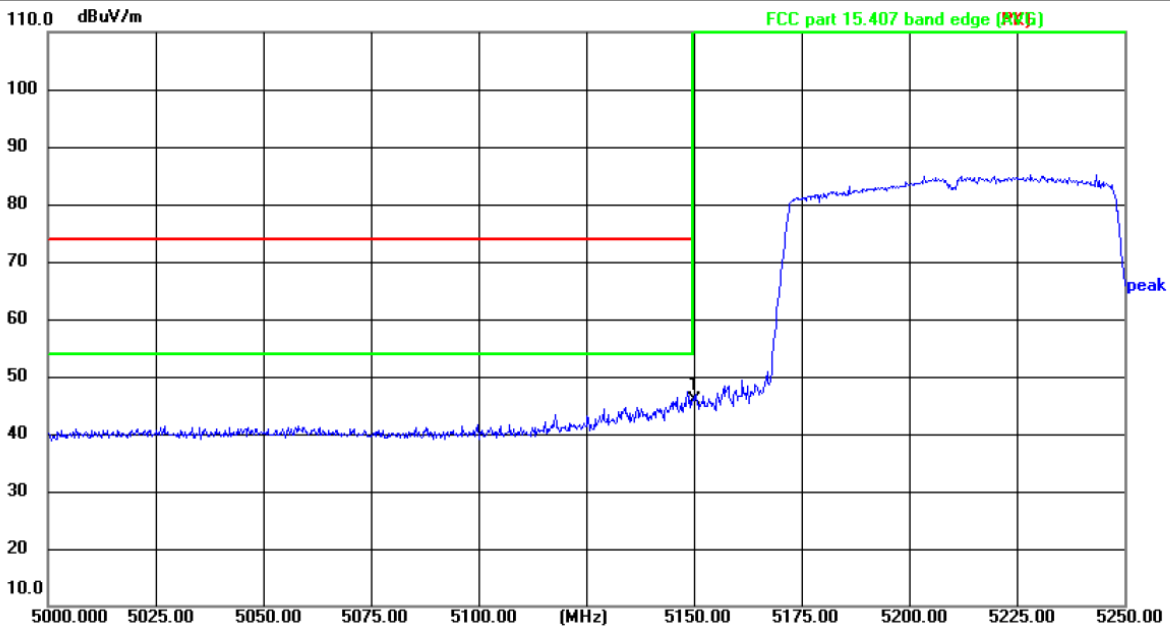


Site: #3 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 23.8(°C)      Humidity: 54 %

Limit: FCC part 15.407 band edge (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5150.000	54.46	-8.63	45.83	74.00	-28.17	peak	P	


## AC80-5210

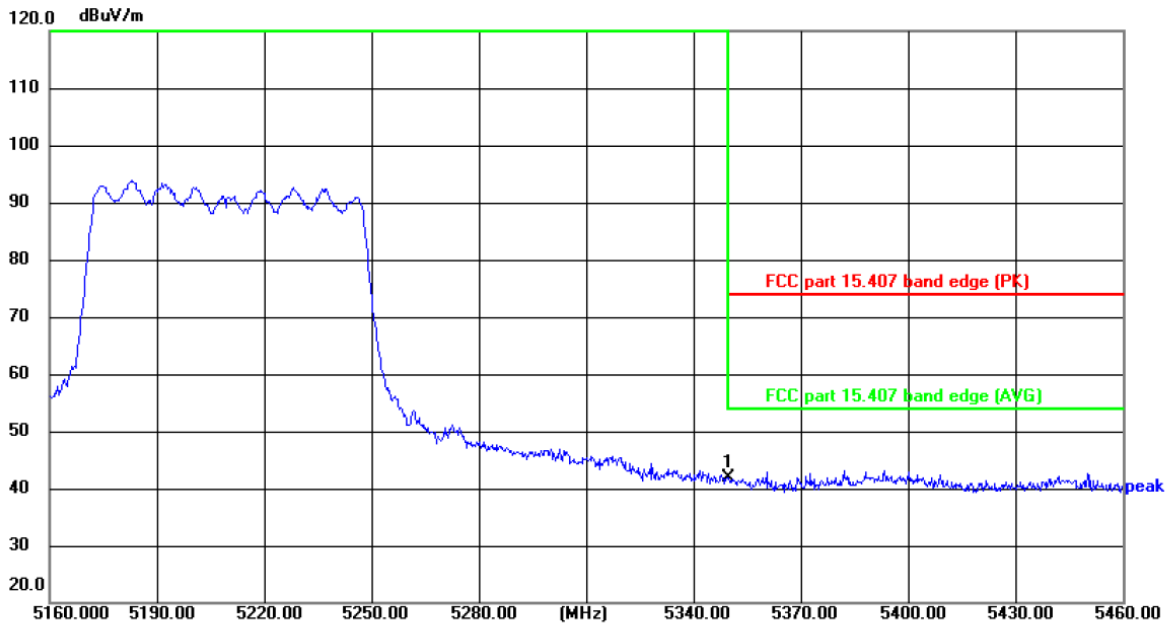

Site: #3 3m Anechoic Chamber      Polarization: **Horizontal**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge (PK)      Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5350.000	51.27	-9.43	41.84	74.00	-32.16	peak	P	

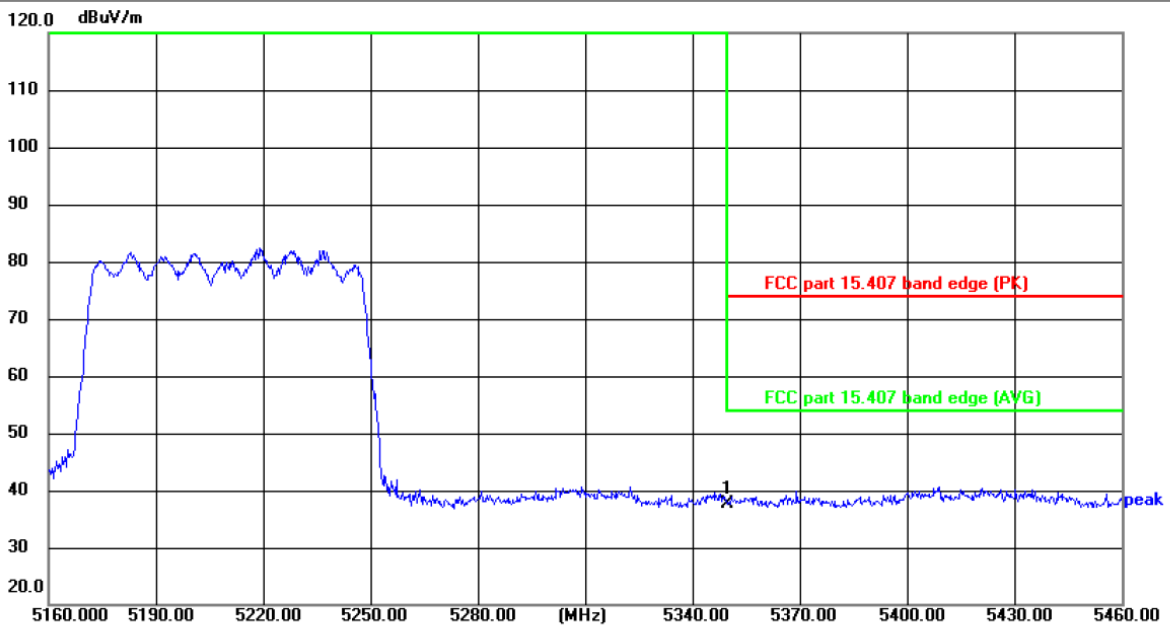


Site: #3 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge (PK)      Power: DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5350.000	47.18	-9.43	37.75	74.00	-36.25	peak	P	


## AC20-5745

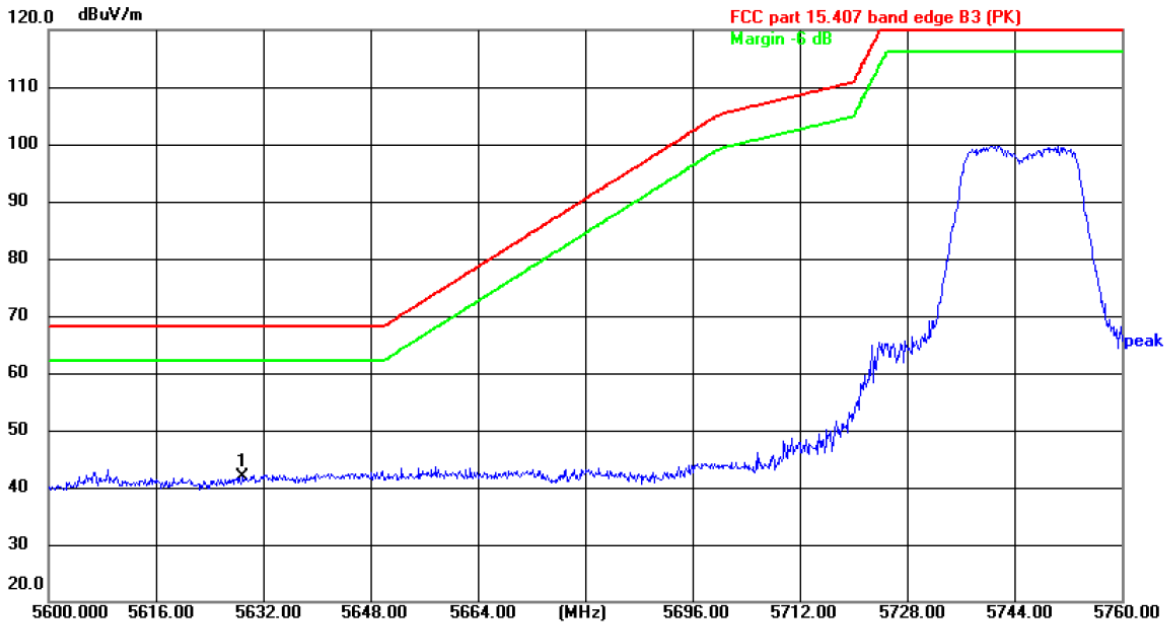

Site: #3 3m Anechoic Chamber      Polarization: **Horizontal**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge B3 (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5629.040	50.77	-8.94	41.83	68.20	-26.37	peak	P	

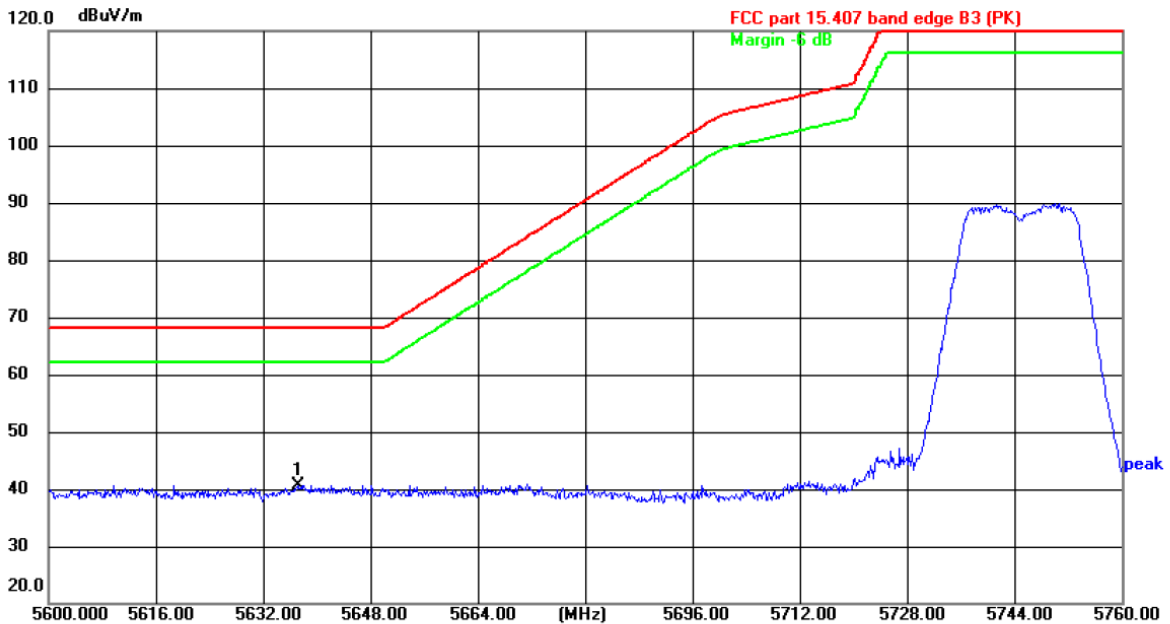


Site: #3 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge B3 (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5637.120	49.56	-8.86	40.70	68.20	-27.50	peak	P	


## AC20-5825

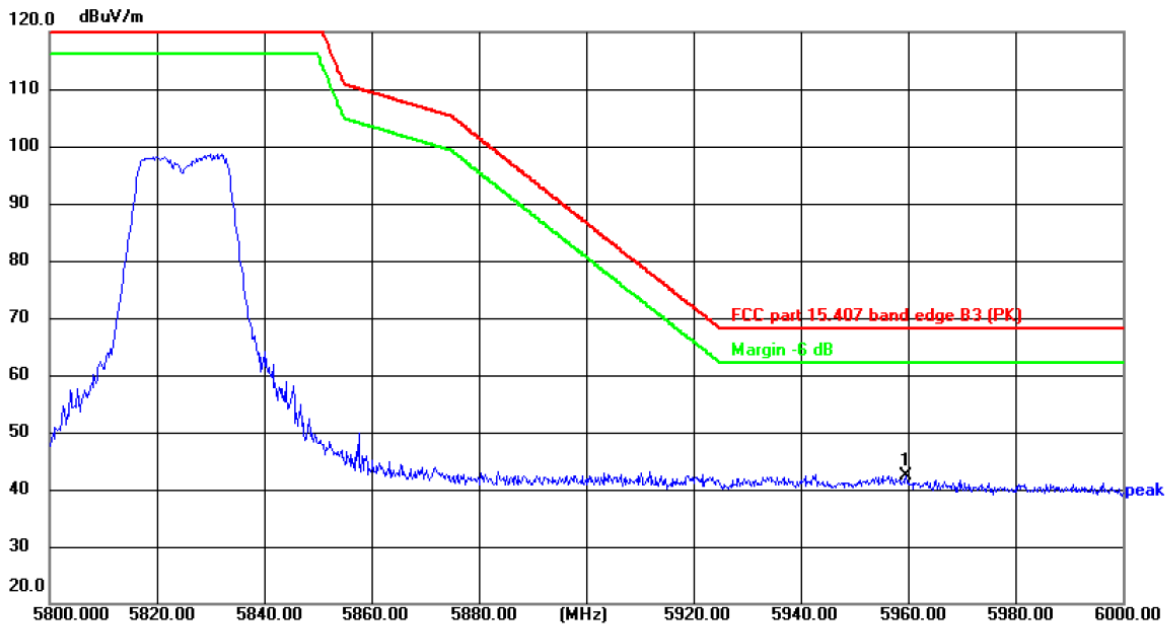

Site: #3 3m Anechoic Chamber      Polarization: **Horizontal**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge B3 (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5959.700	50.47	-7.99	42.48	68.20	-25.72	peak	P	

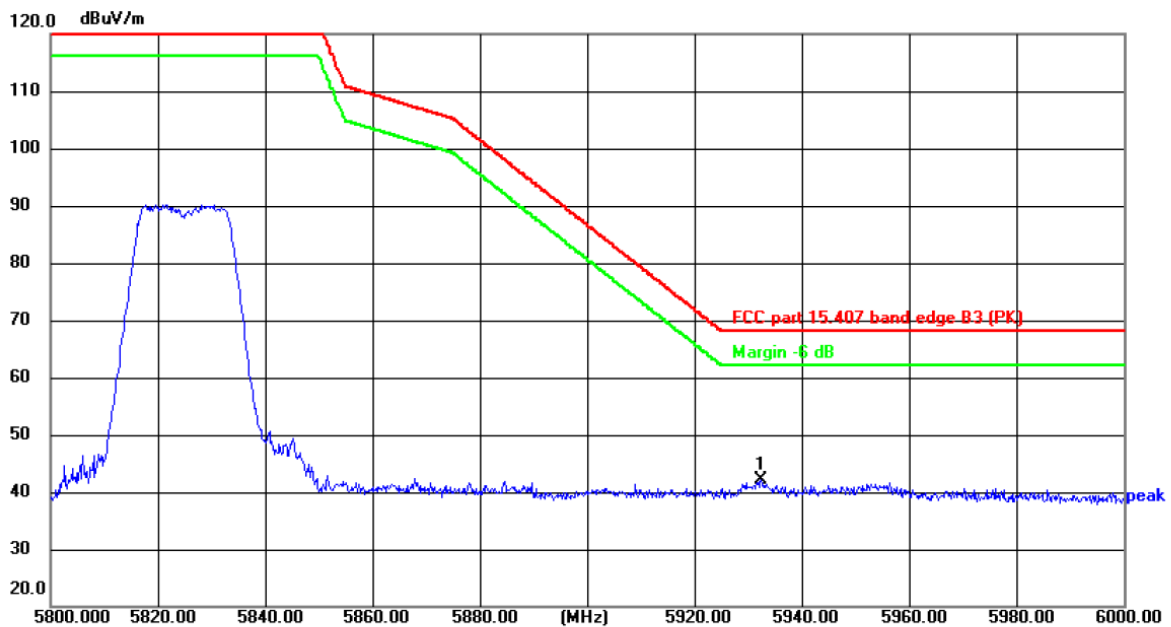


Site: #3 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge B3 (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5932.500	50.02	-7.96	42.06	68.20	-26.14	peak	P	


## AC40-5755

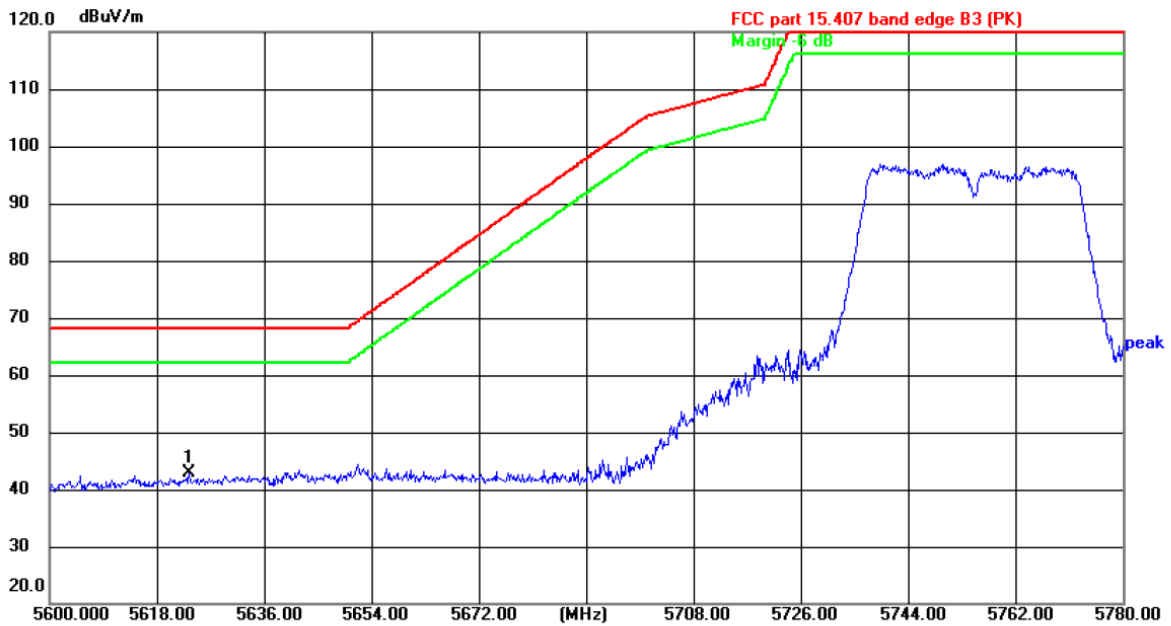

Site: #3 3m Anechoic Chamber      Polarization: **Horizontal**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge B3 (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5623.400	51.89	-8.98	42.91	68.20	-25.29	peak	P	

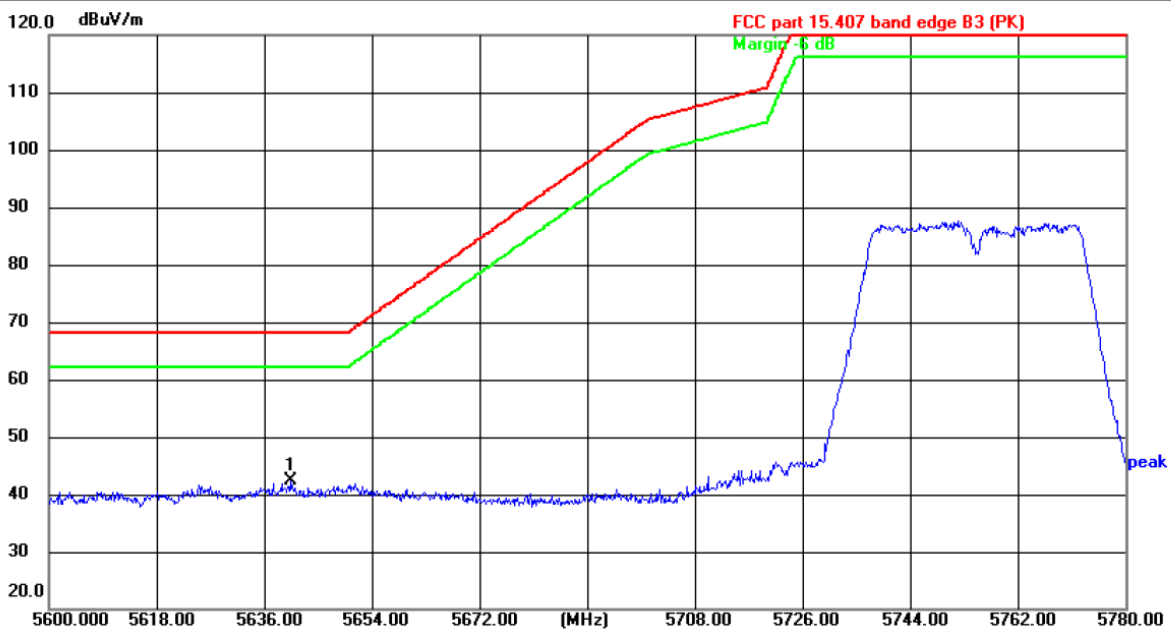


Site: #3 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 21.3(°C)      Humidity: 50 %


Limit: FCC part 15.407 band edge B3 (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5640.320	51.24	-8.84	42.40	68.20	-25.80	peak	P	

## AC40-5795

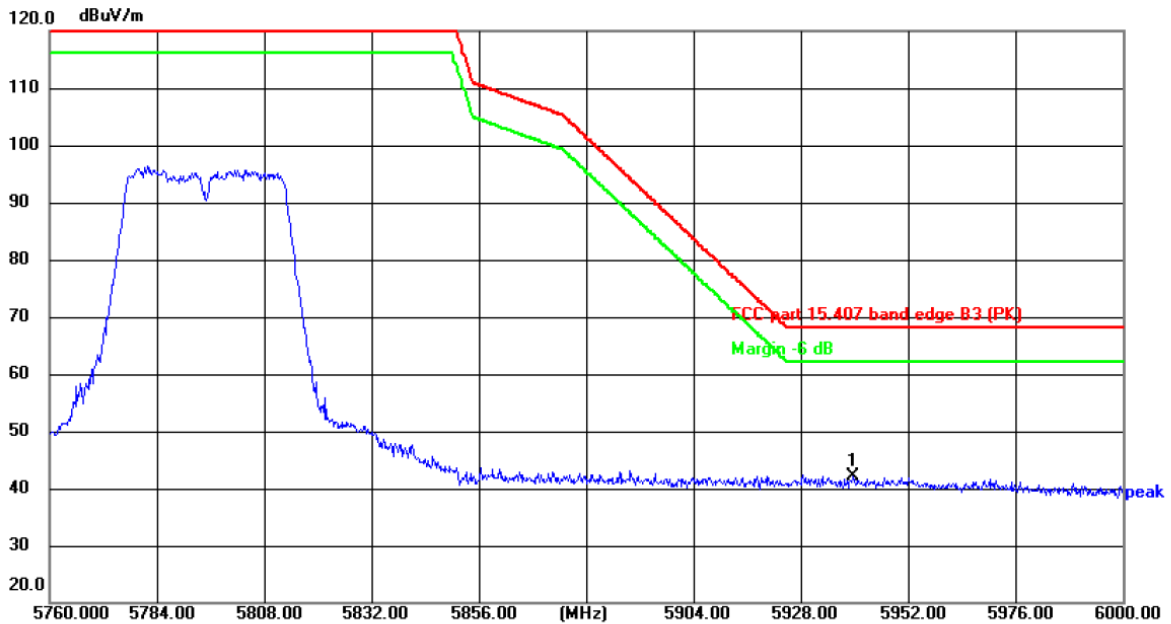


## AC80-5775

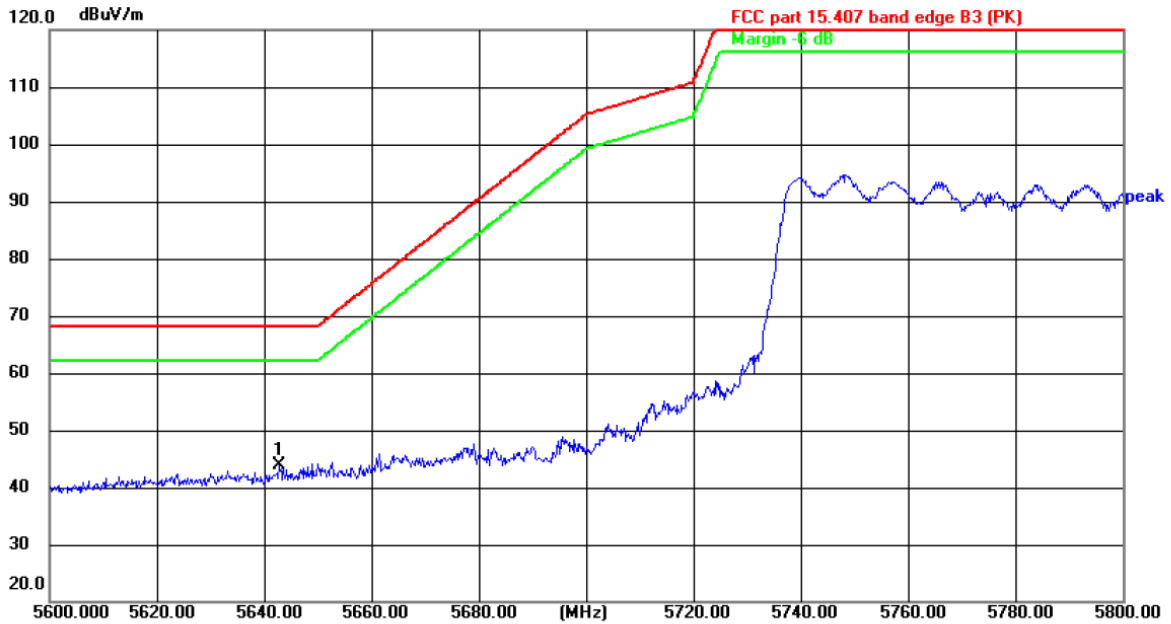

Site: #3 3m Anechoic Chamber      Polarization: **Horizontal**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge B3 (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5642.900	52.69	-8.82	43.87	68.20	-24.33	peak	P	

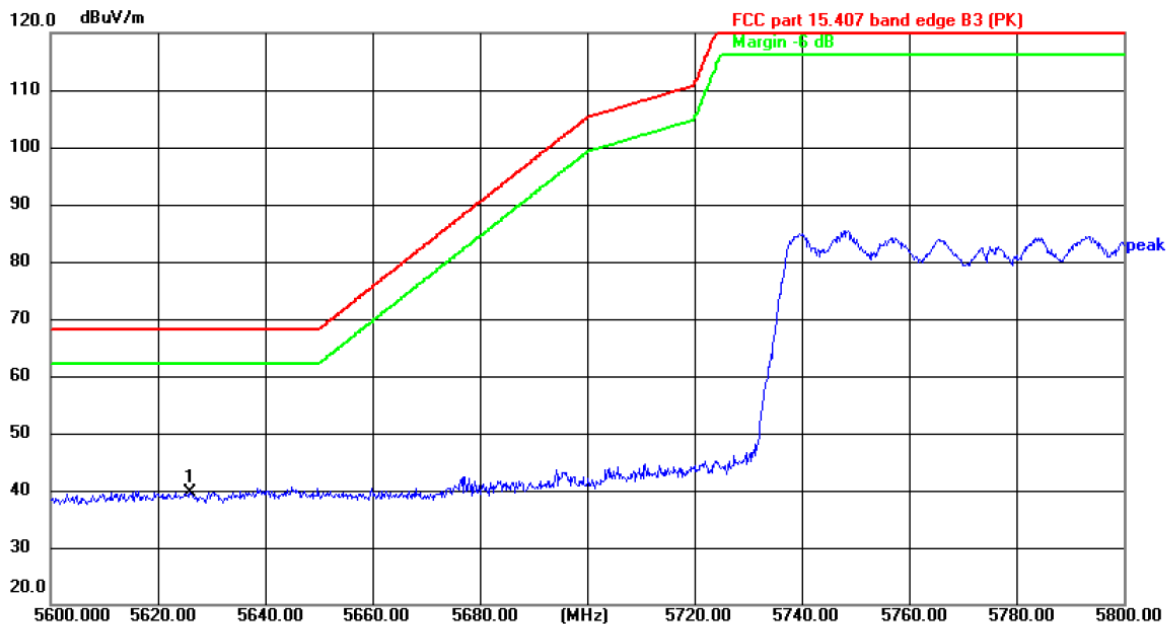

Site: #3 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 21.3(°C)      Humidity: 50 %

Limit: FCC part 15.407 band edge B3 (PK)      Power:DC 3.7 V

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	5626.000	48.68	-8.96	39.72	68.20	-28.48	peak	P	


Note: All modulation (802.11a, 802.11n, 802.11ac) have been tested, only the worst case in 802.11ac be reported.




## 5.8. Unwanted Emissions

### 5.8.1. Test Specification

<b>Test Requirement:</b>	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
<b>Test Method:</b>	KDB 789033 D02 v02r01				
<b>Frequency Range:</b>	9kHz to 40GHz				
<b>Measurement Distance:</b>	3 m				
<b>Antenna Polarization:</b>	Horizontal & Vertical				
<b>Operation mode:</b>	Transmitting mode with modulation				
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
<b>Limit:</b>	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table, In restricted bands:				
	Frequency	Detector	Limit@3m		
	Above 1G	Peak	74dB $\mu$ V/m		
		AVG	54dB $\mu$ V/m		
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		
	0.009-0.490	2400/F(KHz)	300		
	0.490-1.705	24000/F(KHz)	3		
	1.705-30	30	30		
	30-88	100	3		
	88-216	150	3		
216-960	200	3			
Above 960	500	3			
	In un-restricted bands: 68.2dB $\mu$ V/m				
<b>Test setup:</b>	For radiated emissions below 30MHz				
	<p>Distance = 3m</p> <p>EUT</p> <p>Turn table</p> <p>Ground Plane</p> <p>Computer</p> <p>Pre -Amplifier</p> <p>Receiver</p>				
	30MHz to 1GHz				

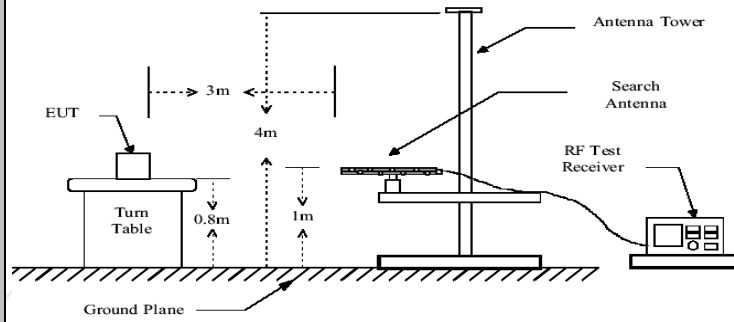

Above 1GHz

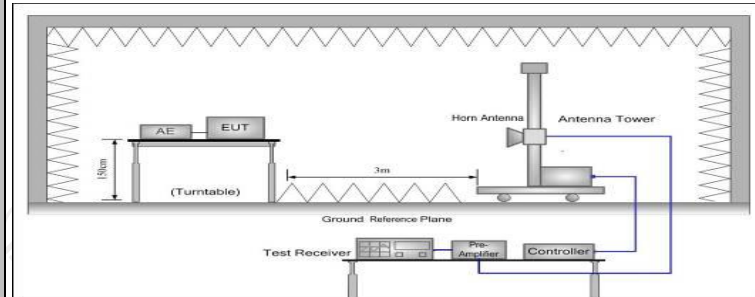

**Test Procedure:**

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**Test results:**

PASS

5.8.2. Test Data

Please refer to following diagram for individual  
Below 1GHz

Horizontal:

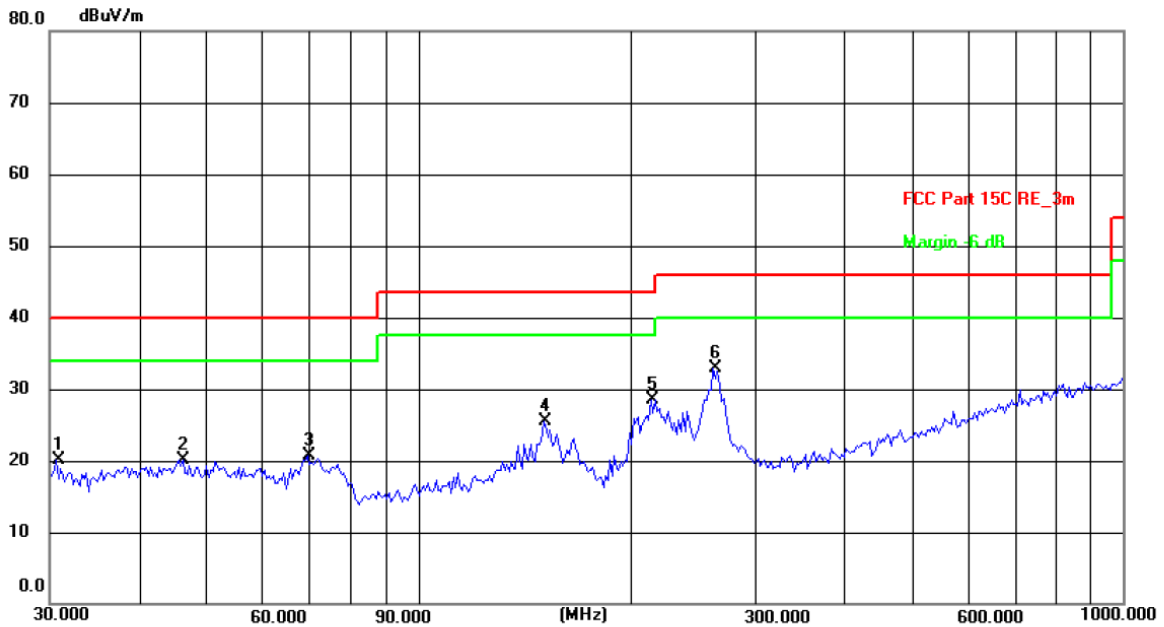

Site: #1 3m Anechoic Chamber

Polarization: **Horizontal**

Temperature: 26.3(C)


Humidity: 55 %

Limit: FCC Part 15C RE\_3m

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	30.6379	7.03	13.00	20.03	40.00	-19.97	peak	P	
2	46.3402	6.38	13.82	20.20	40.00	-19.80	peak	P	
3	69.6005	9.69	10.95	20.64	40.00	-19.36	peak	P	
4	150.5378	11.04	14.47	25.51	43.50	-17.99	peak	P	
5	213.7634	17.45	10.98	28.43	43.50	-15.07	peak	P	
6 *	261.9753	20.21	12.73	32.94	46.00	-13.06	peak	P	

Vertical:

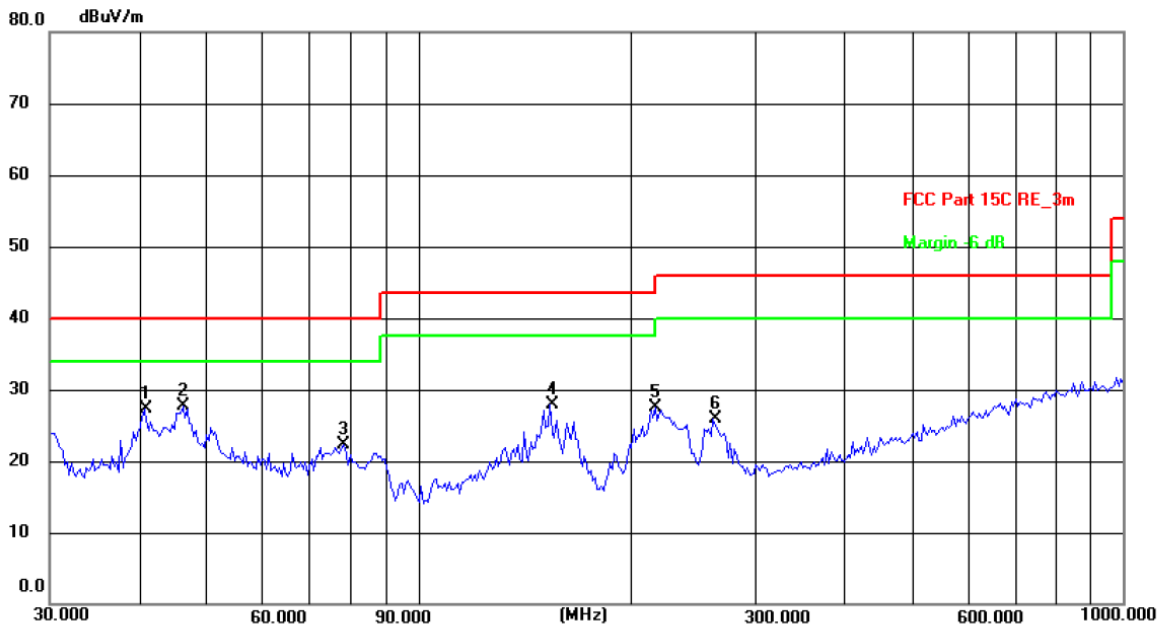

Site: #1 3m Anechoic Chamber      Polarization: **Vertical**      Temperature: 26.3(C)      Humidity: 55 %

Limit: FCC Part 15C RE\_3m

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	40.8445	13.14	14.15	27.29	40.00	-12.71	peak	P	
2 *	46.3402	13.97	13.82	27.79	40.00	-12.21	peak	P	
3	78.4133	12.40	9.95	22.35	40.00	-17.65	peak	P	
4	153.7385	13.15	14.72	27.87	43.50	-15.63	peak	P	
5	216.7828	16.32	11.15	27.47	46.00	-18.53	peak	P	
6	261.9752	13.21	12.73	25.94	46.00	-20.06	peak	P	

- Note:**
- The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported
  - Measurements were conducted in all three channels (high, middle, low) and all modulation (802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80) and the worst case Mode (Lowest channel and 802.11n(HT40)) was submitted only.
  - Measurement (dBμV) = Reading level + Correction Factor , correction Factor= Antenna Factor + Cable loss – Pre-amplifier.

Modulation Type: Band 1									
11a CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
					Peak (dBµV/m)	AV (dBµV/m)			
10360	H	38.51	---	8.02	46.53	---	68.2	---	-21.67
15540	H	38.90	---	9.87	48.77	---	74	54	-5.23
---	H	---	---	---	---	---	---	---	---
10360	V	38.27	---	8.02	46.29	---	68.2	---	-21.91
15540	V	38.63	---	9.87	48.5	---	74	54	-5.5
---	V	---	---	---	---	---	---	---	---
11a CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
					Peak (dBµV/m)	AV (dBµV/m)			
10400	H	39.06	---	7.97	47.03	---	68.2	---	-21.17
15600	H	38.19	---	9.83	48.02	---	74	54	-5.98
---	H	---	---	---	---	---	---	---	---
10400	V	40.58	---	7.97	48.55	---	68.2	---	-19.65
15600	V	38.26	---	9.83	48.09	---	74	54	-5.91
---	V	---	---	---	---	---	---	---	---
11a CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
					Peak (dBµV/m)	AV (dBµV/m)			
10480	H	38.73	---	7.97	46.7	---	68.2	---	-21.5
15720	H	37.19	---	9.83	47.02	---	74	54	-6.98
---	H	---	---	---	---	---	---	---	---
10480	V	38.27	---	7.97	46.24	---	68.2	---	-21.96
15720	V	36.84	---	9.83	46.67	---	74	54	-7.33
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
					Peak (dBµV/m)	AV (dBµV/m)			
10360	H	41.47	---	8.02	49.49	---	68.2	---	-18.71
15540	H	37.90	---	9.87	47.77	---	74	54	-6.23
---	H	---	---	---	---	---	---	---	---
10360	V	42.14	---	8.02	50.16	---	68.2	---	-18.04
15540	V	37.36	---	9.87	47.23	---	74	54	-6.77
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10400	H	40.71	---	7.97	48.68	---	68.2	---	-19.52
15600	H	38.05	---	9.83	47.88	---	74	54	-6.12
---	H	---	---	---	---	---	---	---	---
10400	V	40.27	---	7.97	48.24	---	68.2	---	-19.96
15600	V	37.11	---	9.83	46.94	---	74	54	-7.06
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH48: 5240MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10480	H	41.06	---	7.97	49.03	---	68.2	---	-19.17
15720	H	39.87	---	9.83	49.7	---	74	54	-4.3
---	H	---	---	---	---	---	---	---	---
10480	V	40.61	---	7.97	48.58	---	68.2	---	-19.62
15720	V	39.35	---	9.83	49.18	---	74	54	-4.82
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH38: 5190MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10380	H	39.84	---	7.75	47.59	---	68.2	---	-20.61
15570	H	37.51	---	9.87	47.38	---	74	54	-6.62
---	H	---	---	---	---	---	---	---	---
10380	V	40.77	---	7.75	48.52	---	68.2	---	-19.68
15570	V	37.16	---	9.87	47.03	---	74	54	-6.97
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH46: 5230MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10460	H	41.58	---	7.97	49.55	---	68.2	---	-18.65
15690	H	38.04	---	9.83	47.87	---	74	54	-6.13
---	H	---	---	---	---	---	---	---	---
10460	V	41.33	---	7.97	49.3	---	68.2	---	-18.9
15690	V	38.72	---	9.83	48.55	---	74	54	-5.45
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH36: 5180MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10360	H	40.47	---	8.02	48.49	---	68.2	---	-19.71
15540	H	37.63	---	9.87	47.5	---	74	54	-6.5
---	H	---	---	---	---	---	---	---	---
10360	V	38.82	---	8.02	46.84	---	68.2	---	-21.36
15540	V	39.50	---	9.87	49.37	---	74	54	-4.63
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH40: 5200MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10400	H	39.37	---	7.97	47.34	---	68.2	---	-20.86
15600	H	38.04	---	9.83	47.87	---	74	54	-6.13
---	H	---	---	---	---	---	---	---	---
10400	V	39.57	---	7.97	47.54	---	68.2	---	-20.66
15600	V	38.69	---	9.83	48.52	---	74	54	-5.48
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH48:5240									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10480	H	37.41	---	7.97	45.38	---	68.2	---	-22.82
15720	H	37.58	---	9.83	47.41	---	74	54	-6.59
---	H	---	---	---	---	---	---	---	---
10480	V	38.02	---	7.97	45.99	---	68.2	---	-22.21
15720	V	38.69	---	9.83	48.52	---	74	54	-5.48
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH38:5190									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10380	H	40.25	---	7.75	48	---	68.2	---	-20.2
15570	H	39.70	---	9.87	49.57	---	74	54	-4.43
---	H	---	---	---	---	---	---	---	---
10380	V	38.37	---	7.75	46.12	---	68.2	---	-22.08
15570	V	38.84	---	9.87	48.71	---	74	54	-5.29
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH46:5230									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10460	H	38.26	---	7.97	46.23	---	68.2	---	-21.97
15690	H	38.75	---	9.83	48.58	---	74	54	-5.42
---	H	---	---	---	---	---	---	---	---
10460	V	39.68	---	7.97	47.65	---	68.2	---	-20.55
15690	V	37.41	---	9.83	47.24	---	74	54	-6.76
---	V	---	---	---	---	---	---	---	---
11ac(VHT80) CH42:5210									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
10420	H	41.59	---	7.96	49.55	---	68.2	---	-18.65
15630	H	39.12	---	9.84	48.96	---	74	54	-5.04
---	H	---	---	---	---	---	---	---	---
10420	V	41.38	---	7.96	49.34	---	68.2	---	-18.86
15630	V	39.60	---	9.84	49.44	---	74	54	-4.56
---	V	---	---	---	---	---	---	---	---

**Note:**

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.



Modulation Type: Band 3									
11a CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
					Peak (dBµV/m)	AV (dBµV/m)			
11490	H	37.24	---	8.09	45.33	---	74	54	-8.67
17235	H	37.59	---	9.67	47.26	---	68.2	---	-20.94
---	H	---	---	---	---	---	---	---	---
11490	V	40.61	---	8.09	48.7	---	74	54	-5.3
17235	V	38.05	---	9.67	47.72	---	68.2	---	-20.48
---	V	---	---	---	---	---	---	---	---
11a CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
					Peak (dBµV/m)	AV (dBµV/m)			
11570	H	39.48	---	8.10	47.58	---	74	54	-6.42
17355	H	38.16	---	9.65	47.81	---	68.2	---	-20.39
---	H	---	---	---	---	---	---	---	---
11570	V	38.94	---	8.10	47.04	---	74	54	-6.96
17355	V	39.02	---	9.65	48.67	---	68.2	---	-19.53
---	V	---	---	---	---	---	---	---	---
11a CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
					Peak (dBµV/m)	AV (dBµV/m)			
11650	H	37.15	---	8.12	45.27	---	74	54	-8.73
17475	H	36.48	---	9.62	46.1	---	68.2	---	-22.1
---	H	---	---	---	---	---	---	---	---
11650	V	38.73	---	8.12	46.85	---	74	54	-7.15
17475	V	38.29	---	9.62	47.91	---	68.2	---	-20.29
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
					Peak (dBµV/m)	AV (dBµV/m)			
11490	H	38.47	---	8.09	46.56	---	74	54	-7.44
17235	H	38.81	---	9.67	48.48	---	68.2	---	-19.72
---	H	---	---	---	---	---	---	---	---
11490	V	39.43	---	8.09	47.52	---	74	54	-6.48
17235	V	37.76	---	9.67	47.43	---	68.2	---	-20.77
---	V	---	---	---	---	---	---	---	---

11n(HT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11570	H	38.24	---	8.10	46.34	---	74	54	-7.66
17355	H	39.71	---	9.65	49.36	---	68.2	---	-18.84
---	H	---	---	---	---	---	---	---	---
11570	V	38.93	---	8.10	47.03	---	74	54	-6.97
17355	V	39.57	---	9.65	49.22	---	68.2	---	-18.98
---	V	---	---	---	---	---	---	---	---
11n(HT20) CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11650	H	38.63	---	8.12	46.75	---	74	54	-7.25
17475	H	37.15	---	9.62	46.77	---	68.2	---	-21.43
---	H	---	---	---	---	---	---	---	---
11650	V	38.72	---	8.12	46.84	---	74	54	-7.16
17475	V	39.48	---	9.62	49.1	---	68.2	---	-19.1
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11510	H	40.23	---	8.09	48.32	---	74	54	-5.68
17265	H	37.61	---	9.67	47.28	---	68.2	---	-20.92
---	H	---	---	---	---	---	---	---	---
11510	V	41.98	---	8.09	50.07	---	74	54	-3.93
17265	V	38.24	---	9.67	47.91	---	68.2	---	-20.29
---	V	---	---	---	---	---	---	---	---
11n(HT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11590	H	38.01	---	8.10	46.11	---	74	54	-7.89
17385	H	38.53	---	9.65	48.18	---	68.2	---	-20.02
---	H	---	---	---	---	---	---	---	---
11590	V	38.36	---	8.10	46.46	---	74	54	-7.54
17385	V	37.50	---	9.65	47.15	---	68.2	---	-21.05
---	V	---	---	---	---	---	---	---	---

11ac(VHT20) CH149: 5745MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11490	H	40.35	---	8.09	48.44	---	74	54	-5.56
17235	H	37.04	---	9.67	46.71	---	68.2	---	-21.49
---	H	---	---	---	---	---	---	---	---
11490	V	40.27	---	8.09	48.36	---	74	54	-5.64
17235	V	38.99	---	9.67	48.66	---	68.2	---	-19.54
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH157: 5785MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11570	H	38.16	---	8.10	46.26	---	74	54	-7.74
17355	H	36.72	---	9.65	46.37	---	68.2	---	-21.83
---	H	---	---	---	---	---	---	---	---
11570	V	37.58	---	8.10	45.68	---	74	54	-8.32
17355	V	38.93	---	9.65	48.58	---	68.2	---	-19.62
---	V	---	---	---	---	---	---	---	---
11ac(VHT20) CH165: 5825MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11650	H	40.64	---	8.12	48.76	---	74	54	-5.24
17475	H	38.15	---	9.62	47.77	---	68.2	---	-20.43
---	H	---	---	---	---	---	---	---	---
11650	V	38.74	---	8.12	46.86	---	74	54	-7.14
17475	V	40.26	---	9.62	49.88	---	68.2	---	-18.32
---	V	---	---	---	---	---	---	---	---
11ac(VHT40) CH151: 5755MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11510	H	39.41	---	8.09	47.5	---	74	54	-6.5
17265	H	37.68	---	9.67	47.35	---	68.2	---	-20.85
---	H	---	---	---	---	---	---	---	---
11510	V	40.79	---	8.09	48.88	---	74	54	-5.12
17265	V	36.11	---	9.67	45.78	---	68.2	---	-22.42
---	V	---	---	---	---	---	---	---	---

11ac(VHT40) CH159: 5795MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11590	H	40.37	---	8.10	48.47	---	74	54	-5.53
17385	H	37.22	---	9.65	46.87	---	68.2	---	-21.33
---	H	---	---	---	---	---	---	---	---
11590	V	39.64	---	8.10	47.74	---	74	54	-6.26
17385	V	38.01	---	9.65	47.66	---	68.2	---	-20.54
---	V	---	---	---	---	---	---	---	---
11ac(VHT80) CH155: 5775MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBμV)	AV reading (dBμV)	Correction Factor (dB/m)	Emission Level		Peak limit (dBμV/m)	AV limit (dBμV/m)	Margin (dB)
					Peak (dBμV/m)	AV (dBμV/m)			
11550	H	40.28	---	8.09	48.37	---	74	54	-5.63
17325	H	38.93	---	9.66	48.59	---	68.2	---	-19.61
---	H	---	---	---	---	---	---	---	---
11550	V	41.35	---	8.09	49.44	---	74	54	-4.56
17325	V	38.76	---	9.66	48.42	---	68.2	---	-19.78
---	V	---	---	---	---	---	---	---	---

**Note:**

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBμV/m)-Average limit (dBμV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency. The highest test frequency is 40GHz.
5. Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

## 5.9. Frequency Stability Measurement

### 5.9.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
<b>Test Method:</b>	ANSI C63.10: 2013
<b>Limit:</b>	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
<b>Test Setup:</b>	<pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]     subgraph TC [Temperature Chamber]         EUT     end     P[AC/DC Power supply] --- EUT     </pre>
<b>Test Procedure:</b>	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
<b>Test Result:</b>	PASS
<b>Remark:</b>	Pre-scan was performed at all models(11a,11n,11ac), the worst case (11ac) was found and test data was shown in this report.

Test plots as follows:

Test mode:		802.11ac(HT20)	Frequency(MHz):	5180
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5179.94	-60000	PASS
35		5179.98	-20000	PASS
25		5179.98	-20000	PASS
15		5179.96	-40000	PASS
5		5179.94	-60000	PASS
0		5179.96	-40000	PASS
25	3.3V	5179.98	-20000	PASS
	3.8V	5179.96	-40000	PASS
	4.3V	5179.96	-40000	PASS

Test mode:		802.11ac(HT20)	Frequency(MHz):	5200
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5199.96	-40000	PASS
35		5199.96	-40000	PASS
25		5199.94	-60000	PASS
15		5199.98	-20000	PASS
5		5199.96	-40000	PASS
0		5199.96	-40000	PASS
25	3.3V	5199.98	-20000	PASS
	3.8V	5199.96	-40000	PASS
	4.3V	5199.96	-40000	PASS

Test mode:		802.11ac(HT20)	Frequency(MHz):	5240
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5239.94	-60000	PASS
35		5239.96	-40000	PASS
25		5239.94	-60000	PASS
15		5239.92	-80000	PASS
5		5239.96	-40000	PASS
0		5239.96	-40000	PASS
25	3.3V	5239.94	-60000	PASS
	3.8V	5239.92	-80000	PASS
	4.3V	5239.96	-40000	PASS

Test mode:		802.11ac(HT20)	Frequency(MHz):	5745
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5744.96	-40000	PASS
35		5744.94	-60000	PASS
25		5744.9	-100000	PASS
15		5744.96	-40000	PASS
5		5744.92	-80000	PASS
0		5744.92	-80000	PASS
25	3.3V	5744.96	-40000	PASS
	3.8V	5744.92	-80000	PASS
	4.3V	5744.92	-80000	PASS

Test mode:		802.11ac(HT20)	Frequency(MHz):	5785
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5784.94	-60000	PASS
35		5784.92	-80000	PASS
25		5784.96	-40000	PASS
15		5784.96	-40000	PASS
5		5784.96	-40000	PASS
0		5784.92	-80000	PASS
25	3.3V	5784.96	-40000	PASS
	3.8V	5784.96	-40000	PASS
	4.3V	5784.94	-60000	PASS

Test mode:		802.11ac(HT20)	Frequency(MHz):	5825
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5824.98	-20000	PASS
35		5824.96	-40000	PASS
25		5824.96	-40000	PASS
15		5824.98	-20000	PASS
5		5824.96	-40000	PASS
0		5825.02	20000	PASS
25	3.3V	5824.98	-20000	PASS
	3.8V	5824.94	-60000	PASS
	4.3V	5824.96	-40000	PASS



Test mode:		802.11ac(HT40)	Frequency(MHz):	5190
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5189.92	-80000	PASS
35		5190	0	PASS
25		5189.96	-40000	PASS
15		5189.96	-40000	PASS
5		5189.96	-40000	PASS
0		5189.96	-40000	PASS
25	3.3V	5190	0	PASS
	3.8V	5189.96	-40000	PASS
	4.3V	5190	0	PASS

Test mode:		802.11ac(HT40)	Frequency(MHz):	5230
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5229.96	-40000	PASS
35		5229.92	-80000	PASS
25		5229.96	-40000	PASS
15		5229.96	-40000	PASS
5		5229.96	-40000	PASS
0		5229.96	-40000	PASS
25	3.3V	5229.92	-80000	PASS
	3.8V	5229.96	-40000	PASS
	4.3V	5229.96	-40000	PASS

Test mode:		802.11ac(HT40)	Frequency(MHz):	5755
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5754.88	-120000	PASS
35		5754.92	-80000	PASS
25		5754.72	-280000	PASS
15		5754.92	-80000	PASS
5		5754.92	-80000	PASS
0		5754.88	-120000	PASS
25	3.3V	5754.92	-80000	PASS
	3.8V	5754.92	-80000	PASS
	4.3V	5754.96	-40000	PASS



Test mode:		802.11ac(HT40)	Frequency(MHz):	5795
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5795	0	PASS
35		5794.96	-40000	PASS
25		5794.96	-40000	PASS
15		5795	0	PASS
5		5795	0	PASS
0		5794.96	-40000	PASS
25	3.3V	5794.96	-40000	PASS
	3.8V	5794.96	-40000	PASS
	4.3V	5794.96	-40000	PASS

Test mode:		802.11ac(VHT80)	Frequency(MHz):	5210
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5210	0	PASS
35		5210	0	PASS
25		5210	0	PASS
15		5210	0	PASS
5		5210	0	PASS
0		5210	0	PASS
25	3.3V	5210	0	PASS
	3.8V	5210	0	PASS
	4.3V	5210	0	PASS


Test mode:		802.11ac(VHT80)	Frequency(MHz):	5775
Temperature (°C)	Voltage(VDC)	Measurement Frequency(MHz)	Delta Frequency(Hz)	Result
45	3.8V	5775	0	PASS
35		5775	0	PASS
25		5774.92	-80000	PASS
15		5775	0	PASS
5		5774.92	-80000	PASS
0		5774.92	-80000	PASS
25	3.3V	5775	0	PASS
	3.8V	5774.92	-80000	PASS
	4.3V	5774.92	-80000	PASS

**Appendix A: Test Result of Conducted Test**


**Duty Cycle**

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	100	0
NVNT	a	5200	100	0
NVNT	a	5240	100	0
NVNT	n20	5180	100	0
NVNT	n20	5200	100	0
NVNT	n20	5240	100	0
NVNT	n40	5190	100	0
NVNT	n40	5230	100	0
NVNT	ac20	5180	100	0
NVNT	ac20	5200	100	0
NVNT	ac20	5240	100	0
NVNT	ac40	5190	100	0
NVNT	ac40	5230	100	0
NVNT	ac80	5210	100	0
NVNT	a	5745	100	0
NVNT	a	5785	100	0
NVNT	a	5825	100	0
NVNT	n20	5745	100	0
NVNT	n20	5785	100	0
NVNT	n20	5825	100	0
NVNT	n40	5755	100	0
NVNT	n40	5795	100	0
NVNT	ac20	5745	100	0
NVNT	ac20	5785	100	0
NVNT	ac20	5825	100	0
NVNT	ac40	5755	100	0
NVNT	ac40	5795	100	0
NVNT	ac80	5775	100	0


Test Graphs  
Duty Cycle NVNT a 5180MHz

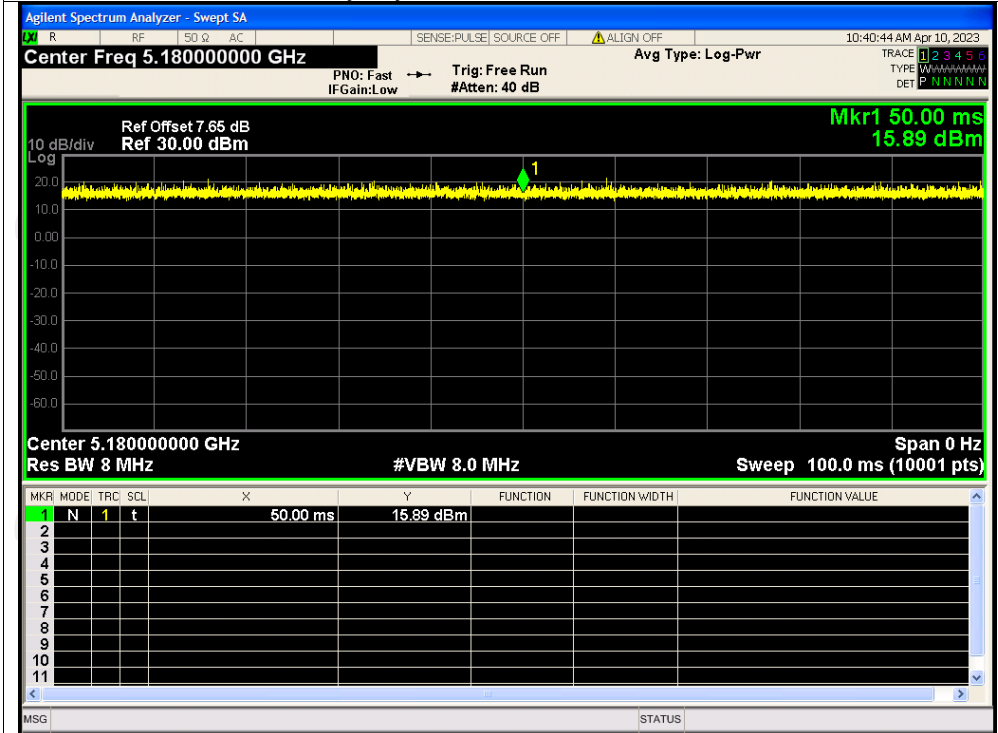


Duty Cycle NVNT a 5200MHz

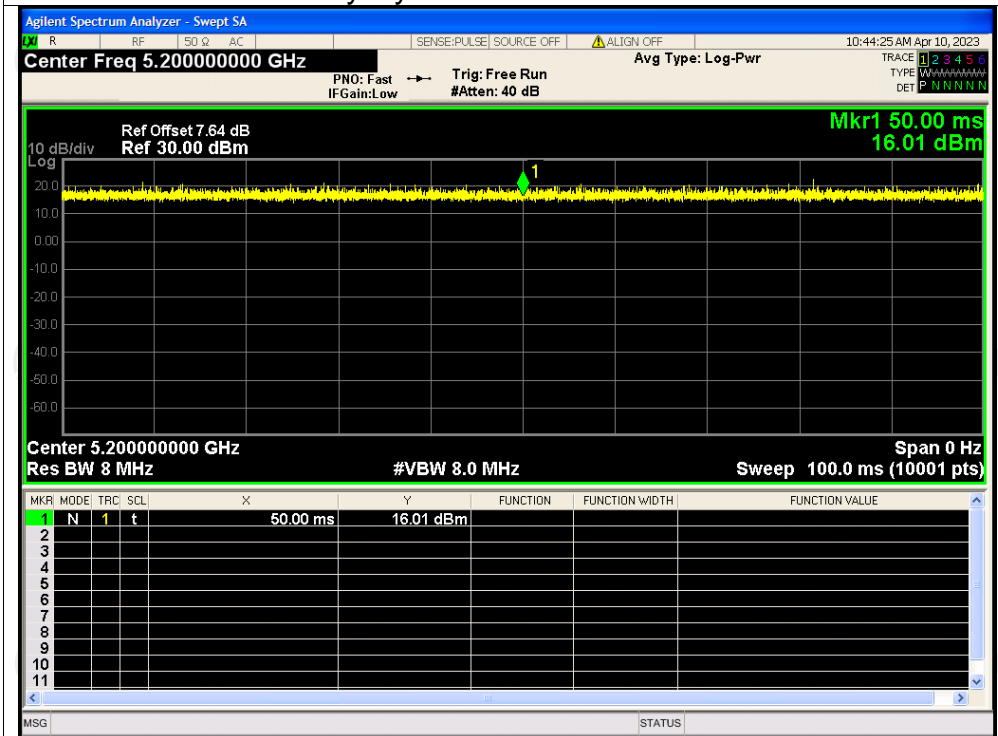


### Duty Cycle NVNT a 5240MHz

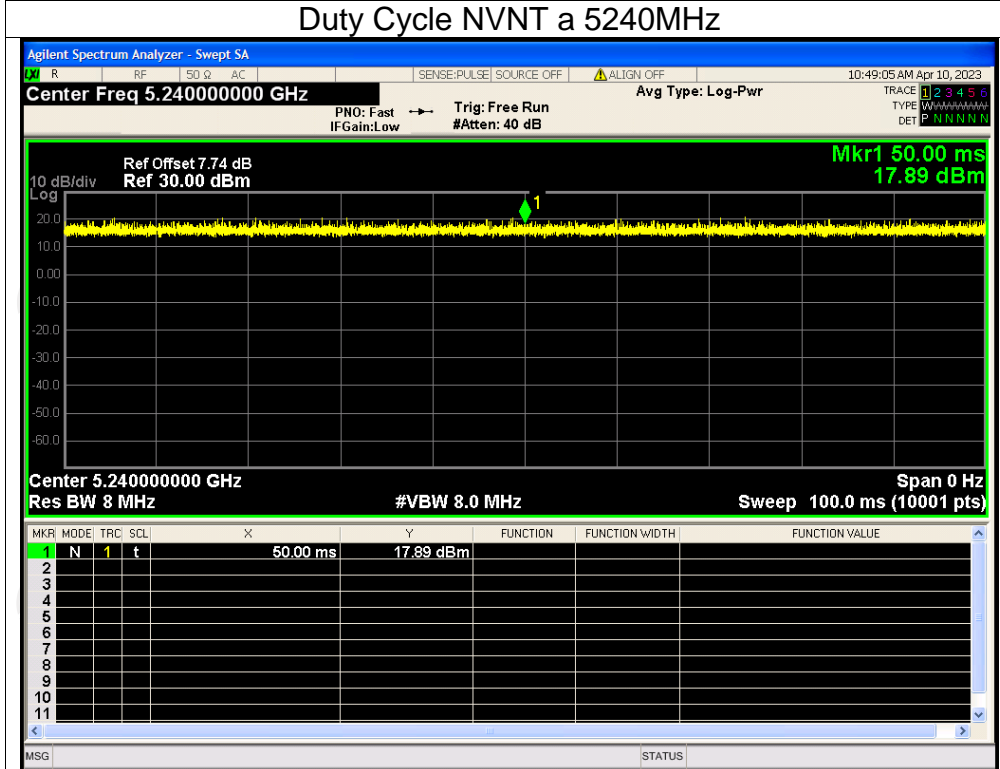


### Duty Cycle NVNT n20 5180MHz

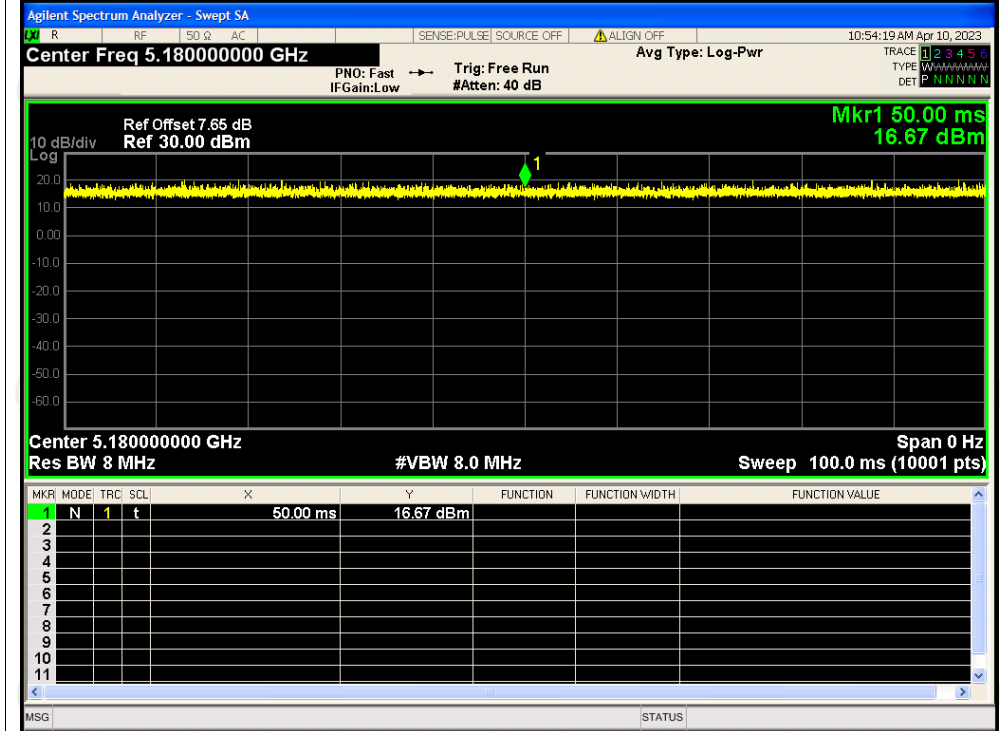


## Duty Cycle NVNT n20 5200MHz

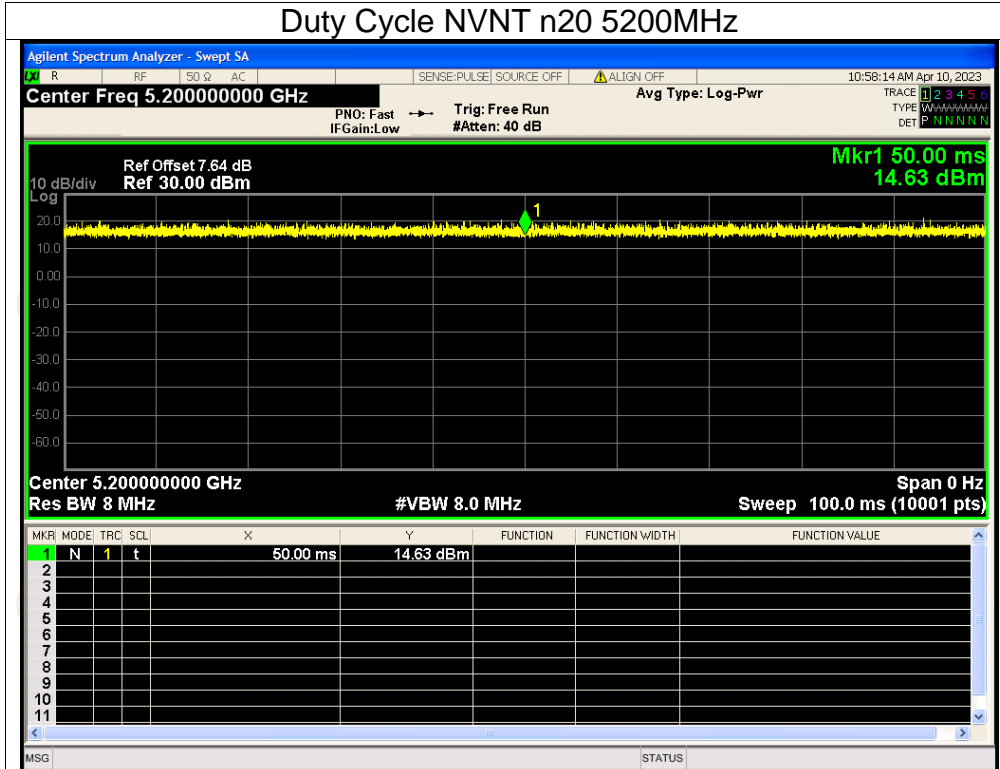


## Duty Cycle NVNT n20 5240MHz

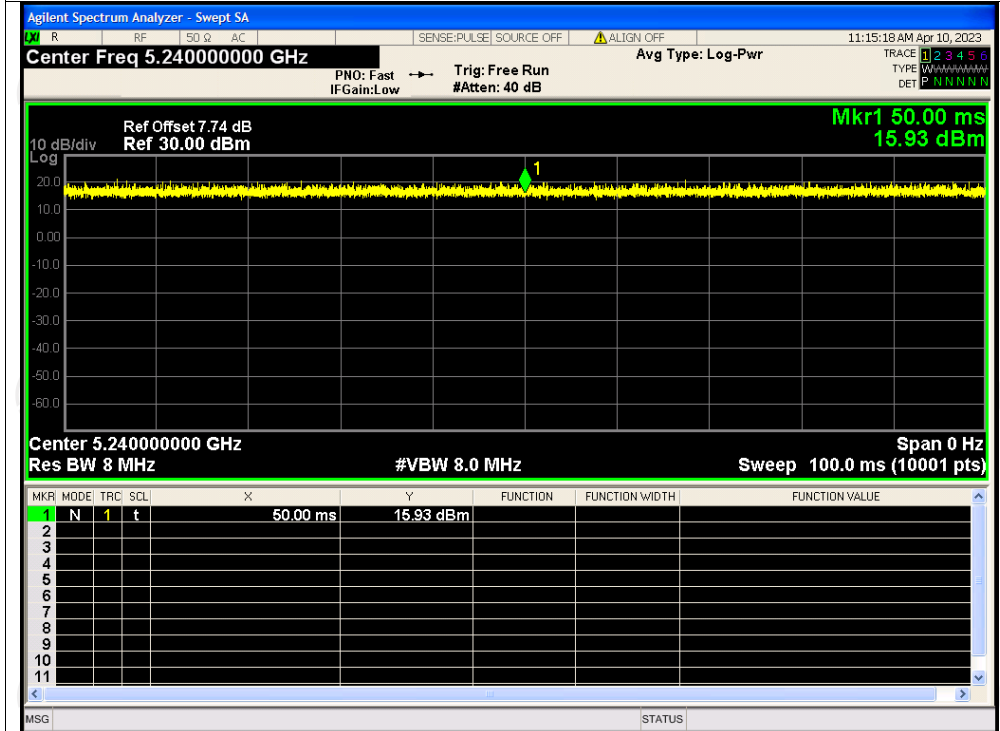


### Duty Cycle NVNT n40 5190MHz

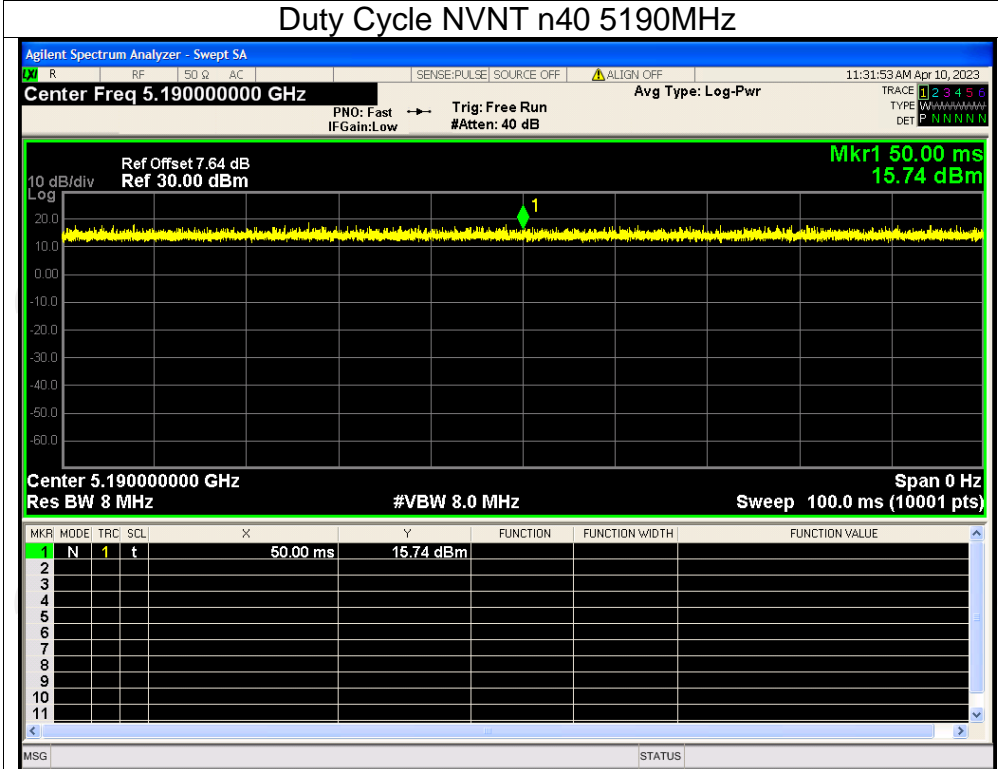


### Duty Cycle NVNT n40 5230MHz

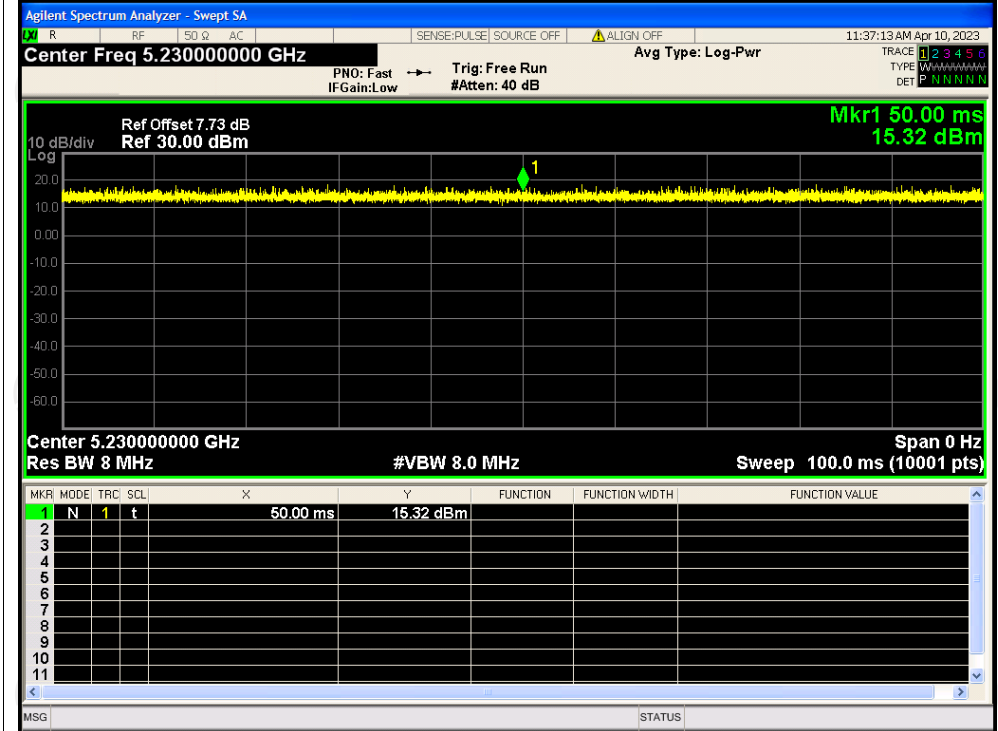


### Duty Cycle NVNT ac20 5180MHz

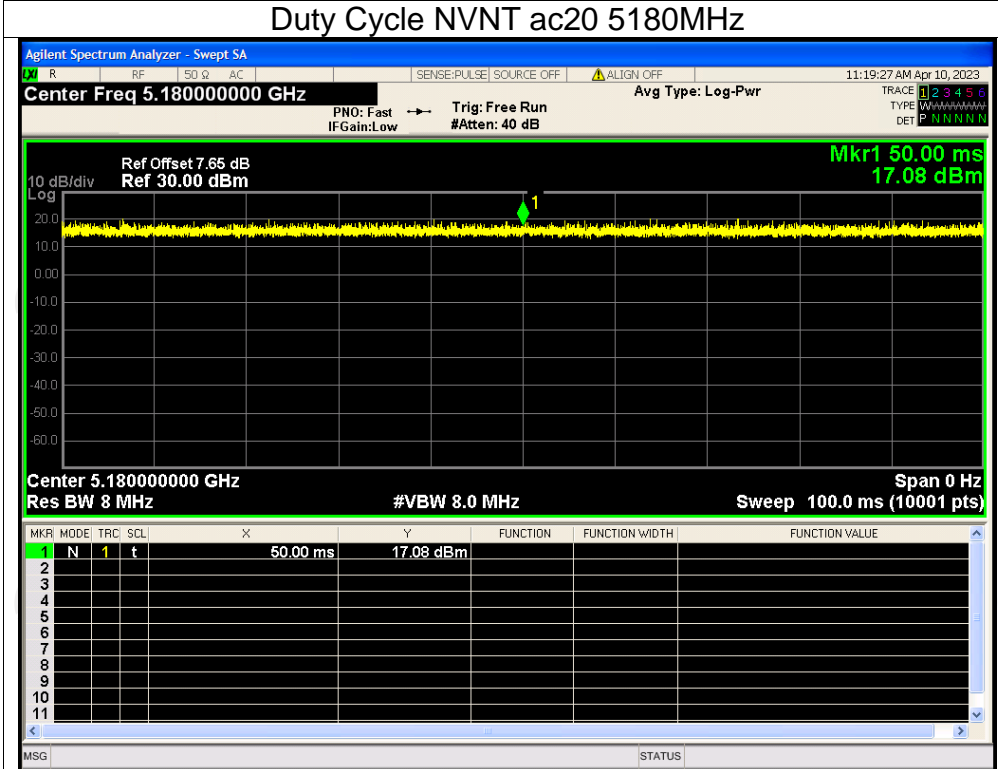


### Duty Cycle NVNT ac20 5200MHz

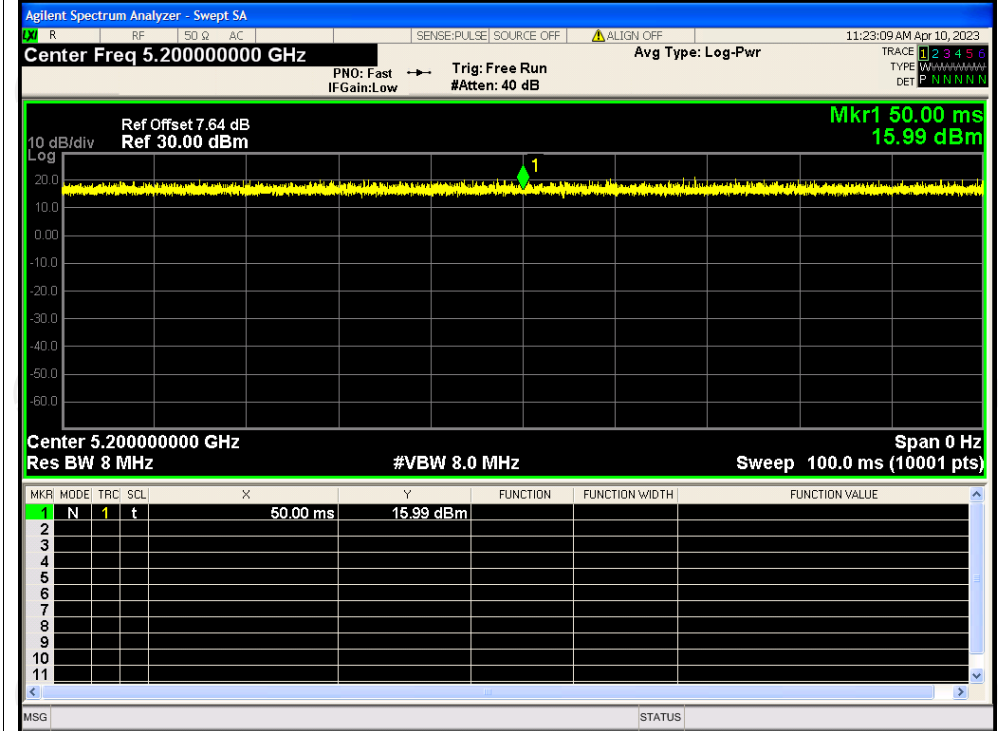

### Duty Cycle NVNT ac20 5240MHz

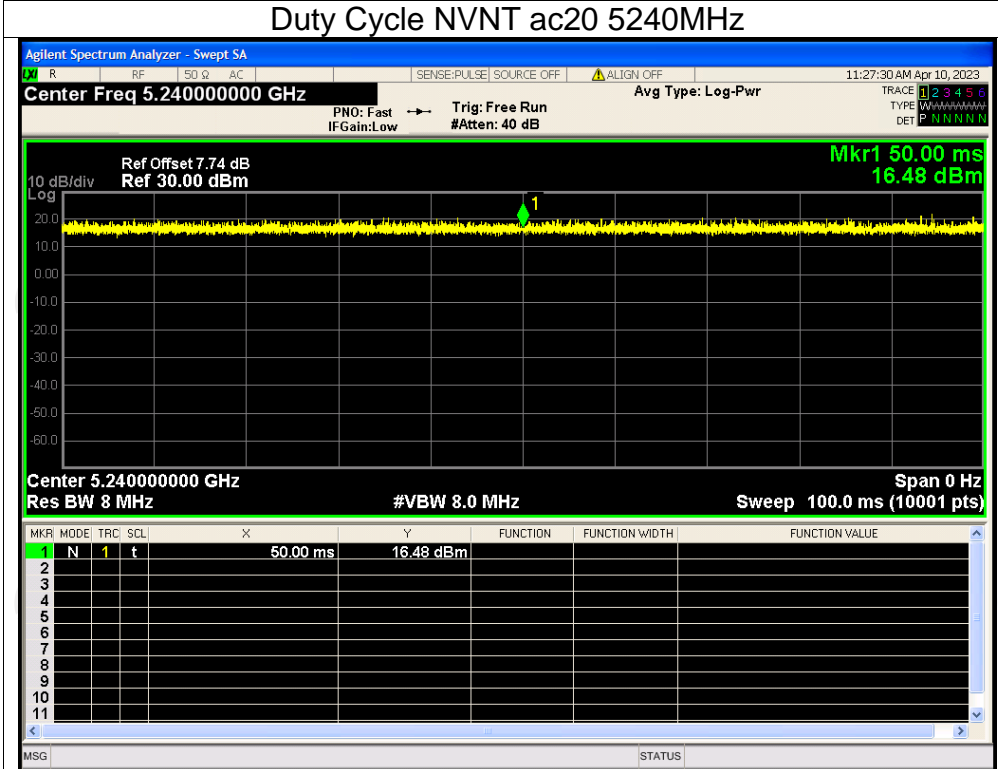


### Duty Cycle NVNT ac40 5190MHz

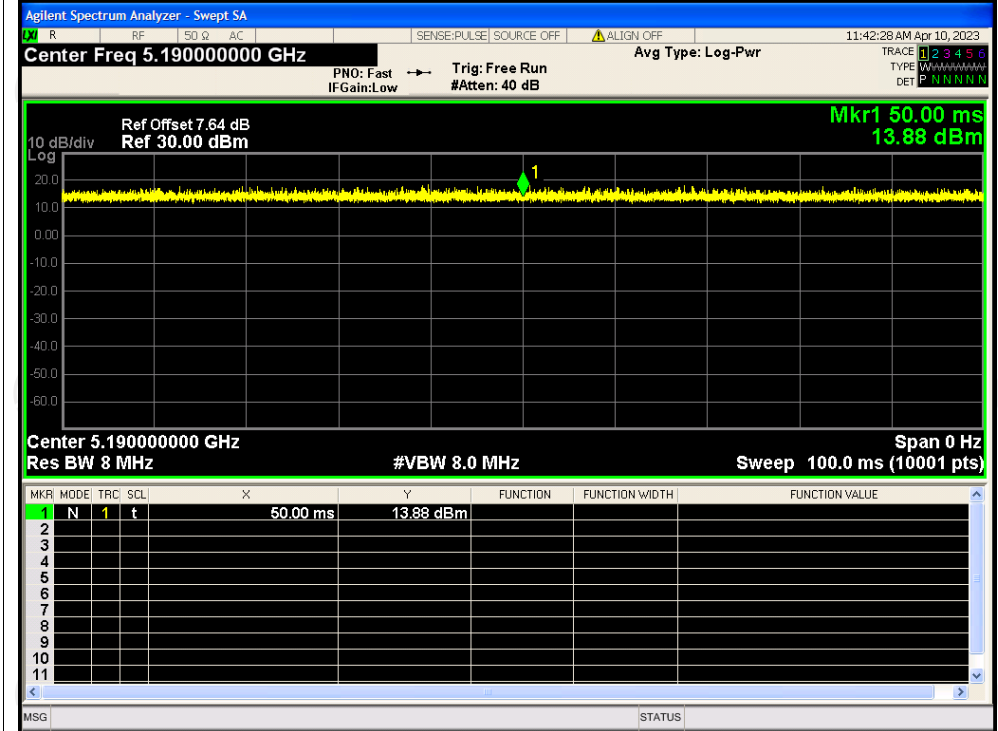





### Duty Cycle NVNT ac40 5230MHz

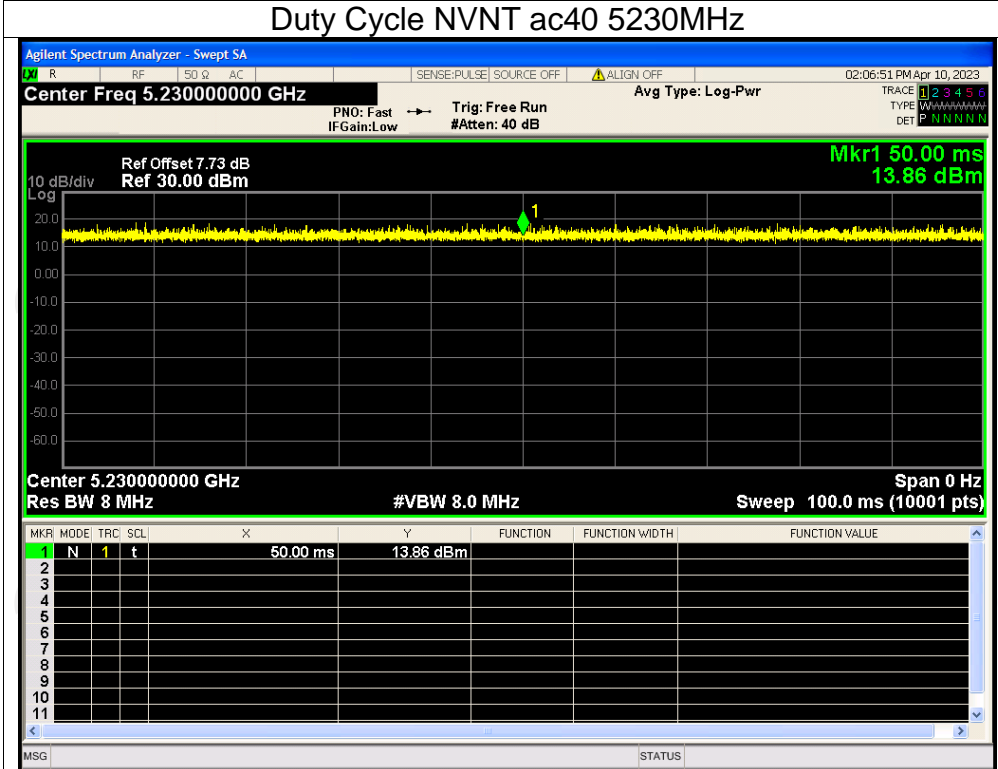


### Duty Cycle NVNT ac80 5210MHz

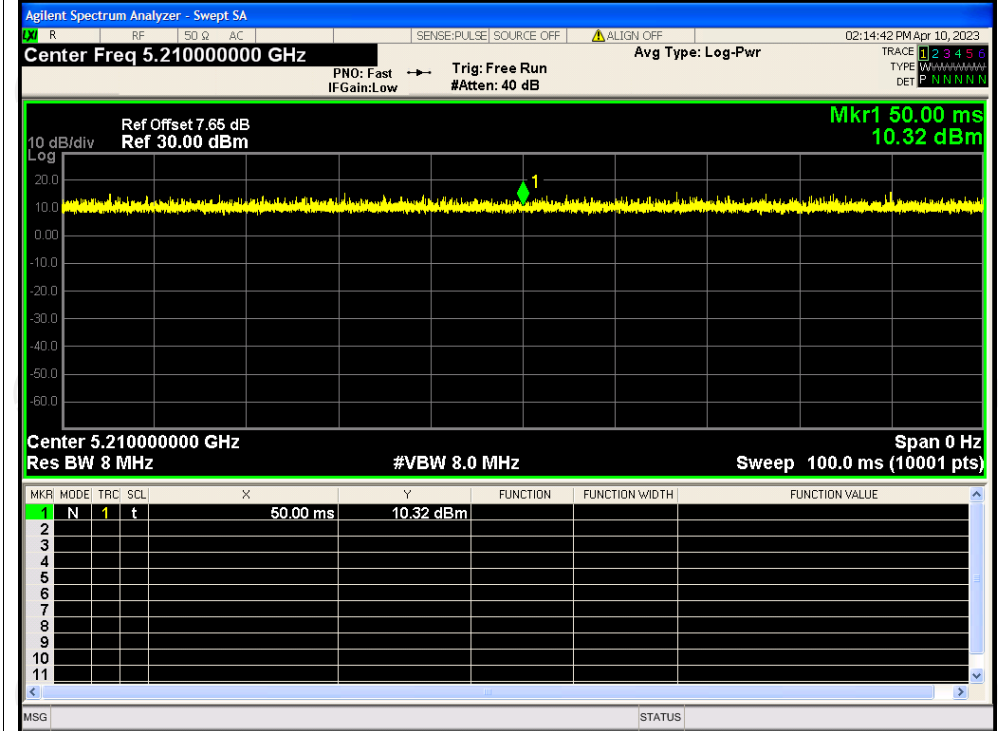


Test Graphs  
Duty Cycle NVNT a 5745MHz

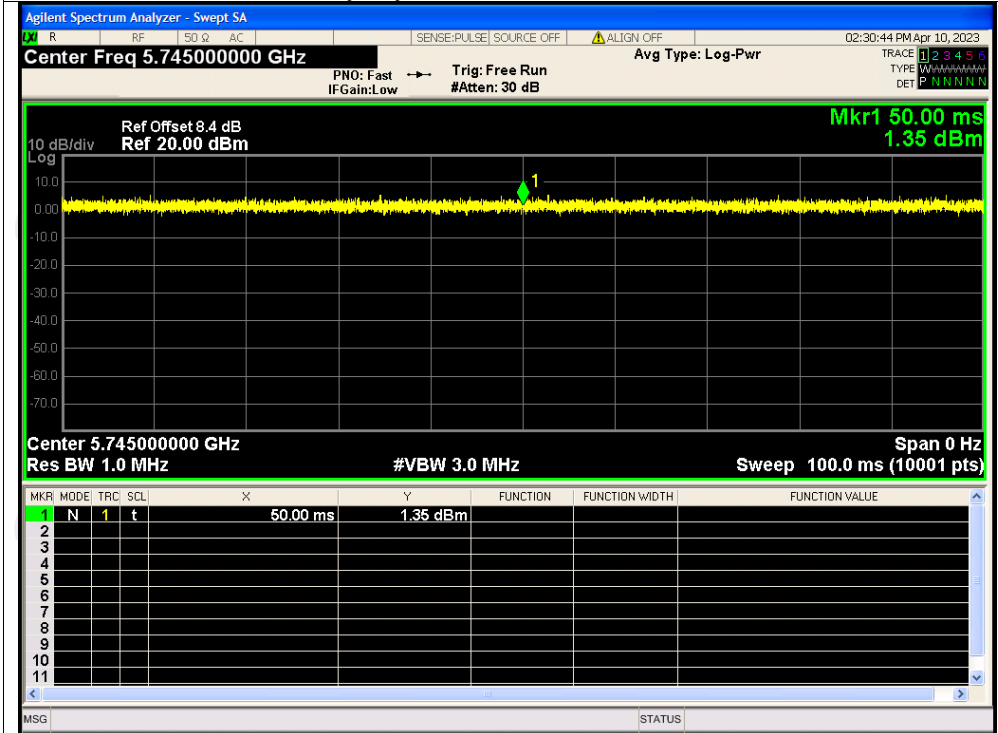


Duty Cycle NVNT a 5785MHz

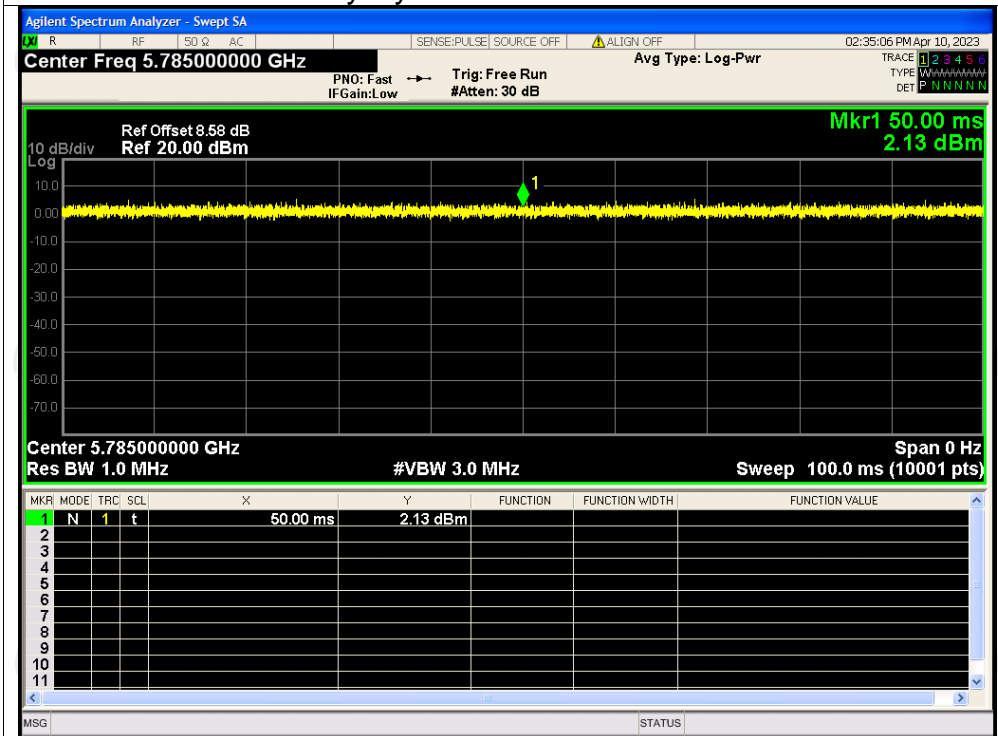


## Duty Cycle NVNT a 5825MHz

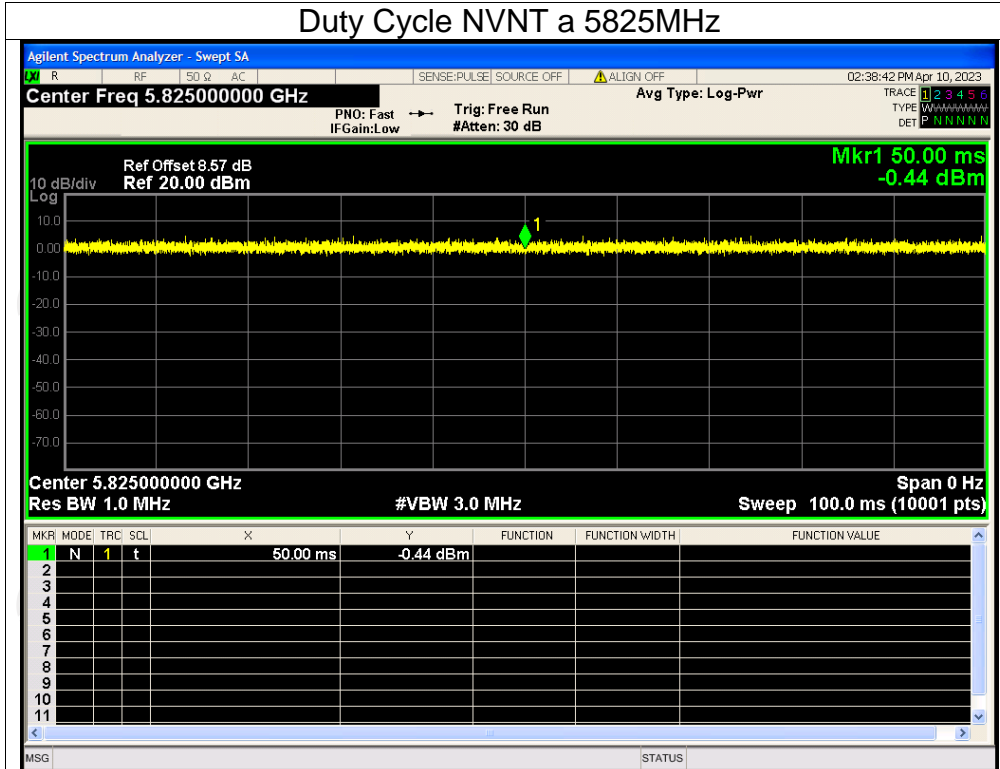


## Duty Cycle NVNT n20 5745MHz

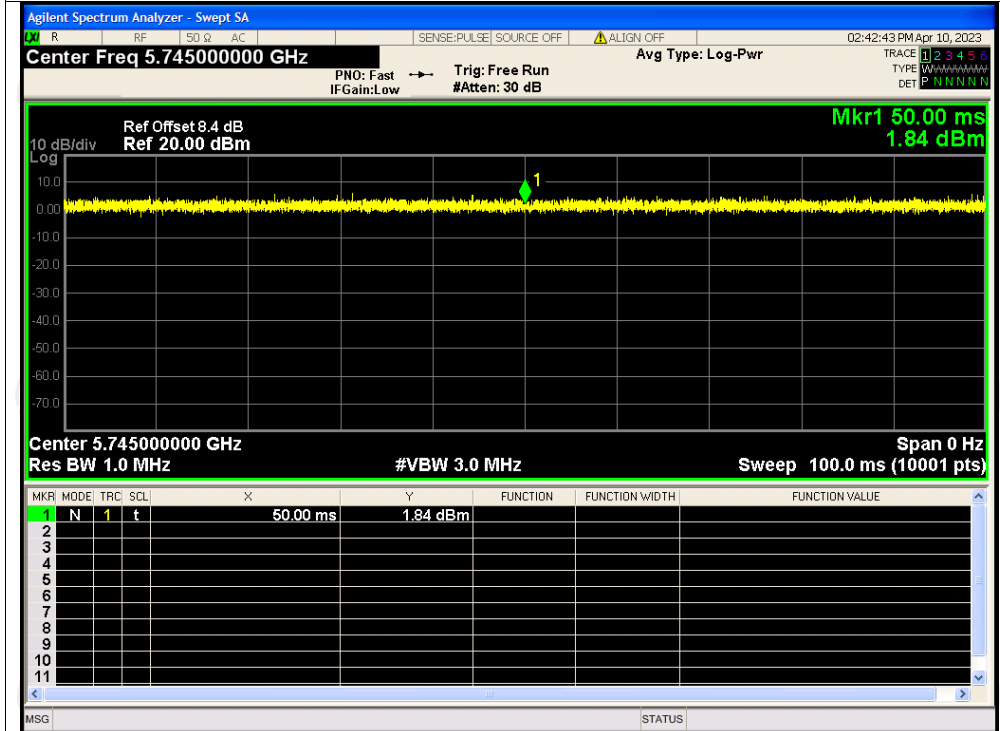


### Duty Cycle NVNT n20 5785MHz

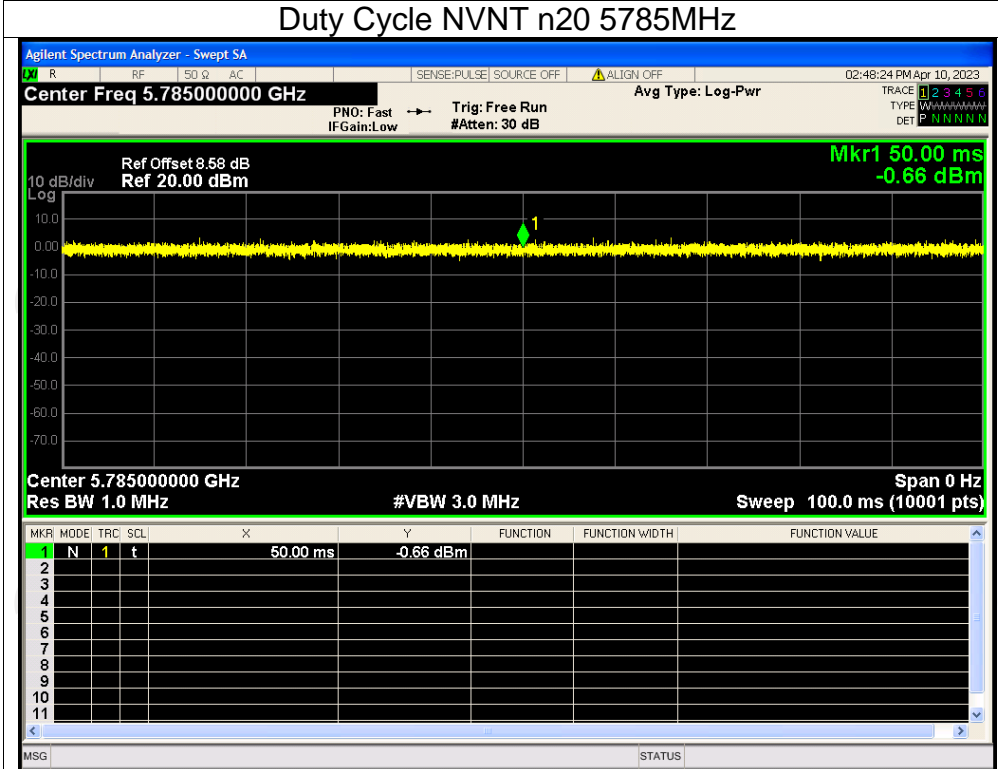


### Duty Cycle NVNT n20 5825MHz

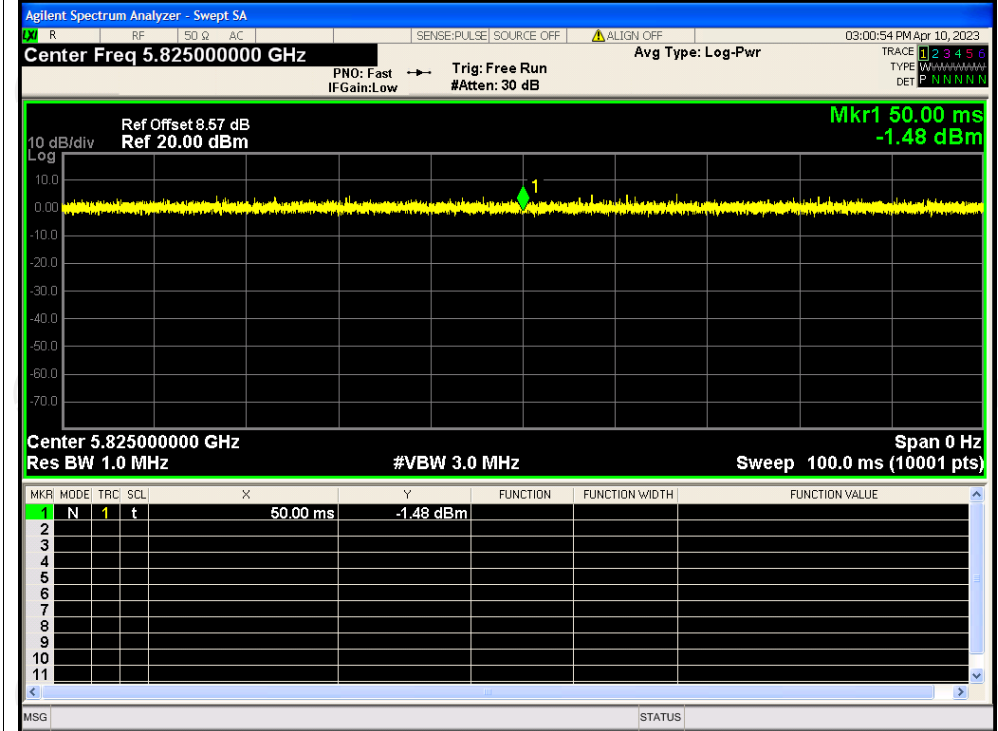


### Duty Cycle NVNT n40 5755MHz

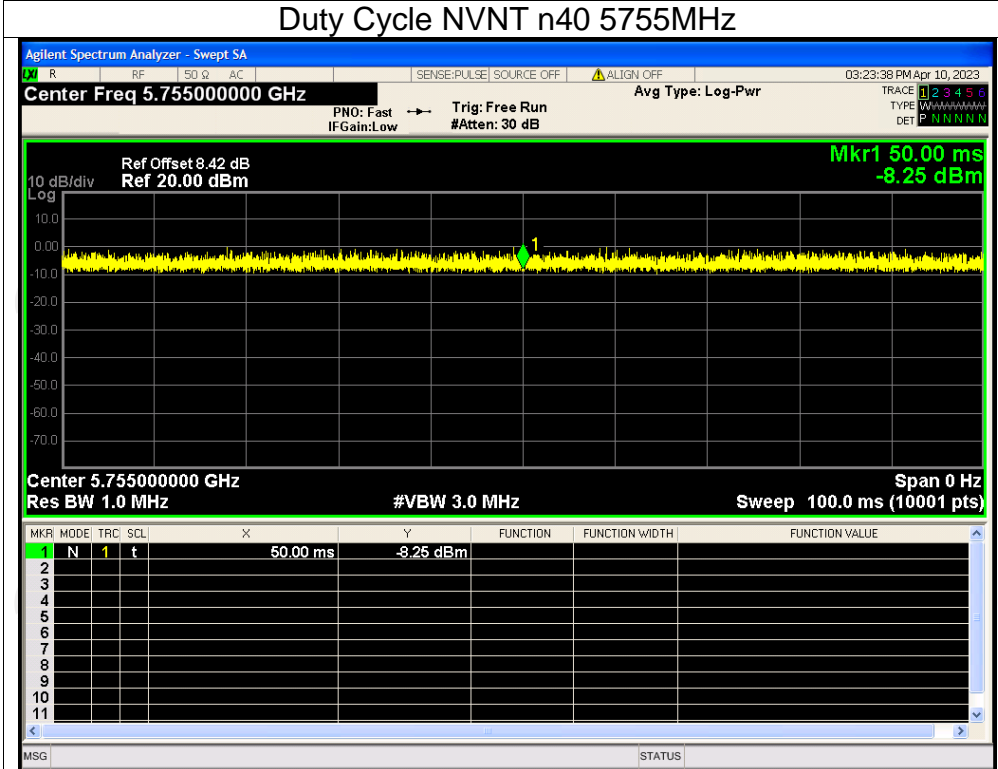


### Duty Cycle NVNT n40 5795MHz

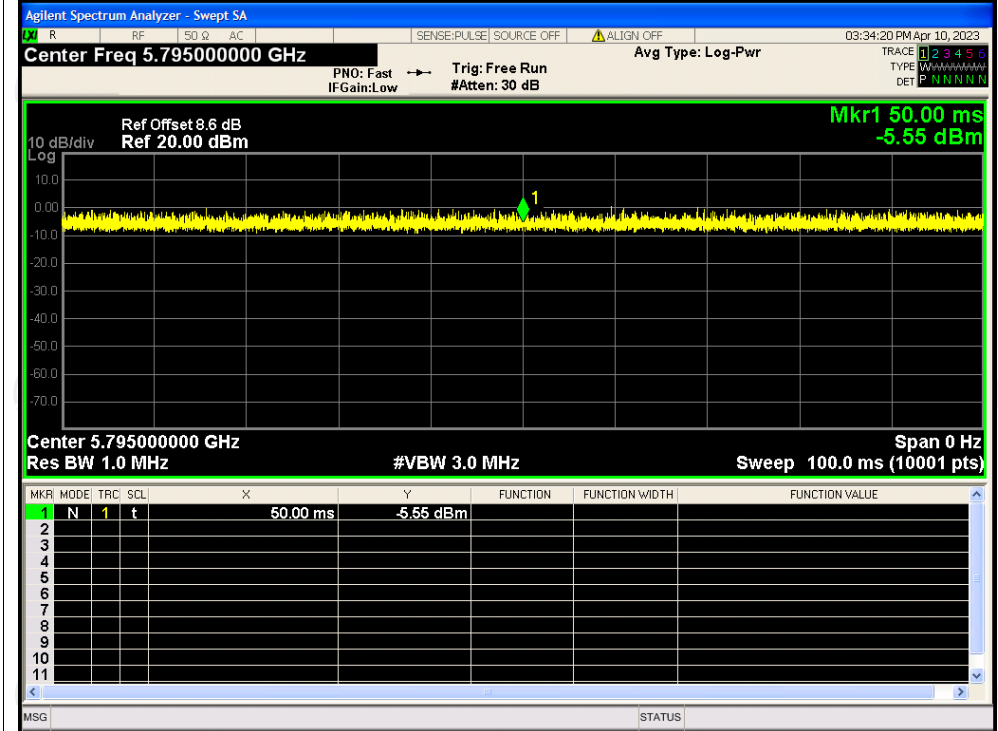


Duty Cycle NVNT ac20 5745MHz

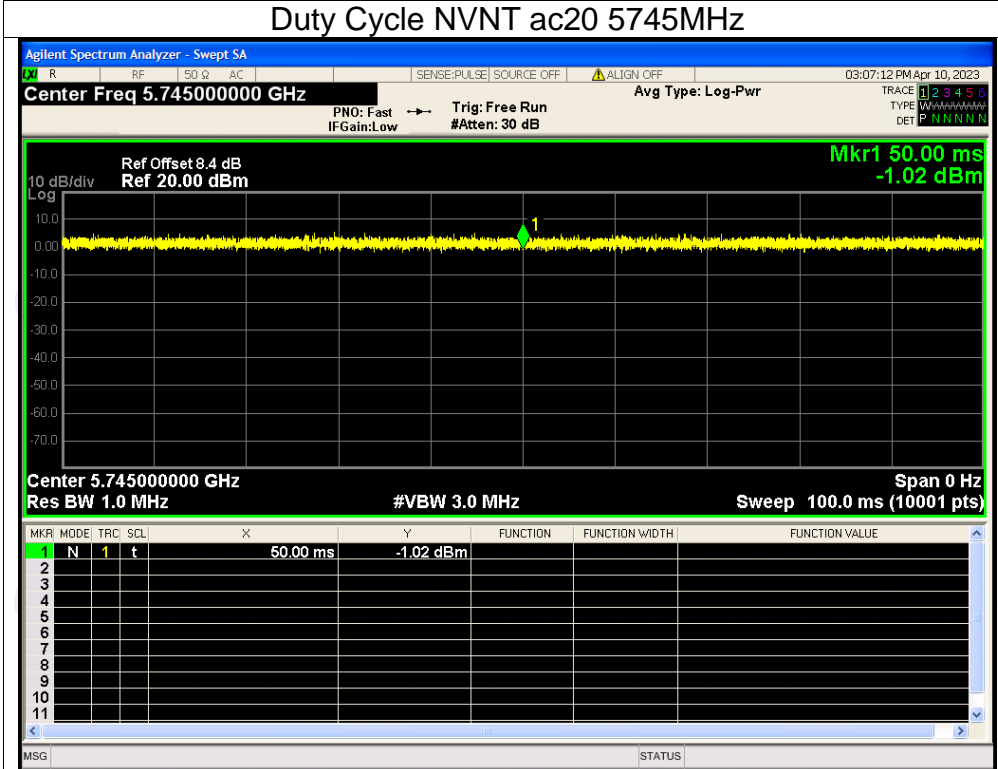


Duty Cycle NVNT ac20 5785MHz

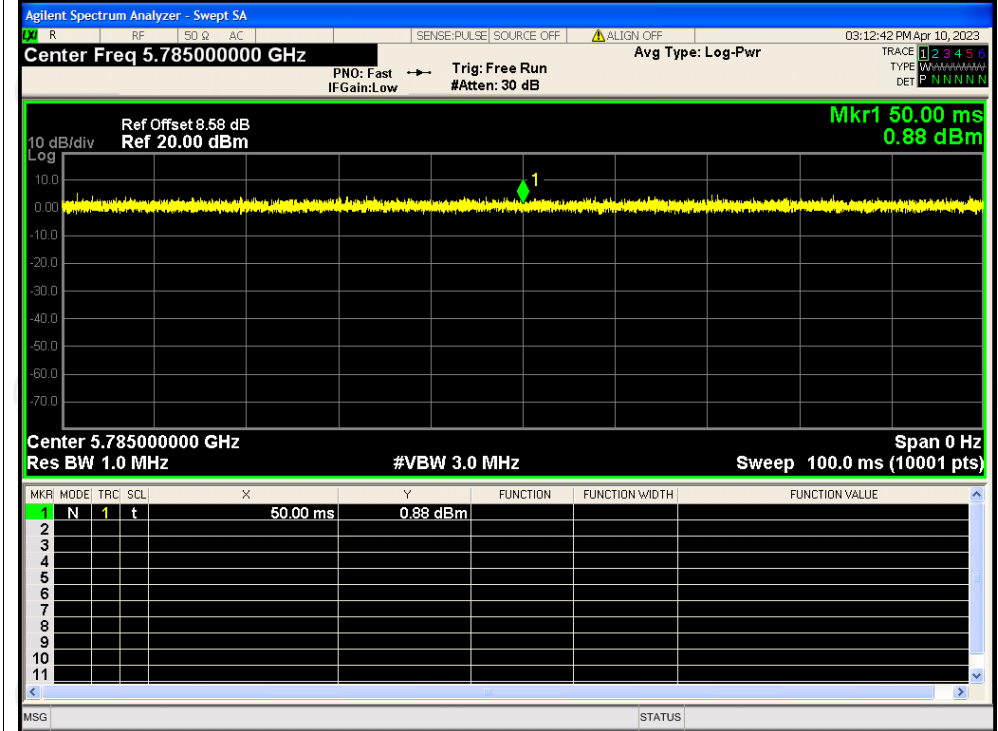


### Duty Cycle NVNT ac20 5825MHz

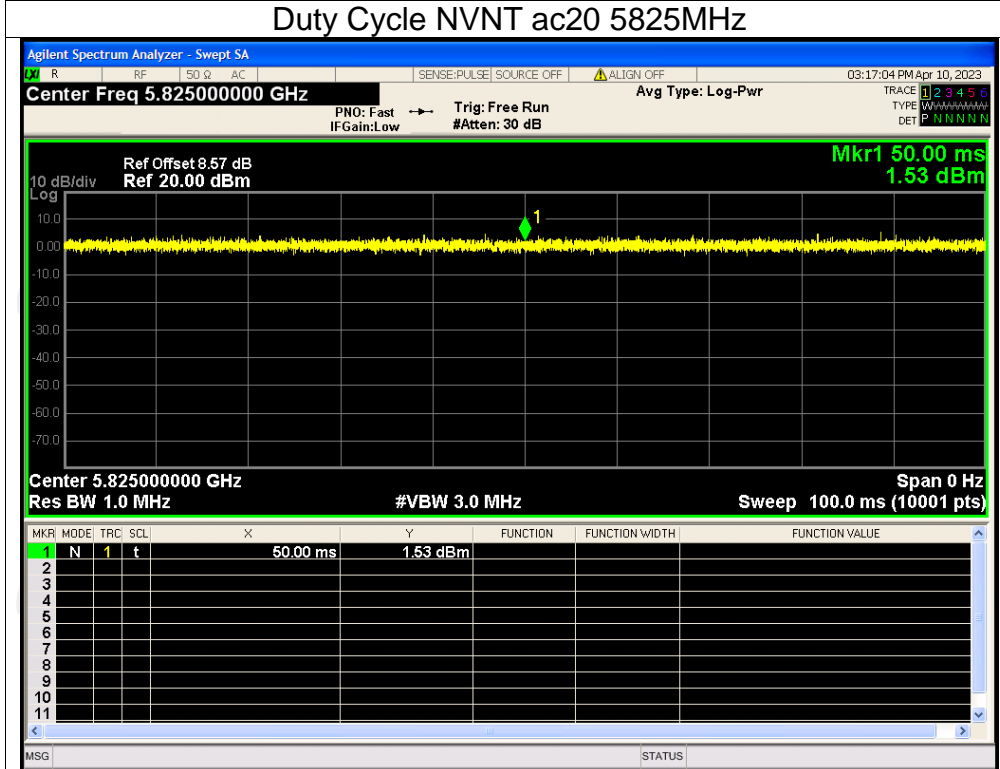


### Duty Cycle NVNT ac40 5755MHz

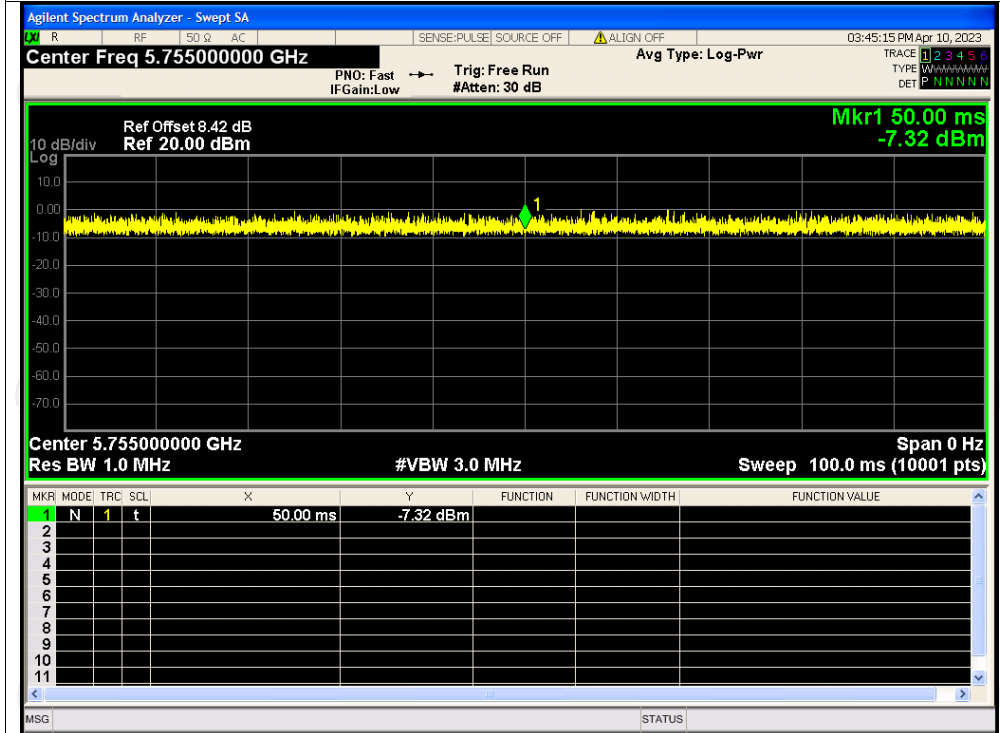

### Duty Cycle NVNT ac40 5795MHz

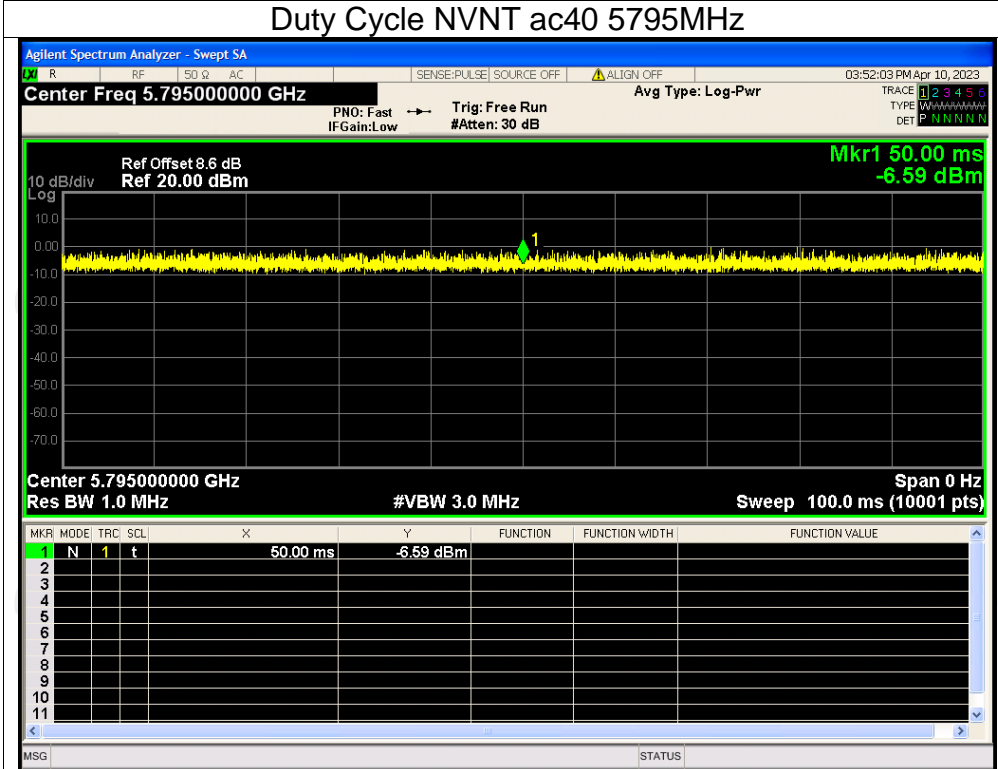

### Duty Cycle NVNT ac80 5775MHz

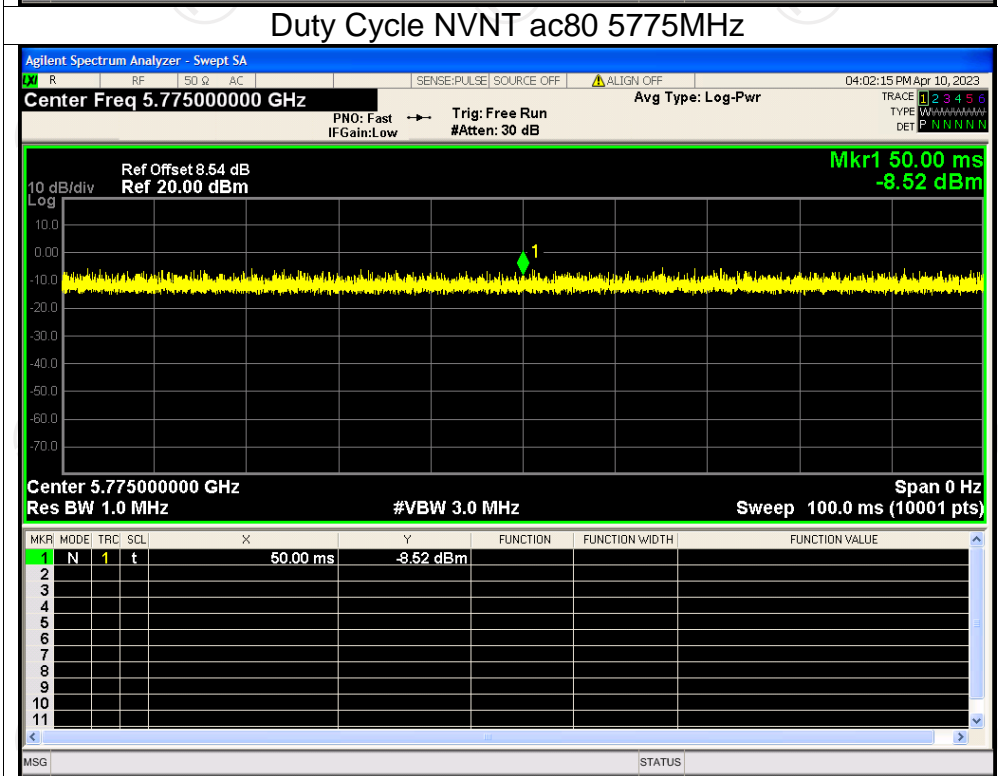




**Maximum Conducted Output Power**


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	11.30	0	11.30	24	Pass
NVNT	a	5200	11.98	0	11.98	24	Pass
NVNT	a	5240	11.19	0	11.19	24	Pass
NVNT	n20	5180	11.10	0	11.10	24	Pass
NVNT	n20	5200	11.78	0	11.78	24	Pass
NVNT	n20	5240	11.96	0	11.96	24	Pass
NVNT	n40	5190	12.31	0	12.31	24	Pass
NVNT	n40	5230	12.21	0	12.21	24	Pass
NVNT	ac20	5180	11.08	0	11.08	24	Pass
NVNT	ac20	5200	12.05	0	12.05	24	Pass
NVNT	ac20	5240	11.99	0	11.99	24	Pass
NVNT	ac40	5190	12.30	0	12.30	24	Pass
NVNT	ac40	5230	12.22	0	12.22	24	Pass
NVNT	ac80	5210	11.87	0	11.87	24	Pass
NVNT	a	5745	7.49	0	7.49	30	Pass
NVNT	a	5785	7.07	0	7.07	30	Pass
NVNT	a	5825	6.60	0	6.60	30	Pass
NVNT	n20	5745	7.72	0	7.72	30	Pass
NVNT	n20	5785	5.19	0	5.19	30	Pass
NVNT	n20	5825	6.24	0	6.24	30	Pass
NVNT	n40	5755	6.87	0	6.87	30	Pass
NVNT	n40	5795	7.01	0	7.01	30	Pass
NVNT	ac20	5745	7.53	0	7.53	30	Pass
NVNT	ac20	5785	6.90	0	6.90	30	Pass
NVNT	ac20	5825	6.72	0	6.72	30	Pass
NVNT	ac40	5755	6.83	0	6.83	30	Pass
NVNT	ac40	5795	6.55	0	6.55	30	Pass
NVNT	ac80	5775	5.39	0	5.39	30	Pass

Test Graphs


Power NVNT a 5180MHz

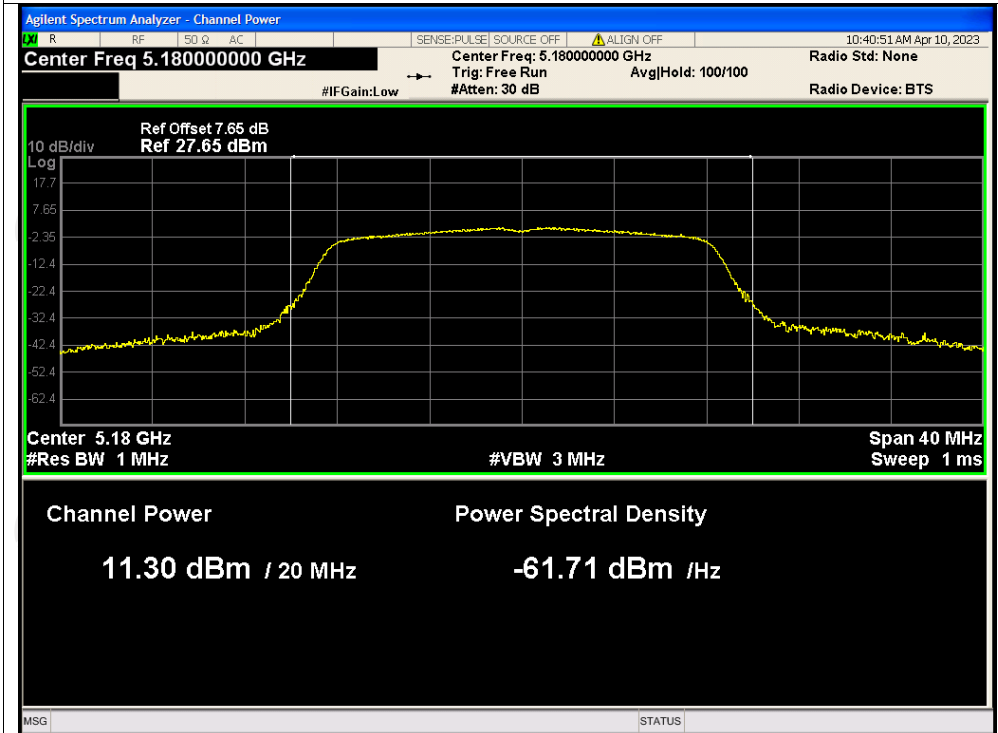


Power NVNT a 5200MHz

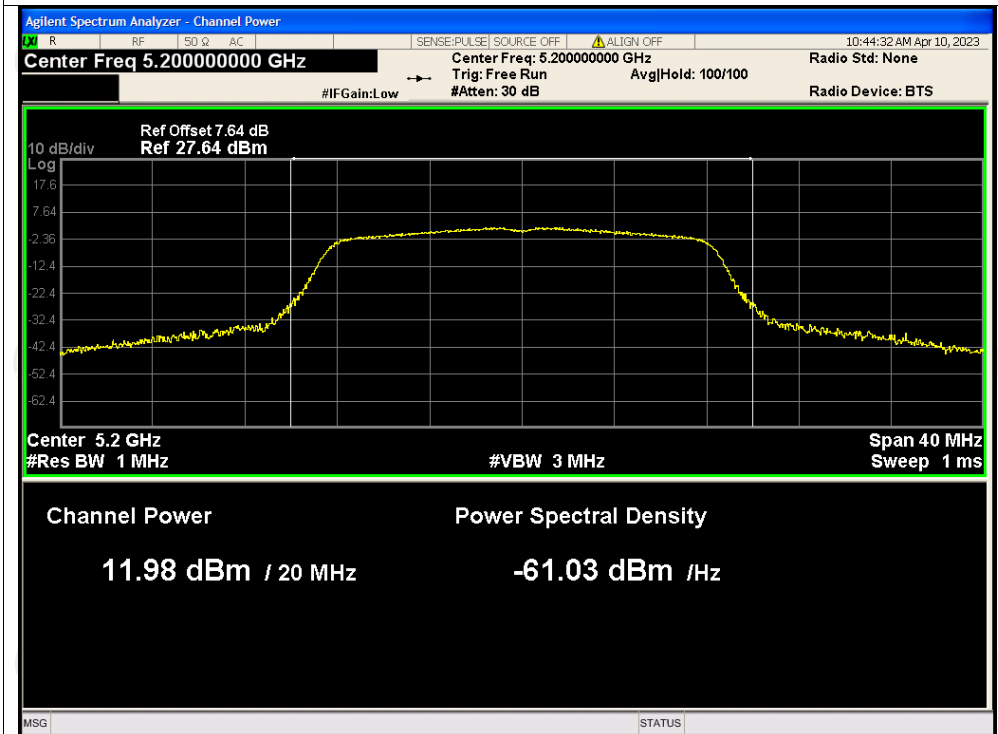


Power NVNT a 5240MHz

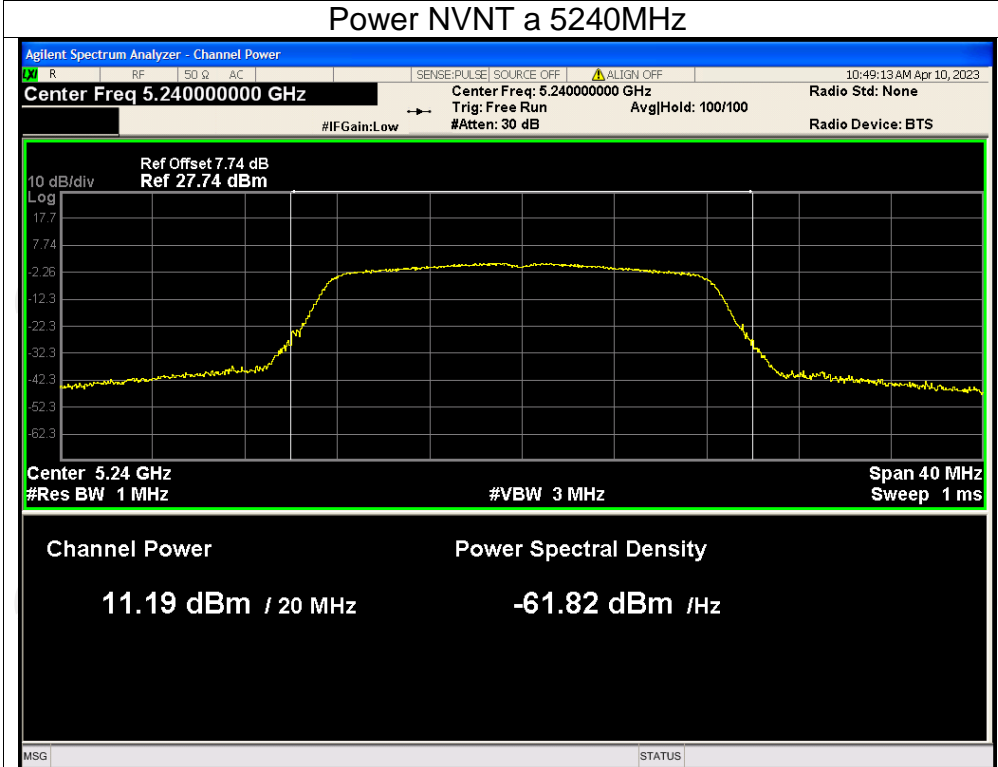


Power NVNT n20 5180MHz

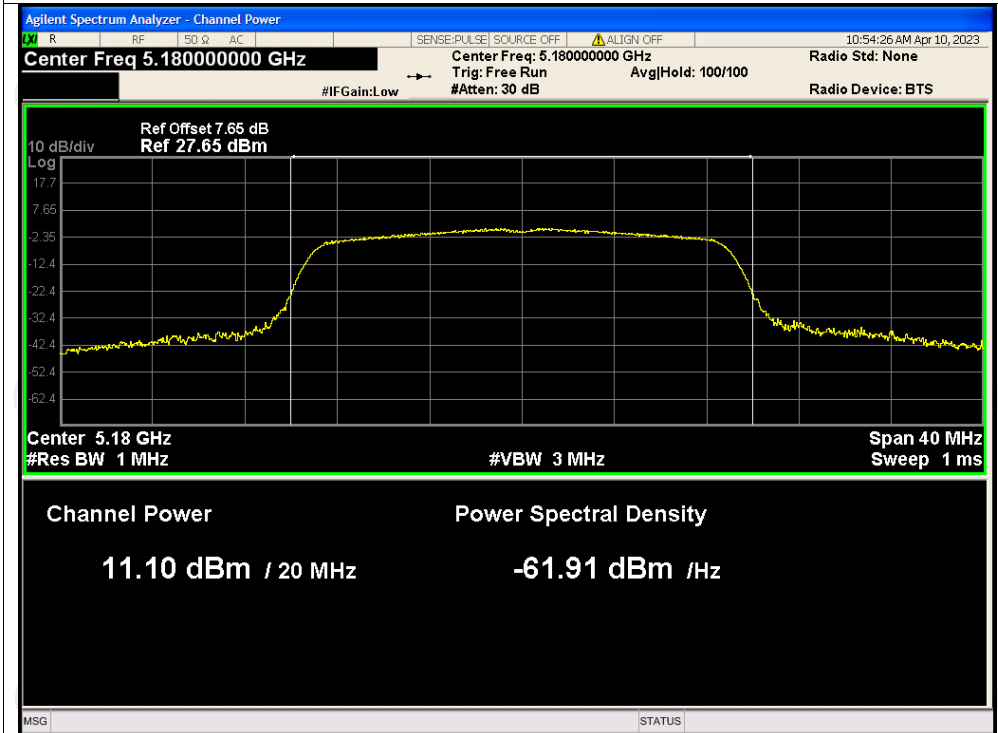


Power NVNT n20 5200MHz

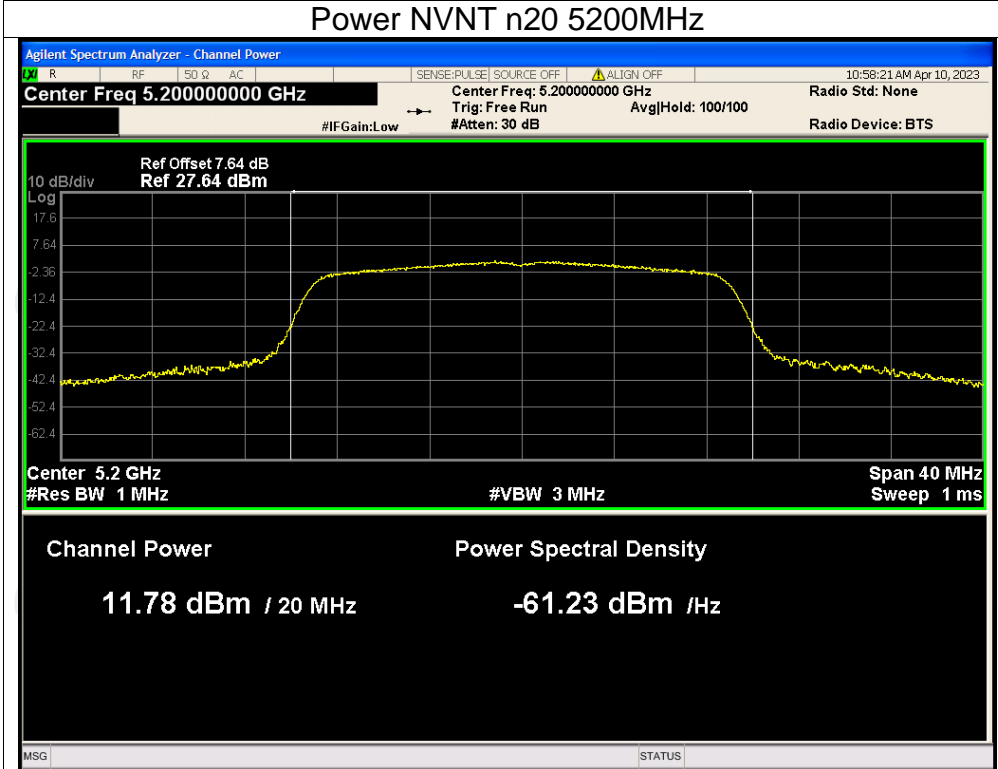


Power NVNT n20 5240MHz

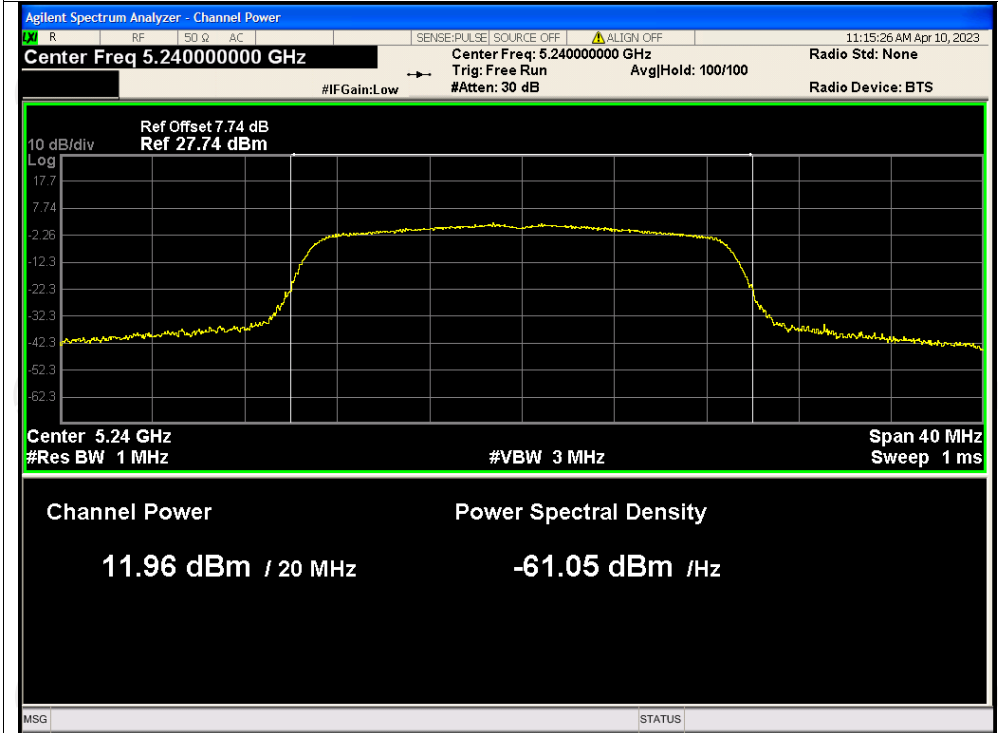


Power NVNT n40 5190MHz

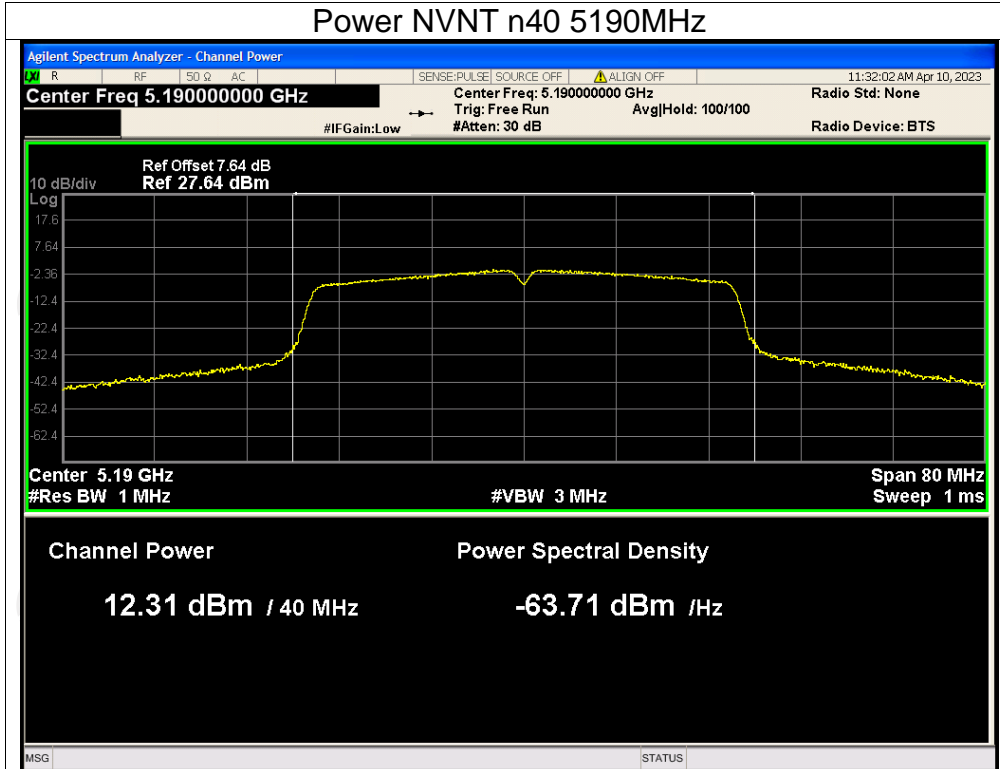


Power NVNT n40 5230MHz

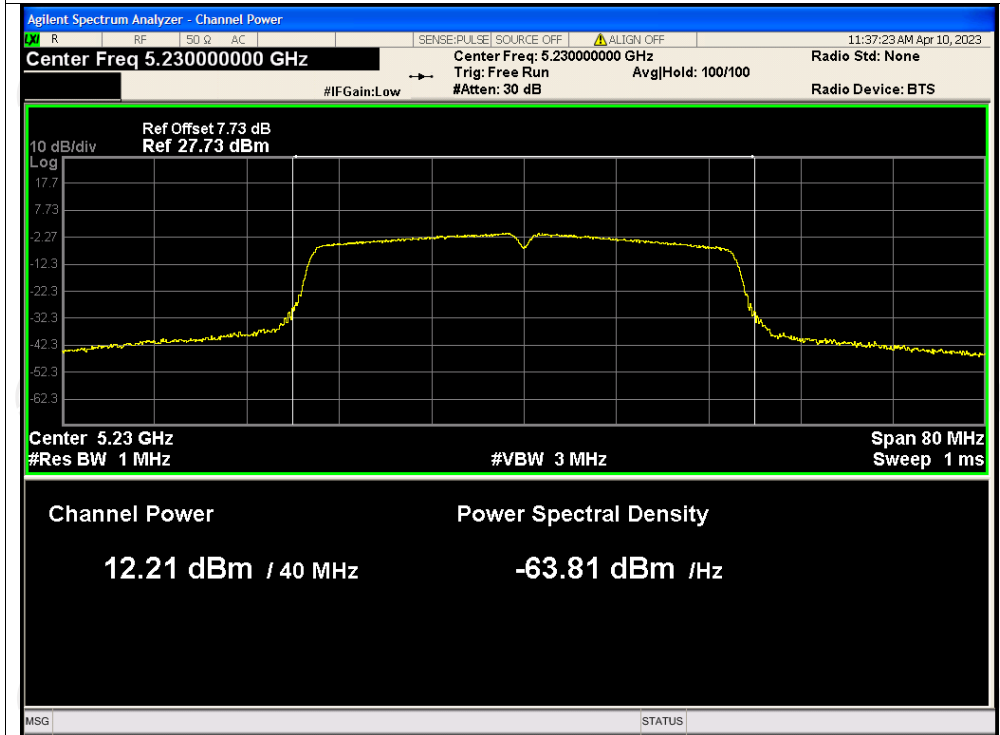


Power NVNT ac20 5180MHz

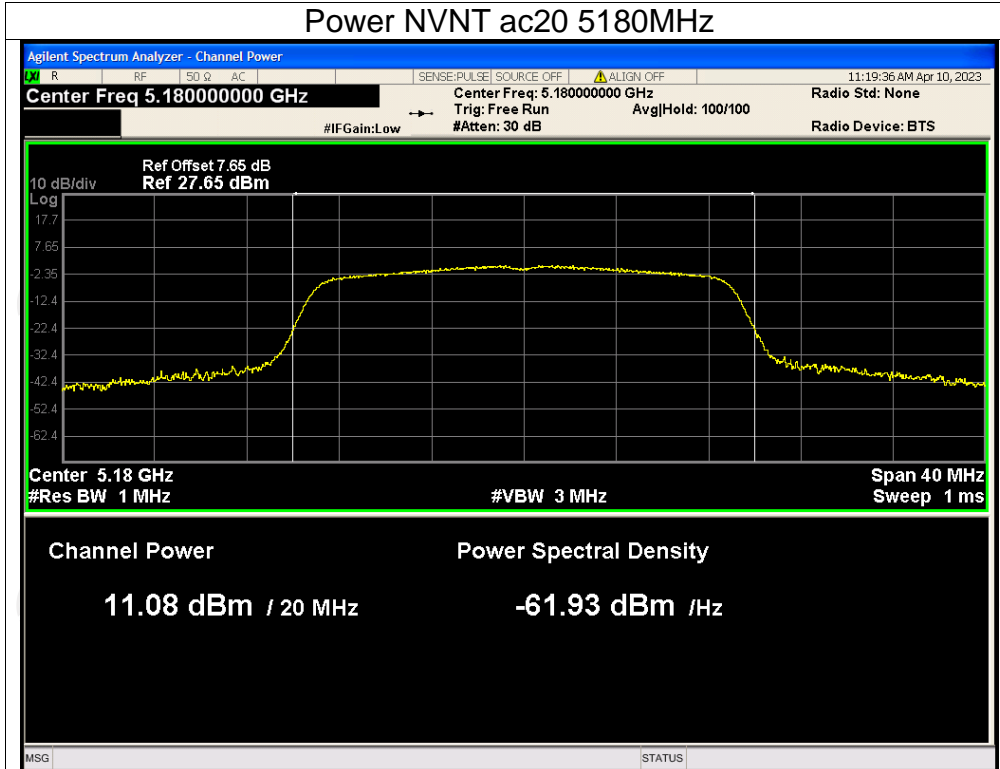


Power NVNT ac20 5200MHz

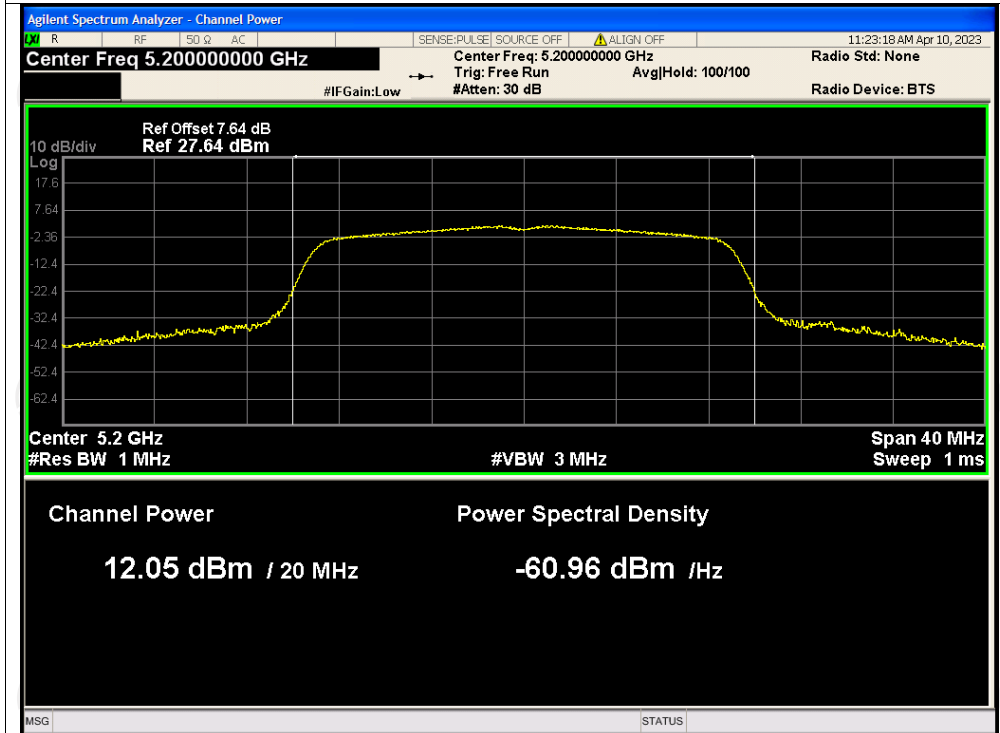


Power NVNT ac20 5240MHz

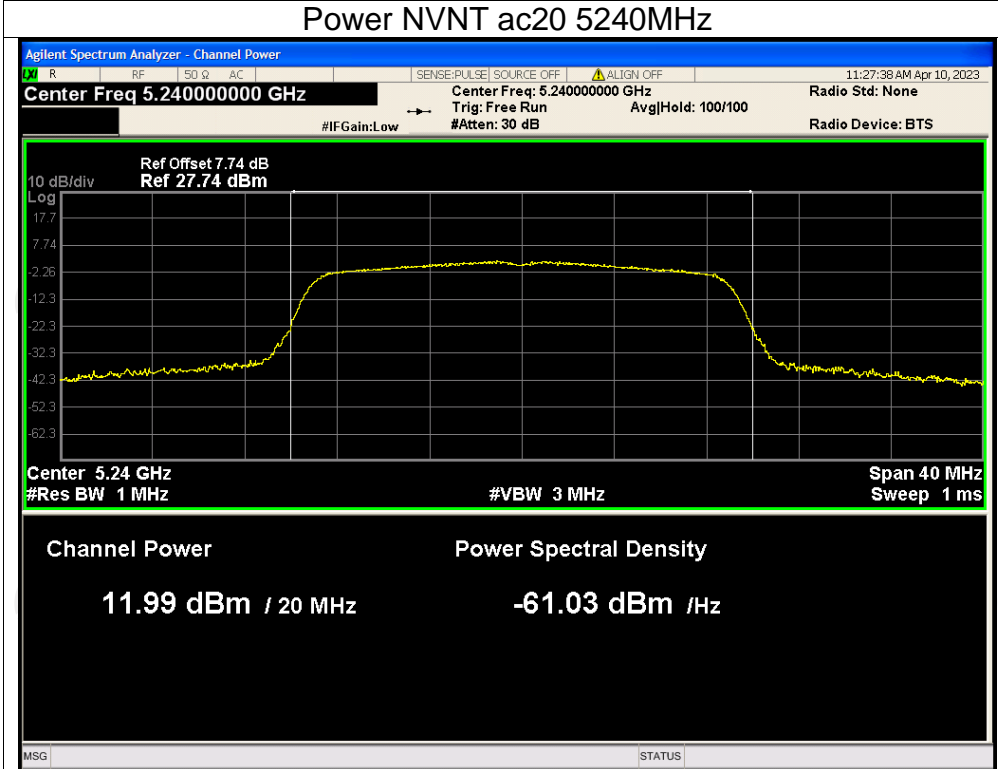


Power NVNT ac40 5190MHz

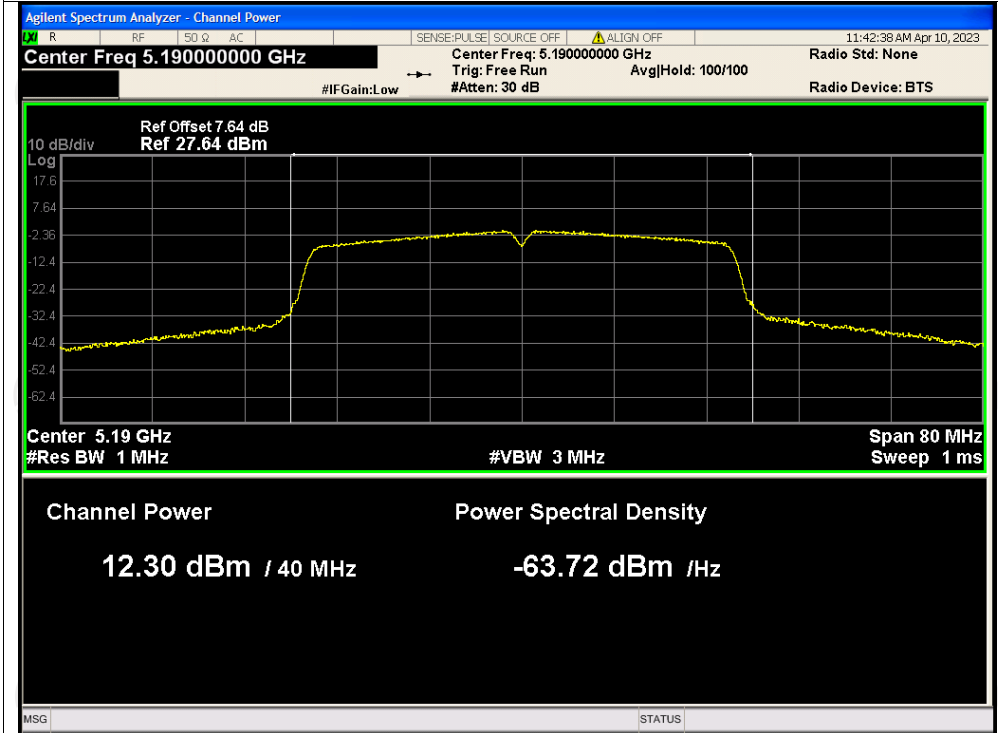

Power NVNT ac40 5230MHz

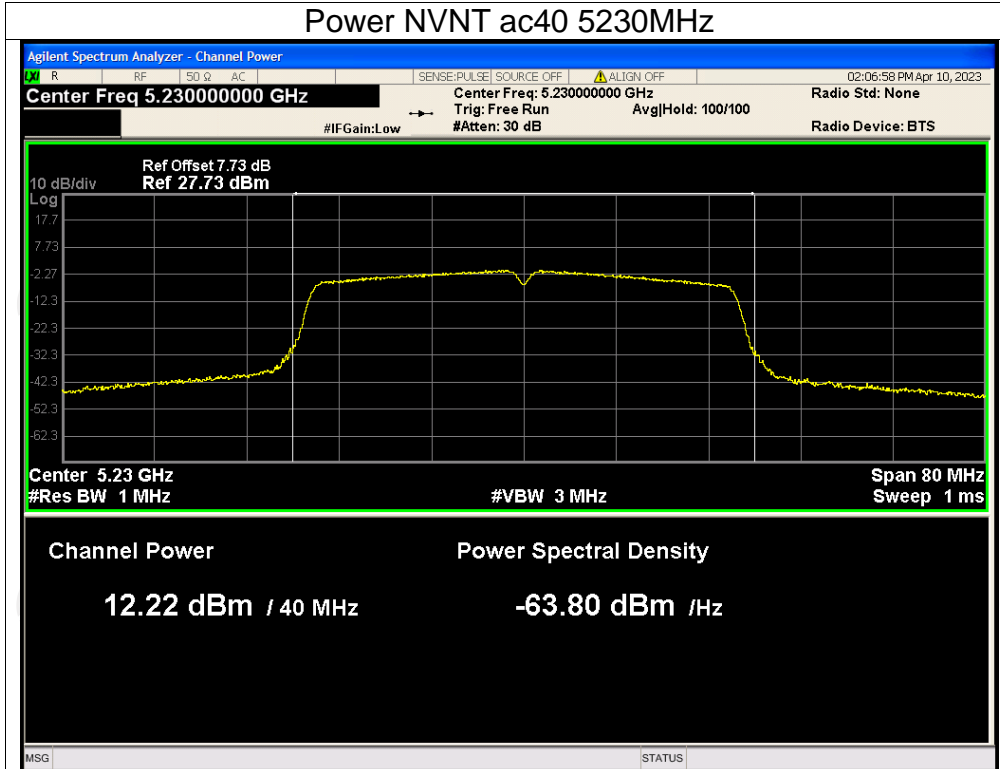


Power NVNT ac80 5210MHz

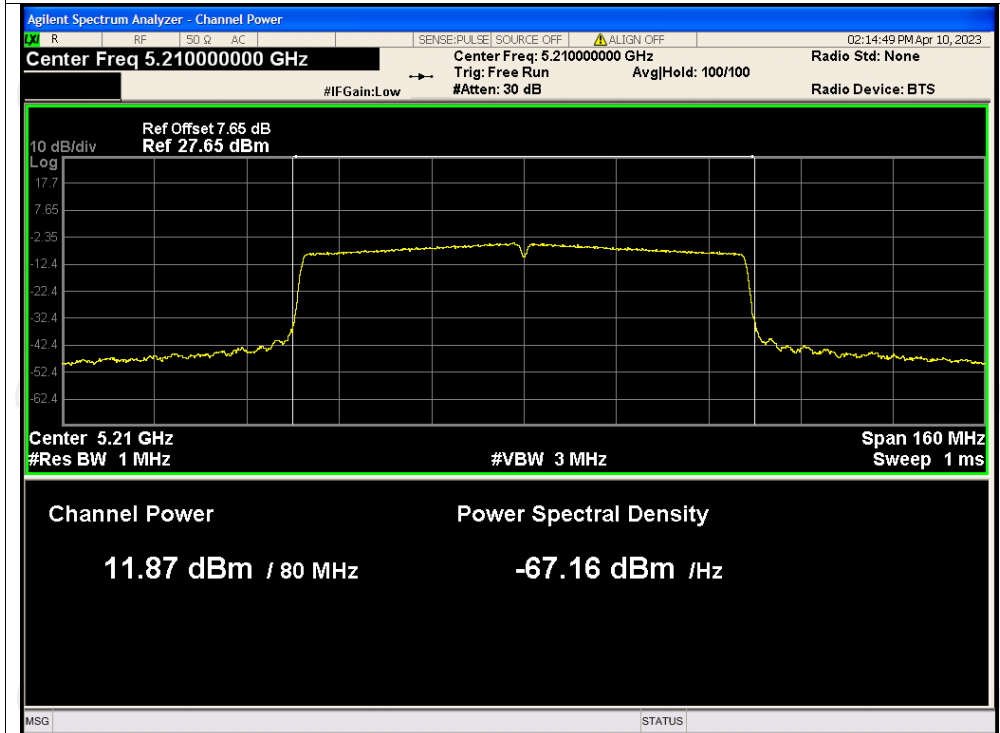





Test Graphs  
Power NVNT a 5745MHz

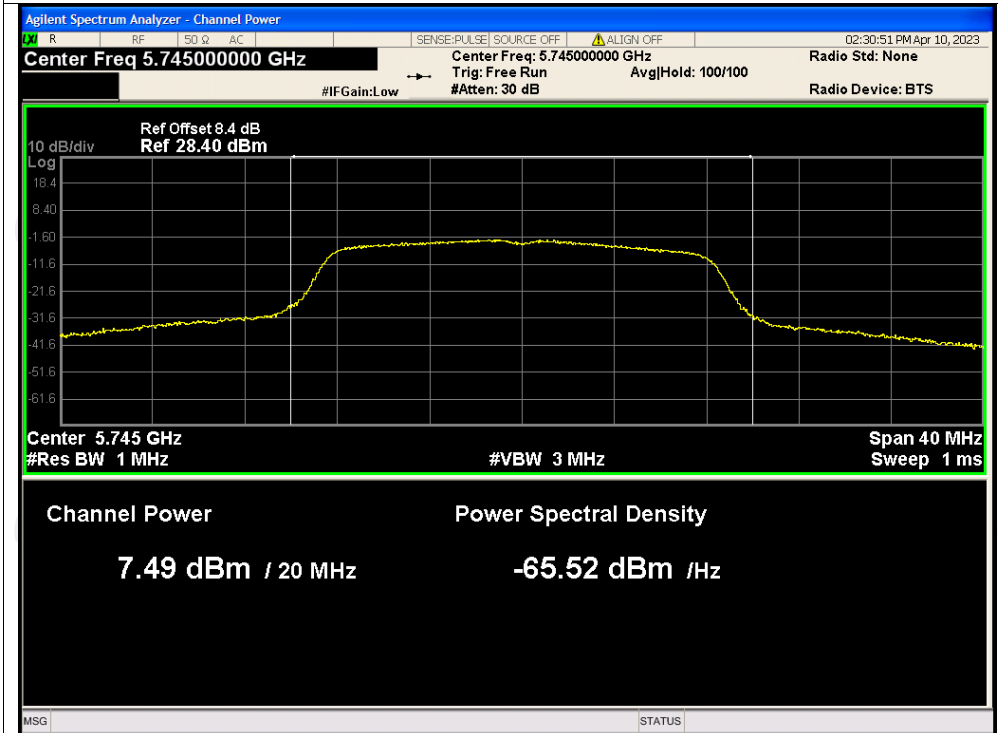


Power NVNT a 5785MHz

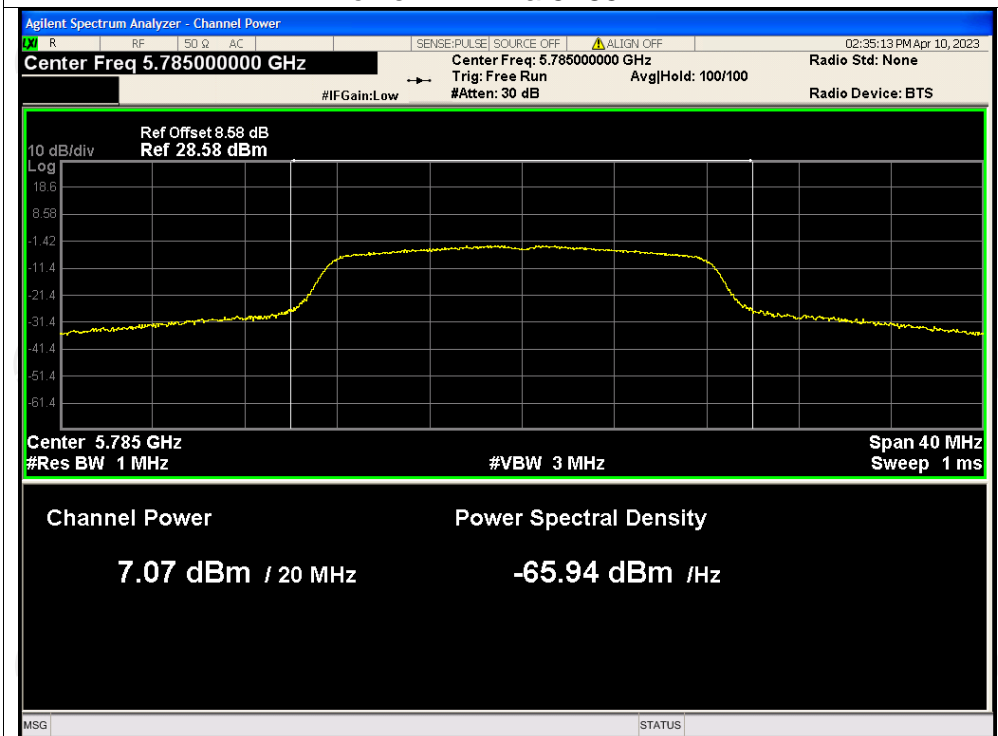


Power NVNT a 5825MHz

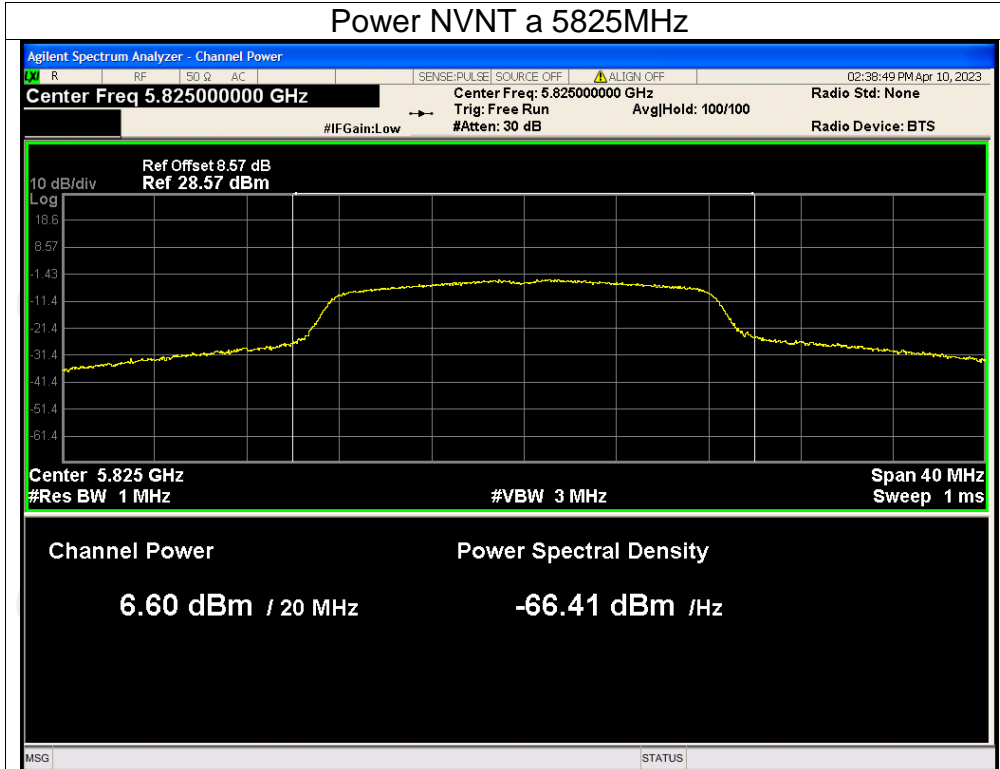


Power NVNT n20 5745MHz

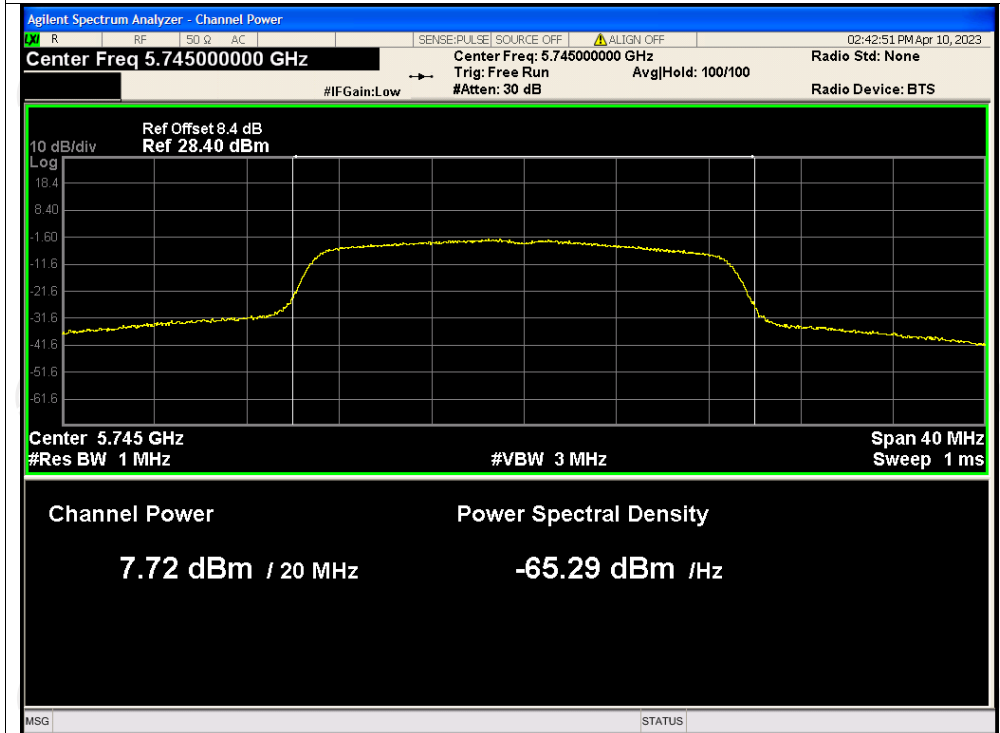


## Power NVNT n20 5785MHz

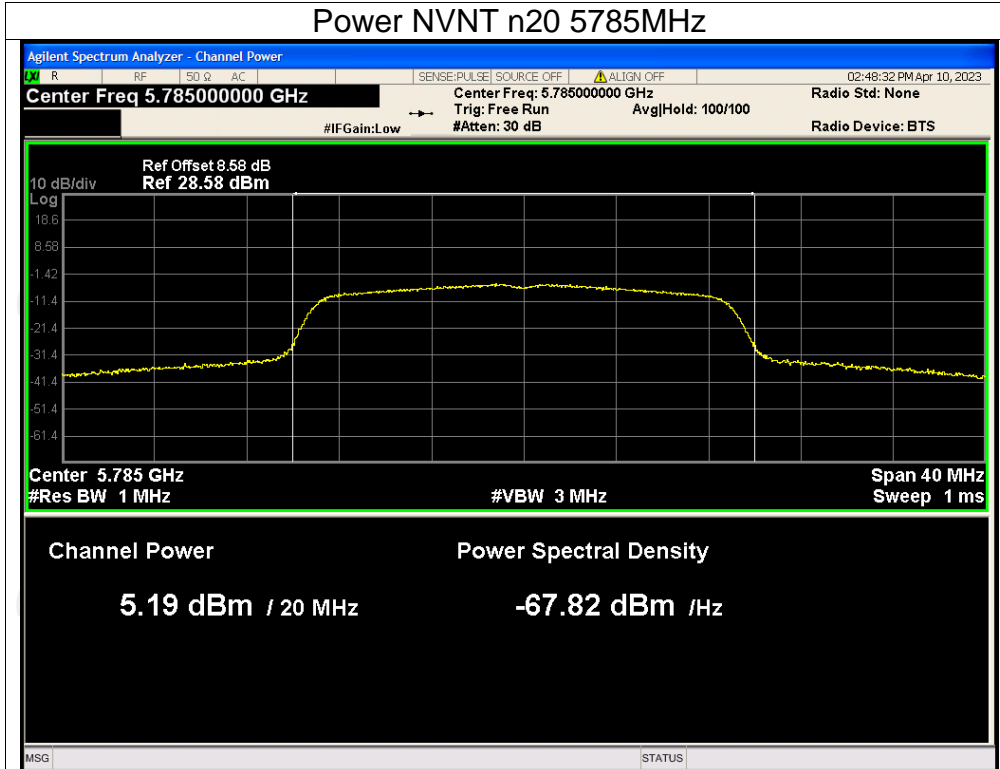


## Power NVNT n20 5825MHz

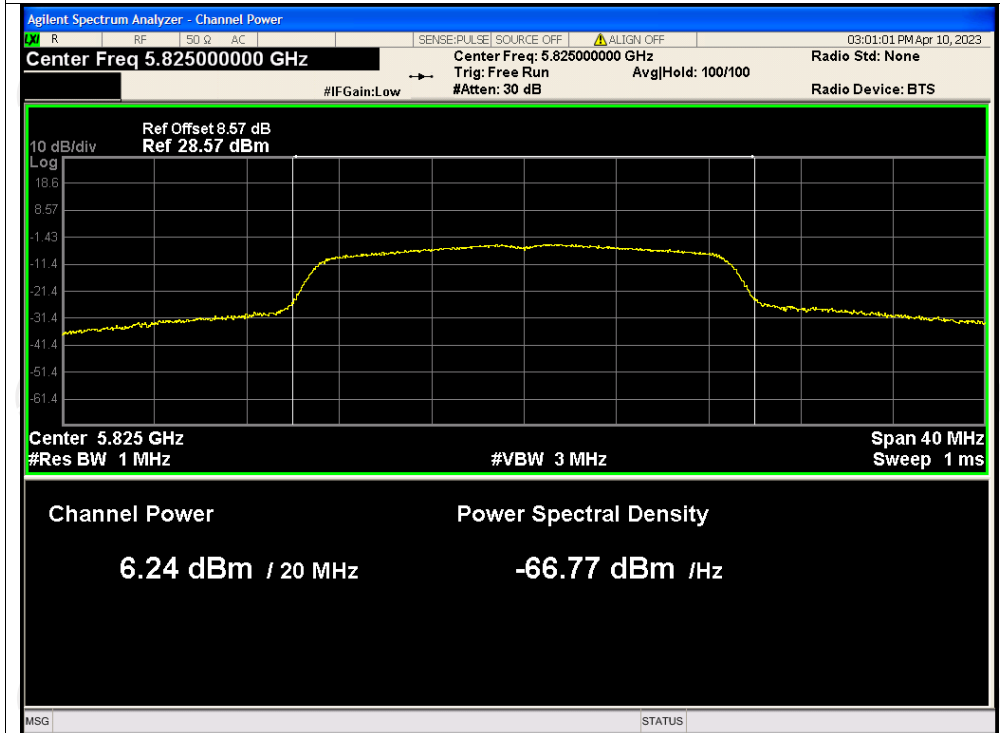


Power NVNT n40 5755MHz

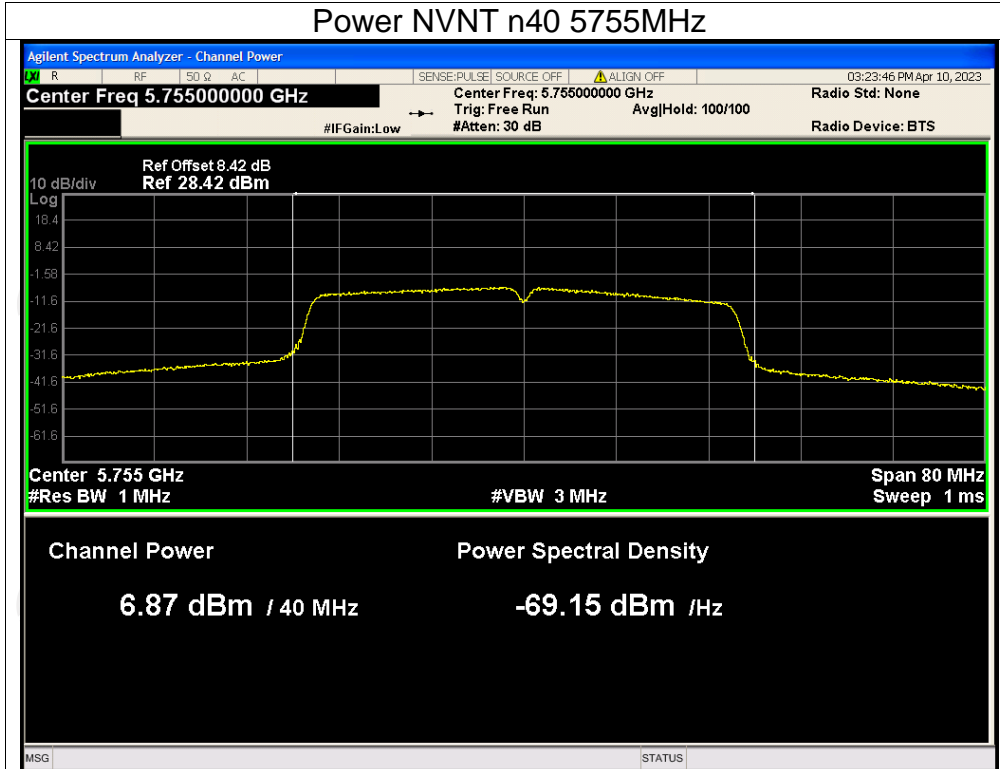


Power NVNT n40 5795MHz

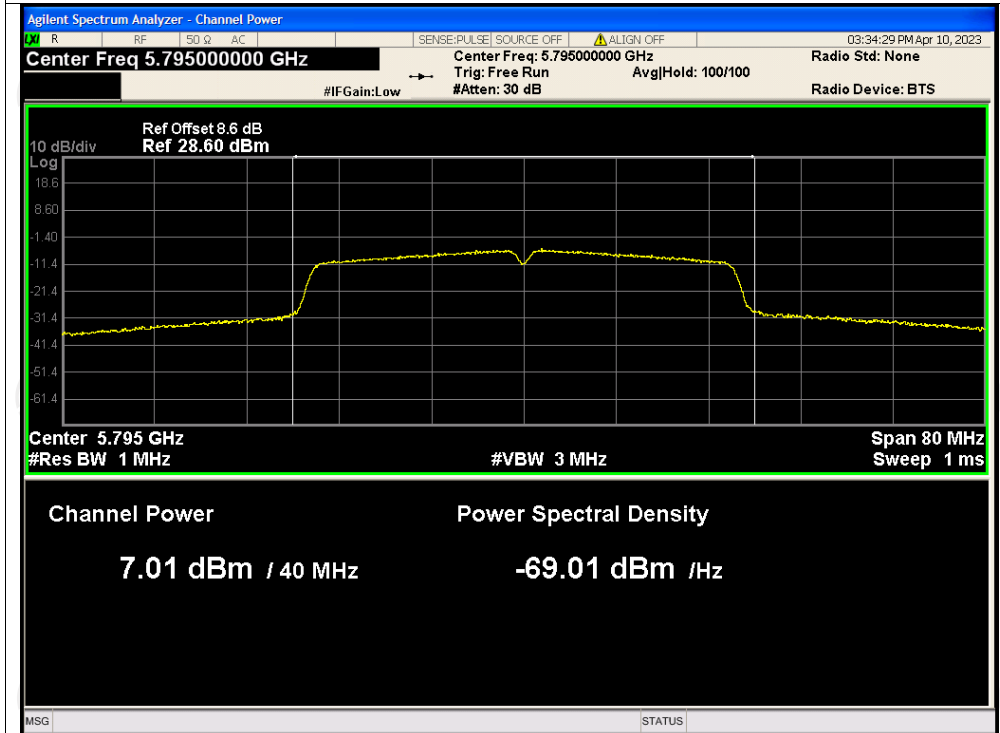


Power NVNT ac20 5745MHz

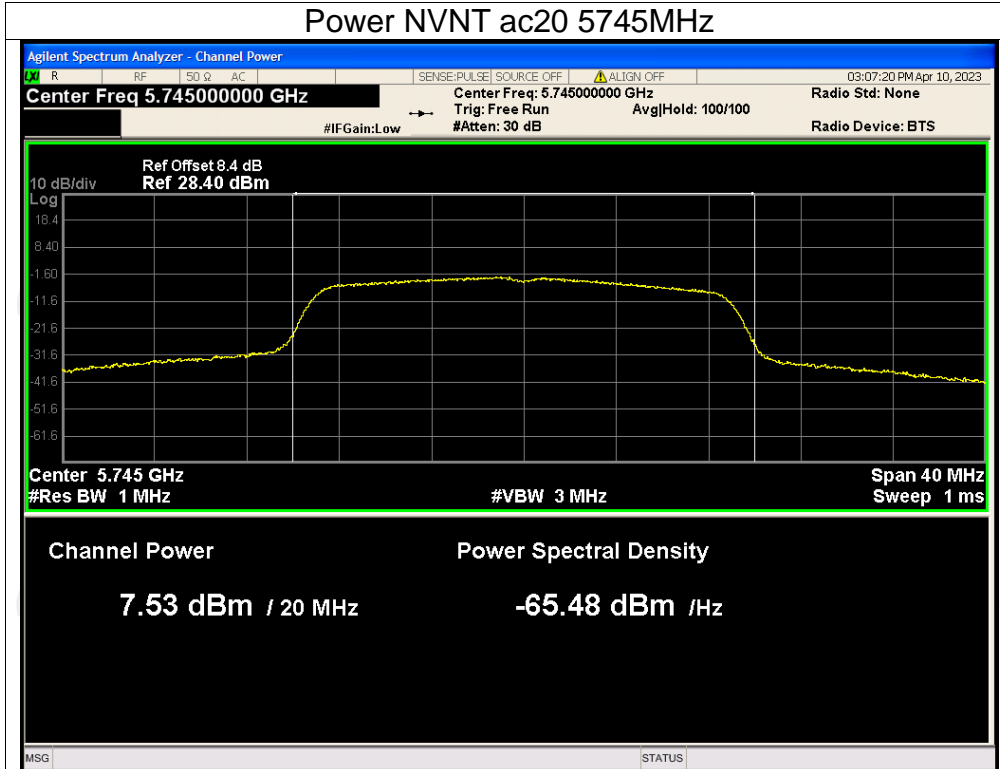


Power NVNT ac20 5785MHz

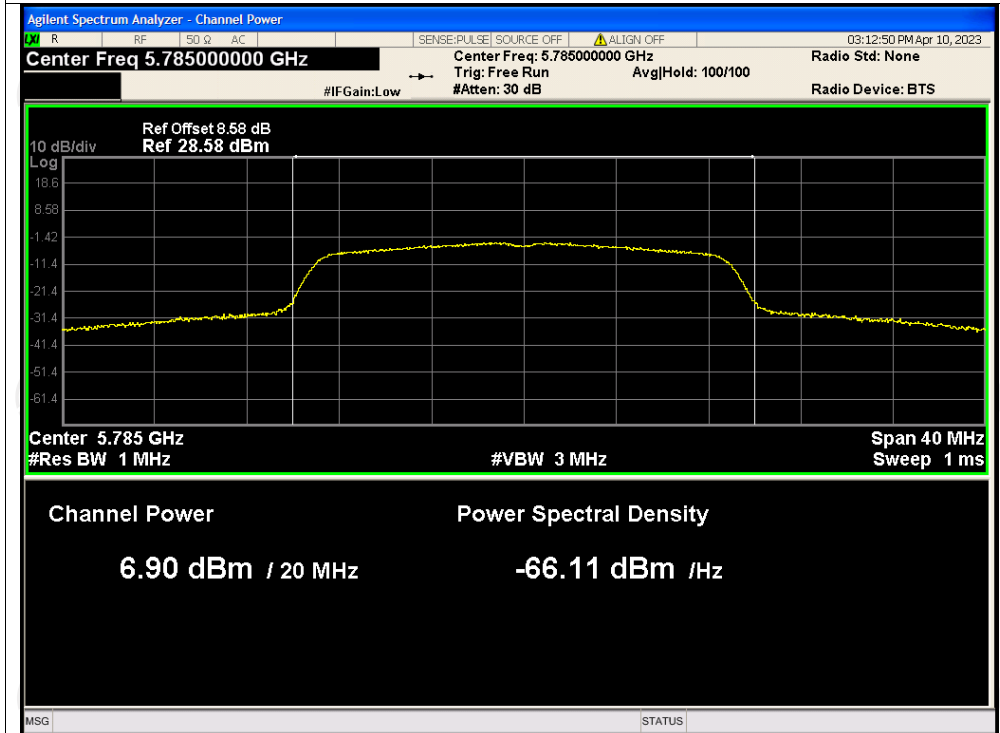


Power NVNT ac20 5825MHz

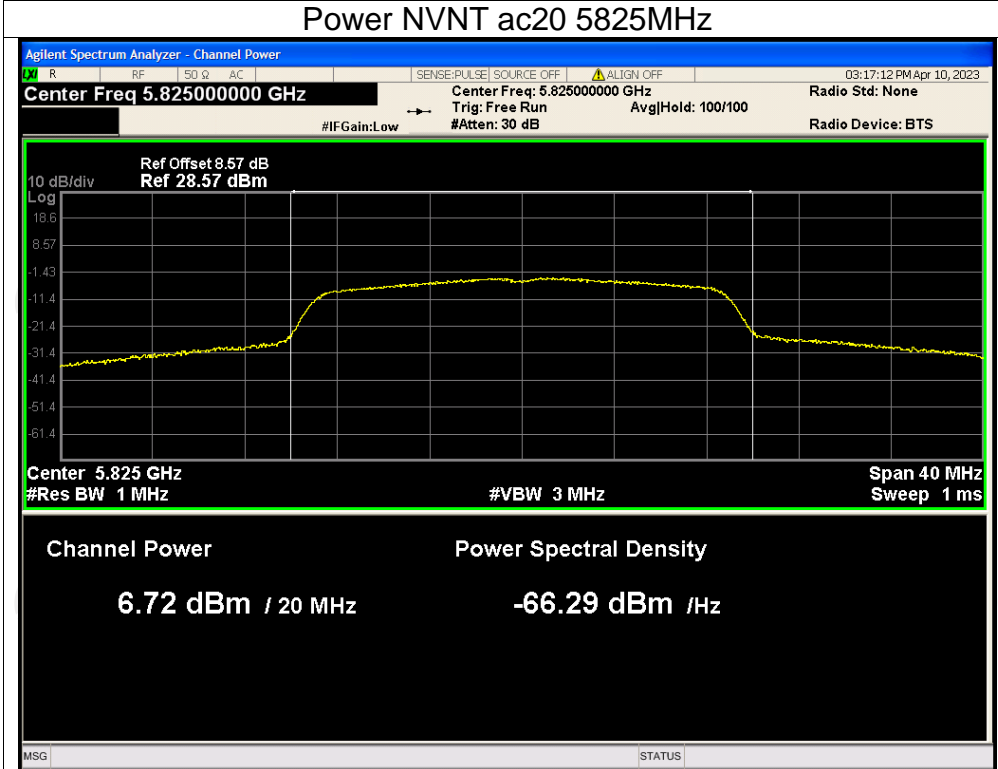


Power NVNT ac40 5755MHz

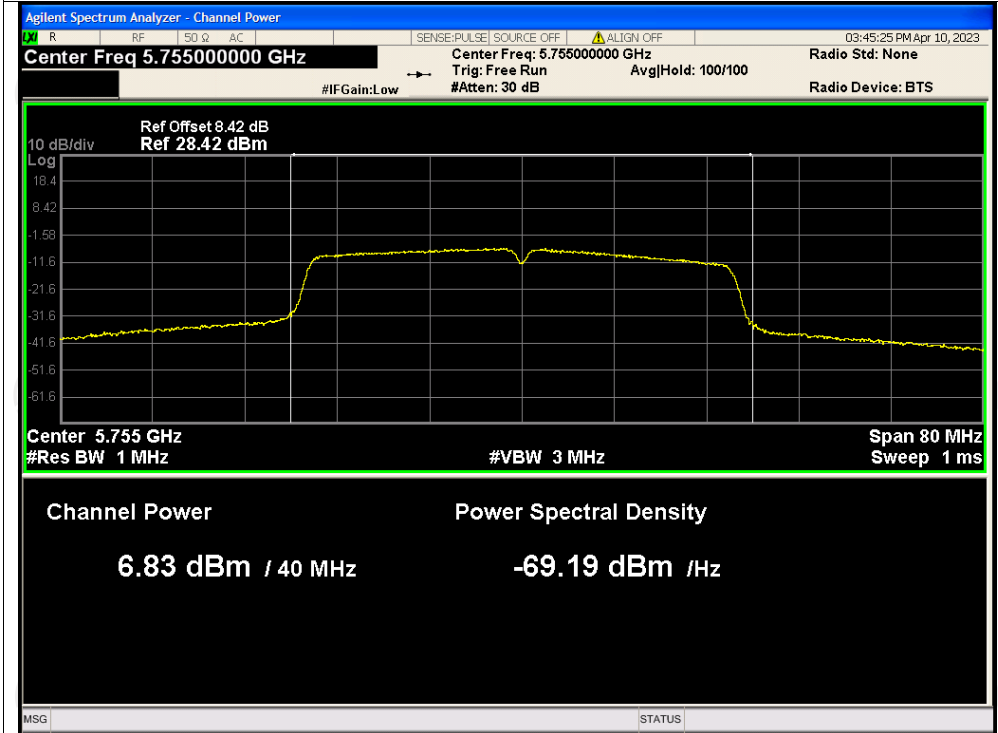

Power NVNT ac40 5795MHz

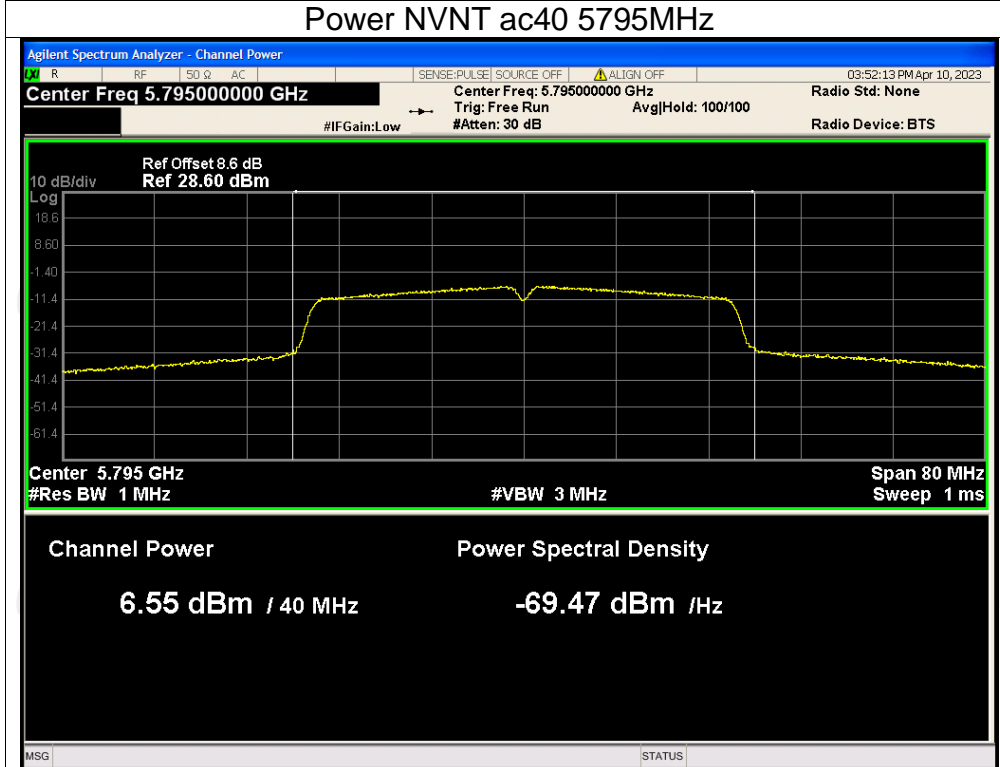

Power NVNT ac80 5775MHz

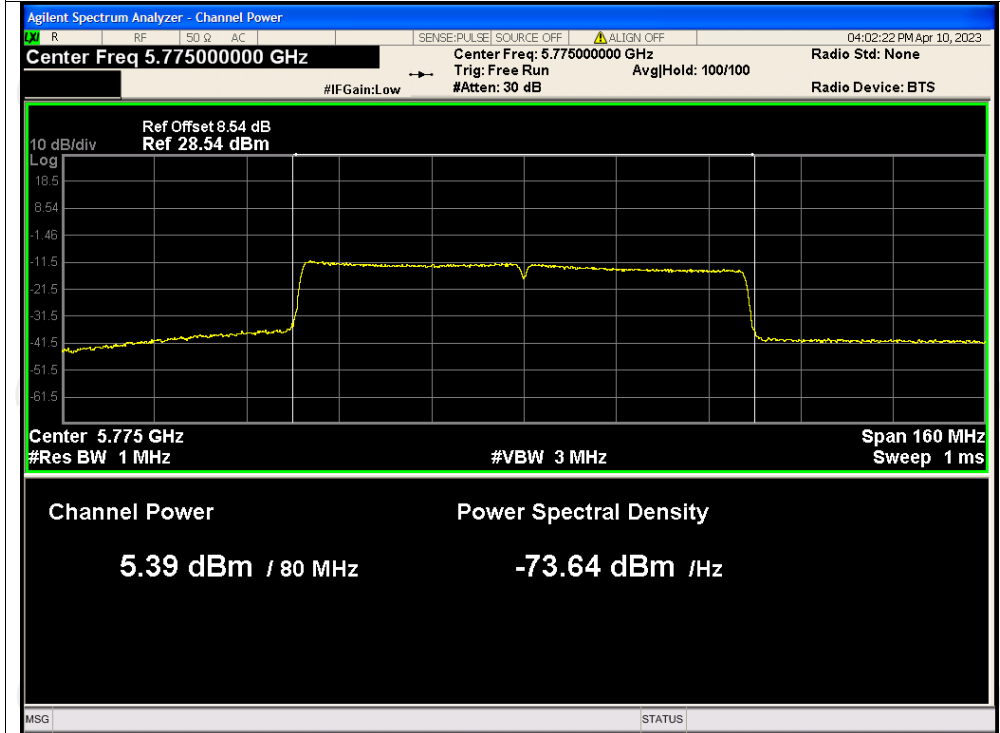

**-26dB Bandwidth**

Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	21.203	Pass
NVNT	a	5200	20.317	Pass
NVNT	a	5240	20.252	Pass
NVNT	n20	5180	23.139	Pass
NVNT	n20	5200	21.600	Pass
NVNT	n20	5240	20.457	Pass
NVNT	n40	5190	43.092	Pass
NVNT	n40	5230	40.860	Pass
NVNT	ac20	5180	22.033	Pass
NVNT	ac20	5200	21.825	Pass
NVNT	ac20	5240	20.432	Pass
NVNT	ac40	5190	42.659	Pass
NVNT	ac40	5230	40.798	Pass
NVNT	ac80	5210	79.048	Pass