



中国认可  
国际互认  
检测  
TESTING  
CNAS L2264

# RF TEST REPORT

**Applicant**      OBSERVA Telecom  
**FCC ID**          2A123SQI4N4  
**Brand**            observatelecom  
**Product**         WIFI LTE ROUTER  
**Model**            SQI4N4  
**Report No.**      RXA1610-0218RF01R4  
**Issue Date**     January 6, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2/FCC CFR 47 Part 90Z**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Performed by: Xianqing Li*

*Approved by: Kai Xu*

## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the Test Report .....	4
1.2. Test facility.....	4
1.3. TestingLocation .....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards.....	7
4. Test Configuration.....	8
5. Test Case Results.....	9
5.1. RF Power Output & Effective Isotropic Radiated Power .....	9
5.2. Occupied Bandwidth .....	20
5.3. Band Edge Compliance.....	26
5.4. Frequency Stability .....	34
5.5. Spurious Emissions at Antenna Terminals .....	37
5.6. Field Strength of Spurious Radiation/ Radiated Spurious Emissions .....	45
6. Main Test Instruments .....	55
ANNEX A:EUT Appearanceand Test Setup.....	56
A.1 EUT Appearance .....	56
A.2 Test Setup.....	58

## Summary of measurement results

No.	Test Type	Clause in FCC rules	Verdict
1	RF Power Output & Effective Isotropic Radiated Power	2.1046/90.1321(a)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edges Compliance	2.1051/ 90.1323	PASS
4	Frequency Stability	2.1055	PASS
5	Spurious Emissions at Antenna Terminals	2.1051 / 90.1323	PASS
6	Field Strength of Spurious Radiation / Radiated Spurious Emissions	2.1053/ 90.1323	PASS
Date of Testing: October 22, 2016~November 8, 2016			

## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

### 1.2. Test facility

#### **CNAS (accreditation number:L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

#### **FCC (recognition number is 428261)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

#### **VCCI (recognition number is C-4595, T-2154, R-4113, G-766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

#### **A2LA(Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. TestingLocation

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### Client Information

<b>Applicant</b>	OBSERVA Telecom
<b>Applicant address</b>	Monte Esquinza, 28 – 1st floor – Right hand
<b>Manufacturer</b>	OBSERVA Telecom
<b>Manufacturer address</b>	Monte Esquinza, 28 – 1st floor – Right hand

### General Information

EUT Description			
<b>Model</b>	SQI4N4		
<b>SN</b>	/		
<b>Hardware Version</b>	V3.3		
<b>Software Version</b>	SQI4N4-1.2.5-R19-ARG		
<b>Power Supply</b>	AC adapter		
<b>Antenna Type</b>	Internal Antenna		
<b>Antenna Gain</b>	4dBi		
<b>Test Mode(s)</b>	LTE Band 43		
<b>Test Modulation</b>	(LTE)QPSK 16QAM;		
<b>Maximum E.I.R.P.</b>	LTE Band 43: 25.89dBm		
<b>Rated Power Supply Voltage</b>	12V		
<b>Extreme Voltage</b>	Minimum: 9V    Maximum: 15V		
<b>Extreme Temperature</b>	Lowest: -10°C    Highest: +45°C		
<b>Operating Frequency Range(s)</b>	Band	Tx (MHz)	Rx (MHz)
	LTE Band 43	3600 ~ 3800	3600 ~ 3800
EUT Accessory			
<b>Adapter</b>	Manufacturer: AQUILSTAR PRECISION INDUSTRIAL(SHENZHEN)CO., LTD Model: ASSA55D-120100 Input power:100-240Vac 50-60Hz 0.45A max Output power:12Vdc 1A		
<b>Ethernet cables</b>	Model : UTP CAT5E		
Note: The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.			

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC CFR47 Part 2 (2015)**

**FCC CFR 47 Part 90Z (2015)**

**ANSI/TIA-603-D(2010)**

**FCC KDB 971168 D01 Power Meas License Digital Systems v02r02**

**FCC KDB 552295 D01 CBP Guidance for 3650 3700 Band v02r02**

## 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

Test modes are chosen as the worst case configuration below for LTE Band 43

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	○	○	○	○	○	○	-	-	○	○	○	○
Effective Isotropic Radiated power	○	○	○	○	○	○	-	-	○	○	○	○
Occupied Bandwidth	○	○	○	○	○	○	-	-	○	○	○	○
Band Edge Compliance	○	○	○	○	○	○	○	-	○	○	-	○
Frequency Stability	○	○	○	○	○	○	-	-	○	-	○	-
Spurious Emissions at Antenna Terminals	○	○	○	○	○	-	○	-	-	○	○	○
Field Strength of Spurious Radiation/ Radiates Spurious Emission	○	○	○	○	○	-	○	-	-	○	○	○
Note	1. The mark "○" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											



## 5. Test Case Results

### 5.1. RF Power Output & Effective Isotropic Radiated Power& the Peak EIRP Density

#### Ambient condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Spectrum analyzer to ensure max power transmission and proper modulation.

Since this procedure utilizes a conducted measurement it does not directly result in EIRP levels for comparison to the output power limits. In order to determine the EIRP level, the effective antenna gain must be added to the corrected (for external test set-up factors) measurement result.

#### Test Setup

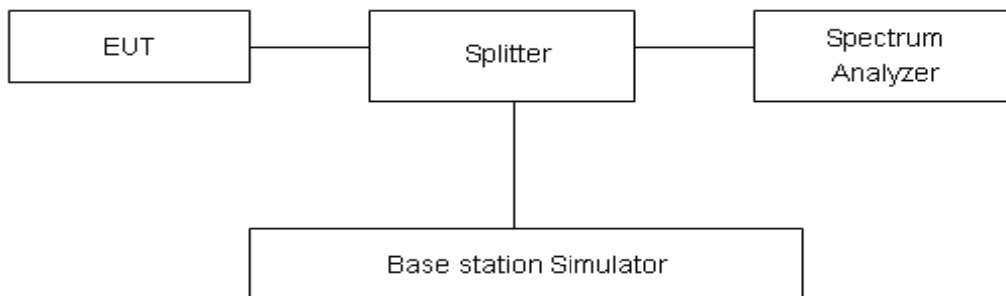

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

#### Limits

According to FCC §2.1046 & 90.1321(c) Mobile and portable stations are limited to 1 watt/25 MHz EIRP. In any event, the peak EIRP density shall not exceed 40 milliwatts in any one-megahertz slice of spectrum.

Limit	Limit
Base Station/ Fixed Station	1 watt/25 MHz


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for thenormal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

LTE FDD Band 43				Conducted Power(dBm)			EIRP(dBm)			EIRP(mW)			EIRP(mW)/25MHz			Limit(mW) /25MHz
BW	Modulation	RB size	RB offset	Channel/ Frequency(MHz)			Channel/ Frequency(MHz)			Channel/ Frequency(MHz)			Channel/ Frequency(MHz)			
				44115 /3652.5	44340 /3675	44565 /3697.5	44115 /3652.5	44340 /3675	44565 /3697.5	44115 /3652.5	44340 /3675	44565 /3697.5	44115 /3652.5	44340 /3675	44565 /3697.5	
5MHz	QPSK	25	0	18.92	18.65	18.58	22.92	22.65	22.58	195.88	184.08	181.13	979.42	920.39	905.67	1000
	16QAM	25	0	18.64	18.58	18.21	22.64	22.58	22.21	183.65	181.13	166.34	918.27	905.67	831.71	1000
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)			Channel/Frequency(MHz)			Channel/Frequency(MHz)			Channel/Frequency(MHz)			/
				44140 /3655	44340 /3675	44540 /3695	44140 /3655	44340 /3675	44540 /3695	44140 /3655	44340 /3675	44540 /3695	44140 /3655	44340 /3675	44540 /3695	/
10MHz	QPSK	50	0	20.88	21.76	18.52	24.88	25.76	22.52	307.61	376.70	178.65	769.02	941.76	446.62	1000
	16QAM	50	0	21.89	20.47	19.93	25.89	24.47	23.93	388.15	279.90	247.17	970.38	699.75	617.93	1000
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)			Channel/Frequency(MHz)			Channel/Frequency(MHz)			Channel/Frequency(MHz)			/
				44165 /3675.5	44340 /3675	44515 /3692.5	44165 /3675.5	44340 /3675	44515 /3692.5	44165 /3675.5	44340 /3675	44515 /3692.5	44165 /3675.5	44340 /3675	44515 /3692.5	/
15MHz	QPSK	75	0	21.29	21.41	19.64	25.29	25.41	23.64	338.06	347.54	231.21	563.44	579.23	385.34	1000
	16QAM	75	0	19.17	19.87	20.48	23.17	23.87	24.48	207.49	243.78	280.54	345.82	406.30	467.57	1000
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)			Channel/Frequency(MHz)			Channel/Frequency(MHz)			Channel/Frequency(MHz)			/
				44190 /3670	44340 /3675	44490 /3690	44190 /3670	44340 /3675	44490 /3690	44190 /3670	44340 /3675	44490 /3690	44190 /3670	44340 /3675	44490 /3690	/
20MHz	QPSK	100	0	21.02	19.66	19.23	25.02	23.66	23.23	317.69	232.27	210.38	397.11	290.34	262.97	1000
	16QAM	100	0	20.15	18.94	18.95	24.15	22.94	22.95	260.02	196.79	197.24	325.02	245.99	246.55	1000


Note: EIRP=Conducted Power + Antenna Gain, (Antenna Gain =4dBi)

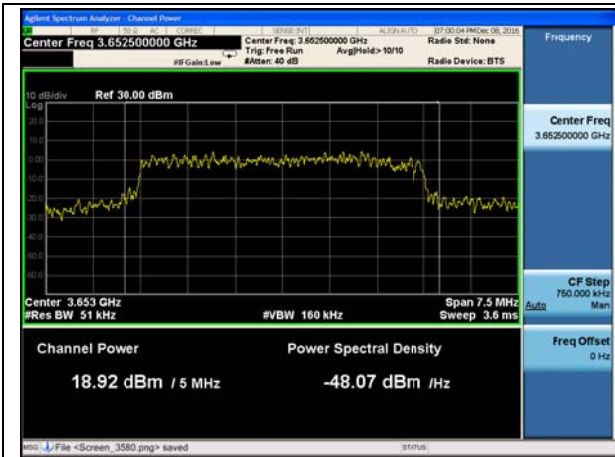


LTE Band 43 QPSK 5MHz CH44115




LTE Band 43 16QAM 5MHz CH44115

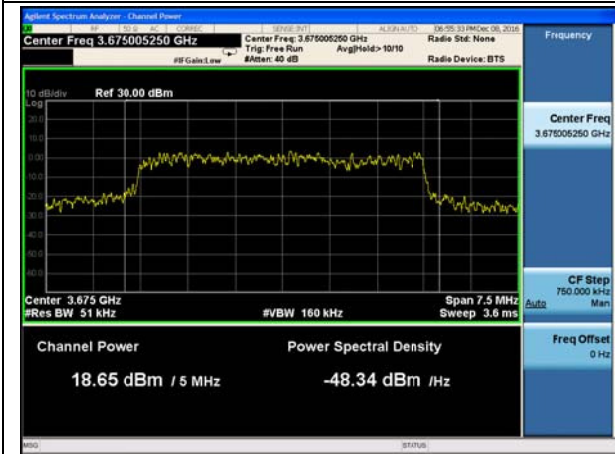


LTE Band 43 QPSK 5MHz CH44340

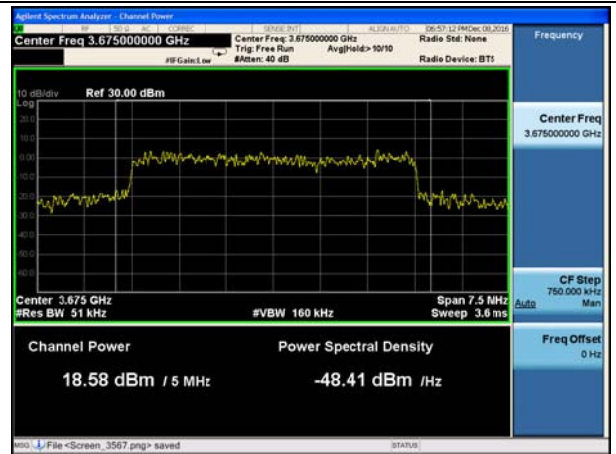

LTE Band 43 16QAM 5MHz CH44340

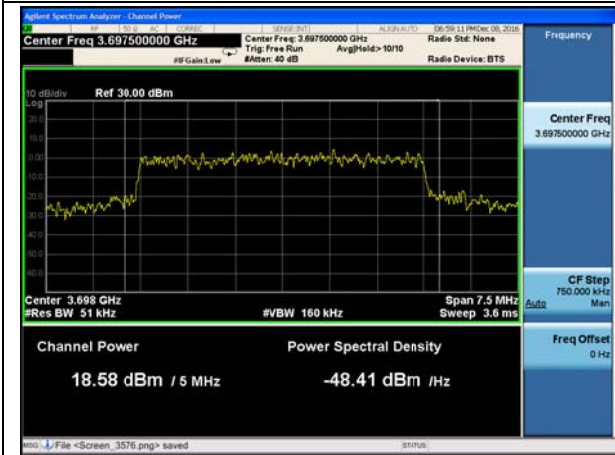

LTE Band 43 QPSK 5MHz CH44565

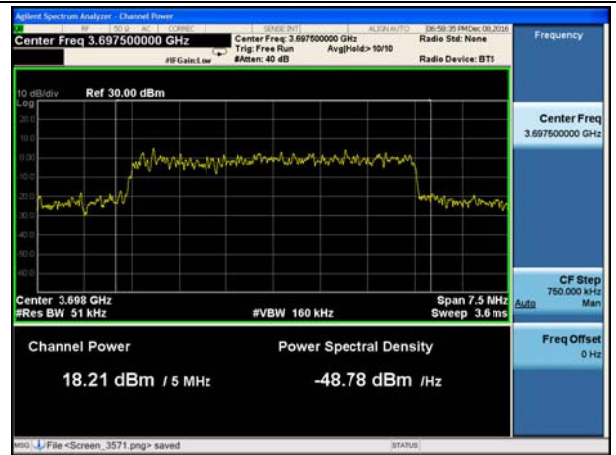


LTE Band 43 16QAM 5MHz CH44565



LTE Band 43 QPSK 10MHz CH44140




LTE Band 43 16QAM 10MHz CH44140

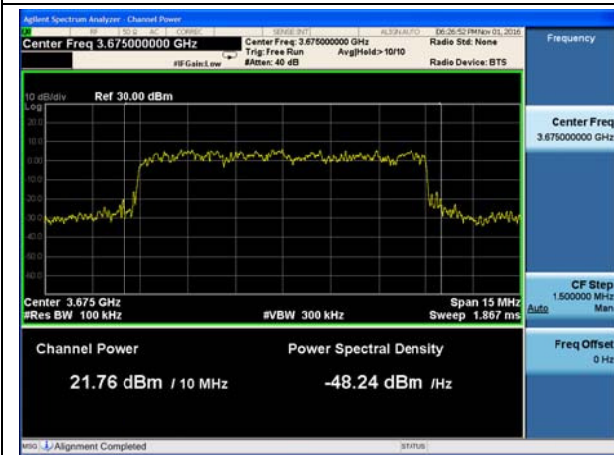

LTE Band 43 QPSK 10MHz CH44340




LTE Band 43 16QAM 10MHz CH44340

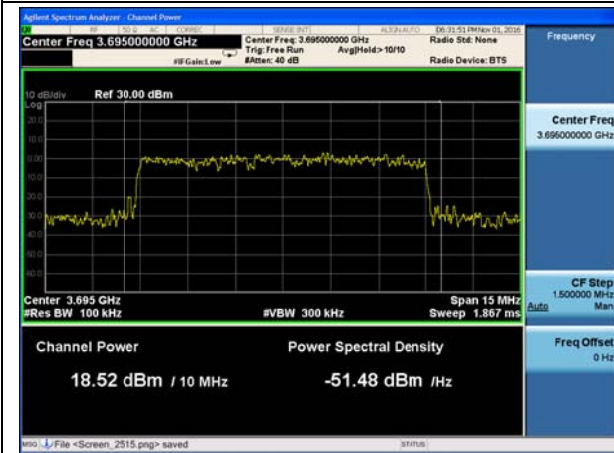

LTE Band 43 QPSK 10MHz CH44540



LTE Band 43 16QAM 10MHz CH44540

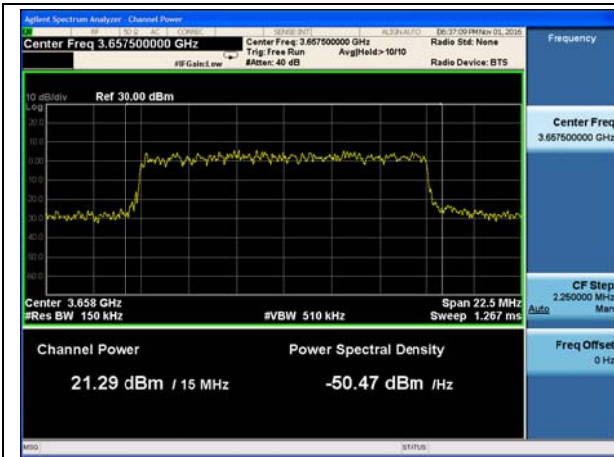


LTE Band 43 QPSK 15MHz CH44165




LTE Band 43 16QAM 15MHz CH44165



LTE Band 43 QPSK 15MHz CH44340

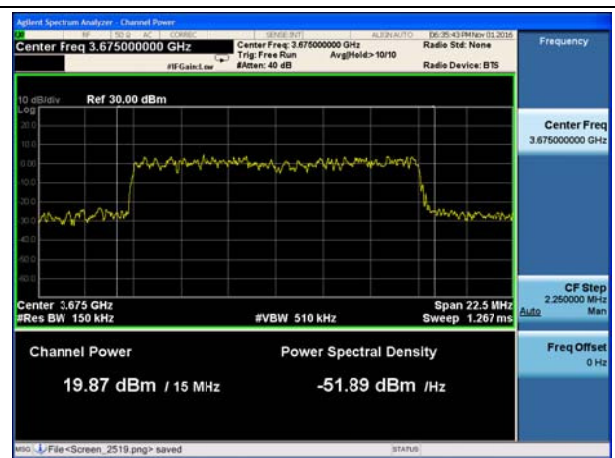

LTE Band 43 16QAM 15MHz CH44340

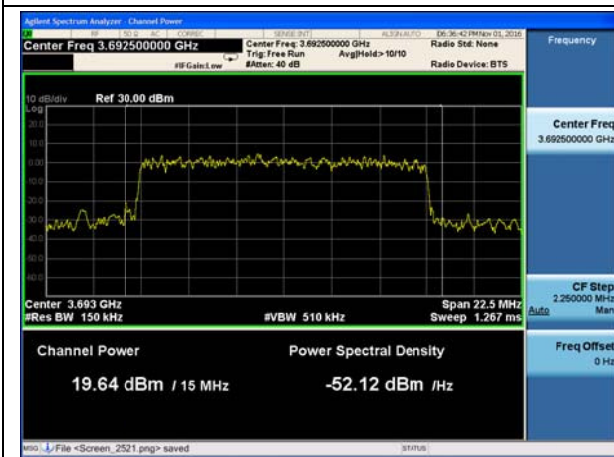


LTE Band 43 QPSK 15MHz CH44515




LTE Band 43 16QAM 15MHz CH44515



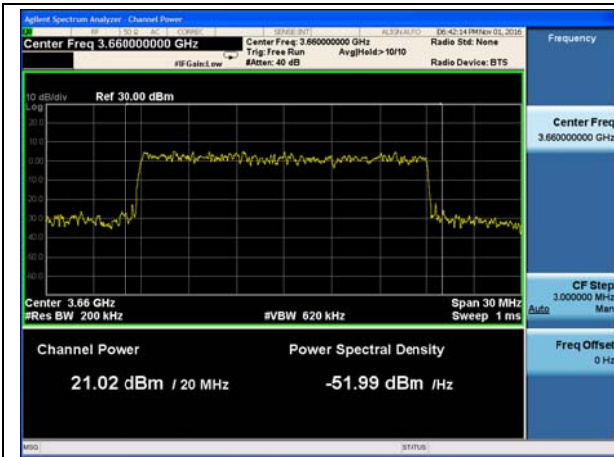

LTE Band 43 QPSK 20MHz CH44190

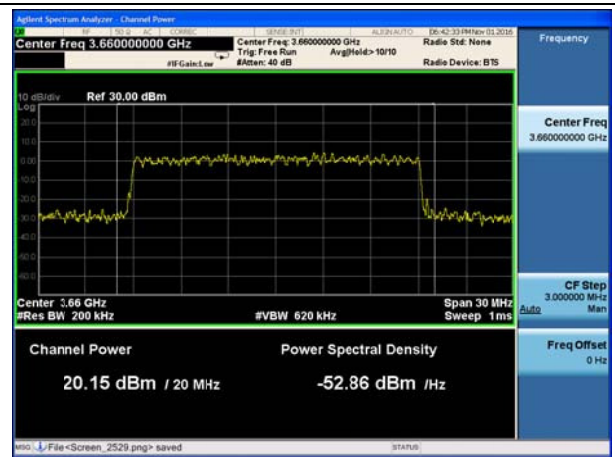

LTE Band 43 16QAM 20MHz CH44190




LTE Band 43 QPSK 20MHz CH44340



LTE Band 43 16QAM 20MHz CH44340



LTE Band 43 QPSK 20MHz CH44490

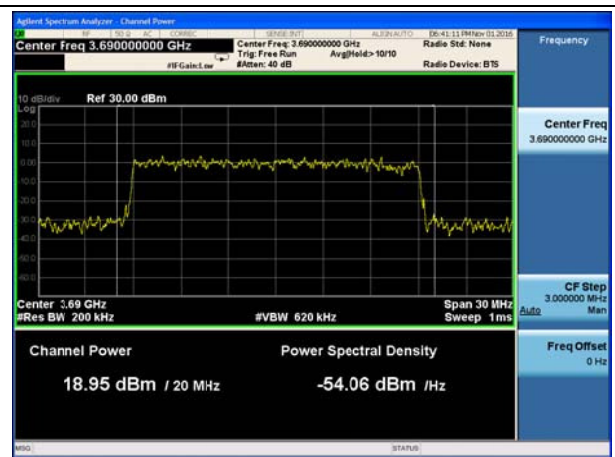

LTE Band 43 16QAM 20MHz CH44490

LTE FDD Band 43				Conducted Power Spectral Density (dBm)/1MHz			EIRP Power Spectral Density (mW)/1MHz			Limit(mW)/1MHz
BW	Modulation	RB size	RB offset	Channel/ Frequency(MHz)			Channel/ Frequency(MHz)			
				44115 /3652.5	44340 /3675	44565 /3697.5	44115 /3652.5	44340 /3675	44565 /3697.5	
5MHz	QPSK	25	0	11.539	10.923	10.624	35.801	31.067	29.000	40
	16QAM	25	0	11.127	11.424	9.628	32.561	34.866	23.057	40
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)			Channel/Frequency(MHz)			/
				44140 /3655	44340 /3675	44540 /3695	44140 /3655	44340 /3675	44540 /3695	
10MHz	QPSK	50	0	7.965	8.208	8.394	15.722	16.626	17.354	40
	16QAM	50	0	8.620	7.828	8.409	18.281	15.234	17.414	40
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)			Channel/Frequency(MHz)			/
				44165 /3675.5	44340 /3675	44515 /3692.5	44165 /3675.5	44340 /3675	44515 /3692.5	
15MHz	QPSK	75	0	6.794	6.816	6.297	12.006	12.067	10.708	40
	16QAM	75	0	6.406	7.085	5.808	10.980	12.838	9.568	40
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)			Channel/Frequency(MHz)			/
				44190 /3670	44340 /3675	44490 /3690	44190 /3670	44340 /3675	44490 /3690	
20MHz	QPSK	100	0	5.423	5.462	4.478	8.756	8.835	7.044	40
	16QAM	100	0	5.039	4.758	4.631	8.015	7.513	7.296	40

NOTE: EIRP PSD(dBm)=conducted PSD(dBm)+ Antenna Gain, (Antenna Gain =4dBi)  
EIRP PSD(mW)= 10<sup>EIRP PSD(dBm)/10</sup>




LTE Band 43 QPSK 5MHz CH44115




LTE Band 43 16QAM 5MHz CH44115



LTE Band 43 QPSK 5MHz CH44340

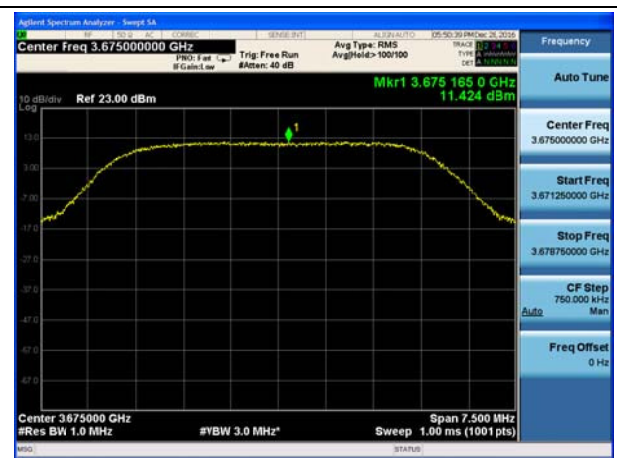

LTE Band 43 16QAM 5MHz CH44340

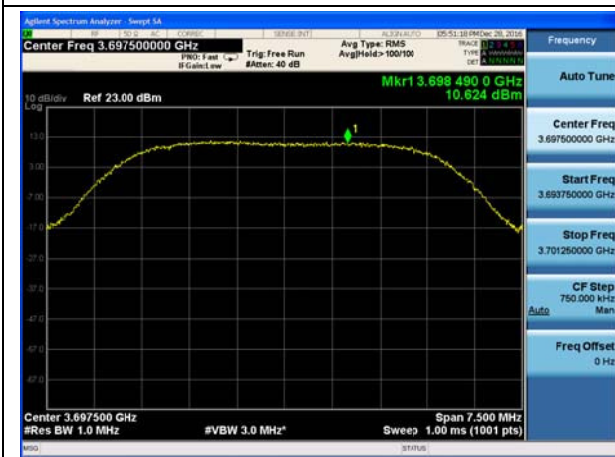


LTE Band 43 QPSK 5MHz CH44565




LTE Band 43 16QAM 5MHz CH44565




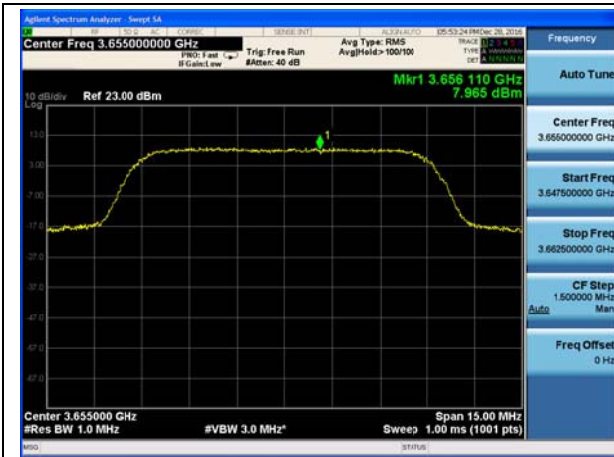


LTE Band 43 QPSK 10MHz CH44140

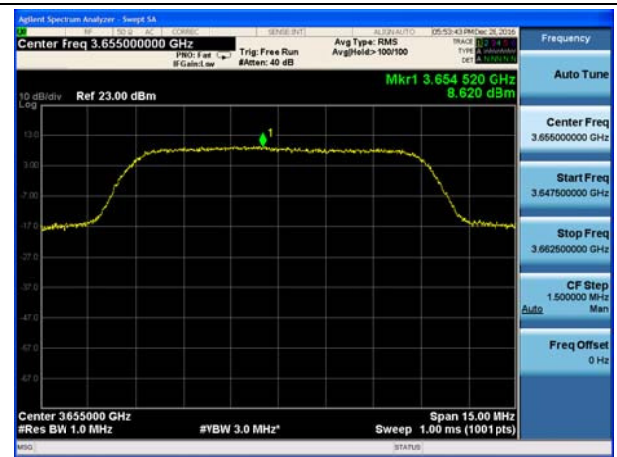

LTE Band 43 16QAM 10MHz CH44140

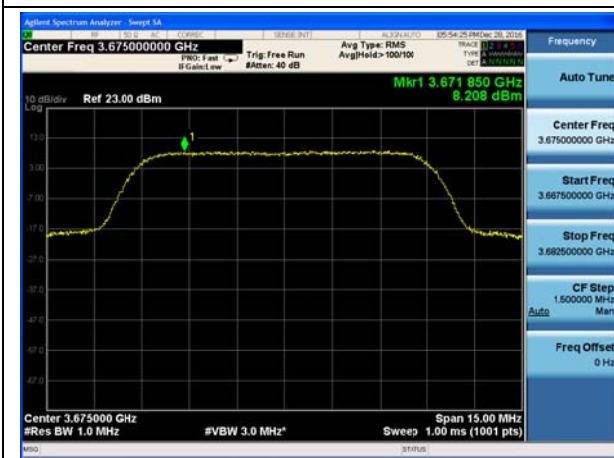


LTE Band 43 QPSK 10MHz CH44340

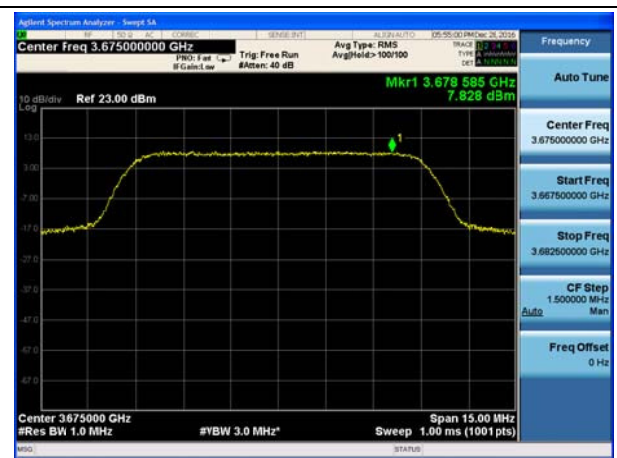


LTE Band 43 16QAM 10MHz CH44340




LTE Band 43 QPSK 10MHz CH44540

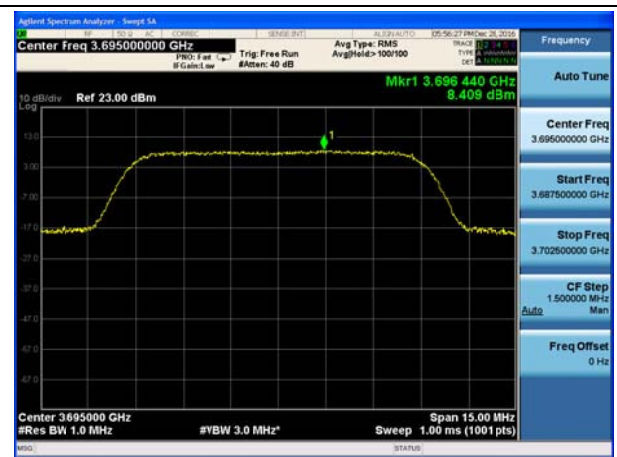


LTE Band 43 16QAM 10MHz CH44540

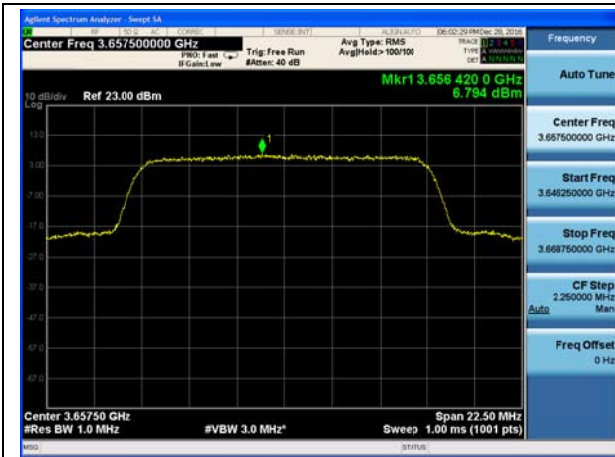


LTE Band 43 QPSK 15MHz CH44165

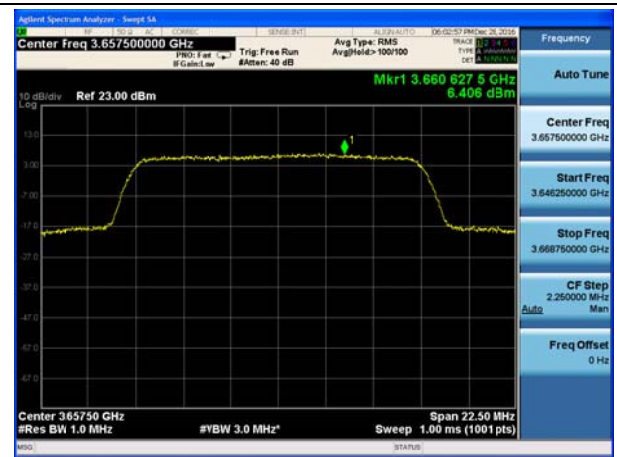


LTE Band 43 16QAM 15MHz CH44165

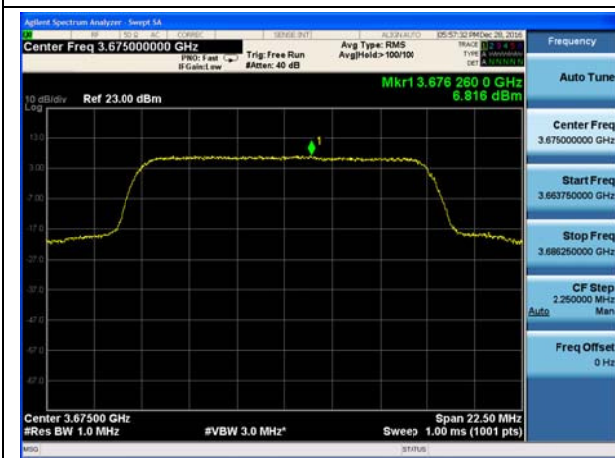


LTE Band 43 QPSK 15MHz CH44340

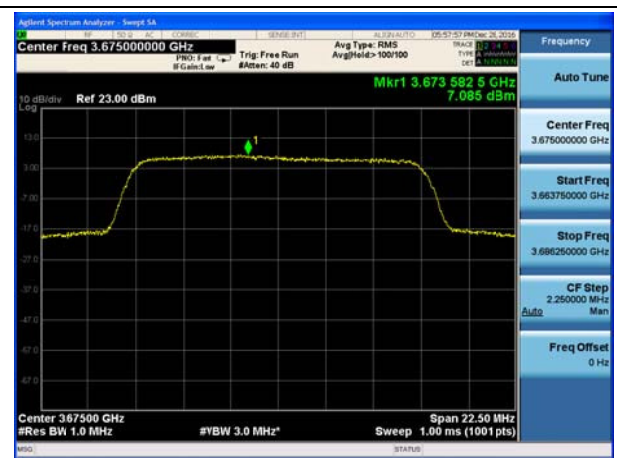

LTE Band 43 16QAM 15MHz CH44340

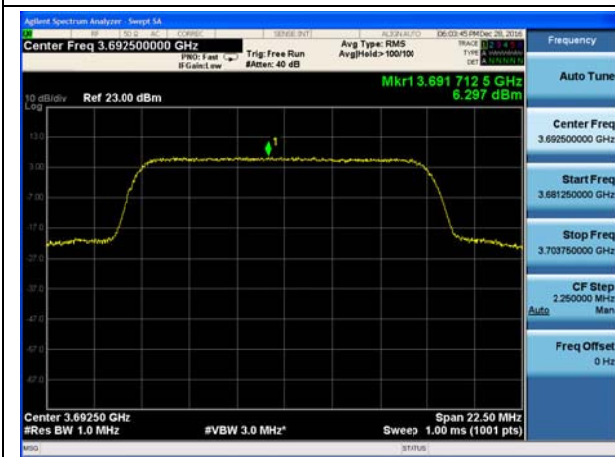

LTE Band 43 QPSK 15MHz CH44515

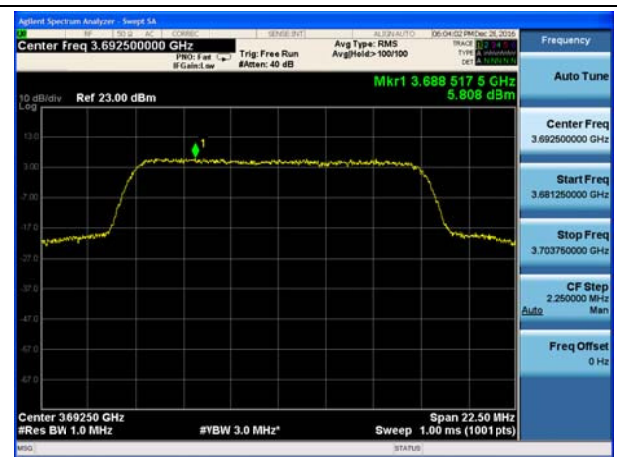


LTE Band 43 16QAM 15MHz CH44515




LTE Band 43 QPSK 20MHz CH44190




LTE Band 43 16QAM 20MHz CH44190

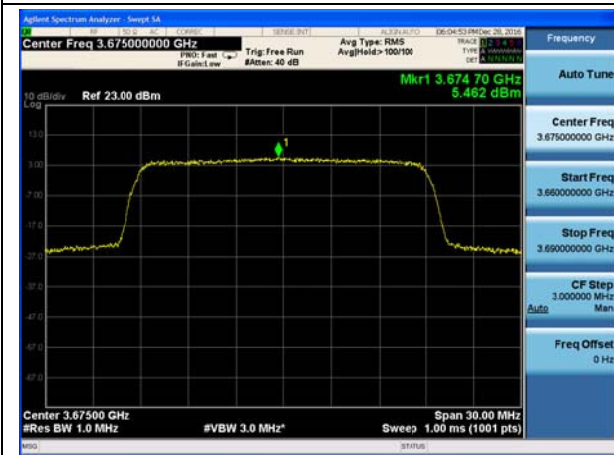

LTE Band 43 QPSK 20MHz CH44340

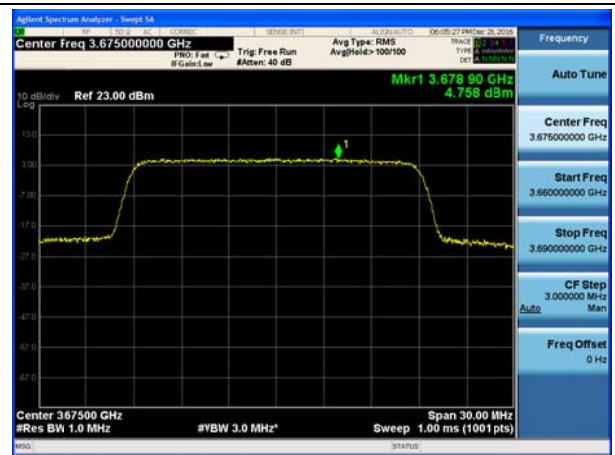

LTE Band 43 16QAM 20MHz CH44340

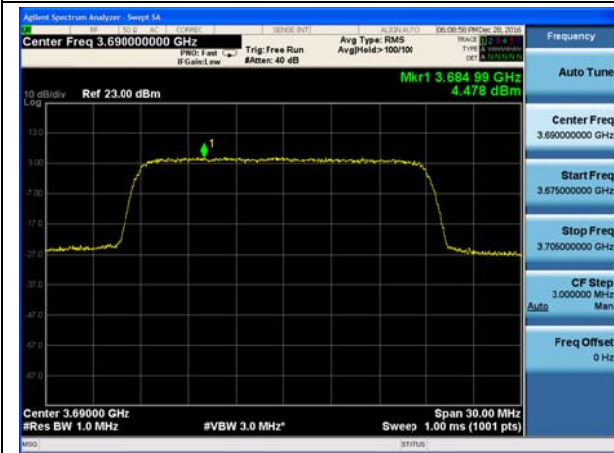

LTE Band 43 QPSK 20MHz CH44490



LTE Band 43 16QAM 20MHz CH44490

## 5.2. Occupied Bandwidth

### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 43 (5MHz),

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 43 (10MHz/15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

### Test Setup

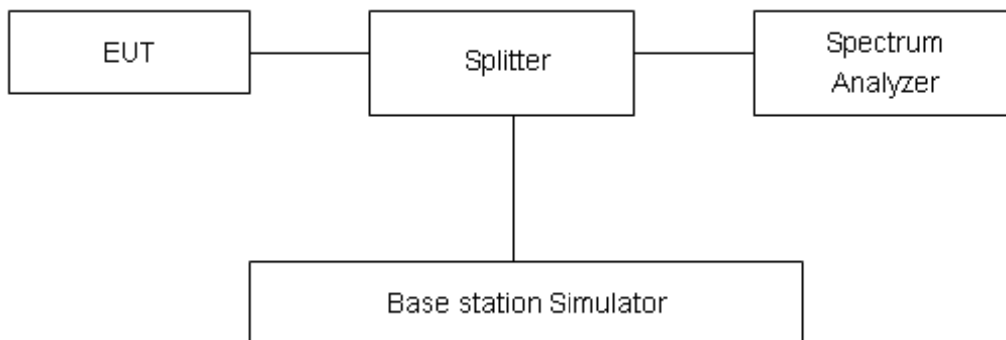

### Limits

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power.


### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U=624\text{Hz}$ .


**Test Result**

LTE Band 43					
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)
100%	QPSK	5	44115	3652.5	4.5454
			44340	3675	4.5726
			44565	3697.5	4.5910
		10	44140	3655	9.0950
			44340	3675	9.1294
			44540	3695	9.1073
		15	44165	3675.5	13.498
			44340	3675	13.561
			44515	3692.5	13.519
		20	44190	3670	17.942
			44340	3675	17.973
			44490	3690	17.923
	16QAM	5	44115	3652.5	4.5581
			44340	3675	4.6036
			44565	3697.5	4.5574
		10	44140	3655	9.1717
			44340	3675	9.1798
			44540	3695	9.0919
		15	44165	3675.5	13.562
			44340	3675	13.564
			44515	3692.5	13.503
		20	44190	3670	17.982
			44340	3675	17.970
			44490	3690	17.975




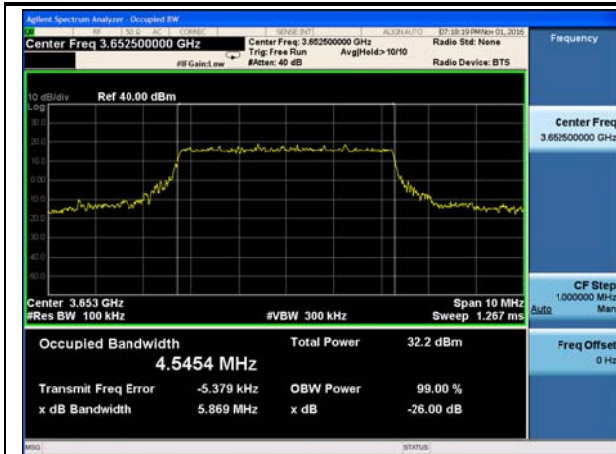

LTE Band 43 QPSK 5MHz CH44115

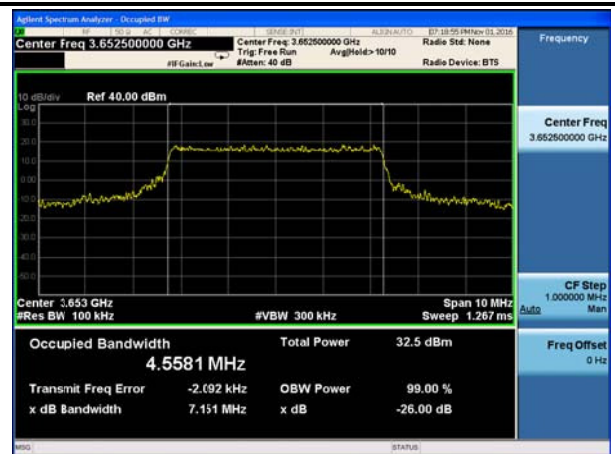


LTE Band 43 16QAM 5MHz CH44115

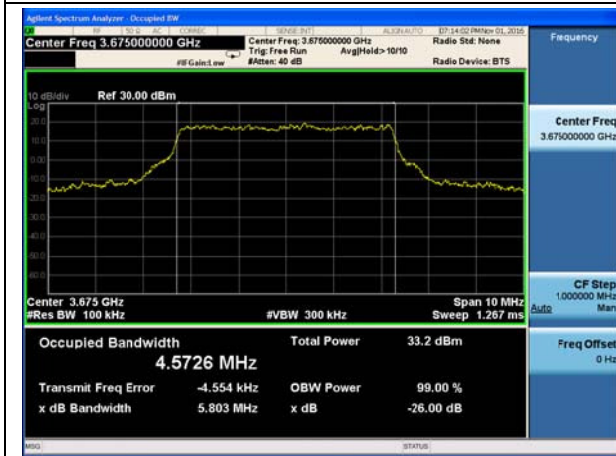

LTE Band 43 QPSK 5MHz CH44340




LTE Band 43 16QAM 5MHz CH44340

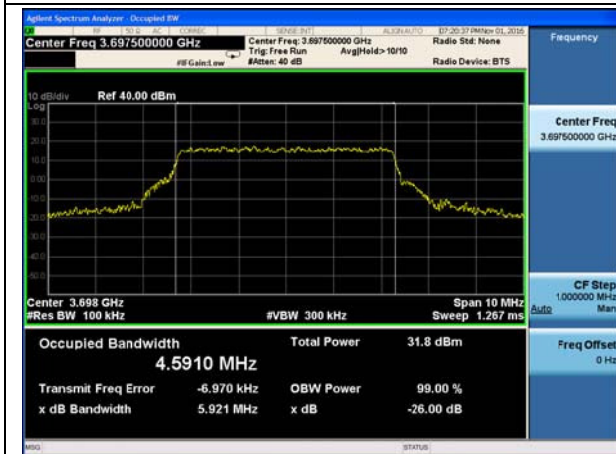


LTE Band 43 QPSK 5MHz CH44565




LTE Band 43 16QAM 5MHz CH44565

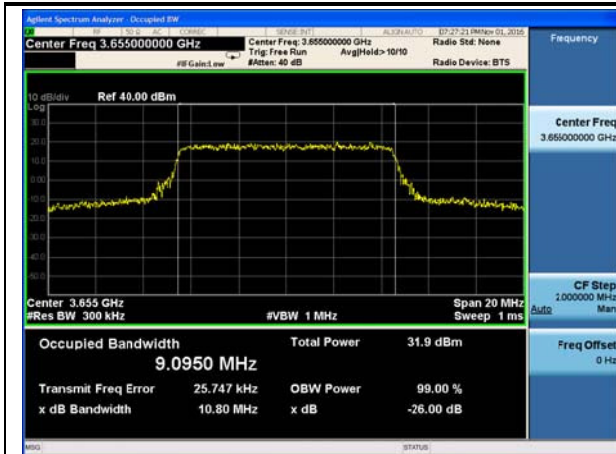


LTE Band 43 QPSK 10MHz CH44140

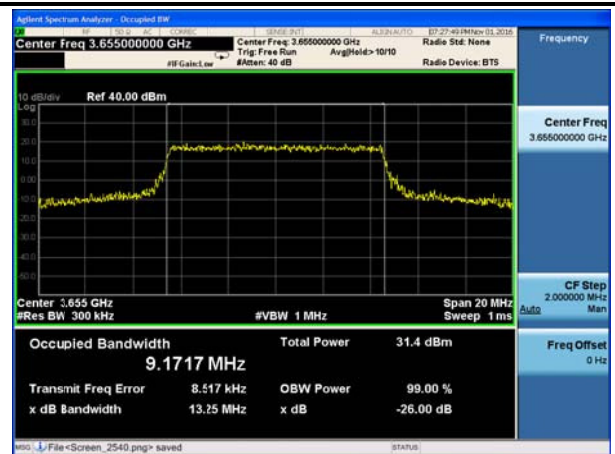


LTE Band 43 16QAM 10MHz CH44140

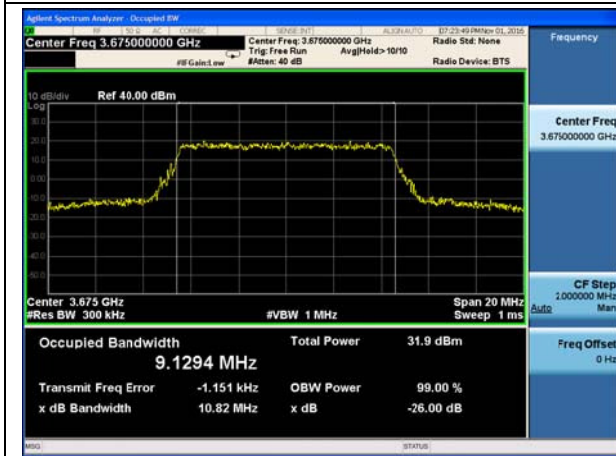


LTE Band 43 QPSK 10MHz CH44340

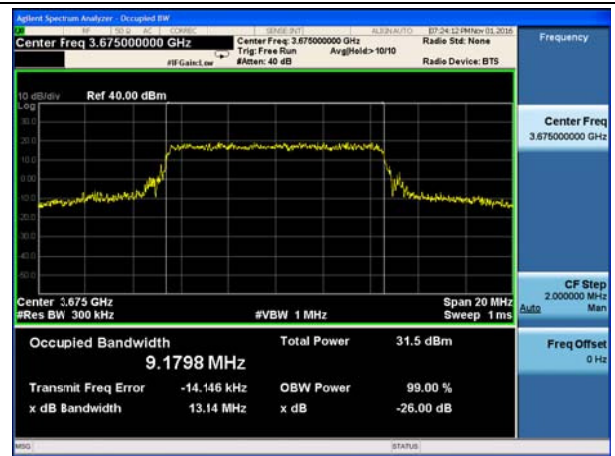


LTE Band 43 16QAM 10MHz CH44340

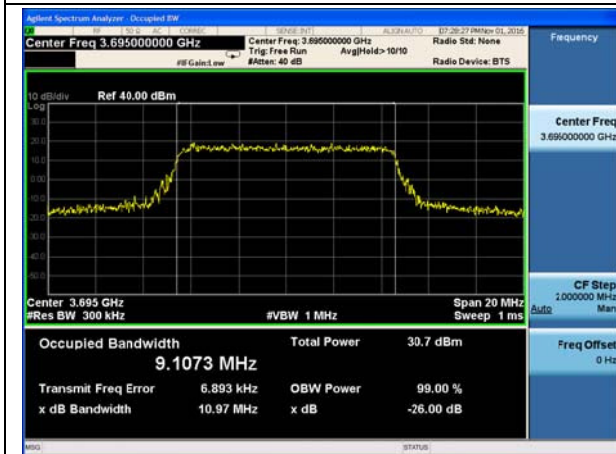


LTE Band 43 QPSK 10MHz CH44540

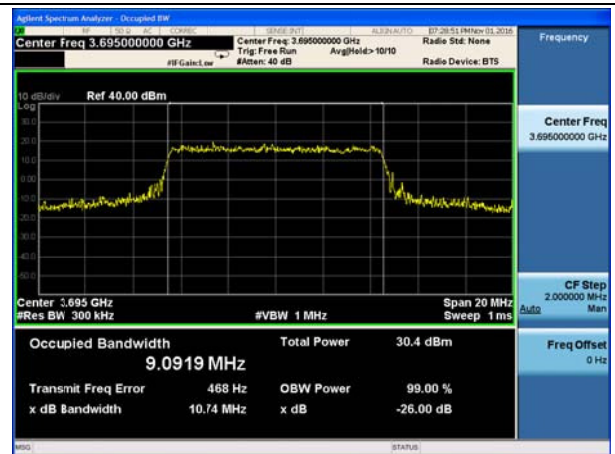


LTE Band 43 16QAM 10MHz CH44540

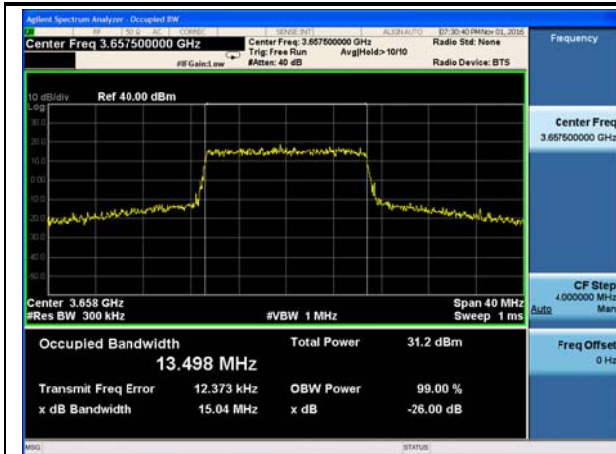


LTE Band 43 QPSK 15MHz CH44165

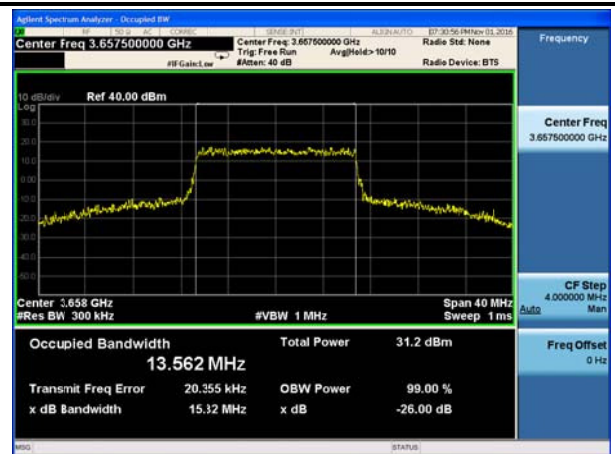


LTE Band 43 16QAM 15MHz CH44165

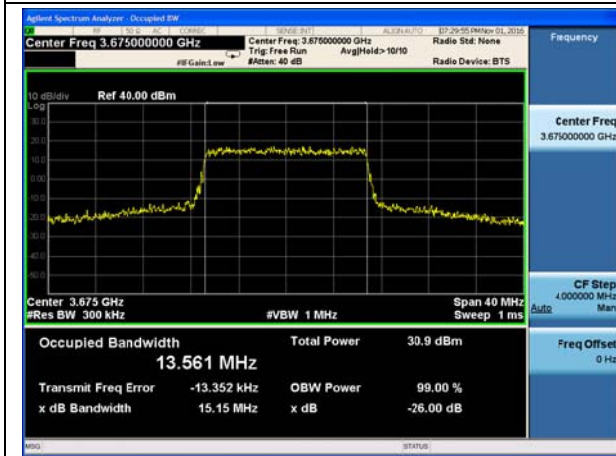


LTE Band 43 QPSK 15MHz CH44340

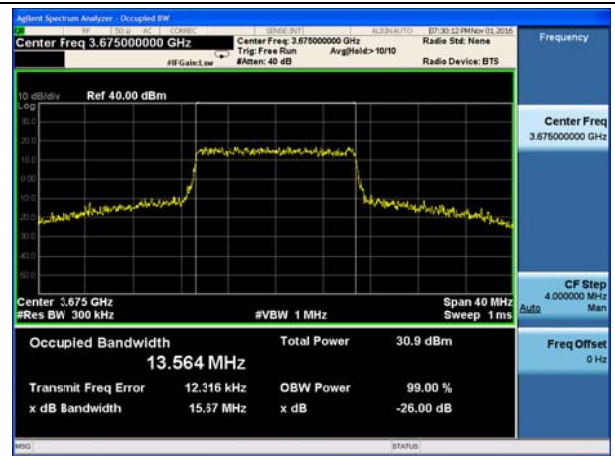

LTE Band 43 16QAM 15MHz CH44340

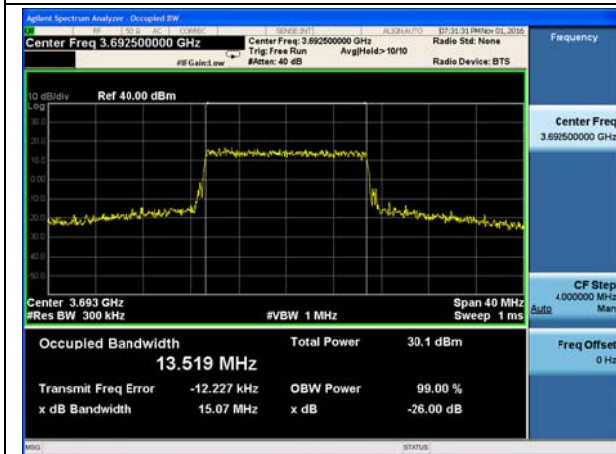


LTE Band 43 QPSK 15MHz CH44515

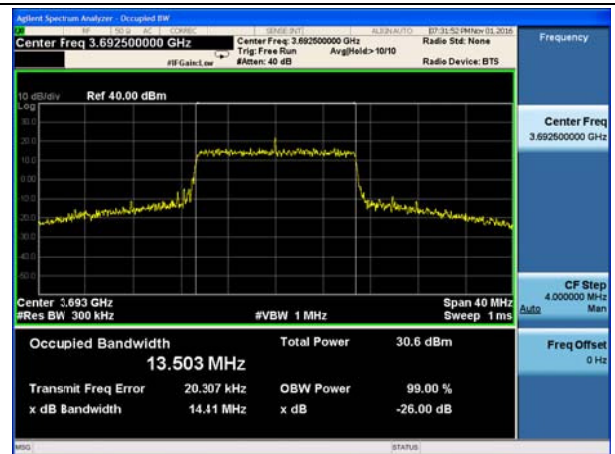


LTE Band 43 16QAM 15MHz CH44515




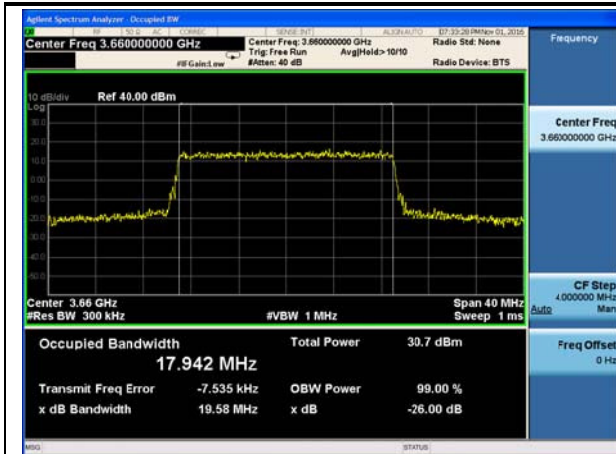


LTE Band 43 QPSK 20MHz CH44190

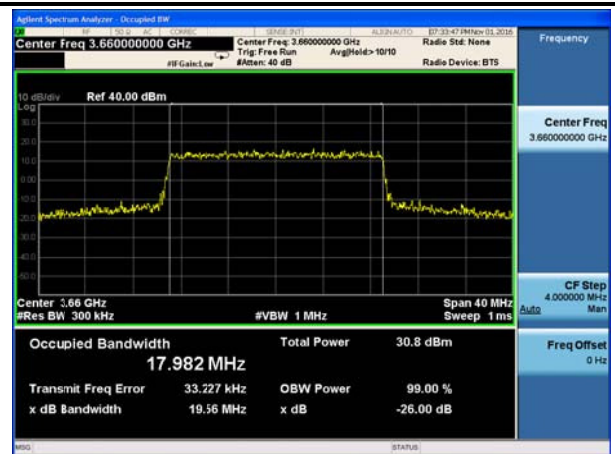


LTE Band 43 16QAM 20MHz CH44190

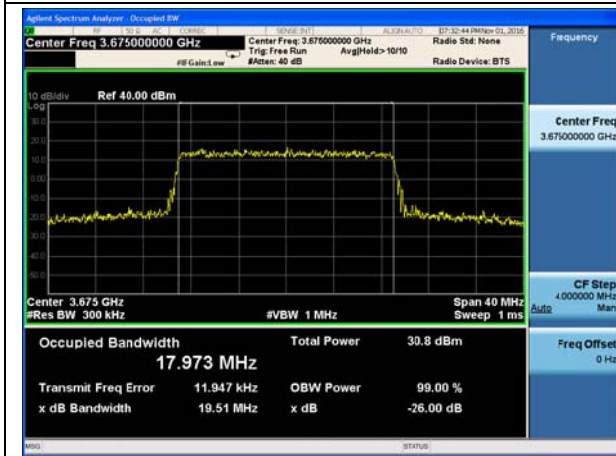


LTE Band 43 QPSK 20MHz CH44340

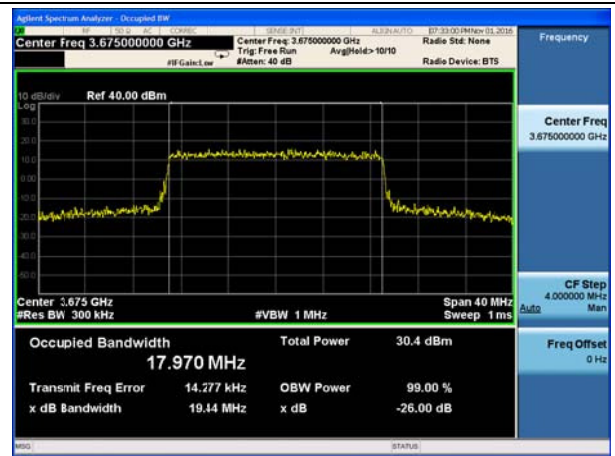

LTE Band 43 16QAM 20MHz CH44340

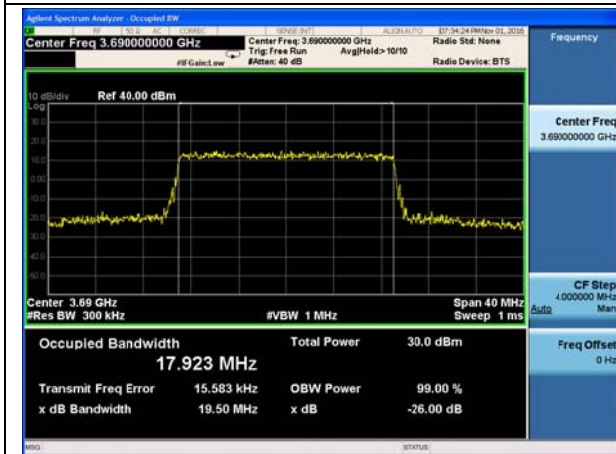

LTE Band 43 QPSK 20MHz CH44490

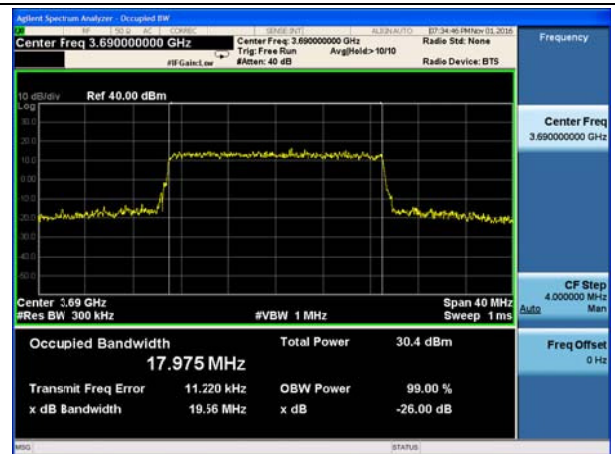

LTE Band 43 16QAM 20MHz CH44490

### 5.3. Band Edge Compliance

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. For LTE Band 43 Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.  
RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 43 (5MHz).  
RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 43 (10MHz).  
RBW is set to 150 kHz, VBW is set to 510 kHz for LTE Band 43 (15MHz).  
RBW is set to 200 kHz, VBW is set to 620 kHz for LTE Band 43 (20MHz) on spectrum analyzer.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Checked that all the results comply with the emission limit line.

#### Test Setup

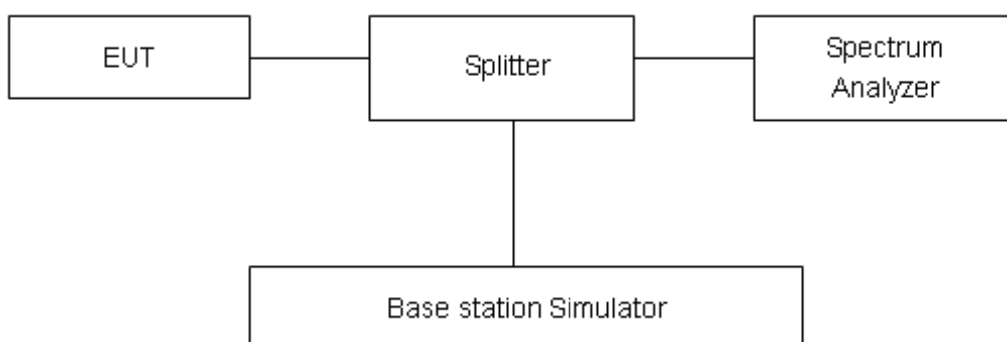

**Limits**

Rule Part 2.1051&90.1323 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.”

Limit	-13 dBm
-------	---------


**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.

**Test Result**

All the test traces in the plots shows the test results clearly.

LTE Band 43 QPSK Bandwidth = 5MHz  
CH44115, RB 1

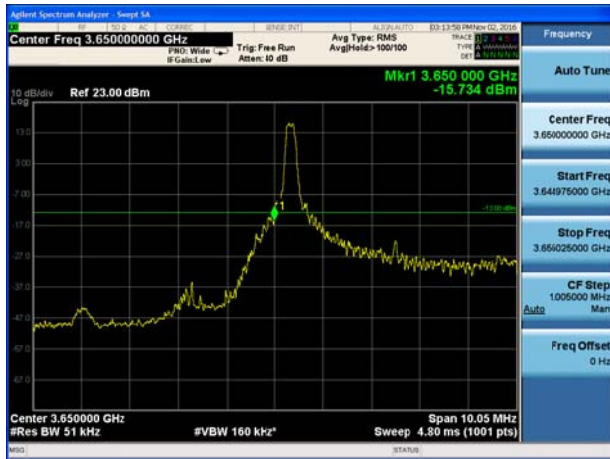

LTE Band 43 QPSK Bandwidth = 5MHz  
CH44565, RB 1




LTE Band 43 QPSK Bandwidth = 5MHz  
CH44115, RB 25




LTE Band 43 QPSK Bandwidth = 5MHz  
CH44565, RB 25



LTE Band 43 QPSK Bandwidth = 10MHz  
CH44140, RB 1

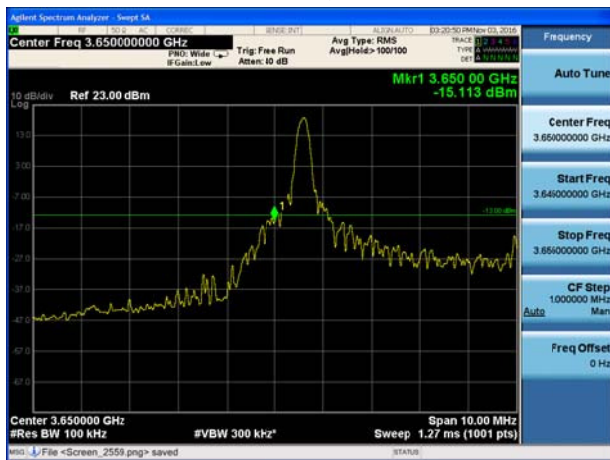

LTE Band 43 QPSK Bandwidth = 10MHz  
CH44540, RB 1

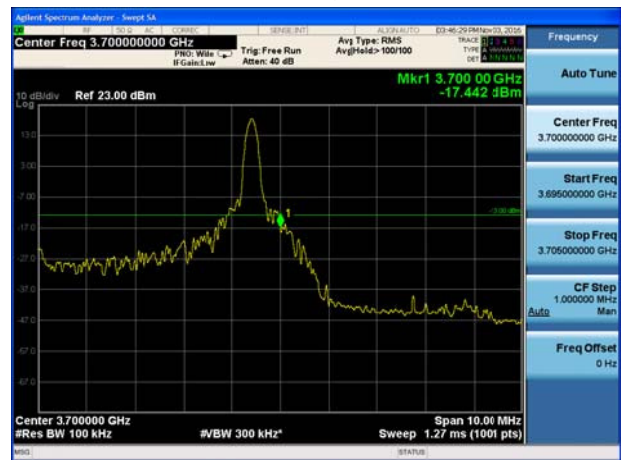




LTE Band 43 QPSK Bandwidth = 10MHz  
CH44140, RB 50



LTE Band 43 QPSK Bandwidth = 10MHz  
CH44540, RB 50




LTE Band 43 QPSK Bandwidth = 15MHz  
CH44165, RB 1

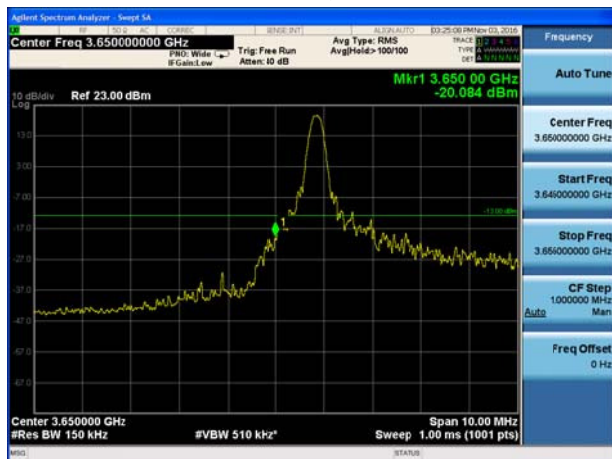

LTE Band 43 QPSK Bandwidth = 15MHz  
CH44515, RB 1




LTE Band 43 QPSK Bandwidth = 15MHz  
CH44165, RB 75

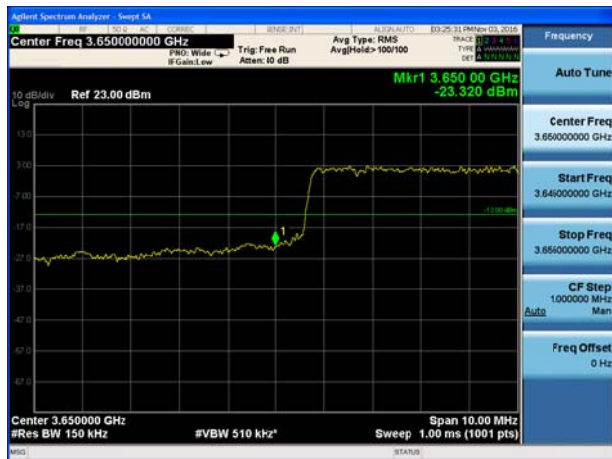


LTE Band 43 QPSK Bandwidth = 15MHz  
CH44515, RB 75




LTE Band 43 QPSK Bandwidth = 20MHz  
CH44190, RB 1

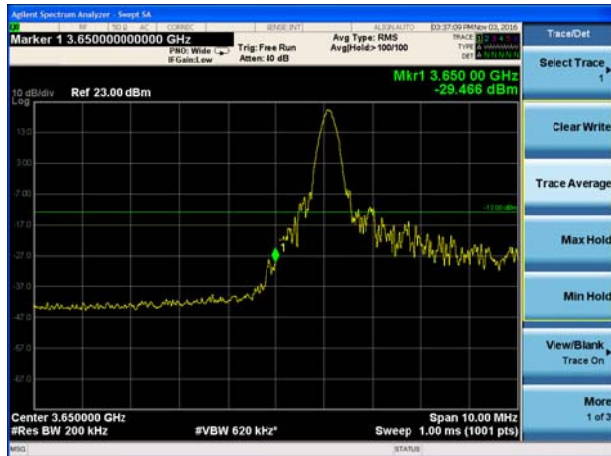

LTE Band 43 QPSK Bandwidth = 20MHz  
CH44490, RB 1

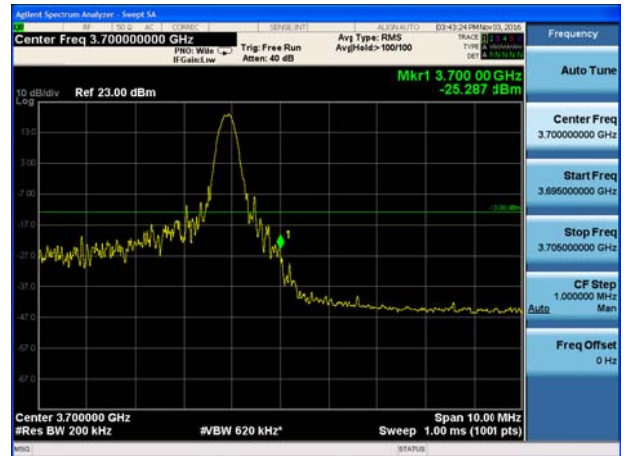


LTE Band 43 QPSK Bandwidth = 20MHz  
CH44190, RB 100

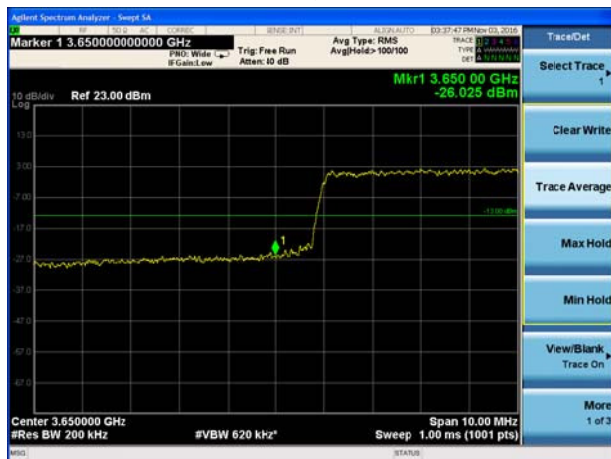

LTE Band 43 QPSK Bandwidth = 20MHz  
CH44490, RB 100



LTE Band 43 16QAM Bandwidth = 5MHz  
CH44115, RB 1

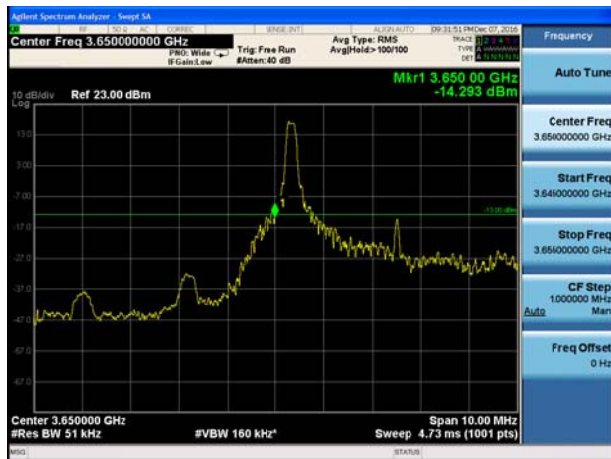

LTE Band 43 16QAM Bandwidth = 5MHz  
CH44565, RB 1

