

AESEB1S Antenna material requirements specification

Customer name: Concord Intelligent Technology (Huizhou) Ltd.
 Project model: AESEB1S
 Product Name: Right earphone antenna
 Product Specification: ANT 2.4GHz FPC/ R ANTENNA14.5x4.6xT0.15mm 336022-1B
 Material code: 107-0701404B2
 Supplier Model number: 336022-1B, Yu Sheng


Changed Contents Resume:

NO	Version	Status	Effective date	Responsible person	Page number	Notes
1	R:A	First edition	2023-03-29	YuenShujun	15	

Manufacturer name: SHENZHEN YUSHENG COMMUNICATION EQUIPMENT CO., LTD

Manufacturer address: 407-411, Floor 4, Building 2, Yuntai Chuanggu Park, southeast of the intersection of Guangming Avenue and Dongchang Road, Guangming District, Shenzhen

Supplier acknowledges signature:

Responsible person/date		IQC/ date -	Audit/date	Approval/date
MD	Feng Jiwu	Zhong	Zeng	
RF	Chen Kehong			

Demander's signature (please return it after confirmation) :

Judgment result of the demander: <input type="checkbox"/> Passed <input type="checkbox"/> failed			
Development and Design Engineer/Date	SQE Engineer/date	Purchasing Leader/date	Development Manager approval/date

Catalogue

STEP 1: OVERVIEW	3
1.1 SCOPE OF APPLICATION	3
1.2 BASIC INFORMATION OF THE PROJECT	3
2. REQUIREMENTS FOR TECHNICAL INDICATORS	3
2.1 INTRODUCTION OF TEST ITEMS AND EQUIPMENT	3
2.2 ACTIVE REPORTING	3
2.2.1 TEST INSTRUCTIONS	3
2.2.2 ELECTRICAL PERFORMANCE PARAMETERS	4
2.2.3 ANTENNA ORIENTATION DIAGRAM	5
2.2.4 ANTENNA PASSIVE PARAMETERS	6
2.2.5 ANTENNA PASSIVE PARAMETER -FREE SPACE	7
2.2.6 ANTENNA PASSIVE PARAMETERS -HEAD/EAR	8
2.3 MOTHERBOARD CONDUCTS DATA	9
2.4 ANTENNA OTA	9
2.5 ANTENNA MATCHING	10
2.6 HUMAN HEAD SIMULATION TE	10
3.STRUCTURAL DRAWINGS	11
RIGHT HEADPHONE ANTENNA DRAWING	11
4.LAYOUT MAP-L (6 * 40 = 240 PCS / SHEET)	12
5.BILL OF MATERIALS	13
6. FULL-SIZE REPORT	14
6.1 LEFT EARPHONE SIZE REPORT	14
7 WAY OF PACKAGING	15

Step 1: Overview

1.1 Scope of Application

This requirement specifies the antenna technical requirements and material requirements specification for AESEB1S products

This requirement applies to the selection, testing and acceptance of AESEB1S antennas.

1.2 Basic information of the project

Antenna name:	AESEB1S
Antenna band:	BT:2402-2484MHZ
Antenna material:	FPC antenna
Antenna version:	V0.5

2. Requirements for technical indicators

2.1 Introduction of test items and equipment

List	Test items	equipment
Active testing	TRP,TIS	General tester,microwave darkroom

2.2 Active Reporting

2.2.1 Test Instructions

Test tools: Agilent8960 integrometer, R&SCMW500, all-wave far-field ETS darkroom, high precision positioning system and its controller and computer with automatic test program

Test environment: temperature $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$, humidity $50\% \pm 15\%$


Test method: The DUT is fixed on the center position of the turntable with the H plane, and the center position of the horn antenna is on the same horizontal line.

The positioning system makes the DUT rotate on the whole sphere to meet the high precision three-dimensional positioning. Each RF instrument, turntable controller and PC with automatic test software communicate through the GPIB interface.

2.2.2 Electrical performance parameters

Electrical performance indicators of the product	
Operating frequency range	2402MHz-2484MHz:
Standing wave ratio	2402MHz-2484MHz: < 2.0
Antenna gain	2402MHz-2484MHz: -2.0 dBi \pm 1dBi
Radiation efficiency	2402MHz-2484MHz: > 20 %
Impedance	50 ohm
Product material description	
FPC	Electrolytic copper half and half gold plated
Product environment description	
Operating temperature	-40 °C to + 80 °C
Storage temperature	-40 °C to + 80 °C

2.2.3 Antenna orientation diagram

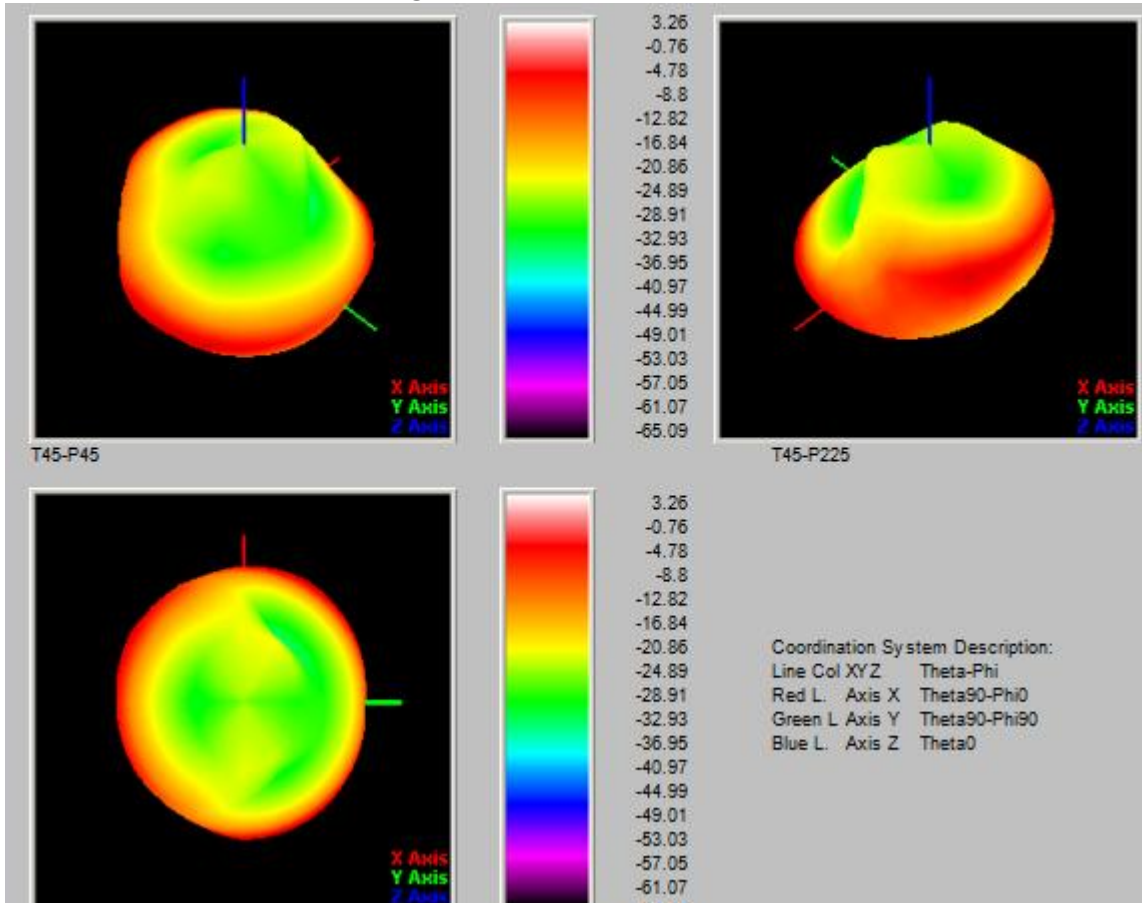

2.2.4 Antenna passive parameters



2.2.5 Antenna Passive Parameter -Free space

Test	L								
Test Point ID	1	2	3	4	5	6	7	8	9
Freq. (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480
Efficiency (%)	25%	26%	25%	26%	26%	27%	25%	25%	24%
efficiency 效率(dB)	-6.3	-6.1	-6.2	-5.9	-5.8	-5.7	-6.1	-6.2	-6.2
transmission gain 增益 (dBi)	-2.1	-2.2	-2.1	-1.9	-1.7	-2.0	-2.1	-2.0	-2.2

Test	R								
Test Point ID	1	2	3	4	5	6	7	8	9
Freq. (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480
Efficiency (%)	24%	25%	26%	25%	27%	27%	25%	24%	23%
efficiency 效率(dB)	-6.5	-6.2	-6.1	-6.1	-5.9	-5.8	-6.2	-6.2	-6.6
transmission gain 增益 (dBi)	-2.2	-2.1	-2.2	-2.1	-2.0	-2.1	-2.4	-2.5	-2.6

2.2.6 Antenna Passive parameters -Head/ear

Test	L								
Test Point ID	1	2	3	4	5	6	7	8	9
Freq. (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480
Efficiency (%)	8%	10%	10%	12%	12%	11%	9%	9%	7%
efficiency 效率(dB)	-9.4	-9.5	-9.3	-9.1	-9.1	-9.2	-9.3	-9.4	-9.5
transmission gain 增益 (dBi)	-6.4	-6.2	-6.3	-5.7	-6.5	-6.1	-6.4	-6.4	-6.3

Test	R								
Test Point ID	1	2	3	4	5	6	7	8	9
Freq. (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480
Efficiency (%)	7%	8%	10%	12%	12%	10%	9%	8%	7%
efficiency 效率(dB)	-9.2	-9.1	-9.2	-9.3	-9.3	-9.5	-9.4	-9.2	-9.3
transmission gain 增益 (dBi)	-6.4	-6.3	-6.3	-6.3	-6.5	-6.4	-6.3	-6.3	-6.5

2.3 Motherboard conducts data


Test	L			R		
	0	39	78	0	39	78
CHANNEL	0	39	78	0	39	78
TRP (dBm)	10.1	10.2	10.1	10.11	10.3	9.8
TIS (dBm)	-93	-93	-93	-92	-93	-92

2.4 Antenna OTA

自由 free	L			R		
CHANNEL	0	39	78	0	39	78
TRP (dBm)	3.85	4.12	4.32	4.35	4.02	4.11
TIS (dBm)	-88.65	-88.75	-87.85	-88.3	-88.02	-89.14

头耳 Head and ear	L			R		
CHANNEL	0	39	78	0	39	78
TRP (dBm)	0.45	0.36	0.50	0.15	0.33	0.41
TIS (dBm)	-83.15	-83.02	-83.1	-82.68	-83.14	-83.44

2.5 Antenna Matching

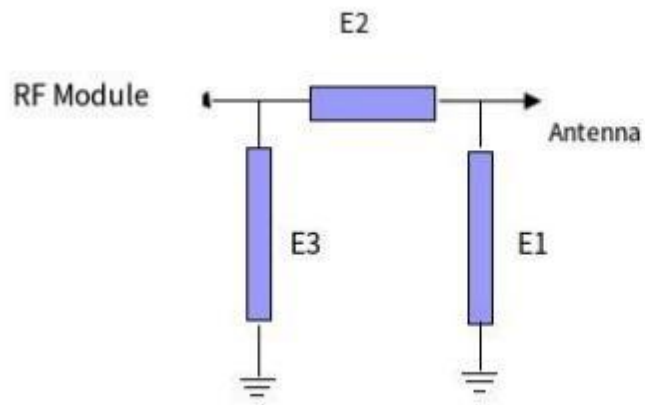

E1:NC
E2:0
E3:NC

2.6 Human Head simulation te




3.Structural drawings

Right headphone antenna drawing

由 Autodesk 教育版产品制作		A																																	
<p>skills requirement:</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr><td>PI substrate:</td><td>0.5m1</td></tr> <tr><td>Electrolytic copper:</td><td>0.5oz (BD)</td></tr> <tr><td>Double-sided tape:</td><td>3M-9471LSF</td></tr> <tr><td>Nickel plated:</td><td>3*8mm</td></tr> <tr><td>Gilded:</td><td>0.025mm</td></tr> <tr><td>Surface ink color:</td><td>Mat black</td></tr> <tr><td>Printing font color:</td><td>Bright black</td></tr> <tr><td>Printing font height:</td><td>According to drawings</td></tr> </table> <p>4. Reliability requirements:</p> <ol style="list-style-type: none"> 1. Reliability test: salt spray test\ultra friction test\alcohol resistance test\100 grid test. 2. The front ink, the surface of the ink is required to be folded in half without cracking, scratching, etc. 	PI substrate:	0.5m1	Electrolytic copper:	0.5oz (BD)	Double-sided tape:	3M-9471LSF	Nickel plated:	3*8mm	Gilded:	0.025mm	Surface ink color:	Mat black	Printing font color:	Bright black	Printing font height:	According to drawings	<p>5. Tolerance requirements:</p> <ol style="list-style-type: none"> 1. Shape tolerance ± 0.10; 2. Copper foil circuit tolerance ± 0.05; 3. The position of the copper foil to the shape is ± 0.15; 4. Hole-to-hole position tolerance ± 0.10; hole-to-shape position tolerance ± 0.15; 5. The size tolerance of gold finger is ± 0.20; 6. For other unmarked dimensions, refer to 2D drawings. 																		
PI substrate:	0.5m1																																		
Electrolytic copper:	0.5oz (BD)																																		
Double-sided tape:	3M-9471LSF																																		
Nickel plated:	3*8mm																																		
Gilded:	0.025mm																																		
Surface ink color:	Mat black																																		
Printing font color:	Bright black																																		
Printing font height:	According to drawings																																		
<p>6. Key control size:</p> <p>The dimensions marked with numbers are regarded as important dimensions, and the others refer to 2D drawings</p>		<p>Shenzhen Yu Sheng Communication Equipment Co., Ltd.</p>																																	
<p>7. Environmental requirements:</p> <p>Parts meet ROHS2.0/REACH/GP environmental protection requirements</p>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>Model</th> <th>ASS315</th> <th>DATE</th> <th>2023/04/7</th> </tr> <tr> <td>Name</td> <td>RF+PC</td> <td>Design</td> <td>JFB</td> </tr> <tr> <td>Part NO</td> <td>33602-13</td> <td>RD</td> <td>JFB</td> </tr> <tr> <td>Material quality</td> <td>Electrolytic copper (part to lead)</td> <td>Review</td> <td>JFB</td> </tr> <tr> <td>Mold surface treatment</td> <td></td> <td>RF</td> <td>CKH</td> </tr> <tr> <td>Appearance treatment</td> <td></td> <td>CONFIRM</td> <td></td> </tr> <tr> <td>UNIT</td> <td>mm</td> <td>proportion</td> <td>FIT</td> </tr> <tr> <td>Revised</td> <td></td> <td></td> <td>R. A</td> </tr> </table>		Model	ASS315	DATE	2023/04/7	Name	RF+PC	Design	JFB	Part NO	33602-13	RD	JFB	Material quality	Electrolytic copper (part to lead)	Review	JFB	Mold surface treatment		RF	CKH	Appearance treatment		CONFIRM		UNIT	mm	proportion	FIT	Revised			R. A
Model	ASS315	DATE	2023/04/7																																
Name	RF+PC	Design	JFB																																
Part NO	33602-13	RD	JFB																																
Material quality	Electrolytic copper (part to lead)	Review	JFB																																
Mold surface treatment		RF	CKH																																
Appearance treatment		CONFIRM																																	
UNIT	mm	proportion	FIT																																
Revised			R. A																																
<p>8. Packaging requirements:</p> <p>Packed in PE bags, the quantity of each bag is 100PCS, there is a mark on the outside of the bag</p>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>位置</th> <th>公差</th> <th>位置</th> <th>公差</th> </tr> <tr> <td>○</td> <td>± 0.10</td> <td>□</td> <td>0.02</td> </tr> <tr> <td>◎</td> <td>± 0.12</td> <td>□</td> <td>0.03</td> </tr> <tr> <td>⊥</td> <td>± 0.15</td> <td>⊥</td> <td>0.02</td> </tr> <tr> <td>∇</td> <td>± 0.20</td> <td>∇</td> <td>0.04</td> </tr> <tr> <td>∇</td> <td>± 0.20</td> <td>∇</td> <td>0.02</td> </tr> </table>		位置	公差	位置	公差	○	± 0.10	□	0.02	◎	± 0.12	□	0.03	⊥	± 0.15	⊥	0.02	∇	± 0.20	∇	0.04	∇	± 0.20	∇	0.02								
位置	公差	位置	公差																																
○	± 0.10	□	0.02																																
◎	± 0.12	□	0.03																																
⊥	± 0.15	⊥	0.02																																
∇	± 0.20	∇	0.04																																
∇	± 0.20	∇	0.02																																
<p>DATE</p> <p>Modify the content</p>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>Version</th> <th>Revise</th> </tr> <tr> <td> </td> <td> </td> </tr> </table>		Version	Revise																														
Version	Revise																																		
1		2																																	
3		4																																	
5		6																																	
7		8																																	
由 Autodesk 教育版产品制作		由 Autodesk 教育版产品制作																																	

4.Layout map-R (6 * 40 = 240 pcs / sheet)

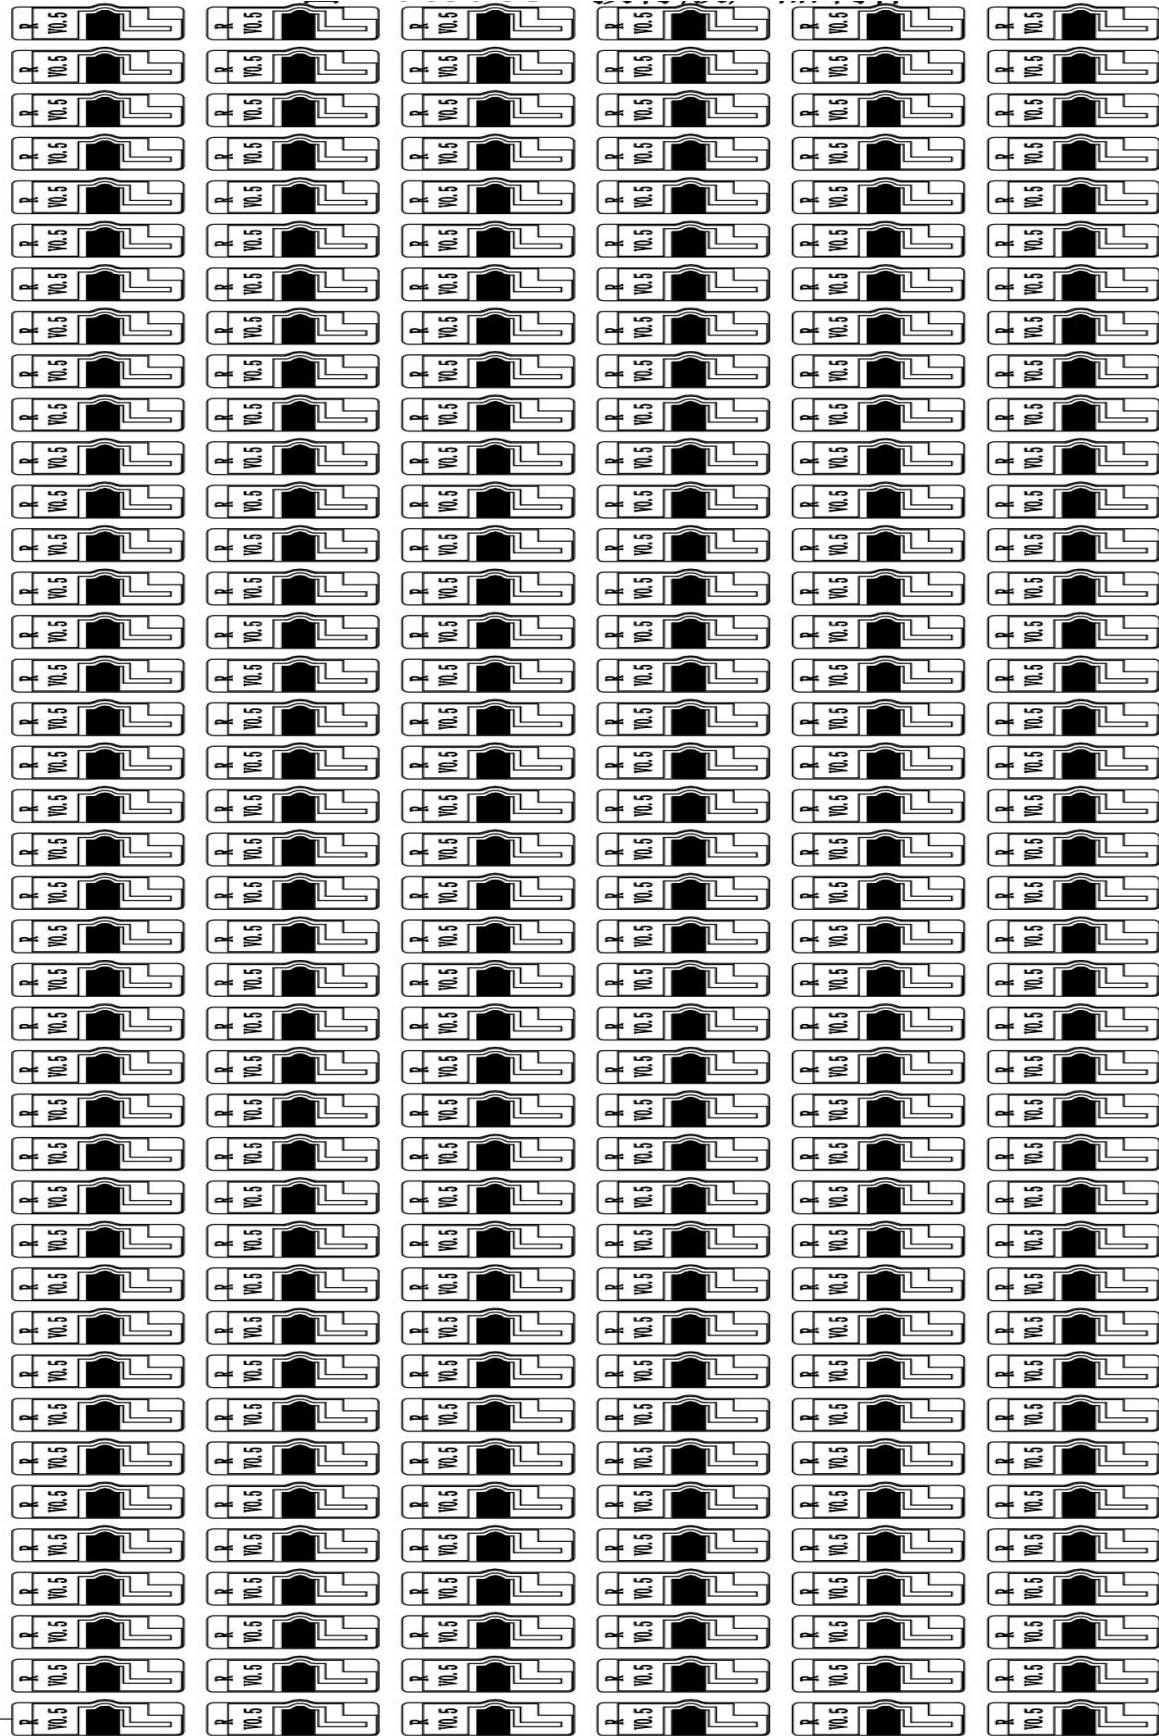

242.95±0.15

103.42±0.15

5.Bill of Materials

YUSHENG COMMUNICATION TECHNOLOGY CO.,LTD.

336022(AESEB1S)-BOM

 Edition/版本: **R:A**

 client/机种:**336**

 Model/项目: **0336022**

 date/日期: **20230407**

Item	Part No 项次	Name 名称	Types of 类型	version 版 本	specification 规格	Material quality 材质	colour 颜色	Craft 表面处 理	unit 单位	Quantity 数量
1	336022- IA	L-FPC	Z	R:A	14.50*4.60*0.11 MM	Electrolytic copper (half to half)电解铜 半对半	black 黑 色	Gold plated 镀金	PCS	1
1.1	336022- IA-01	L-FPC	Z	R:A	14.50*4.60*0.11 MM	Electrolytic copper (half to half)电解铜 半对半	black 黑 色	Gold plated 镀金	PCS	1
2	336022- IB	R-FPC	Z	R:A	14.50*4.60*0.11 MM	Electrolytic copper (half to half)电解铜 半对半	black 黑 色	Gold plated 镀金	PCS	1
2.1	336022- IB-01	R-FPC	Z	R:A	14.50*4.60*0.11 MM	Electrolytic copper (half to half)电解铜 半对半	black 黑 色	Gold plated 镀金	PCS	1

The above parts meet the environmental requirements of ROHS2.0 HF Reach GP

Type: W. Outsourcing B. Semi-finished products Z. Finished products C. Customer supply

Confirmation:

Review:
Production: FJW

6. Full-size report

6.1 Left earphone size report

FPC-R Full-size report


Customer name: Material number 336022-IB Project AESEB1S date: 20230407
 Product type: Stampings Plastic parts Assembly piece

NO	Inspection Specification	Sample:1	Sample:2	Sample:3	Sample:4	Sample:5	As a result	Inspection tool	Notes
1	4.60±0.15	4.65	4.58	4.55	4.61	4.62	OK	Second dimension	
2	14.50±0.15	14.52	14.53	14.55	14.55	14.56	OK	Second dimension	
3	0.11±0.02	0.11	0.12	0.12	0.12	0.11	OK	Second dimension	
4									
5									
Performance test	Salt spray test	√	√	√	√	√	OK		
	Open circuit	√	√	√	√	√	OK		
	Hundred Bar test	√	√	√	√	√	OK		
	Ant	√	√	√	√	√	OK		
Appearance	Product appearance	√	√	√	√	√	OK		
	Package identification	√	√	√	√	√	OK		
	Production date								
Hazardous Substances Control	√	√	√	√	√	√	OK		
The end result	<input checked="" type="checkbox"/> Accept <input type="checkbox"/> Rejected <input type="checkbox"/> Rework <input type="checkbox"/> Special Mining								

Approved: jyb

Making: zyh

7 Way of packaging

Packing pattern drawing																		
Product name	Antenna module																	
Material number																		
Project model																		
Packing details	Carton Size 1: 270*260*200MM Carton Size 2: 260*200*200MM Carton Size 3: Subject to order quantity/volume																	
																		
	Packing method Packing as per order quantity Total number of cases Packing as per order quantity																	
Label requirement	Label Size 1: Universal 100*100mm Label Size 2: According to customer requirements																	
	<table border="1"> <tr> <th colspan="2" style="text-align: center;">深圳市昱晟通讯设备有限公司</th> </tr> <tr> <th colspan="2" style="text-align: center;">SHENZHEN YUSHENG COMMUNICATION EQUIPMENT CO., LTD</th> </tr> <tr> <td>Customer name 客户名称</td> <td style="text-align: center;">*****</td> </tr> <tr> <td>Order reference 订单编号</td> <td style="text-align: center;">*****</td> </tr> <tr> <td>Project name 项目名称</td> <td style="text-align: center;">*****</td> </tr> <tr> <td>Material code 物料编码</td> <td style="text-align: center;">*****</td> </tr> <tr> <td>Quantity 出货数量</td> <td style="text-align: center;">****PCS</td> </tr> <tr> <td>Date 出货日期</td> <td style="text-align: center;">*****</td> </tr> <tr> <td colspan="2" style="font-size: small;">Address: 407-411, Floor 4, Building 2, Yuntai Chuanggu Park, southeast of the intersection of Guangming Avenue and Dongchang Road, Guangming District, Shenzhen</td> </tr> </table>	深圳市昱晟通讯设备有限公司		SHENZHEN YUSHENG COMMUNICATION EQUIPMENT CO., LTD		Customer name 客户名称	*****	Order reference 订单编号	*****	Project name 项目名称	*****	Material code 物料编码	*****	Quantity 出货数量	****PCS	Date 出货日期	*****	Address: 407-411, Floor 4, Building 2, Yuntai Chuanggu Park, southeast of the intersection of Guangming Avenue and Dongchang Road, Guangming District, Shenzhen
深圳市昱晟通讯设备有限公司																		
SHENZHEN YUSHENG COMMUNICATION EQUIPMENT CO., LTD																		
Customer name 客户名称	*****																	
Order reference 订单编号	*****																	
Project name 项目名称	*****																	
Material code 物料编码	*****																	
Quantity 出货数量	****PCS																	
Date 出货日期	*****																	
Address: 407-411, Floor 4, Building 2, Yuntai Chuanggu Park, southeast of the intersection of Guangming Avenue and Dongchang Road, Guangming District, Shenzhen																		
Matters needing attention																		
1. Due to the quantity limitation of the order, the packing method of each item shall be based on the total quantity of the order or the physical volume																		
2. Storage temperature: normal temperature																		
3. Storage condition: Store in a cool and dry place																		