

FCC REPORT

Applicant: Shenzhen Transtar Electronics Co., LTD

Address of Applicant: Colinda Industrial Park, Opposite Side of No. 15 Furong Road, Songgang, Bao'an, Shenzhen, China

Manufacturer/Factory: Shenzhen Transtar Electronics Co., LTD

Address of Manufacturer/Factory: Colinda Industrial Park, Opposite Side of No. 15 Furong Road, Songgang, Bao'an, Shenzhen, China

Equipment Under Test (EUT)

Product Name: Wireless TV Speaker

Model No.: TV-9000, AB-9000, TV-8000, TV-3000, BT-9000, TV-7000, TV-XXXX

Trade Mark: Albohes

FCC ID: 2A12STV-9000

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: January 29, 2018

Date of Test: January 29-March 01, 2018

Date of report issued: March 02, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	March 02, 2018	Original

Prepared By: Tiger Chen **Date:** March 02, 2018
Project Engineer

Check By: Andy. wa **Date:** March 02, 2018
Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 DESCRIPTION OF SUPPORT UNITS	6
5.4 TEST FACILITY.....	6
5.5 TEST LOCATION	6
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
5.7 ADDITIONAL INSTRUCTIONS.....	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 RADIATED EMISSION METHOD	13
7.3.1 <i>Field Strength of The Fundamental Signal</i>	16
7.3.2 <i>Spurious emissions</i>	17
7.3.3 <i>Bandedge emissions</i>	22
7.4 20dB OCCUPY BANDWIDTH.....	23
8 TEST SETUP PHOTO	25
9 EUT CONSTRUCTIONAL DETAILS	27

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark : Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Wireless TV Speaker
Model No.:	TV-9000, AB-9000, TV-8000, TV-3000, BT-9000, TV-7000, TV-XXXX
Test Model No:	TV-9000
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are color and model name for commercial purpose.</i>	
Operation Frequency:	920.6MHz to 925.0MHz
Channel numbers:	22
Modulation type:	pi/4 DQPSK
Serial No.:	QSD-9000-AB
Test sample(s) ID:	GTS201801000204-1
Sample(s) Status	Engineer sample
Hardware:	TV9000_TX_V2.0 2018.01.17
Software:	CHECK SUM: 85BB
Antenna Type:	Integrated antenna
Antenna gain:	0dBi(declare by Applicant)
Power supply:	AC/DC ADAPTER for both MODEL: SWN006S050100U1 INPUT: AC 100-240V, 50/60Hz, 0.2A OUTPUT: DC 5.0V, 1.0A

Channel list:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	920.6	12	922.8
2	920.8	13	923.0
3	921.0	14	923.2
4	921.2	15	923.4
5	921.4	16	923.6
6	921.6	17	923.8
7	921.8	18	924.0
8	922.0	19	924.2
9	922.2	20	924.6
10	922.4	21	924.8
11	922.6	22	925.0

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	86.61	88.35	86.47

5.3 Description of Support Units

None

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.

5.7 Additional instructions

Software (Used for test) from client

The test procedure was built-in by manufacture, power on and then the EUT work in continuous transmitting status, by pressing internal key to change frequency

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

Test software set




6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

7 Test results and Measurement Data

7.1 Antenna requirement

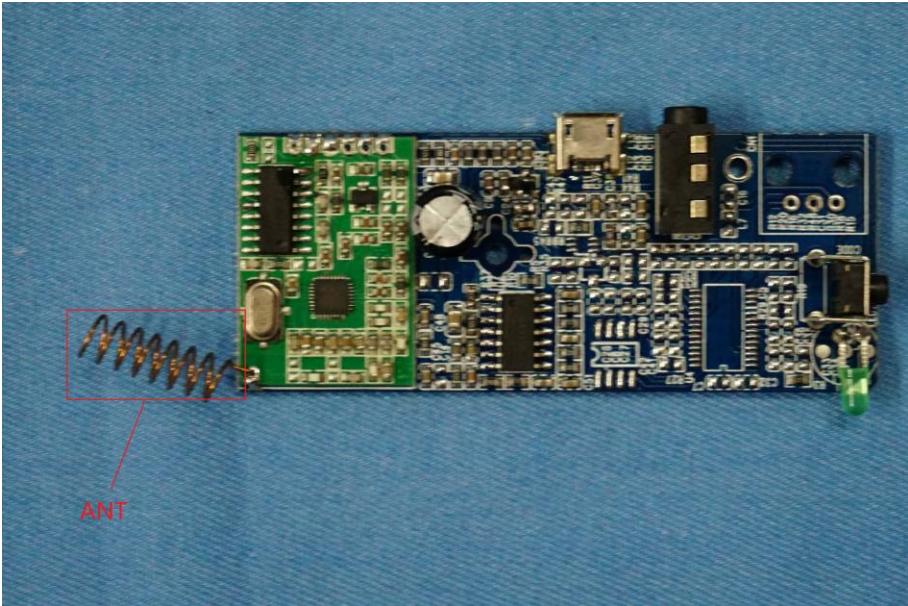
Standard requirement:	FCC Part15 C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
EUT Antenna:	
<p><i>The antenna is Integrated antenna, the best case gain of the antenna is 0dBi</i></p> 	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														


Measurement data:

Line:

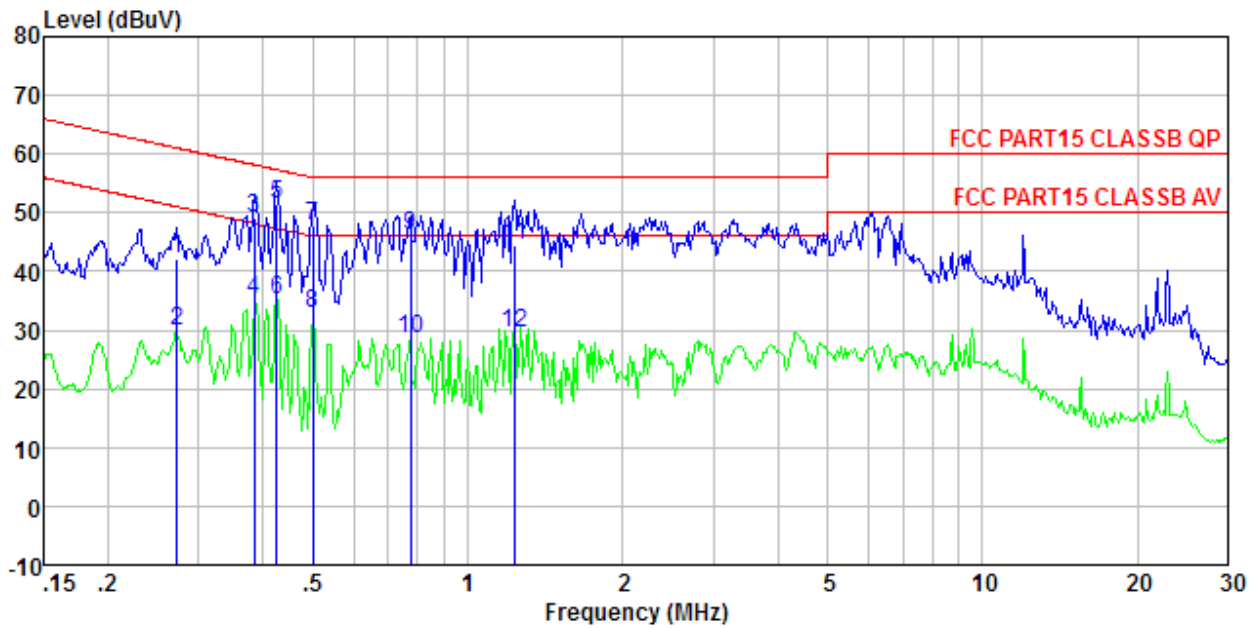

Freq MHz	Reading level dBuV	IISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.273	41.70	0.40	0.10	42.20	61.03	-18.83	QP
0.273	29.42	0.40	0.10	29.92	51.03	-21.11	Average
0.385	48.70	0.36	0.10	49.16	58.17	-9.01	QP
0.385	34.82	0.36	0.10	35.28	48.17	-12.89	Average
0.426	51.07	0.34	0.11	51.52	57.33	-5.81	QP
0.426	34.77	0.34	0.11	35.22	47.33	-12.11	Average
0.499	47.33	0.32	0.11	47.76	56.01	-8.25	QP
0.499	32.34	0.32	0.11	32.77	46.01	-13.24	Average
0.775	45.64	0.24	0.14	46.02	56.00	-9.98	QP
0.775	28.20	0.24	0.14	28.58	46.00	-17.42	Average
1.236	44.13	0.20	0.16	44.49	56.00	-11.51	QP
1.236	29.13	0.20	0.16	29.49	46.00	-16.51	Average

Neutral:

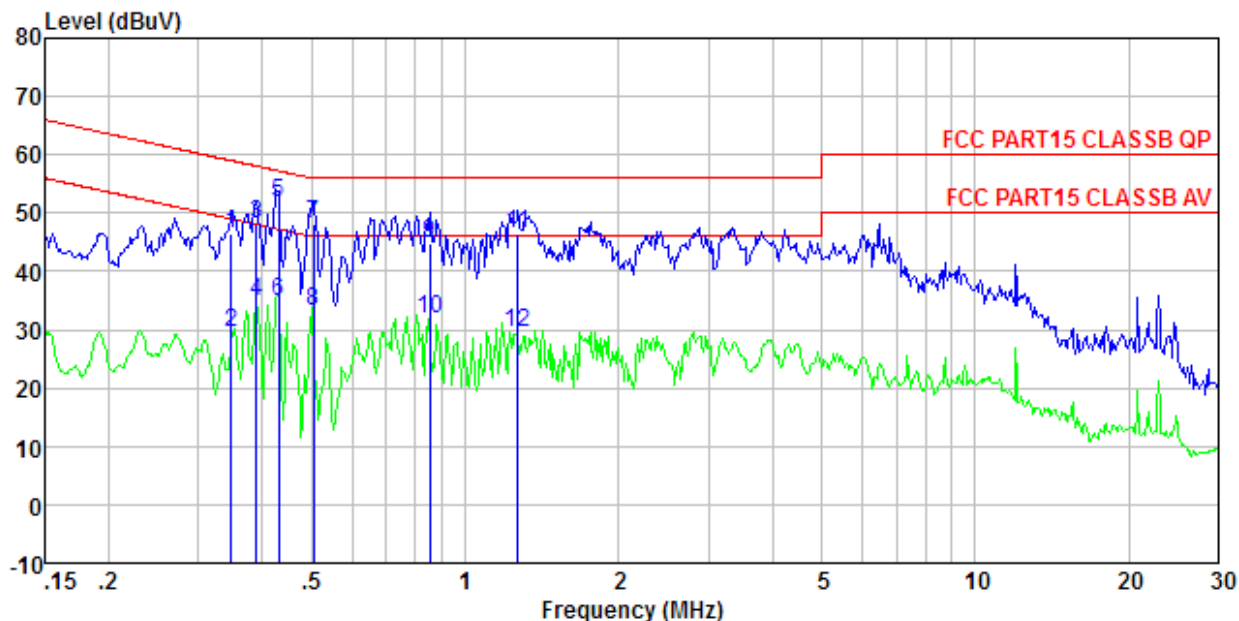




Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.348	45.92	0.37	0.10	46.39	59.00	-12.61	QP
0.348	28.95	0.37	0.10	29.42	49.00	-19.58	Average
0.389	47.50	0.36	0.11	47.97	58.08	-10.11	QP
0.389	34.40	0.36	0.11	34.87	48.08	-13.21	Average
0.431	51.45	0.34	0.11	51.90	57.24	-5.34	QP
0.431	34.51	0.34	0.11	34.96	47.24	-12.28	Average
0.505	47.56	0.31	0.11	47.98	56.00	-8.02	QP
0.505	32.82	0.31	0.11	33.24	46.00	-12.76	Average
0.853	44.57	0.23	0.14	44.94	56.00	-11.06	QP
0.853	31.43	0.23	0.14	31.80	46.00	-14.20	Average
1.269	46.08	0.20	0.16	46.44	56.00	-9.56	QP
1.269	29.06	0.20	0.16	29.42	46.00	-16.58	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 10GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
		114.00		Peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
5000		Peak			
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
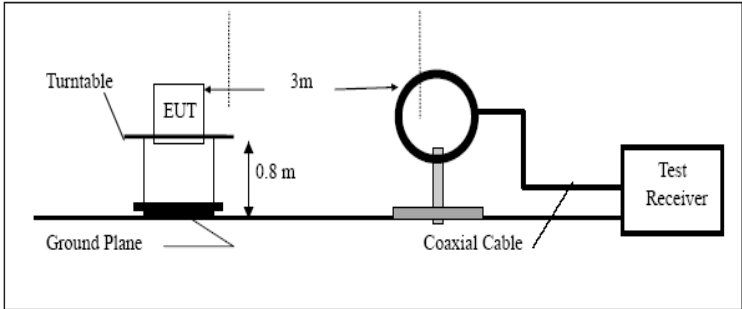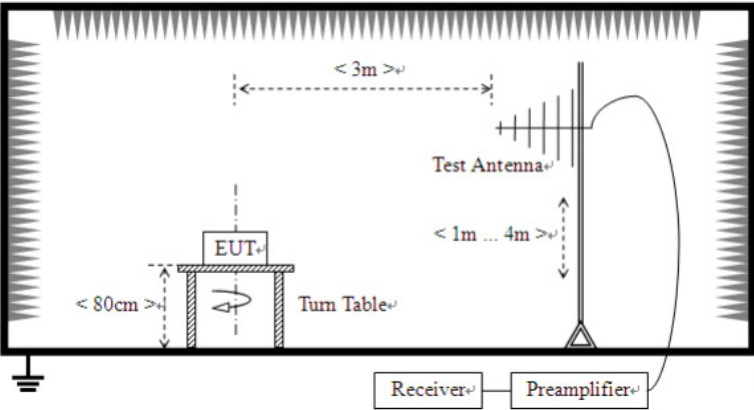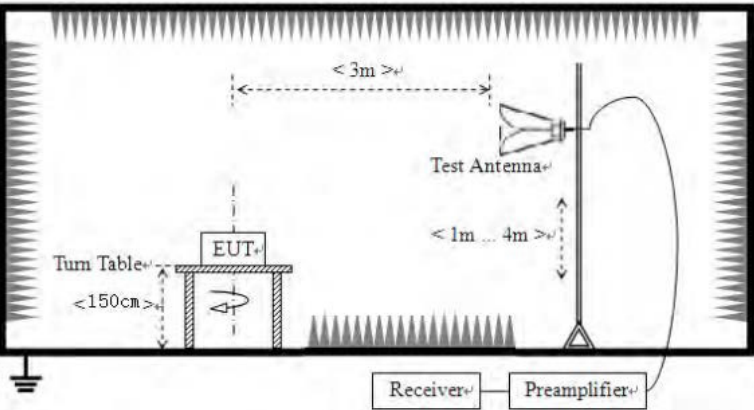
<p>Test setup:</p>	<p>Below 30MHz</p>  <p>Below 1GHz</p>  <p>Above 1GHz</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

	<ol style="list-style-type: none"> 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
920.60	97.16	22.37	4.93	37.58	86.88	114.00	-27.12	Vertical
920.60	95.33	22.37	4.93	37.58	85.05	114.00	-28.95	Horizontal
922.80	98.34	22.39	4.93	37.58	88.08	114.00	-25.92	Vertical
922.80	97.89	22.39	4.93	37.58	87.63	114.00	-26.37	Horizontal
925.00	98.57	22.41	4.95	37.58	88.35	114.00	-25.65	Vertical
925.00	97.33	22.41	4.95	37.58	87.11	114.00	-26.89	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
920.60	89.63	22.37	4.93	37.58	79.35	94.00	-14.65	Vertical
920.60	87.44	22.37	4.93	37.58	77.16	94.00	-16.84	Horizontal
922.80	89.62	22.39	4.93	37.58	79.36	94.00	-14.64	Vertical
922.80	88.07	22.39	4.93	37.58	77.81	94.00	-16.19	Horizontal
925.00	89.73	22.41	4.95	37.58	79.51	94.00	-14.49	Vertical
925.00	88.06	22.41	4.95	37.58	77.84	94.00	-16.16	Horizontal

7.3.2 Spurious emissions


■ Below 30MHz

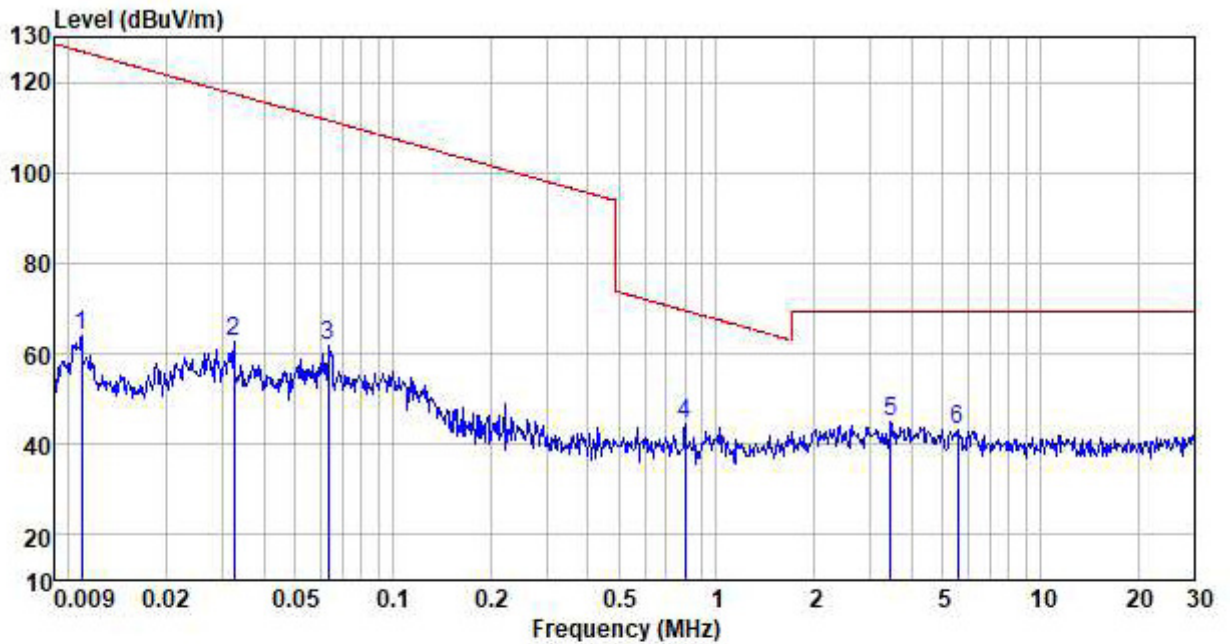

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
0.011	42.01	21.85	0.01	0.00	63.87	126.82	-62.95	Peak
0.032	42.34	20.18	0.09	0.00	62.61	117.38	-54.77	Peak
0.063	39.43	22.44	0.13	0.00	62.00	111.61	-49.61	Peak
0.799	23.66	20.69	0.31	0.00	44.66	69.56	-24.90	Peak
3.440	23.41	21.34	0.41	0.00	45.16	69.54	-24.38	Peak
5.551	20.34	22.62	0.44	0.00	43.40	69.54	-26.14	Peak


■ Below 1GHz

Horizontal

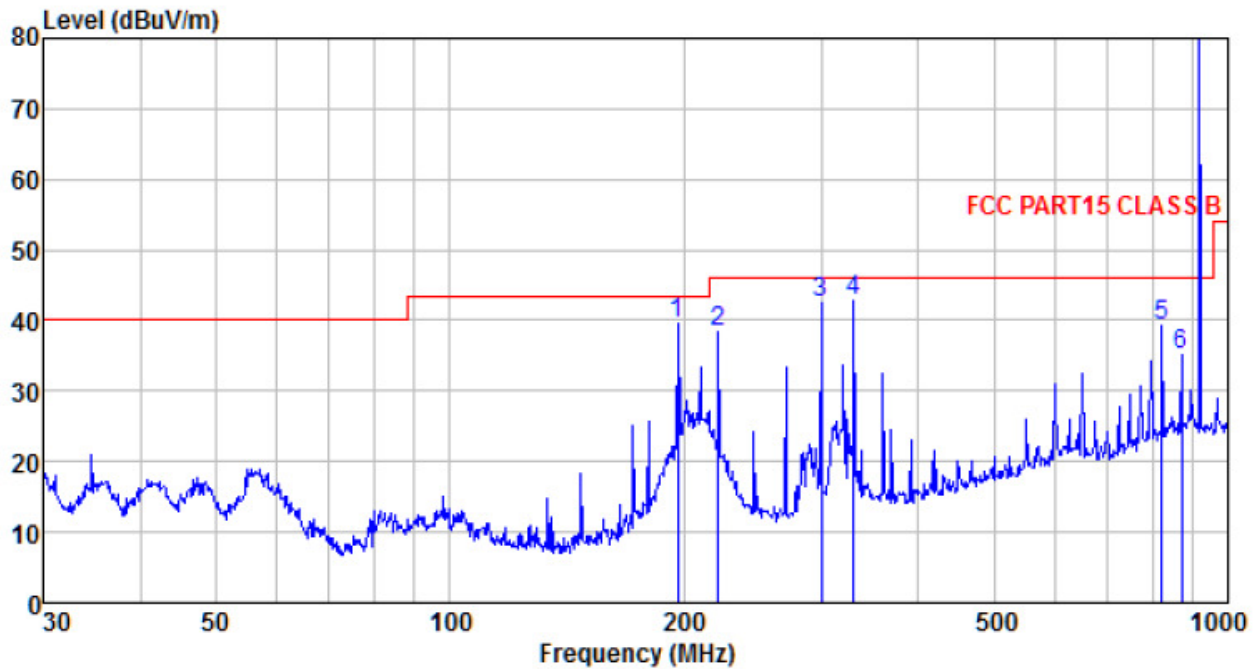

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
196.510	64.69	10.22	1.82	37.31	39.42	43.50	-4.08	QP
221.392	62.57	11.20	1.97	37.35	38.39	46.00	-7.61	QP
300.367	63.93	13.60	2.36	37.42	42.47	46.00	-3.53	QP
330.195	63.61	14.18	2.52	37.45	42.86	46.00	-3.14	QP
821.710	50.62	21.61	4.54	37.62	39.15	46.00	-6.85	QP
872.183	45.98	22.06	4.74	37.61	35.17	46.00	-10.83	QP

Vertical:

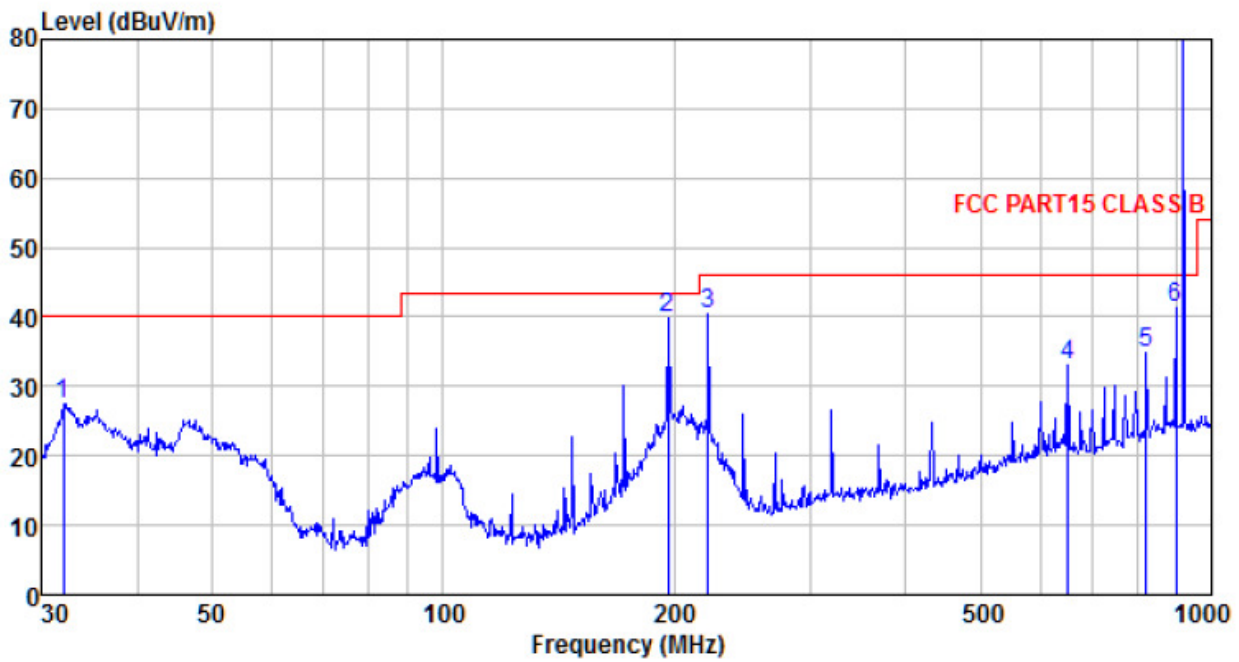

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
32.067	50.73	11.24	0.57	35.15	27.39	40.00	-12.61	QP
196.510	64.99	10.22	1.82	37.31	39.72	43.50	-3.78	QP
221.392	64.60	11.20	1.97	37.35	40.42	46.00	-5.58	QP
649.660	47.29	19.55	3.91	37.59	33.16	46.00	-12.84	QP
821.710	46.22	21.61	4.54	37.62	34.75	46.00	-11.25	QP
900.147	51.89	22.30	4.85	37.60	41.44	46.00	-4.56	QP

■ Above 1GHz

Peak value:

Test channel:	Lowest channel
---------------	----------------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1288.00	36.61	25.61	4.54	35.99	30.77	74.00	-43.23	Vertical
2503.00	33.78	27.55	5.49	36.94	29.88	74.00	-44.12	Vertical
3709.00	30.44	29.25	7.34	37.37	29.66	74.00	-44.34	Vertical
5500.00	28.17	31.98	9.51	37.07	32.59	74.00	-41.41	Vertical
7561.00	26.56	36.75	11.86	35.52	39.65	74.00	-34.35	Vertical
8704.00	27.19	36.87	13.23	34.74	42.55	74.00	-31.45	Horizontal
1369.00	36.49	25.66	4.59	36.06	30.68	74.00	-43.32	Horizontal
2440.00	33.77	27.48	5.43	36.89	29.79	74.00	-44.21	Horizontal
3736.00	31.00	29.29	7.40	37.38	30.31	74.00	-43.69	Horizontal
5428.00	28.78	31.86	9.40	37.18	32.86	74.00	-41.14	Horizontal

Test channel:	Middle channel
---------------	----------------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1342.00	36.49	25.70	4.57	36.04	30.72	74.00	-43.28	Vertical
2467.00	34.26	27.49	5.45	36.91	30.29	74.00	-43.71	Vertical
3772.00	31.78	29.33	7.46	37.38	31.19	74.00	-42.81	Vertical
5473.00	28.23	31.95	9.47	37.11	32.54	74.00	-41.46	Vertical
7534.00	27.87	36.72	11.85	35.53	40.91	74.00	-33.09	Vertical
8677.00	26.92	36.84	13.19	34.76	42.19	74.00	-31.81	Horizontal
1324.00	36.36	25.67	4.56	36.02	30.57	74.00	-43.43	Horizontal
2530.00	35.56	27.58	5.52	36.96	31.70	74.00	-42.30	Horizontal
3754.00	32.82	29.30	7.44	37.38	32.18	74.00	-41.82	Horizontal
5455.00	28.10	31.89	9.45	37.13	32.31	74.00	-41.69	Horizontal

Test channel:	Highest channel
---------------	-----------------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1216.00	37.68	25.42	4.48	35.93	31.65	74.00	-42.35	Vertical
2566.00	34.14	27.68	5.55	36.99	30.38	74.00	-43.62	Vertical
3655.00	30.06	29.19	7.25	37.37	29.13	74.00	-44.87	Vertical
5617.00	29.69	32.27	9.67	36.91	34.72	74.00	-39.28	Vertical
7318.00	28.41	36.37	11.72	35.60	40.90	74.00	-33.10	Vertical
8551.00	26.51	36.63	12.97	34.90	41.21	74.00	-32.79	Horizontal
1234.00	36.45	25.48	4.49	35.94	30.48	74.00	-43.52	Horizontal
2620.00	35.60	27.86	5.60	37.03	32.03	74.00	-41.97	Horizontal
3907.00	29.78	29.52	7.69	37.39	29.60	74.00	-44.40	Horizontal
5563.00	28.54	32.13	9.61	36.98	33.30	74.00	-40.70	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
3. *“*”*, means this data is the too weak instrument of signal is unable to test.

7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
902.00	35.02	22.3	4.87	37.6	24.59	74	-49.41	Horizontal
902.00	39.16	22.3	4.87	37.6	28.73	74	-45.27	Vertical
928.00	40.93	22.41	4.96	37.57	30.73	74	-43.27	Horizontal
928.00	35.66	22.41	4.96	37.57	25.46	74	-48.54	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
902.00	24.66	22.3	4.87	37.6	14.23	54	-39.77	Horizontal
902.00	26.87	22.3	4.87	37.6	16.44	54	-37.56	Vertical
928.00	28.97	22.41	4.96	37.57	18.77	54	-35.23	Horizontal
928.00	25.06	22.41	4.96	37.57	14.86	54	-39.14	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
902.00	34.89	22.3	4.87	37.6	24.46	74	-49.54	Horizontal
902.00	38.66	22.3	4.87	37.6	28.23	74	-45.77	Vertical
928.00	25.12	22.3	4.87	37.6	14.69	54	-39.31	Horizontal
928.00	26.47	22.3	4.87	37.6	16.04	54	-37.96	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
902.00	39.87	22.41	4.96	37.57	29.67	74	-44.33	Horizontal
902.00	36.68	22.41	4.96	37.57	26.48	74	-47.52	Vertical
928.00	28.74	22.41	4.96	37.57	18.54	54	-35.46	Horizontal
928.00	26.03	22.41	4.96	37.57	15.83	54	-38.17	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor


7.4 20dB Occupy Bandwidth

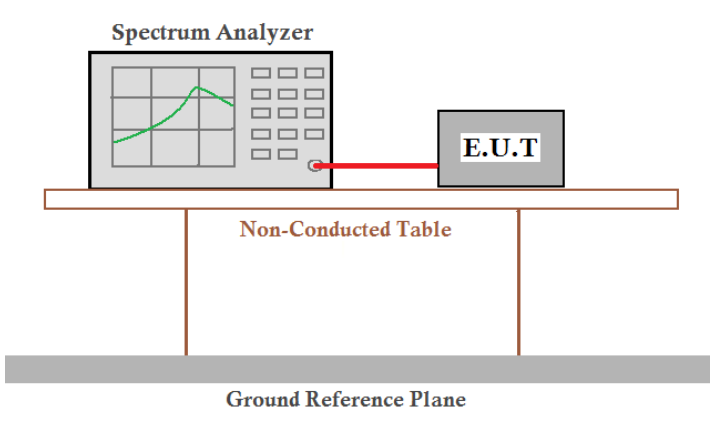Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 902MHz~928MHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test Frequency	20dB bandwidth(MHz)	Result
920.60	187.907	Pass
922.80	188.620	Pass
925.00	188.176	Pass


Test plot as follows:

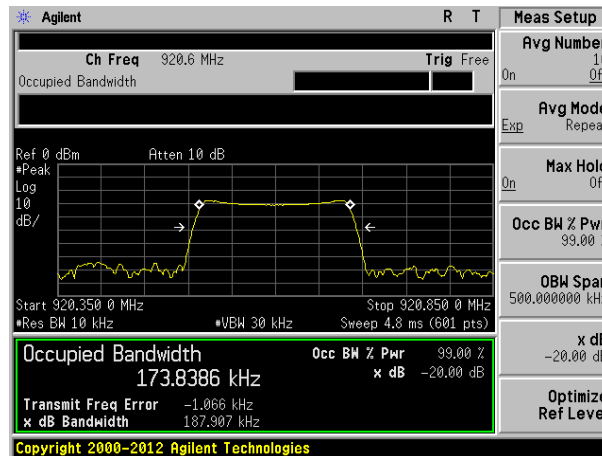

Lowest channel

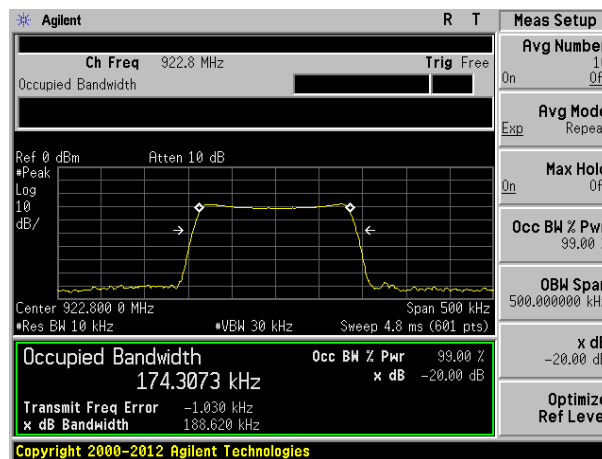



Middle channel

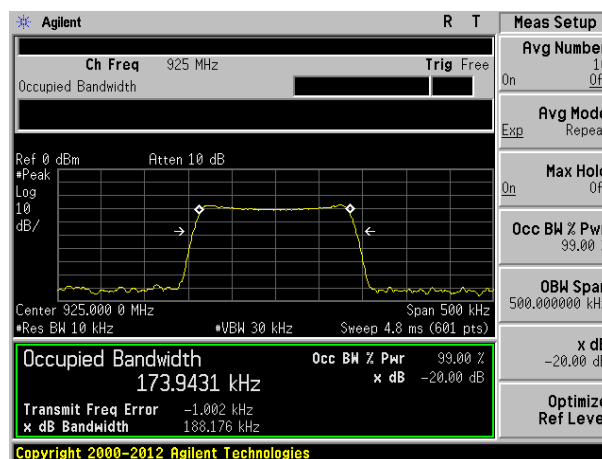

Highest channel

8 Test Setup Photo

Radiated Emission

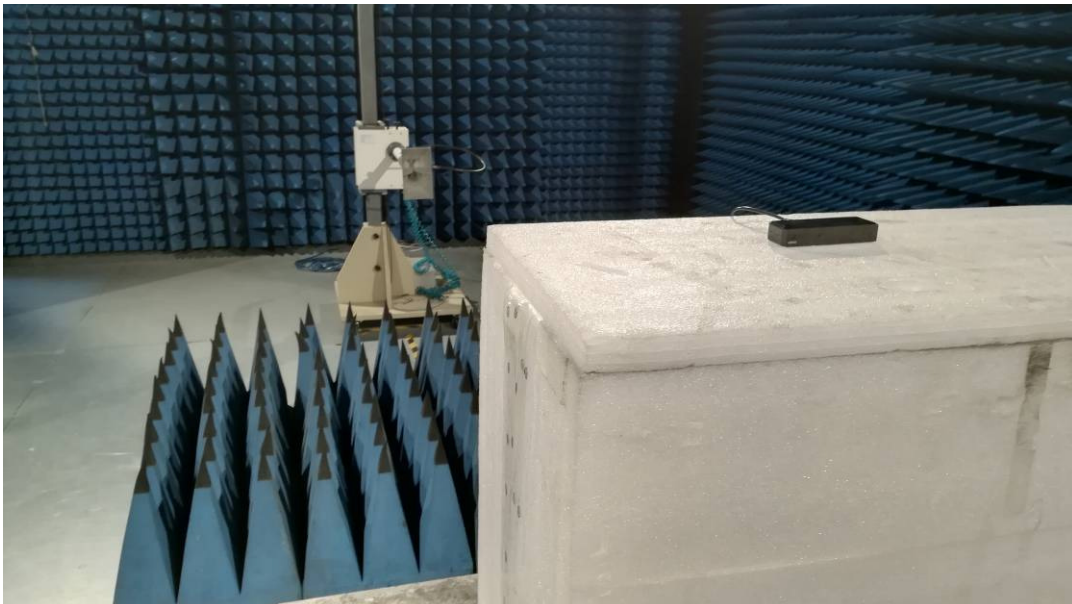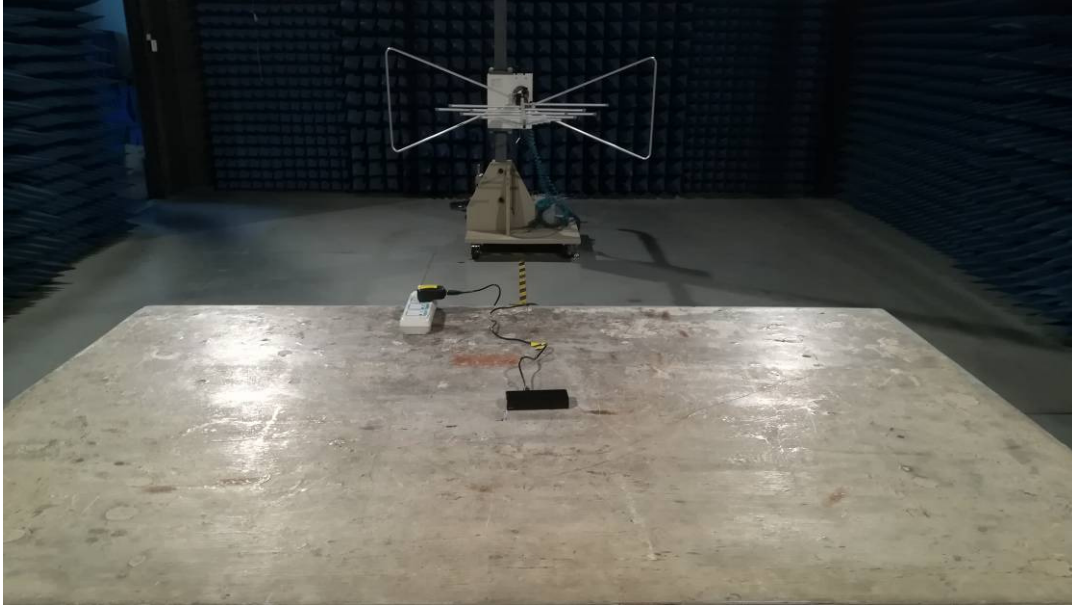



Conducted Emission






9 EUT Constructional Details





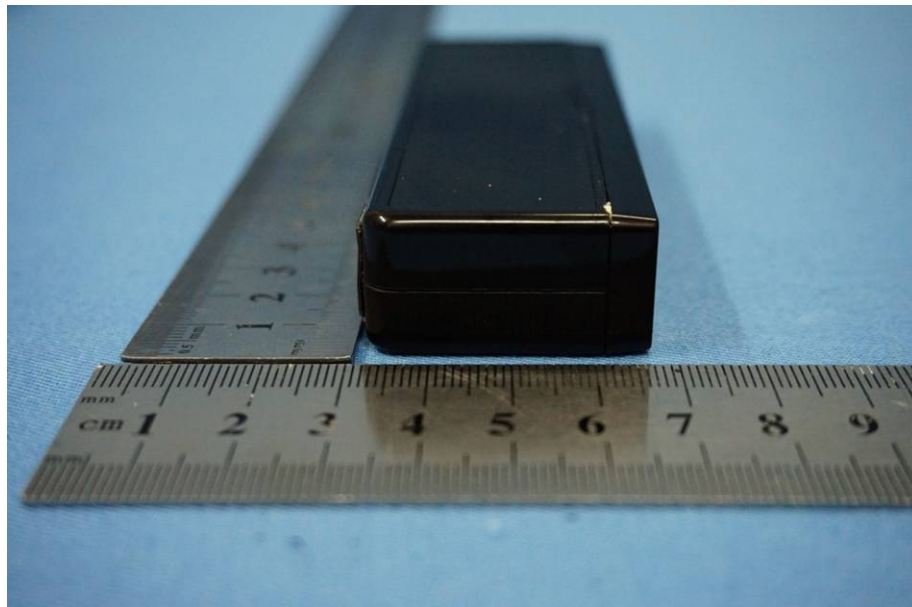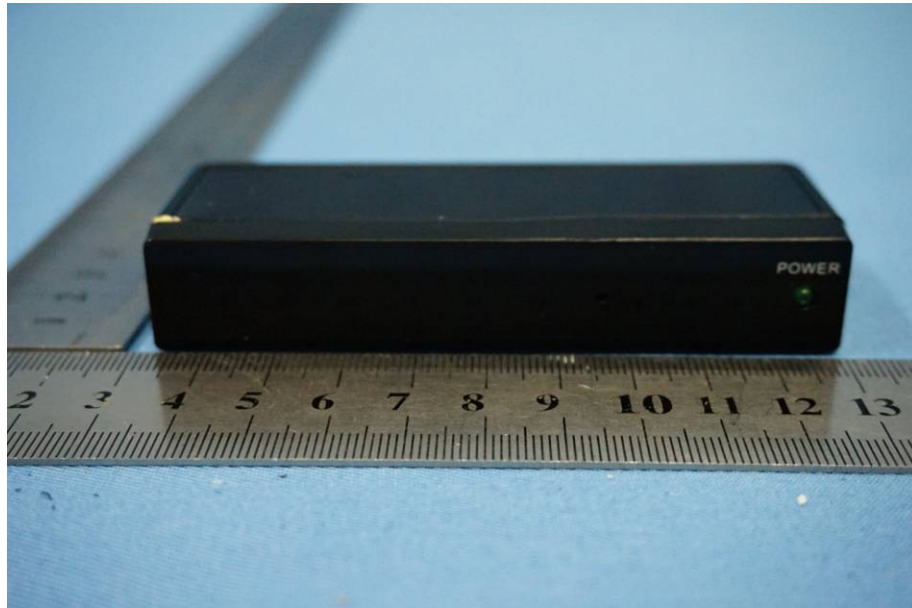

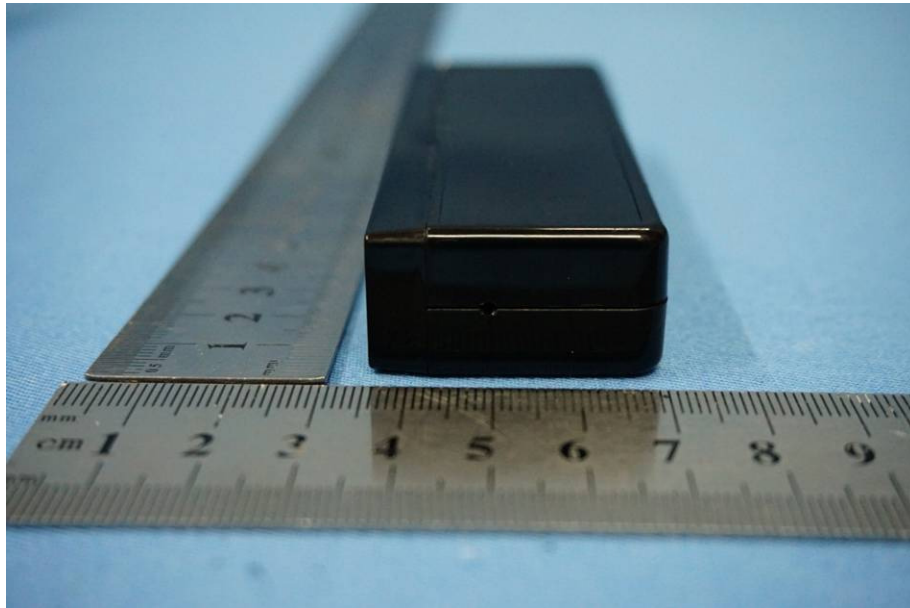

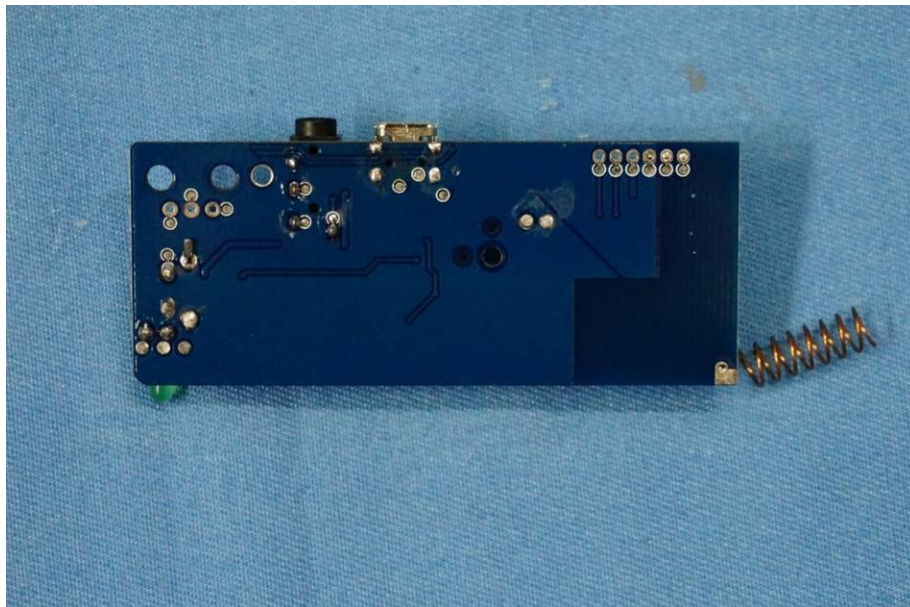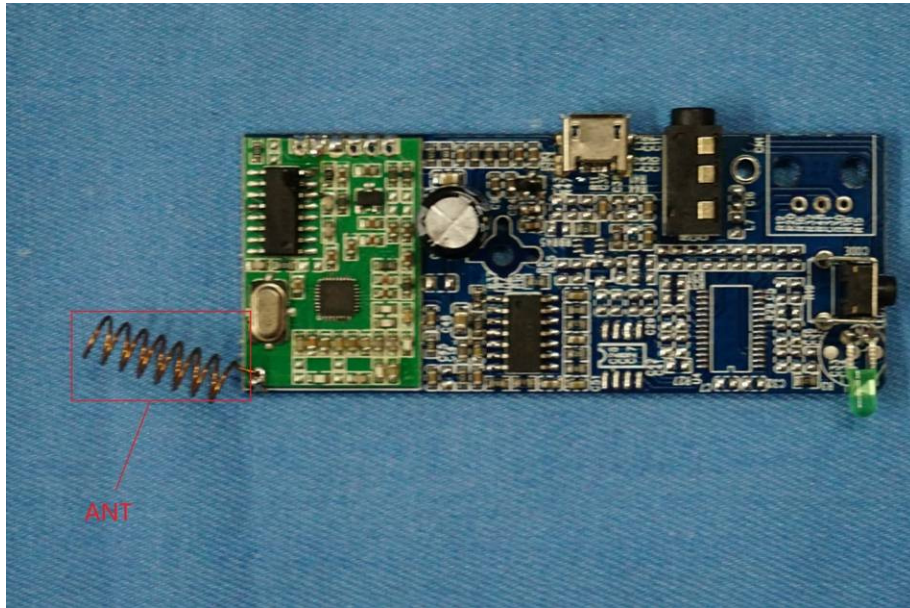

-----End-----