

MEASUREMENT REPORT

FCC PART 15.407 WLAN 802.11a/n/ac

FCC ID: 2AI3G-A7510

APPLICANT: Pico Technology Co., Ltd.

Application Type: Certification

Product: VR All-In-One Headset

Model No.: A7510


Brand Name: 

FCC Classification: Unlicensed National Information Infrastructure (UNII)


FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
ANSI C63.10-2013, KDB 789033 D02v02r01

Test Procedure(s): KDB 662911 D01v02r01

Test Date June 29, 2018 ~ July 23, 2018

Reviewed By : 

(Jame Yuan)

Approved By : 

(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1806RSU037-U4	Rev. 01	Initial report	07-23-2018	Valid

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Operation Frequency / Channel list.....	8
2.4. Description of Available Antennas.....	9
2.5. Test Mode	9
2.6. Description of Test Software.....	10
2.7. Device Capabilities	12
2.8. Test Configuration	13
2.9. EMI Suppression Device(s)/Modifications.....	13
2.10. Labeling Requirements.....	13
3. DESCRIPTION OF TEST	14
3.1. Evaluation Procedure	14
3.2. AC Line Conducted Emissions	14
3.3. Radiated Emissions.....	15
4. ANTENNA REQUIREMENTS.....	16
5. TEST EQUIPMENT CALIBRATION DATE	17
6. MEASUREMENT UNCERTAINTY.....	18
7. TEST RESULT	19
7.1. Summary	19
7.2. 26dB Bandwidth Measurement.....	20
7.2.1. Test Limit	20
7.2.2. Test Procedure used.....	20
7.2.3. Test Setting.....	20
7.2.4. Test Setup	20
7.2.5. Test Result.....	21
7.3. 6dB Bandwidth Measurement.....	38
7.3.1. Test Limit	38
7.3.2. Test Procedure used.....	38
7.3.3. Test Setting.....	38

7.3.4.	Test Setup	38
7.3.5.	Test Result.....	39
7.4.	Output Power Measurement.....	44
7.4.1.	Test Limit	44
7.4.2.	Test Procedure Used	44
7.4.3.	Test Setting.....	44
7.4.4.	Test Setup	44
7.4.5.	Test Result.....	45
7.5.	Power Spectral Density Measurement.....	49
7.5.1.	Test Limit	49
7.5.2.	Test Procedure Used	49
7.5.3.	Test Setting.....	49
7.5.4.	Test Setup	50
7.5.5.	Test Result.....	51
7.6.	Frequency Stability Measurement.....	82
7.6.1.	Test Limit	82
7.6.2.	Test Procedure Used	82
7.6.3.	Test Setup	83
7.6.4.	Test Result.....	84
7.7.	Radiated Spurious Emission Measurement.....	85
7.7.1.	Test Limit	85
7.7.2.	Test Procedure Used	85
7.7.3.	Test Setting.....	85
7.7.4.	Test Setup	87
7.7.5.	Test Result.....	89
7.8.	Radiated Restricted Band Edge Measurement	156
7.8.1.	Test Limit	156
7.8.2.	Test Result.....	158
7.9.	AC Conducted Emissions Measurement.....	276
7.9.1.	Test Limit	276
7.9.2.	Test Setup	276
7.9.3.	Test Result.....	277
8.	CONCLUSION.....	279

§2.1033 General Information

Applicant:	Pico Technology Co., Ltd.
Applicant Address:	Room 2101, Shining Tower, No.35 Xueyuan Road, HaiDian District, Beijing, The People's Republic of China
Manufacturer:	Pico Technology Co., Ltd.
Manufacturer Address:	Room 2101, Shining Tower, No.35 Xueyuan Road, HaiDian District, Beijing, The People's Republic of China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
FCC Registration No.:	893164
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.


1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	VR All-In-One Headset
Model No.	A7510
Brand Name	
Wi-Fi Specification	802.11a/b/g/n/ac
Bluetooth Version	v4.2 dual mode
Antenna Delivery	2*TX + 2*RX
Components	
Adapter	M/N: UC13US INPUT: 100-240V ~ 50/60Hz, 0.35A OUTPUT: 5.0Vdc, 2A

2.2. Product Specification Subjective to this Report

Wi-Fi Specification	
Frequency Range	For 802.11a/n-HT20/ac-VHT20: 5180~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz, 5775MHz
Type of Modulation	802.11a/n/ac: OFDM
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Operation Frequency / Channel list

802.11a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	---	---	---	---

802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

2.4. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	TX Paths	Max Peak Gain (dBi)		CDD Directional Gain (dBi)	
			Ant 1	Ant 2	For Power	For PSD
Wi-Fi Internal Antenna						
FPC	2.4	2	3.39	2.25	3.39	6.40
	5	2	4.10	4.28	4.28	7.29
Bluetooth Internal Antenna						
FPC	2.4	1	3.39	--	--	--

Note: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.

Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,

$$\text{Array Gain} = 10 \log (N_{ANT} / N_{SS}) \text{ dB} = 3.01;$$

- For power measurements on IEEE 802.11 devices,

$$\text{Array Gain} = 0 \text{ dB for } N_{ANT} \leq 4;$$

2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11n-HT20 (MCS0)
	Mode 3: Transmit by 802.11n-HT40 (MCS0)
	Mode 4: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 5: Transmit by 802.11ac-VHT40 (MCS0)
	Mode 6: Transmit by 802.11ac-VHT80 (MCS0)

2.6. Description of Test Software

The test utility software used during testing was “QRCT”, and the version was “3.0.268.0”.

Test Mode	Channel No.	Frequency (MHz)	Power Parameter Value	Test Mode	Channel No.	Frequency (MHz)	Power Parameter Value
			Ant 1 + 2				Ant 1 + 2
802.11a	36	5180	10	802.11 n-HT20	36	5180	10
	44	5220	10		44	5220	10
	48	5240	10		48	5240	10
	52	5260	10		52	5260	10
	60	5300	10		60	5300	10
	64	5320	10		64	5320	10
	100	5500	10		100	5500	10
	120	5600	10		120	5600	10
	140	5700	10		140	5700	10
	144	5720	10		144	5720	10
	149	5745	10		149	5745	10
	157	5785	10		157	5785	10
	165	5825	10		165	5825	10
802.11 n-HT40	38	5190	10	802.11 ac-VHT20	36	5180	10
	46	5230	10		44	5220	10
	54	5270	10		48	5240	10
	62	5310	10		52	5260	10
	102	5510	10		60	5300	10
	118	5590	10		64	5320	10
	134	5670	10		100	5500	10
	142	5710	10		120	5600	10
	151	5755	10		140	5700	10
	159	5795	10		144	5720	10
	--	--	--		149	5745	10
	--	--	--		157	5785	10
	--	--	--		165	5825	10

Mode	Channel No.	Frequency (MHz)	Power Parameter Value	Mode	Channel No.	Frequency (MHz)	Power Parameter Value
			Ant 1 + 2				Ant 1 + 2
802.11 ac-VHT40	38	5190	10	802.11 ac-VHT80	42	5210	10
	46	5230	10		58	5290	10
	54	5270	10		106	5530	10
	62	5310	10		122	5610	10
	102	5510	10		138	5690	10
	118	5590	10		155	5775	10
	134	5670	10		--	--	--
	142	5710	10		--	--	--
	151	5755	10		--	--	--
	159	5795	10		--	--	--

2.7. Device Capabilities

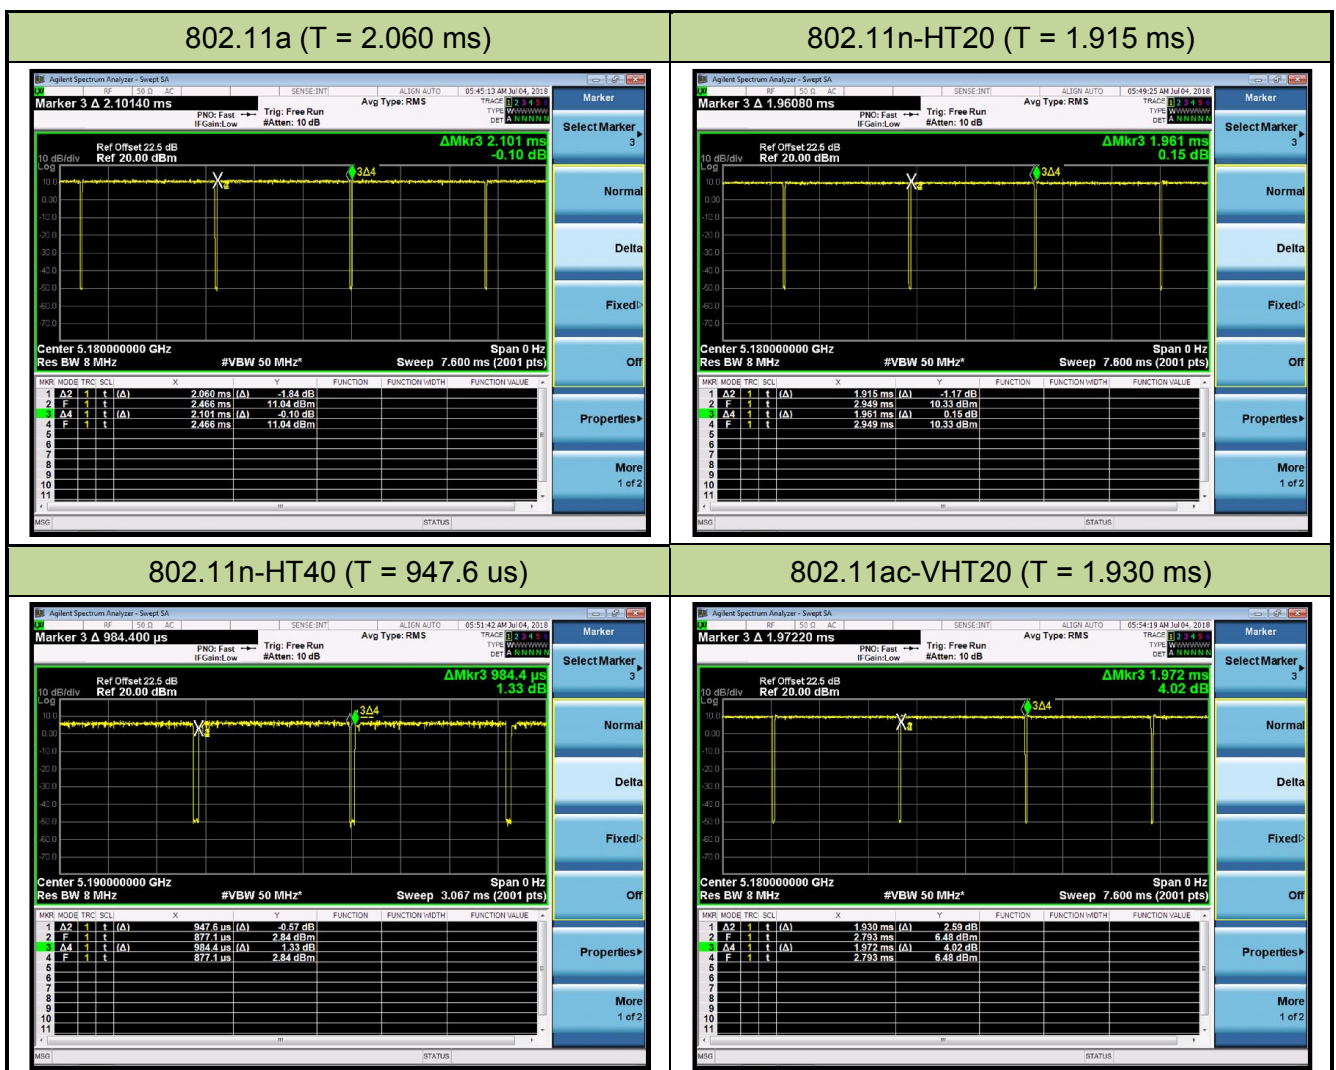
This device contains the following capabilities:

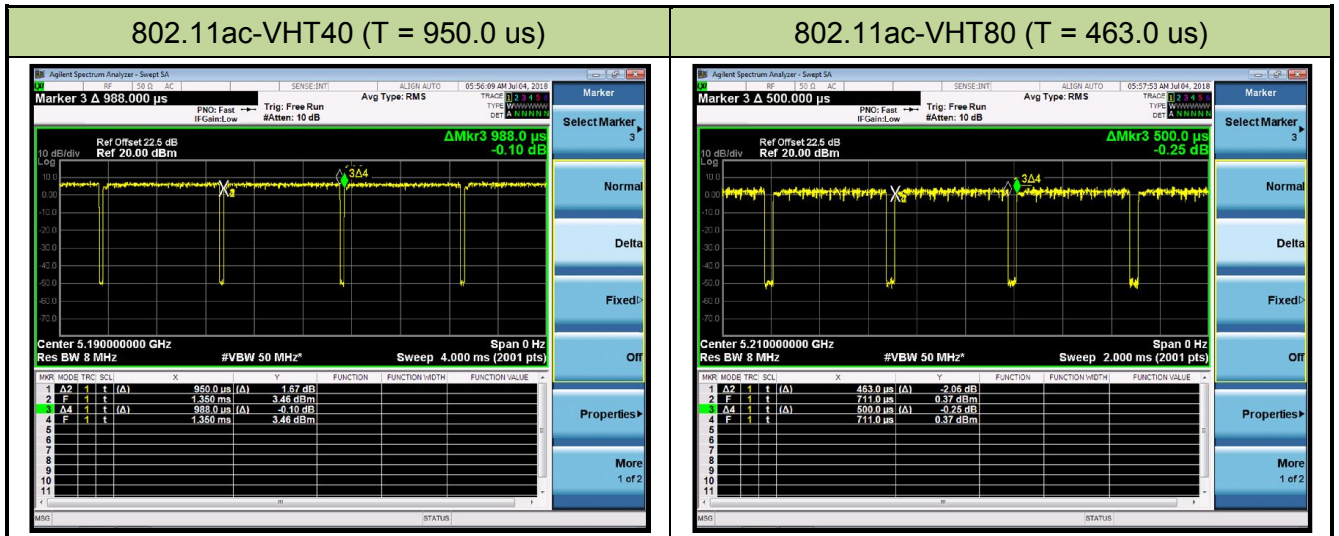
802.11a/b/g/n/ac Wi-Fi and Bluetooth (v4.2 dual mode) Device.

Note: 5GHz (UNII) operation is possible in 20MHz and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz.

The duty cycles are as follows:

Test Mode	Duty Cycle
802.11a	98.05 %
802.11n-HT20	97.65 %
802.11n-HT40	96.26 %
802.11ac-VHT20	97.87 %
802.11ac-VHT40	96.15 %
802.11ac-VHT80	92.60 %





2.8. Test Configuration

The device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement of the device.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The device unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2019/04/20
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2019/06/15
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2019/06/15
Temperature/Humidity Meter	Testo	608-H1	MRTSUE06404	1 year	2018/08/14
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06214	1 year	2019/05/10

Radiated Emission – AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2018/09/30
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2018/08/18
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2018/11/20
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2019/04/12
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2018/10/21
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2018/12/14
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2018/11/17
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2019/06/13
Temperature/Humidity Meter	Testo	608-H1	MRTSUE06403	1 year	2018/08/14
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2019/05/02

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2019/04/20
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2018/12/06
Temperature&Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2018/12/06
Temperature/Humidity Meter	Testo	608-H1	MRTSUE06401	1 year	2018/08/14

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: $\pm 3.46\text{dB}$
Radiated Emission Measurement - AC2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: $\pm 4.18\text{dB}$ 1GHz ~ 25GHz: $\pm 4.76\text{dB}$
Spurious Emissions, Conducted - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.78\text{dB}$
Output Power - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 1.13\text{dB}$
Power Spectrum Density - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 1.15\text{dB}$
Occupied Bandwidth - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): $\pm 0.28\%$

7. TEST RESULT

7.1. Summary

Company Name: Pico Technology Co., Ltd.

FCC ID: 2A13G-A7510

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(1)(iv), (2), (3)	Maximum Conducted Output Power	≤ 23.98 dBm U-NII-1 ≤ 23.98 dBm U-NII-2A ≤ 23.98 dBm U-NII-2C ≤ 30 dBm U-NII-3		Pass	Section 7.4
15.407(a)(1)(iv), (2), (3), (5)	Peak Power Spectral Density	Refer to Section 7.5		Pass	Section 7.5
15.407(g)	Frequency Stability	N/A		Pass	Section 7.6
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Refer to section 7.8	Radiated	Pass	Section 7.7 & 7.8
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.9

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) Test Items “26dB Bandwidth” & “6dB Bandwidth” have been assessed MIMO transmission, and showed the worst test data in this report.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A

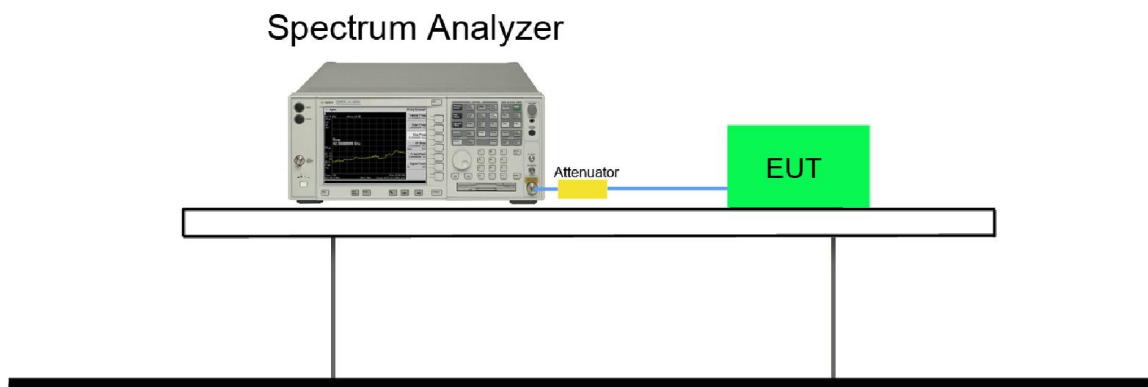
7.2.2. Test Procedure used

KDB 789033 D02v02r01 – Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. $VBW \geq 3 \times RBW$.
4. Detector = Peak.
5. Trace mode = Max hold.

7.2.4. Test Setup



7.2.5. Test Result

Product	VR All-In-One Headset	Temperature	24°C
Test Engineer	Dandy Li	Relative Humidity	54%
Test Site	TR3	Test Date	2018/07/04

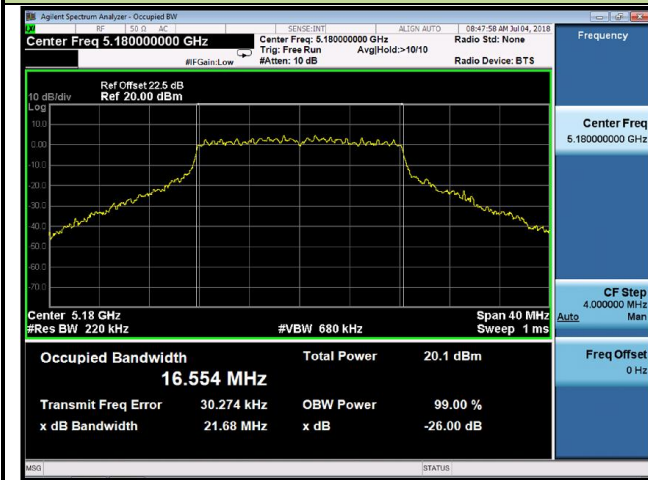
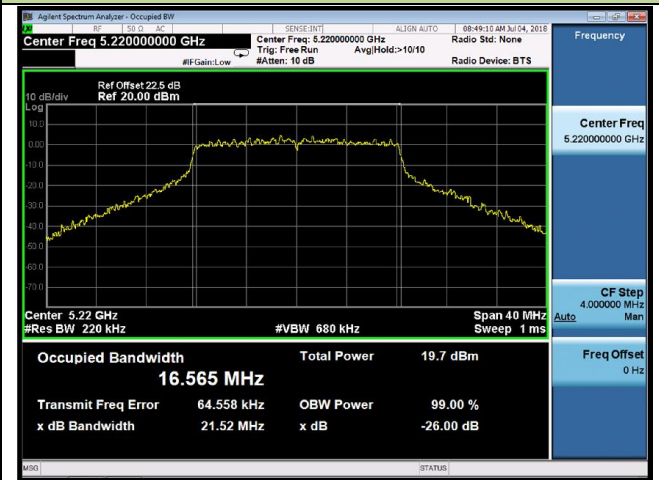
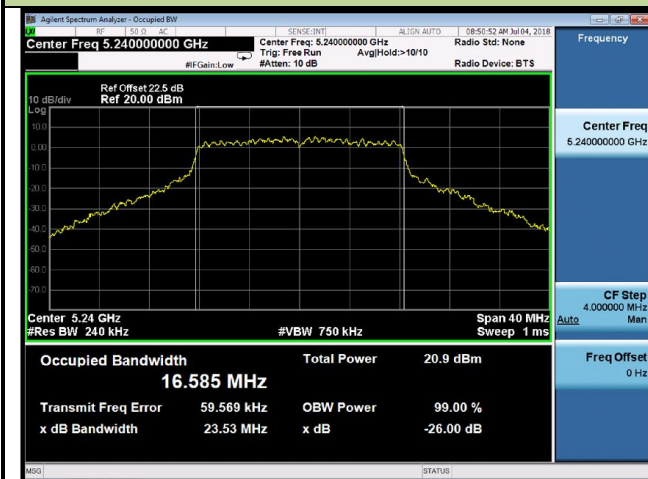
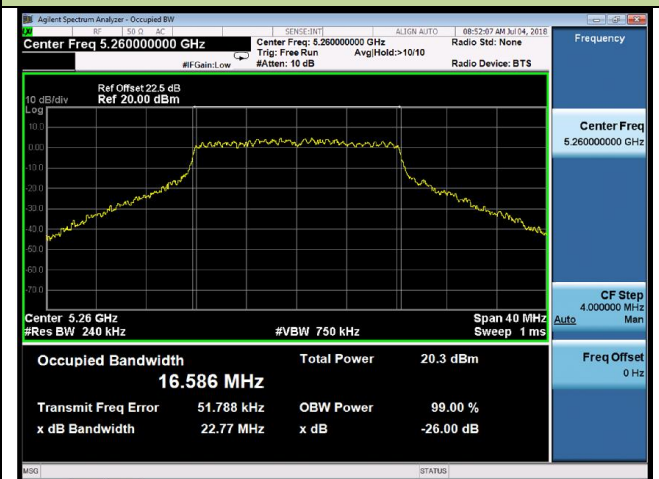
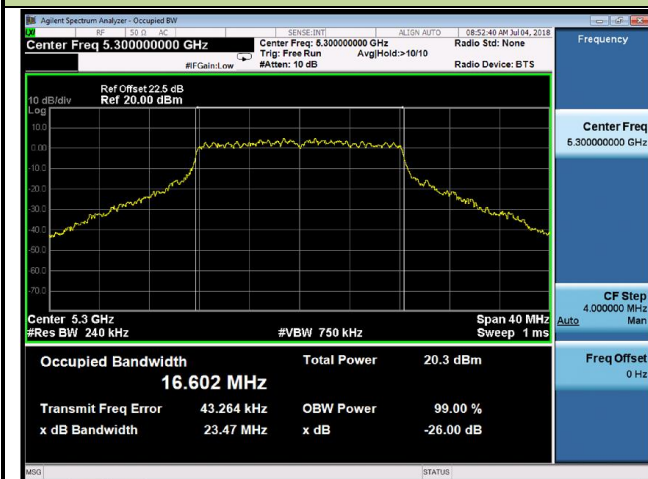
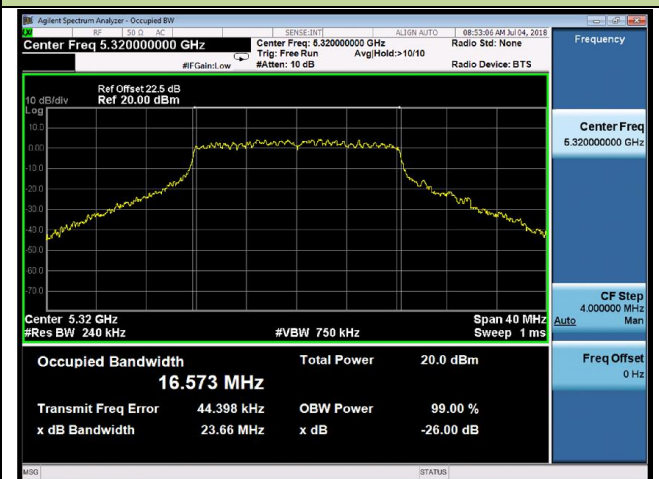
Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 2 / Ant 1 + 2						
802.11a	6	36	5180	21.68	16.55	Pass
802.11a	6	44	5220	21.52	16.57	Pass
802.11a	6	48	5240	23.53	16.59	Pass
802.11a	6	52	5260	22.77	16.59	Pass
802.11a	6	60	5300	23.47	16.60	Pass
802.11a	6	64	5320	23.66	16.57	Pass
802.11a	6	100	5500	24.01	16.59	Pass
802.11a	6	120	5600	23.72	16.62	Pass
802.11a	6	140	5700	23.16	16.60	Pass
802.11a	6	144	5720	23.17	16.60	Pass
802.11a	6	149	5745	22.84	16.56	Pass
802.11a	6	157	5785	22.69	16.57	Pass
802.11a	6	165	5825	22.31	16.56	Pass
802.11n-HT20	MCS0	36	5180	23.65	17.79	Pass
802.11n-HT20	MCS0	44	5220	22.94	17.78	Pass
802.11n-HT20	MCS0	48	5240	23.39	17.81	Pass
802.11n-HT20	MCS0	52	5260	23.34	17.77	Pass
802.11n-HT20	MCS0	60	5300	23.14	17.80	Pass
802.11n-HT20	MCS0	64	5320	23.28	17.75	Pass
802.11n-HT20	MCS0	100	5500	24.11	17.80	Pass
802.11n-HT20	MCS0	120	5600	23.23	17.79	Pass
802.11n-HT20	MCS0	140	5700	22.97	17.75	Pass
802.11n-HT20	MCS0	144	5720	23.73	17.76	Pass
802.11n-HT20	MCS0	149	5745	23.21	17.76	Pass
802.11n-HT20	MCS0	157	5785	23.22	17.73	Pass
802.11n-HT20	MCS0	165	5825	23.14	17.73	Pass

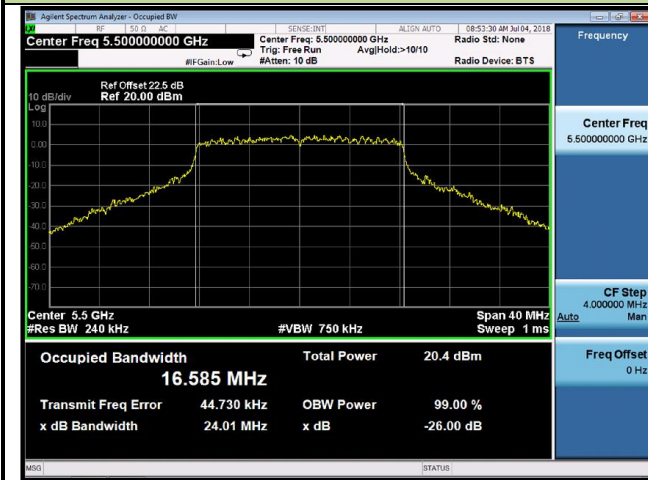
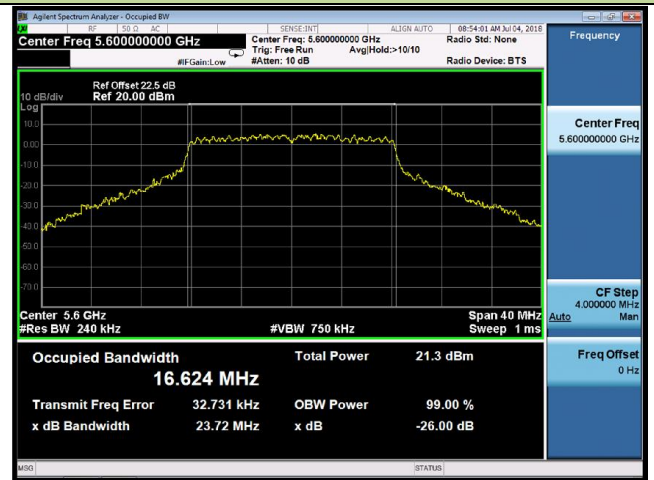
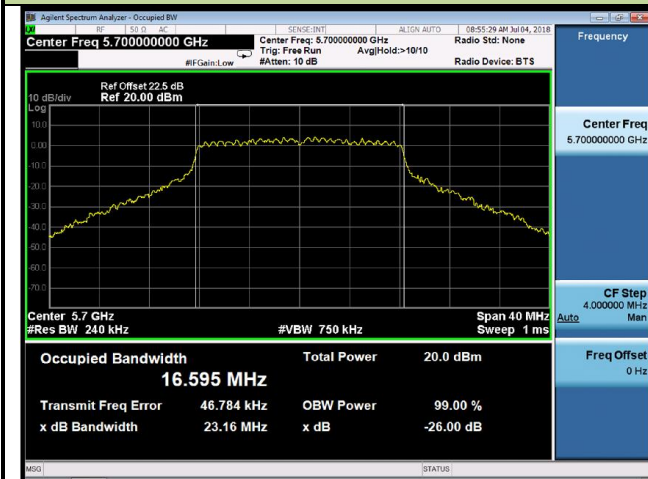
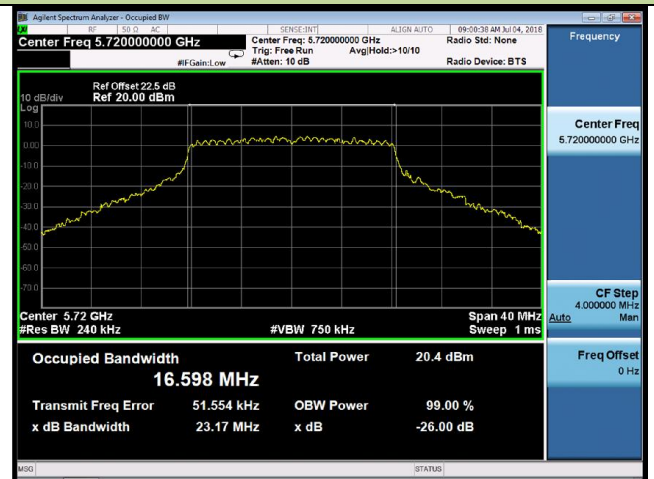
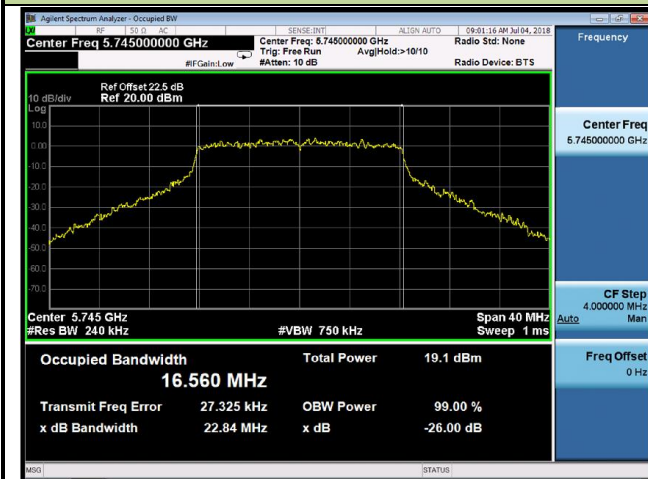
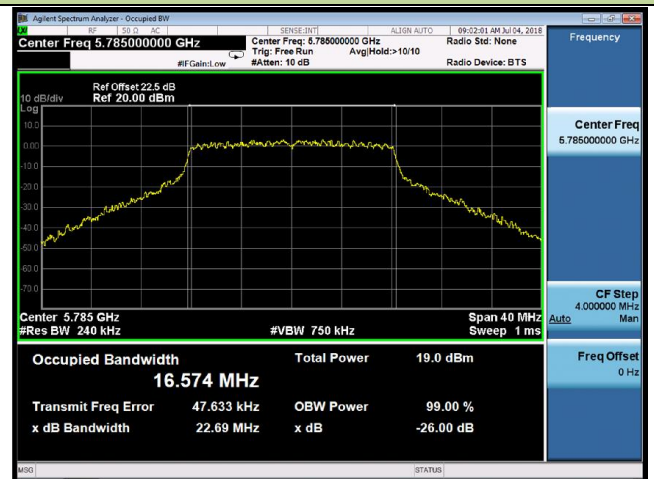


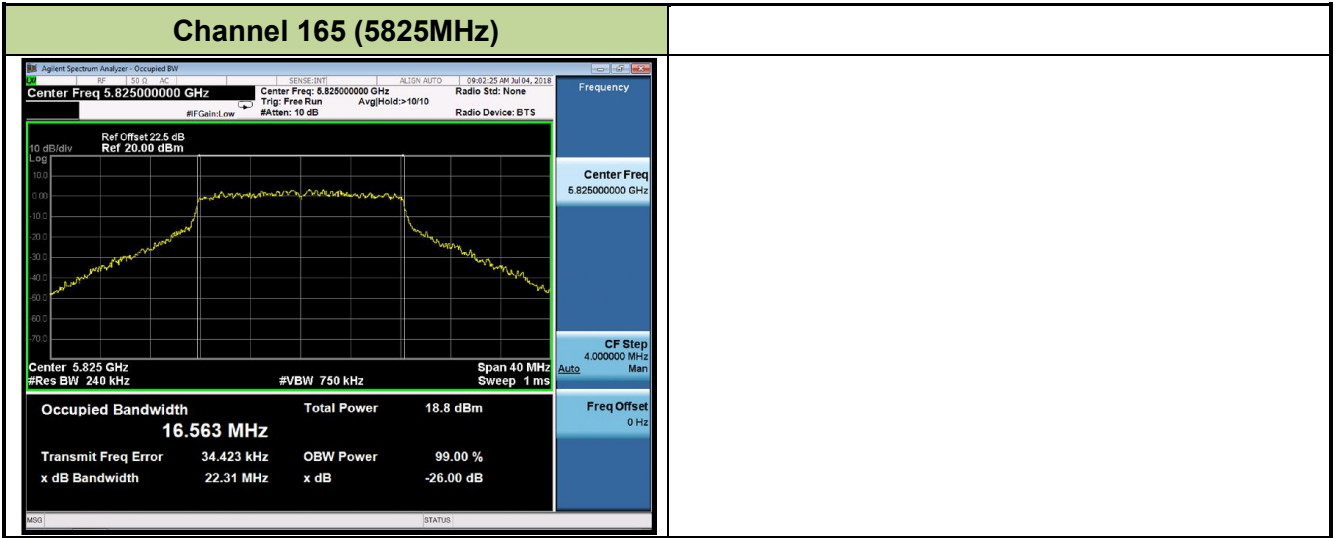
Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 2 / Ant 1 + 2						
802.11n-HT40	MCS0	38	5190	41.69	36.18	Pass
802.11n-HT40	MCS0	46	5230	41.44	36.19	Pass
802.11n-HT40	MCS0	54	5270	41.12	36.17	Pass
802.11n-HT40	MCS0	62	5310	41.32	36.17	Pass
802.11n-HT40	MCS0	102	5510	41.55	36.17	Pass
802.11n-HT40	MCS0	118	5590	41.15	36.22	Pass
802.11n-HT40	MCS0	134	5670	41.05	36.18	Pass
802.11n-HT40	MCS0	142	5710	41.19	36.18	Pass
802.11n-HT40	MCS0	151	5755	41.48	36.19	Pass
802.11n-HT40	MCS0	159	5795	41.14	36.21	Pass
802.11ac-VHT20	MCS0	36	5180	23.17	17.76	Pass
802.11ac-VHT20	MCS0	44	5220	23.43	17.77	Pass
802.11ac-VHT20	MCS0	48	5240	23.42	17.78	Pass
802.11ac-VHT20	MCS0	52	5260	23.06	17.79	Pass
802.11ac-VHT20	MCS0	60	5300	23.53	17.77	Pass
802.11ac-VHT20	MCS0	64	5320	23.56	17.78	Pass
802.11ac-VHT20	MCS0	100	5500	23.59	17.80	Pass
802.11ac-VHT20	MCS0	120	5600	23.64	17.80	Pass
802.11ac-VHT20	MCS0	140	5700	22.82	17.73	Pass
802.11ac-VHT20	MCS0	144	5720	23.24	17.74	Pass
802.11ac-VHT20	MCS0	149	5745	23.73	17.76	Pass
802.11ac-VHT20	MCS0	157	5785	23.15	17.73	Pass
802.11ac-VHT20	MCS0	165	5825	23.33	17.73	Pass
802.11ac-VHT40	MCS0	38	5190	41.01	36.20	Pass
802.11ac-VHT40	MCS0	46	5230	40.91	36.17	Pass
802.11ac-VHT40	MCS0	54	5270	41.48	36.17	Pass
802.11ac-VHT40	MCS0	62	5310	41.52	36.18	Pass
802.11ac-VHT40	MCS0	102	5510	41.28	36.17	Pass
802.11ac-VHT40	MCS0	118	5590	41.60	36.17	Pass
802.11ac-VHT40	MCS0	134	5670	41.24	36.18	Pass
802.11ac-VHT40	MCS0	142	5710	40.97	36.21	Pass
802.11ac-VHT40	MCS0	151	5755	41.25	36.22	Pass
802.11ac-VHT40	MCS0	159	5795	41.12	36.20	Pass

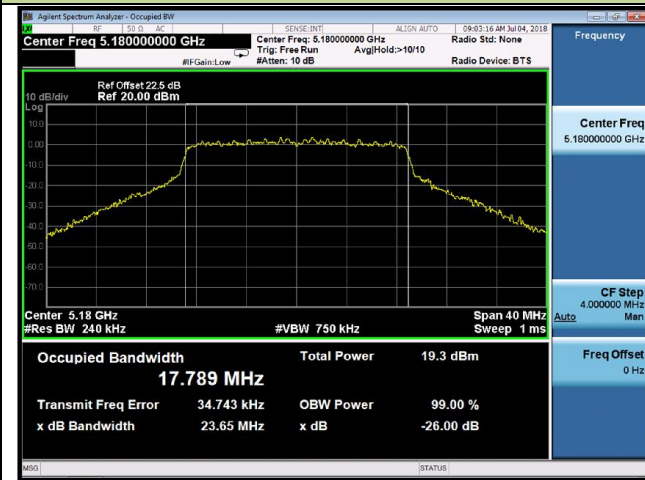
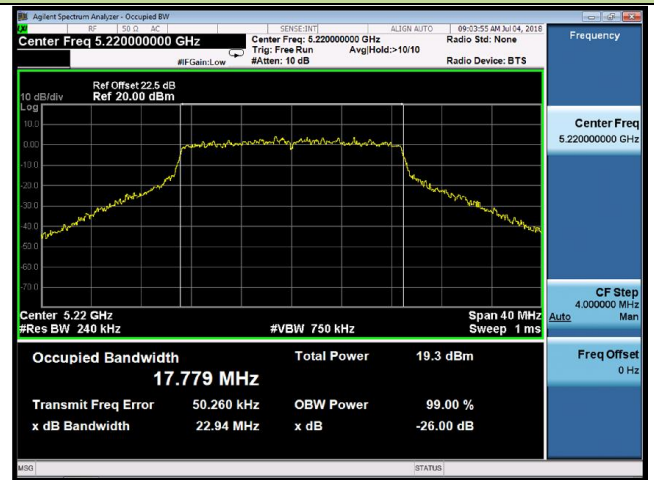
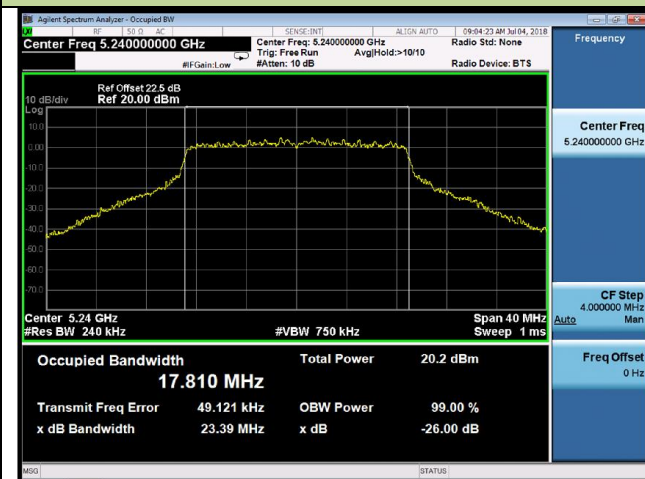
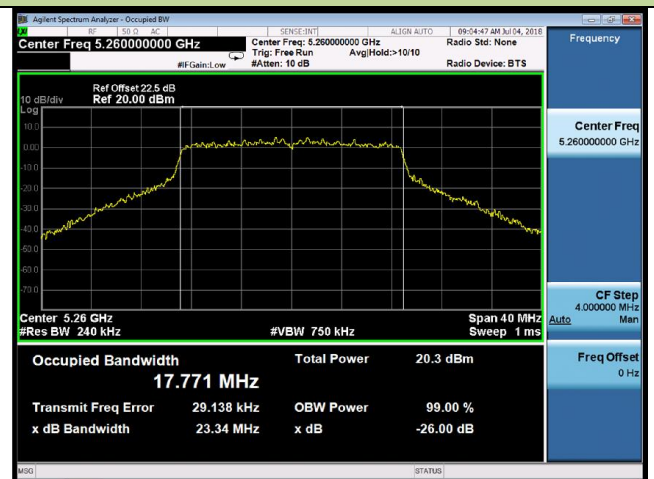
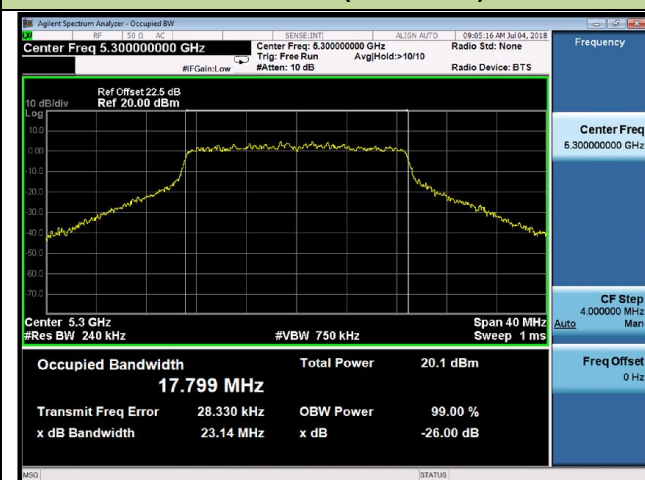
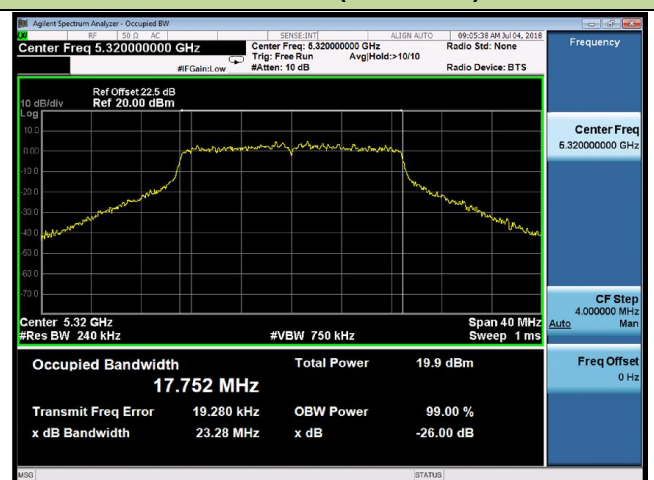


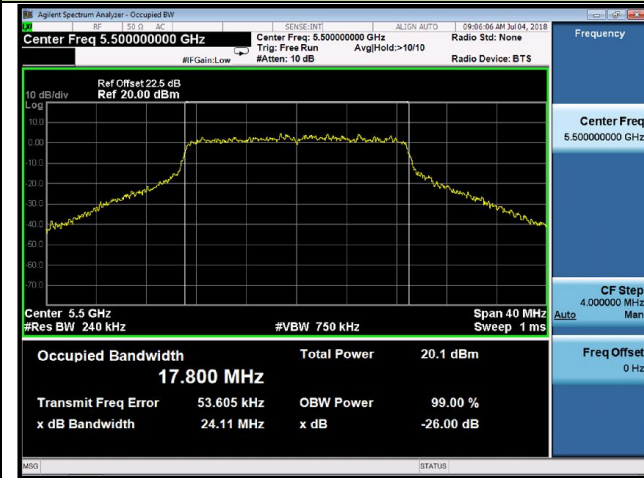
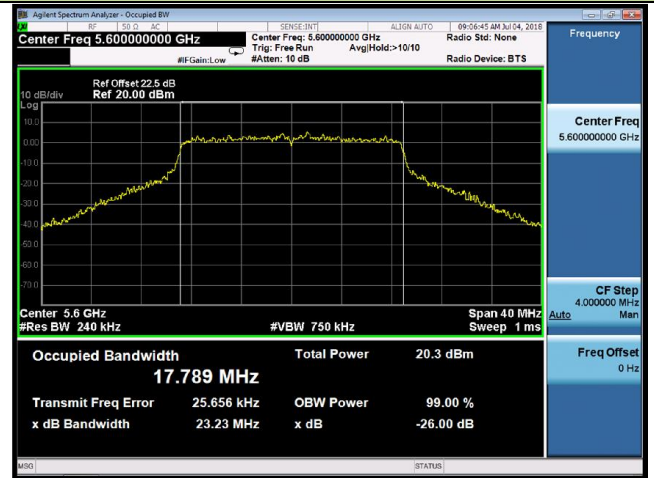
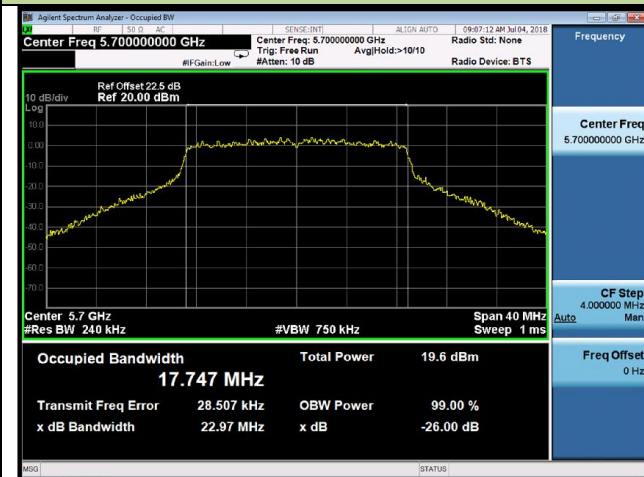
Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 2 / Ant 1 + 2						
802.11ac-VHT80	MCS0	42	5210	82.99	75.70	Pass
802.11ac-VHT80	MCS0	58	5290	83.61	75.73	Pass
802.11ac-VHT80	MCS0	106	5530	82.31	75.59	Pass
802.11ac-VHT80	MCS0	122	5610	82.68	75.64	Pass
802.11ac-VHT80	MCS0	138	5690	83.57	75.81	Pass
802.11ac-VHT80	MCS0	155	5775	83.03	75.76	Pass

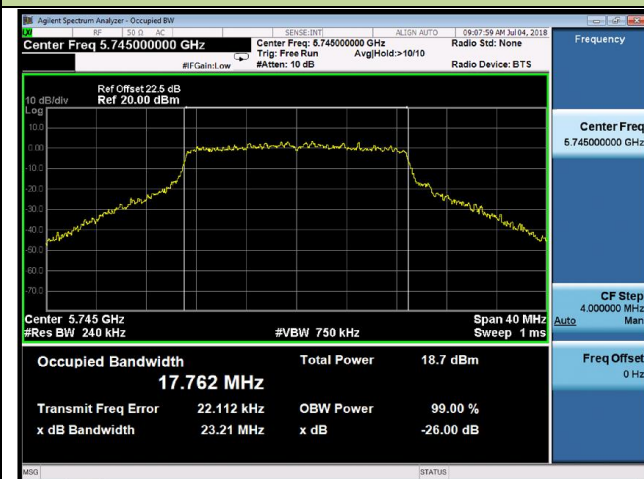
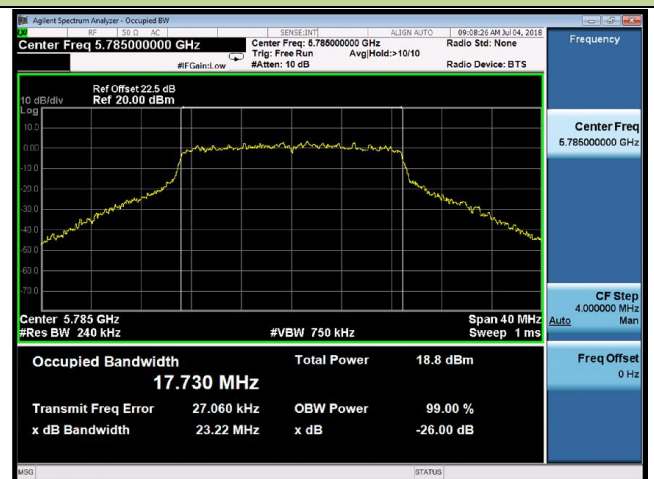
802.11a 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2
Channel 36 (5180MHz)

Channel 44 (5220MHz)

Channel 48 (5240MHz)

Channel 52 (5260MHz)

Channel 60 (5300MHz)

Channel 64 (5320MHz)


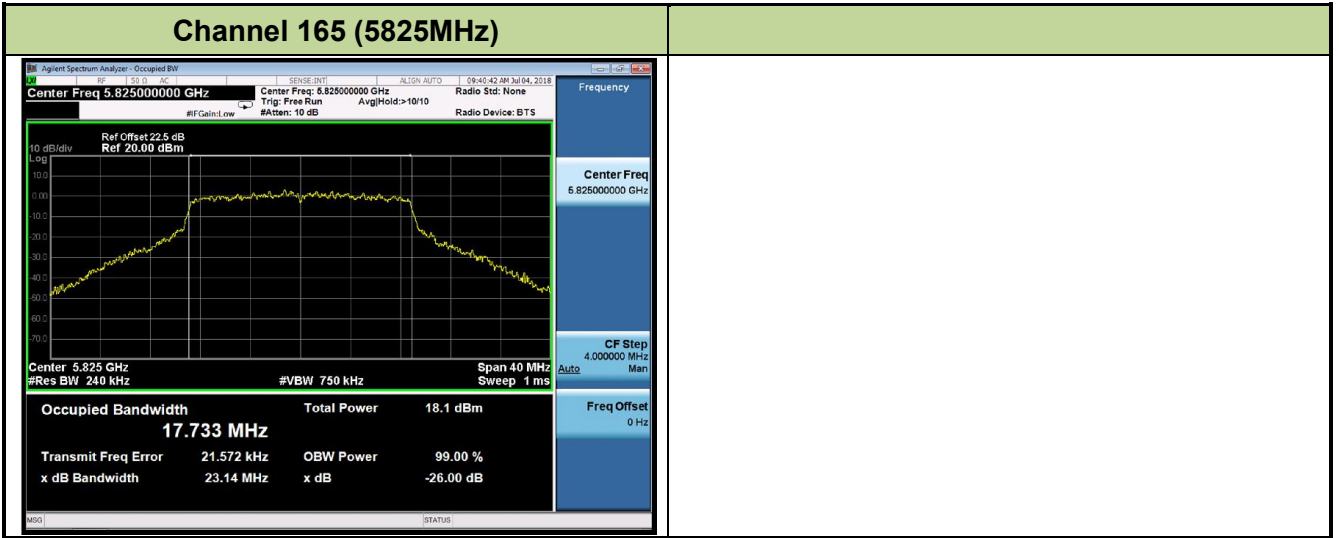
802.11a 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2
Channel 100 (5500MHz)

Channel 120 (5600MHz)

Channel 140 (5700MHz)

Channel 144 (5720MHz)

Channel 149 (5745MHz)

Channel 157 (5785MHz)


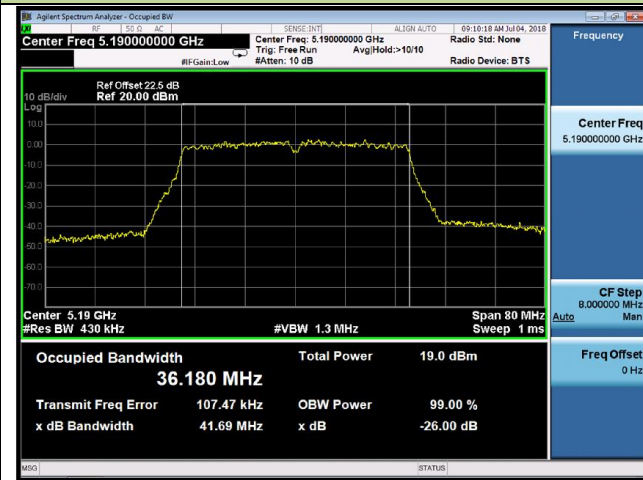
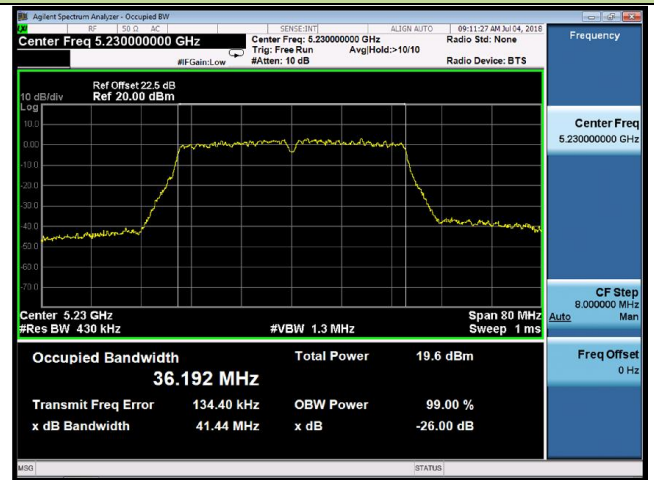
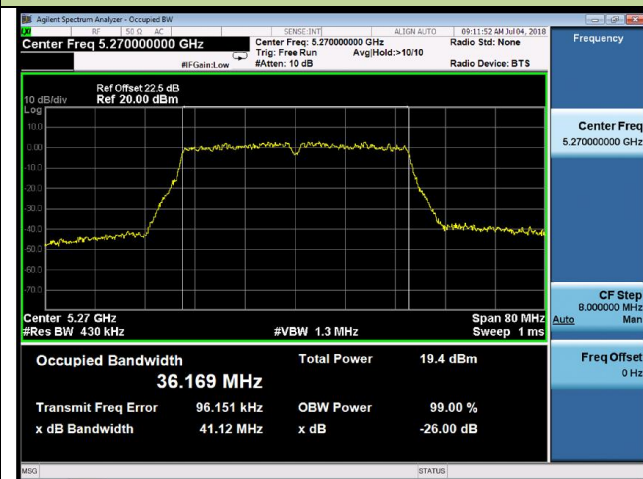
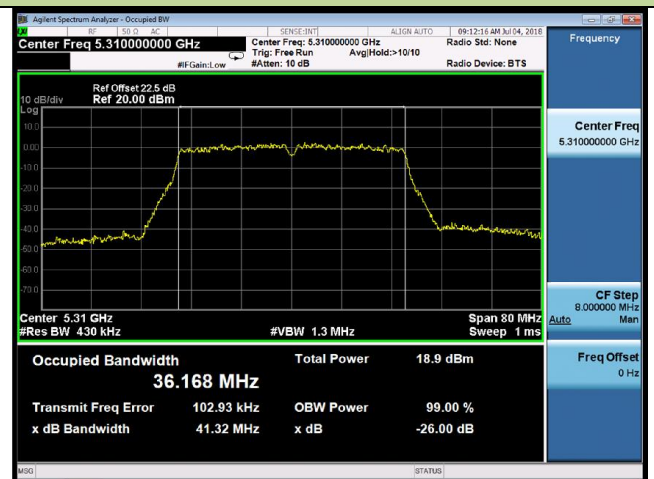
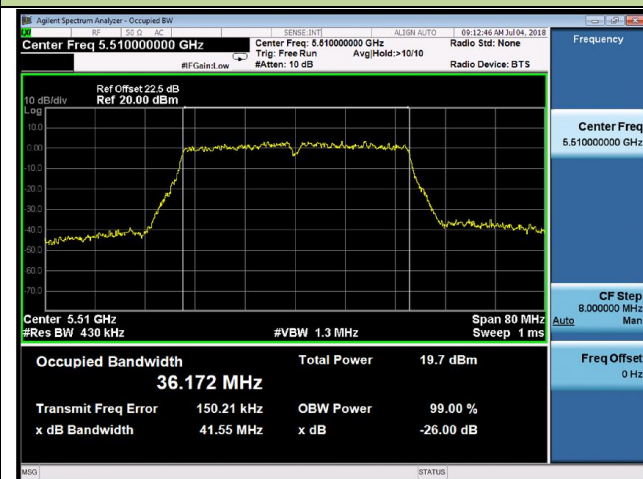
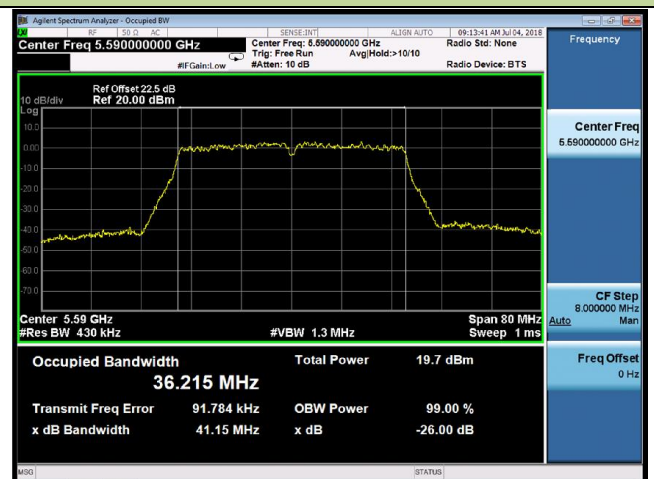


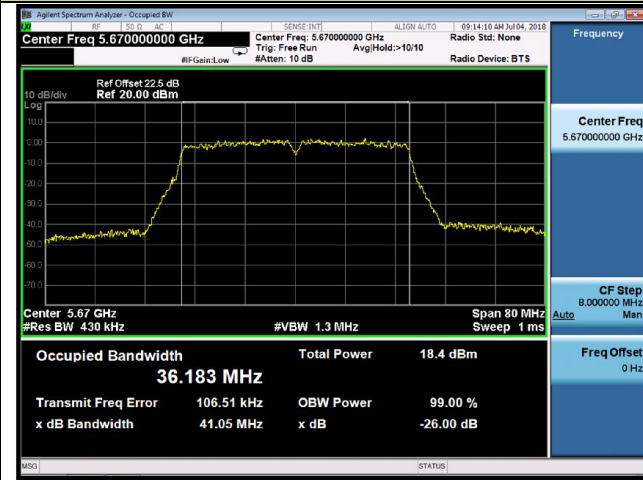
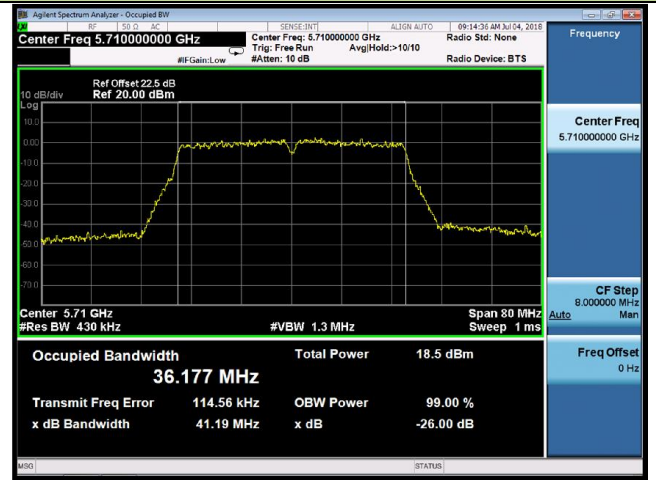
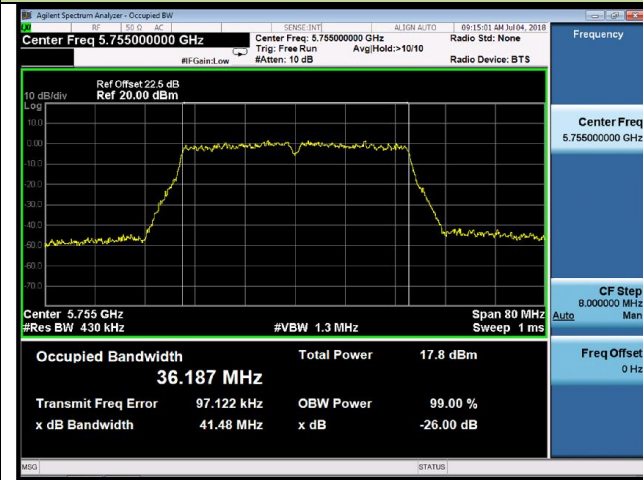
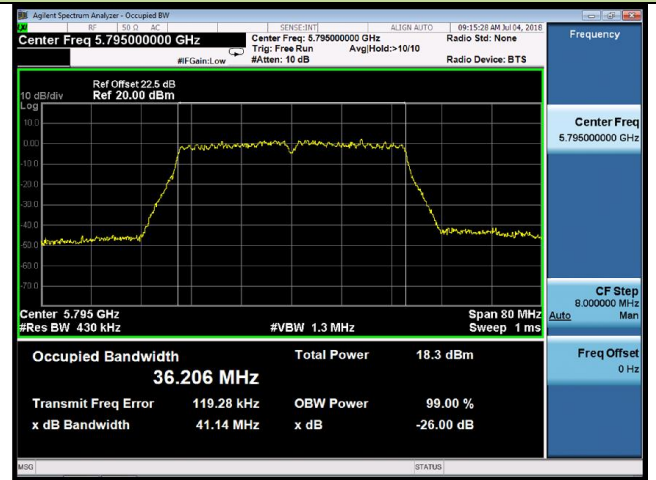
802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2
Channel 36 (5180MHz)

Channel 44 (5220MHz)

Channel 48 (5240MHz)

Channel 52 (5260MHz)

Channel 60 (5300MHz)

Channel 64 (5320MHz)


802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2
Channel 100 (5500MHz)

Channel 120 (5600MHz)

Channel 140 (5700MHz)

Channel 144 (5720MHz)

Channel 149 (5745MHz)

Channel 157 (5785MHz)


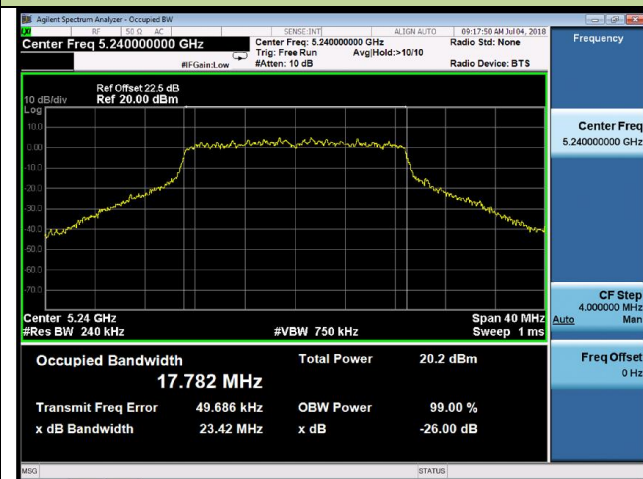
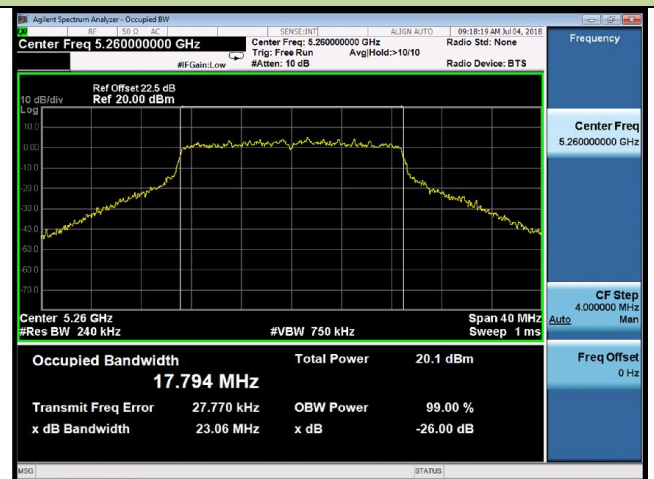
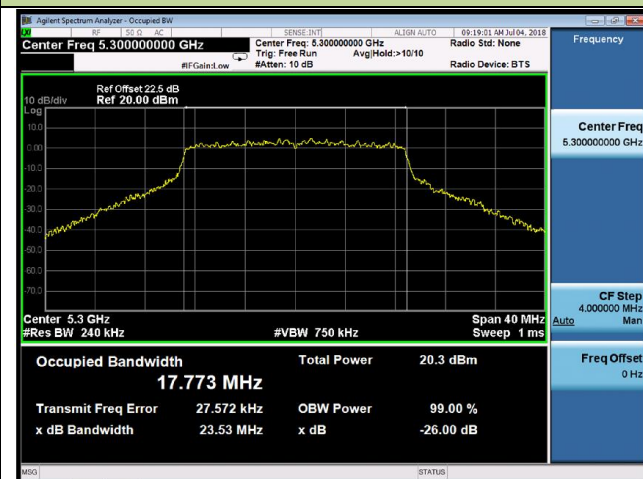
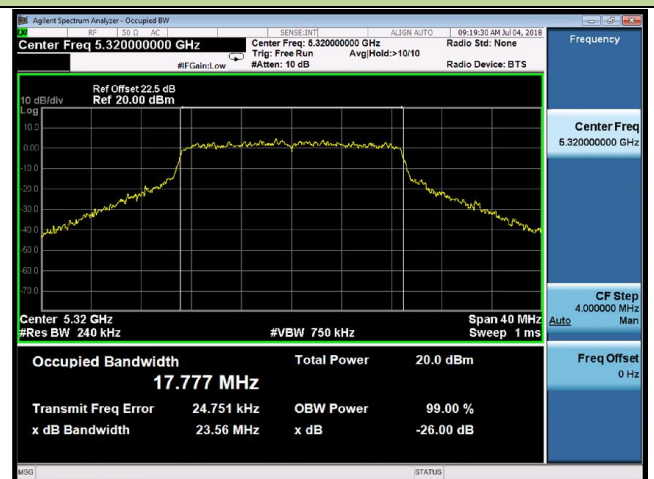


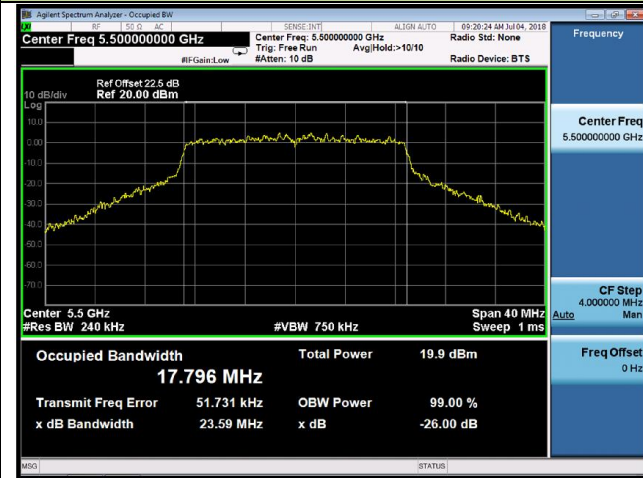
802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2
Channel 38 (5190MHz)

Channel 46 (5230MHz)

Channel 54 (5270MHz)

Channel 62 (5310MHz)

Channel 102 (5510MHz)

Channel 118 (5590MHz)


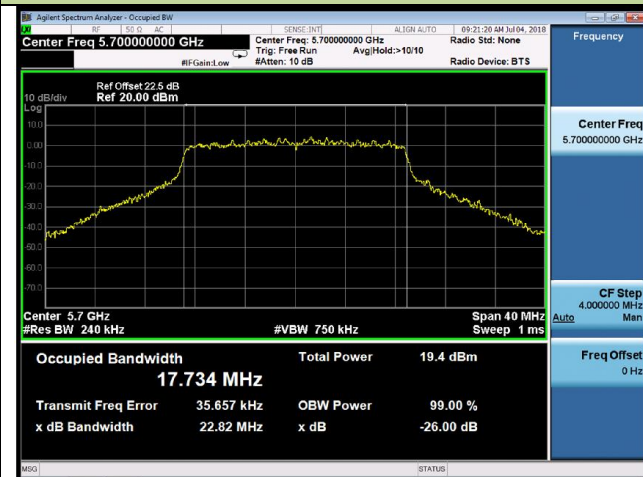
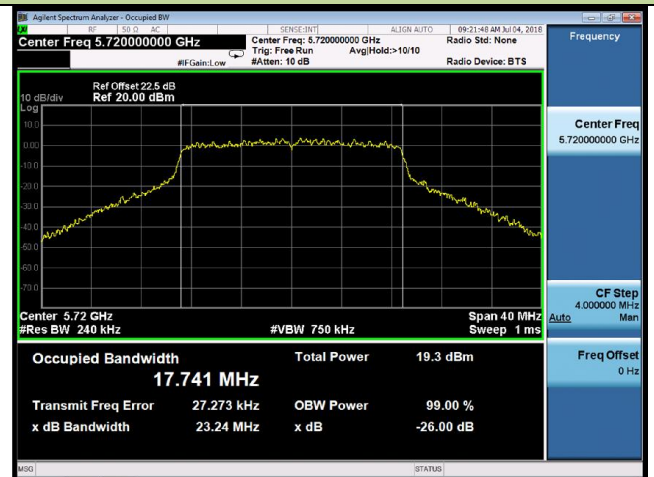
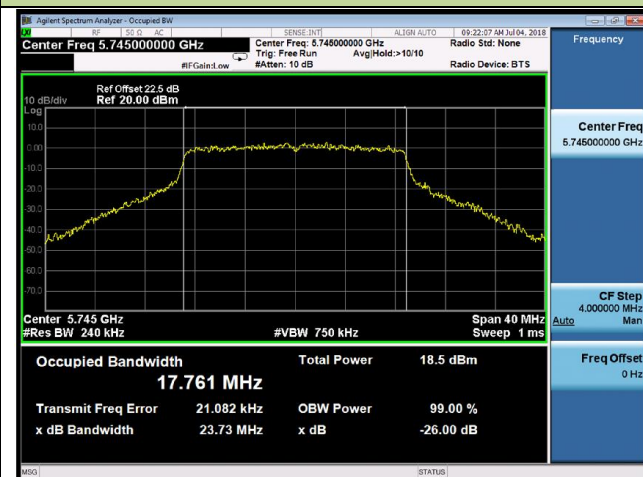
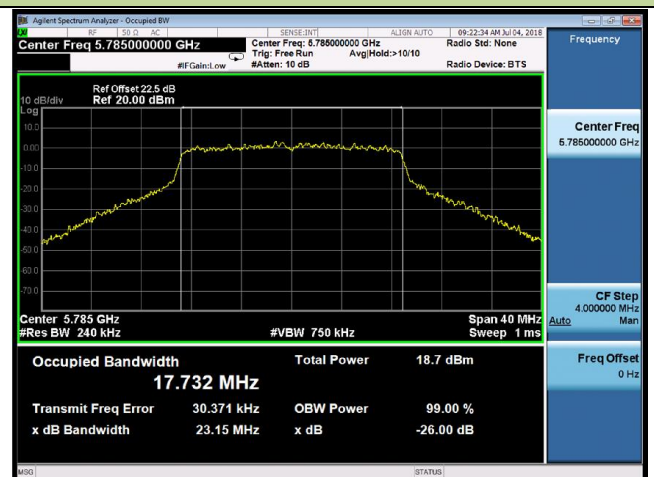
802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2
Channel 134 (5670MHz)

Channel 142 (5710MHz)

Channel 151 (5755MHz)

Channel 159 (5795MHz)


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2
Channel 36 (5180MHz)

Channel 44 (5220MHz)

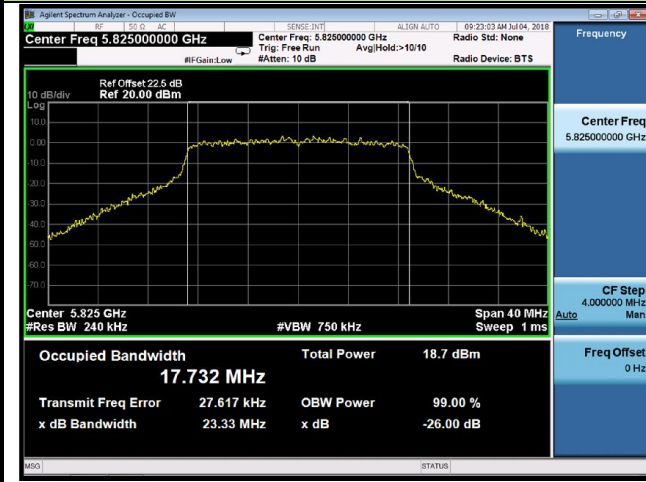
Channel 48 (5240MHz)

Channel 52 (5260MHz)

Channel 60 (5300MHz)

Channel 64 (5320MHz)


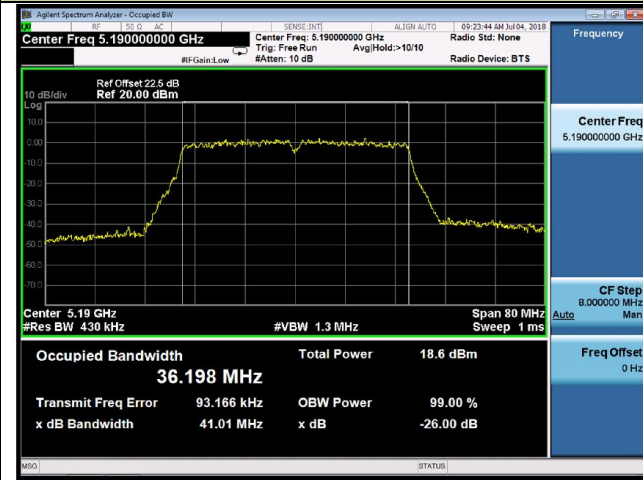
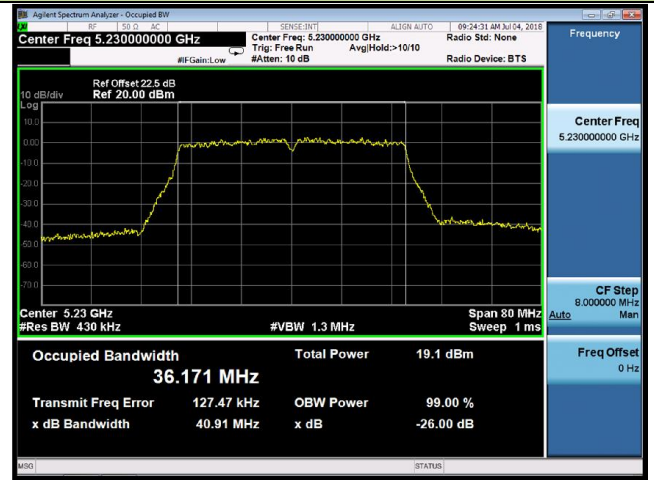
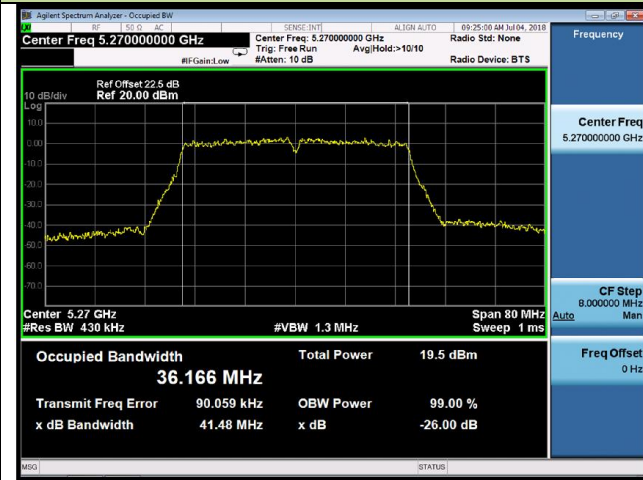
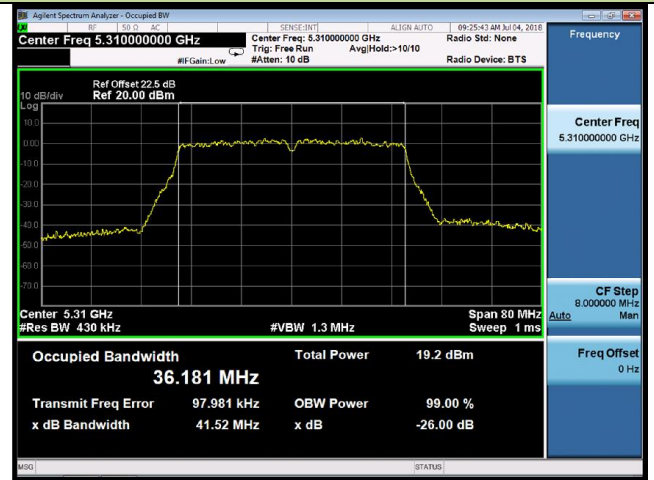
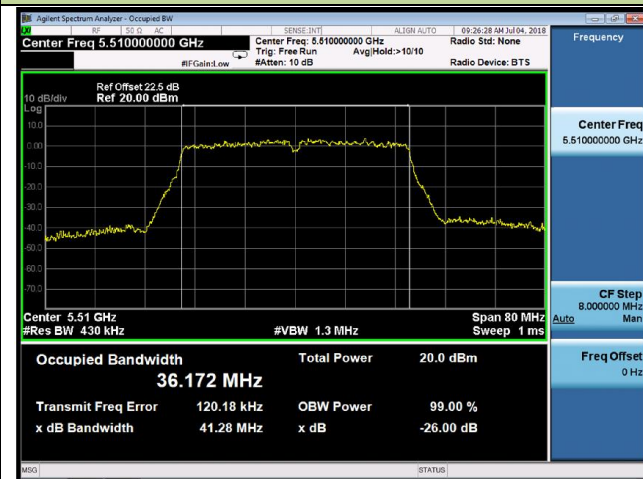
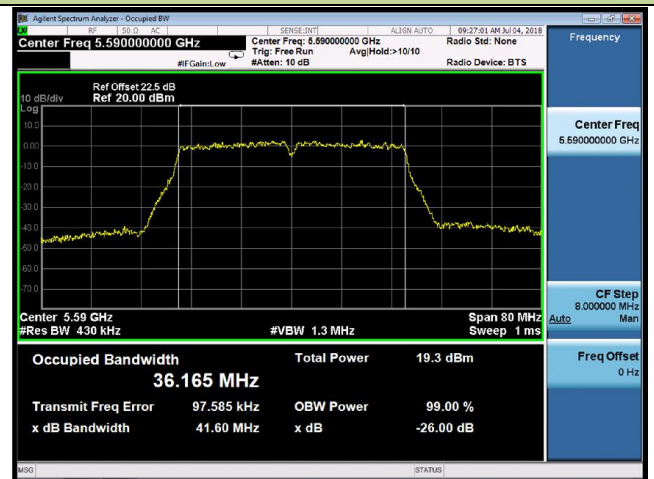
802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2
Channel 100 (5500MHz)

Channel 120 (5600MHz)

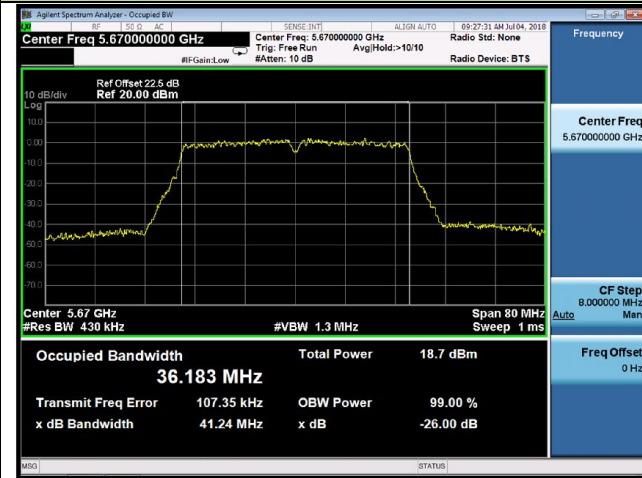
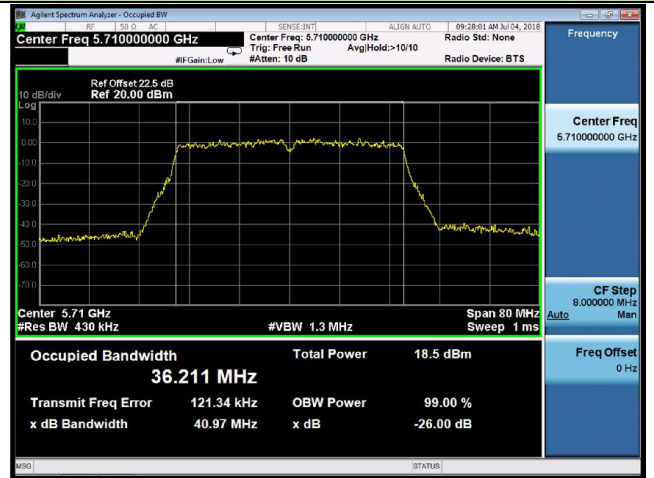
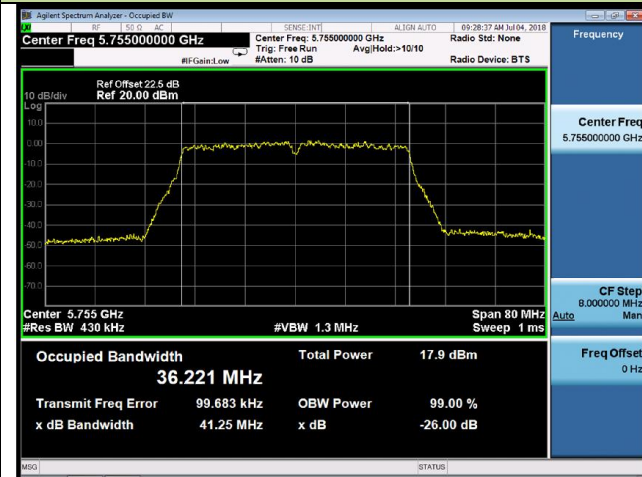
Channel 140 (5700MHz)

Channel 144 (5720MHz)

Channel 149 (5745MHz)

Channel 157 (5785MHz)


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2

Channel 165 (5825MHz)



802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2
Channel 38 (5190MHz)

Channel 46 (5230MHz)

Channel 54 (5270MHz)

Channel 62 (5310MHz)

Channel 102 (5510MHz)

Channel 118 (5590MHz)


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 2 / Ant 1 + 2
Channel 134 (5670MHz)

Channel 142 (5710MHz)

Channel 151 (5755MHz)

Channel 159 (5795MHz)
