

# TEST REPORT

Reference No..... : WTX20X09068188W-5  
FCC ID ..... : 2AI3KCM17XA  
Applicant ..... : Cyrus Technology GmbH  
Address ..... : Hergelsbendenstrasse 49, D-52080 Aachen, Germany  
Product Name ..... : Rugged Phone  
Test Model. .... : CM17XA  
Standards ..... : FCC Part 15.407  
Date of Receipt sample .... : Sep.18, 2020  
Date of Test..... : Sep.18, 2020 to Oct.23, 2020  
Date of Issue ..... : Oct.23, 2020  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:

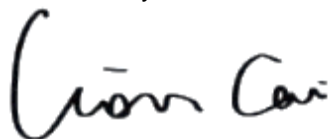

Jason Su / Project Engineer

Lion Cai / RF Manager

Silin Chen / Manager

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING.....	5
1.5 EUT OPERATING DURING TEST.....	6
1.6 TEST FACILITY.....	6
1.7 EUT SETUP AND TEST MODE.....	7
1.8 MEASUREMENT UNCERTAINTY.....	8
1.9 TEST EQUIPMENT LIST AND DETAILS.....	9
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>3. RF EXPOSURE.....</b>	<b>12</b>
3.1 STANDARD APPLICABLE.....	12
3.2 TEST RESULT.....	12
<b>4. ANTENNA REQUIREMENT.....</b>	<b>13</b>
4.1 STANDARD APPLICABLE.....	13
4.2 EVALUATION INFORMATION.....	13
<b>5. AUTOMATICALLY DISCONTINUE TRANSMISSION.....</b>	<b>14</b>
5.1 STANDARD APPLICABLE.....	14
5.2 SUMMARY OF TEST RESULTS.....	14
<b>6. CONDUCTED EMISSIONS.....</b>	<b>15</b>
6.1 TEST PROCEDURE.....	15
6.2 BASIC TEST SETUP BLOCK DIAGRAM.....	15
6.3 TEST RECEIVER SETUP.....	15
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	15
<b>7. POWER SPECTRAL DENSITY.....</b>	<b>18</b>
7.1 STANDARD APPLICABLE.....	18
7.2 TEST PROCEDURE.....	18
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	19
<b>8. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....</b>	<b>33</b>
8.1 STANDARD APPLICABLE.....	33
8.2 TEST PROCEDURE.....	33
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	35
<b>9. MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>52</b>
9.1 STANDARD APPLICABLE.....	52
9.2 TEST PROCEDURE.....	52
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	53
<b>10. RADIATED SPURIOUS EMISSIONS.....</b>	<b>67</b>
10.1 STANDARD APPLICABLE.....	67
10.2 TEST PROCEDURE.....	67
10.3 TEST RECEIVER SETUP.....	69
10.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	69
10.5 SUMMARY OF TEST RESULTS/PLOTS.....	69
<b>11. FREQUENCY STABILITY.....</b>	<b>115</b>
11.1 STANDARD APPLICABLE.....	115
11.2 TEST PROCEDURE.....	115
11.3 SUMMARY OF TEST RESULTS/PLOTS.....	115
<b>APPENDIX PHOTOGRAPHS.....</b>	<b>118</b>

**Report version**

Version No.	Date of issue	Description
Rev.00	Oct.23, 2020	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Cyrus Technology GmbH  
 Address of applicant: Hergelsbendenstrasse 49, D-52080 Aachen, Germany

Manufacturer: Cyrus Technology GmbH  
 Address of manufacturer: Hergelsbendenstrasse 49, D-52080 Aachen, Germany

General Description of EUT	
Product Name:	Rugged Phone
Trade Name:	CYRUS
Model No.:	CM17XA
Adding Model(s):	/
Rated Voltage:	DC3.8V
Battery Capacity:	/
Power Adapter:	MKC-0502000SU INPUT: AC100-240V, 50/60Hz, 0.4A; Output: DC 5V, 2000mA
Software Version:	CM17XA_ROW_1_1.0
Hardware Version:	L925_MB_V1.1
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40,
Frequency Range:	5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
RF Output Power:	12.21dBm (Conducted)
Type of Modulation:	BPSK, QPSK,16QAM,64QAM
Data Rate:	6-54Mbps, up to 150Mbps
Quantity of Channels:	15
Type of Antenna:	Integral Antenna
Antenna Gain:	0.62dBi

s

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.407**: General technical requirements.

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

**KDB789033 D02 v02r01**: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPARTE.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Table for parameters of Test Software setting

Enter `***3646633***` into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	17	17	17	17	17	17	17	17	17	17	17	17	17
802.11n-HT20 MCS0	17	17	17	17	17	17	17	17	17	17	17	17	17
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	17	17	17	17	17	17	17	17	17	17			

## **1.5 EUT Operating during test**

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

## **1.6 Test Facility**

### **Address of the test laboratory**

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz,5590MHz,5670MHz,5755MHz,5795MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Unshielded	Without Ferrite
Earphone Cable	1.2	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi310-14ISK	/
Wireless Charger	/	WP03	/

## 1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$



**1.9 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to §1.1307 and §2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has an integral antenna, fulfill the requirement of this section.

## **5. Automatically Discontinue Transmission**

---

### **5.1 Standard Applicable**

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **5.2 Summary of Test Results**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.


## 6. Conducted Emissions

### 6.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 6.2 Basic Test Setup Block Diagram

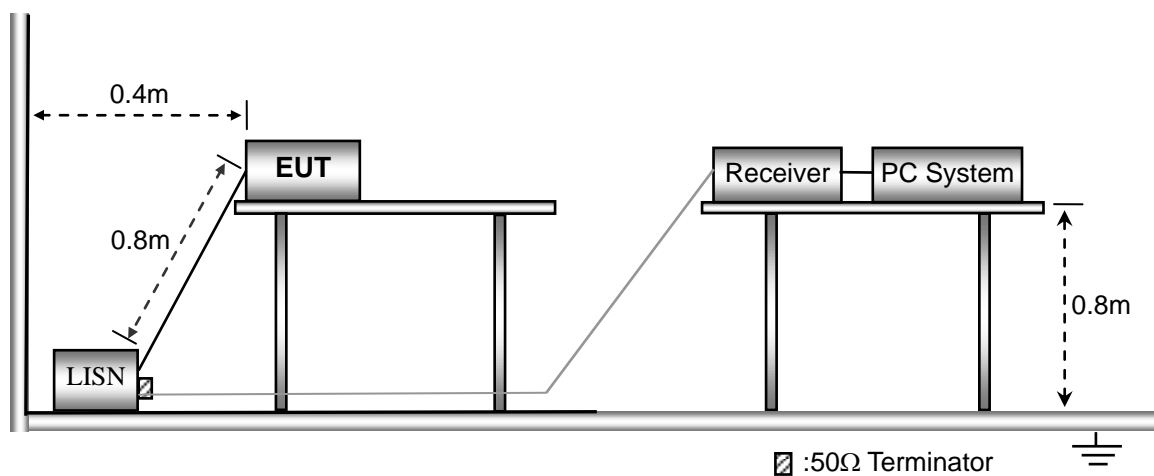


### 6.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal

### 6.4 Summary of Test Results/Plots


Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

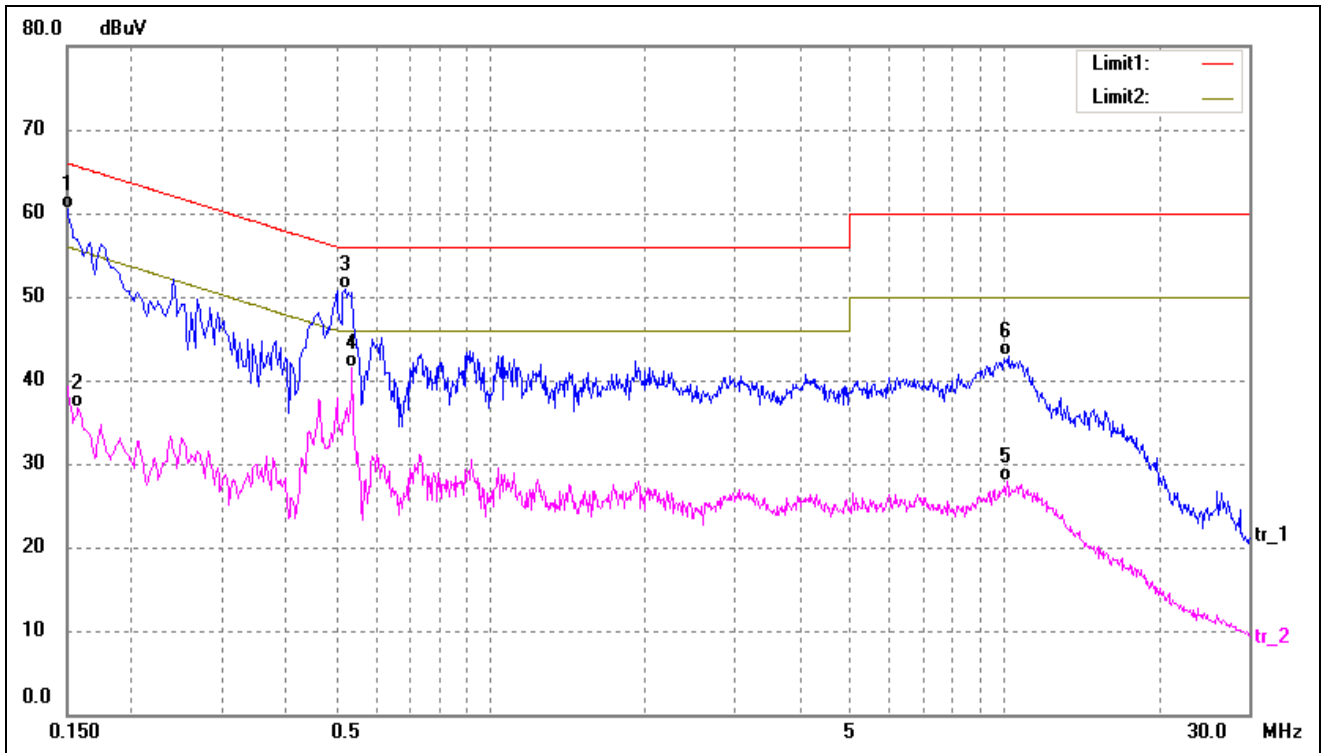

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	50.20	10.25	60.45	66.00	-5.55	QP
2	0.1580	26.38	10.25	36.63	55.57	-18.94	AVG
3	0.5220	40.71	10.22	50.93	56.00	-5.07	QP
4*	0.5380	31.24	10.21	41.45	46.00	-4.55	AVG
5	10.1460	17.54	10.29	27.83	50.00	-22.17	AVG
6	10.2260	32.53	10.29	42.82	60.00	-17.18	QP



Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

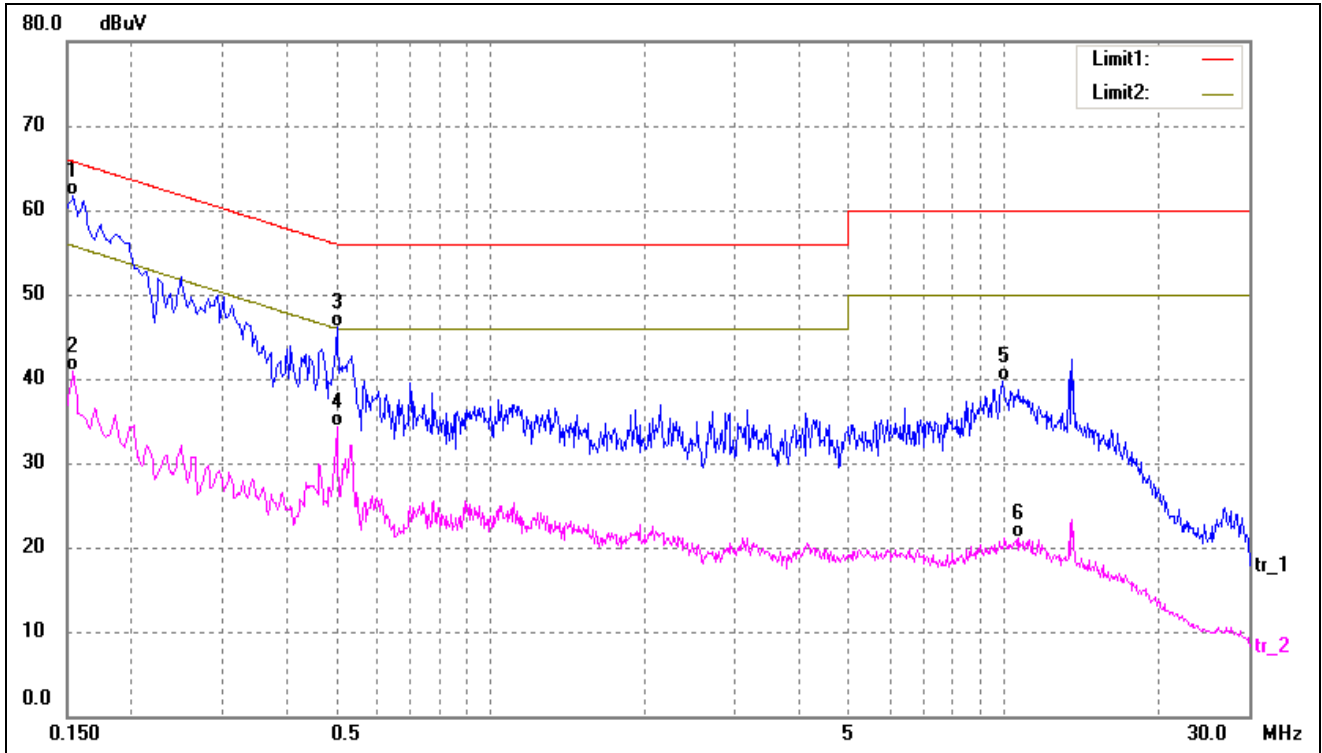

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	51.37	10.25	61.62	65.78	-4.16	QP
2	0.1540	30.67	10.25	40.92	55.78	-14.86	AVG
3	0.5020	35.91	10.22	46.13	56.00	-9.87	QP
4	0.5020	24.14	10.22	34.36	46.00	-11.64	AVG
5	9.9420	29.46	10.28	39.74	60.00	-20.26	QP
6	10.6940	10.81	10.32	21.13	50.00	-28.87	AVG

## 7. Power Spectral Density

---

### 7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 7.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500

kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW  $\geq 1/T$ , where T is defined in section II.B.1.a).
- b) Set VBW  $\geq 3$  RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/\text{RBW})$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 kHz is available on nearly all spectrum analyzers.

### 7.3 Summary of Test Results/Plots

<b>U-NII-1:5150-5250MHz</b>			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	7.123	11
	5200	6.620	11
	5240	6.660	11
802.11n-HT20	5180	6.911	11
	5200	6.714	11
	5240	7.134	11
802.11n-HT40	5190	3.883	11
	5230	4.181	11

<b>U-NII-2A: 5250-5350MHz</b>			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5260	7.028	11
	5280	6.605	11
	5320	7.450	11
802.11n-HT20	5260	4.627	11
	5280	6.693	11
	5320	6.617	11
802.11n-HT40	5270	4.282	11
	5310	3.297	11

<b>U-NII-2C: 5470-5725MHz</b>			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5500	6.336	11
	5600	5.954	11
	5700	4.402	11
802.11n-HT20	5500	6.648	11
	5600	5.648	11
	5700	4.289	11
802.11n-HT40	5510	3.142	11
	5590	2.539	11
	5670	1.888	11


<b>U-NII-3: 5725-5850MHz</b>					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	-1.882	2.22	0.338	30
	5785	-0.703	2.22	1.517	30
	5825	-3.358	2.22	-1.138	30
802.11n-HT20	5745	-1.668	2.22	0.552	30
	5785	-2.356	2.22	-0.136	30
	5825	-3.248	2.22	-1.028	30
802.11n HT40	5755	-2.760	2.22	-0.54	30
	5795	-1.533	2.22	0.687	30

\*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22




➤ 5150-5250MHz

Mode:		802.11a
5180MHz		<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.17896 GHz 7.123 dBm</p> <p>#Avg 10 Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.178960000 GHz 7.123 dBm</p> <p>Center 5.18 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
5200MHz		<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.19828 GHz 6.62 dBm</p> <p>#Avg 10 Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.198280000 GHz 6.62 dBm</p> <p>Center 5.2 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
5240MHz		<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.23912 GHz 6.66 dBm</p> <p>#Avg 10 Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.239120000 GHz 6.66 dBm</p> <p>Center 5.24 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>

Mode:		802.11n-HT20
5180MHz		<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.17916 GHz 6.911 dBm</p> <p>#Avg Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.179160000 GHz 6.911 dBm</p> <p>Center 5.18 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
5200MHz		<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.20140 GHz 6.714 dBm</p> <p>#Avg Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.201400000 GHz 6.714 dBm</p> <p>Center 5.2 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
5240MHz		<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.24120 GHz 7.134 dBm</p> <p>#Avg Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.241200000 GHz 7.134 dBm</p> <p>Center 5.24 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>

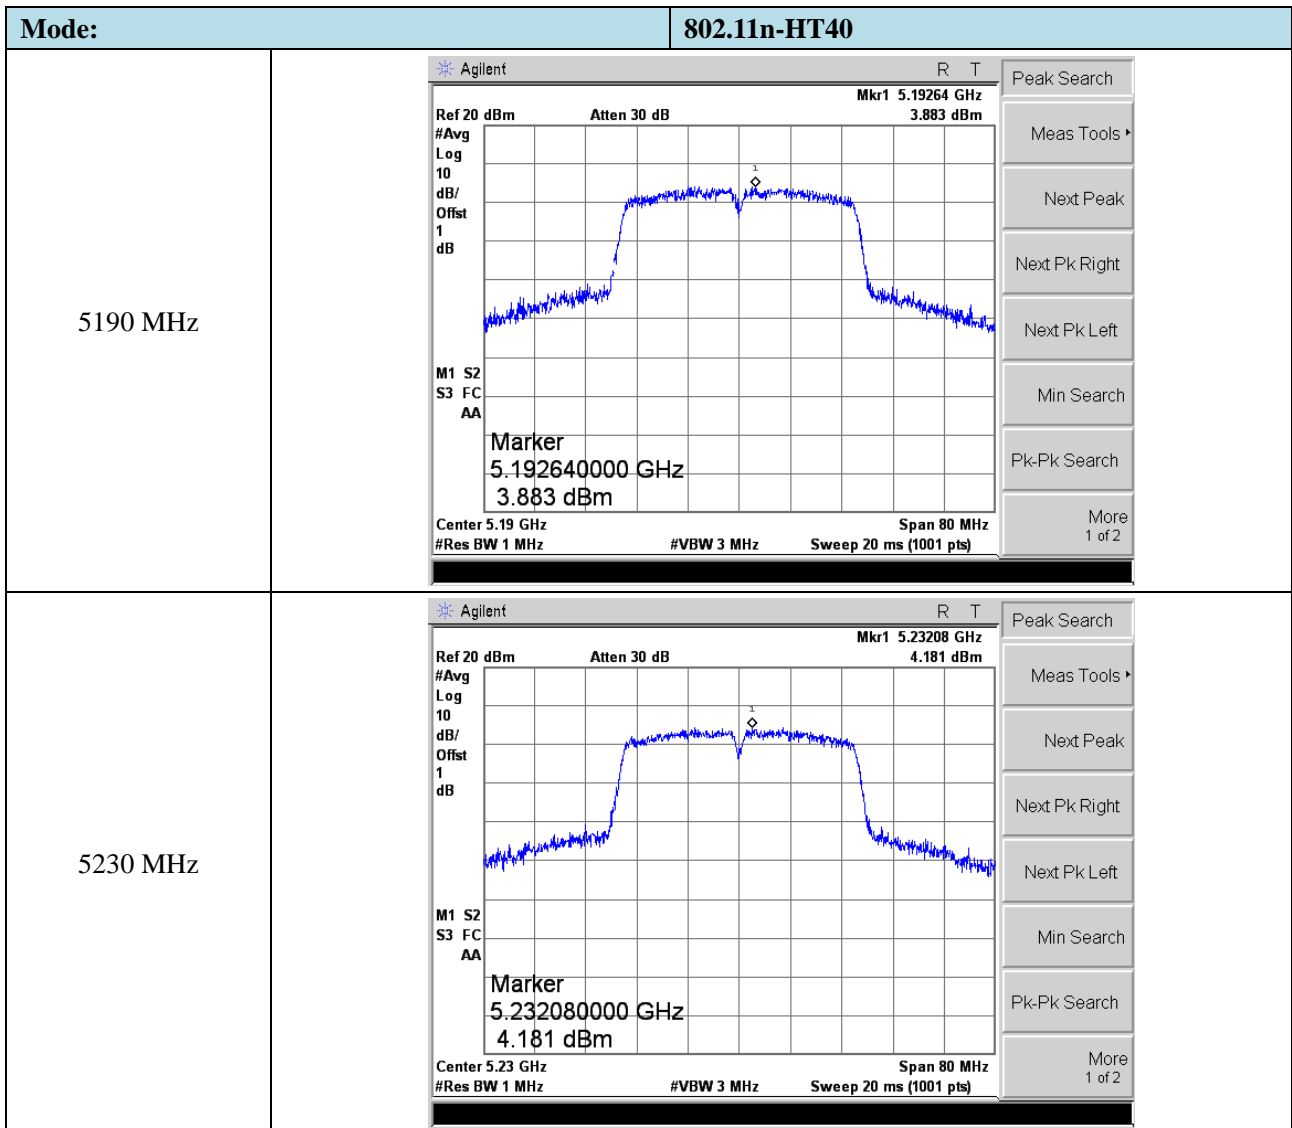


➤ 5250-5350MHz

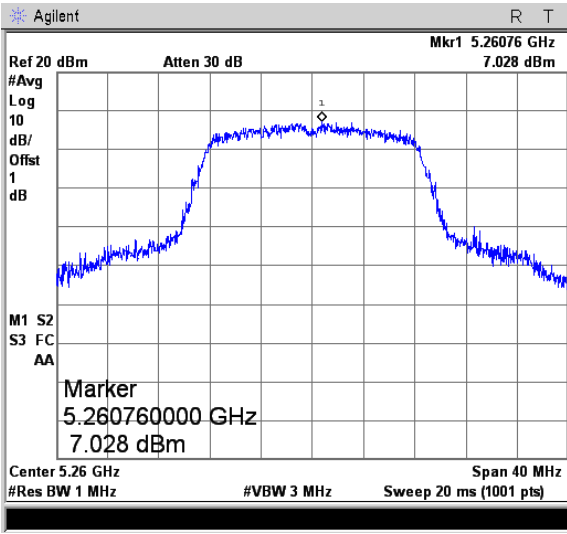
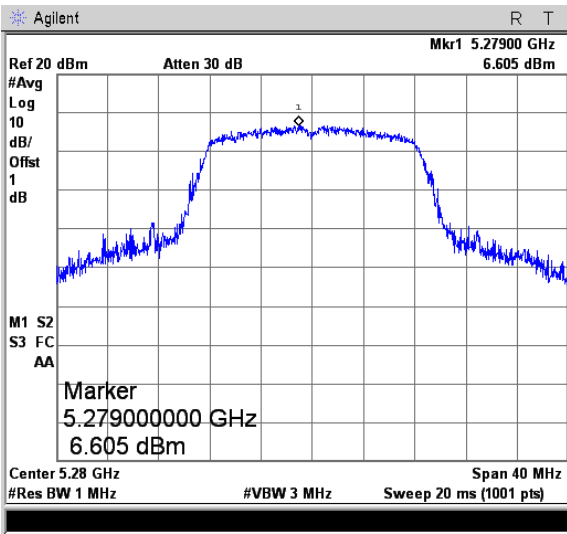
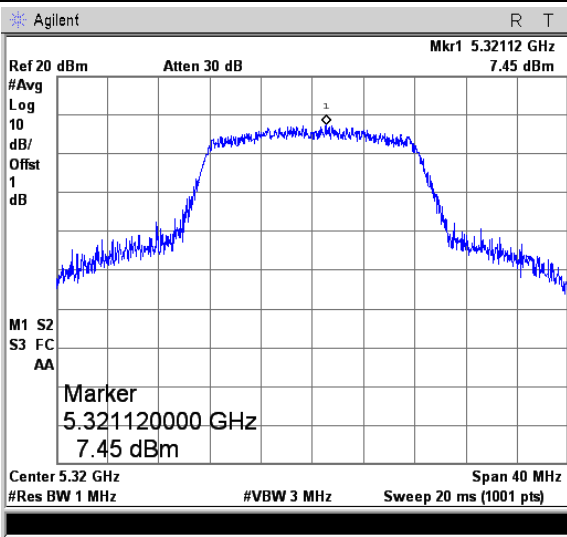
Mode:		802.11a
5260MHz		<p>Agilent R T</p> <p>Peak Search</p> <p>Meas Tools ▶</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p>
5280MHz		<p>Agilent R T</p> <p>Peak Search</p> <p>Meas Tools ▶</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p>
5320MHz		<p>Agilent R T</p> <p>Peak Search</p> <p>Meas Tools ▶</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p>



Mode:		802.11n-HT20	
5260MHz			<p>Freq/Channel</p> <p>Center Freq 5.26000000 GHz</p> <p>Start Freq 5.24000000 GHz</p> <p>Stop Freq 5.28000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5280MHz			<p>Peak Search</p> <p>Meas Tools ▶</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p>
5320MHz			<p>Peak Search</p> <p>Meas Tools ▶</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Min Search</p> <p>Pk-Pk Search</p> <p>More 1 of 2</p>

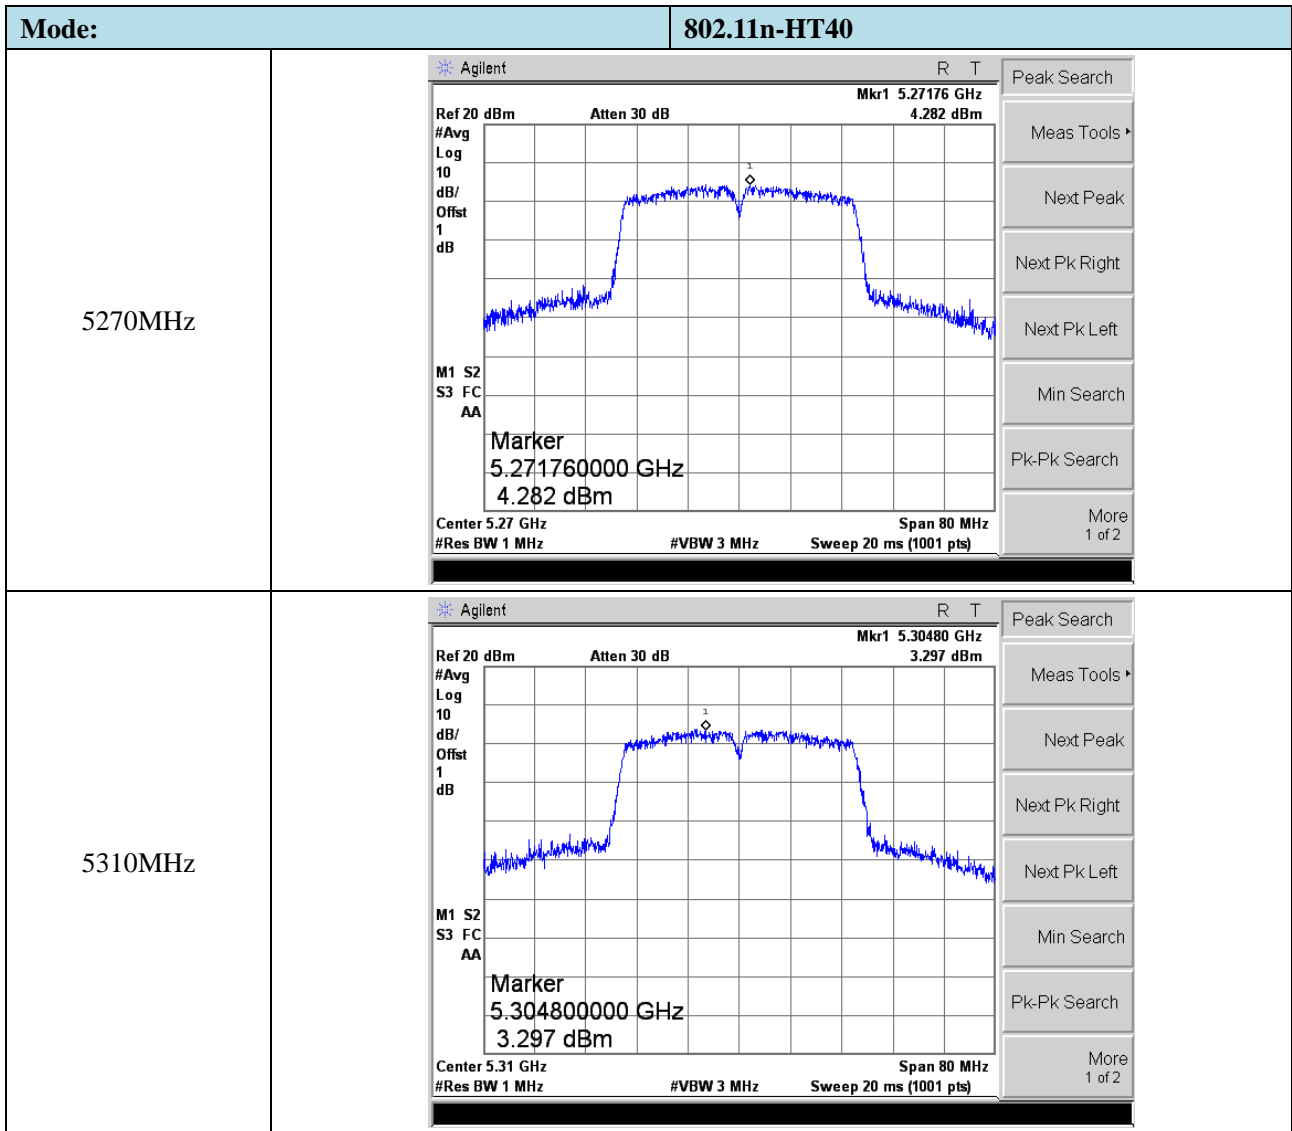

➤ 5470-5725MHz

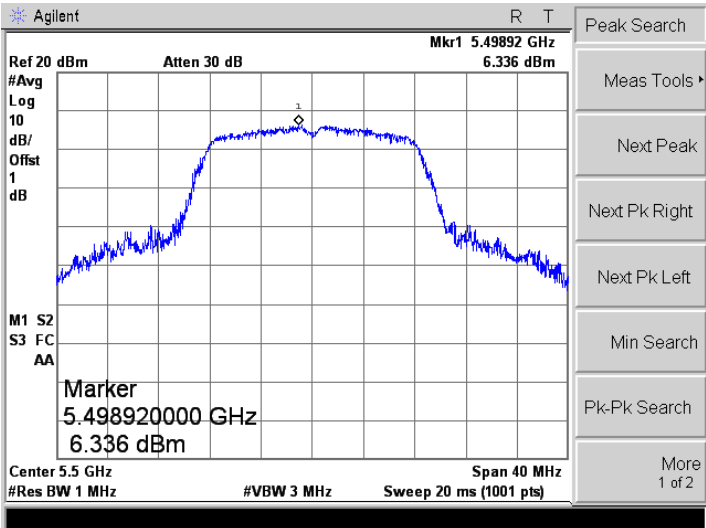
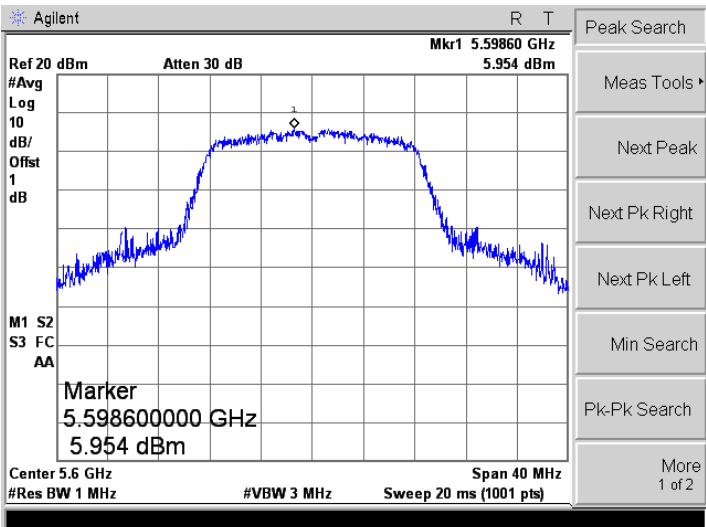
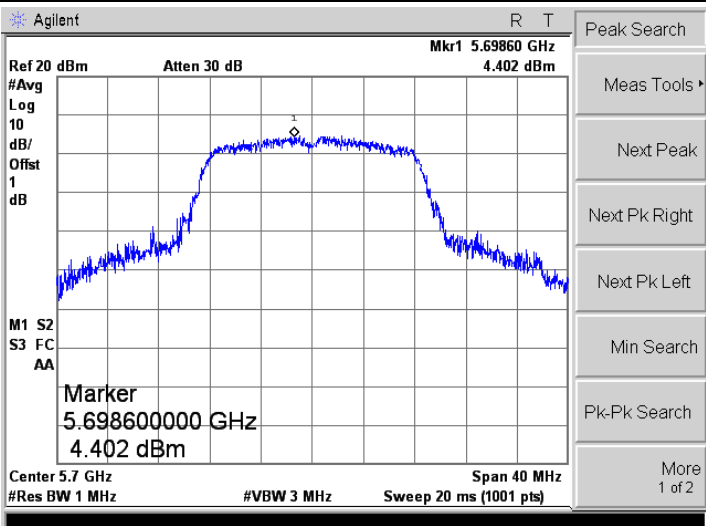
Mode:		802.11a
5500MHz		
5600MHz		
5700MHz		


Mode:		802.11n-HT20
5500MHz		
5600MHz		
5700MHz		

Mode:		802.11n-HT40	
5510MHz		<p>Agilent R T            Ref 20 dBm Atten 30 dB Mkr1 5.51680 GHz            3.142 dBm            #Avg 10            Log dB/ Offst 1 dB            M1 S2            S3 FC            AA  <b>Marker</b>            5.516800000 GHz            3.142 dBm            Center 5.51 GHz Span 80 MHz            #Res BW 1 MHz #Vbw 3 MHz Sweep 20 ms (1001 pts)</p>	Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
5590MHz		<p>Agilent R T            Ref 20 dBm Atten 30 dB Mkr1 5.58800 GHz            2.539 dBm            #Avg 10            Log dB/ Offst 1 dB            M1 S2            S3 FC            AA  <b>Marker</b>            5.588000000 GHz            2.539 dBm            Center 5.59 GHz Span 80 MHz            #Res BW 1 MHz #Vbw 3 MHz Sweep 20 ms (1001 pts)</p>	Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
5670MHz		<p>Agilent R T            Ref 20 dBm Atten 30 dB Mkr1 5.66696 GHz            1.888 dBm            #Avg 10            Log dB/ Offst 1 dB            M1 S2            S3 FC            AA  <b>Marker</b>            5.666960000 GHz            1.888 dBm            Center 5.67 GHz Span 80 MHz            #Res BW 1 MHz #Vbw 3 MHz Sweep 20 ms (1001 pts)</p>	Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

➤ 5725-5850MHz

Mode:		802.11a	
5745MHz		<p>Agilent R T            Ref 20 dBm Atten 30 dB Mkr1 5.74624 GHz            -1.882 dBm            #Avg 10            Log dB/ Offst 1 dB            M1 S2            S3 FC            AA  <b>Marker</b>            5.746240000 GHz            -1.882 dBm            Center 5.745 GHz Span 40 MHz            #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p>	Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
5785MHz		<p>Agilent R T            Ref 20 dBm Atten 30 dB Mkr1 5.78292 GHz            -0.703 dBm            #Avg 10            Log dB/ Offst 1 dB            M1 S2            S3 FC            AA  <b>Marker</b>            5.782920000 GHz            -0.703 dBm            Center 5.785 GHz Span 40 MHz            #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p>	Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
5825MHz		<p>Agilent R T            Ref 20 dBm Atten 30 dB Mkr1 5.82636 GHz            -3.358 dBm            #Avg 10            Log dB/ Offst 1 dB            M1 S2            S3 FC            AA  <b>Marker</b>            5.826360000 GHz            -3.358 dBm            Center 5.825 GHz Span 40 MHz            #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p>	Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

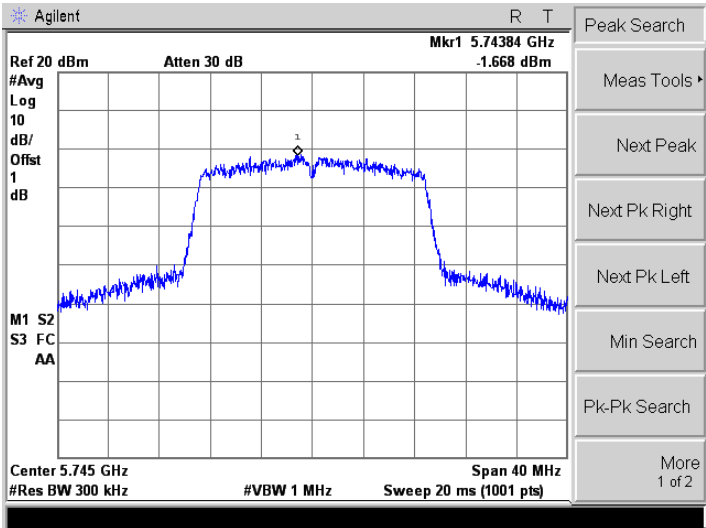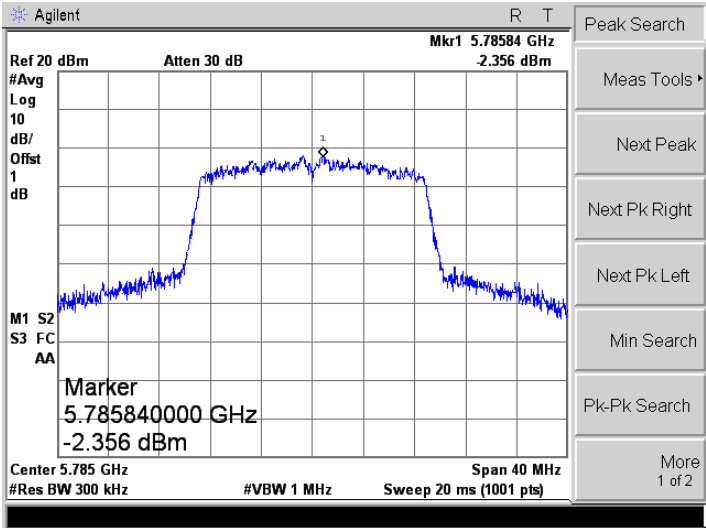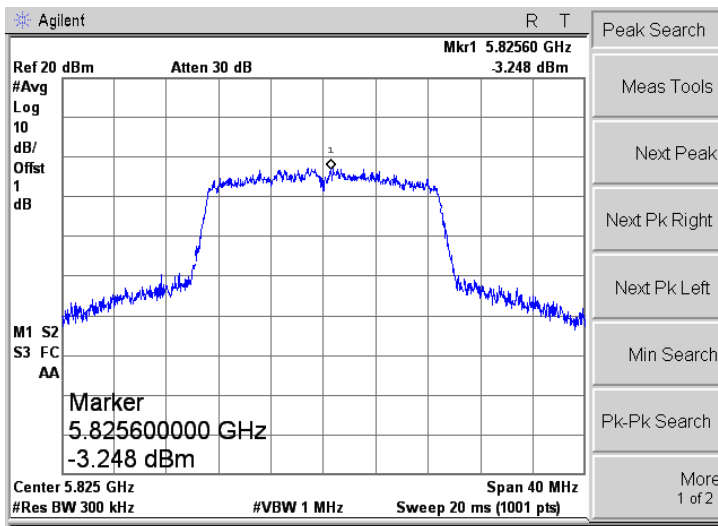Mode:		802.11n-HT20
5745MHz		
5785MHz		
5825MHz		

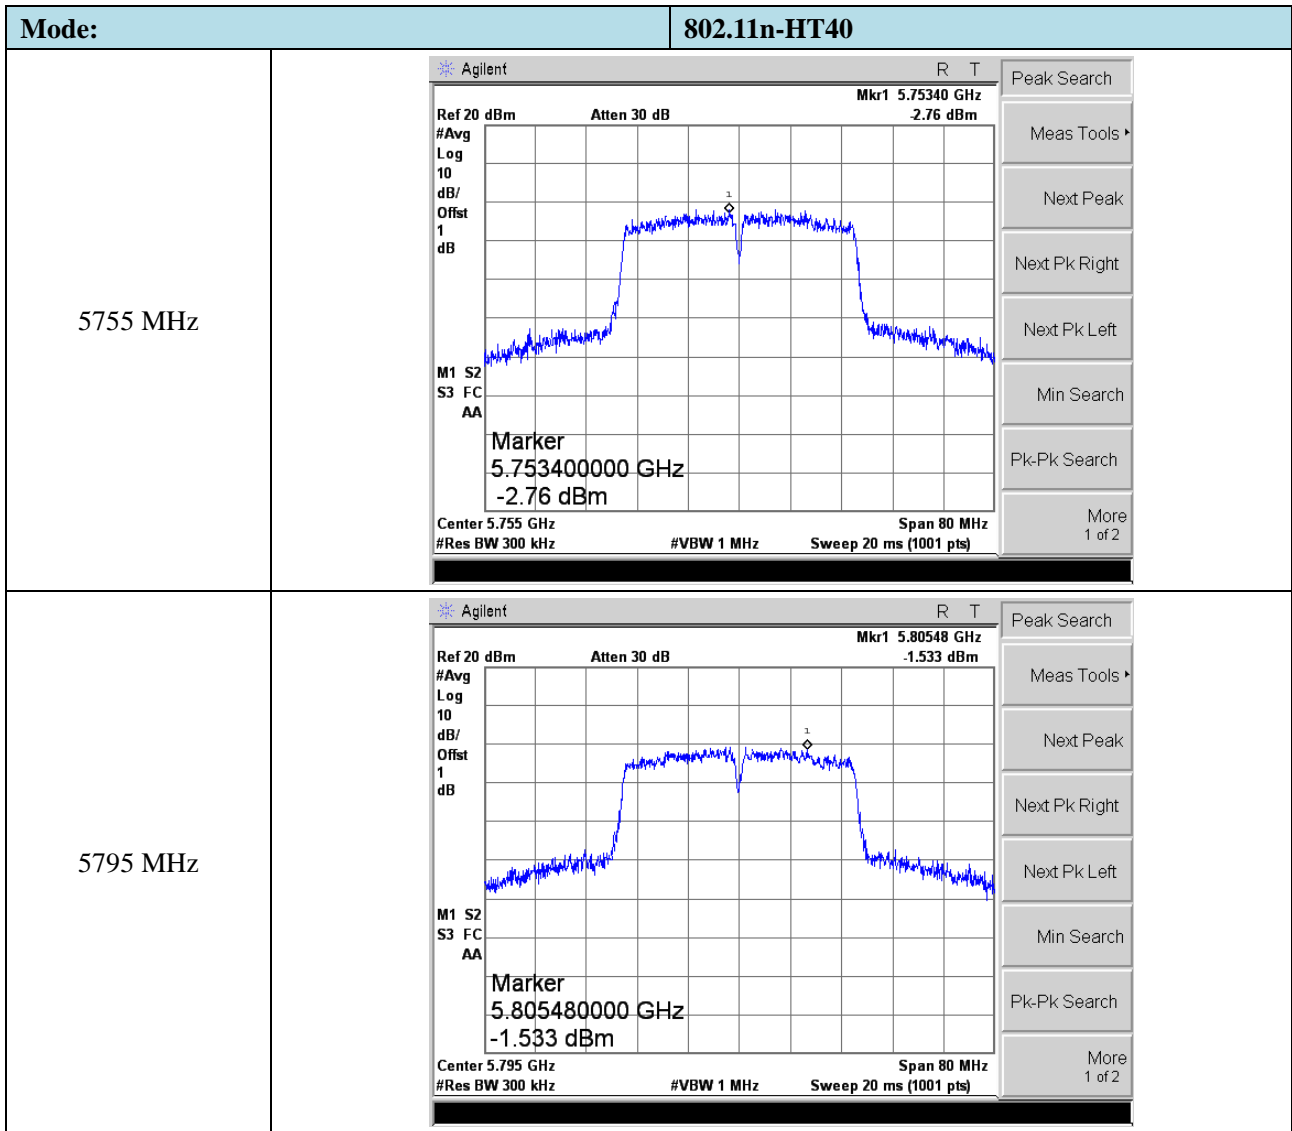



## 8. Emission Bandwidth and Occupied Bandwidth

---

### 8.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 8.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

## 2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

## D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

**8.3 Summary of Test Results/Plots**

<b>U-NII-1:5150-5250MHz</b>				
<b>Test Mode</b>	<b>Test Channel MHz</b>	<b>26 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>Limit MHz</b>
802.11a	5180	19.884	16.8084	Pass
	5200	20.145	16.7397	Pass
	5240	20.582	16.8763	Pass
802.11n-HT20	5180	20.324	17.7294	Pass
	5200	20.333	17.7143	Pass
	5240	20.397	17.7201	Pass
802.11n-HT40	5190	43.790	36.4611	Pass
	5230	44.069	36.3286	Pass

<b>U-NII-2A: 5250-5350MHz</b>				
<b>Test Mode</b>	<b>Test Channel MHz</b>	<b>26 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>Limit MHz</b>
802.11a	5260	19.821	16.6891	Pass
	5280	20.975	16.9451	Pass
	5320	19.788	16.7380	Pass
802.11n-HT20	5260	20.089	17.7065	Pass
	5280	19.897	17.6876	Pass
	5320	19.897	17.6934	Pass
802.11n-HT40	5270	41.138	36.3881	Pass
	5310	41.131	36.3034	Pass

<b>U-NII-2C: 5470-5725MHz</b>				
<b>Test Mode</b>	<b>Test Channel MHz</b>	<b>26 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>Limit MHz</b>
802.11a	5500	20.097	16.8774	Pass
	5600	19.775	16.7777	Pass
	5700	20.541	16.7830	Pass
802.11n-HT20	5500	20.026	17.7192	Pass
	5600	20.082	17.6886	Pass
	5700	20.234	17.7250	Pass
802.11n-HT40	5510	44.526	36.3218	Pass
	5590	41.040	36.2757	Pass
	5670	41.731	36.3647	Pass

<b>U-NII-3: 5725-5850MHz</b>				
<b>Test Mode</b>	<b>Test Channel MHz</b>	<b>6 dB Bandwidth MHz</b>	<b>99% Bandwidth MHz</b>	<b>Limit MHz</b>
802.11a	5745	16.367	16.9167	≥500
	5785	16.372	16.7417	≥500
	5825	16.342	16.8563	≥500
802.11n-HT20	5745	17.618	17.7122	≥500
	5785	17.557	17.7105	≥500
	5825	17.577	17.7142	≥500
802.11n-HT40	5755	36.185	36.2371	≥500
	5795	36.341	36.2635	≥500

➤ 5150-5250MHz

Mode:		802.11a
5180MHz	<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.8084 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -32.166 kHz x dB Bandwidth 19.884 MHz</p>	<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5200MHz	<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.7397 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 11.941 kHz x dB Bandwidth 20.145 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5240MHz	<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.8763 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -35.693 kHz x dB Bandwidth 20.582 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

Mode:		802.11n-HT20
5180MHz	<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/</p> <p>Offset 1</p> <p>dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7294 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 21.646 kHz</p> <p>x dB Bandwidth 20.324 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	
5200MHz	<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/</p> <p>Offset 1</p> <p>dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7143 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 24.853 kHz</p> <p>x dB Bandwidth 20.333 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	
5240MHz	<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/</p> <p>Offset 1</p> <p>dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7201 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 22.056 kHz</p> <p>x dB Bandwidth 20.397 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	

Mode:		802.11n-HT40
5190 MHz	<p>Agilent R T</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>36.4611 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 105.895 kHz</p> <p>x dB Bandwidth 43.790 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.19000000 GHz</p> <p>Start Freq 5.15000000 GHz</p> <p>Stop Freq 5.23000000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	
5230 MHz	<p>Agilent R T</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>36.3286 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 74.074 kHz</p> <p>x dB Bandwidth 44.069 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.23000000 GHz</p> <p>Start Freq 5.19000000 GHz</p> <p>Stop Freq 5.27000000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	

➤ 5250-5350MHz

Mode:		802.11a
5260MHz		
5280MHz		
5320MHz		



Mode:		802.11n-HT20
5260MHz		
5280MHz		
5320MHz		

Mode:		802.11n-HT40																
5270MHz		<p>Agilent R T</p> <p>Ch Freq 5.27 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.27 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2"><b>Occupied Bandwidth</b></td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">36.3881 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>96.608 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>41.138 MHz</td> <td></td> <td></td> </tr> </table>	<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %	36.3881 MHz		x dB	-26.00 dB	Transmit Freq Error	96.608 kHz			x dB Bandwidth	41.138 MHz		
<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %															
36.3881 MHz		x dB	-26.00 dB															
Transmit Freq Error	96.608 kHz																	
x dB Bandwidth	41.138 MHz																	
5310MHz		<p>Agilent R T</p> <p>Ch Freq 5.31 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.31 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td colspan="2"><b>Occupied Bandwidth</b></td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">36.3034 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>80.903 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>41.131 MHz</td> <td></td> <td></td> </tr> </table>	<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %	36.3034 MHz		x dB	-26.00 dB	Transmit Freq Error	80.903 kHz			x dB Bandwidth	41.131 MHz		
<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %															
36.3034 MHz		x dB	-26.00 dB															
Transmit Freq Error	80.903 kHz																	
x dB Bandwidth	41.131 MHz																	

➤ 5470-5725MHz

Mode:		802.11a
5500MHz	<p>Agilent R T</p> <p>Ch Freq 5.5 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.5 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.8774 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -52.958 kHz x dB Bandwidth 20.097 MHz</p>	<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5600MHz	<p>Agilent R T</p> <p>Ch Freq 5.6 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.6 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.7777 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -40.492 kHz x dB Bandwidth 19.775 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.6000000 GHz</p> <p>Start Freq 5.5800000 GHz</p> <p>Stop Freq 5.6200000 GHz</p> <p>CF Step 4.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5700MHz	<p>Agilent R T</p> <p>Ch Freq 5.7 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.7 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.7830 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -34.130 kHz x dB Bandwidth 20.541 MHz</p>	<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

Mode:		802.11n-HT20
5500MHz	<p>Agilent R T</p> <p>Ch Freq 5.5 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>x dB -26.00 dB</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offset 1 dB</p> <p>Center 5.5 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.7192 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 18.820 kHz</p> <p>x dB Bandwidth 20.026 MHz</p>	<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5600MHz	<p>Agilent R T</p> <p>Ch Freq 5.6 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offset 1 dB</p> <p>Center 5.6 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.6886 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 22.635 kHz</p> <p>x dB Bandwidth 20.082 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.6000000 GHz</p> <p>Start Freq 5.5800000 GHz</p> <p>Stop Freq 5.6200000 GHz</p> <p>CF Step 4.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5700MHz	<p>Agilent R T</p> <p>Ch Freq 5.7 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.70000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offset 1 dB</p> <p>Center 5.7 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.7250 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 10.316 kHz</p> <p>x dB Bandwidth 20.234 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.7000000 GHz</p> <p>Start Freq 5.6800000 GHz</p> <p>Stop Freq 5.7200000 GHz</p> <p>CF Step 4.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

Mode:		802.11n-HT40																	
5510MHz			<table border="1"> <tr><td colspan="2">Freq/Channel</td></tr> <tr><td>Center Freq</td><td>5.51000000 GHz</td></tr> <tr><td>Start Freq</td><td>5.47000000 GHz</td></tr> <tr><td>Stop Freq</td><td>5.55000000 GHz</td></tr> <tr><td>CF Step</td><td>8.00000000 MHz</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On</td></tr> <tr><td>Scale Type</td><td>Log</td></tr> </table>	Freq/Channel		Center Freq	5.51000000 GHz	Start Freq	5.47000000 GHz	Stop Freq	5.55000000 GHz	CF Step	8.00000000 MHz	Freq Offset	0.00000000 Hz	Signal Track	On	Scale Type	Log
Freq/Channel																			
Center Freq	5.51000000 GHz																		
Start Freq	5.47000000 GHz																		
Stop Freq	5.55000000 GHz																		
CF Step	8.00000000 MHz																		
Freq Offset	0.00000000 Hz																		
Signal Track	On																		
Scale Type	Log																		
5590MHz			<table border="1"> <tr><td colspan="2">Freq/Channel</td></tr> <tr><td>Center Freq</td><td>5.59000000 GHz</td></tr> <tr><td>Start Freq</td><td>5.55000000 GHz</td></tr> <tr><td>Stop Freq</td><td>5.63000000 GHz</td></tr> <tr><td>CF Step</td><td>8.00000000 MHz</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On</td></tr> <tr><td>Scale Type</td><td>Log</td></tr> </table>	Freq/Channel		Center Freq	5.59000000 GHz	Start Freq	5.55000000 GHz	Stop Freq	5.63000000 GHz	CF Step	8.00000000 MHz	Freq Offset	0.00000000 Hz	Signal Track	On	Scale Type	Log
Freq/Channel																			
Center Freq	5.59000000 GHz																		
Start Freq	5.55000000 GHz																		
Stop Freq	5.63000000 GHz																		
CF Step	8.00000000 MHz																		
Freq Offset	0.00000000 Hz																		
Signal Track	On																		
Scale Type	Log																		
5670MHz			<table border="1"> <tr><td colspan="2">Freq/Channel</td></tr> <tr><td>Center Freq</td><td>5.67000000 GHz</td></tr> <tr><td>Start Freq</td><td>5.63000000 GHz</td></tr> <tr><td>Stop Freq</td><td>5.71000000 GHz</td></tr> <tr><td>CF Step</td><td>8.00000000 MHz</td></tr> <tr><td>Freq Offset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On</td></tr> <tr><td>Scale Type</td><td>Log</td></tr> </table>	Freq/Channel		Center Freq	5.67000000 GHz	Start Freq	5.63000000 GHz	Stop Freq	5.71000000 GHz	CF Step	8.00000000 MHz	Freq Offset	0.00000000 Hz	Signal Track	On	Scale Type	Log
Freq/Channel																			
Center Freq	5.67000000 GHz																		
Start Freq	5.63000000 GHz																		
Stop Freq	5.71000000 GHz																		
CF Step	8.00000000 MHz																		
Freq Offset	0.00000000 Hz																		
Signal Track	On																		
Scale Type	Log																		

➤ 5725-5850MHz : 6 dB Bandwidth

Mode:		802.11a
5745MHz	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>VBW 300.000000 kHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>16.4072 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -15.671 kHz</p> <p>x dB Bandwidth 16.367 MHz</p>	<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5785MHz	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 5.78500000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>16.3895 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -11.299 kHz</p> <p>x dB Bandwidth 16.372 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5825MHz	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 5.82500000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>16.3964 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -11.223 kHz</p> <p>x dB Bandwidth 16.342 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>




Mode:		802.11n-HT20
5745MHz	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>VBW 300.000000 kHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.5840 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error 1.449 kHz</p> <p>x dB Bandwidth 17.618 MHz</p>	<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5785MHz	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 5.78500000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.5787 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error 3.759 kHz</p> <p>x dB Bandwidth 17.557 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5825MHz	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 5.82500000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.5749 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -6.390 kHz</p> <p>x dB Bandwidth 17.577 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

Mode:		802.11n-HT40
5755 MHz		<p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 5.75500000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.755 GHz Span 80 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.8920 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 17.762 kHz x dB Bandwidth 36.185 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.75500000 GHz</p> <p>Start Freq 5.71500000 GHz</p> <p>Stop Freq 5.79500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5795 MHz		<p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 5.795 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.795 GHz Span 80 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.9263 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 3.773 kHz x dB Bandwidth 36.341 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>



➤ 5725-5850MHz : 99% Bandwidth

Mode:		802.11a
5745MHz	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>x dB -26.00 dB</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.9167 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -77.780 kHz</p> <p>x dB Bandwidth 19.866 MHz</p>	<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5785MHz	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.7417 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -6.493 kHz</p> <p>x dB Bandwidth 19.778 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5825MHz	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8563 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -66.045 kHz</p> <p>x dB Bandwidth 19.995 MHz</p>	<p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

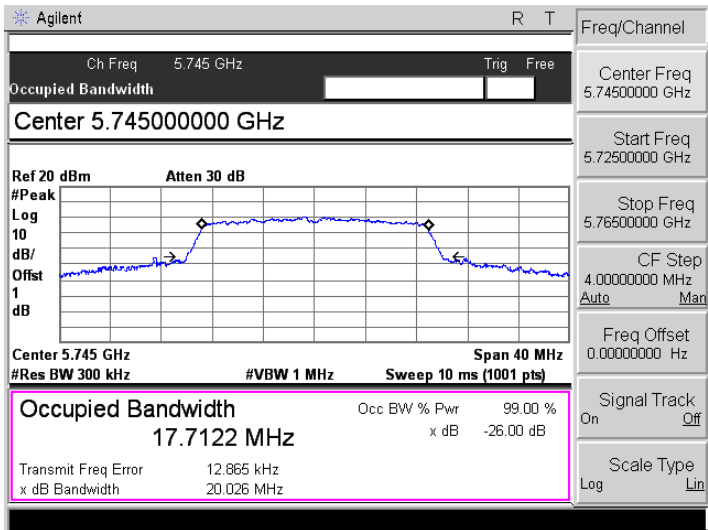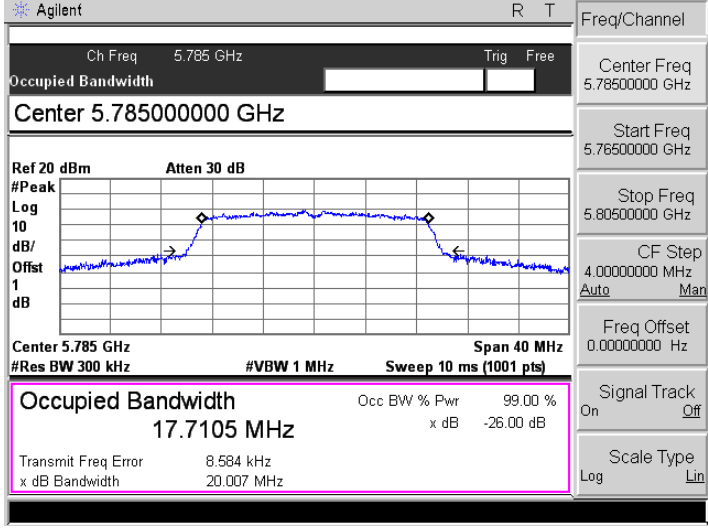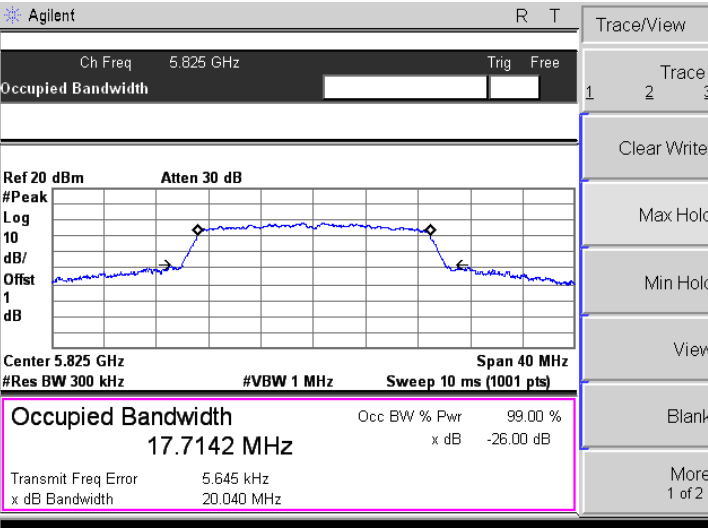Mode:		802.11n-HT20											
5745MHz		<table border="1"> <tr><td>Freq/Channel</td></tr> <tr><td>Center Freq 5.74500000 GHz</td></tr> <tr><td>Start Freq 5.72500000 GHz</td></tr> <tr><td>Stop Freq 5.76500000 GHz</td></tr> <tr><td>CF Step 4.00000000 MHz</td></tr> <tr><td>Auto Man</td></tr> <tr><td>Freq Offset 0.00000000 Hz</td></tr> <tr><td>Signal Track On</td></tr> <tr><td>Off</td></tr> <tr><td>Scale Type Log</td></tr> <tr><td>Lin</td></tr> </table>	Freq/Channel	Center Freq 5.74500000 GHz	Start Freq 5.72500000 GHz	Stop Freq 5.76500000 GHz	CF Step 4.00000000 MHz	Auto Man	Freq Offset 0.00000000 Hz	Signal Track On	Off	Scale Type Log	Lin
Freq/Channel													
Center Freq 5.74500000 GHz													
Start Freq 5.72500000 GHz													
Stop Freq 5.76500000 GHz													
CF Step 4.00000000 MHz													
Auto Man													
Freq Offset 0.00000000 Hz													
Signal Track On													
Off													
Scale Type Log													
Lin													
5785MHz		<table border="1"> <tr><td>Freq/Channel</td></tr> <tr><td>Center Freq 5.78500000 GHz</td></tr> <tr><td>Start Freq 5.76500000 GHz</td></tr> <tr><td>Stop Freq 5.80500000 GHz</td></tr> <tr><td>CF Step 4.00000000 MHz</td></tr> <tr><td>Auto Man</td></tr> <tr><td>Freq Offset 0.00000000 Hz</td></tr> <tr><td>Signal Track On</td></tr> <tr><td>Off</td></tr> <tr><td>Scale Type Log</td></tr> <tr><td>Lin</td></tr> </table>	Freq/Channel	Center Freq 5.78500000 GHz	Start Freq 5.76500000 GHz	Stop Freq 5.80500000 GHz	CF Step 4.00000000 MHz	Auto Man	Freq Offset 0.00000000 Hz	Signal Track On	Off	Scale Type Log	Lin
Freq/Channel													
Center Freq 5.78500000 GHz													
Start Freq 5.76500000 GHz													
Stop Freq 5.80500000 GHz													
CF Step 4.00000000 MHz													
Auto Man													
Freq Offset 0.00000000 Hz													
Signal Track On													
Off													
Scale Type Log													
Lin													
5825MHz		<table border="1"> <tr><td>Trace/View</td></tr> <tr><td>1 2 3</td></tr> <tr><td>Trace</td></tr> <tr><td>Clear Write</td></tr> <tr><td>Max Hold</td></tr> <tr><td>Min Hold</td></tr> <tr><td>View</td></tr> <tr><td>Blank</td></tr> <tr><td>More 1 of 2</td></tr> </table>	Trace/View	1 2 3	Trace	Clear Write	Max Hold	Min Hold	View	Blank	More 1 of 2		
Trace/View													
1 2 3													
Trace													
Clear Write													
Max Hold													
Min Hold													
View													
Blank													
More 1 of 2													

Mode:		802.11n-HT40
5755 MHz	<p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>x dB -26.00 dB</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offset</p> <p>1</p> <p>dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>36.2371 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 135.137 kHz</p> <p>x dB Bandwidth 40.981 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	
5795 MHz	<p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.79500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offset</p> <p>1</p> <p>dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>36.2635 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 87.416 kHz</p> <p>x dB Bandwidth 41.170 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.79500000 GHz</p> <p>Start Freq 5.75500000 GHz</p> <p>Stop Freq 5.83500000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	

## 9. Maximum Conducted Output Power

---

### 9.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 9.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW  $\geq$  3 MHz.
- (iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

Waltek Testing Group (Shenzhen) Co., Ltd.  
<http://www.semtest.com.cn>

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

### 9.3 Summary of Test Results/Plots

<b>U-NII-1:5150-5250MHz</b>				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5180	12.21	16.63	250
	5200	11.56	14.32	250
	5240	11.12	12.94	250
802.11n-HT20	5180	11.44	13.93	250
	5200	11.02	12.65	250
	5240	11.24	13.30	250
802.11n-HT40	5190	10.96	12.47	250
	5230	11.49	14.09	250

<b>U-NII-2A: 5250-5350MHz</b>				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5260	11.49	14.09	250
	5280	11.49	14.09	250
	5320	11.04	12.71	250
802.11n-HT20	5260	10.33	10.79	250
	5280	10.94	12.42	250
	5320	11.89	15.45	250
802.11n-HT40	5270	11.11	12.91	250
	5310	11.08	12.82	250

<b>U-NII-2C: 5470-5725MHz</b>				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5500	10.38	10.91	250
	5600	10.1	10.23	250
	5700	9.75	9.44	250
802.11n-HT20	5500	10.09	10.21	250
	5600	9.42	8.75	250
	5700	9.11	8.15	250
802.11n-HT40	5510	10.45	11.09	250
	5590	11.18	13.12	250
	5670	9.22	8.36	250

<b>U-NII-3: 5725-5850MHz</b>				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5745	11.14	13.00	1000
	5785	10.70	11.75	1000
	5825	10.11	10.26	1000
802.11n-HT20	5745	10.11	10.26	1000
	5785	10.42	11.02	1000
	5825	10.49	11.19	1000
802.11n-HT40	5755	10.96	12.47	1000
	5795	10.49	11.19	1000

➤ 5150-5250MHz

Mode:		802.11a
5180MHz		<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.21 dBm / 20.0000 MHz -60.80 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5200MHz		<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.56 dBm / 20.0000 MHz -61.45 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5240MHz		<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.12 dBm / 20.0000 MHz -61.89 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

Mode:		802.11n-HT20
5180MHz		<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.44 dBm / 20.0000 MHz -61.57 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5200MHz		<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.02 dBm / 20.0000 MHz -61.99 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5240MHz		<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.24 dBm / 20.0000 MHz -61.96 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>



Mode:		802.11n-HT40
<p>5190 MHz</p>		
<p>5230 MHz</p>		




➤ 5250-5350MHz

Mode:		802.11a
5260MHz		<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5280MHz		<p>Freq/Channel</p> <p>Center Freq 5.28000000 GHz</p> <p>Start Freq 5.26000000 GHz</p> <p>Stop Freq 5.30000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5320MHz		<p>Freq/Channel</p> <p>Center Freq 5.32000000 GHz</p> <p>Start Freq 5.30000000 GHz</p> <p>Stop Freq 5.34000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

Mode:		802.11n-HT20
5260MHz	<p>Agilent R T</p> <p>Ch Freq 5.26 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.26 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.33 dBm / 20.0000 MHz -62.68 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.26000000 GHz</p> <p>Start Freq 5.24000000 GHz</p> <p>Stop Freq 5.28000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	
5280MHz	<p>Agilent R T</p> <p>Ch Freq 5.28 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.28000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.28 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.94 dBm / 20.0000 MHz -62.07 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.28000000 GHz</p> <p>Start Freq 5.26000000 GHz</p> <p>Stop Freq 5.30000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	
5320MHz	<p>Agilent R T</p> <p>Ch Freq 5.32 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.32 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.89 dBm / 20.0000 MHz -61.12 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.32000000 GHz</p> <p>Start Freq 5.30000000 GHz</p> <p>Stop Freq 5.34000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	

Mode:		802.11n-HT40
5270MHz		<p>Agilent R T</p> <p>Ch Freq 5.27 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 5.27000000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.27 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p><b>11.11 dBm / 40.0000 MHz -64.91 dBm/Hz</b></p> <p>Freq/Channel</p> <p>Center Freq 5.2700000 GHz</p> <p>Start Freq 5.2300000 GHz</p> <p>Stop Freq 5.3100000 GHz</p> <p>CF Step 8.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
5310MHz		<p>Agilent R T</p> <p>Ch Freq 5.31 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 5.31000000 GHz</b></p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.31 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p><b>11.08 dBm / 40.0000 MHz -64.95 dBm/Hz</b></p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

➤ 5470-5725MHz

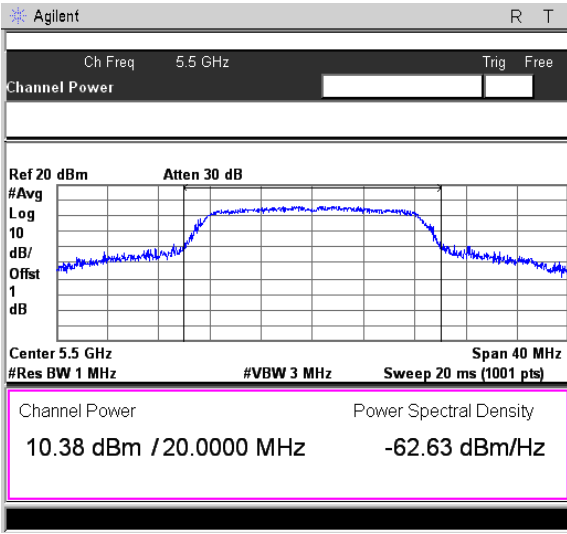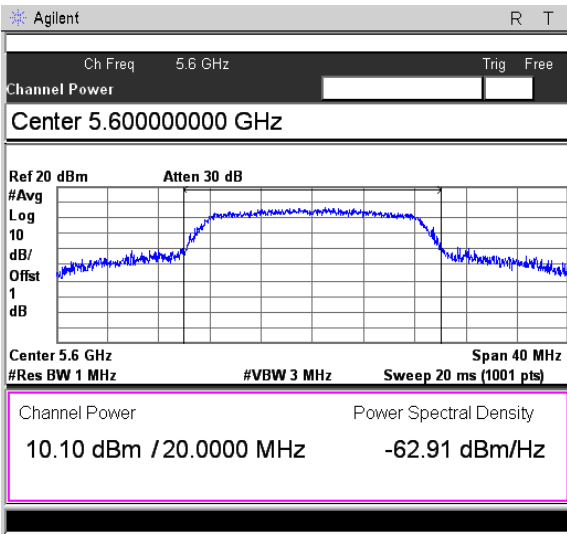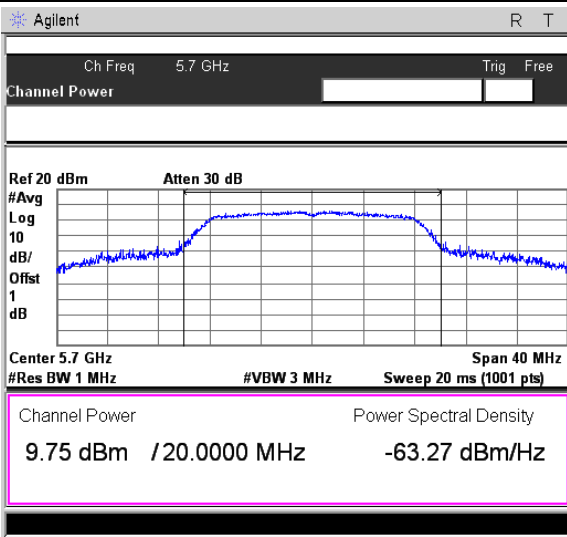Mode:		802.11a
5500MHz		<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5600MHz		<p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
5700MHz		<p>Freq/Channel</p> <p>Center Freq 5.7000000 GHz</p> <p>Start Freq 5.6800000 GHz</p> <p>Stop Freq 5.7200000 GHz</p> <p>CF Step 4.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

Mode:		802.11n-HT20
5500MHz		
5600MHz		
5700MHz		

Mode:		802.11n-HT40
5510MHz	<p>Agilent R T Trace/View</p> <p>Ch Freq 5.51 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.51 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.45 dBm / 40.0000 MHz -65.57 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	
5590MHz	<p>Agilent R T Trace/View</p> <p>Ch Freq 5.59 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.59 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.18 dBm / 40.0000 MHz -64.84 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	
5670MHz	<p>Agilent R T Trace/View</p> <p>Ch Freq 5.67 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.67 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>9.22 dBm / 40.0000 MHz -66.80 dBm/Hz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	

➤ 5725-5850MHz

Mode:		802.11a
5745MHz		
5785MHz		
5825MHz		



Mode:		802.11n-HT20
5745MHz		
5785MHz		
5825MHz		

Mode:		802.11n-HT40
<p>5755 MHz</p>		<p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.96 dBm / 40.0000 MHz -65.51 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>5795 MHz</p>		<p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.49 dBm / 40.0000 MHz -65.53 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

## 10. Radiated Spurious Emissions

---

### 10.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.  
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E*d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.


### 10.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

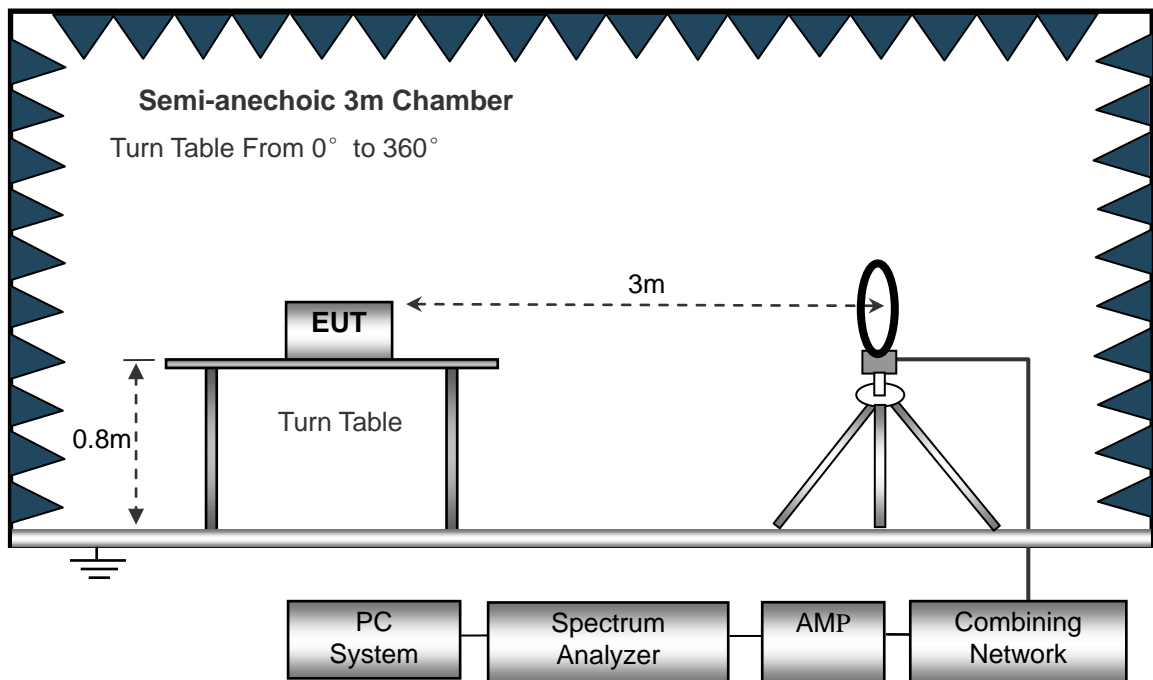

The test setup for emission measurement from 30 MHz to 1 GHz..

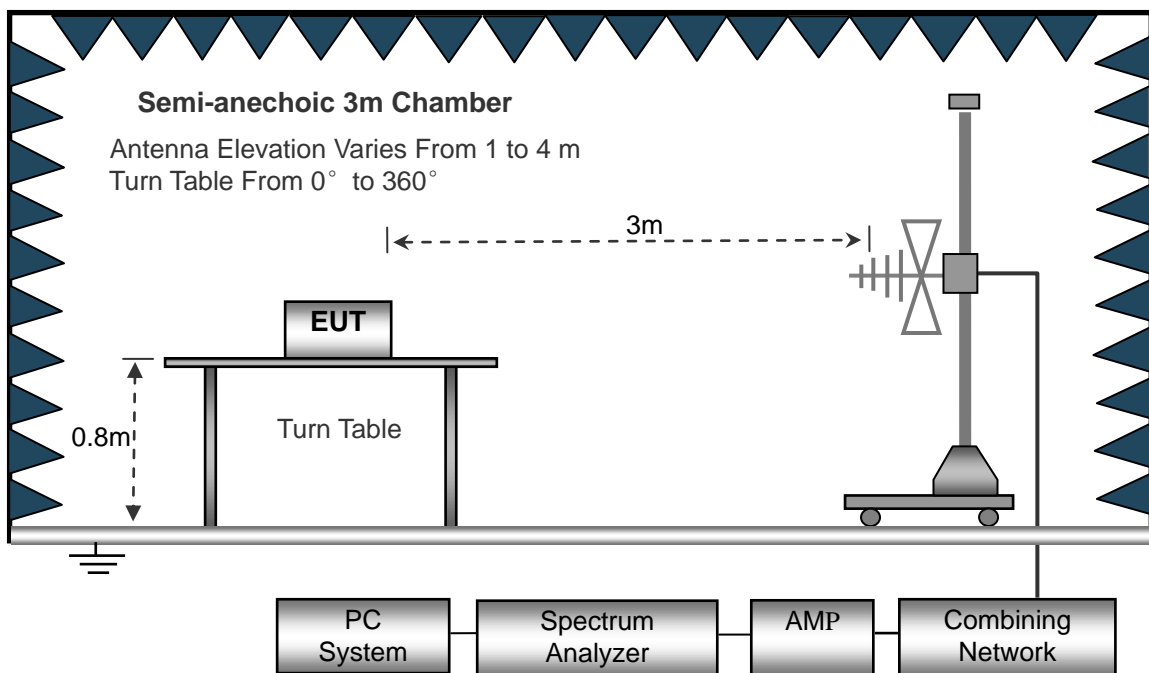

The test setup for emission measurement above 1 GHz..

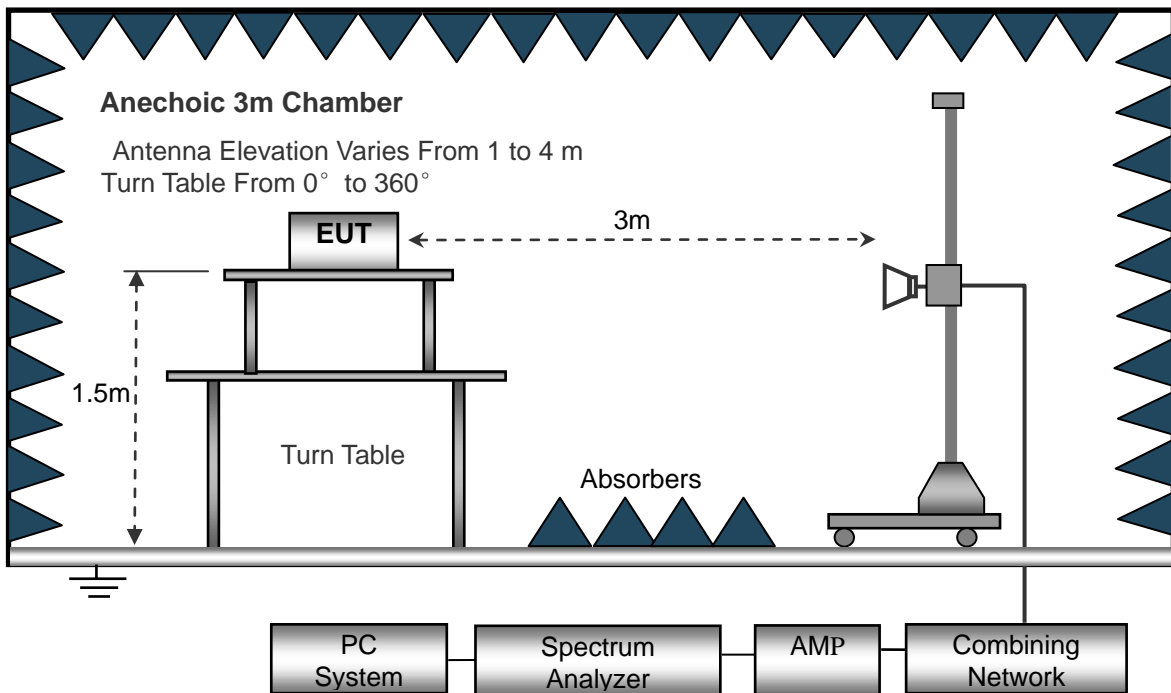

### 10.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

### 10.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 10.5 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


- Spurious Emission From 30 MHz to 1 GHz
- 5150-5250MHz

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

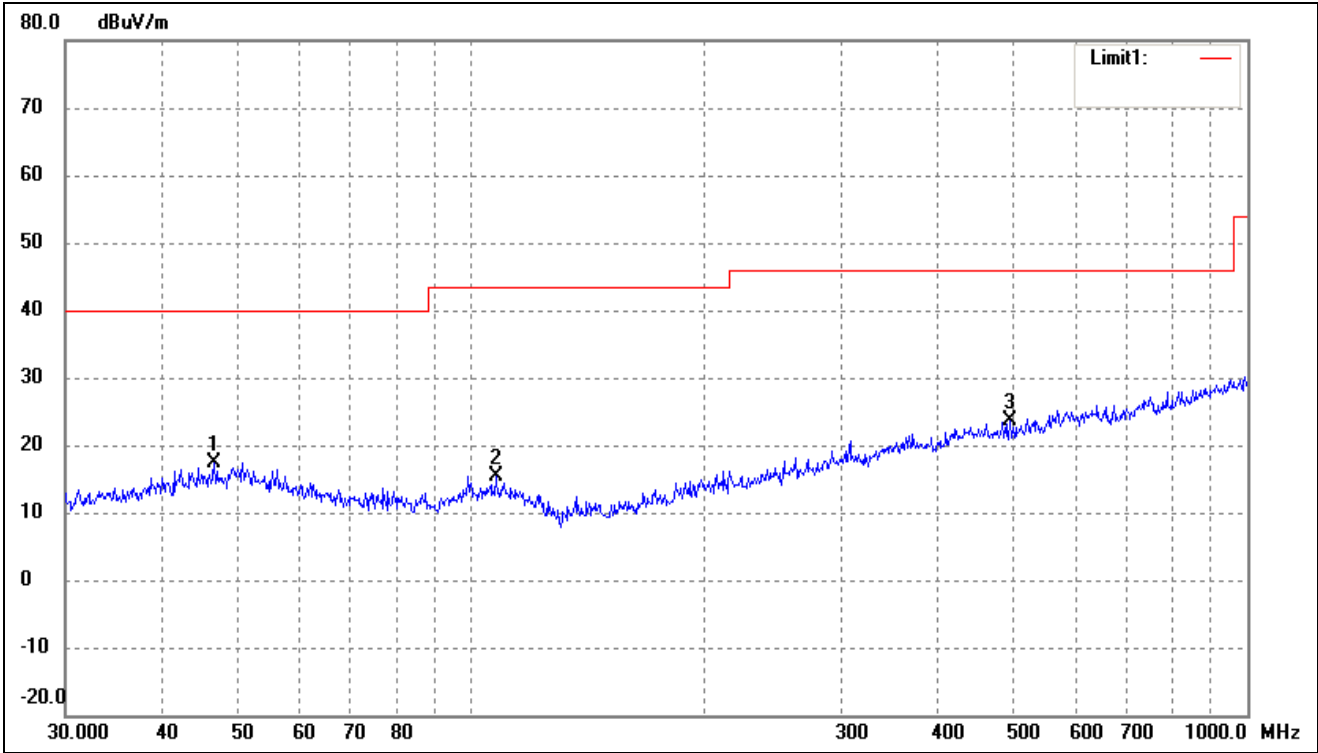


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.6664	27.80	-10.44	17.36	40.00	-22.64	-	-	peak
2	107.5101	27.59	-12.20	15.39	43.50	-28.11	-	-	peak
3	494.1984	28.09	-4.55	23.54	46.00	-22.46	-	-	peak

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

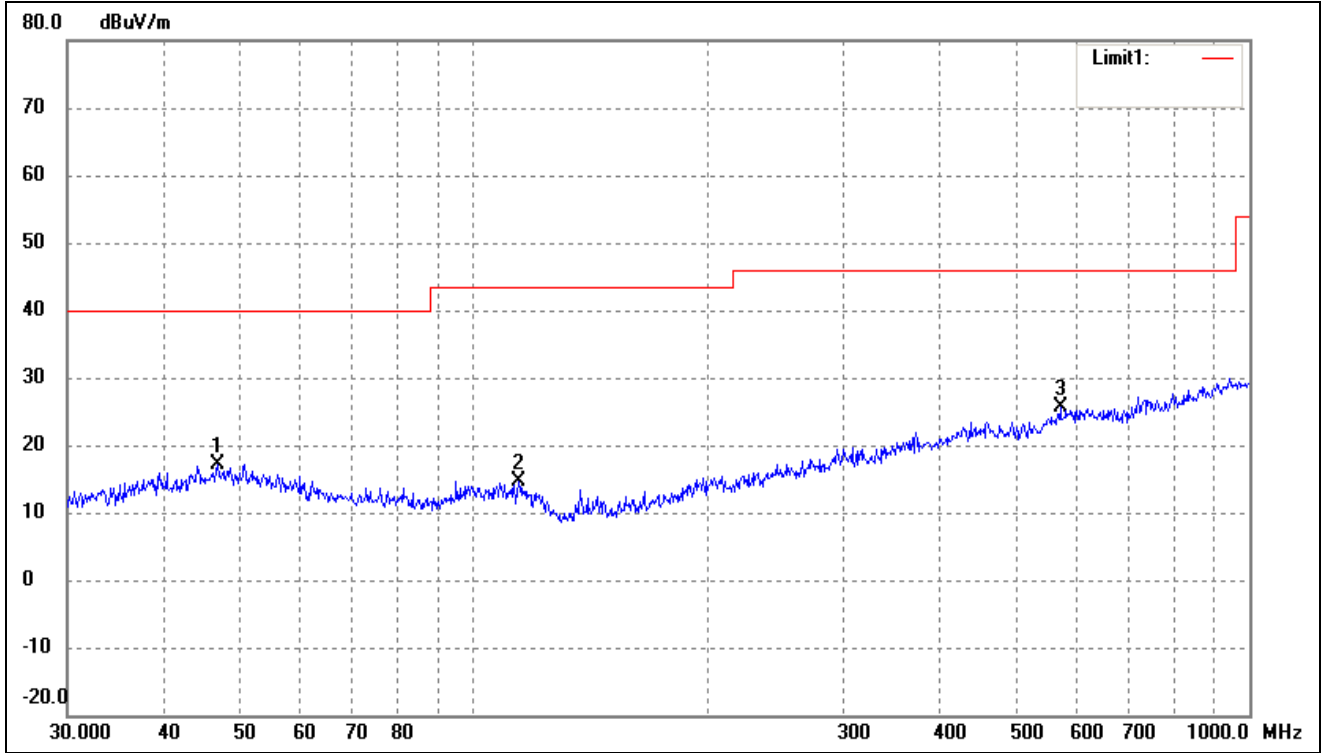

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.8303	27.65	-10.43	17.22	40.00	-22.78	-	-	peak
2	114.5146	27.25	-12.64	14.61	43.50	-28.89	-	-	peak
3	570.6100	28.42	-2.76	25.66	46.00	-20.34	-	-	peak


802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

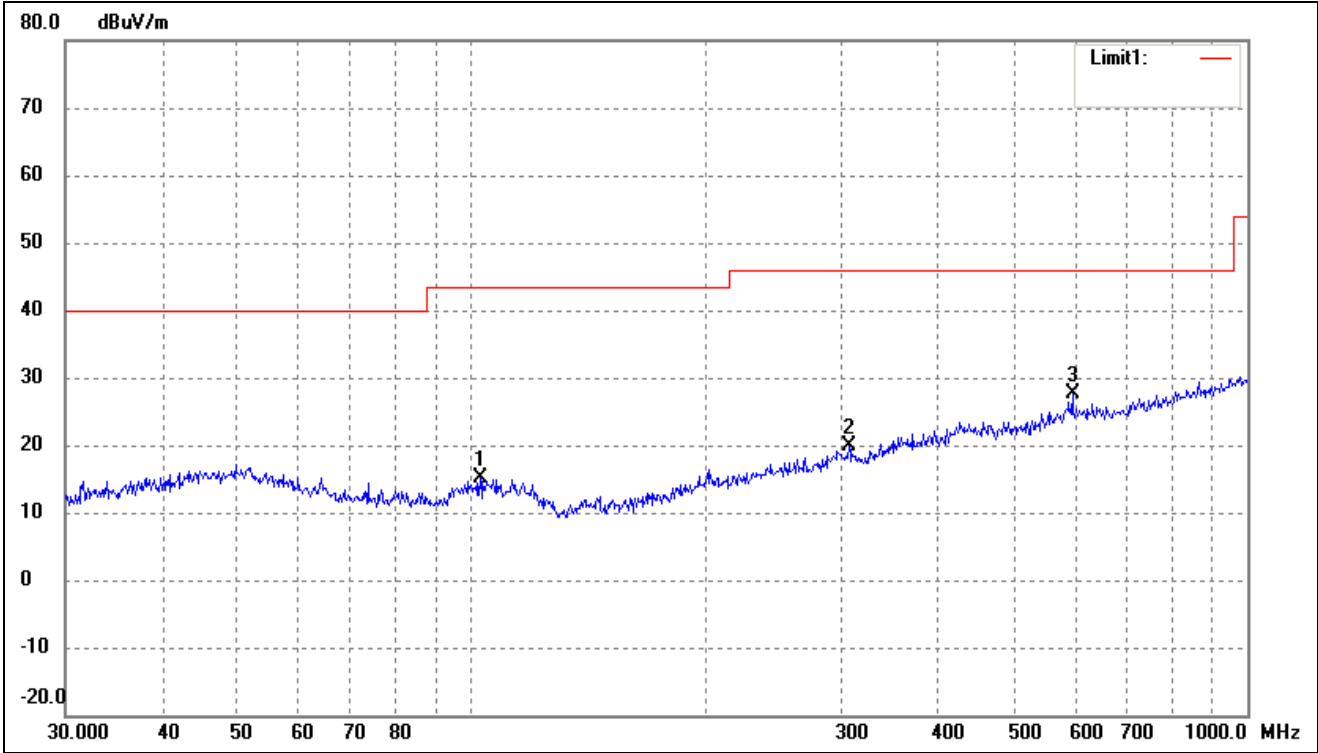

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	102.7192	27.44	-12.32	15.12	43.50	-28.38	-	-	peak
2	306.7537	27.06	-7.28	19.78	46.00	-26.22	-	-	peak
3	595.1329	29.98	-2.33	27.65	46.00	-18.35	-	-	peak




802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

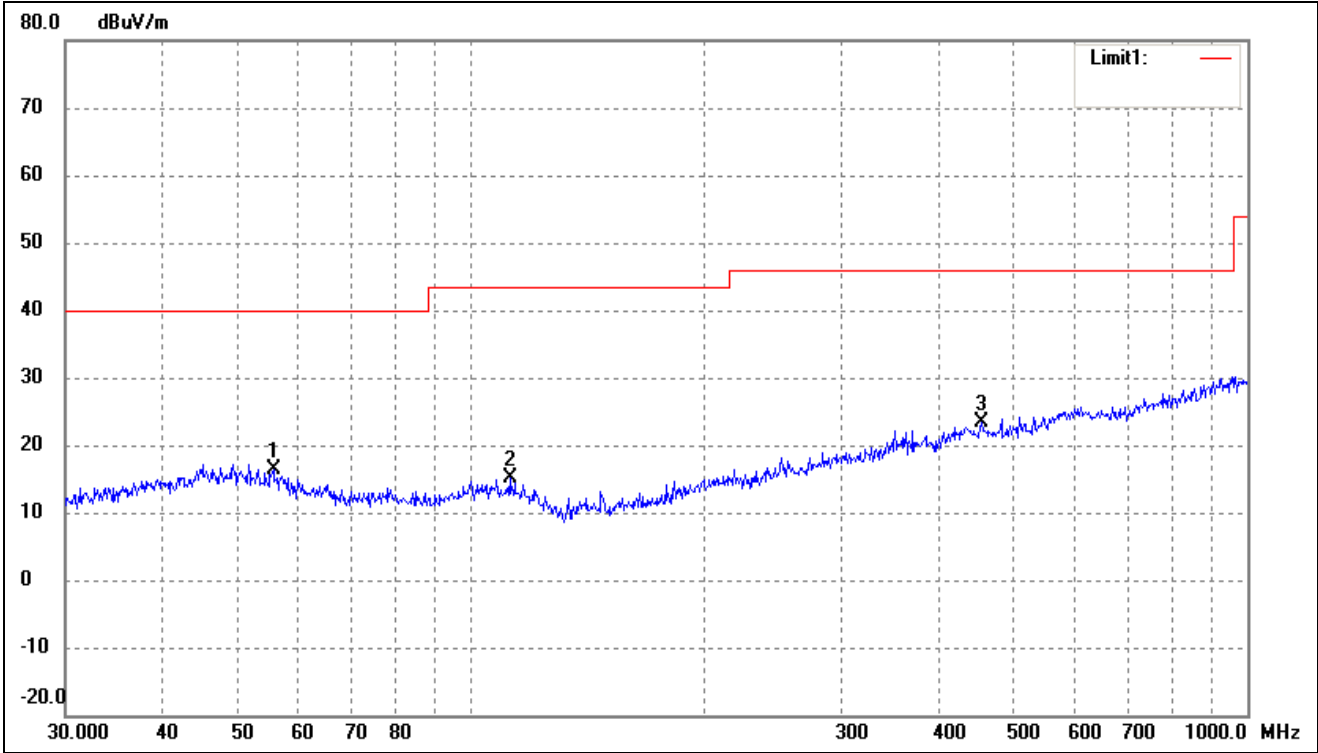


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	55.6094	27.72	-11.39	16.33	40.00	-23.67	-	-	peak
2	112.1305	27.58	-12.39	15.19	43.50	-28.31	-	-	peak
3	454.3100	28.01	-4.69	23.32	46.00	-22.68	-	-	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

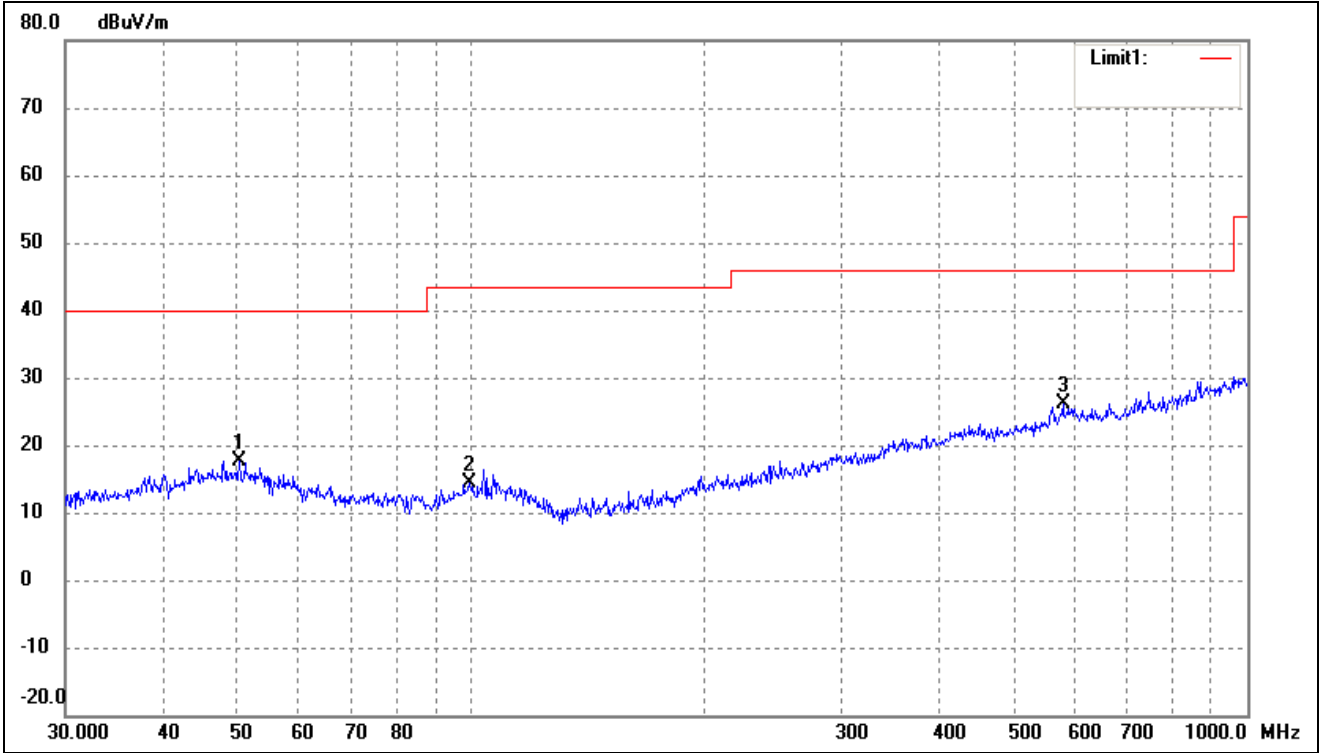

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.2325	27.88	-10.24	17.64	40.00	-22.36	-	-	peak
2	99.5281	26.86	-12.48	14.38	43.50	-29.12	-	-	peak
3	578.6699	28.74	-2.50	26.24	46.00	-19.76	-	-	peak


802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

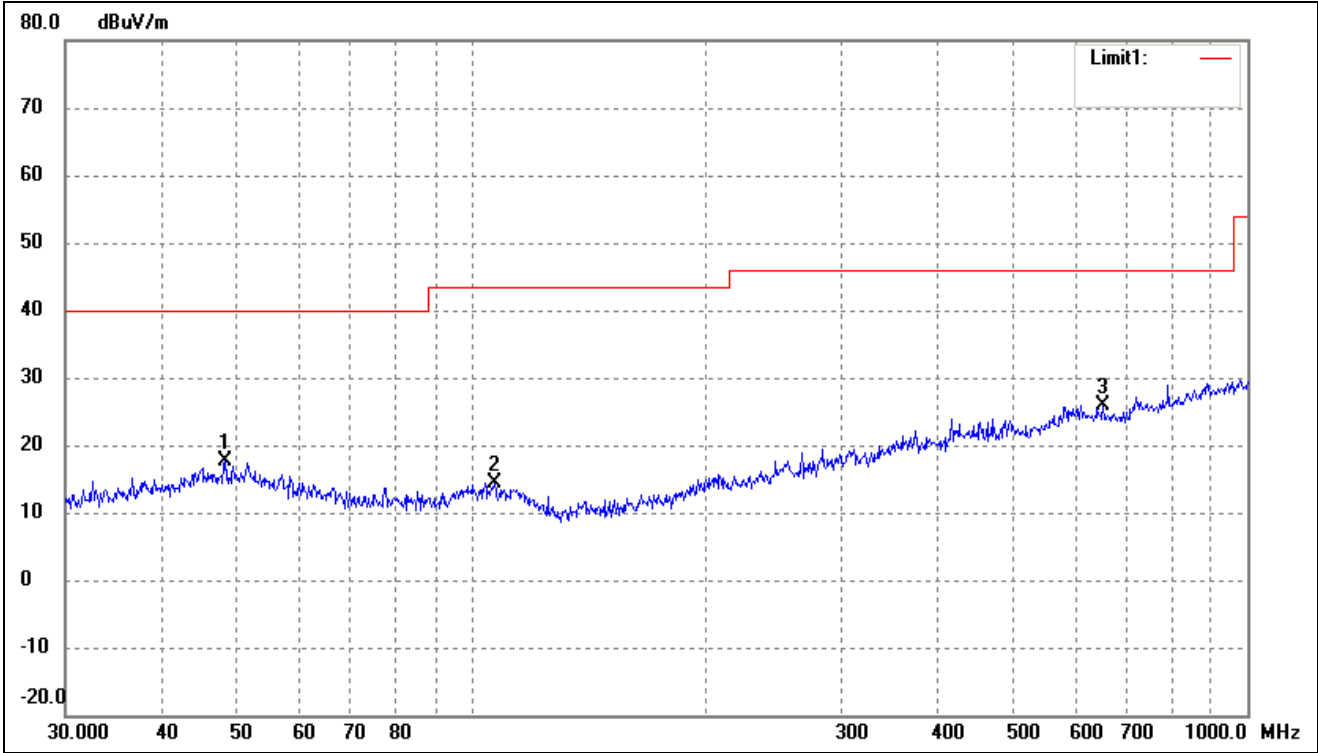

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	48.1626	27.96	-10.33	17.63	40.00	-22.37	-	-	peak
2	107.1337	26.60	-12.23	14.37	43.50	-29.13	-	-	peak
3	651.9417	28.25	-2.49	25.76	46.00	-20.24	-	-	peak


➤ 5250-5350MHz

802.11a			
Test Channel	5260MHz	Polarity:	Horizontal

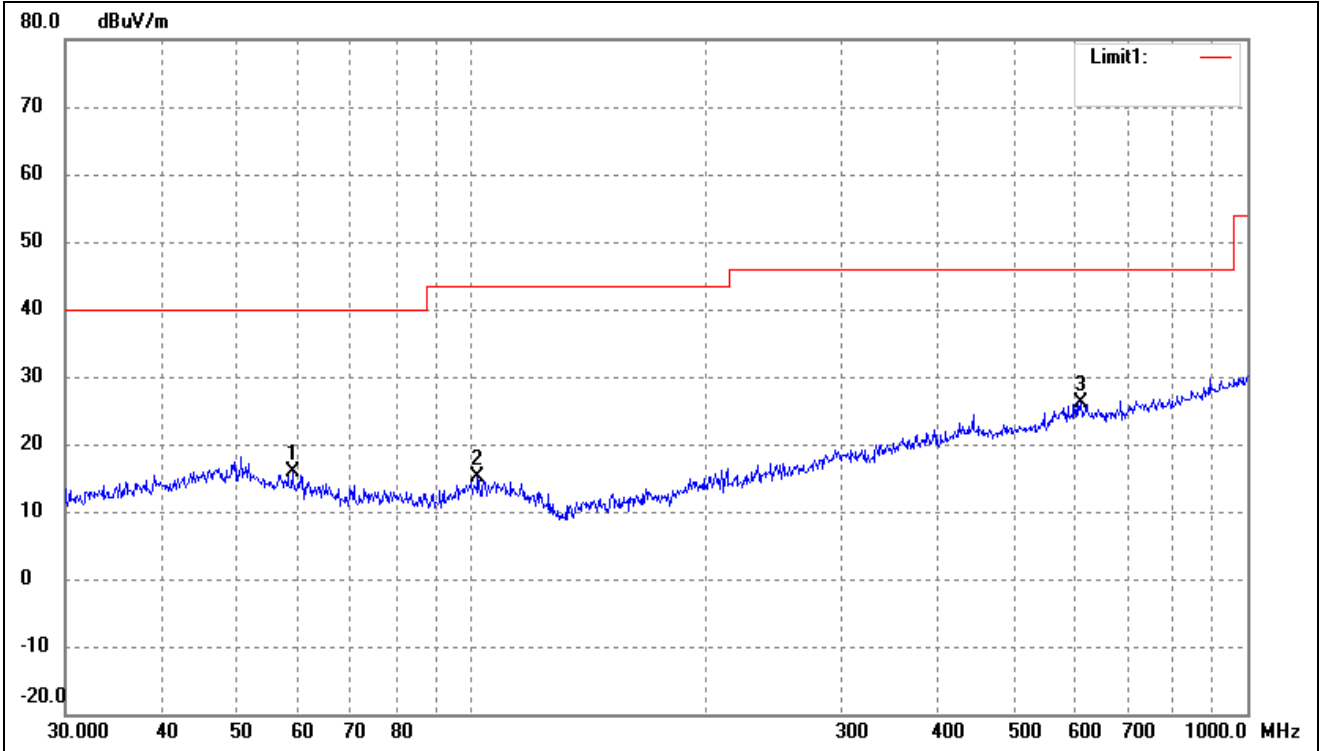


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	58.8185	27.91	-12.10	15.81	40.00	-24.19	-	-	peak
2	102.0014	27.35	-12.33	15.02	43.50	-28.48	-	-	peak
3	609.9217	28.37	-2.33	26.04	46.00	-19.96	-	-	peak

802.11a			
Test Channel	5260MHz(worst case)	Polarity:	Vertical

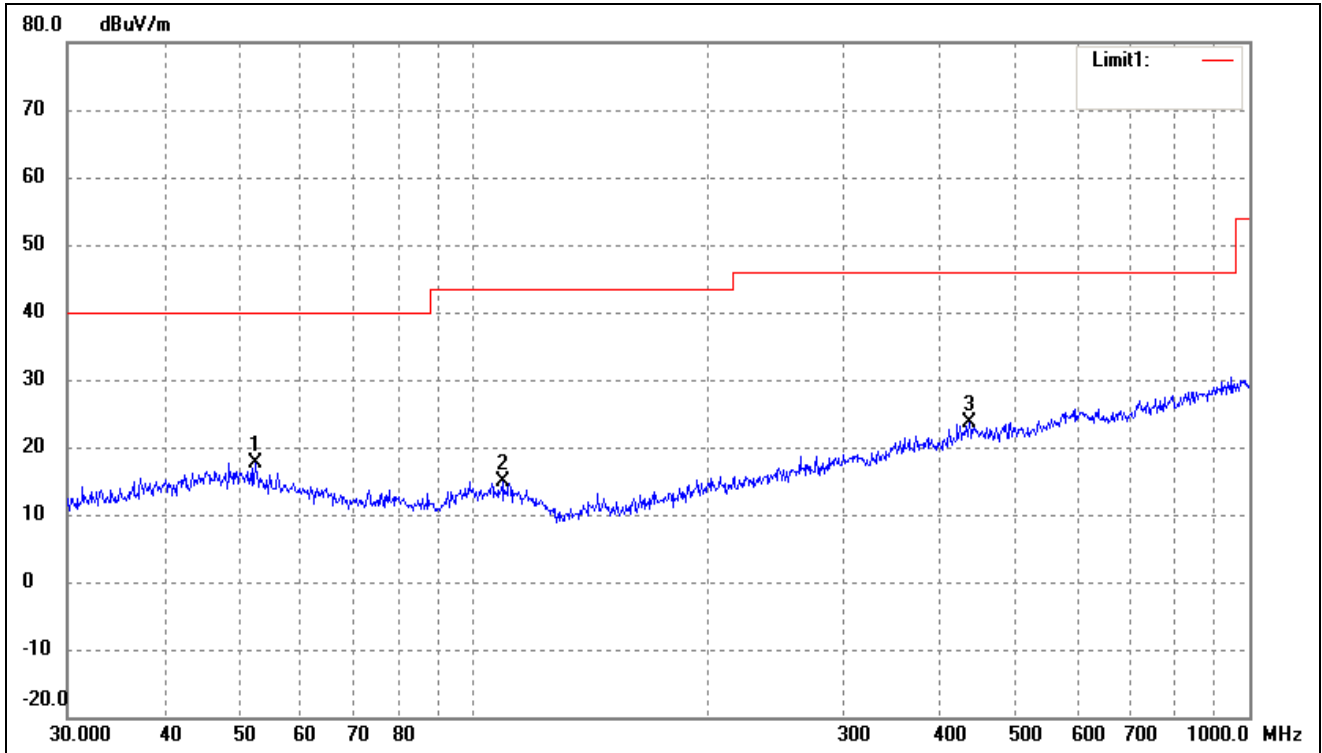


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.3913	28.29	-10.70	17.59	40.00	-22.41	-	-	peak
2	109.0286	27.14	-12.18	14.96	43.50	-28.54	-	-	peak
3	435.5898	27.96	-4.40	23.56	46.00	-22.44	-	-	peak

802.11a			
Test Channel	5260MHz(worst case)	Polarity:	Horizontal

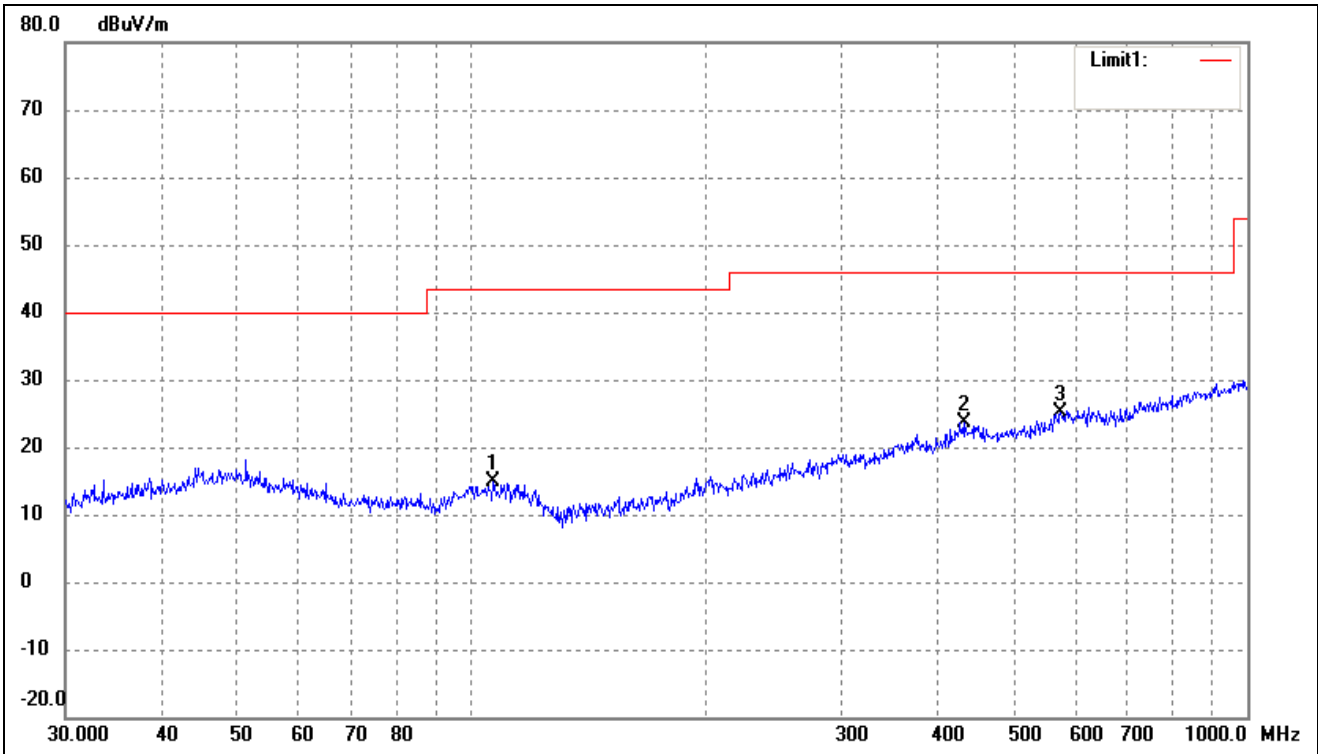


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	106.7587	27.05	-12.23	14.82	43.50	-28.68	-	-	peak
2	431.0316	28.02	-4.39	23.63	46.00	-22.37	-	-	peak
3	574.6258	27.62	-2.57	25.05	46.00	-20.95	-	-	peak

802.11n-HT20			
Test Channel	5260MHz(worst case)	Polarity:	Vertical

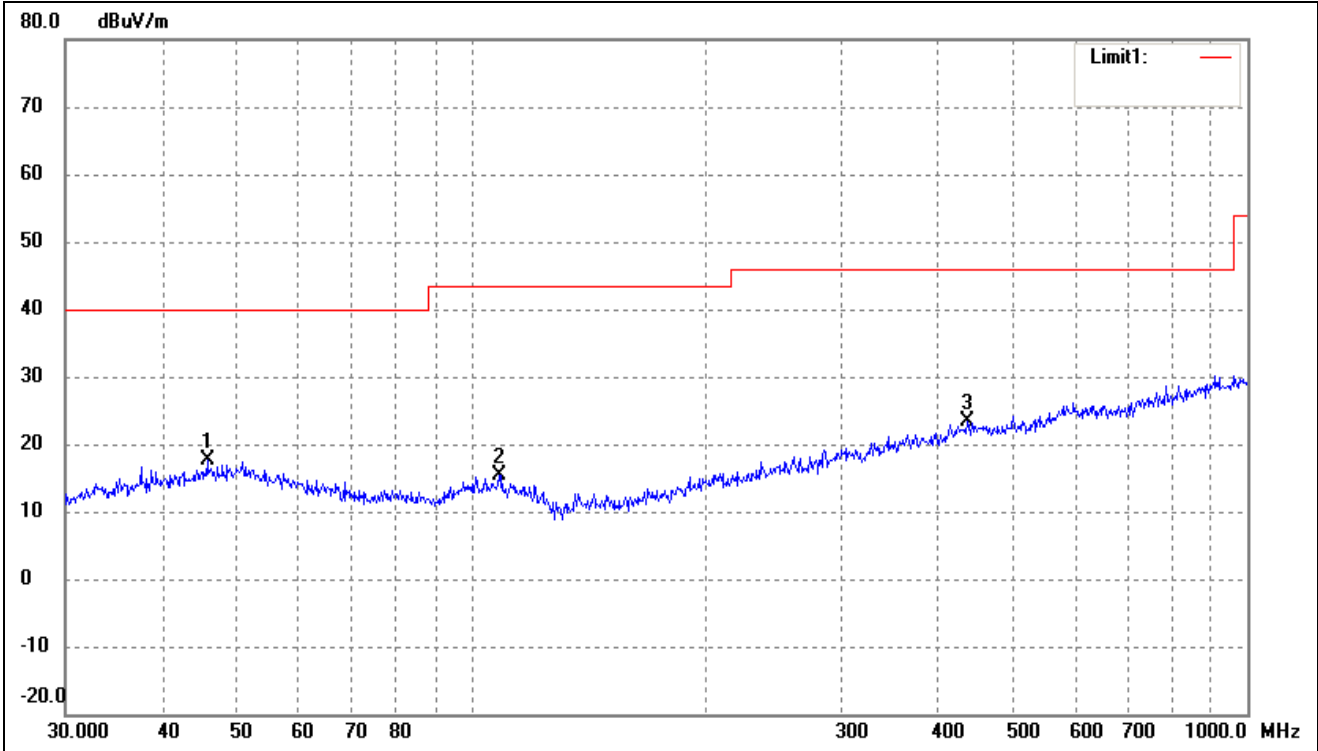

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	45.6948	28.24	-10.51	17.73	40.00	-22.27	-	-	peak
2	108.6470	27.58	-12.18	15.40	43.50	-28.10	-	-	peak
3	435.5898	27.79	-4.40	23.39	46.00	-22.61	-	-	peak


802.11n-HT40			
Test Channel	5270MHz(worst case)	Polarity:	Horizontal

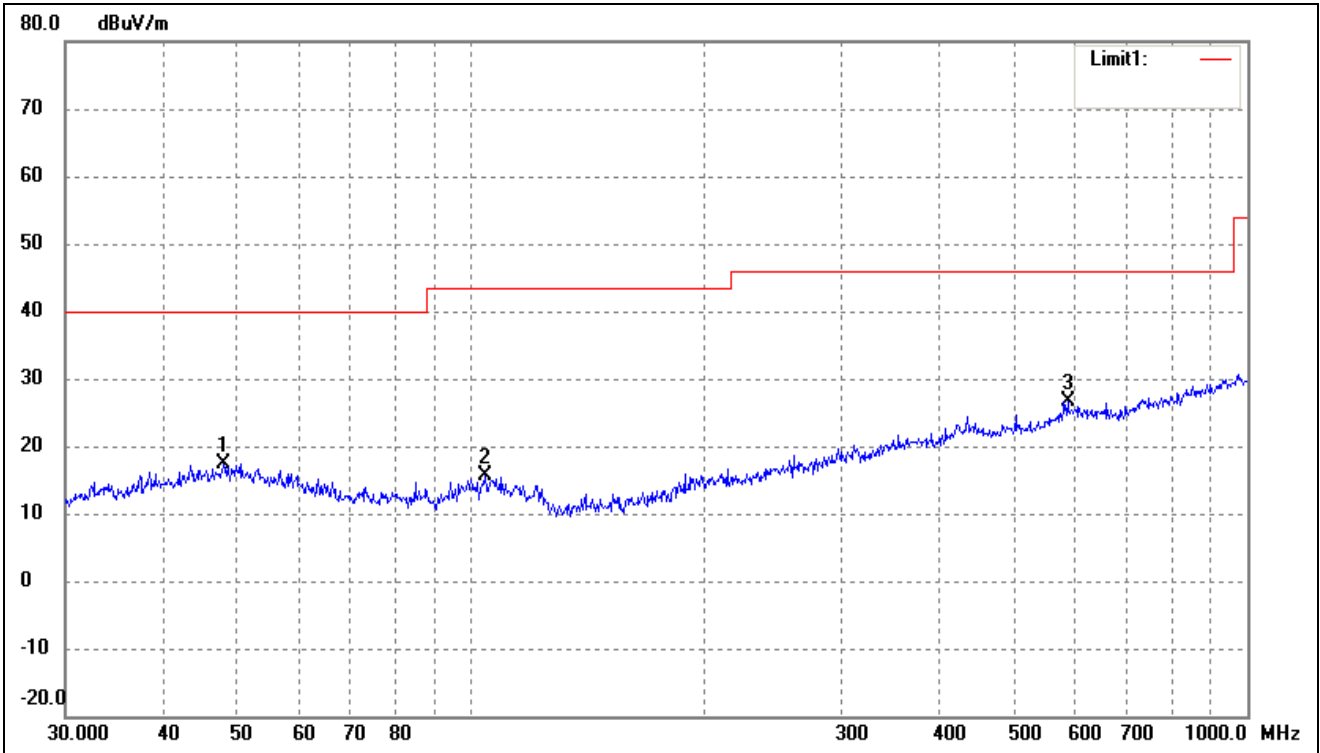

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.9940	27.83	-10.34	17.49	40.00	-22.51	-	-	peak
2	104.1701	27.94	-12.29	15.65	43.50	-27.85	-	-	peak
3	586.8437	29.11	-2.43	26.68	46.00	-19.32	-	-	peak




802.11n-HT40			
Test Channel	5270MHz(worst case)	Polarity:	Vertical

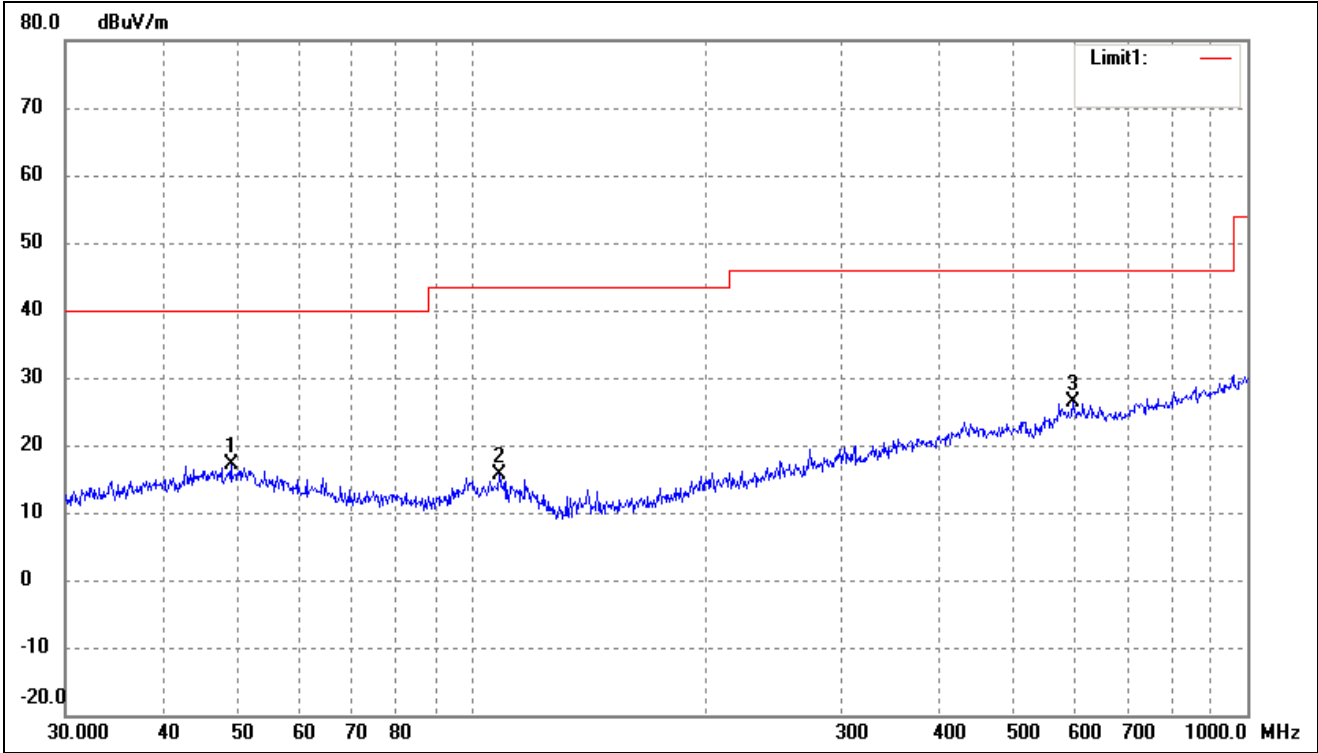

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.0145	27.37	-10.26	17.11	40.00	-22.89	-	-	peak
2	108.6470	27.71	-12.18	15.53	43.50	-27.97	-	-	peak
3	595.1329	28.71	-2.33	26.38	46.00	-19.62	-	-	peak


➤ 5470-5725MHz

802.11a			
Test Channel	5500MHz(worst case)	Polarity:	Horizontal

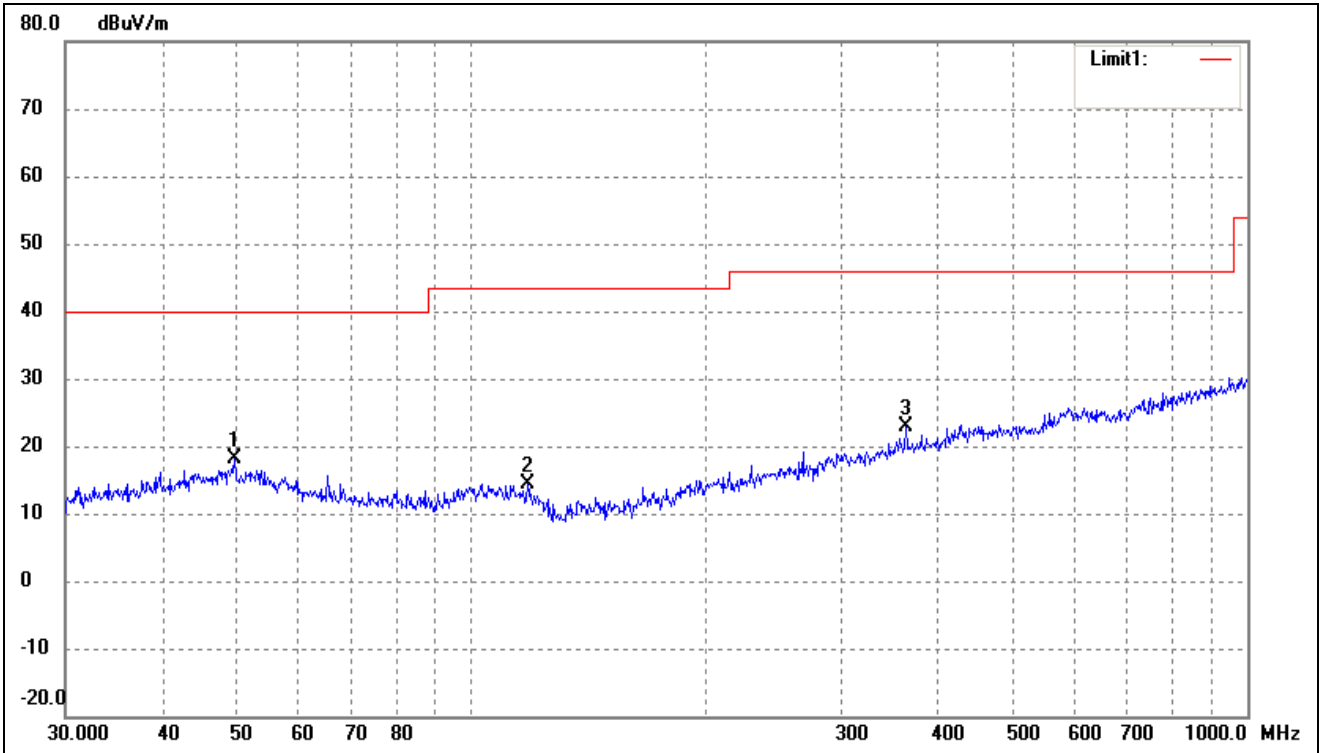


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.5328	28.26	-10.23	18.03	40.00	-21.97	-	-	peak
2	118.1862	27.48	-13.04	14.44	43.50	-29.06	-	-	peak
3	362.9845	28.74	-5.91	22.83	46.00	-23.17	-	-	peak

802.11a			
Test Channel	5500MHz(worst case)	Polarity:	Vertical

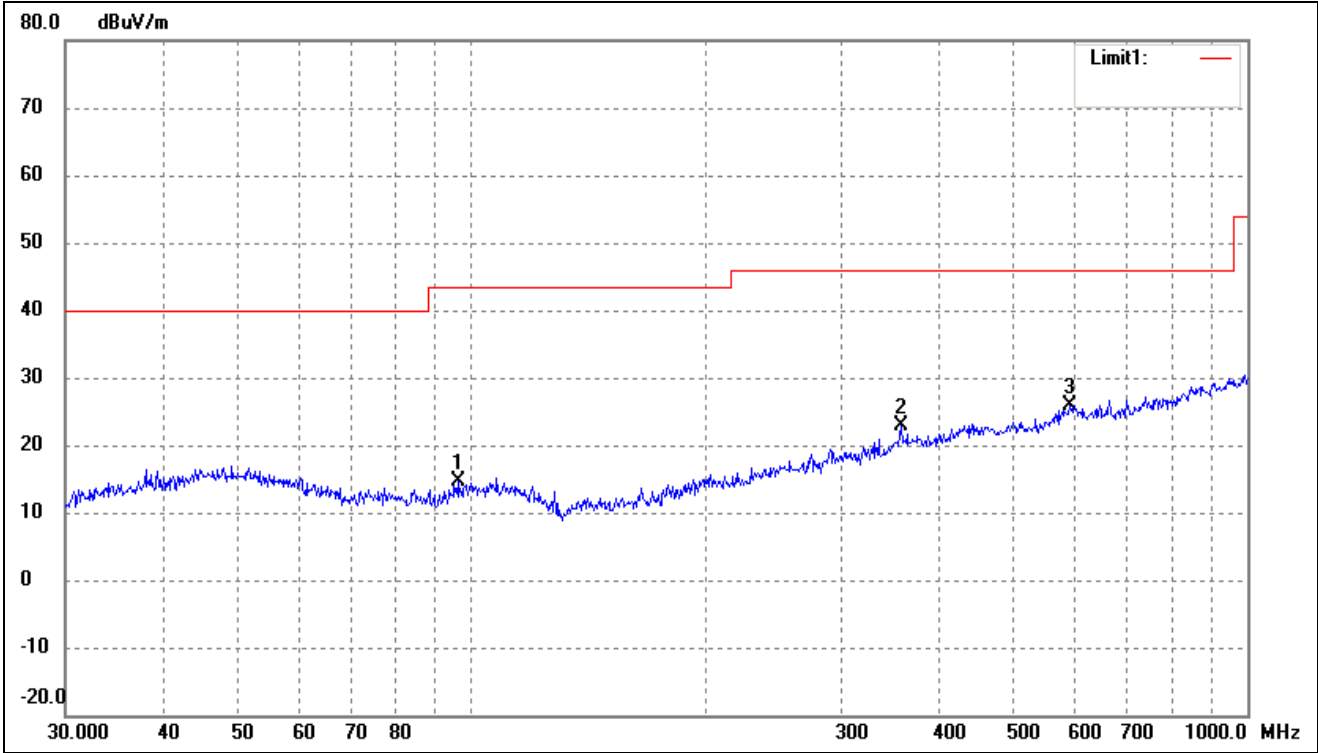


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	96.0986	27.73	-13.17	14.56	43.50	-28.94	-	-	peak
2	357.9287	28.82	-6.00	22.82	46.00	-23.18	-	-	peak
3	590.9737	28.29	-2.38	25.91	46.00	-20.09	-	-	peak

802.11n-HT20			
Test Channel	5500MHz(worst case)	Polarity:	Horizontal

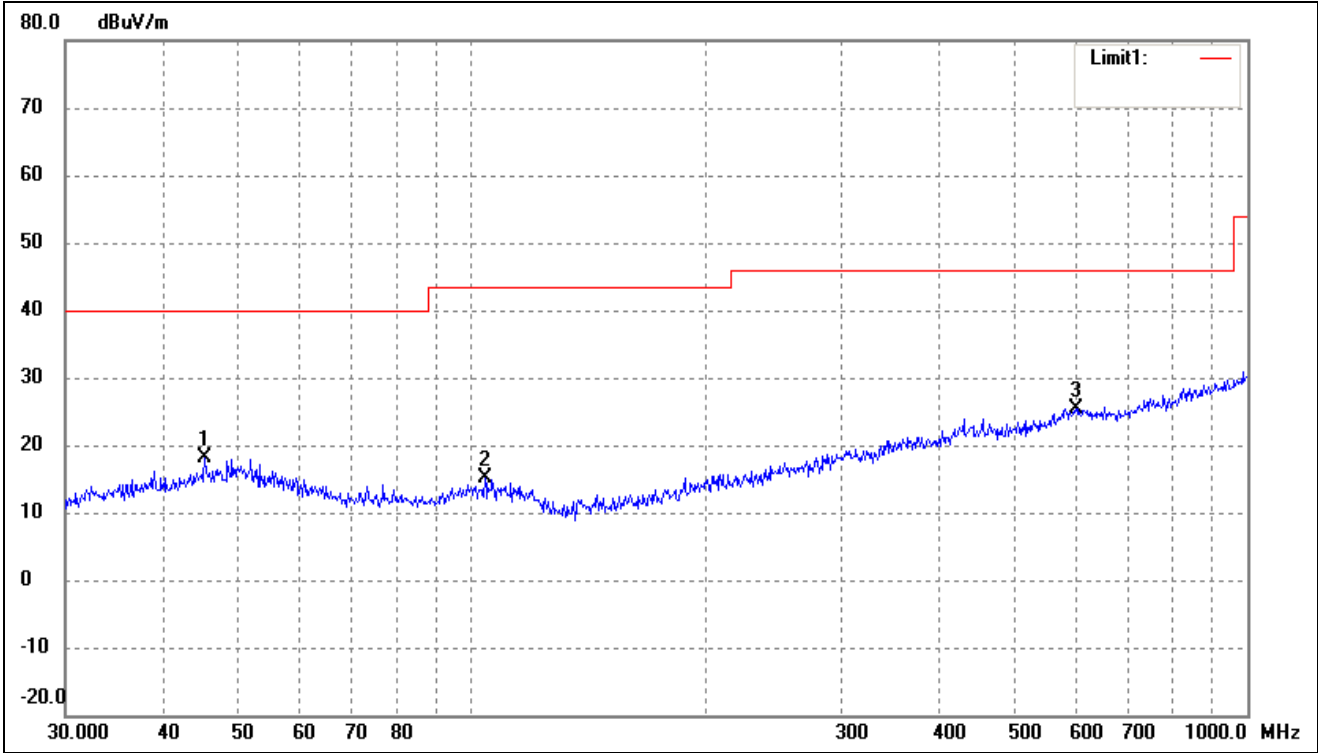


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	45.3755	28.56	-10.54	18.02	40.00	-21.98	-	-	peak
2	104.1701	27.44	-12.29	15.15	43.50	-28.35	-	-	peak
3	601.4265	27.73	-2.29	25.44	46.00	-20.56	-	-	peak

802.11n-HT20			
Test Channel	5500MHz(worst case)	Polarity:	Vertical

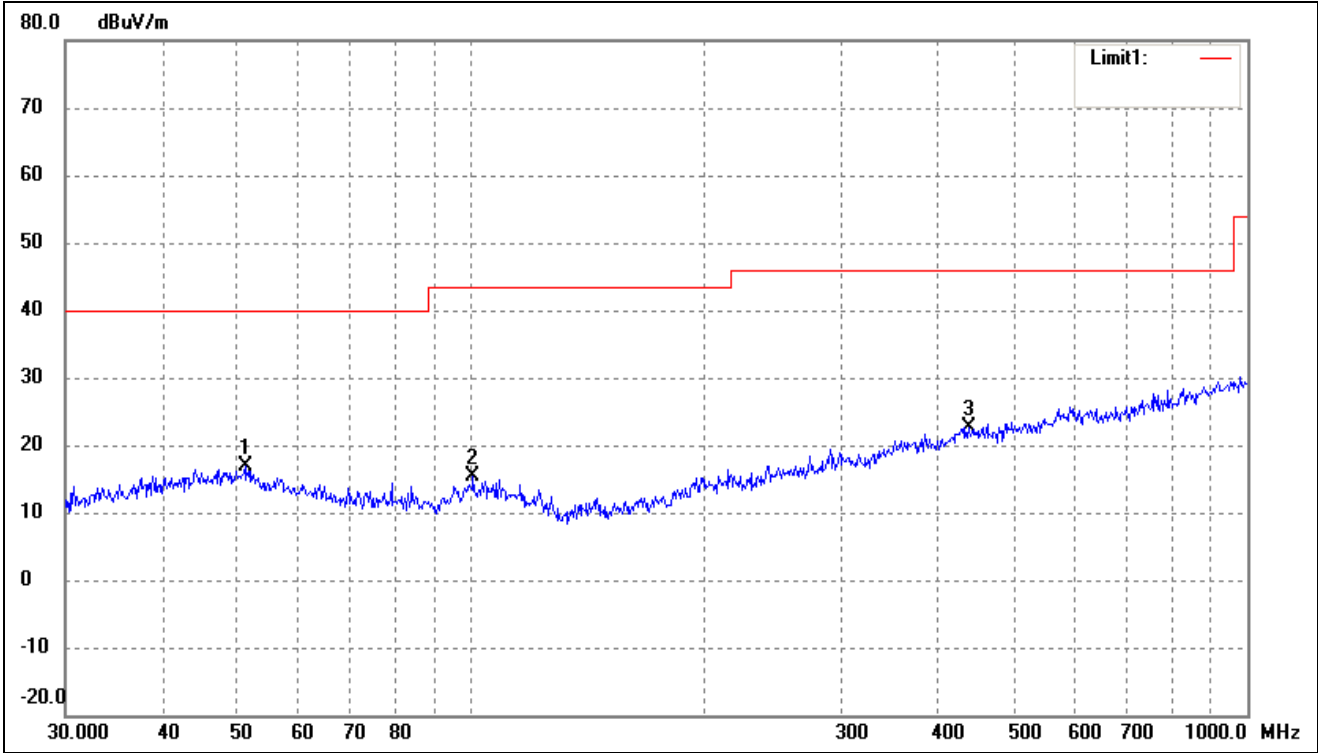


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.1209	27.31	-10.43	16.88	40.00	-23.12	-	-	peak
2	100.5806	27.82	-12.36	15.46	43.50	-28.04	-	-	peak
3	437.1199	27.04	-4.40	22.64	46.00	-23.36	-	-	peak

802.11n-HT40			
Test Channel	5510MHz(worst case)	Polarity:	Horizontal

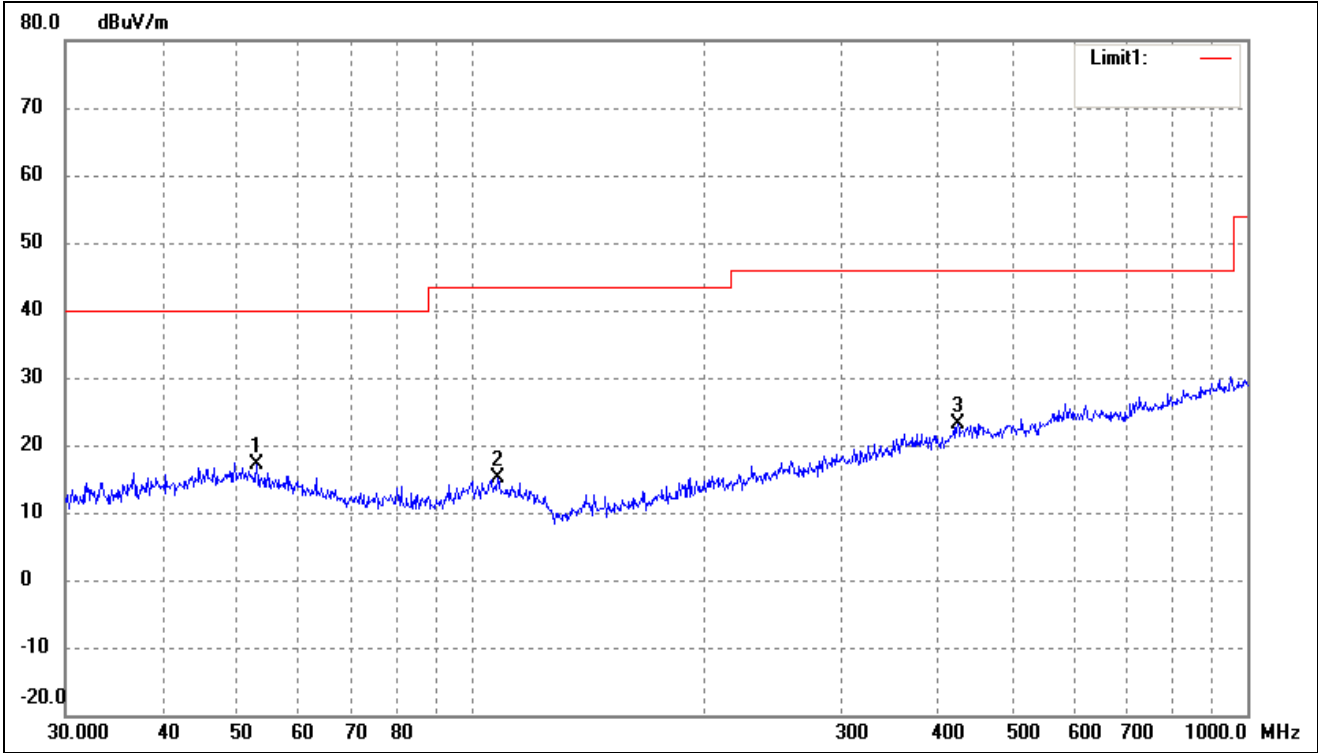

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.9453	27.90	-10.83	17.07	40.00	-22.93	-	-	peak
2	108.2667	27.25	-12.20	15.05	43.50	-28.45	-	-	peak
3	423.5403	27.63	-4.41	23.22	46.00	-22.78	-	-	peak


802.11n-HT40			
Test Channel	5510MHz(worst case)	Polarity:	Vertical

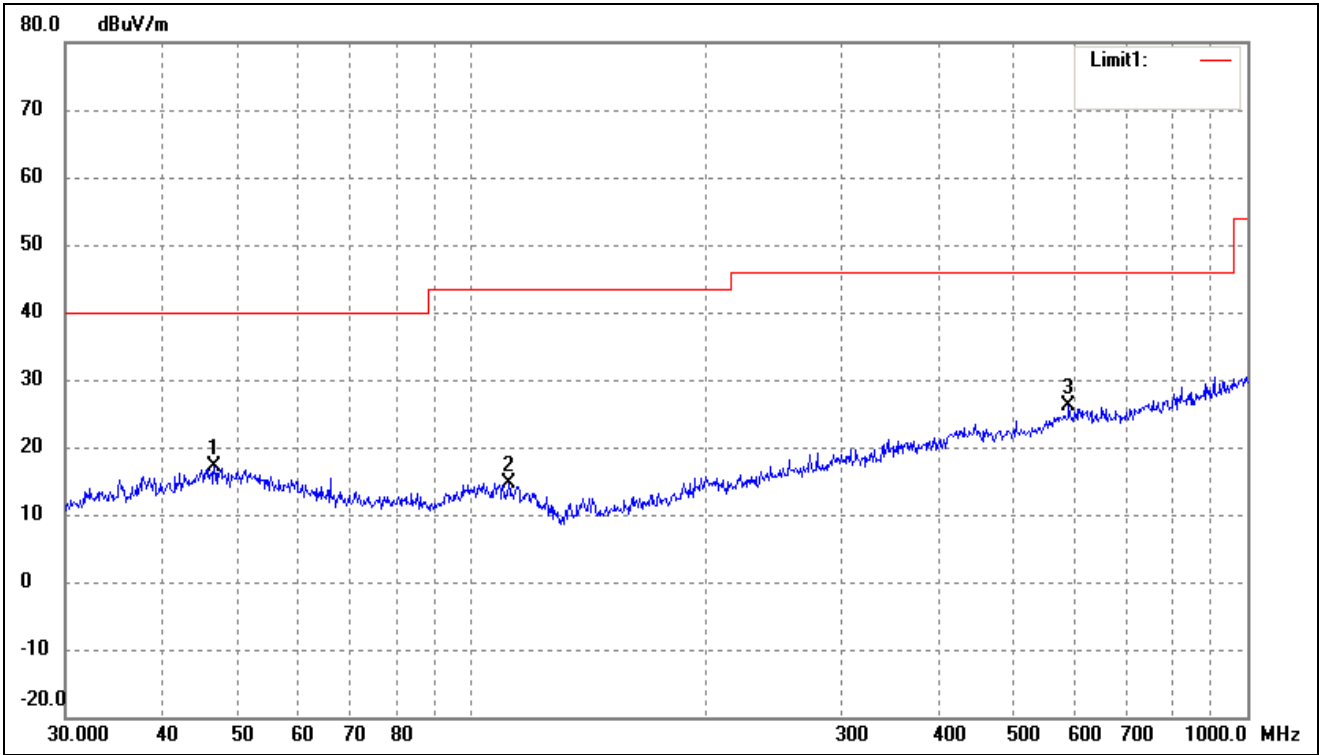

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.6664	27.61	-10.44	17.17	40.00	-22.83	-	-	peak
2	111.7380	27.07	-12.34	14.73	43.50	-28.77	-	-	peak
3	588.9051	28.46	-2.40	26.06	46.00	-19.94	-	-	peak

➤ 5725-5850MHz


802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

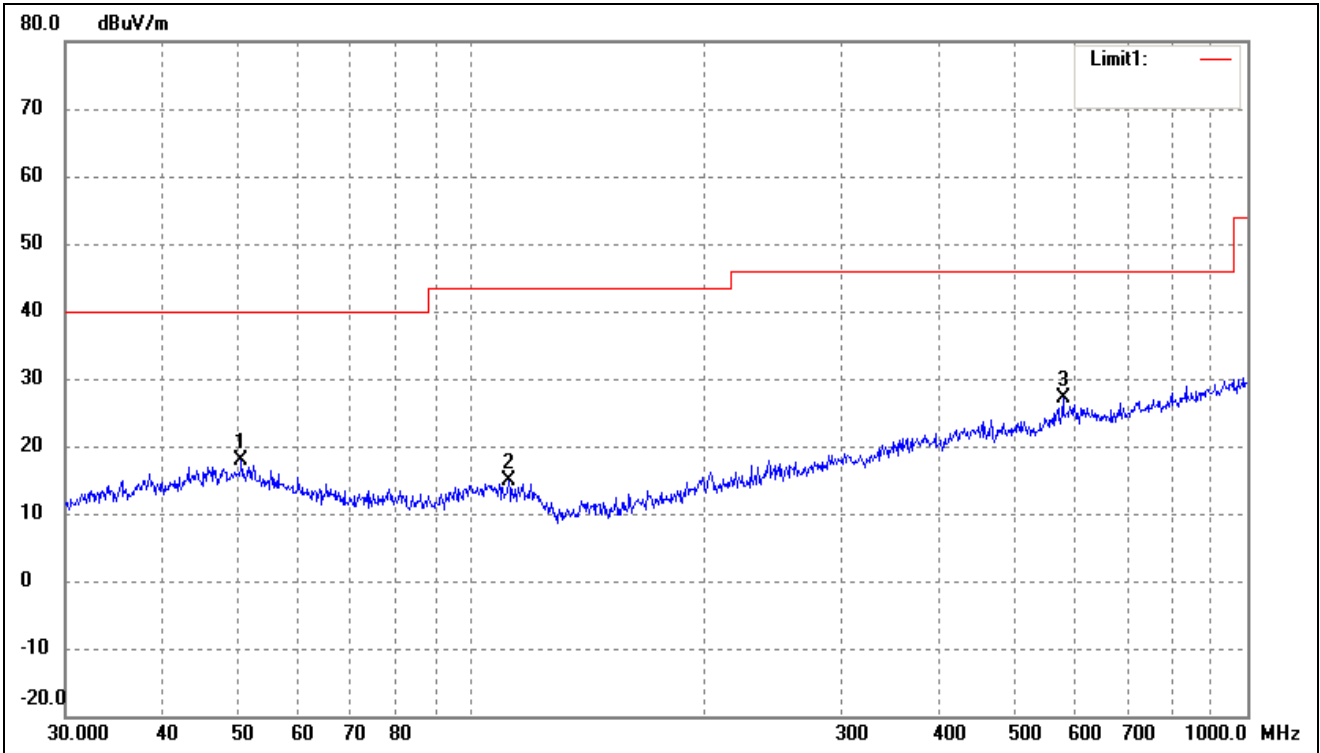

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.5860	28.08	-10.32	17.76	40.00	-22.24	-	-	peak
2	111.7380	27.20	-12.34	14.86	43.50	-28.64	-	-	peak
3	578.6699	29.60	-2.50	27.10	46.00	-18.90	-	-	peak




802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

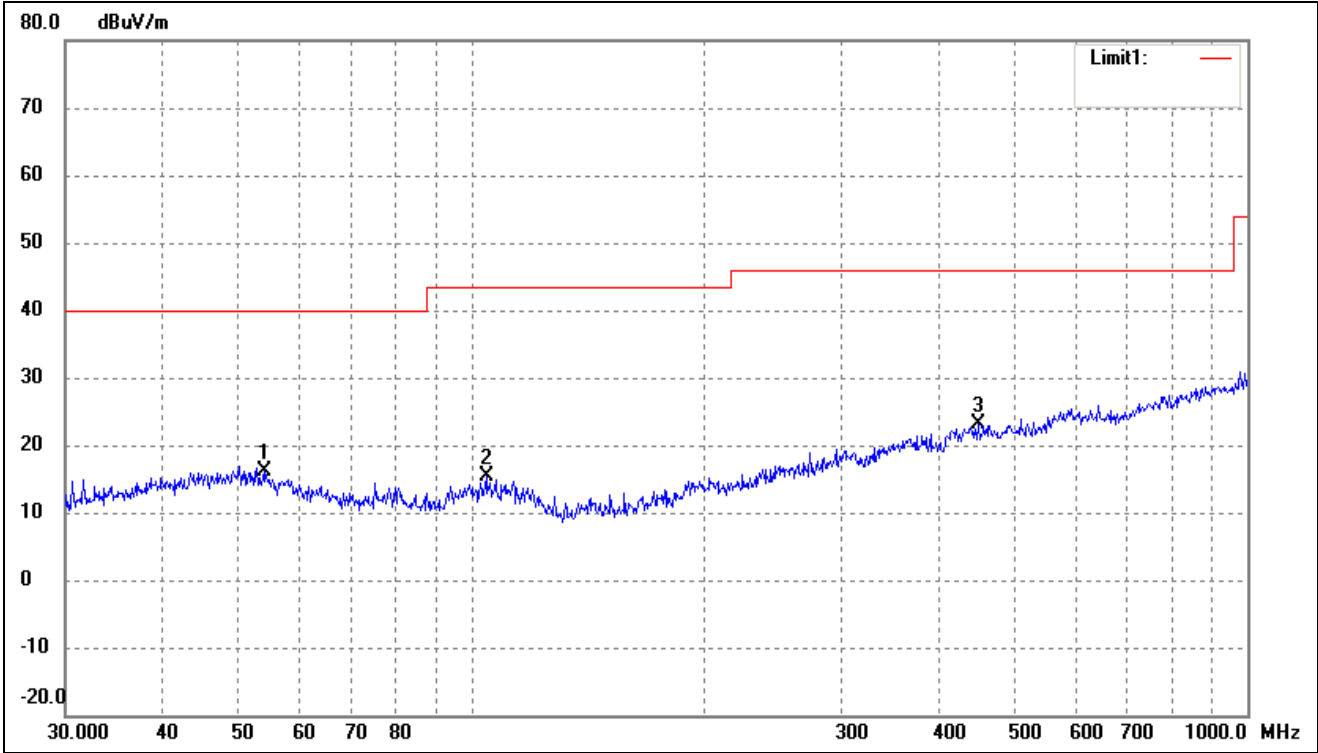


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	54.0711	27.11	-11.07	16.04	40.00	-23.96	-	-	peak
2	104.5361	27.63	-12.27	15.36	43.50	-28.14	-	-	peak
3	449.5558	27.59	-4.58	23.01	46.00	-22.99	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

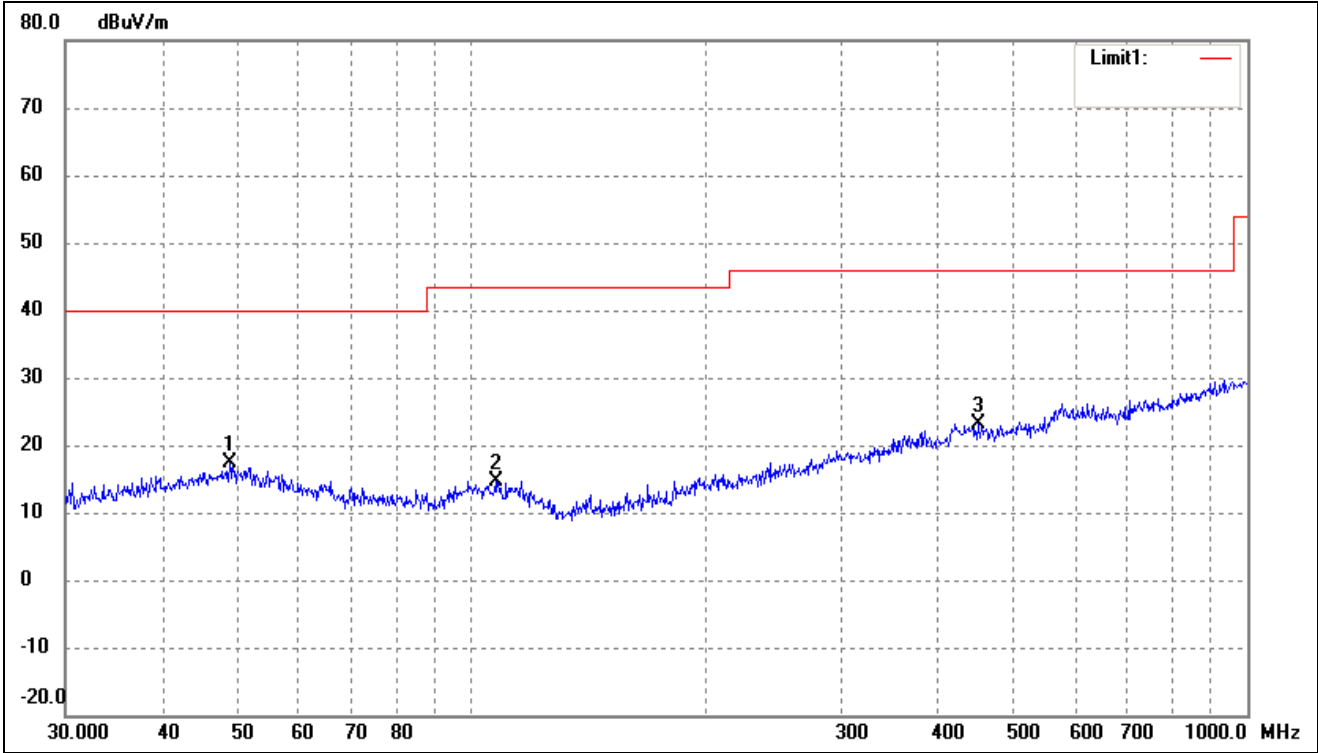


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	48.8429	27.60	-10.28	17.32	40.00	-22.68	-	-	peak
2	107.5101	26.80	-12.20	14.60	43.50	-28.90	-	-	peak
3	449.5558	27.81	-4.58	23.23	46.00	-22.77	-	-	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

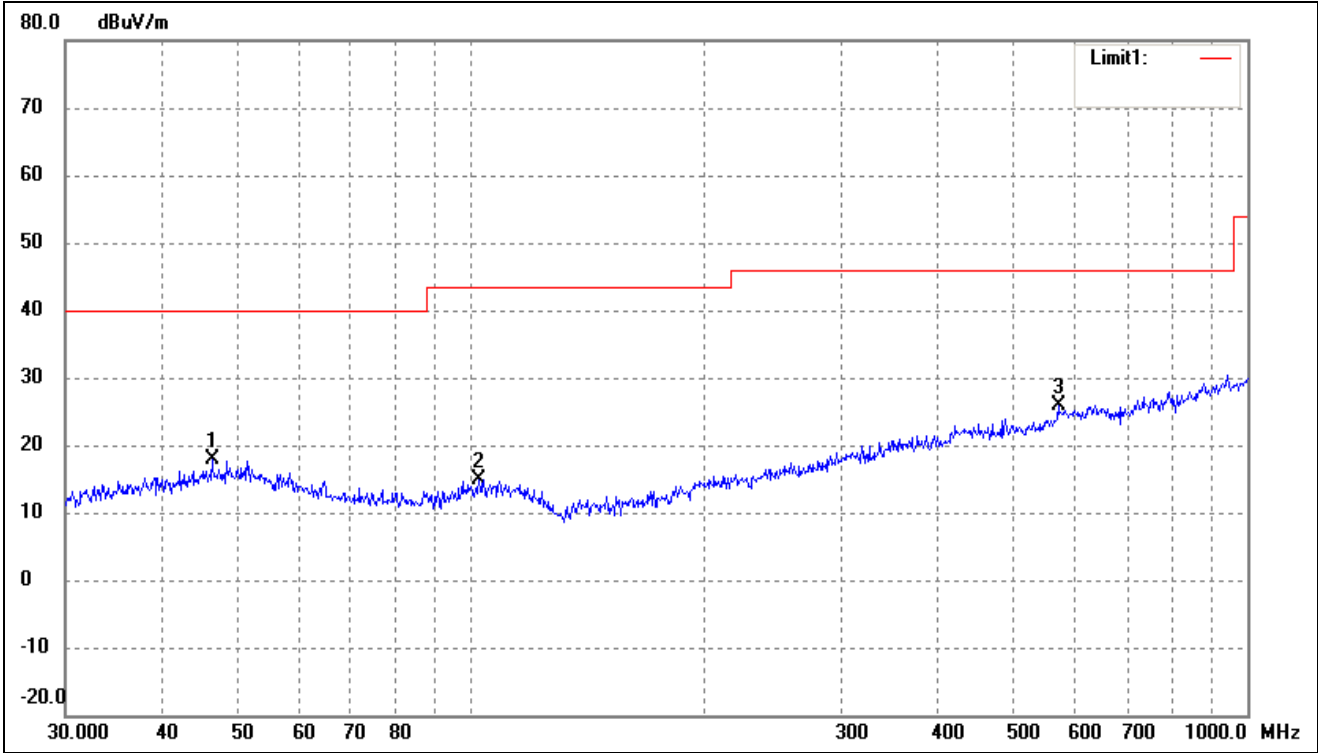


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.3402	28.22	-10.46	17.76	40.00	-22.24	-	-	peak
2	102.3597	27.29	-12.33	14.96	43.50	-28.54	-	-	peak
3	570.6100	28.53	-2.76	25.77	46.00	-20.23	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

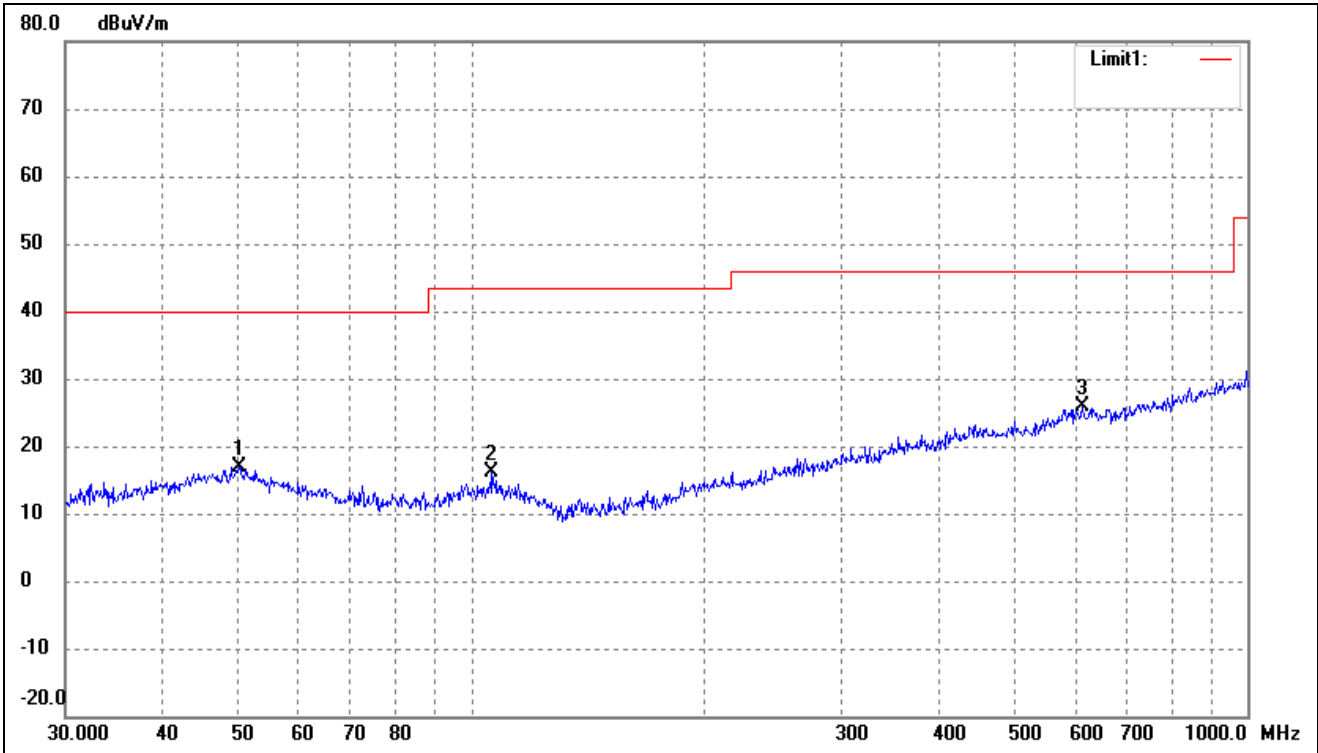

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.2325	27.24	-10.24	17.00	40.00	-23.00	-	-	peak
2	106.3850	28.25	-12.24	16.01	43.50	-27.49	-	-	peak
3	612.0642	28.29	-2.33	25.96	46.00	-20.04	-	-	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

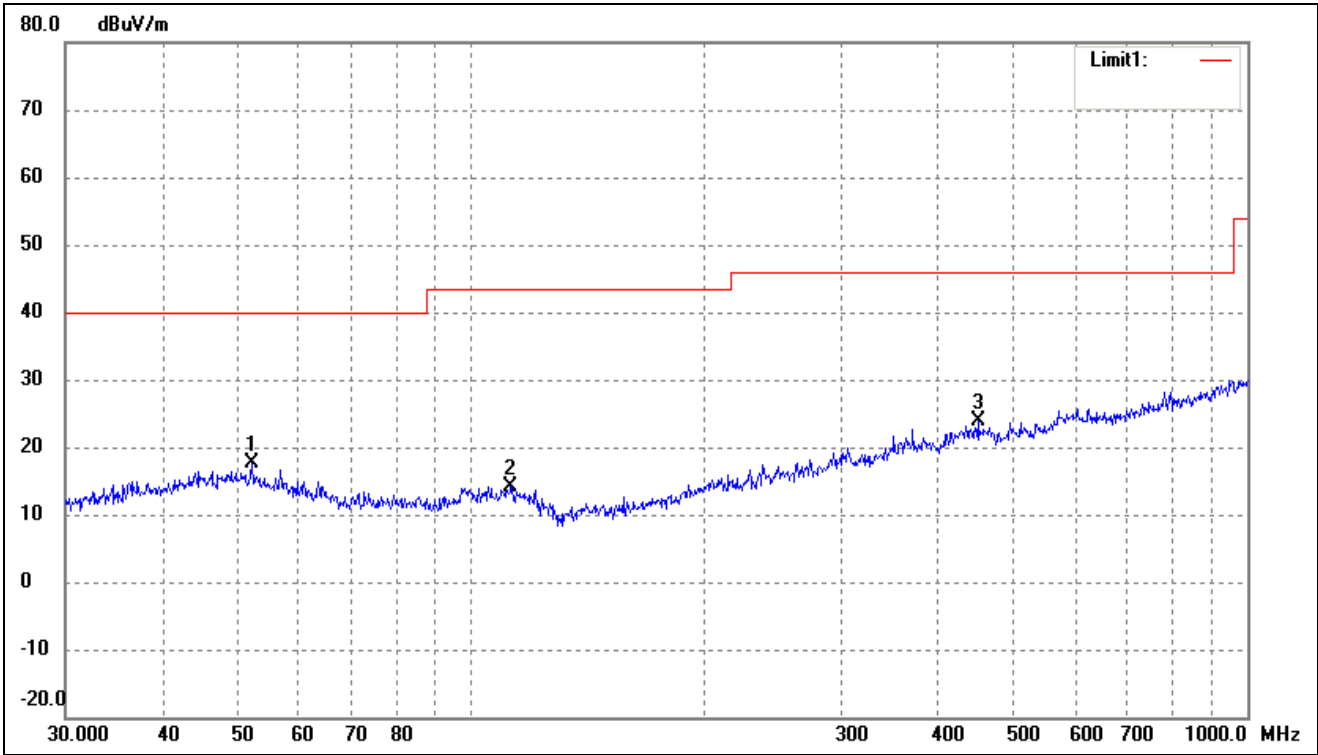


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.2079	28.37	-10.67	17.70	40.00	-22.30	-	-	peak
2	112.5244	26.64	-12.43	14.21	43.50	-29.29	-	-	peak
3	449.5558	28.46	-4.58	23.88	46.00	-22.12	-	-	peak

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

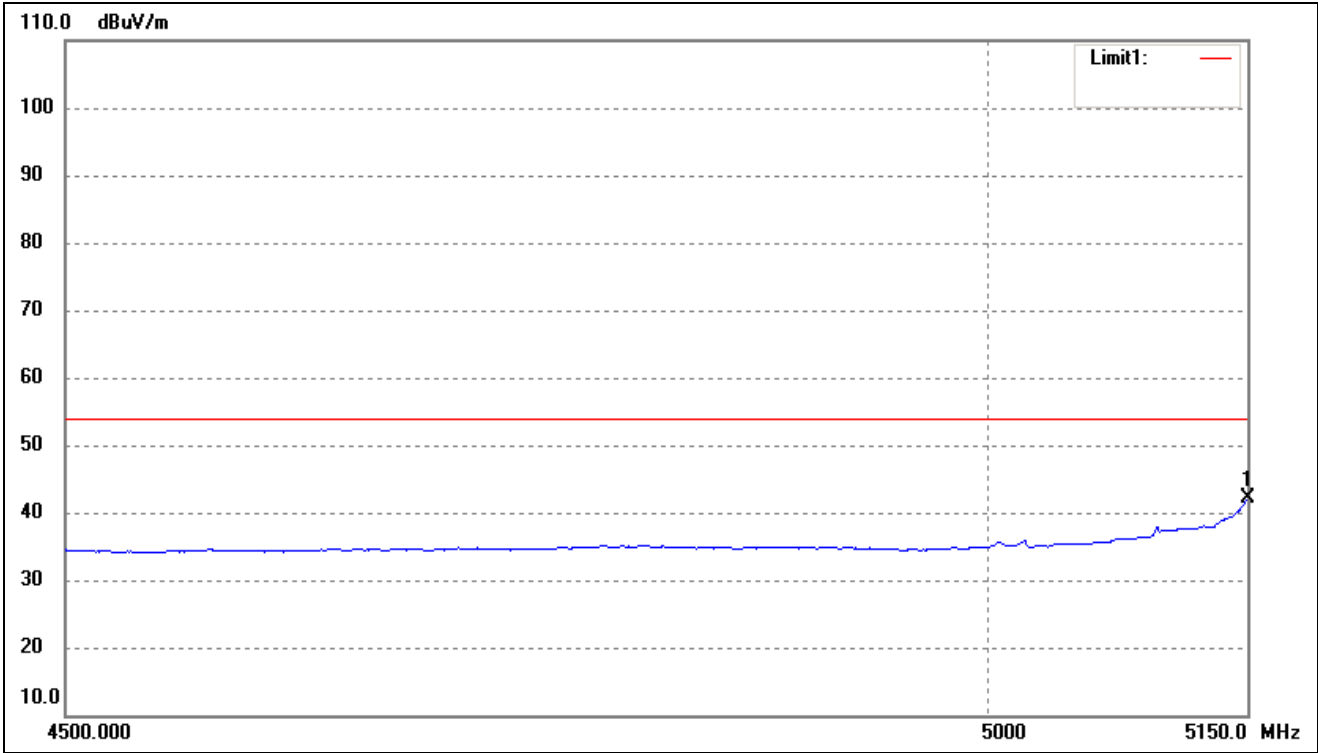


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	46.45	-4.32	42.13	54.00	-11.87	-	-	AVG

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

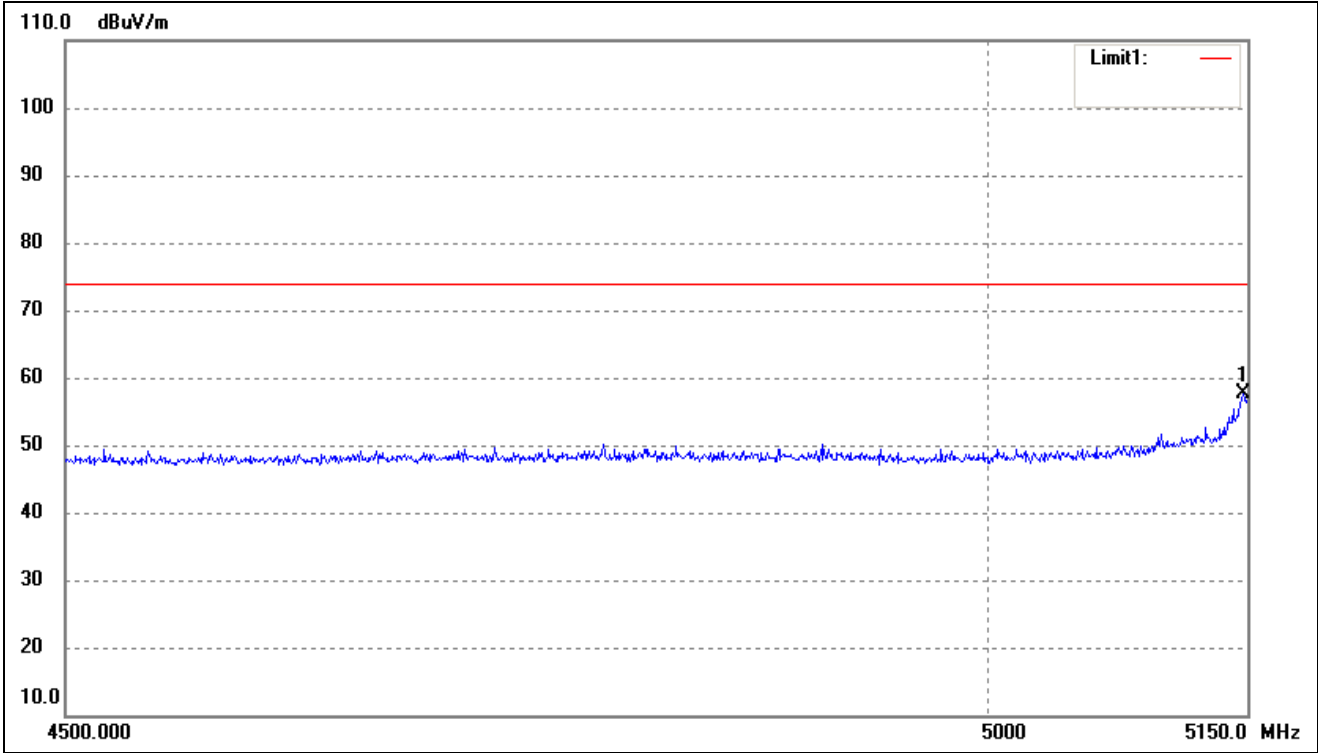

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5147.916	61.96	-4.32	57.64	74.00	-16.36	-	-	peak


802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

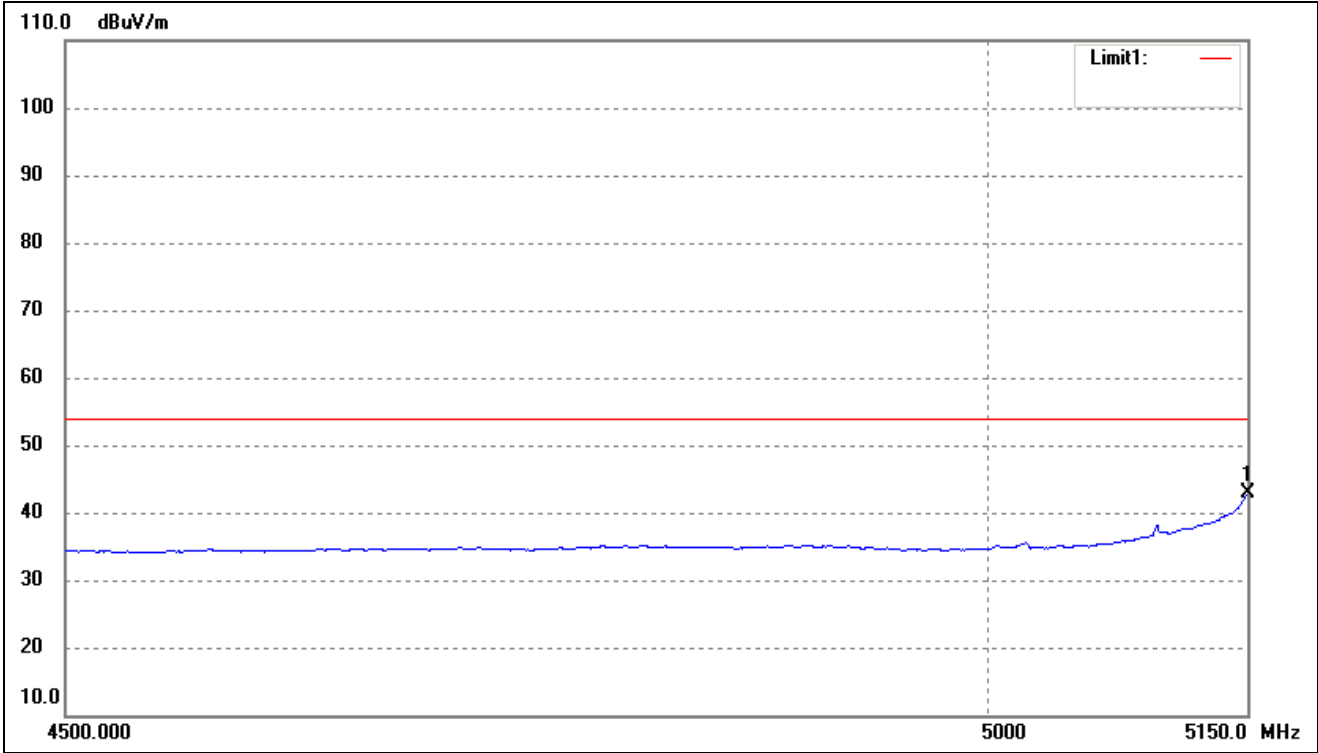

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	47.16	-4.32	42.84	54.00	-11.16	-	-	AVG




802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

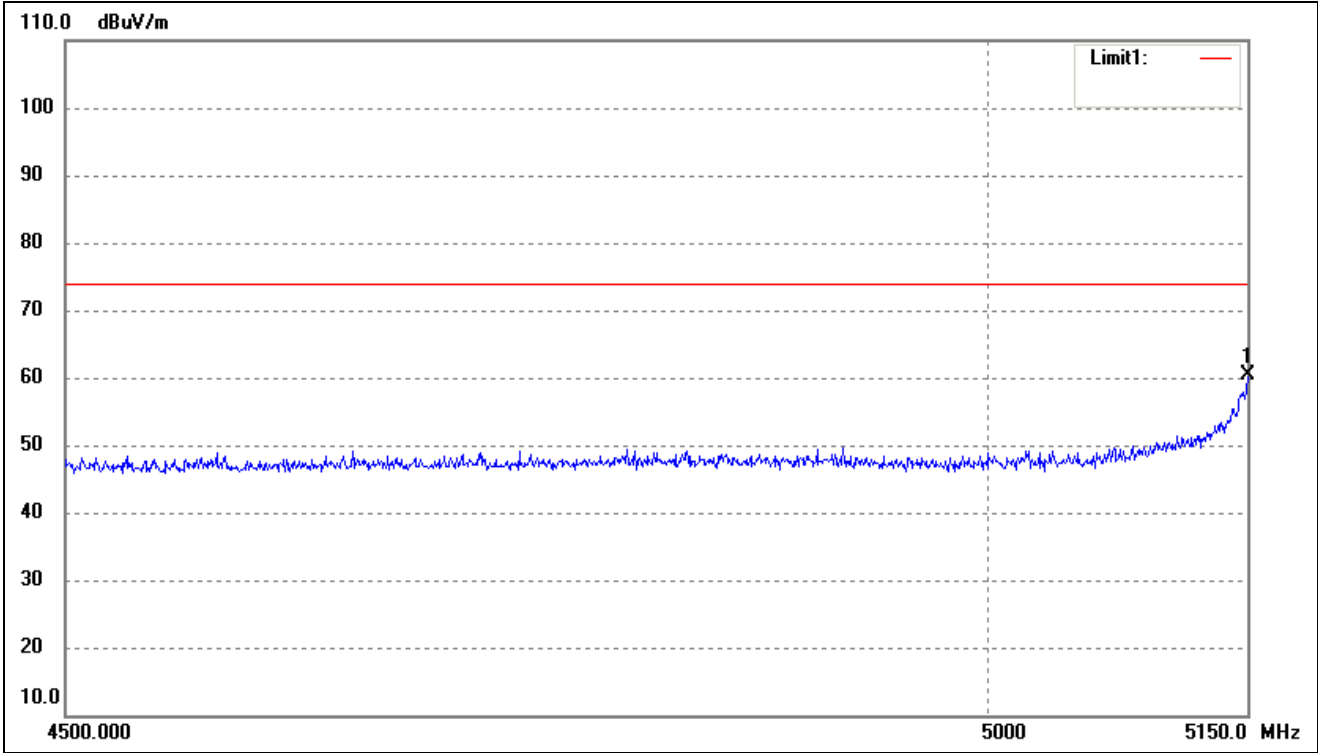


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	64.64	-4.32	60.32	74.00	-13.68	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

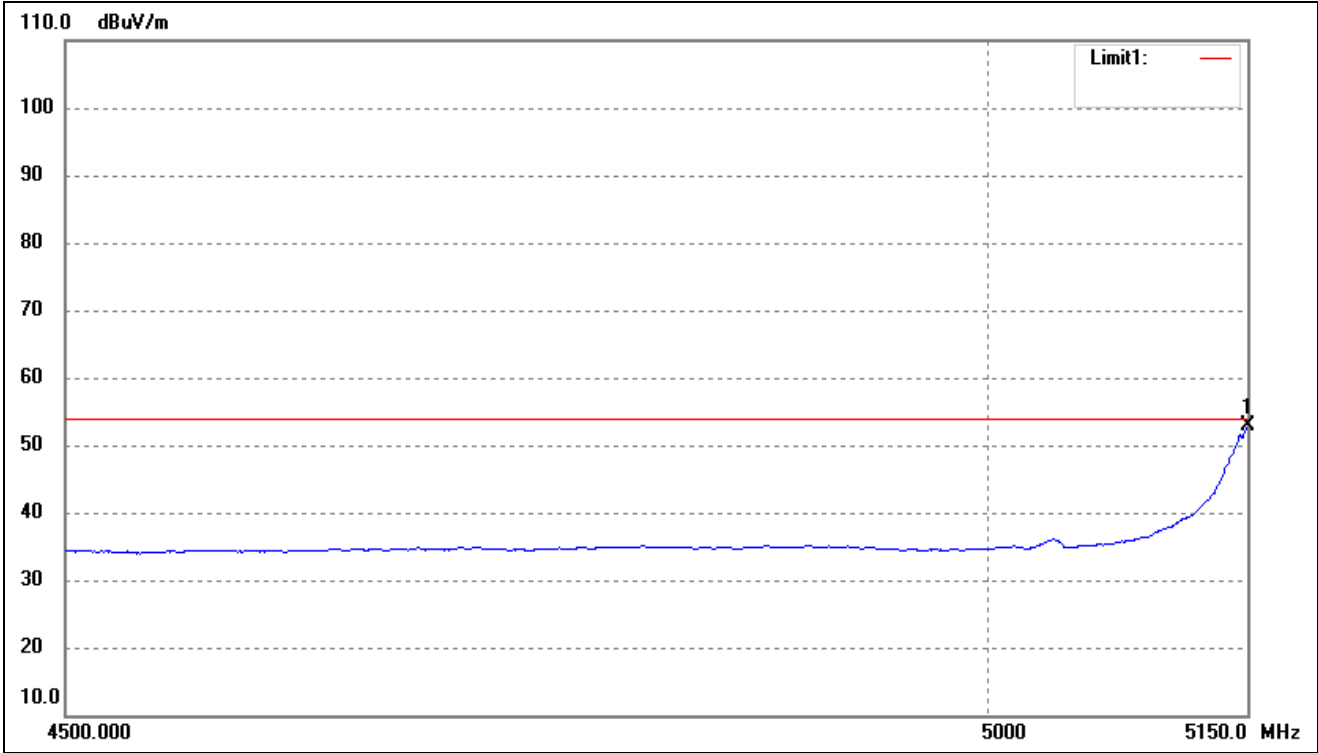


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	57.13	-4.32	52.81	54.00	-1.19	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

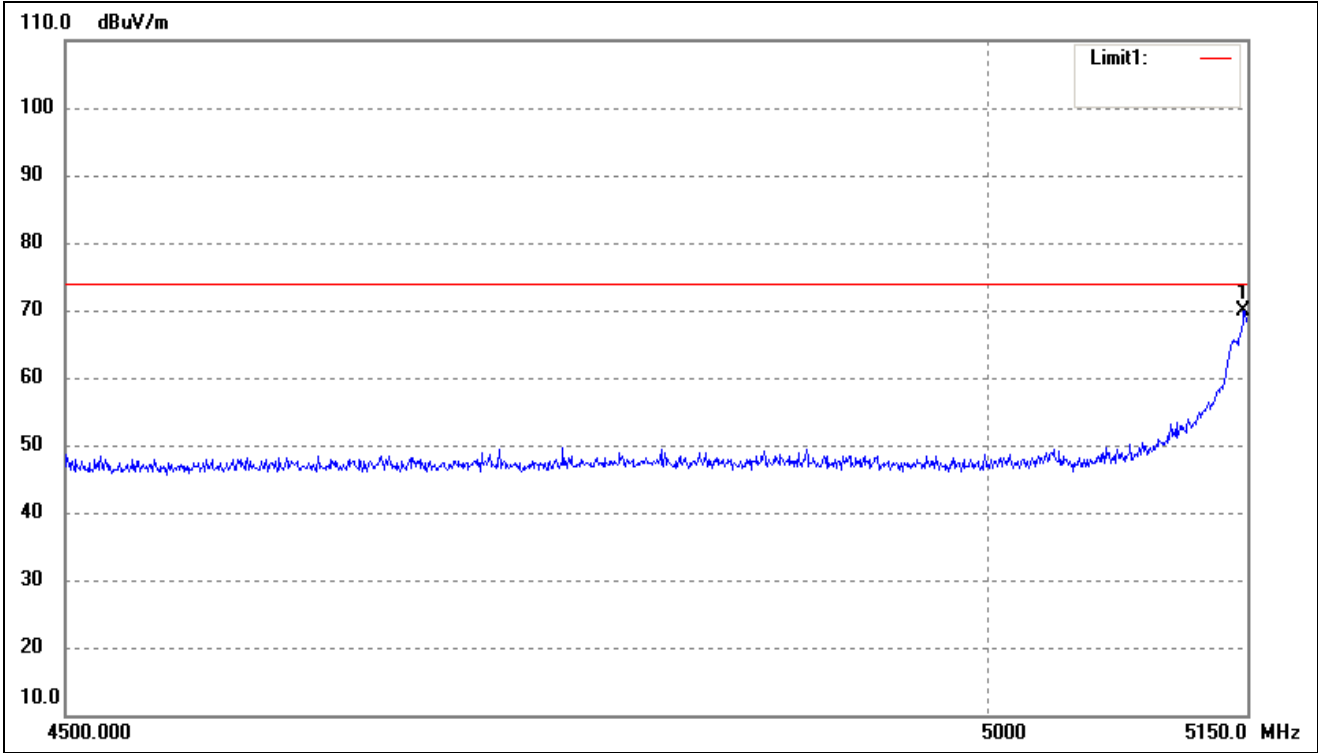


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5147.916	74.21	-4.32	69.89	74.00	-4.11	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.47-5.725GHz	Polarity:	Vertical(worst case)

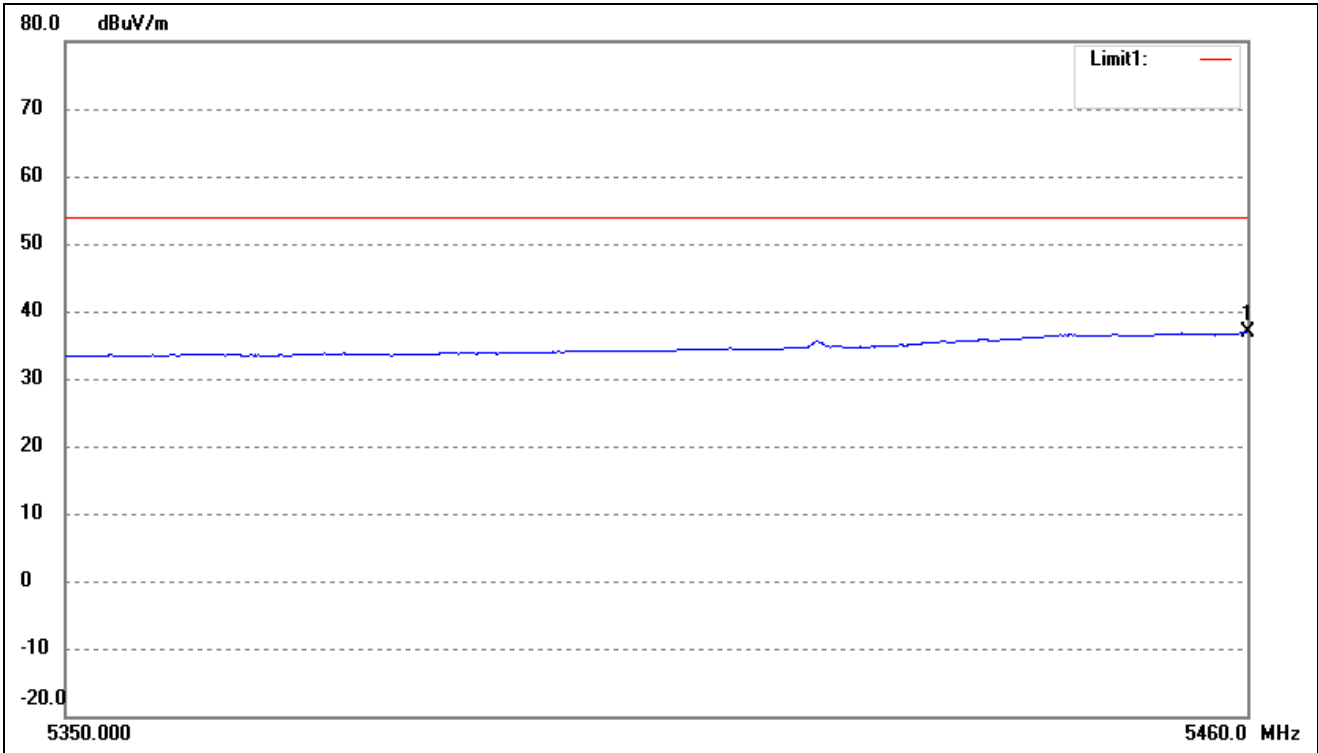


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5460.000	41.07	-4.16	36.91	54.00	-17.09	-	-	AVG

802.11a- Restricted Bandedge			
Test Channel	band 5.47-5.725GHz	Polarity:	Vertical(worst case)

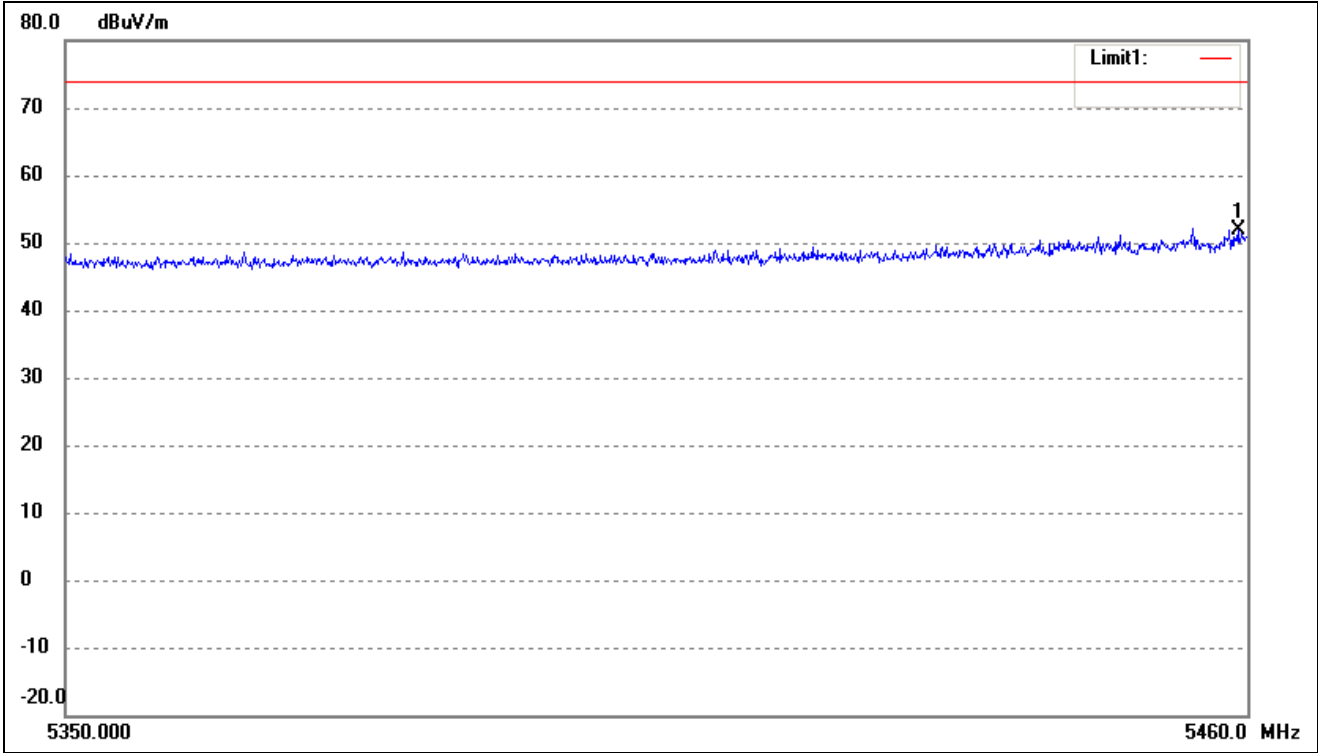


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5459.111	55.99	-4.16	51.83	74.00	-22.17	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.47-5.725GHz	Polarity:	Vertical(worst case)

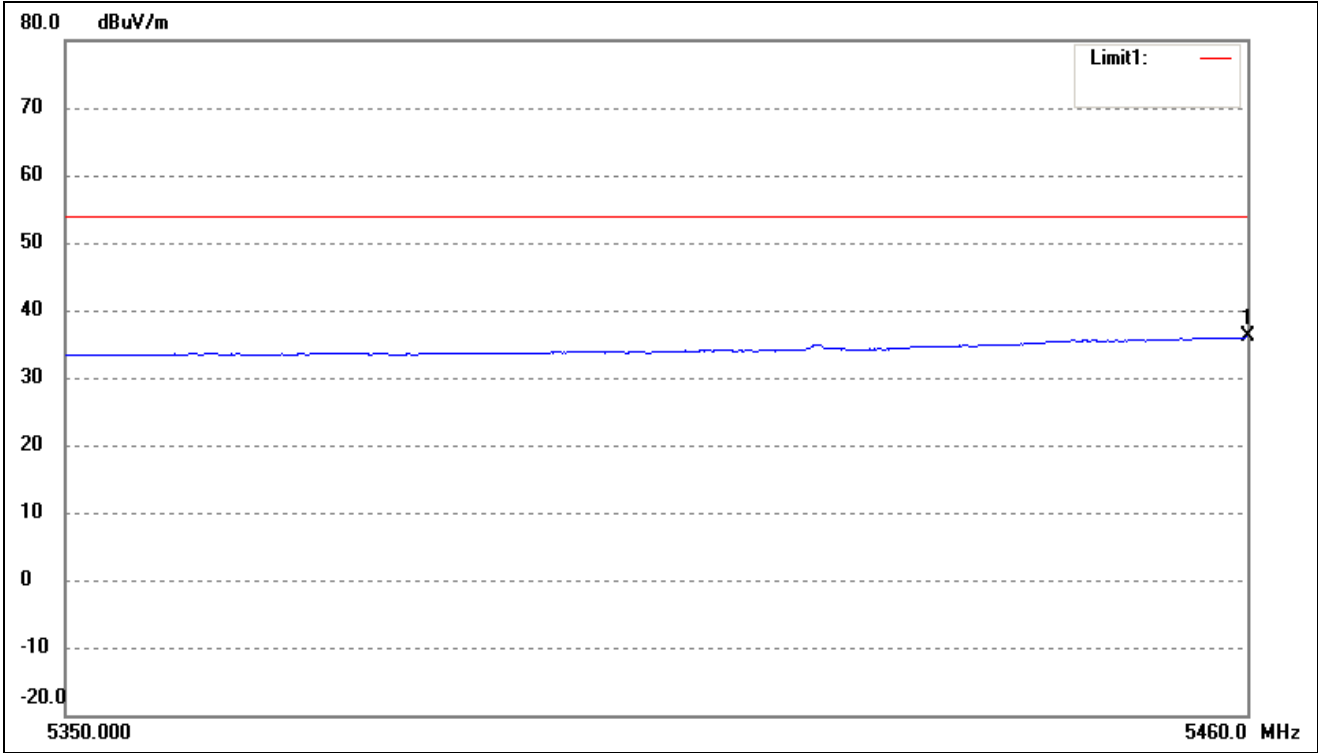


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5460.000	40.22	-4.16	36.06	54.00	-17.94	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.47-5.725GHz	Polarity:	Vertical(worst case)

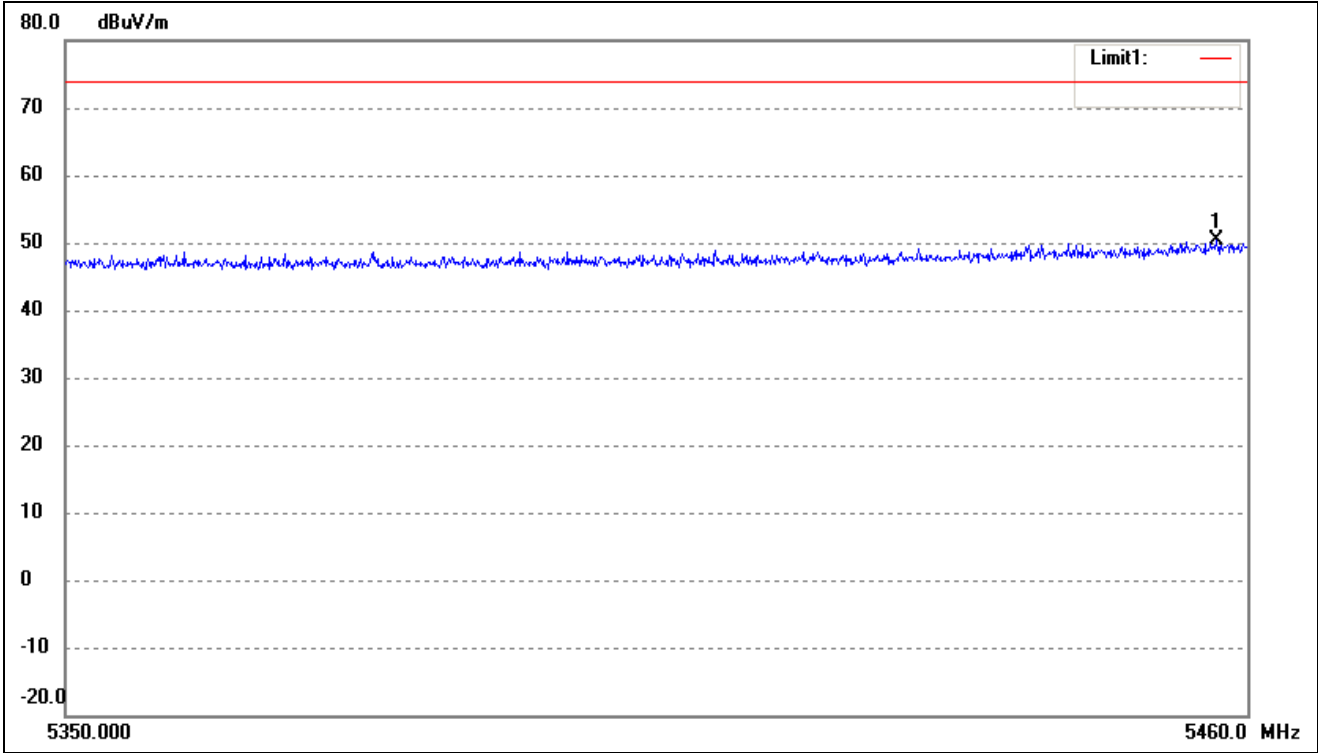

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5457.112	54.60	-4.16	50.44	74.00	-23.56	-	-	peak


802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.47-5.725GHz	Polarity:	Vertical(worst case)

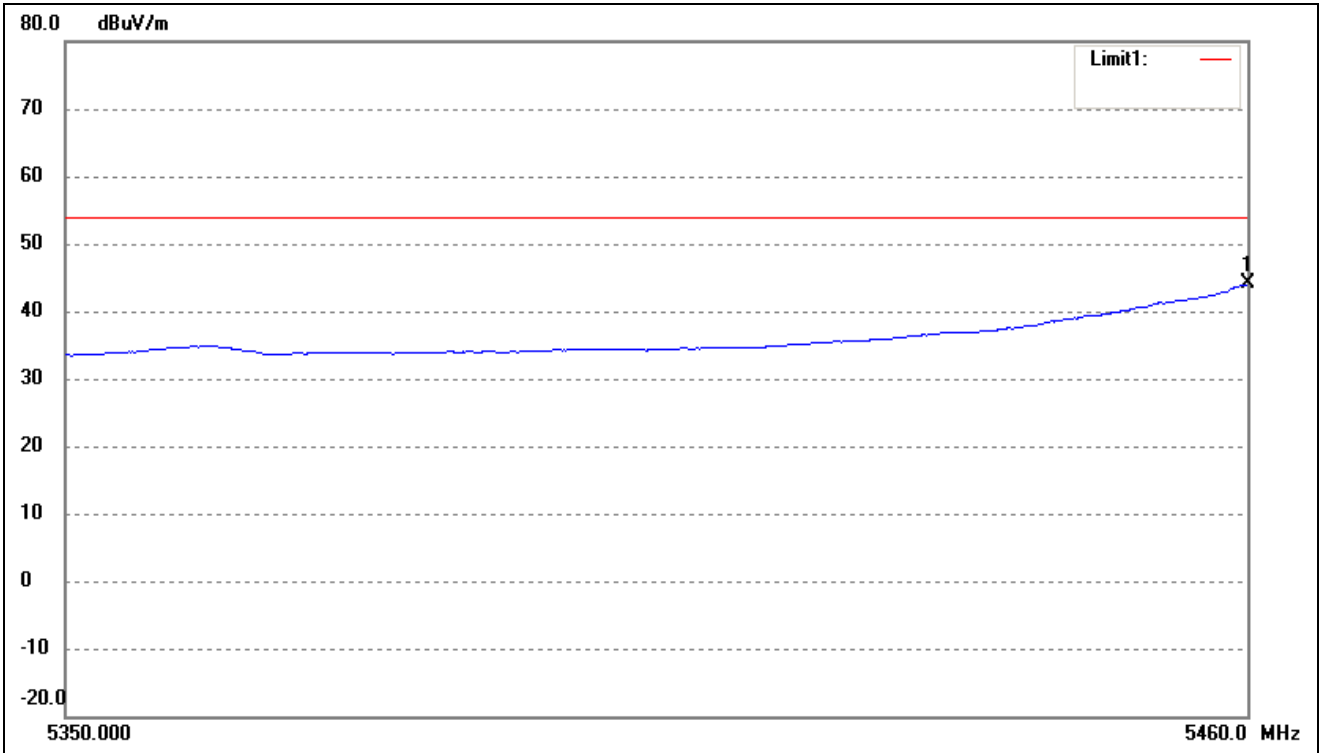

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5460.000	48.22	-4.16	44.06	54.00	-9.94	-	-	AVG



802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.47-5.725GHz	Polarity:	Vertical(worst case)

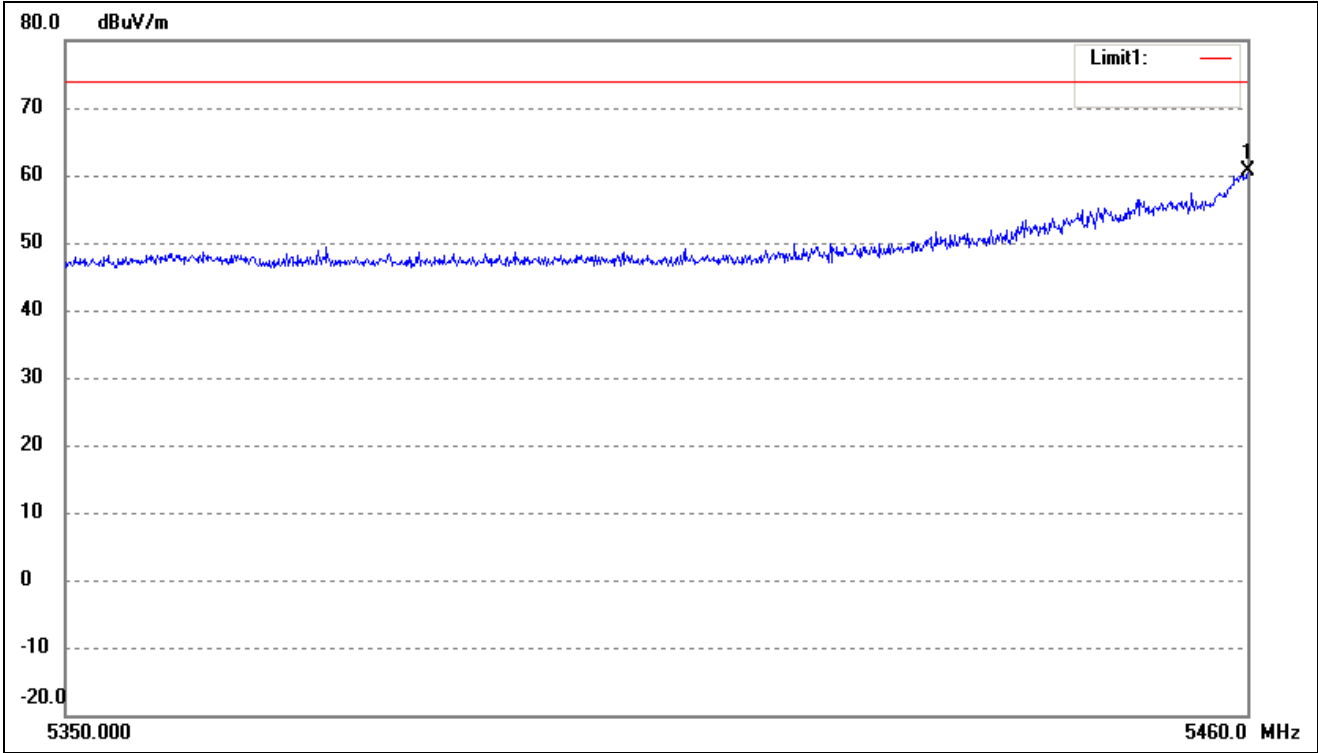

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5460.000	64.76	-4.16	60.60	74.00	-13.40	s	-	peak

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: '-' Means the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	58.57	7.11	65.68	74	-8.32	H	PK
15540	41.25	8.22	49.47	54	-4.53	H	AV
10360	59.35	7.11	66.46	74	-7.54	V	PK
15540	40.52	8.22	48.74	54	-5.26	V	AV
Middle Channel (5200MHz)							
10400	57.98	7.22	65.20	74	-8.80	H	PK
15600	42.35	8.67	51.02	54	-2.98	H	AV
10400	60.17	7.22	67.39	74	-6.61	V	PK
15600	41.28	8.67	49.95	54	-4.05	V	AV
High Channel (5240MHz)							
10480	60.77	7.69	68.46	74	-5.54	H	PK
15720	39.45	8.93	48.38	54	-5.62	H	AV
10480	57.69	7.69	65.38	74	-8.62	V	PK
15720	38.47	8.93	47.4	54	-6.60	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	57.38	7.96	65.34	74	-8.66	H	PK
15780	41.21	9.02	50.23	54	-3.77	H	AV
10520	57.36	7.96	65.32	74	-8.68	V	PK
15780	42.08	9.02	51.1	54	-2.90	V	AV
Middle Channel (5280MHz)							
10560	58.69	8.02	66.71	74	-7.29	H	PK
15840	40.15	9.42	49.57	54	-4.43	H	AV
10560	57.39	8.02	65.41	74	-8.59	V	PK
15840	39.36	9.42	48.78	54	-5.22	V	AV
High Channel (5320MHz)							
10640	57.69	8.35	66.04	74	-7.96	H	PK
15960	38.15	9.63	47.78	54	-6.22	H	AV
10640	59.36	8.35	67.71	74	-6.29	V	PK
15960	37.53	9.63	47.16	54	-6.84	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	58.69	8.82	67.51	74	-6.49	H	PK
16500	40.25	9.88	50.13	54	-3.87	H	AV
11000	57.36	8.82	66.18	74	-7.82	V	PK
16500	38.69	9.88	48.57	54	-5.43	V	AV
Middle Channel (5600MHz)							
11200	57.35	8.92	66.27	74	-7.73	H	PK
16800	38.36	10.03	48.39	54	-5.61	H	AV
11200	56.69	8.92	65.61	74	-8.39	V	PK
16800	39.41	10.03	49.44	54	-4.56	V	AV
High Channel (5700MHz)							
11400	56.35	9.36	65.71	74	-8.29	H	PK
17100	36.47	10.25	46.72	54	-7.28	H	AV
11400	59.64	9.36	69.00	74	-5.00	V	PK
17100	40.15	10.25	50.40	54	-3.60	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	58.69	9.45	68.14	74	-5.86	H	PK
17235	37.42	10.36	47.78	54	-6.22	H	AV
11490	59.13	9.45	68.58	74	-5.42	V	PK
17235	37.46	10.36	47.82	54	-6.18	V	AV
Middle Channel (5785MHz)							
11570	59.98	9.62	69.60	74	-4.40	H	PK
17355	38.35	10.67	49.02	54	-4.98	H	AV
11570	60.17	9.62	69.79	74	-4.21	V	PK
17355	39.36	10.67	50.03	54	-3.97	V	AV
High Channel (5825MHz)							
11650	60.25	9.84	70.09	74	-3.91	H	PK
17475	37.97	10.95	48.92	54	-5.08	H	AV
11650	59.83	9.84	69.67	74	-4.33	V	PK
17475	38.69	10.95	49.64	54	-4.36	V	AV

## ➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.65	-27
Highest	Above 5350	-36.64	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.98	-27
Highest	Above 5350	-38.47	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-37.46	-27
Highest	Above 5725	-36.61	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-40.75	-27
	5715 to 5725	-32.57	-17
Highest	5850 to 5860	-34.49	-17
	Above 5860	-39.42	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	56.65	7.11	63.76	74	-10.24	H	PK
15540	37.59	8.22	45.81	54	-8.19	H	AV
10360	58.36	7.11	65.47	74	-8.53	V	PK
15540	38.97	8.22	47.19	54	-6.81	V	AV
Middle Channel (5200MHz)							
10400	56.35	7.22	63.57	74	-10.43	H	PK
15600	37.97	8.67	46.64	54	-7.36	H	AV
10400	57.12	7.22	64.34	74	-9.66	V	PK
15600	38.36	8.67	47.03	54	-6.97	V	AV
High Channel (5240MHz)							
10480	59.65	7.69	67.34	74	-6.66	H	PK
15720	38.46	8.93	47.39	54	-6.61	H	AV
10480	58.13	7.69	65.82	74	-8.18	V	PK
15720	36.47	8.93	45.40	54	-8.60	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	61.07	7.96	69.03	74	-4.97	H	PK
15780	38.12	9.02	47.14	54	-6.86	H	AV
10520	58.64	7.96	66.60	74	-7.40	V	PK
15780	38.70	9.02	47.72	54	-6.28	V	AV
Middle Channel (5280MHz)							
10560	60.57	8.02	68.59	74	-5.41	H	PK
15840	36.49	9.42	45.91	54	-8.09	H	AV
10560	57.13	8.02	65.15	74	-8.85	V	PK
15840	37.98	9.42	47.4	54	-6.60	V	AV
High Channel (5320MHz)							
10640	59.75	8.35	68.10	74	-5.90	H	PK
15960	37.31	9.63	46.94	54	-7.06	H	AV
10640	57.62	8.35	65.97	74	-8.03	V	PK
15960	38.49	9.63	48.12	54	-5.88	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	57.58	8.82	66.40	74	-7.60	H	PK
16500	34.56	9.88	44.44	54	-9.56	H	AV
11000	58.98	8.82	67.80	74	-6.20	V	PK
16500	35.69	9.88	45.57	54	-8.43	V	AV
Middle Channel (5600MHz)							
11200	58.25	8.92	67.17	74	-6.83	H	PK
16800	35.98	10.03	46.01	54	-7.99	H	AV
11200	57.21	8.92	66.13	74	-7.87	V	PK
16800	36.17	10.03	46.20	54	-7.8	V	AV
High Channel (5700MHz)							
11400	60.83	9.36	70.19	74	-3.81	H	PK
17100	38.65	10.25	48.90	54	-5.10	H	AV
11400	61.01	9.36	70.37	74	-3.63	V	PK
17100	37.43	10.25	47.68	54	-6.32	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	58.68	9.45	68.13	74	-5.87	H	PK
17235	32.46	10.36	42.82	54	-11.18	H	AV
11490	59.36	9.45	68.81	74	-5.19	V	PK
17235	30.12	10.36	40.48	54	-13.52	V	AV
Middle Channel (5785MHz)							
11570	59.78	9.62	69.40	74	-4.60	H	PK
17355	33.56	10.67	44.23	54	-9.77	H	AV
11570	57.56	9.62	67.18	74	-6.82	V	PK
17355	31.26	10.67	41.93	54	-12.07	V	AV
High Channel (5825MHz)							
11650	57.65	9.84	67.49	74	-6.51	H	PK
17475	32.47	10.95	43.42	54	-10.58	H	AV
11650	59.41	9.84	69.25	74	-4.75	V	PK
17475	31.54	10.95	42.49	54	-11.51	V	AV

## ➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-38.97	-27
Highest	Above 5350	-41.03	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.46	-27
Highest	Above 5350	-40.46	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-40.95	-27
Highest	Above 5725	-36.47	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-39.46	-27
	5715 to 5725	-30.43	-17
Highest	5850 to 5860	-32.11	-17
	Above 5860	-40.24	-27

Note: the data just list the worst cases

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	56.87	7.89	64.76	74	-9.24	H	PK
15570	41.52	8.56	50.08	54	-3.92	H	AV
10380	56.49	7.89	64.38	74	-9.62	V	PK
15570	40.12	8.56	48.68	54	-5.32	V	AV
High Channel (5230MHz)							
10460	57.36	7.97	65.33	74	-8.67	H	PK
15690	42.45	9.06	51.51	54	-2.49	H	AV
10460	58.31	7.97	66.28	74	-7.72	V	PK
15690	41.18	9.06	50.24	54	-3.76	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5270MHz)							
10540	59.83	8.16	67.99	74	-6.01	H	PK
15810	39.45	9.53	48.98	54	-5.02	H	AV
10540	58.42	8.16	66.58	74	-7.42	V	PK
15810	37.36	9.53	46.89	54	-7.11	V	AV
High Channel (5310MHz)							
10620	60.46	8.57	69.03	74	-4.97	H	PK
15930	38.19	9.74	47.93	54	-6.07	H	AV
10620	61.43	8.57	70.00	74	-4.00	V	PK
15930	37.59	9.74	47.33	54	-6.67	V	AV



Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5510MHz)							
11020	58.49	9.16	67.65	74	-6.35	H	PK
16530	39.68	10.25	49.93	54	-4.07	H	AV
11020	59.41	9.16	68.57	74	-5.43	V	PK
16530	37.36	10.25	47.61	54	-6.39	V	AV
Middle Channel (5590MHz)							
11180	59.46	9.08	68.54	74	-5.46	H	PK
16770	40.16	10.11	50.27	54	-3.73	H	AV
11180	58.49	9.08	67.57	74	-6.43	V	PK
16770	38.62	10.11	48.73	54	-5.27	V	AV
High Channel (5670MHz)							
11340	60.12	9.43	69.55	74	-4.45	H	PK
17010	41.26	10.39	51.65	54	-2.35	H	AV
11340	57.98	9.43	67.41	74	-6.59	V	PK
17010	39.61	10.39	50.00	54	-4.00	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	61.45	9.45	70.9	74	-3.10	H	PK
17265	40.65	10.62	51.27	54	-2.73	H	AV
11510	60.15	9.45	69.6	74	-4.40	V	PK
17265	40.74	10.62	51.36	54	-2.64	V	AV
High Channel (5795MHz)							
11590	59.69	9.27	68.96	74	-5.04	H	PK
17385	41.46	10.79	52.25	54	-1.75	H	AV
11590	58.47	9.27	67.74	74	-6.26	V	PK
17385	39.39	10.79	50.18	54	-3.82	V	AV

## ➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.89	-27
Highest	Above 5350	-39.47	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-42.02	-27
Highest	Above 5350	-38.49	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-38.49	-27
Highest	Above 5725	-36.15	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-38.46	-27
	5715 to 5725	-26.38	-17
Highest	5850 to 5860	-27.11	-17
	Above 5860	-34.25	-27

Note: the data just list the worst cases

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 11. Frequency Stability

---

### 11.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

### 11.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

### 11.3 Summary of Test Results/Plots

<b>U-NII-1:5150-5250MHz worst case at 802.11a middle channel</b>				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	132	0.0254
100%		-20	169	0.0325
100%		-10	121	0.0233
100%		0	156	0.0300
100%		+10	172	0.0331
100%		+20	126	0.0242
100%		+30	100	0.0192
100%		+40	112	0.0215
100%		+50	107	0.0206
Low Battery power		3.5	+20	166
High Battery power	4.35	+20	105	0.0202

<b>U-NII-2A: 5250-5350MHz worst case at 802.11a middle channel</b>				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	152	0.0288
100%		-20	104	0.0197
100%		-10	100	0.0189
100%		0	178	0.0337
100%		+10	104	0.0197
100%		+20	159	0.0301
100%		+30	159	0.0301
100%		+40	162	0.0307
100%		+50	122	0.0231
Low Battery power		3.5	+20	100
High Battery power	4.35	+20	161	0.0305

<b>U-NII-2C: 5470-5725MHz worst case at 802.11a middle channel</b>				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	137	0.0245
100%		-20	158	0.0282
100%		-10	147	0.0263
100%		0	156	0.0279
100%		+10	128	0.0229
100%		+20	147	0.0263
100%		+30	178	0.0318
100%		+40	118	0.0211
100%		+50	131	0.0234
Low Battery power		3.5	+20	158
High Battery power	4.35	+20	120	0.0214

<b>U-NII-3:5725-5850MHz worst case at 802.11a middle channel</b>				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	103	0.0178
100%		-20	180	0.0311
100%		-10	116	0.0201
100%		0	160	0.0277
100%		+10	168	0.0290
100%		+20	141	0.0244
100%		+30	151	0.0261
100%		+40	101	0.0175
100%		+50	109	0.0188
Low Battery power		3.5	+20	118
High Battery power	4.35	+20	162	0.0280

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***