

MEASUREMENT 117

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 66
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.024890
Conductivity (S/m)	1.371250
Power Variation (%)	1.374628
Ambient Temperature	21.1
Liquid Temperature	21.2

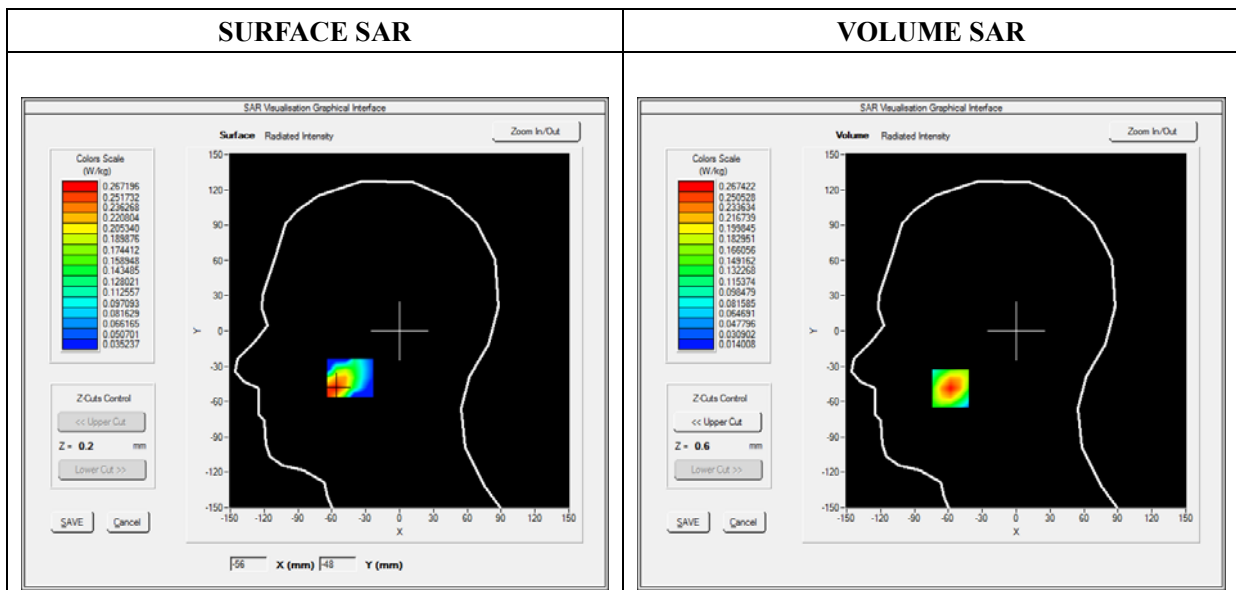


Maximum location: X=-58.00, Y=-49.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.147090
SAR 1g (W/Kg)	0.249267

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3794	0.2674	0.1718	0.1123	0.0761

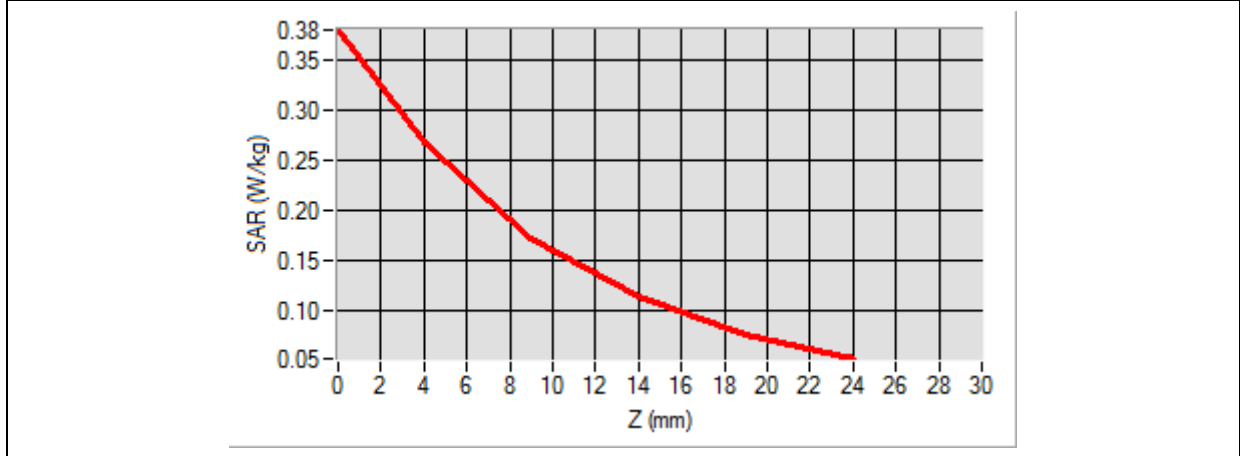

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey, cup-like device. A grid of blue dots is overlaid on the inner surface. A small cluster of dots is highlighted with a color gradient from green to yellow, indicating the hot spot location.</p>	<p>A 3D visualization of the hot spot, showing a small, irregularly shaped volume with a color gradient from green at the top to red at the bottom, representing the intensity of the SAR exposure.</p>

MEASUREMENT 125

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.153660
Conductivity (S/m)	1.740236
Power Variation (%)	3.234772
Ambient Temperature	21.1
Liquid Temperature	21.2

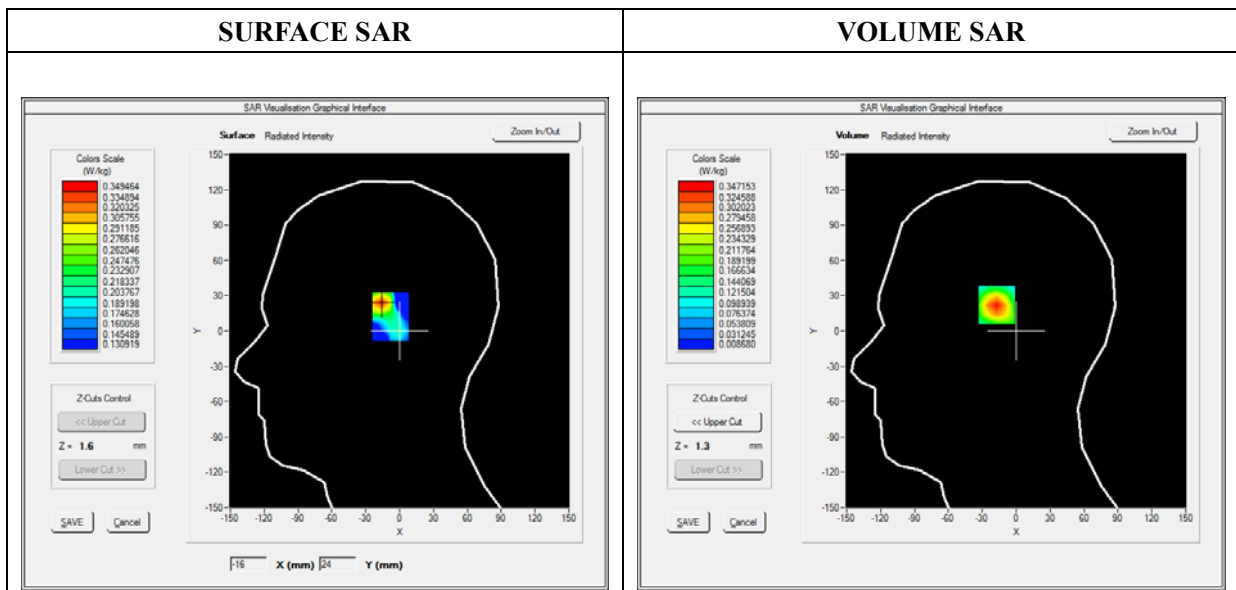


Maximum location: X=-16.00, Y=24.00

SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.159024
SAR 1g (W/Kg)	0.323326

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5982	0.3472	0.1665	0.0791	0.0404

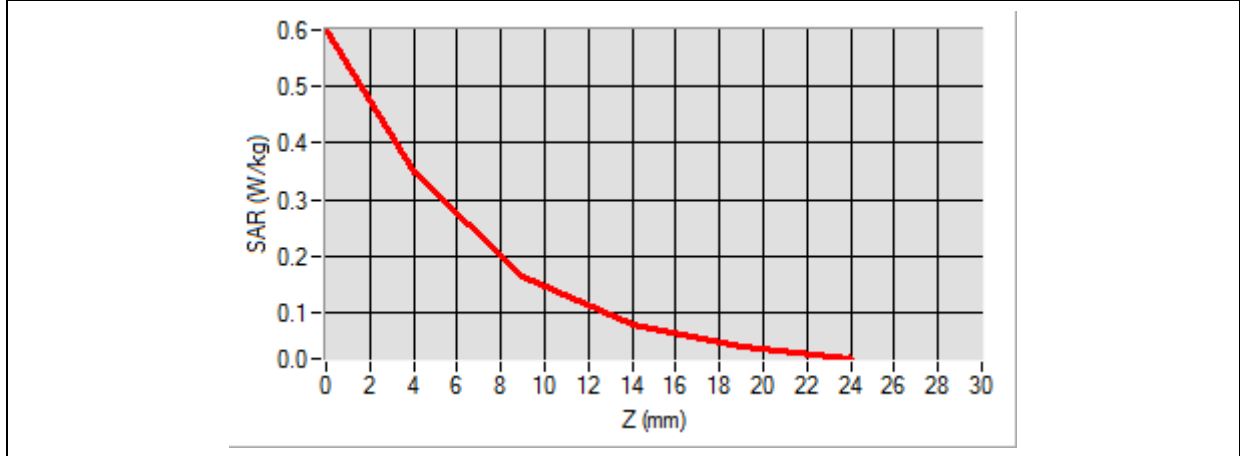

3D screen shot	Hot spot position

MEASUREMENT 127

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WiFi(5.2GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5180.000000
Relative Permittivity (real part)	35.612911
Conductivity (S/m)	4.871483
Power Variation (%)	0.542660
Ambient Temperature	22.0
Liquid Temperature	22.3

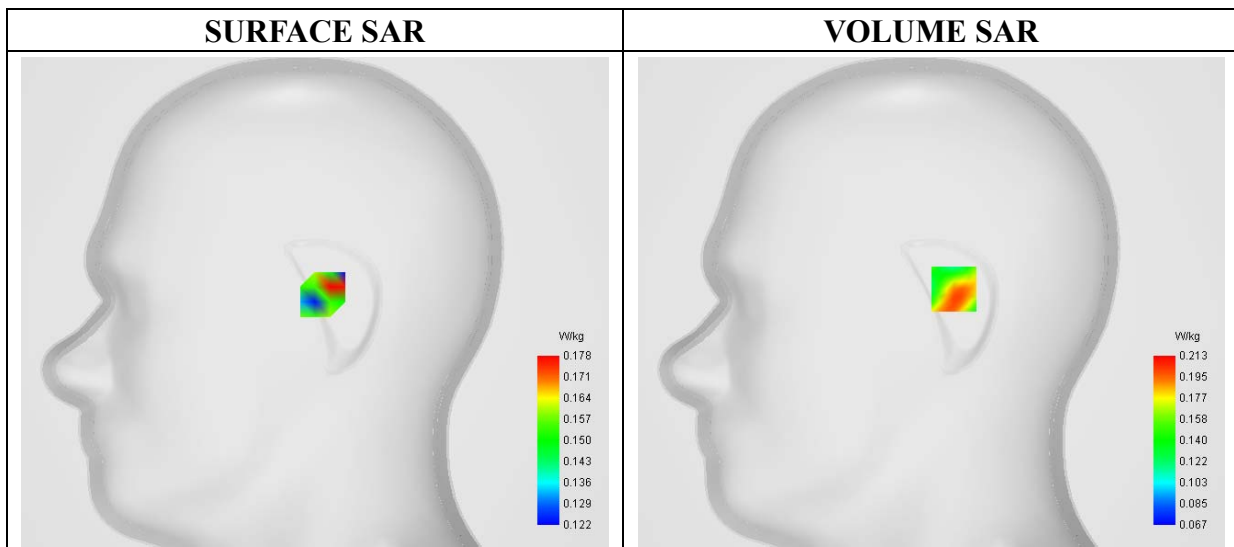


Maximum location: X=12.00, Y=7.00

SAR 10g (W/Kg)	0.148459
----------------	----------

SAR 1g (W/Kg)	0.191021
---------------	----------

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.3023	0.2000	0.1488	0.1150	0.1251	0.0909	0.1208	0.0983	0.1073	0.1073

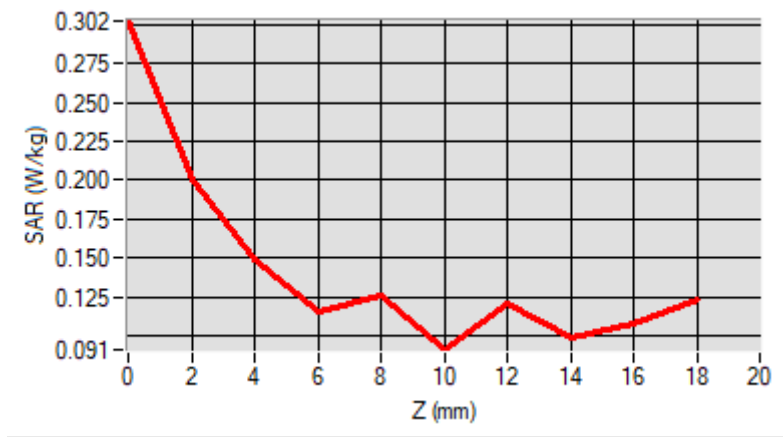

3D screen shot	Hot spot position

MEASUREMENT 133

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left Head
Device Position	Cheek
Band	WiFi(5.3GHz)_802.11 n (HT20)
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5320.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	4.740192
Power Variation (%)	0.463782
Ambient Temperature	22.0
Liquid Temperature	22.3

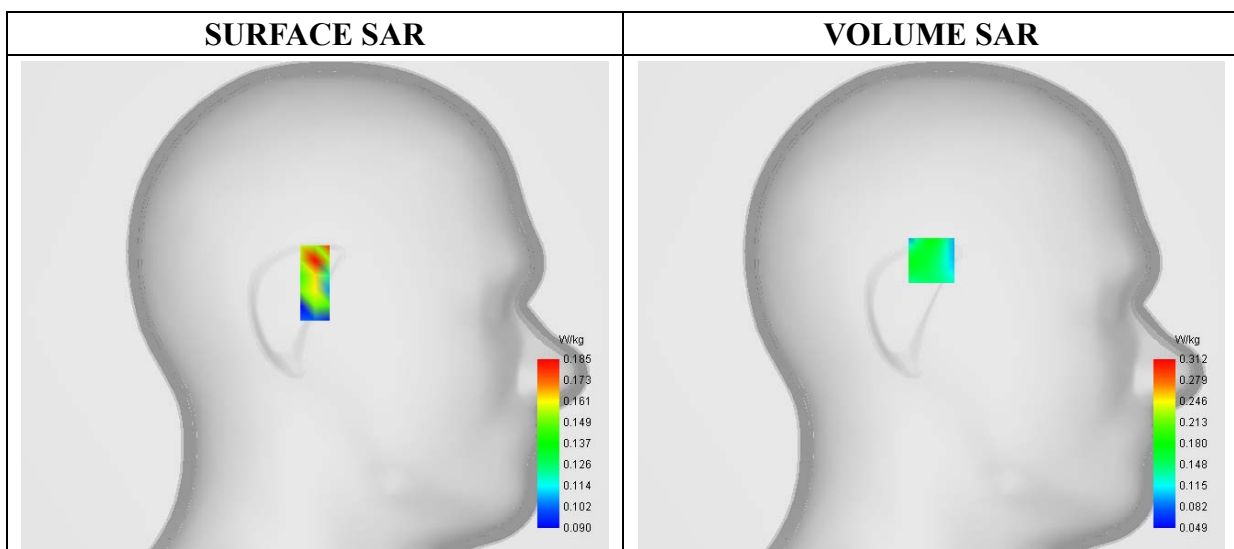

Maximum location: X=0.00, Y=24.00

SAR 10g (W/Kg)	0.150972
SAR 1g (W/Kg)	0.221513

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.2873	0.1805	0.1072	0.1456	0.0876	0.1194	0.1260	0.0990	0.0950

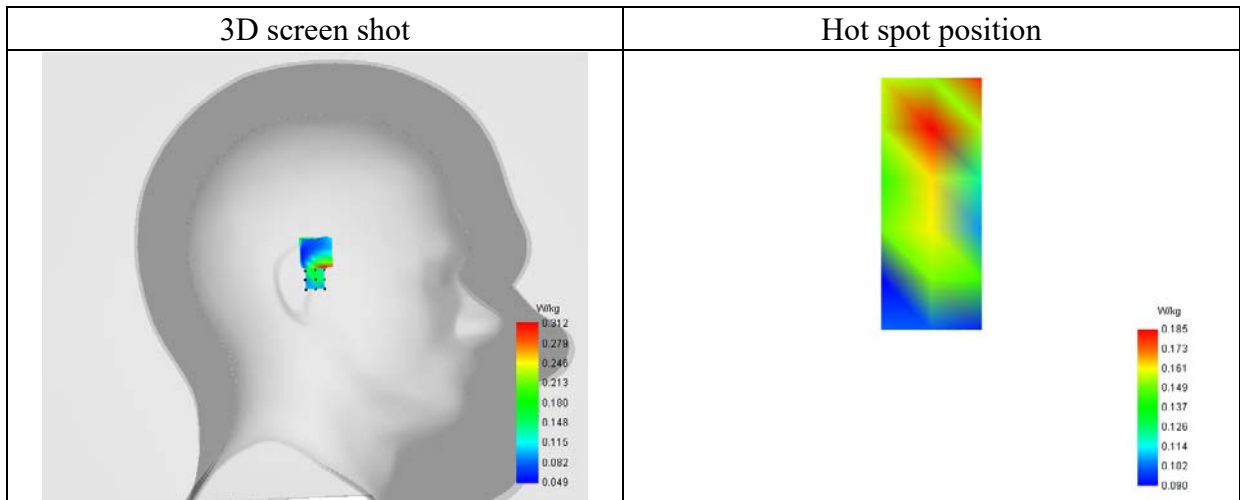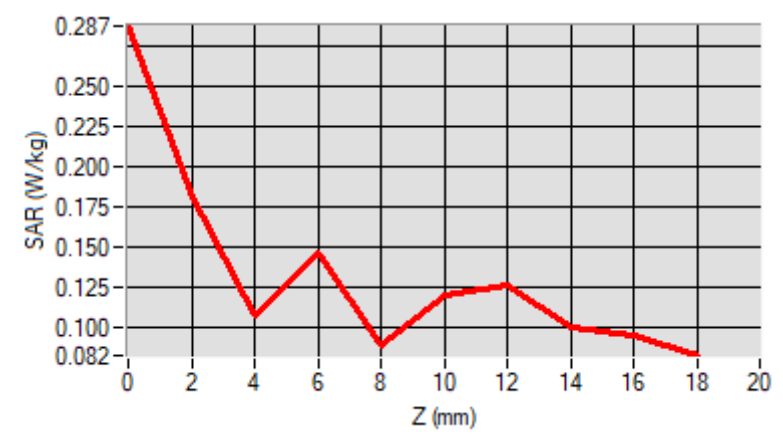

MEASUREMENT 135

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right Head
Device Position	Cheek
Band	WiFi(5.6GHz)_802.11 n (HT40)
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5590.000000
Relative Permittivity (real part)	35.301254
Conductivity (S/m)	5.210512
Power Variation (%)	0.848732
Ambient Temperature	22.0
Liquid Temperature	22.3

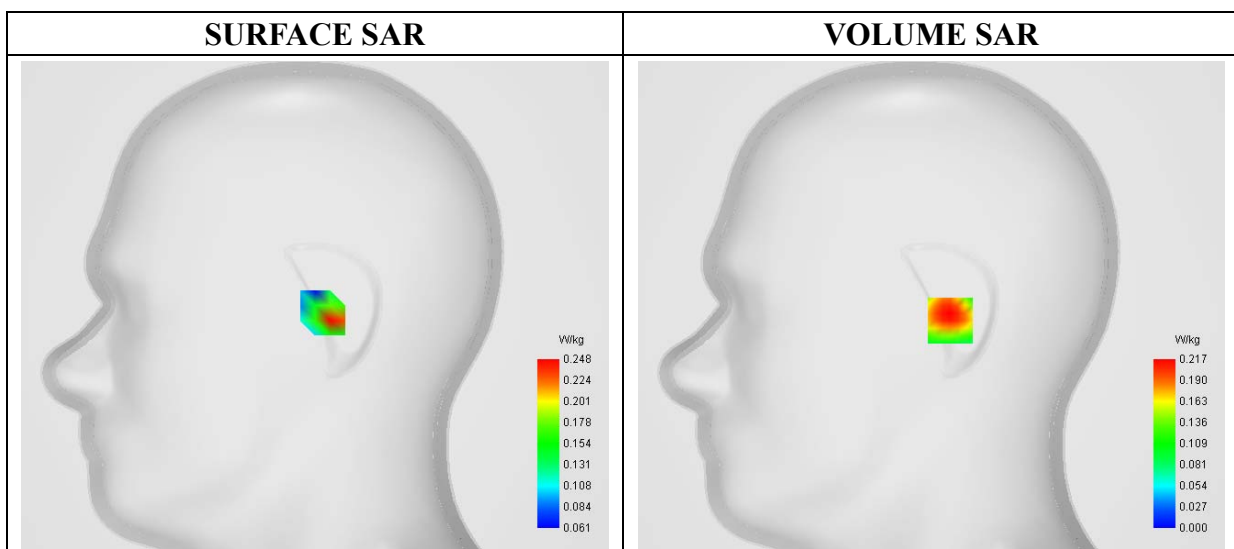

Maximum location: X=10.00, Y=-8.00

SAR 10g (W/Kg)	0.137273
SAR 1g (W/Kg)	0.223616

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.3234	0.2173	0.1384	0.1200	0.0921	0.0865	0.0807	0.0837	0.0913

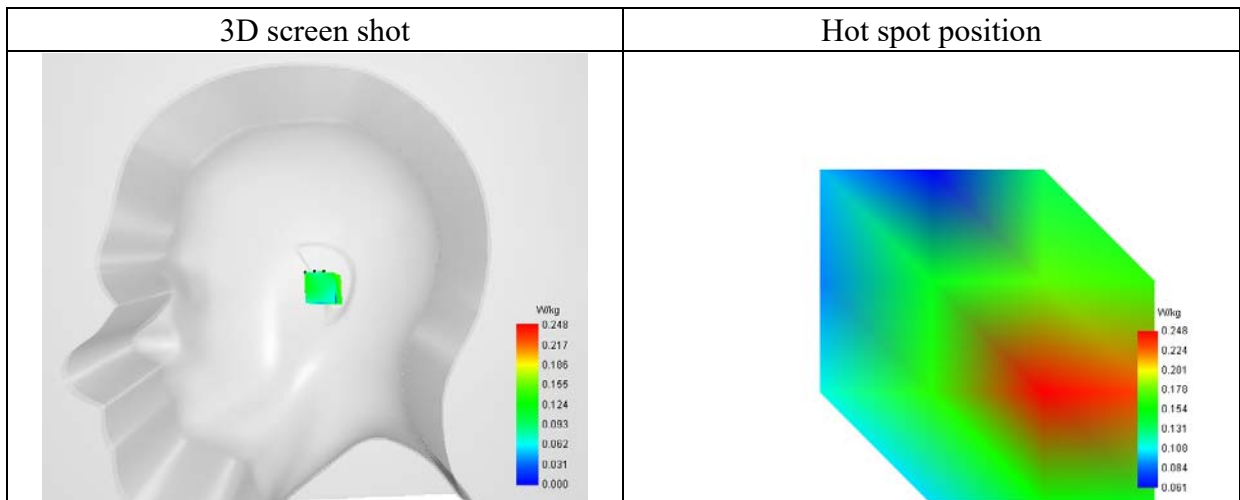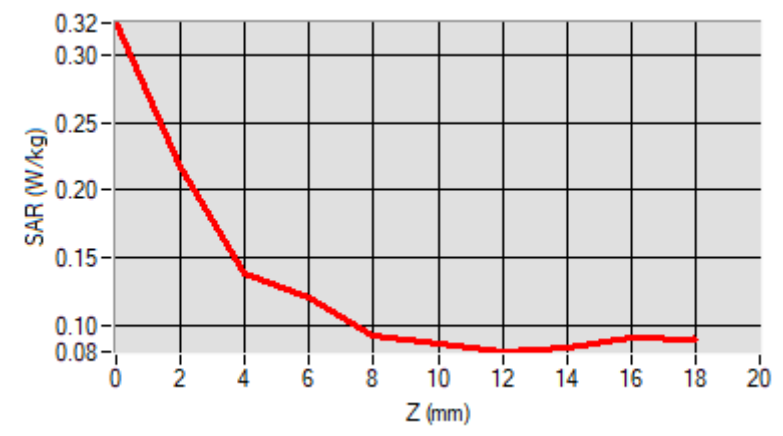

MEASUREMENT 139

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right Head
Device Position	Cheek
Band	WiFi(5.8GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	35.301254
Power Variation (%)	5.210512
Ambient Temperature	22.0
Liquid Temperature	22.3

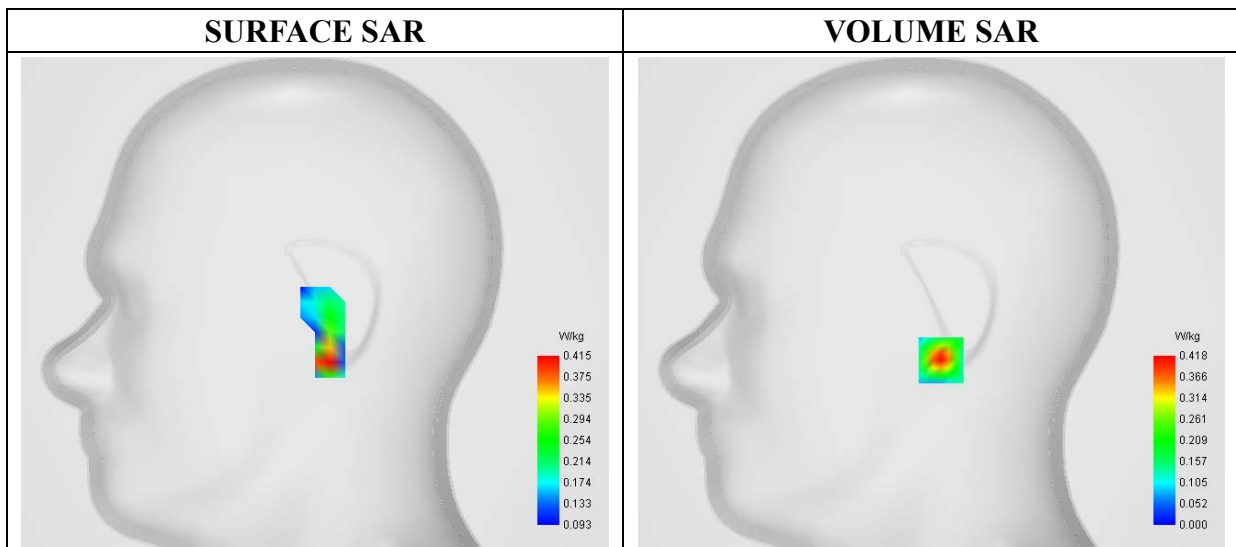

Maximum location: X=5.00, Y=-31.00

SAR 10g (W/Kg)	0.172093
SAR 1g (W/Kg)	0.398953

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.7175	0.4183	0.2337	0.1315	0.0824	0.0620	0.0581	0.0653	0.0814	0.0814

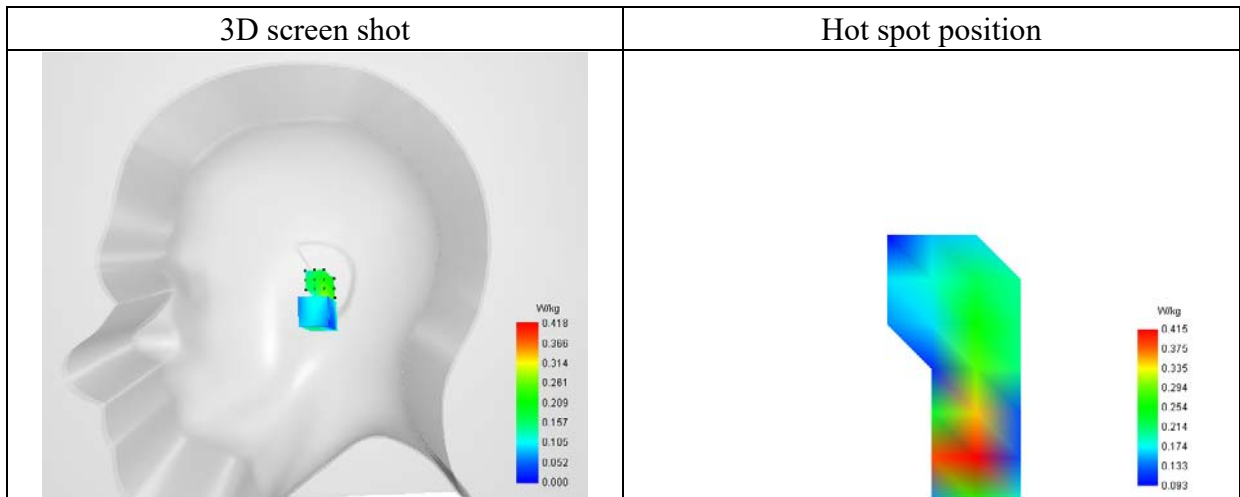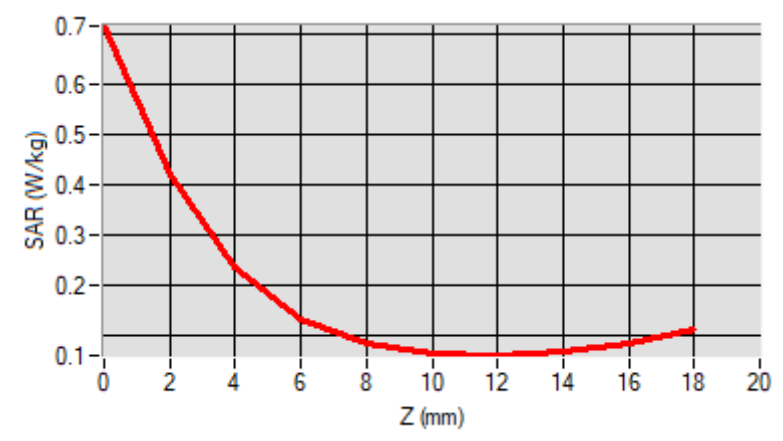

MEASUREMENT 143

Type: Phone measurement (Complete)

Date of measurement: 2020-10-22

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	836.599976
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

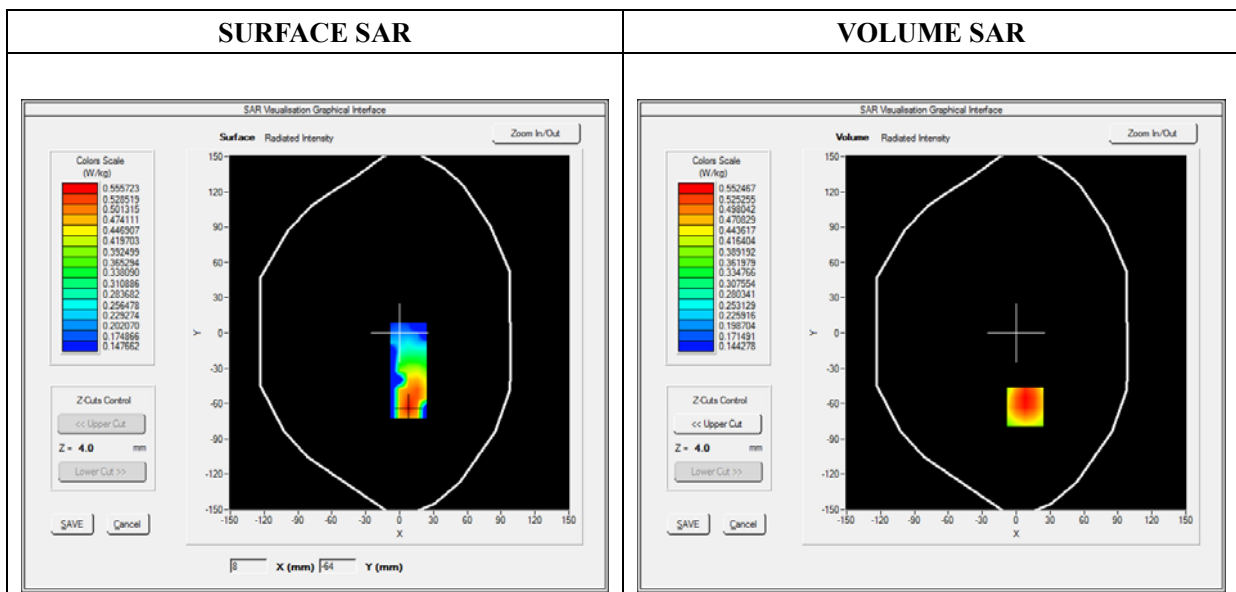


Maximum location: X=2.00, Y=-42.00

SAR Peak: 0.47 W/kg

SAR 10g (W/Kg)	0.234287
SAR 1g (W/Kg)	0.338373

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1767	0.3594	0.1824	0.1975	0.1017

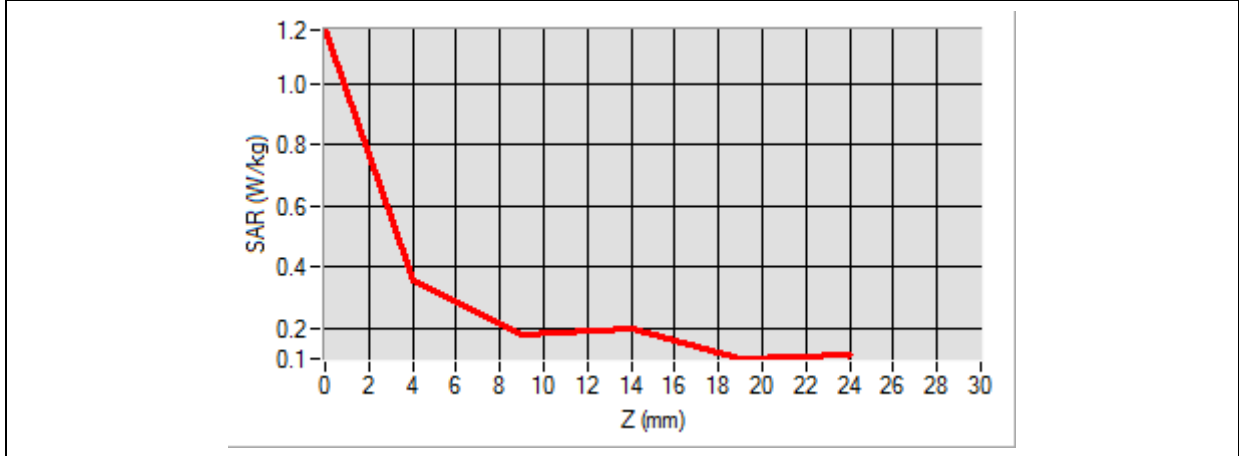

3D screen shot	Hot spot position

MEASUREMENT 146

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.474622
Ambient Temperature	21.1
Liquid Temperature	21.3

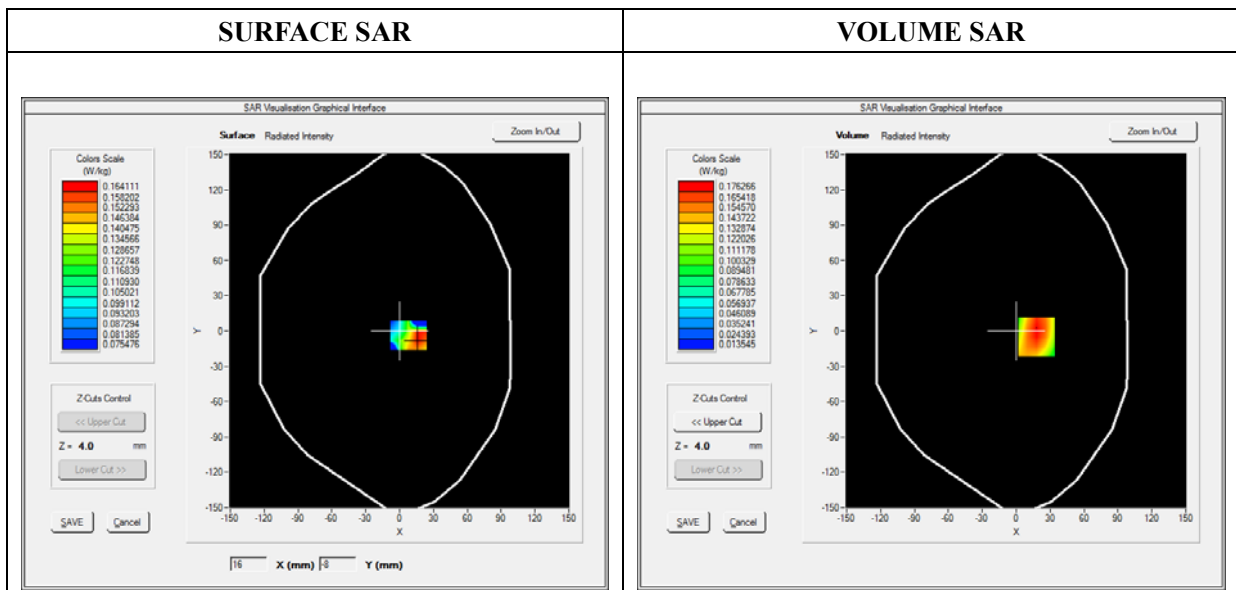


Maximum location: X=18.00, Y=-5.00

SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.097388
SAR 1g (W/Kg)	0.168407

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2718	0.1763	0.0948	0.0519	0.0340

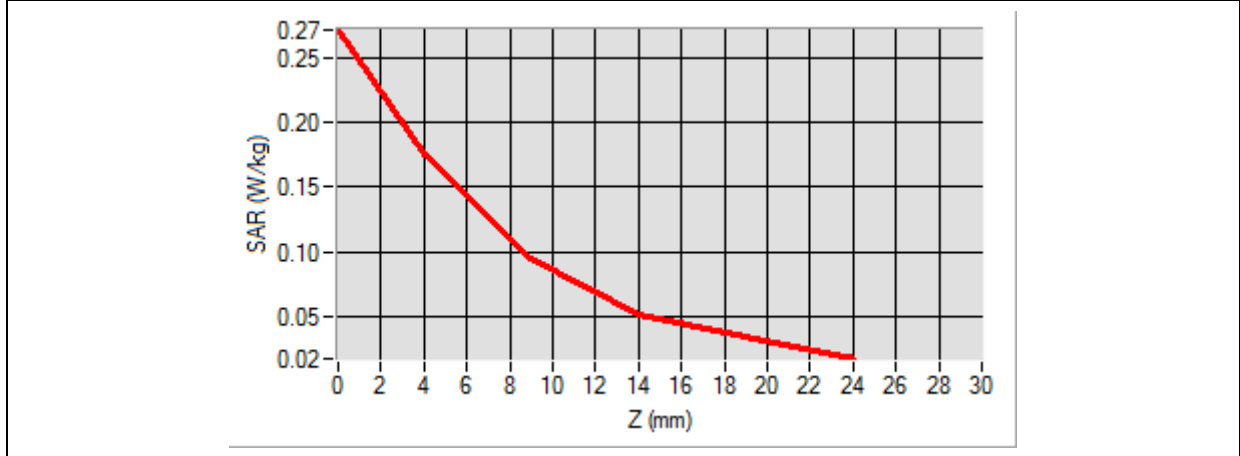

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A grid of small blue dots is overlaid on the top surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A 2D color map showing the hot spot position. The color gradient transitions from yellow to red, with the highest intensity (red) concentrated in a specific rectangular area.</p>

MEASUREMENT 147

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.163283
Ambient Temperature	21.1
Liquid Temperature	21.3

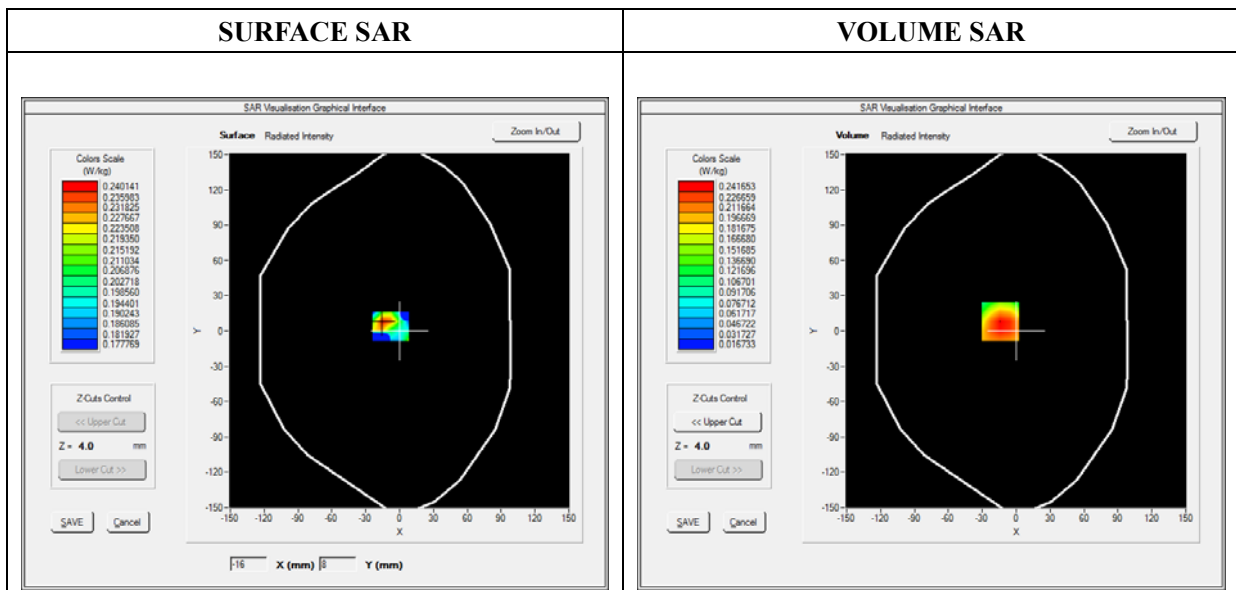


Maximum location: X=-14.00, Y=8.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.135908
SAR 1g (W/Kg)	0.232857

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3708	0.2417	0.1383	0.0794	0.0472

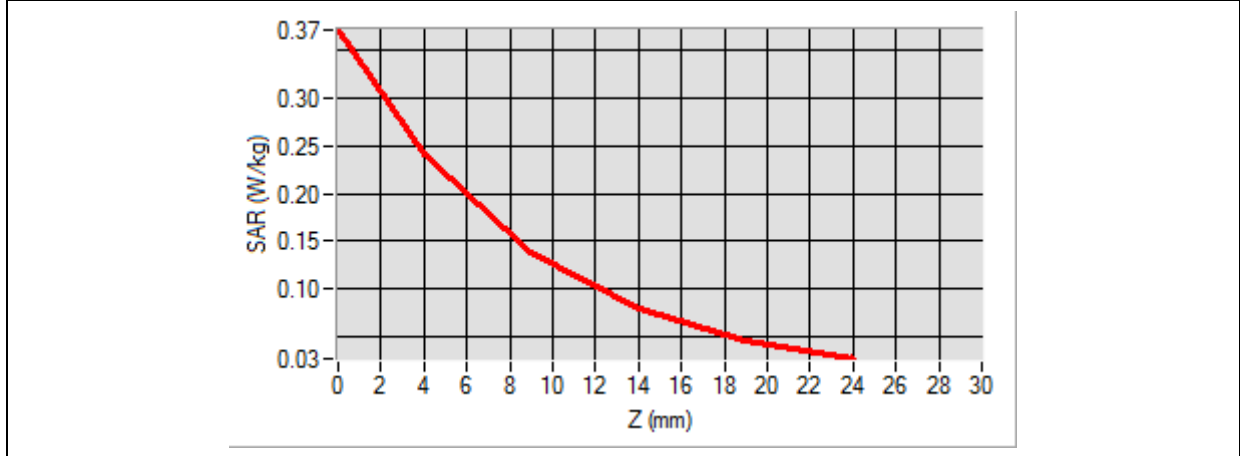

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A small area of the grid is highlighted with a color gradient from green to red, indicating the location of the maximum SAR exposure.</p>	<p>A 2D heatmap showing a rectangular area with a color gradient from red to yellow, representing the spatial distribution of the SAR exposure hot spot.</p>

MEASUREMENT 155

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Back
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1860.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

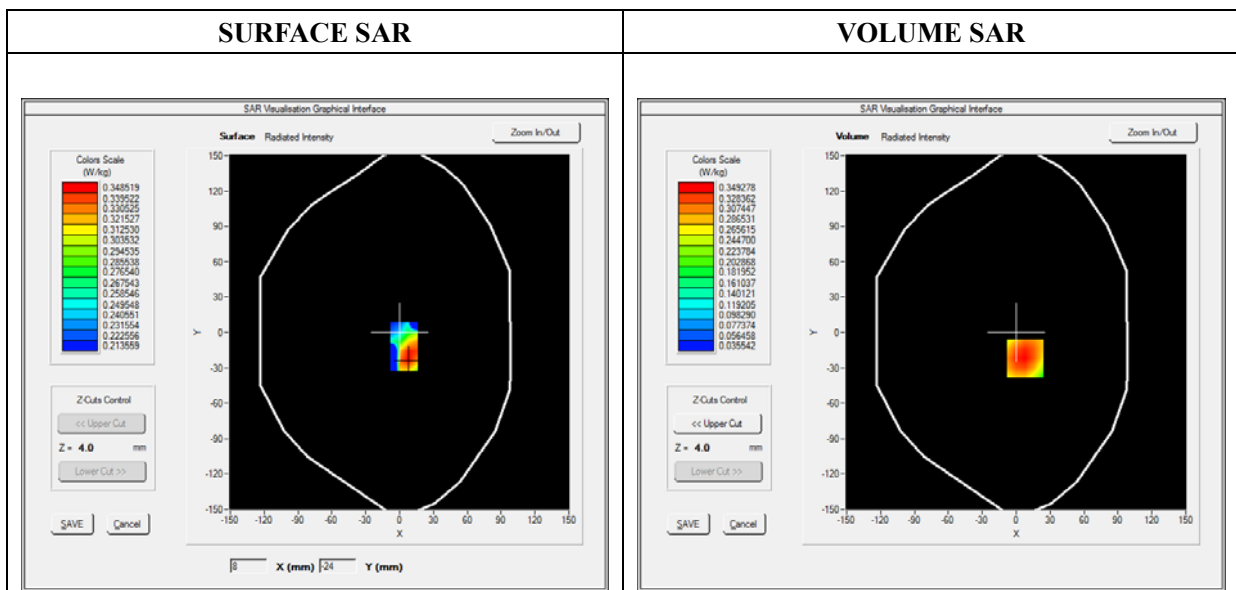


Maximum location: X=8.00, Y=-22.00

SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.209026
SAR 1g (W/Kg)	0.334349

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4998	0.3493	0.2205	0.1400	0.0906

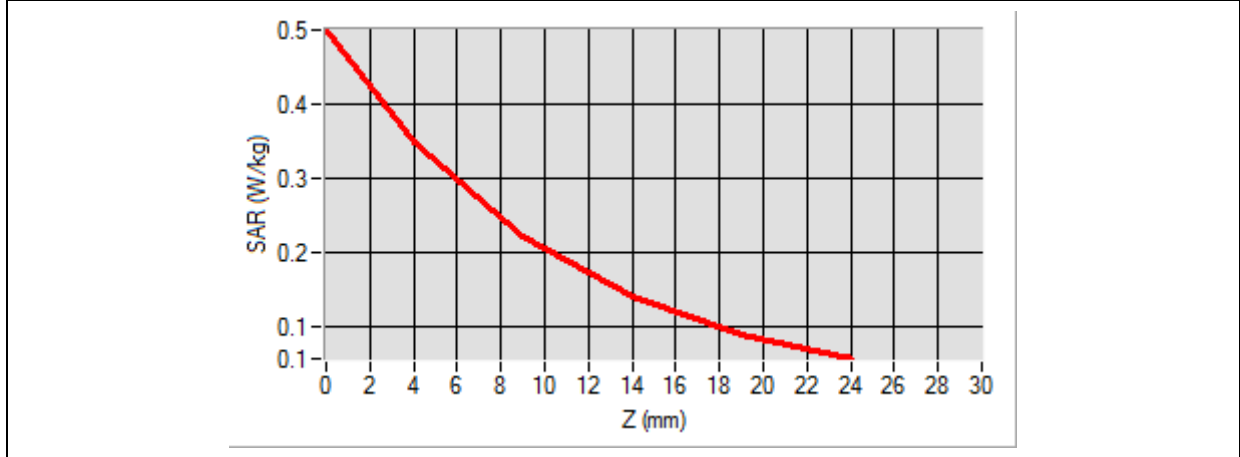

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A small area in the center of the grid is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A close-up view of the hot spot position, showing a color gradient from yellow to red, indicating the highest SAR value.</p>

MEASUREMENT 183

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Back
Band	LTE Band 25
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1860.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

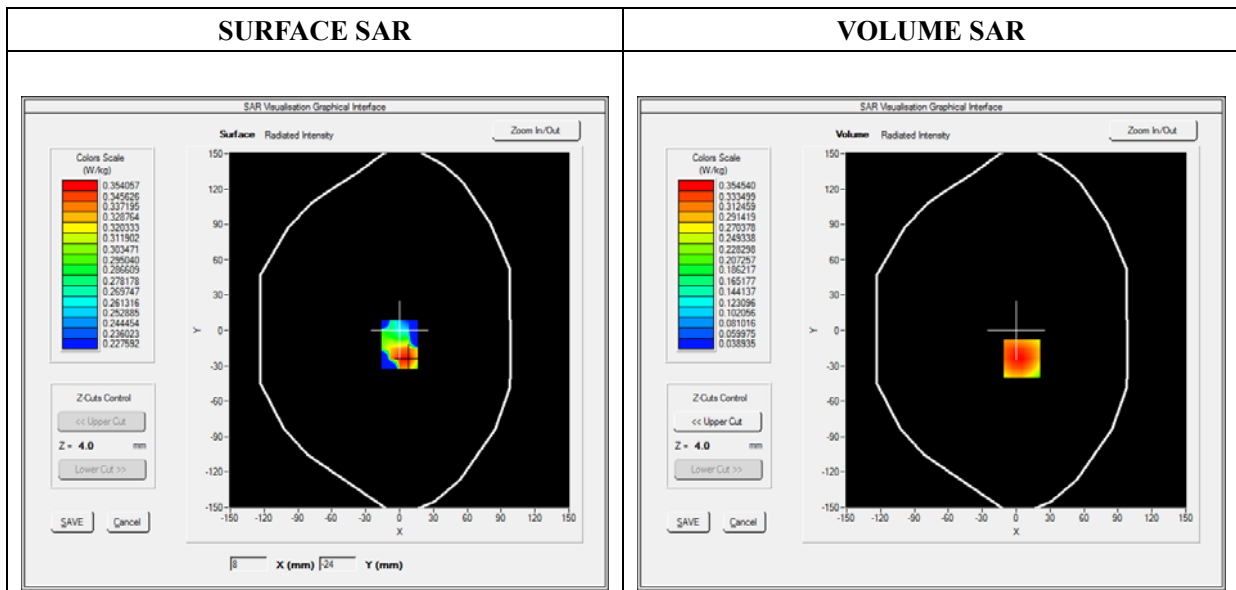


Maximum location: X=5.00, Y=-24.00

SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.214148
SAR 1g (W/Kg)	0.339663

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5033	0.3545	0.2259	0.1443	0.0934

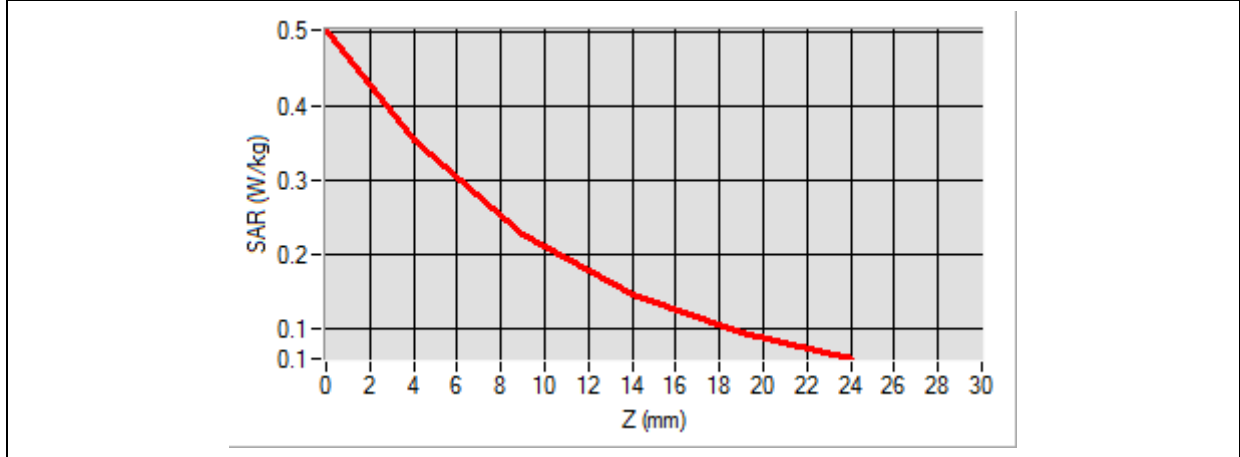

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A grid of small blue dots is overlaid on the device's surface. A small, localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A 3D visualization of the hot spot position, showing a localized area of high SAR exposure. The color gradient transitions from red (highest exposure) to yellow and then to orange, indicating the spatial distribution of the hot spot.</p>

MEASUREMENT 193

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 30
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2310.000000
Relative Permittivity (real part)	53.010212
Conductivity (S/m)	1.880255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

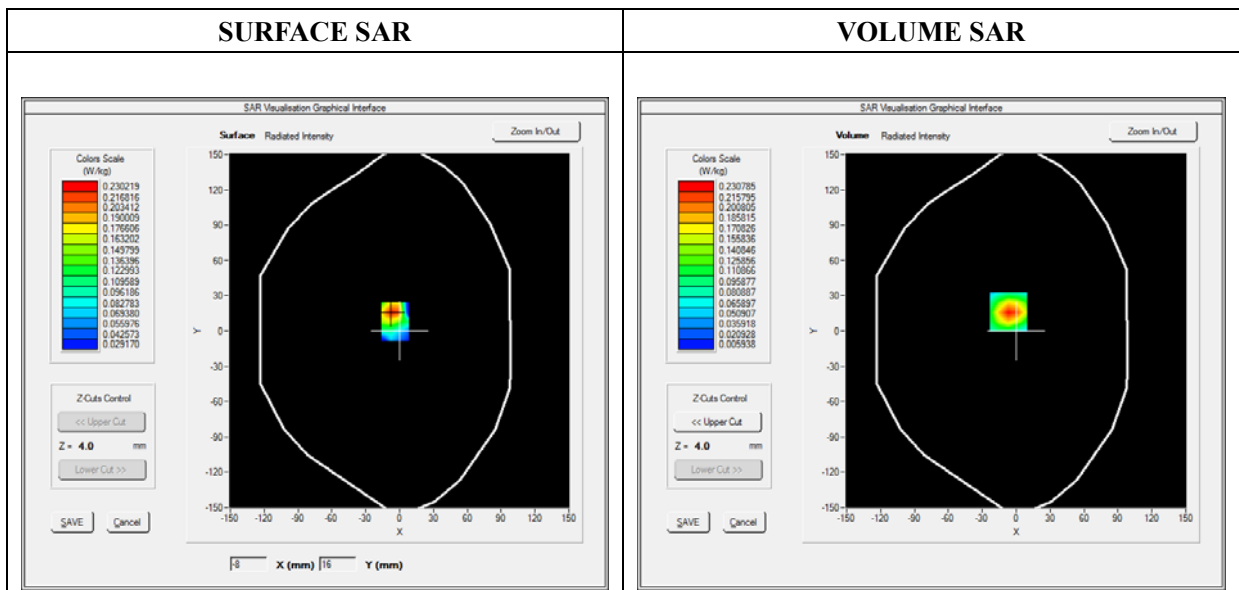


Maximum location: X=-7.00, Y=16.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.107170
SAR 1g (W/Kg)	0.213587

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3745	0.2308	0.1212	0.0631	0.0340

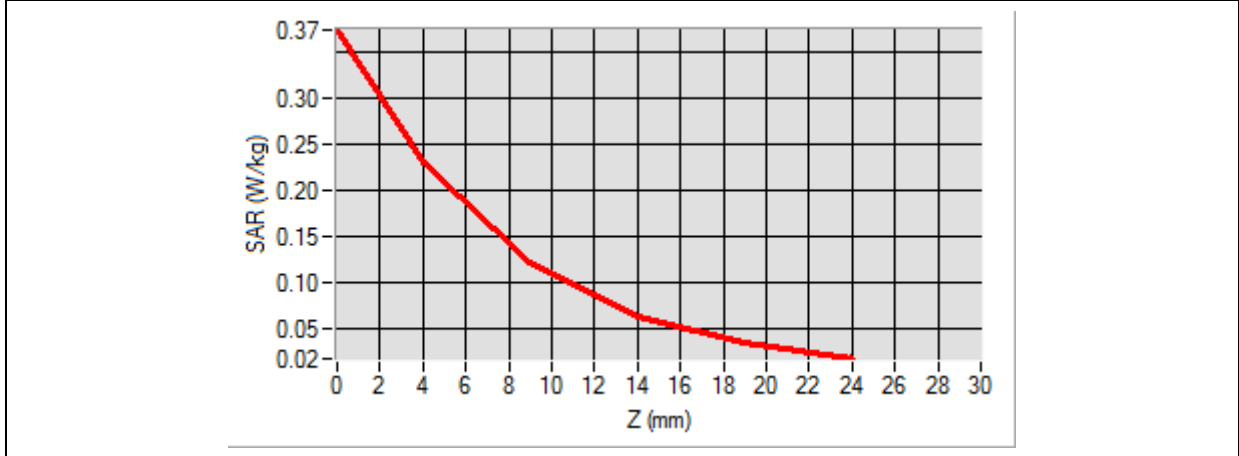

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A grid of small blue dots is overlaid on the device's surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A 3D visualization of the hot spot position, showing a color gradient from green (low SAR) to red (high SAR) on a rectangular prism shape.</p>

MEASUREMENT 197

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 40
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2350.000000
Relative Permittivity (real part)	53.010212
Conductivity (S/m)	1.880255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

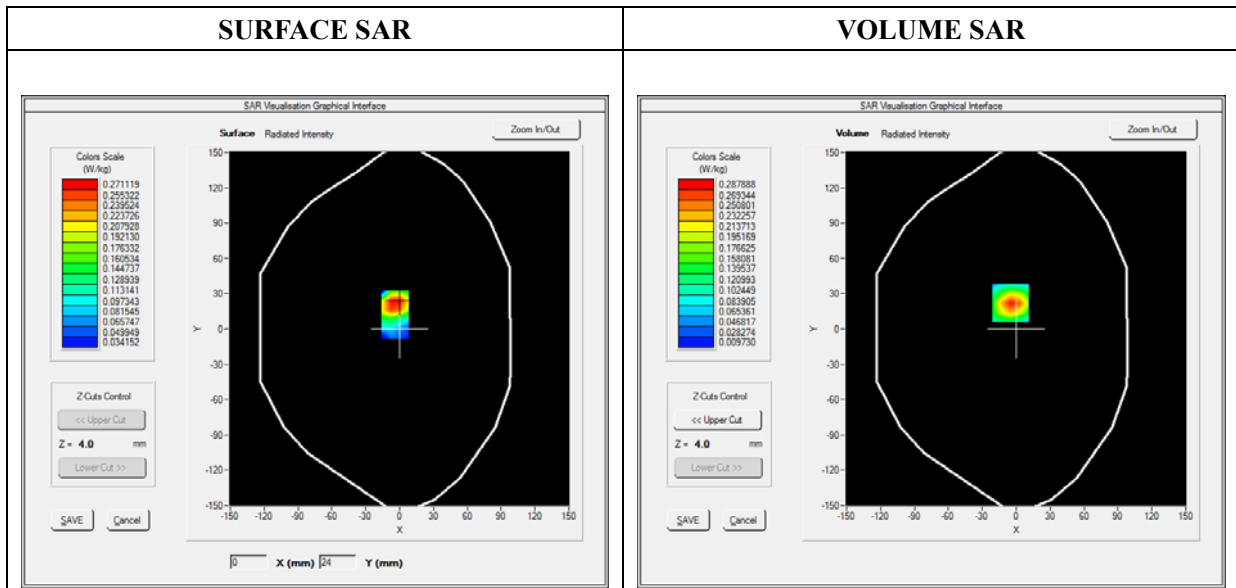


Maximum location: X=-5.00, Y=22.00

SAR Peak: 0.47 W/kg

SAR 10g (W/Kg)	0.132474
SAR 1g (W/Kg)	0.266953

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4709	0.2879	0.1496	0.0773	0.0418

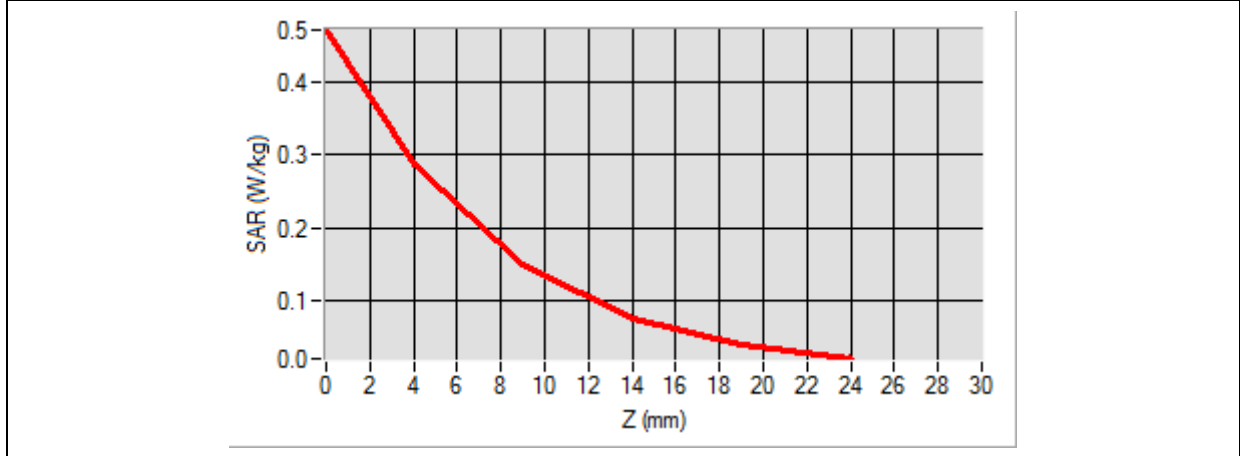

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A localized area of high SAR is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A 2D color-coded visualization of the hot spot, showing a rectangular area with a color gradient from green (low SAR) to red (high SAR), centered on the device's surface.</p>

MEASUREMENT 202

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 66
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1720.00000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

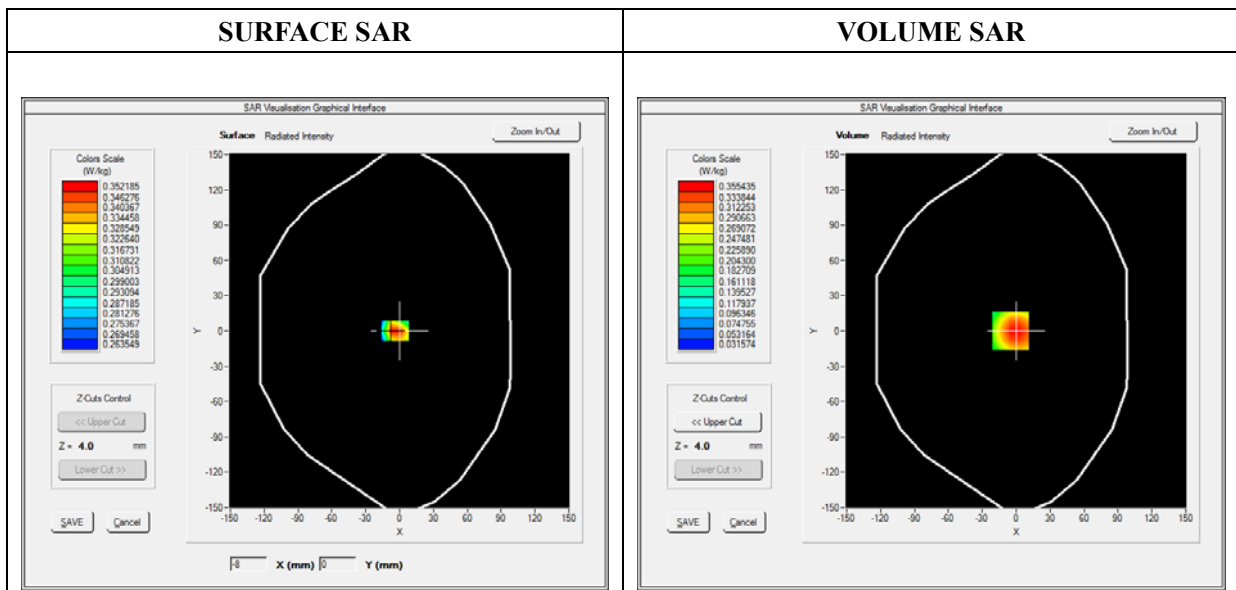


Maximum location: X=-5.00, Y=0.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.211483
SAR 1g (W/Kg)	0.342526

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7199	0.3554	0.1934	0.1381	0.0829

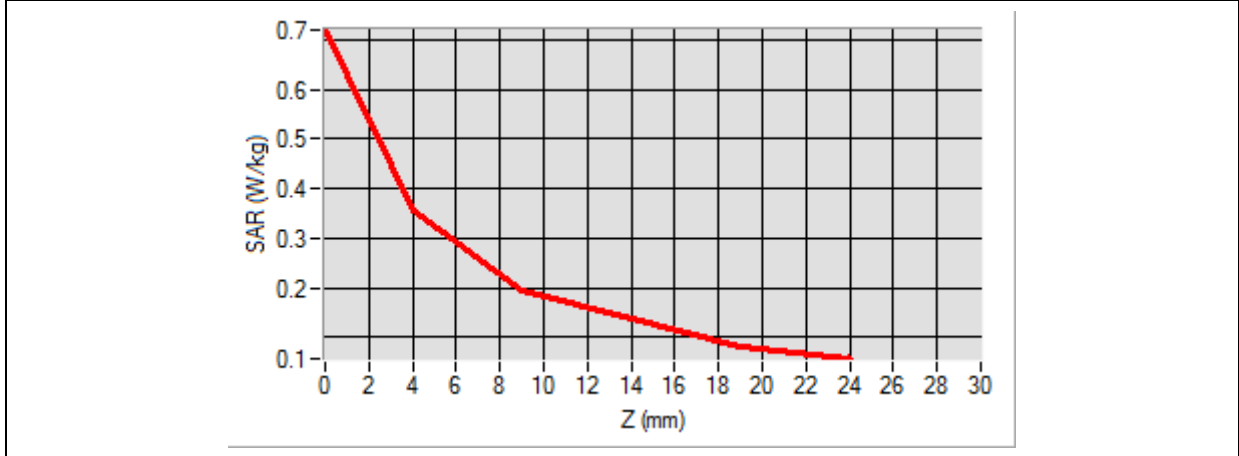

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A horizontal rectangular bar with a color gradient from red on the left to orange on the right, representing the hot spot position.</p>

MEASUREMENT 212

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WiFi(5.6GHz)_802.11 n (HT40)
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5590.000000
Relative Permittivity (real part)	35.301254
Conductivity (S/m)	5.210512
Power Variation (%)	0.848732
Ambient Temperature	22.0
Liquid Temperature	22.3

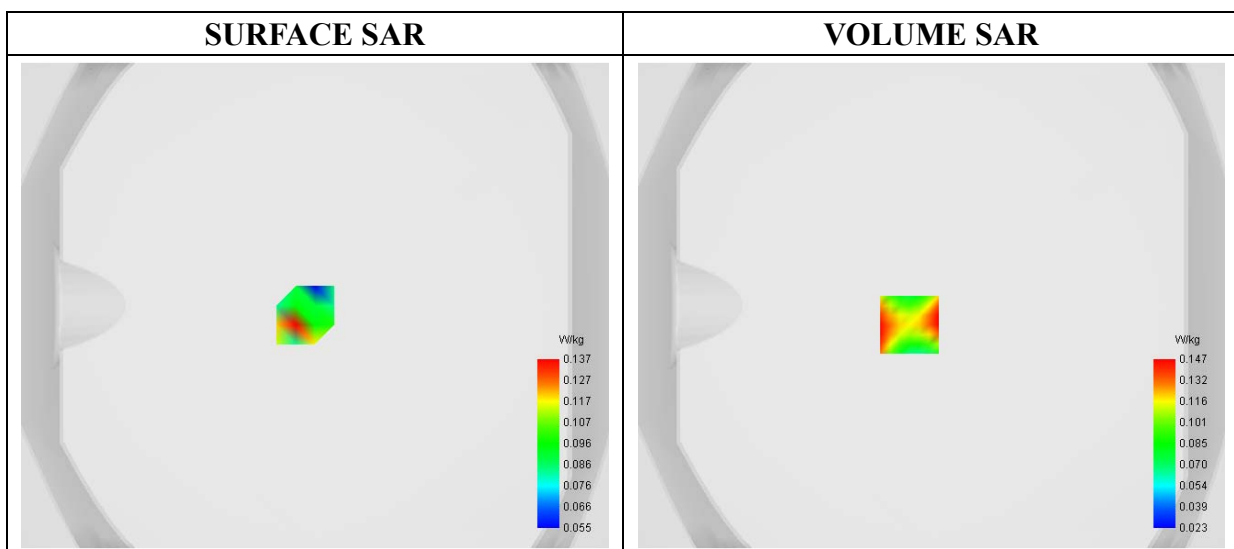

Maximum location: X=-9.00, Y=-8.00

SAR 10g (W/Kg)	0.108589
SAR 1g (W/Kg)	0.141956

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.2053	0.1471	0.1146	0.0620	0.0821	0.0413	0.0743	0.0484	0.0790	0.0790

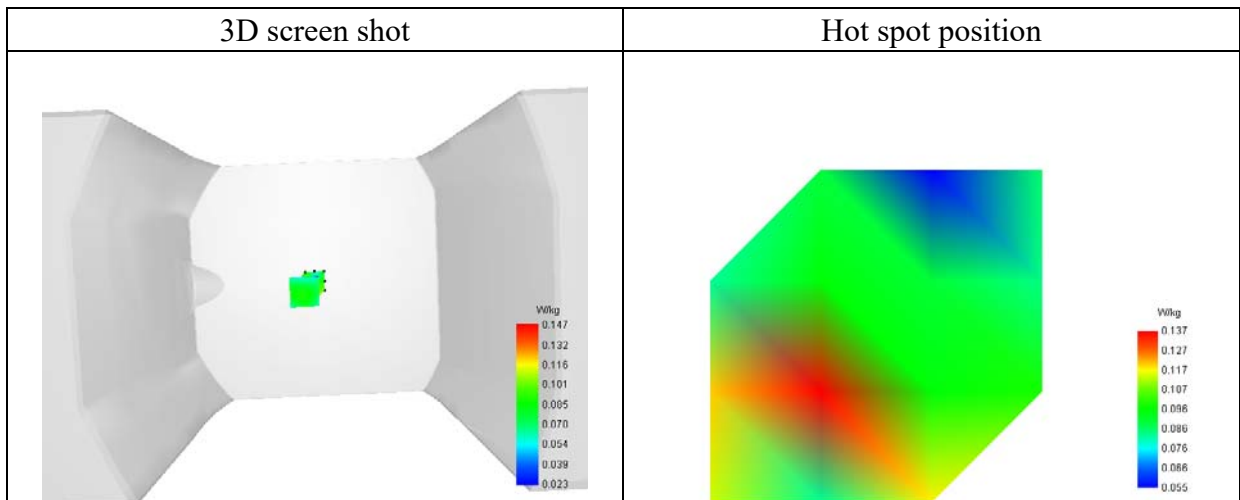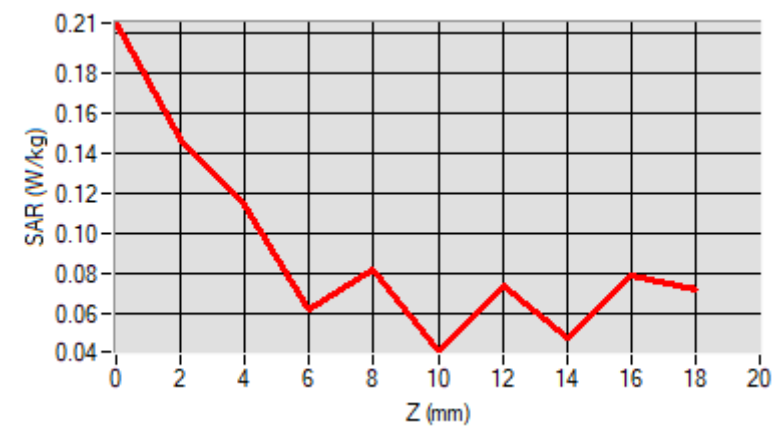

MEASUREMENT 213

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.8GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	35.301254
Power Variation (%)	5.210512
Ambient Temperature	22.0
Liquid Temperature	22.3

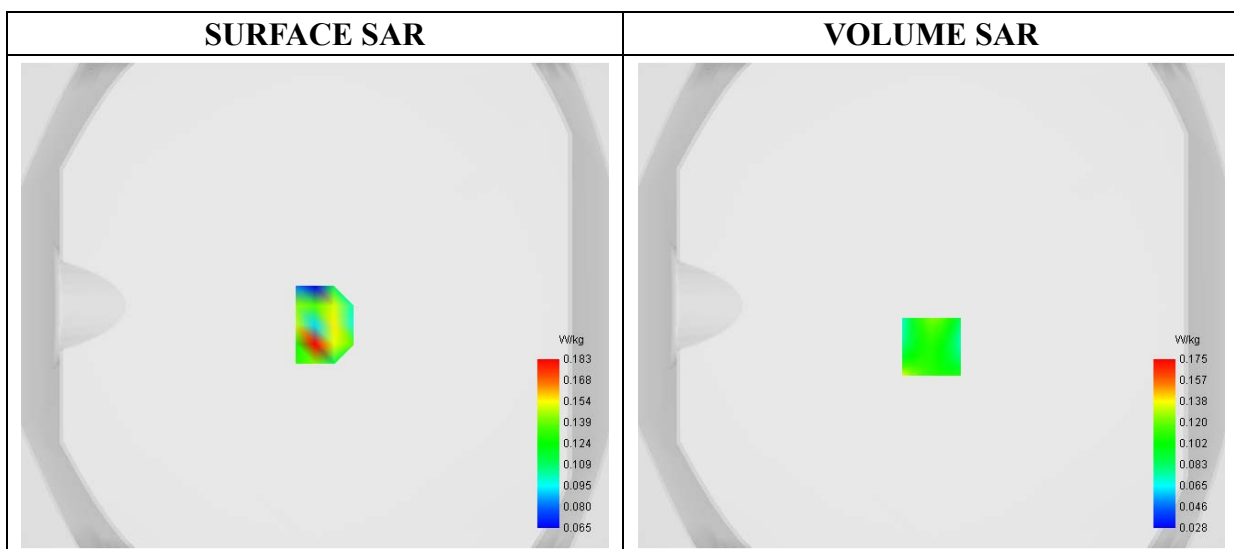

Maximum location: X=0.00, Y=-17.00

SAR 10g (W/Kg)	0.103713
SAR 1g (W/Kg)	0.137379

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.2463	0.1352	0.0874	0.0397	0.0914	0.0279	0.1024	0.0535	0.1052	0.1052

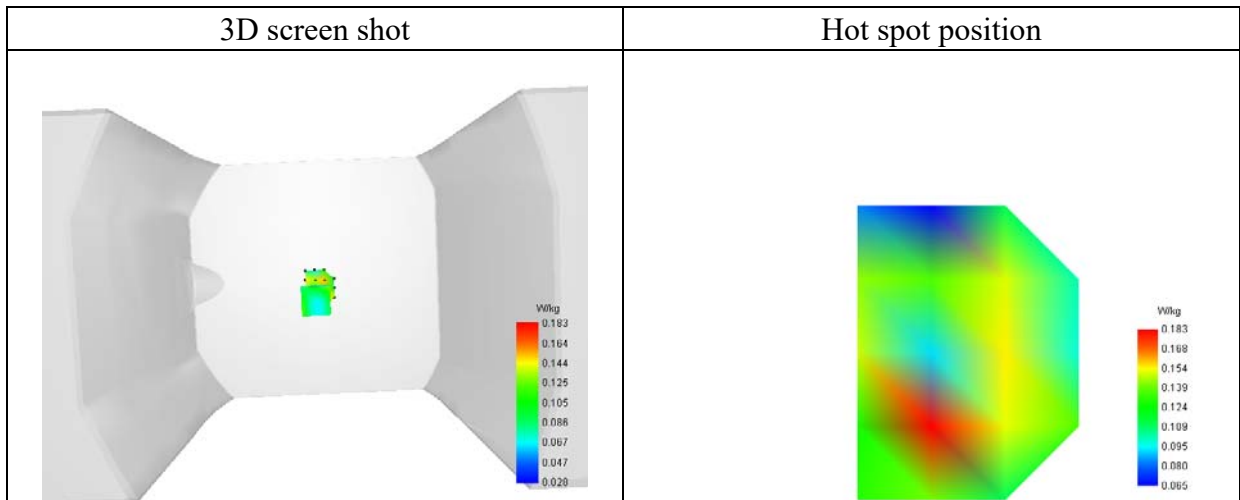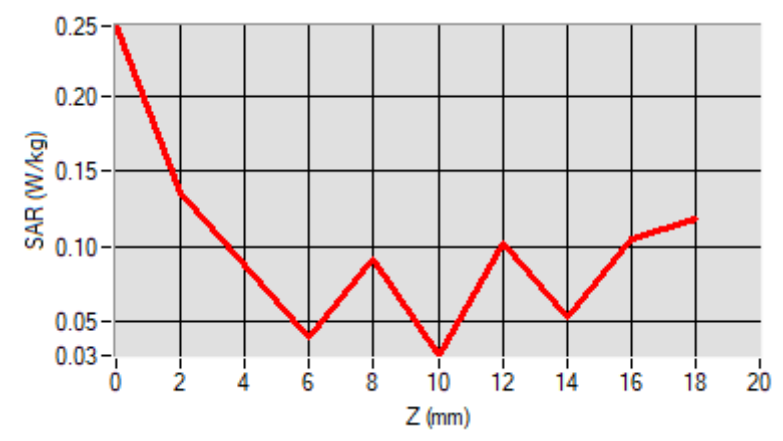

MEASUREMENT 215

Type: Phone measurement (Complete)

Date of measurement: 2020-10-22

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Back
Band	GPRS850_4TX
Channels	Middle
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	836.599976
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

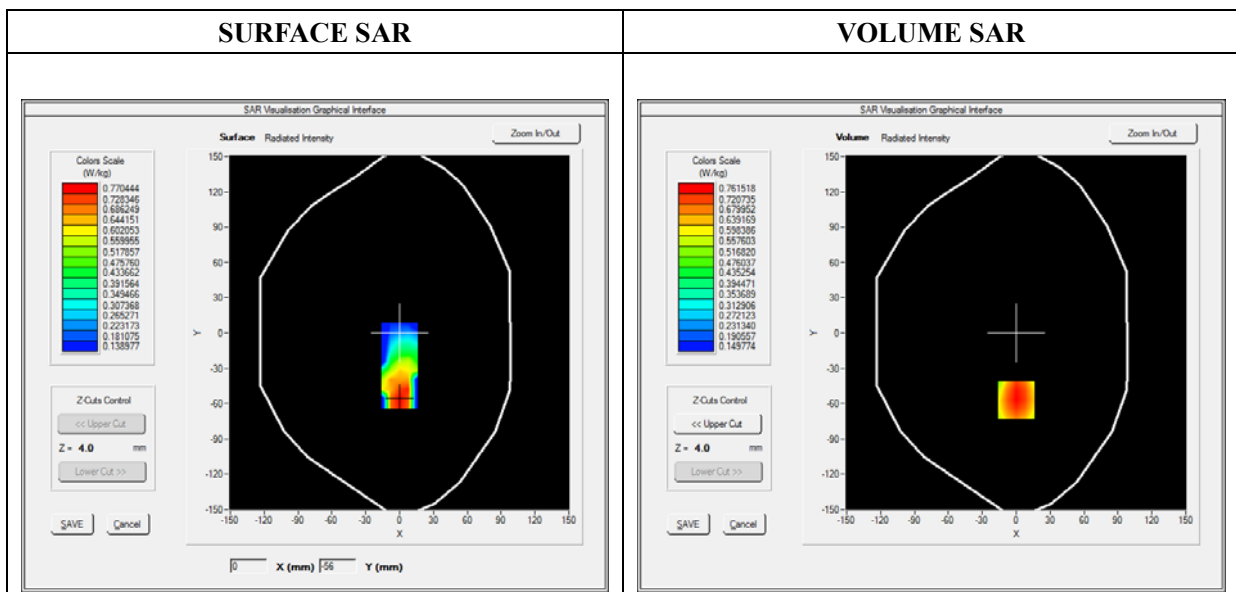


Maximum location: X=0.00, Y=-57.00

SAR Peak: 1.01 W/kg

SAR 10g (W/Kg)	0.513044
SAR 1g (W/Kg)	0.732741

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0001	0.7615	0.5457	0.4013	0.3058

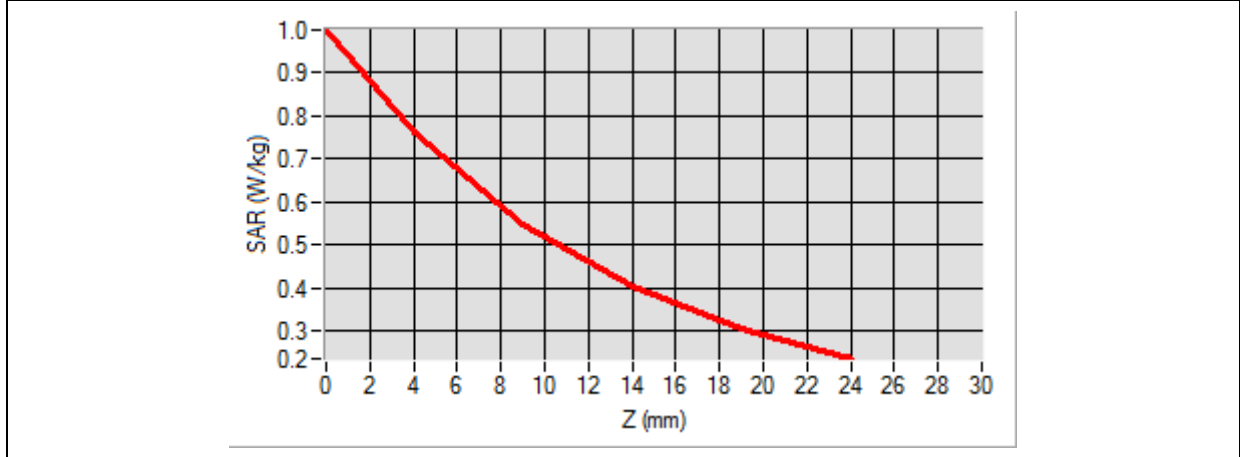

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A color-coded area (green, yellow, red) indicates the hot spot location.</p>	<p>A 2D color-coded diagram showing the hot spot position. The colors range from green (low SAR) to red (high SAR), with the highest intensity (red) at the bottom center of the device's footprint.</p>

MEASUREMENT 224

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Bottom
Band	GPRS1900_4TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

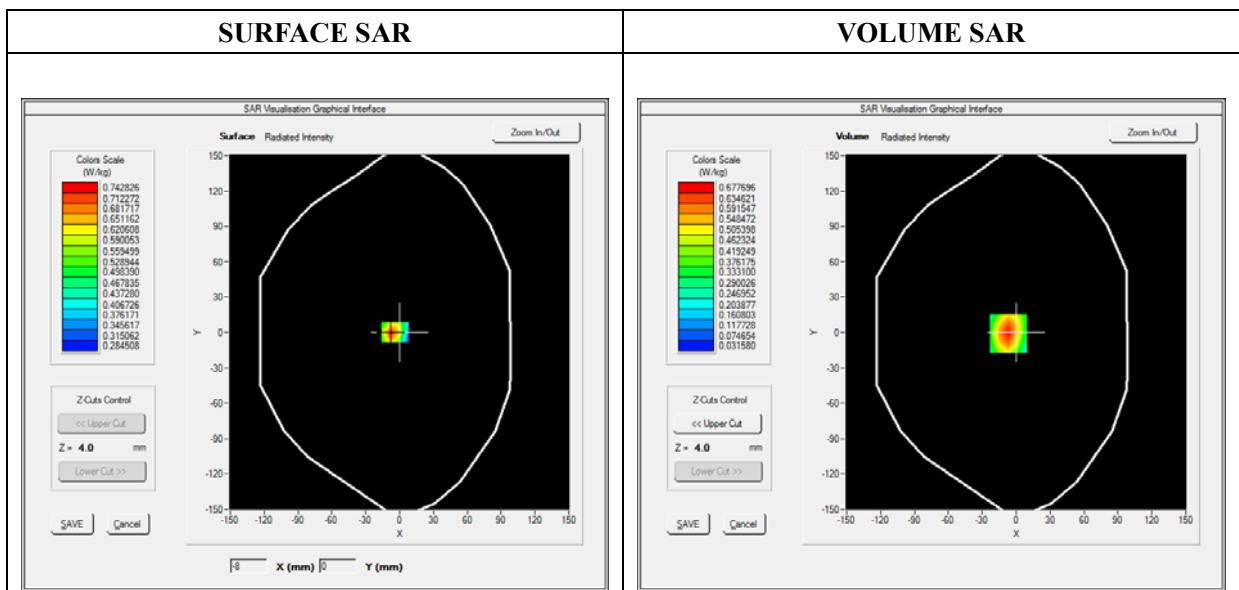


Maximum location: X=-7.00, Y=-1.00

SAR Peak: 1.08 W/kg

SAR 10g (W/Kg)	0.345347
SAR 1g (W/Kg)	0.636162

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0852	0.6777	0.3668	0.2023	0.1203

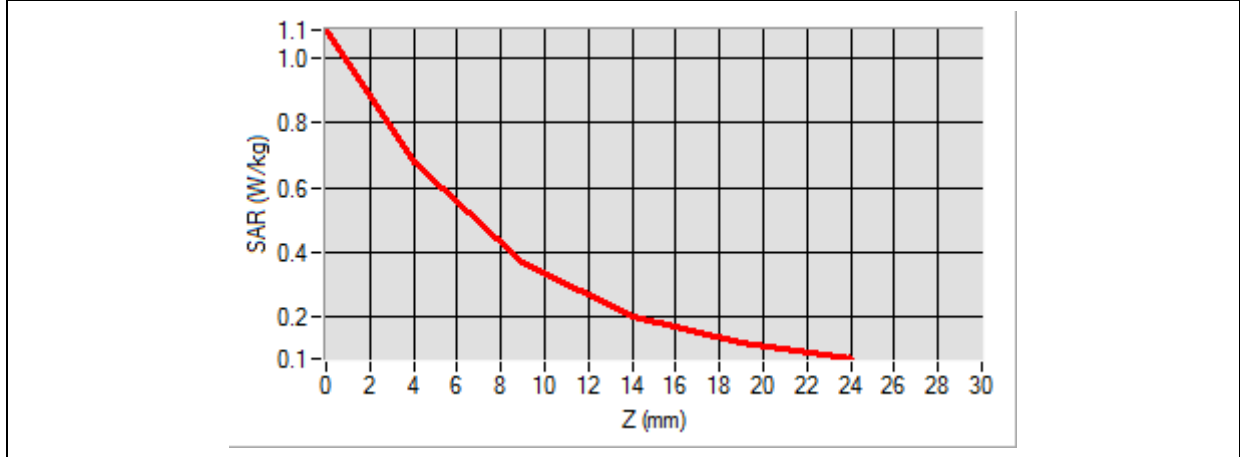

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its top surface. A small rectangular area in the center of the grid is highlighted in green and yellow, representing the hot spot location.</p>	<p>A 2D color-coded heatmap showing the hot spot position. The hot spot is represented by a rectangular area with a color gradient from red (highest intensity) to yellow (lower intensity).</p>

MEASUREMENT 229

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.163283
Ambient Temperature	21.1
Liquid Temperature	21.3

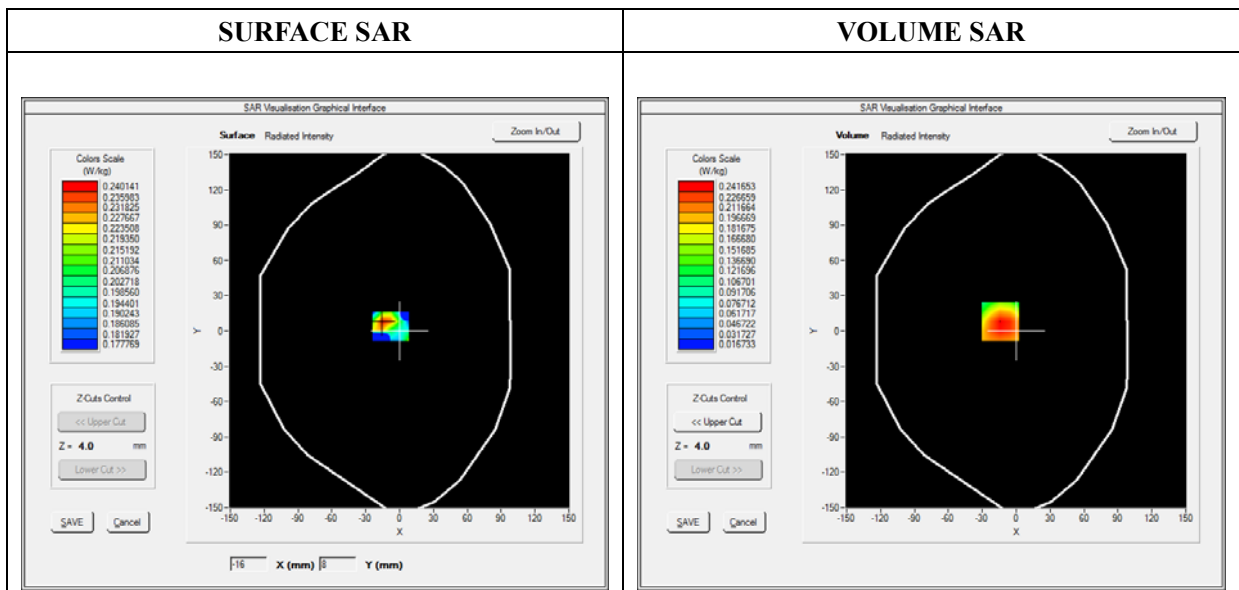


Maximum location: X=3.00, Y=2.00

SAR Peak: 0.78 W/kg

SAR 10g (W/Kg)	0.255781
SAR 1g (W/Kg)	0.465250

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7760	0.4964	0.2765	0.1545	0.0898

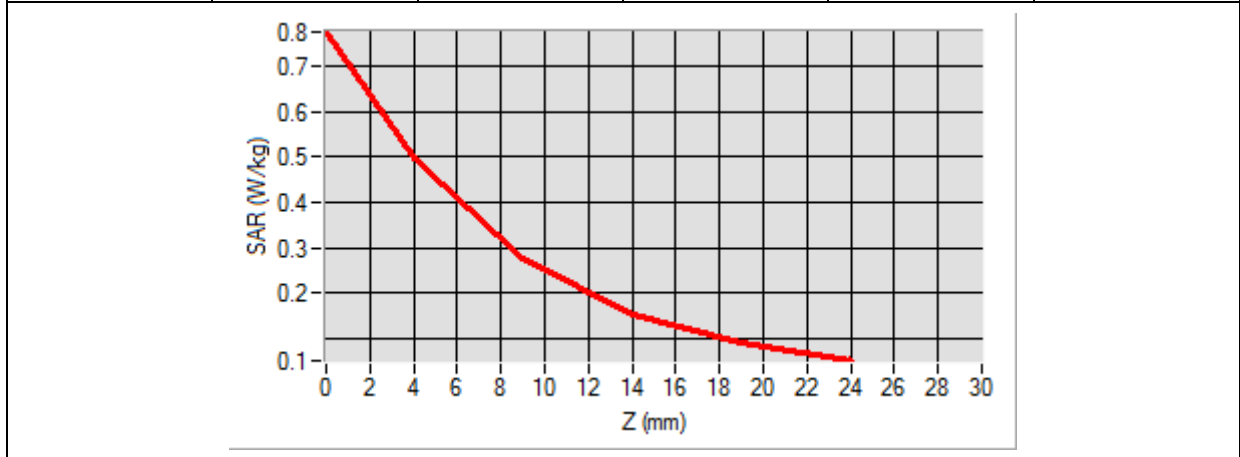

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A small area in the center of the grid is highlighted with a color gradient from green to yellow, indicating the hot spot location.</p>	<p>A rectangular color gradient bar, transitioning from yellow on the left to red on the right, representing the hot spot position.</p>

MEASUREMENT 150/231

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA1700_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1752.600000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

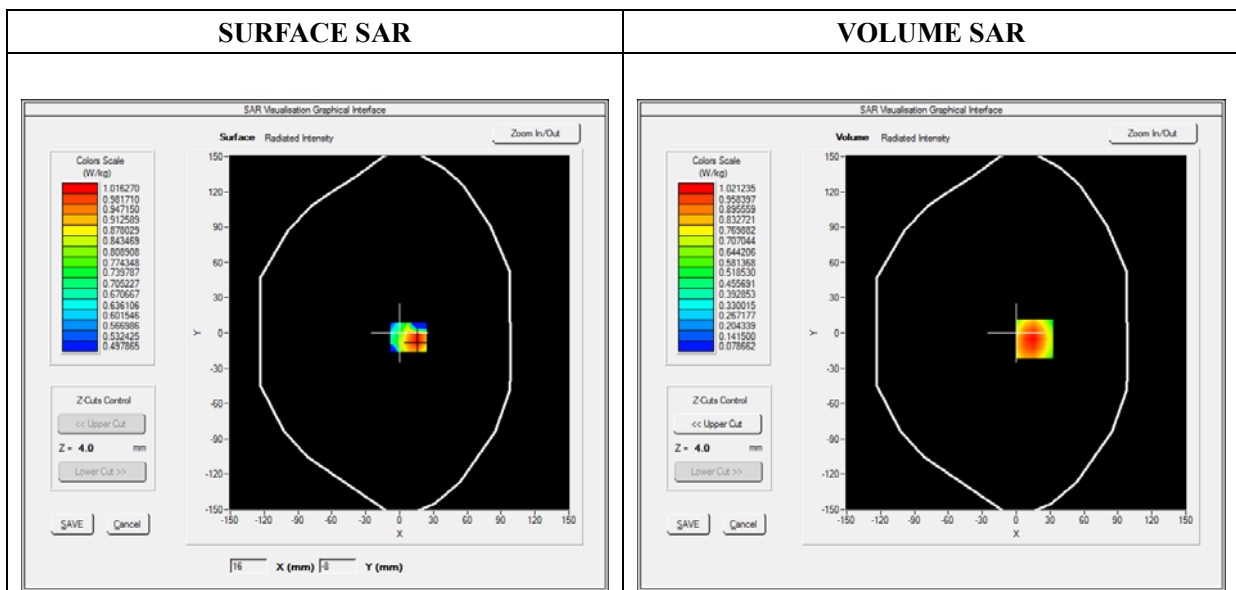


Maximum location: X=16.00, Y=-5.00

SAR Peak: 1.53 W/kg

SAR 10g (W/Kg)	0.584595
SAR 1g (W/Kg)	0.973909

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.5290	1.0212	0.6068	0.3644	0.2272

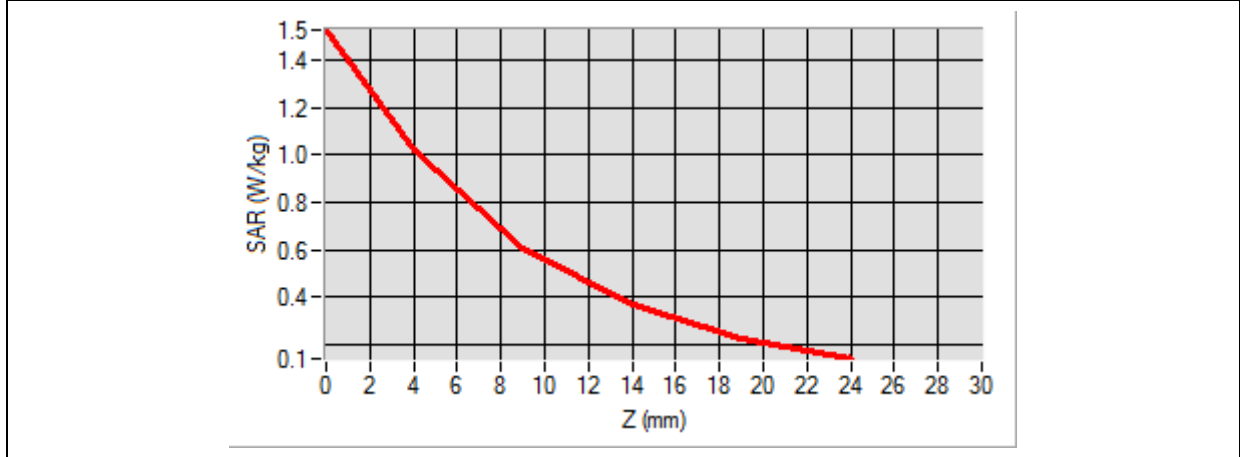

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of green dots on its top surface. A small area of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A 2D color-coded visualization of the hot spot, showing a gradient from yellow to red, indicating the intensity of the SAR exposure.</p>

MEASUREMENT 153/239

Type: Phone measurement (Complete)

Date of measurement: 2020-10-22

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	2.341234
Ambient Temperature	21.1
Liquid Temperature	21.3

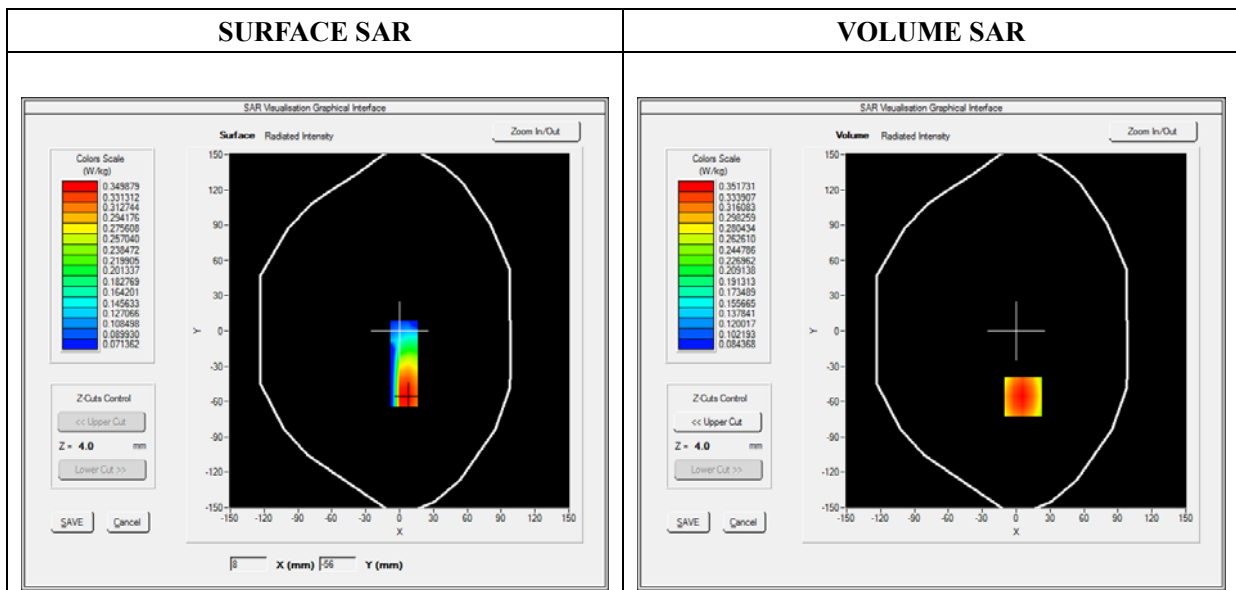


Maximum location: X=6.00, Y=-56.00

SAR Peak: 0.44 W/kg

SAR 10g (W/Kg)	0.246092
SAR 1g (W/Kg)	0.340656

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4395	0.3517	0.2657	0.2016	0.1536

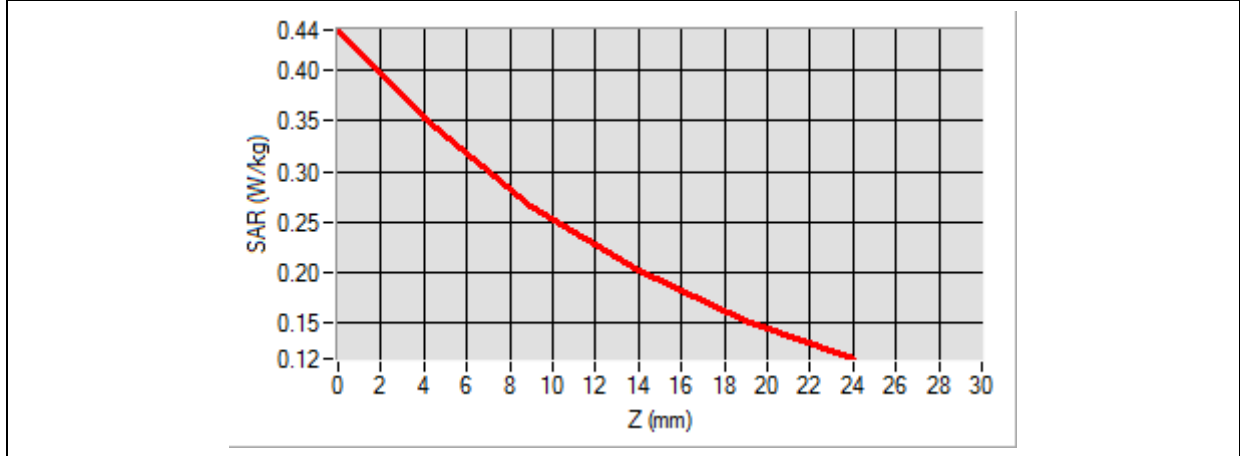

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A grid of small blue dots is overlaid on the top surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A 2D color-coded visualization of the hot spot. It shows a rectangular area with a color gradient from green at the top to red at the bottom, representing the intensity of the SAR exposure.</p>

MEASUREMENT 248

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Bottom
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1860.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

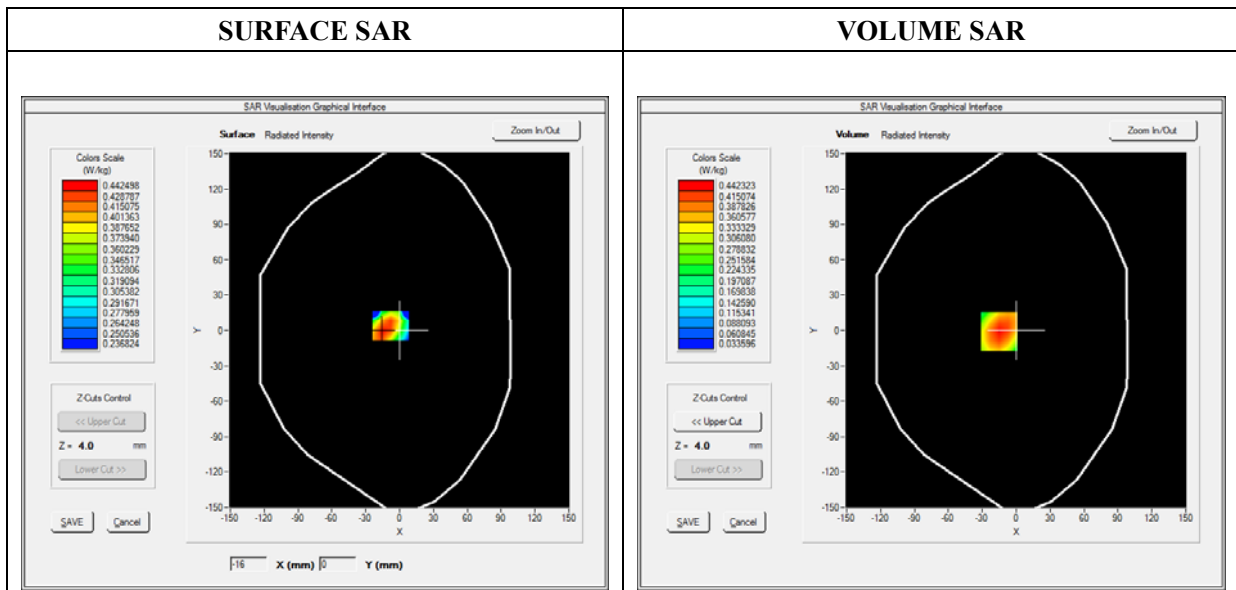


Maximum location: X=-15.00, Y=-1.00

SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.252415
SAR 1g (W/Kg)	0.420241

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6465	0.4423	0.2706	0.1657	0.1032

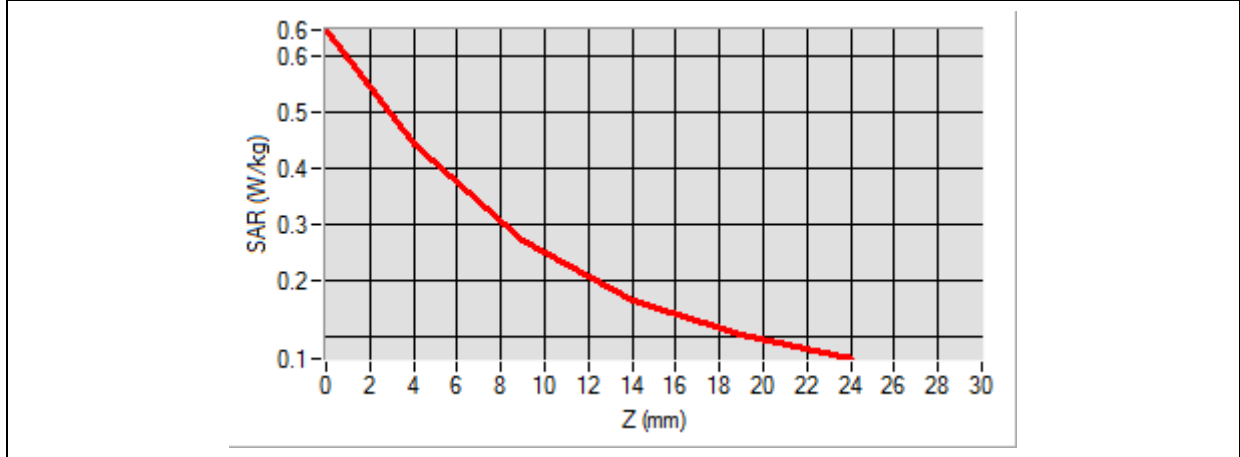

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its top surface. A localized area of high SAR is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A 2D heatmap showing the hot spot position. The hot spot is a rectangular area with a color gradient from red (high SAR) to yellow (lower SAR), centered on the device's top surface.</p>

MEASUREMENT 163/264

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

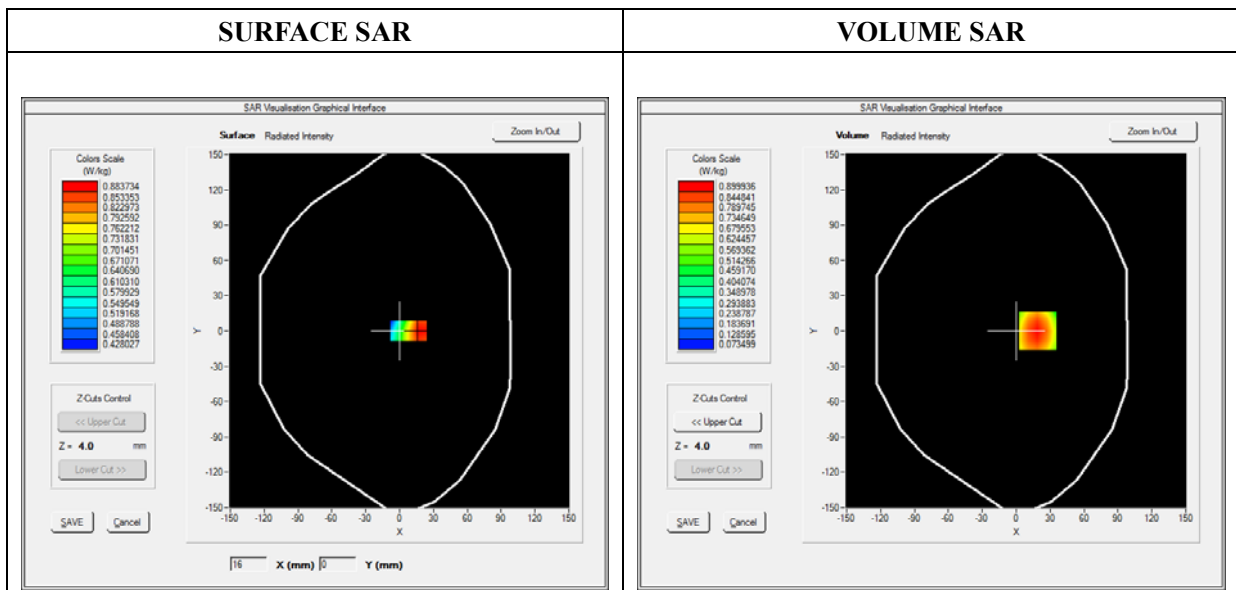


Maximum location: X=19.00, Y=0.00

SAR Peak: 1.34 W/kg

SAR 10g (W/Kg)	0.520791
SAR 1g (W/Kg)	0.857132

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.3371	0.8999	0.5405	0.3280	0.2061

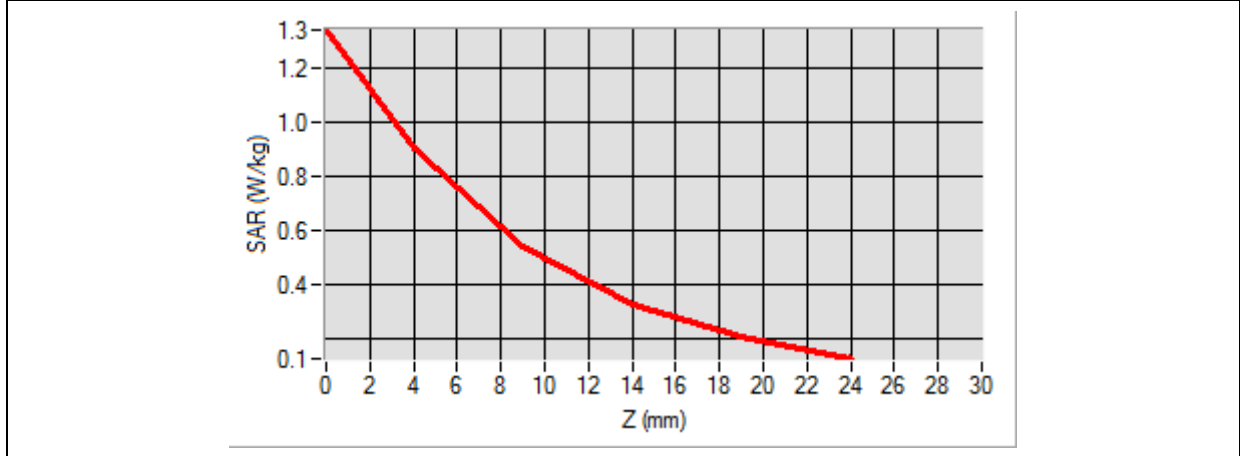

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A localized area of the grid is highlighted with a color gradient from yellow to red, indicating the hot spot position.</p>	<p>A horizontal color scale legend ranging from yellow on the left to red on the right, used to indicate the intensity of the hot spot.</p>

MEASUREMENT 165/266

Type: Phone measurement (Complete)

Date of measurement: 2020-10-22

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 5
Channels	QPSK, 10MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	829.000000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	1.210493
Ambient Temperature	21.1
Liquid Temperature	21.2

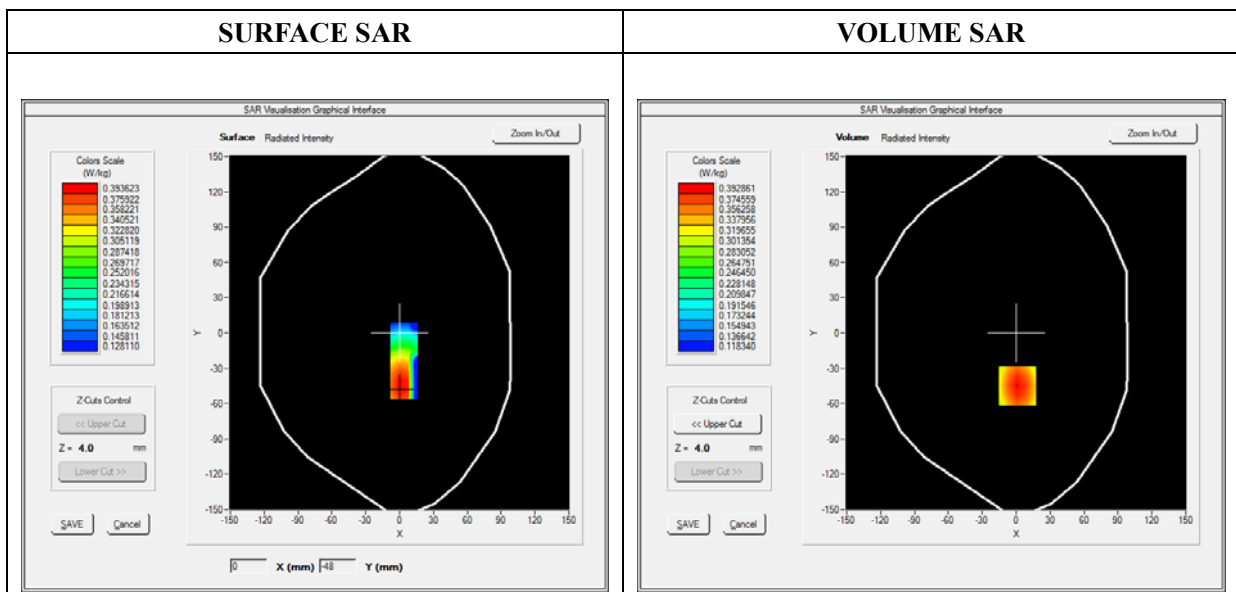


Maximum location: X=1.00, Y=-45.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.290228
SAR 1g (W/Kg)	0.381337

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4748	0.3929	0.3116	0.2504	0.2041

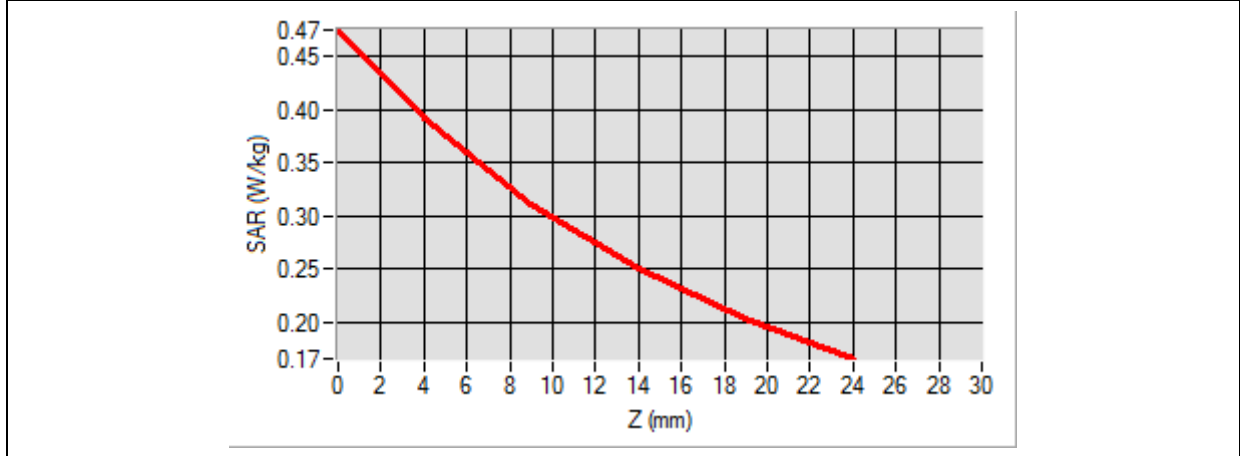

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of small blue dots on its surface. A localized area of the grid is highlighted with a color gradient from red to yellow, representing the hot spot.</p>	<p>A 2D color-coded diagram showing the hot spot position. The color gradient transitions from red at the bottom to yellow and green at the top, indicating the intensity of the SAR exposure.</p>

MEASUREMENT 174/287

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

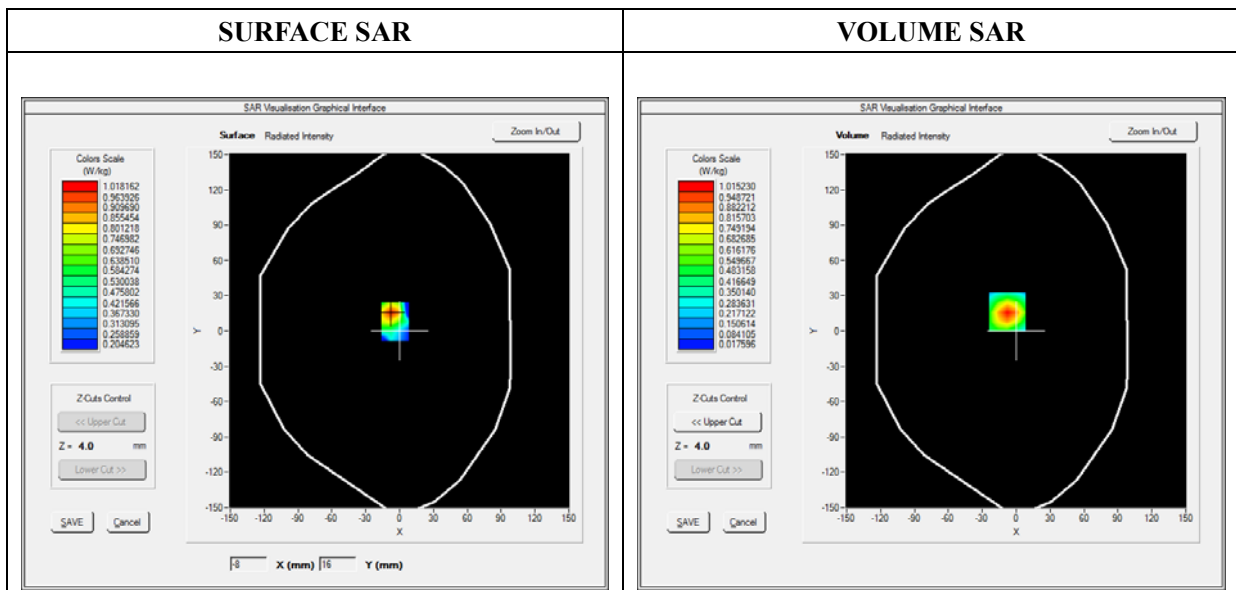


Maximum location: X=-8.00, Y=16.00

SAR Peak: 1.73 W/kg

SAR 10g (W/Kg)	0.456586
SAR 1g (W/Kg)	0.941416

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.7185	1.0152	0.4994	0.2419	0.1231

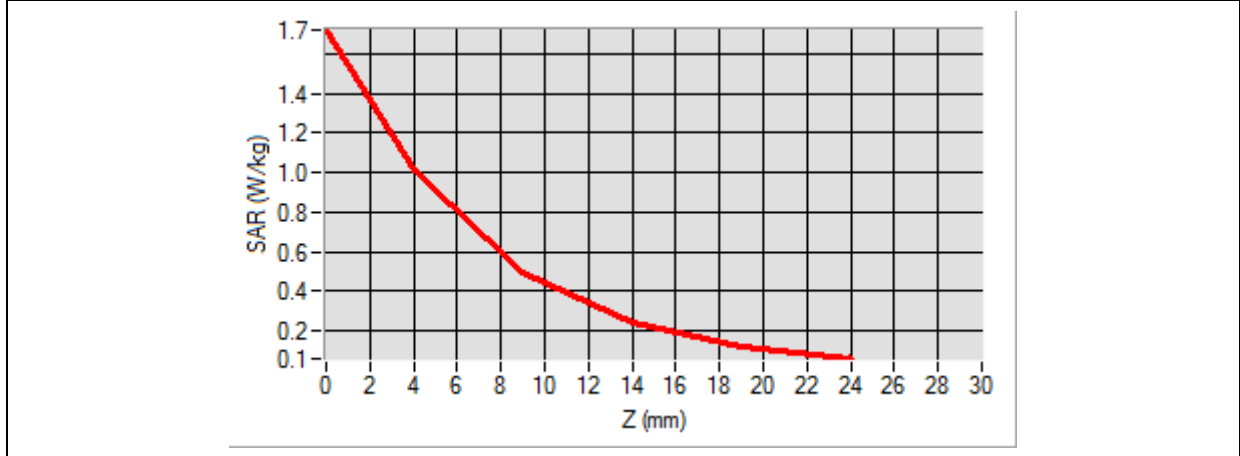

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A small area of the grid is highlighted with a color gradient from green to red, indicating the location of the maximum SAR (hot spot).</p>	<p>A 3D visualization of the hot spot position, showing a color gradient from green to red, indicating the location of the maximum SAR.</p>

MEASUREMENT 175/288

Type: Phone measurement (Complete)

Date of measurement: 2020-10-22

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 12
Channels	QPSK, 10MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	704.000000
Relative Permittivity (real part)	55.851214
Conductivity (S/m)	0.941454
Power Variation (%)	1.210493
Ambient Temperature	21.1
Liquid Temperature	21.2

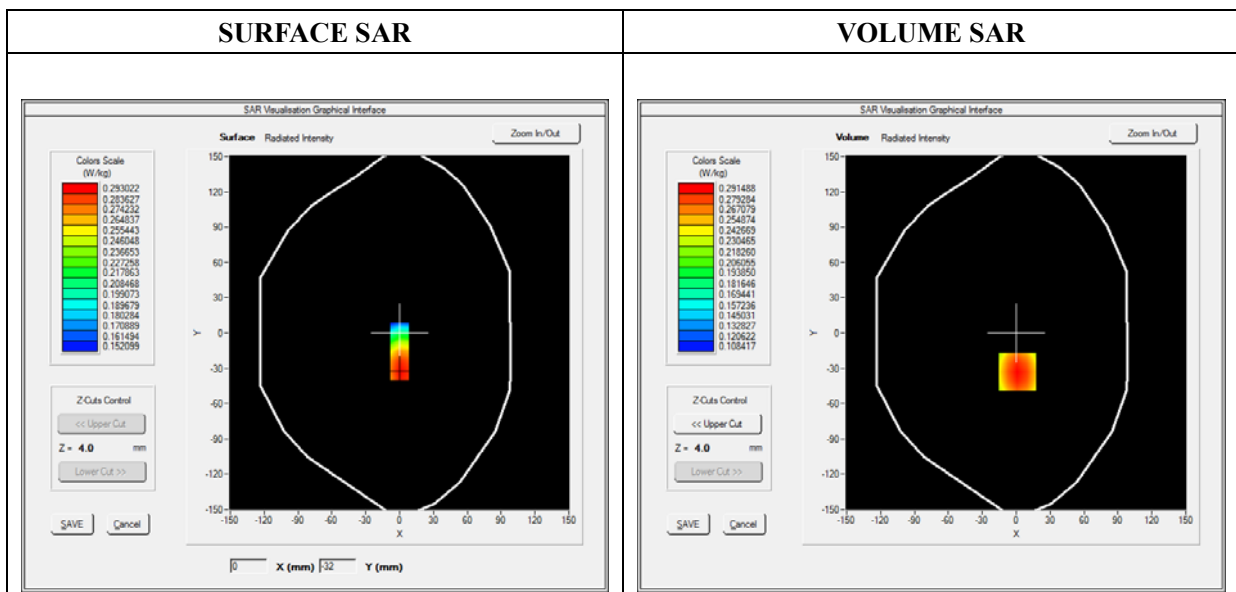

Maximum location: X=1.00, Y=-33.00

SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.240260
SAR 1g (W/Kg)	0.299706

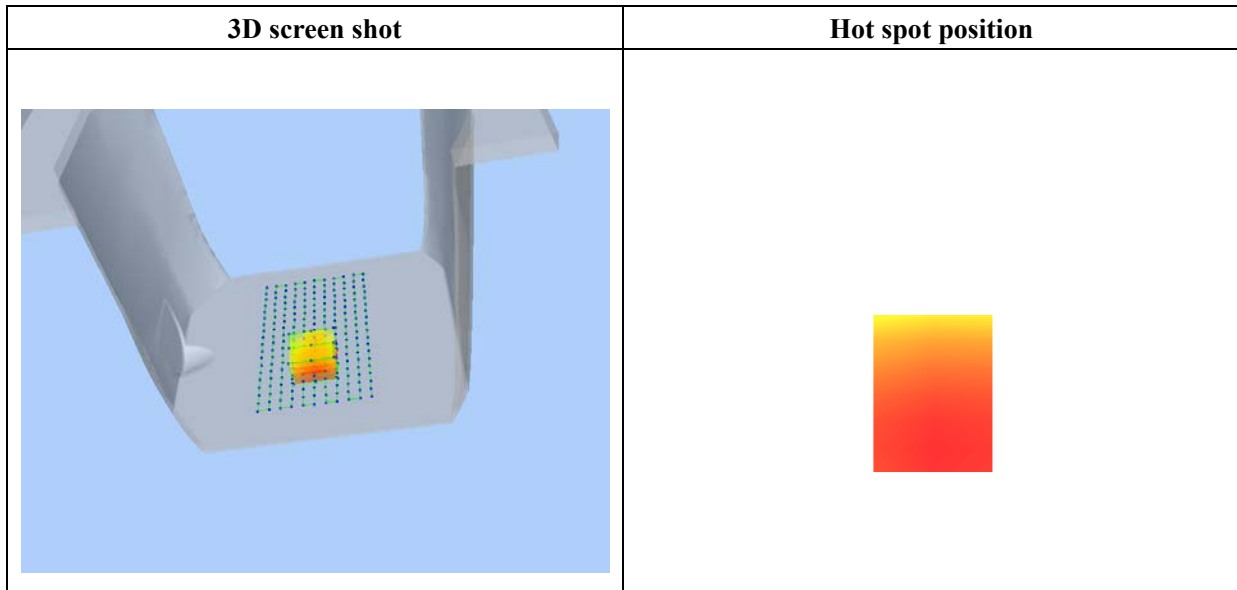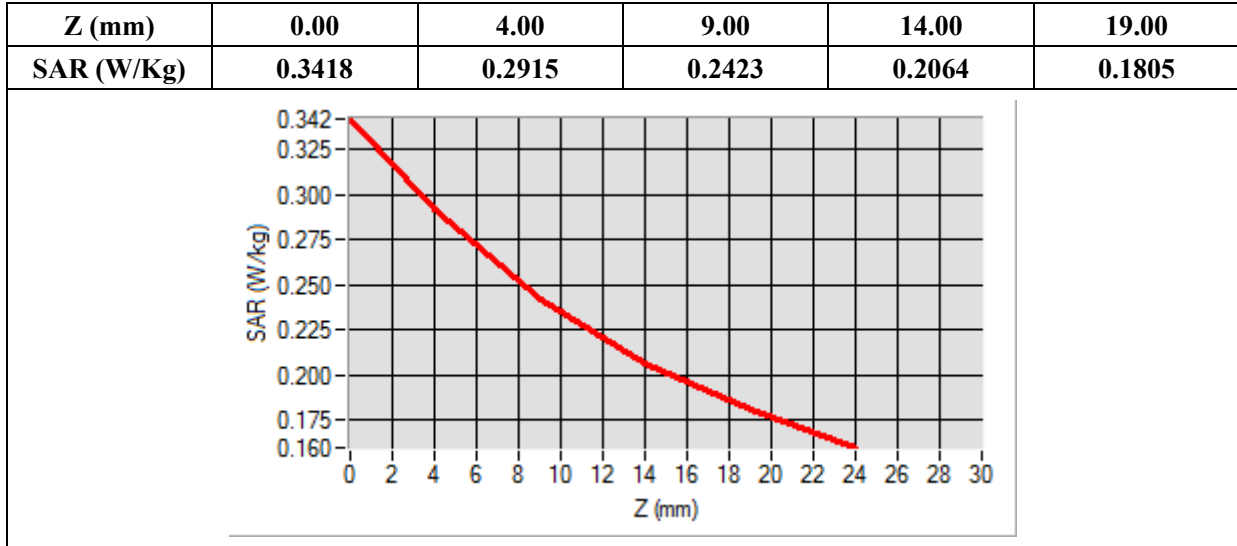

MEASUREMENT 179/298

Type: Phone measurement (Complete)

Date of measurement: 2020-10-22

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 13
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	782.000000
Relative Permittivity (real part)	55.451214
Conductivity (S/m)	0.948454
Power Variation (%)	1.210493
Ambient Temperature	21.1
Liquid Temperature	21.2

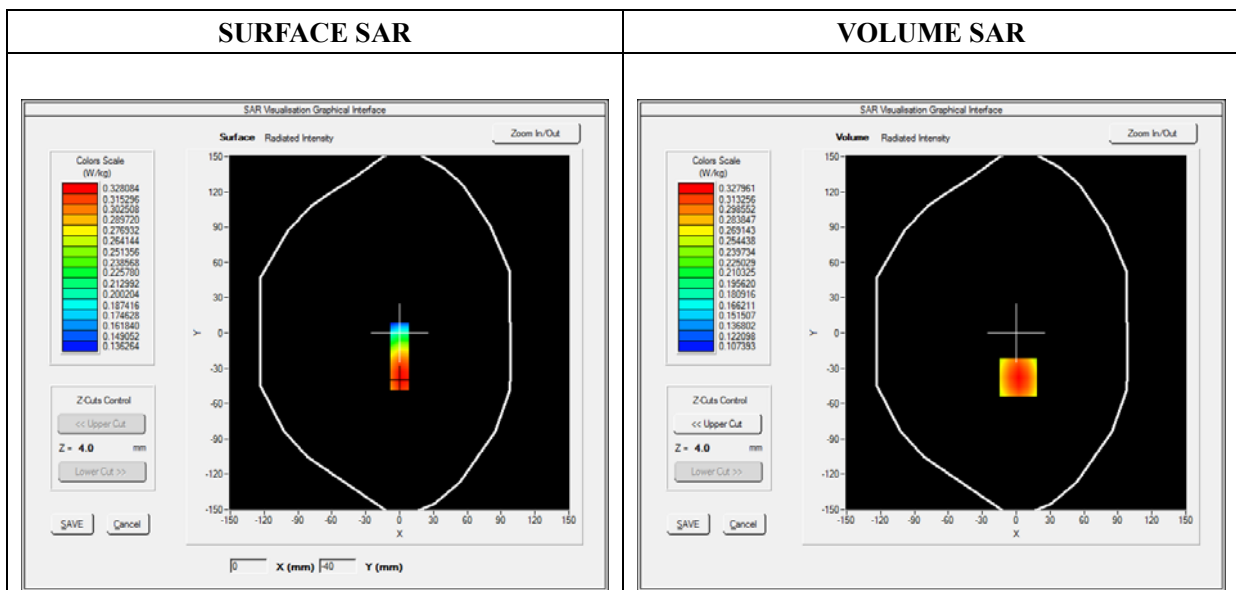


Maximum location: X=2.00, Y=-38.00

SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.256059
SAR 1g (W/Kg)	0.335824

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4055	0.3280	0.2567	0.2092	0.1783

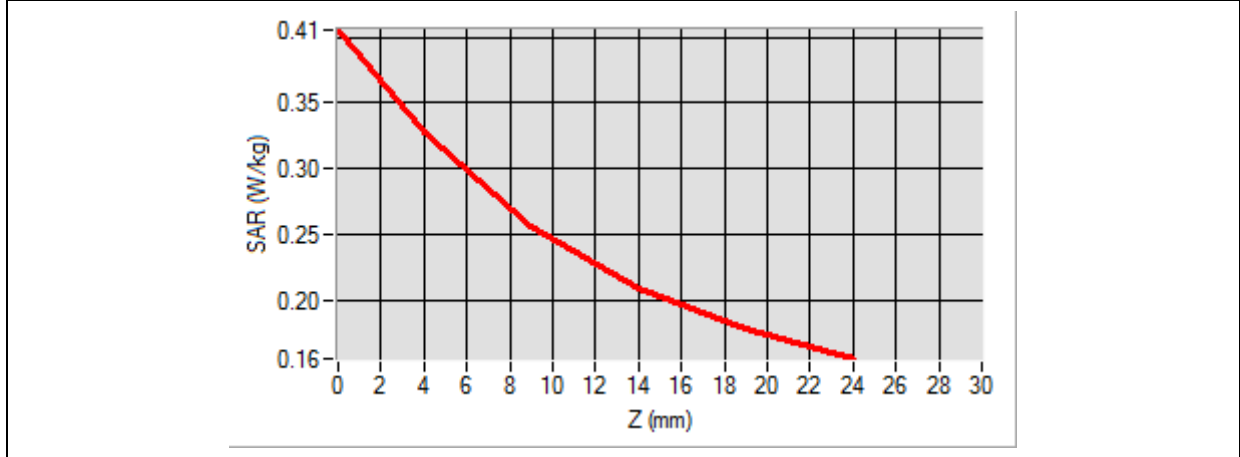

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A grid of small blue dots is overlaid on the device's surface. A localized area of the grid is highlighted with a color gradient from yellow to red, indicating the hot spot position.</p>	<p>A vertical rectangular bar with a color gradient from yellow at the top to red at the bottom, representing the hot spot position.</p>

MEASUREMENT 312

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Bottom
Band	LTE Band 25
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1860.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

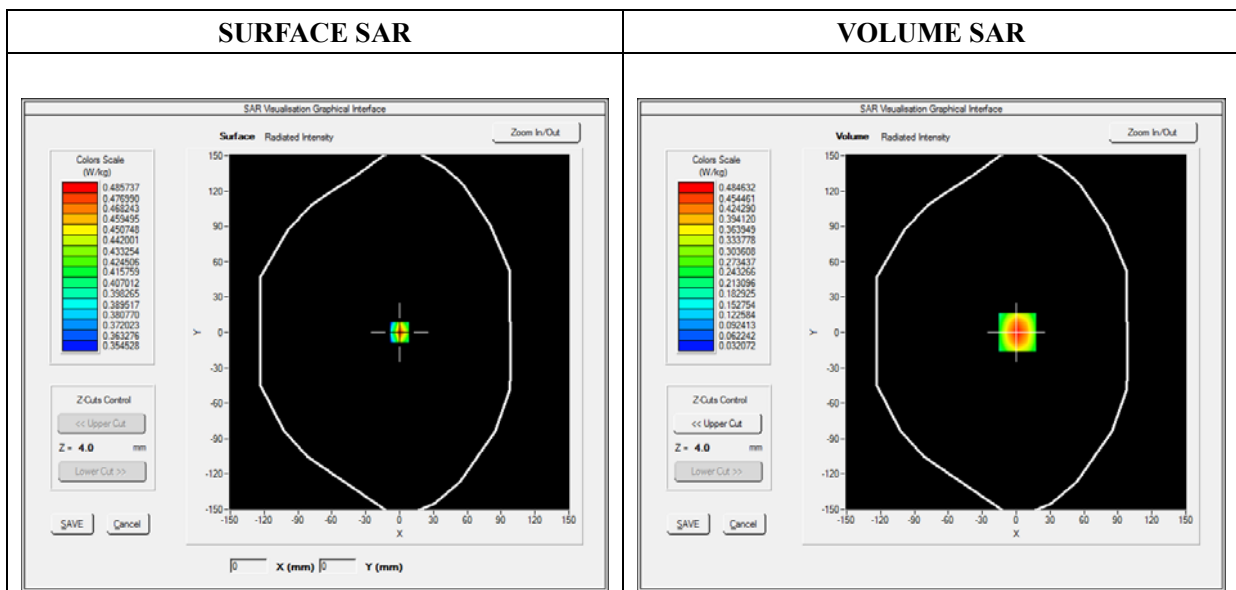


Maximum location: X=1.00, Y=0.00

SAR Peak: 0.75 W/kg

SAR 10g (W/Kg)	0.251793
SAR 1g (W/Kg)	0.454738

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7550	0.4846	0.2718	0.1536	0.0908

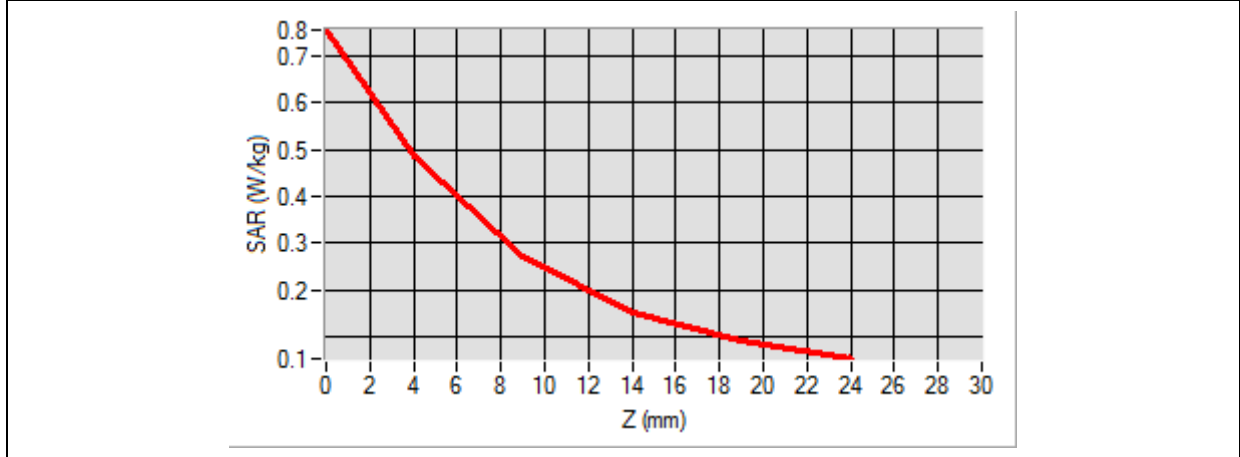

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A rectangular color gradient from red to orange, representing the hot spot position.</p>

MEASUREMENT 189/323

Type: Phone measurement (Complete)

Date of measurement: 2020-10-22

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 26
Channels	QPSK, 15MHz, 1RB, Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	821.599976
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

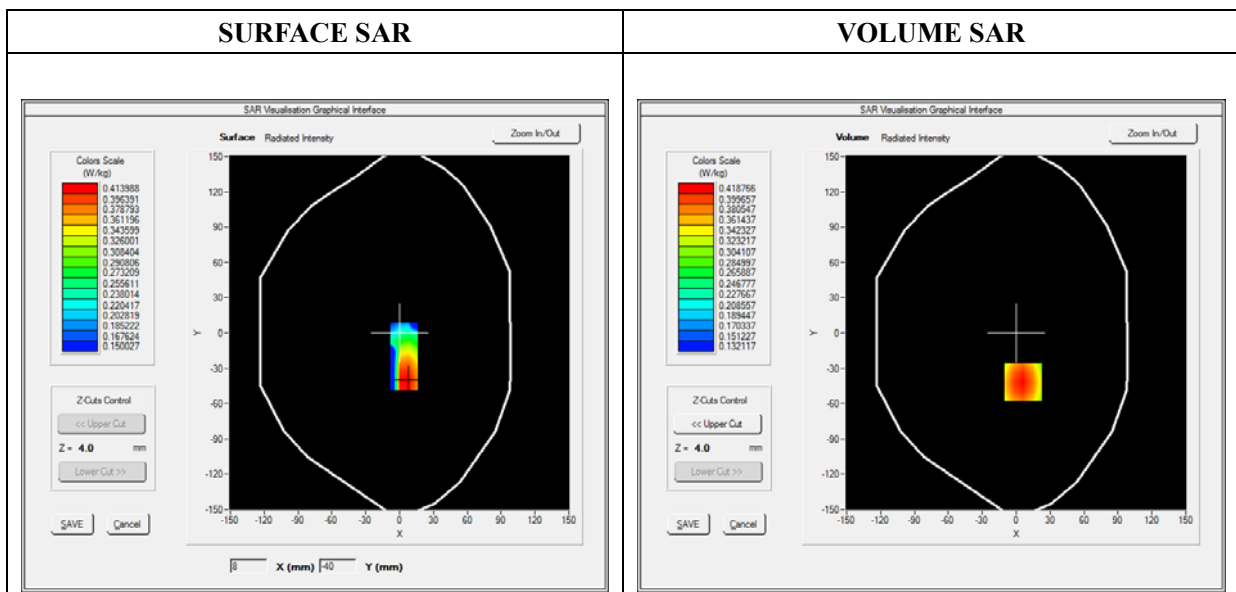


Maximum location: X=6.00, Y=-42.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.311958
SAR 1g (W/Kg)	0.414728

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5187	0.4188	0.3250	0.2599	0.2151

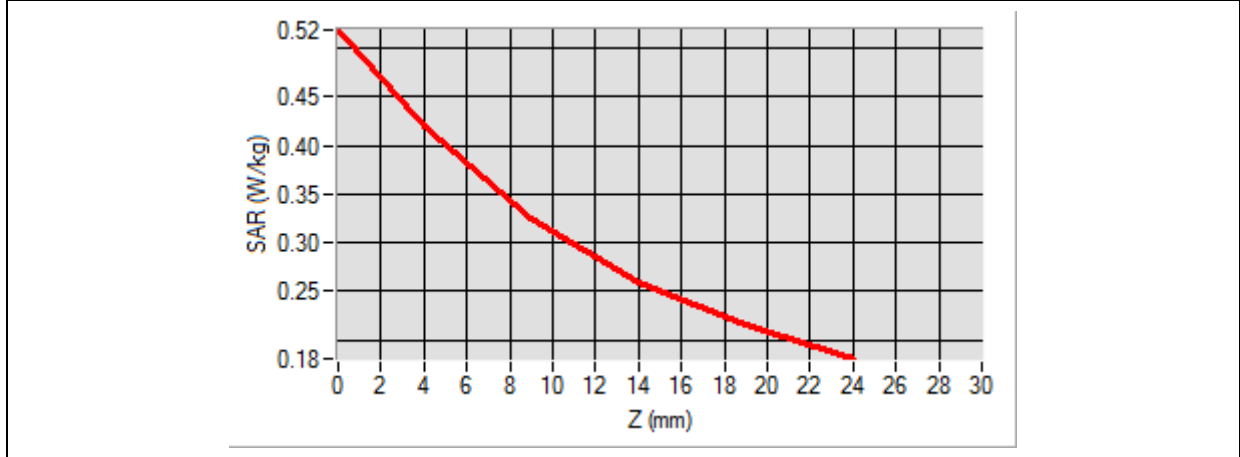

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A localized area of the grid is highlighted with a color gradient from yellow to red, indicating the hot spot.</p>	<p>An isolated 3D visualization of the hot spot, showing a color gradient from yellow at the top to red at the bottom, representing the intensity distribution.</p>

MEASUREMENT 337

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 30
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2310.000000
Relative Permittivity (real part)	53.010212
Conductivity (S/m)	1.880255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

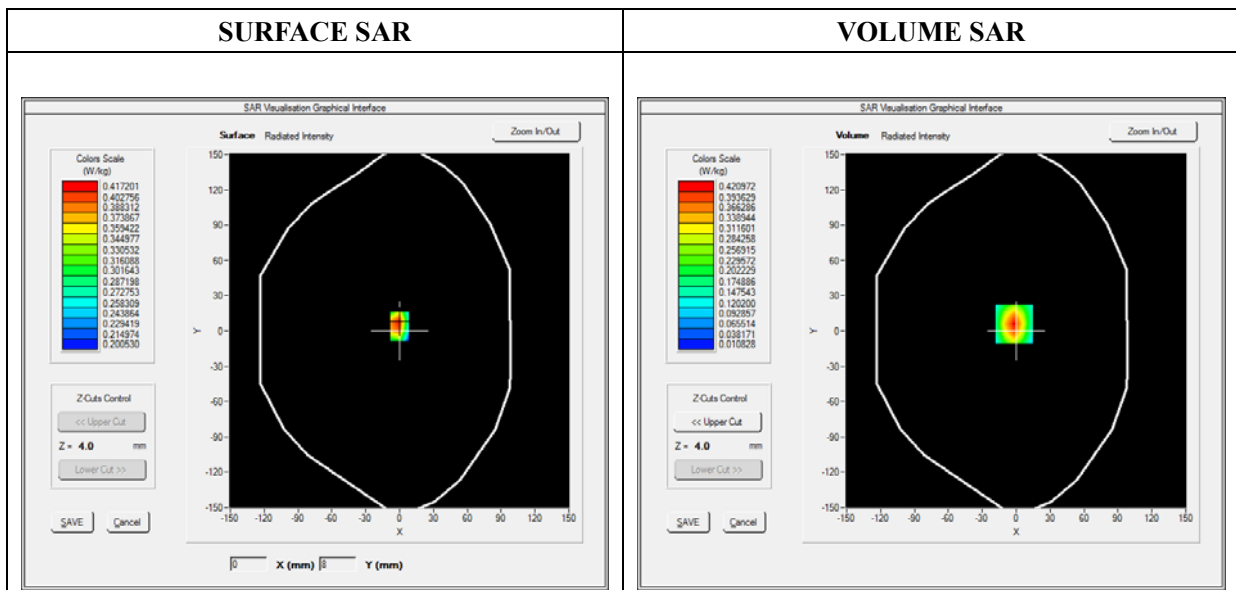


Maximum location: X=-2.00, Y=6.00

SAR Peak: 0.67 W/kg

SAR 10g (W/Kg)	0.198016
SAR 1g (W/Kg)	0.388463

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6737	0.4210	0.2257	0.1200	0.0659

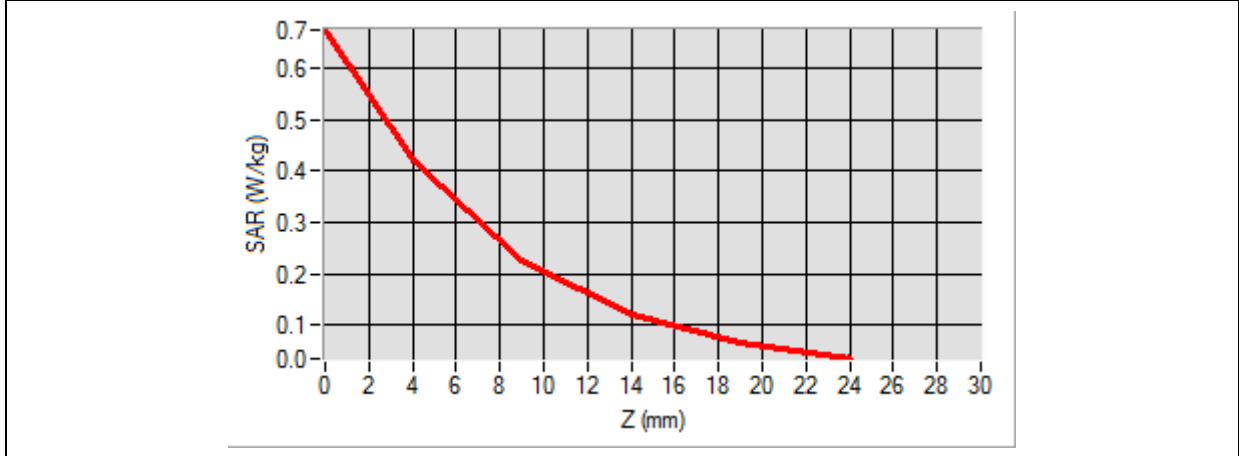

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A small area of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A 2D rectangular color gradient visualization showing a transition from red (high intensity) to yellow (medium intensity) to orange (low intensity), representing the spatial distribution of the hot spot.</p>

MEASUREMENT 347

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 40
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2350.000000
Relative Permittivity (real part)	53.010212
Conductivity (S/m)	1.880255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

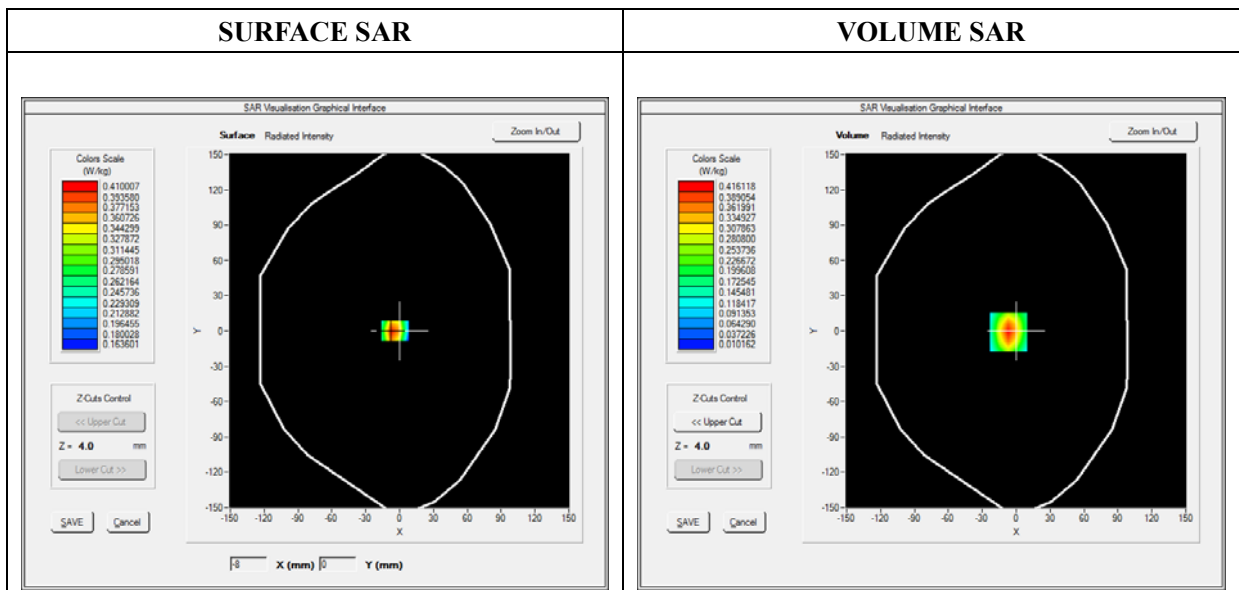


Maximum location: X=-7.00, Y=-1.00

SAR Peak: 0.67 W/kg

SAR 10g (W/Kg)	0.194200
SAR 1g (W/Kg)	0.384564

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6737	0.4161	0.2191	0.1142	0.0615

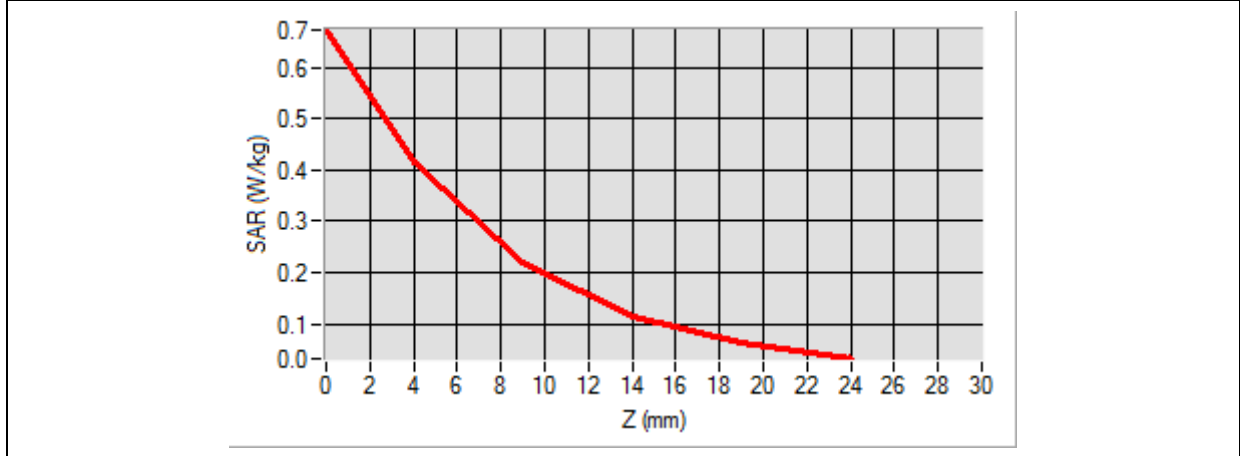

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a grid of blue dots on its surface. A small area of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A horizontal rectangular bar with a color gradient from red (center) to yellow (edges), representing the hot spot position.</p>

MEASUREMENT 357

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 66
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1720.00000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

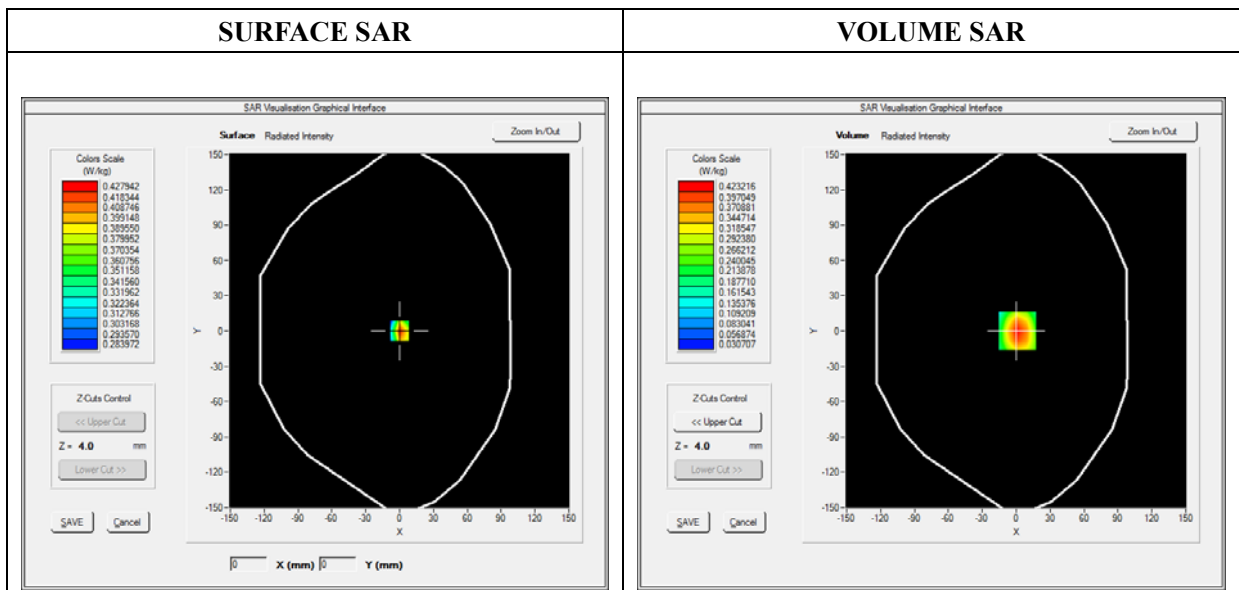


Maximum location: X=1.00, Y=0.00

SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.230692
SAR 1g (W/Kg)	0.397689

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6199	0.4232	0.2590	0.1598	0.1013

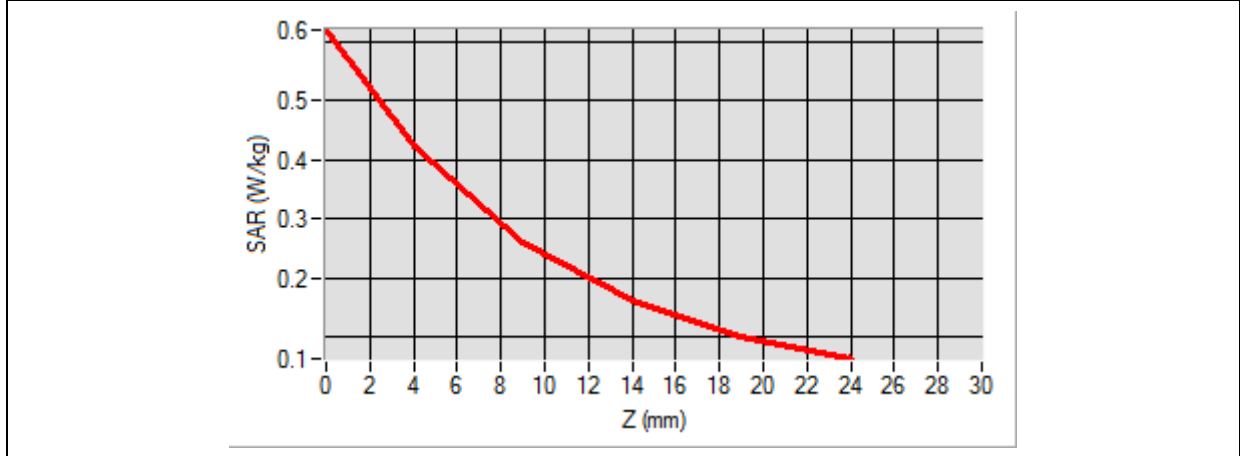

3D screen shot	Hot spot position

MEASUREMENT 363

Type: Phone measurement (Complete)

Date of measurement: 2020-10-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

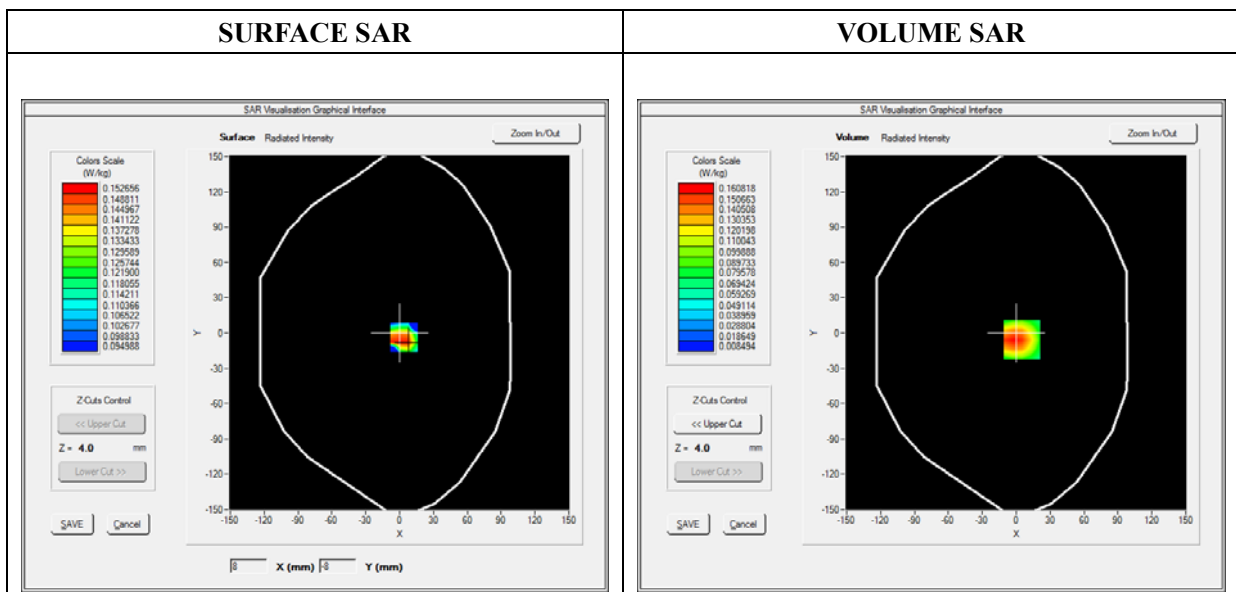


Maximum location: X=5.00, Y=-6.00

SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.083235
SAR 1g (W/Kg)	0.152474

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4295	0.1608	0.0640	0.0459	0.0191

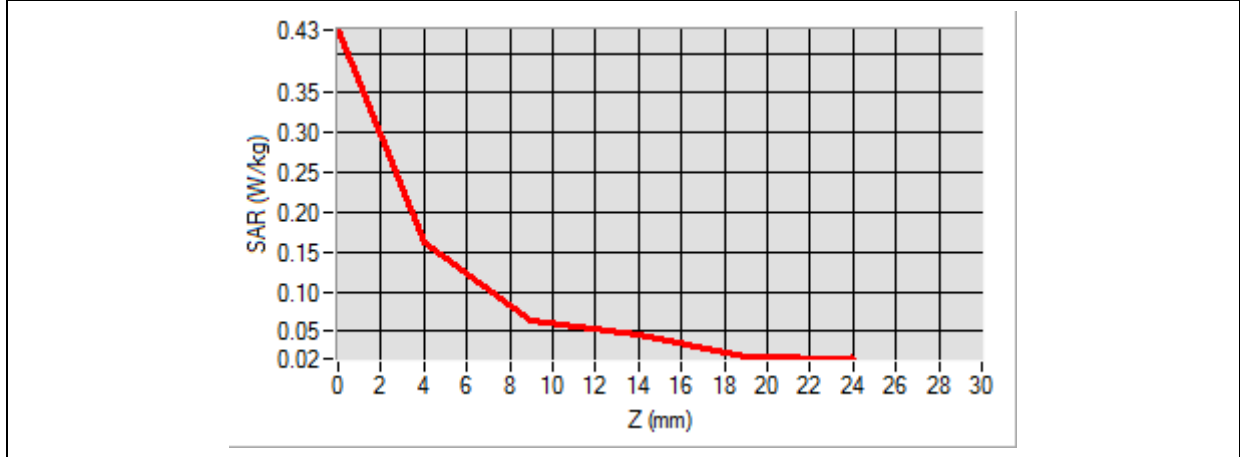

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey, L-shaped device. A grid of small blue dots is overlaid on the flat surface of the device. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A 2D rectangular color-coded visualization of the hot spot. The colors transition from red (highest intensity) in the center to yellow and then to orange at the edges, showing the spatial distribution of the maximum SAR value.</p>

MEASUREMENT 207/367

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.2GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5180.000000
Relative Permittivity (real part)	35.612911
Conductivity (S/m)	4.871483
Power Variation (%)	0.542660
Ambient Temperature	22.0
Liquid Temperature	22.3

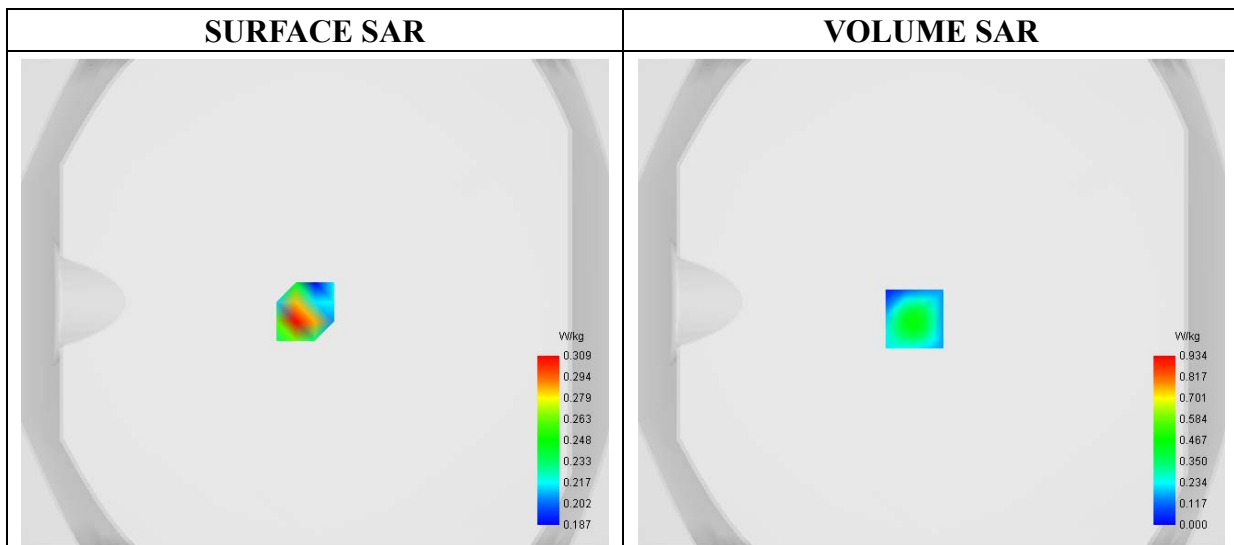

Maximum location: X=-7.00, Y=-7.00

SAR 10g (W/Kg)	0.156608
SAR 1g (W/Kg)	0.424230

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	1.1067	0.4822	0.0810	0.0000	0.1698	0.2175	0.0594	0.4251	0.4251	0.2968

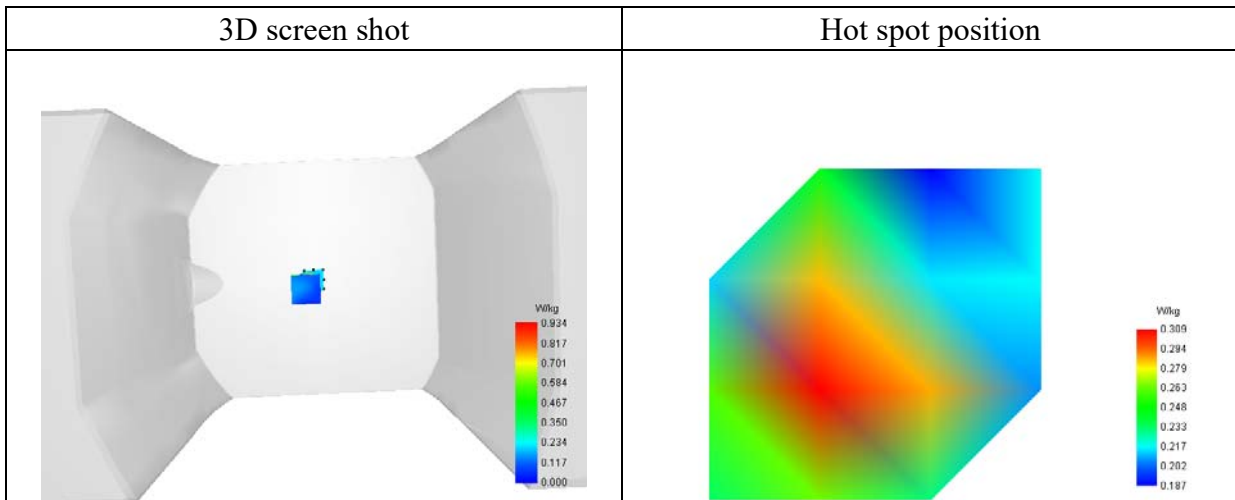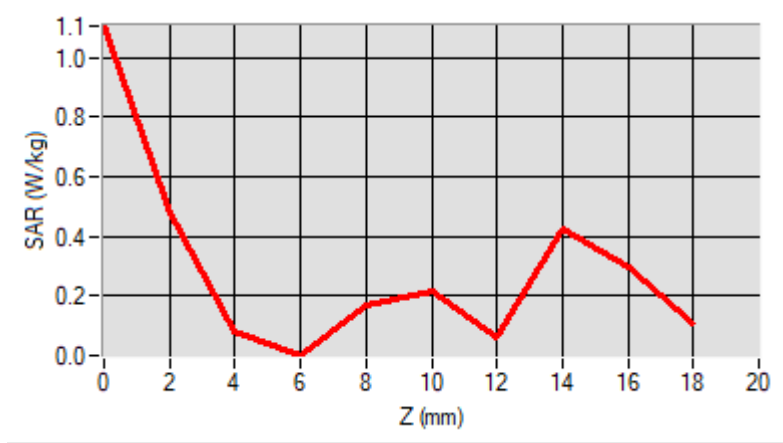

MEASUREMENT 371

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.3GHz)_802.11 n (HT20)
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5320.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	4.740192
Power Variation (%)	0.463782
Ambient Temperature	22.0
Liquid Temperature	22.3

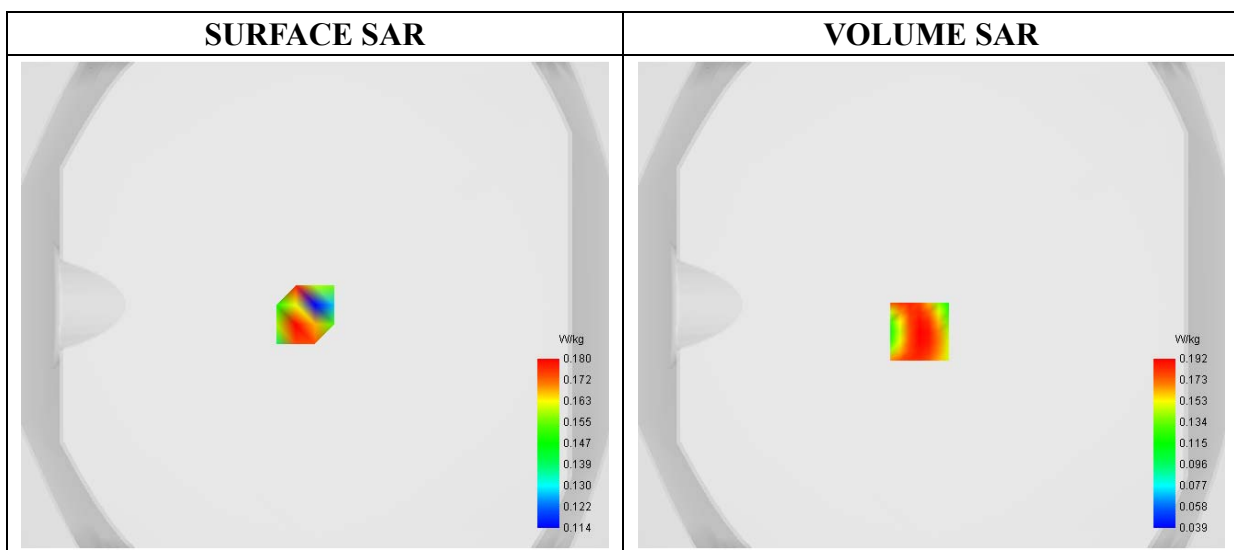

Maximum location: X=-5.00, Y=-11.00

SAR 10g (W/Kg)	0.138551
SAR 1g (W/Kg)	0.191207

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.2212	0.1917	0.1674	0.1474	0.1312	0.1179	0.1069	0.0976	0.0893

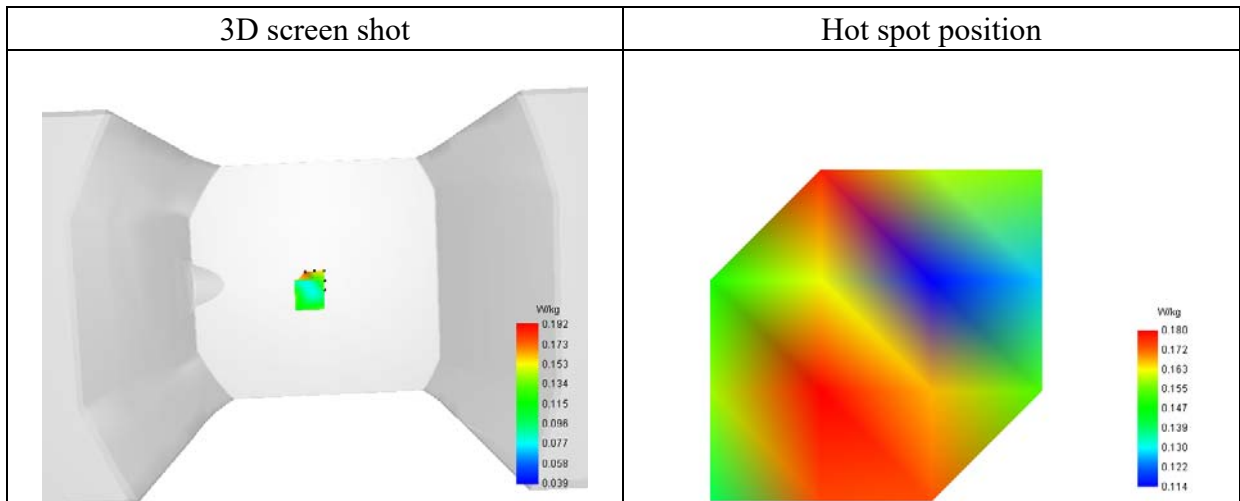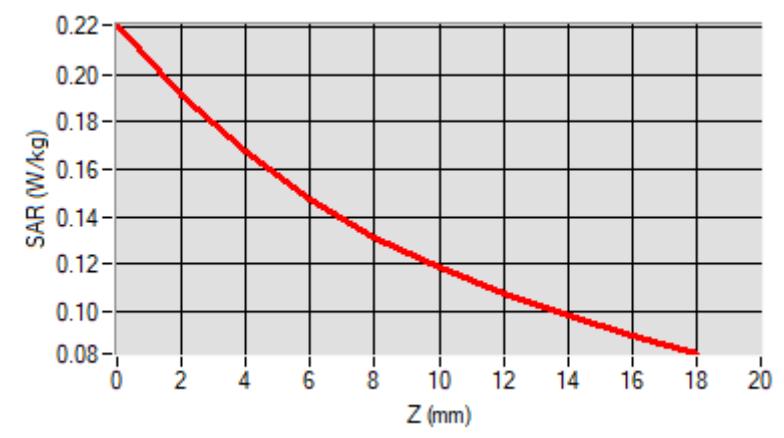

MEASUREMENT 377

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right
Band	WiFi(5.6GHz)_802.11 n (HT40)
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5590.000000
Relative Permittivity (real part)	35.301254
Conductivity (S/m)	5.210512
Power Variation (%)	0.848732
Ambient Temperature	22.0
Liquid Temperature	22.3

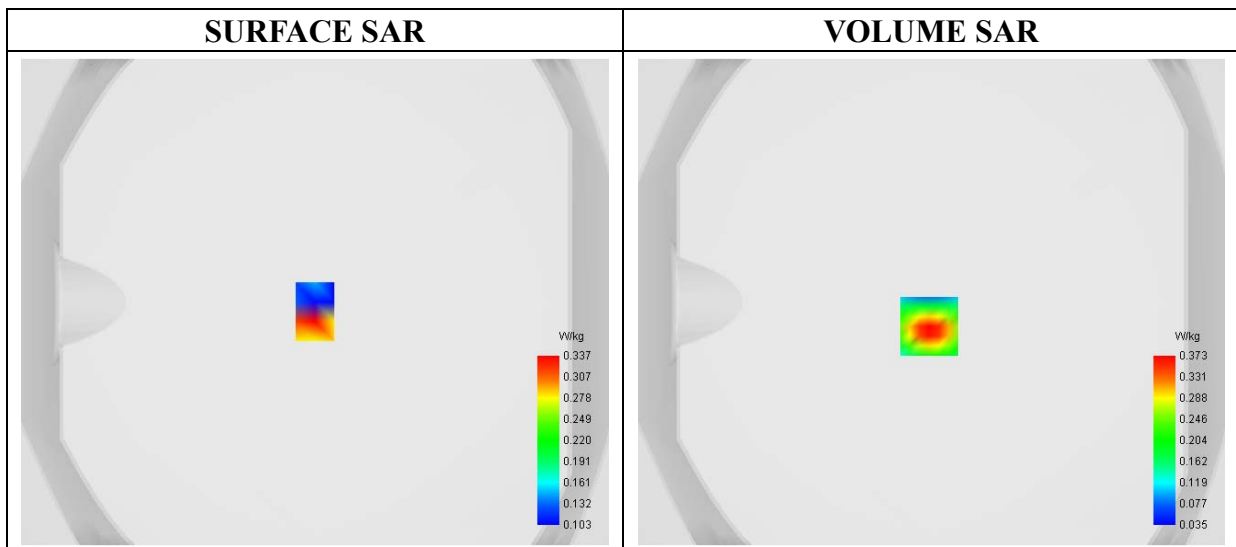

Maximum location: X=-1.00, Y=-10.00

SAR 10g (W/Kg)	0.131580
SAR 1g (W/Kg)	0.255390

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.6598	0.3731	0.1975	0.1043	0.0620	0.0461	0.0451	0.0546	0.0733	0.0733

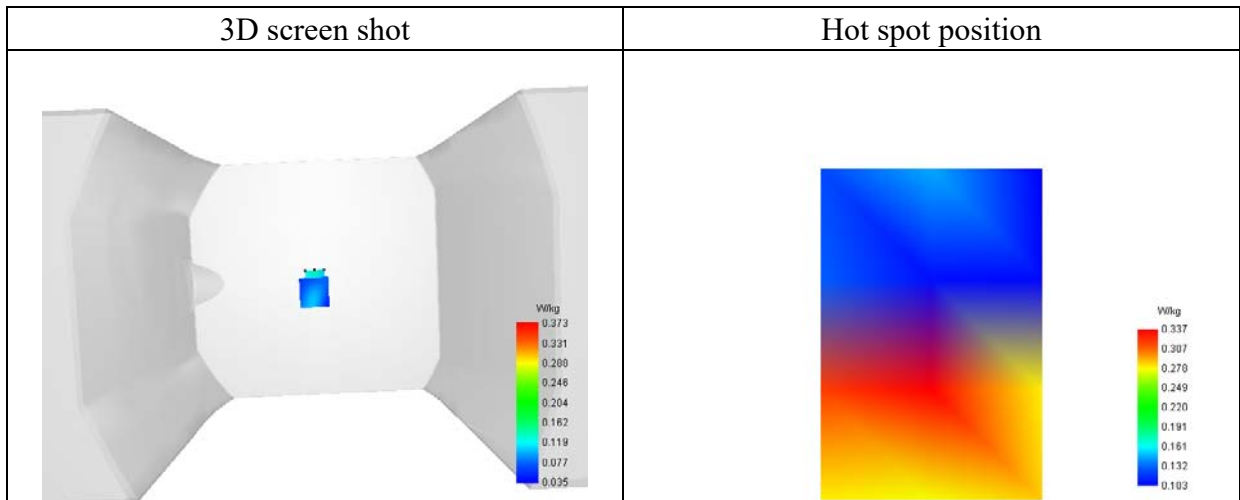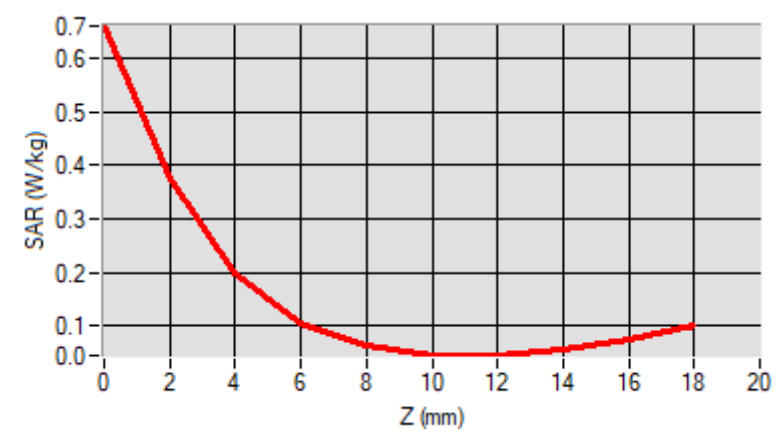

MEASUREMENT 381

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right
Band	WiFi(5.8GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	35.301254
Power Variation (%)	5.210512
Ambient Temperature	22.0
Liquid Temperature	22.3

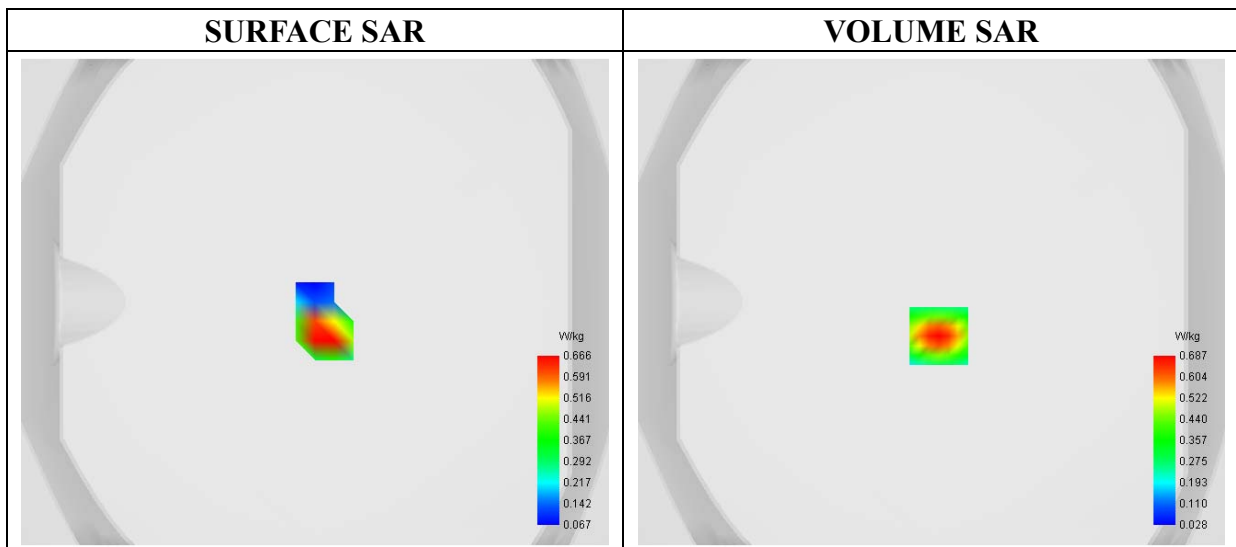

Maximum location: X=3.00, Y=-14.00

SAR 10g (W/Kg)	0.235950
SAR 1g (W/Kg)	0.491043

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.9531	0.6868	0.4963	0.3624	0.2729	0.2134	0.1737	0.1468	0.1275	0.1125

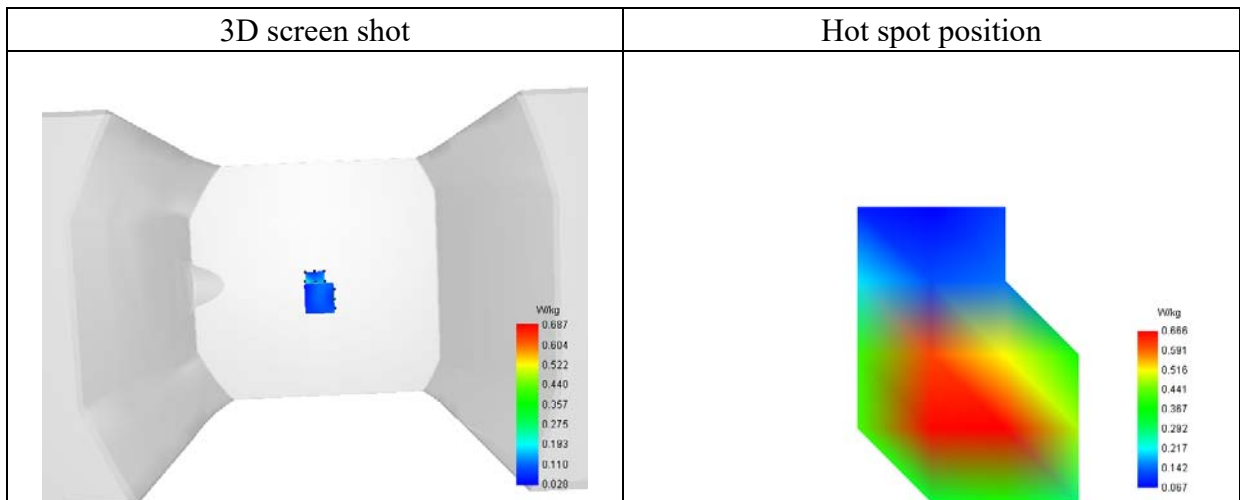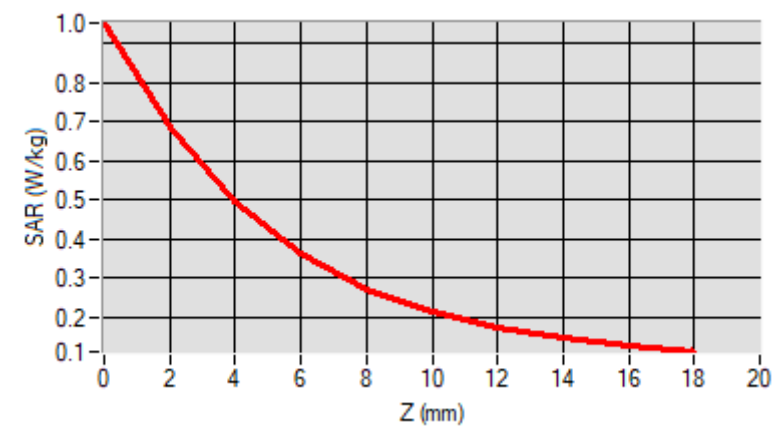

Annex C. EUT Photos


EUT View Front



EUT View Back




Antenna View

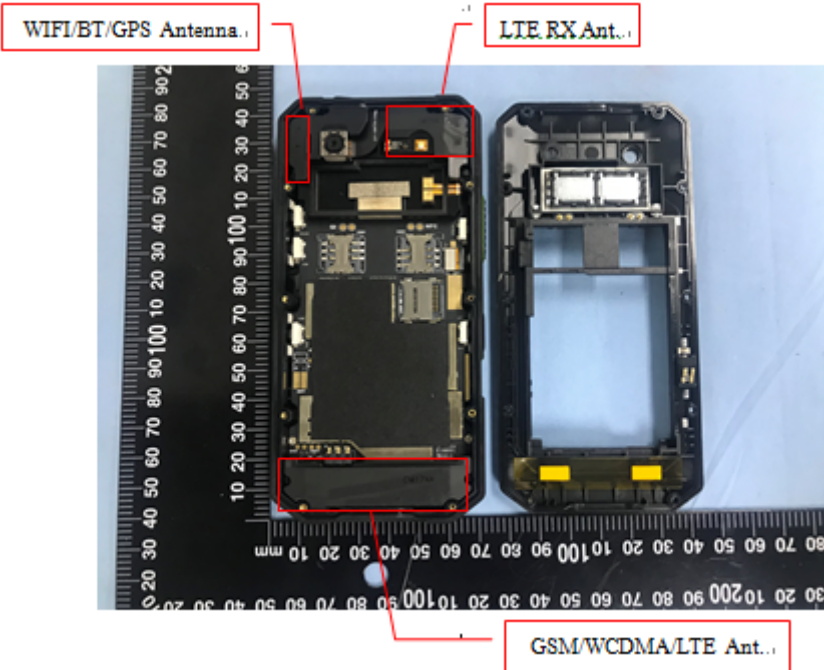

Annex D. Test Setup Photos

Head Exposure Conditions


Right Cheek

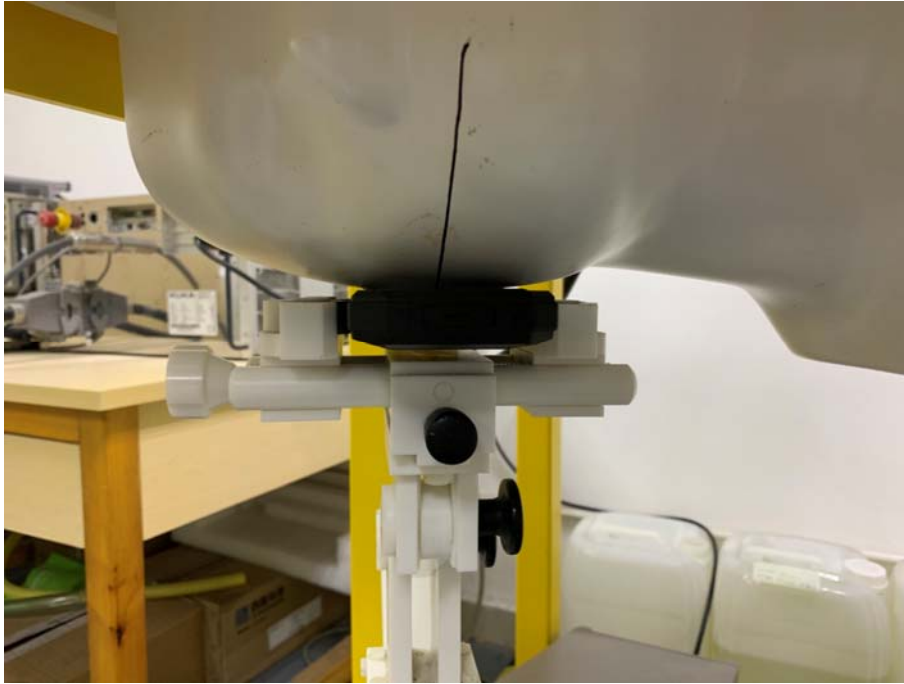

Right Tilt



Left Cheek

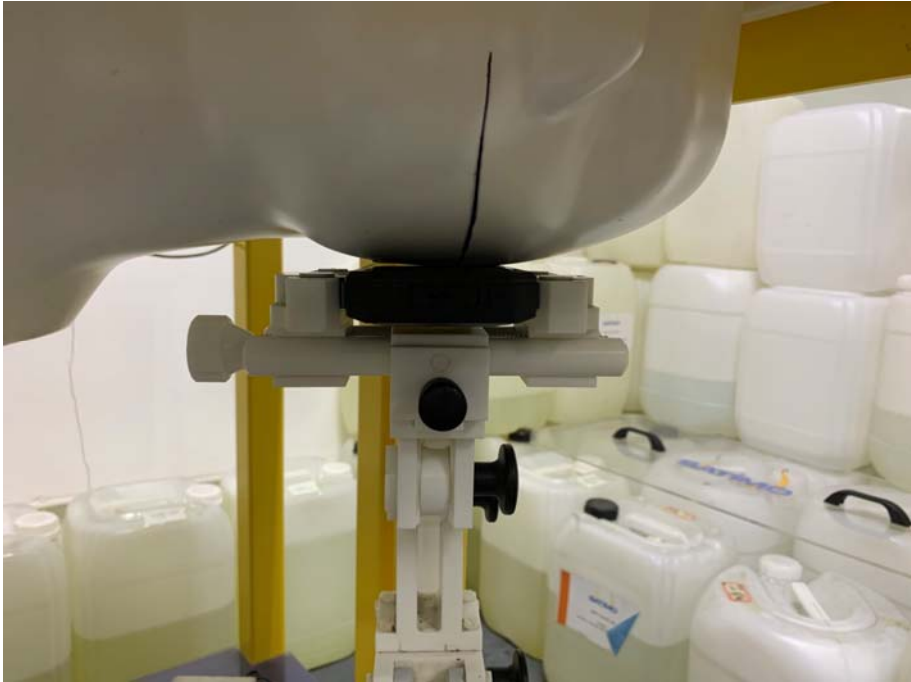

Left Tilt



Body mode Exposure Conditions


Body Front




Body Back




Body Right

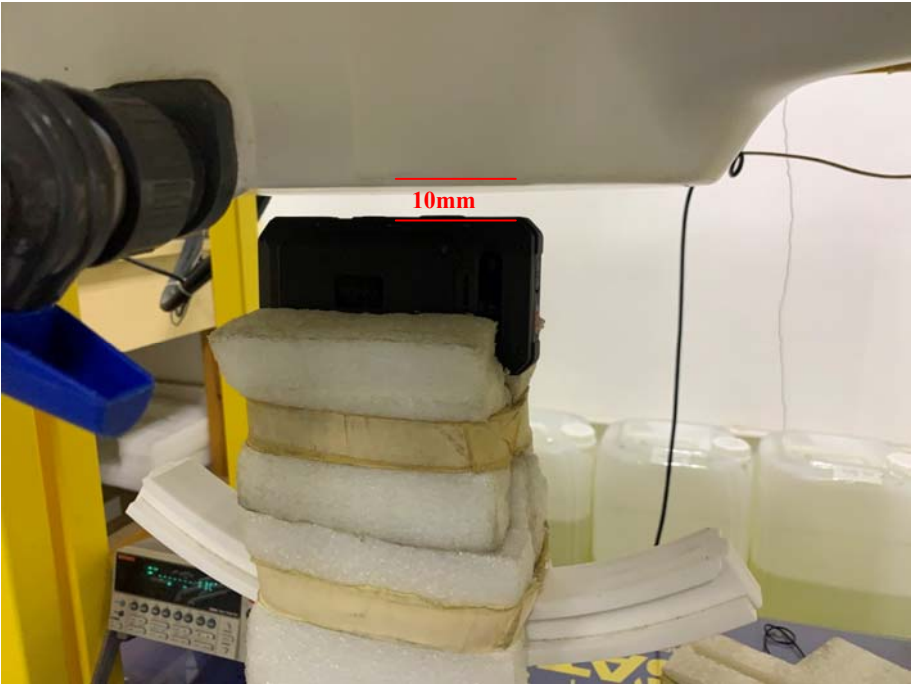


Body Left

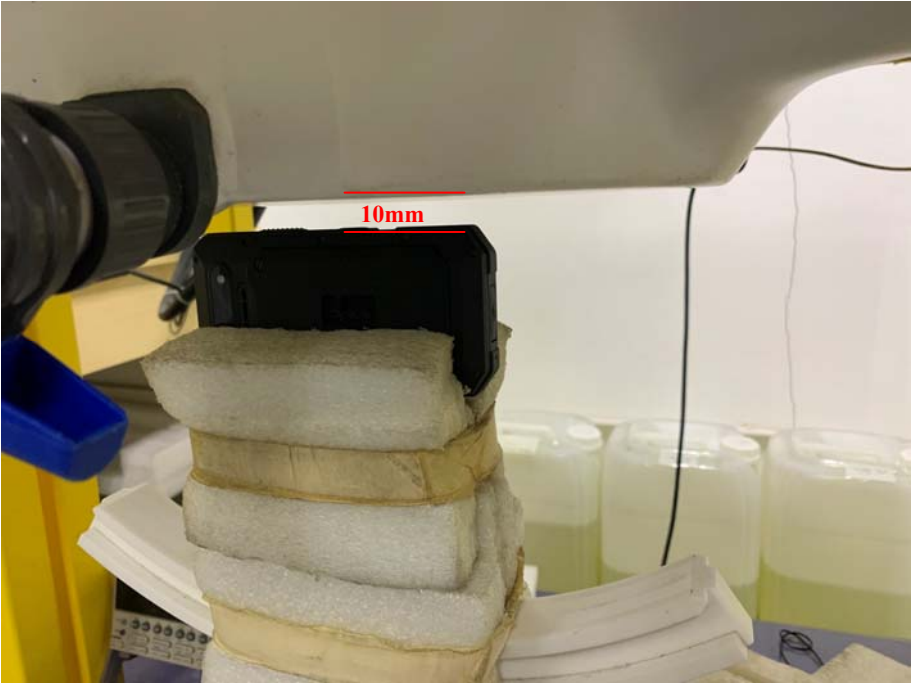

Body Top

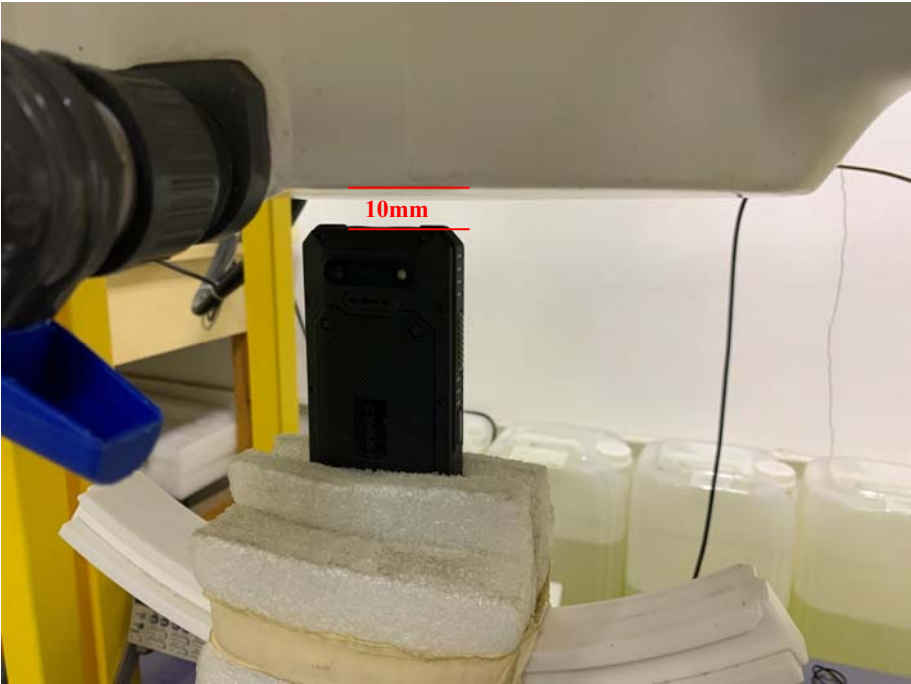

Body Bottom

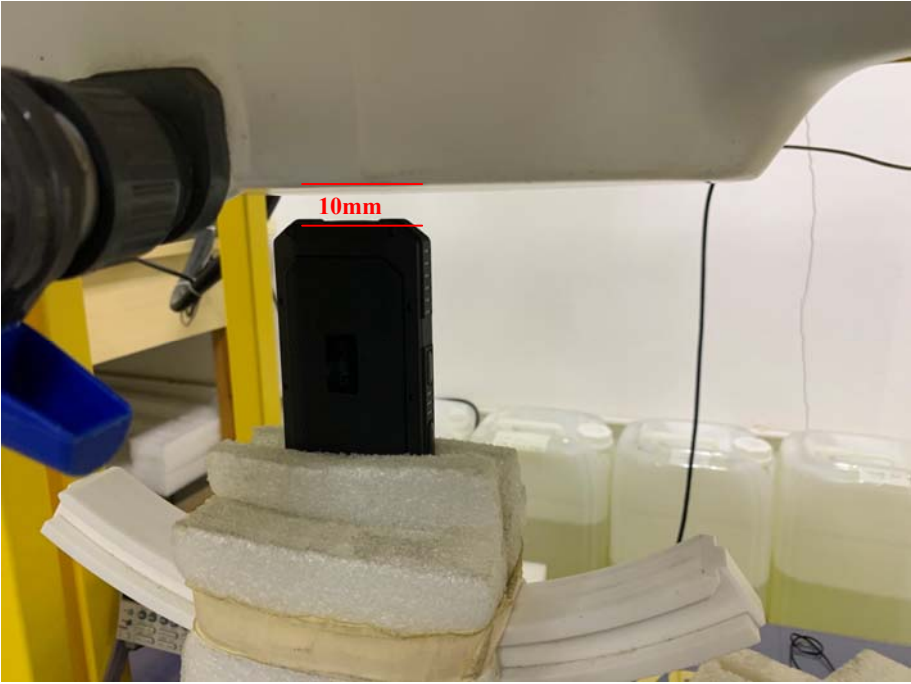

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******