

---

# FCC Test Report

---

Report No.: AGC00594170601FE02

**FCC ID** : 2A13K-CS22SA  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Rugged Mobile Phone  
**BRAND NAME** : Cyrus  
**MODEL NAME** : CS22SA  
**CLIENT** : Cyrus Technology GmbH  
**DATE OF ISSUE** : July 10, 2017  
**STANDARD(S)** : FCC Part 22H & 24E&27(L) Rules  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



**REPORT REVISE RECORD**

<b>Report Version</b>	<b>Revise Time</b>	<b>Issued Date</b>	<b>Valid Version</b>	<b>Notes</b>
V1.0	/	July 10, 2017	Valid	Original Report

## TABLE OF CONTENTS

<b>TABLE OF CONTENTS</b> .....	<b>3</b>
<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>5</b>
<b>2. GENERAL INFORMATION</b> .....	<b>6</b>
2.1 PRODUCT DESCRIPTION .....	6
2.2 RELATED SUBMITTAL(S) / GRANT (S).....	8
2.3 TEST METHODOLOGY .....	8
2.4 TEST FACILITY.....	8
2.5 MEASUREMENT INSTRUMENTS .....	8
2.6 SPECIAL ACCESSORIES.....	10
2.7 EQUIPMENT MODIFICATIONS.....	10
<b>3. SYSTEM TEST CONFIGURATION</b> .....	<b>11</b>
3.1 EUT CONFIGURATION .....	11
3.2 EUT EXERCISE.....	11
<b>3.3 GENERAL TECHNICAL REQUIREMENTS</b> .....	<b>11</b>
3.4 CONFIGURATION OF EUT SYSTEM.....	12
<b>4. SUMMARY OF TEST RESULTS</b> .....	<b>13</b>
<b>5. DESCRIPTION OF TEST MODES</b> .....	<b>13</b>
<b>6. OUTPUT POWER</b> .....	<b>14</b>
6.1 CONDUCTED OUTPUT POWER .....	14
6.2 RADIATED OUTPUT POWER.....	22
6.3. PEAK-TO-AVERAGE RATIO .....	26
<b>7. OCCUPIED BANDWIDTH</b> .....	<b>28</b>
7.1 MEASUREMENT METHOD .....	28
7.2 PROVISIONS APPLICABLE.....	28
7.3 MEASUREMENT RESULT .....	29
APPENDIX A:BANDWIDTH.....	29
<b>8. BAND EDGE</b> .....	<b>34</b>
8.1 MEASUREMENT METHOD .....	34

<b>8.2 PROVISIONS APPLICABLE</b> .....	<b>34</b>
<b>8.3 MEASUREMENT RESULT</b> .....	<b>34</b>
APPENDIX B: BAND EDGES COMPLIANCE.....	34
<b>9. SPURIOUS EMISSION</b> .....	<b>38</b>
9.1 CONDUCTED SPURIOUS EMISSION .....	38
APPENDIX C: SPURIOUS EMISSION AT ANTENNA TERMINAL .....	40
9.2 RADIATED SPURIOUS EMISSION.....	52
9.2.2 TEST SETUP .....	53
<b>10. FREQUENCY STABILITY</b> .....	<b>58</b>
<b>10.1 MEASUREMENT METHOD</b> .....	<b>58</b>
<b>10.2 PROVISIONS APPLICABLE</b> .....	<b>58</b>
10.3 MEASUREMENT RESULT .....	60
Appendix D:Frequency Stability.....	60
<b>PHOTOGRAPHS OF TEST SETUP</b> .....	<b>70</b>
<b>CONDUCTED EMISSION</b> .....	<b>70</b>

## 1. VERIFICATION OF COMPLIANCE


<b>Applicant</b>	Cyrus Technology GmbH
<b>Address</b>	Hergelsbendenstraße 49 D-52080 Aachen Germany
<b>Manufacturer</b>	Shenzhen Xin Kingbrand Enterprises Co., Ltd
<b>Address</b>	KingBrand Industrial Zone, Nanpu Road, Shang Liao Lin Pikeng, Shajing Town, Baoan District, Shenzhen City, Guangdong Province, China
<b>Product Designation</b>	Rugged Mobile Phone
<b>Brand Name</b>	Cyrus
<b>Test Model</b>	CS22SA
<b>Date of test</b>	June 23, 2017~July 10, 2017
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal

### We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA- 603-D-2010. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E and 27(L).

The test results of this report relate only to the tested sample identified in this report.

Tested By



Dota Zhang(Zhang Jianfeng)

July 10, 2017

Reviewed By



Bart Xie(Xie Xiaobin)

July 10, 2017

Approved By



Solger Zhang(Zhang Hongyi)

Authorized Officer

July 10, 2017

## 2. GENERAL INFORMATION

### 2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Rugged Mobile Phone
Hardware version:	FQ5_02
Software version:	smartphone_A7N_20170607_V0.01
Frequency Bands:	<input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (U.S. Bands) <input checked="" type="checkbox"/> GSM 900 <input checked="" type="checkbox"/> DCS 1800 (Non-U.S. Bands) <input checked="" type="checkbox"/> UMTS FDD Band II <input checked="" type="checkbox"/> UMTS FDD Band IV <input checked="" type="checkbox"/> UMTS FDD Band V (U.S. Bands) <input type="checkbox"/> UMTS FDD Band I <input type="checkbox"/> UMTS FDD Band VIII (Non-U.S. Bands)
Antenna Type	PIFA Antenna
Type of Modulation	GSM / GPRS : GMSK EDGE : GMSK/8PSK WCDMA : QPSK
Antenna gain	GSM850: -0.8dBi; PCS1900: -1.0dBi; WCDMA850: -0.6dBi; WCDMA1900:-0.9dBi, WCDMA1700:-0.7dBi
Power Supply:	DC 3.8V by battery
Battery parameter:	DC3.8V/3000mAh
Dual Card:	WCDMA / GSM/LTE Card Slot GSM Card Slot
GPRS Class	12
Extreme Vol. Limits:	DC3.4 V to 4.35 V (Normal: DC3.8 V)
Extreme Temp. Tolerance	-10°C to +50°C
<p>*** Note: 1. The High Voltage DC4.35V and Low Voltage DC3.4V were declared by manufacturer            2. The EUT couldn't be operating normally with higher or lower voltage.            3. Other functions have been performed according to verification procedure except for MS function.</p>	

\*\*\* **Note:** 1.The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band IV, WCDMA band V, only these modes were used for all tests.  
 2. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst case as a representative.

**GSM/WCDMA Card Slot:**

	Maximum ERP/EIRP (dBm)	Max. Conducted Power (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.46	32.55	31.52
PCS 1900	26.95	28.74	27.53
UMTS BAND II	21.85	23.78	21.66
UMTS BAND IV	20.79	22.80	20.77
UMTS BAND V	20.86	23.12	21.08

**GSM Card Slot :**

	Maximum ERP/EIRP (dBm)	Max. Conducted Power (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.37	32.49	31.46
PCS 1900	26.88	28.67	27.48

## 2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AI3K-CS22SA**, filing to comply with the FCC Part 22H&24E &27L requirements.

## 2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-D-2010, and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

KDB 971168 D01 Power Meas License Digital Systems v02r02

## 2.4 TEST FACILITY

<b>Site</b>	Dongguan Precise Testing Service Co., Ltd.
<b>Location</b>	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
<b>FCC Registration No.</b>	371540
<b>Description</b>	The test site is constructed and calibrated to meet the FCC requirements in documents of ANSI/TIA-603-D-2010.

## 2.5 MEASUREMENT INSTRUMENTS

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2016	July 2, 2017
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 2, 2017	July 1, 2018
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9168	D69250	Mar 1, 2016	Feb 28, 2018
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 3, 2016	July 2, 2017
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 2, 2017	July 1, 2018
RF Cable	SCHWARZBECK	AK9515E	96221	July 3, 2016	July 2, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 2, 2017	July 1, 2018
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 2, 2017	June 1, 2018
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 5, 2016	June 4, 2018
Spectrum analyzer	Agilent	E4407B	MY46185649	June 2, 2017	June 1, 2018
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 10, 2016	July 9, 2018
Horn Antenna(substituted	ETS LINDGREN	3117	00034609	Mar 1, 2016	Feb 28, 2018



antenna) (1G-18GHz)					
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 3, 2016	July 2, 2017
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 2, 2017	July 1, 2018
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 6, 2016	July 5, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 2, 2017	July 1, 2018
RF Cable	SCHWARZBECK	AK9515H	96220	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 2, 2017	July 1, 2018
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 5, 2016	June 4, 2018
Artificial Mains Network	Narda	L2-16B	000WX31025	July 7, 2016	July 6, 2017
Artificial Mains Network	Narda	L2-16B	000WX31025	July 2, 2017	July 1, 2018
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 7, 2016	July 6, 2017
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 2, 2017	July 1, 2018
RF Cable	SCHWARZBECK	AK9515E	96222	July 3, 2016	July 2, 2017
RF Cable	SCHWARZBECK	AK9515E	96222	July 2, 2017	July 1, 2018
Shielded Room	CHENGYU	843	PTS-002	June 2, 2017	June 1, 2018
COMMUNICATION TESTER	AGILENT	8960	GB46490550	July 24,2016	July 23, 2017
RF attenuator	N/A	RFA20db	68	N/A	N/A
Signal Generator	AGILENT	N5182A	MY50140530	Oct 15,2016	Oct 14,2017
Signal Generator(substituted equipment)	AGILENT	E8257D	MY45141029	Oct 15,2016	Oct 14,2017

## **2.6 SPECIAL ACCESSORIES**

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

## **2.7 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission’s requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

#### 3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	2.1046/22.913(a) (2) / 24.232 (c) /27.50(d)(2)
		Radiated output power	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)/27.50(d)(5)
3	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238/27.53(h)
		Radiated spurious emission	
4	Frequency Stability		2.1055/22.355 /24.235 /27.54
5	Occupied Bandwidth		2.1049 (h)(i)
6	Emission Bandwidth		22.917(a)/24.238(a) /27.53(h)
7	Band Edge		22.917(a)/24.238(a) /27.53(h)

### 3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	Rugged Mobile Phone	CS22SA	FCC ID: 2AI3K-CS22SA	EUT
2	Adapter	RKL-0510	DC 5.0V/2A	Accessory
3	Battery	V28S	DC3.8V/ 3000mAh	Accessory
4	USB Cable	N/A	N/A	Accessory
5	Earphone	N/A	N/A	Accessory

*\*\*\*Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.*

#### 4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046/22.913(a) (2) / 24.232 (c) / 27.50(d)(2)	Pass
		Radiated Output Power		
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)/27.50(d)(5)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051/22.917/24.238/27.53(h)	Pass
		Radiated Spurious Emission		
4	Frequency Stability		2.1055/22.355/24.235/27.54	Pass
5	Occupied Bandwidth		2.1049 (h)(i)	Pass
6	Emission Bandwidth		22.917(a)/24.238(a)/27.53(h)	Pass
7	Band Edge		22.917(a)/24.238(a)/27.53(h)	Pass

#### 5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

**\*\*\*Note:** GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, WCDMA/HSPA band IV, mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.

## 6. OUTPUT POWER

### 6.1 CONDUCTED OUTPUT POWER

#### 6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS1900, WCDMA/HSPA band II, WCDMA/HSPA band IV, WCDMA/HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

#### 6.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GPRS/EDGE 850 band		
Mode	Nominal Peak Power	Tolerance(dB)
GSM	33 dBm (2W)	- 2
EDGE	27 dBm(0.5W)	±2
Conducted Output Power Limits for GPRS/EDGE 1900 band		
Mode	Nominal Peak Power	Tolerance(dB)
GSM	30 dBm (1W)	- 2
EDGE	26 dBm (0.4W)	±2
Conducted Output Power Limits for UMTS band II		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA	24 dBm (0.25W)	- 2
Conducted Output Power Limits for UMTS band IV		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA	24 dBm (0.25W)	- 2
Conducted Output Power Limits for UMTS band V		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA	24 dBm (0.25W)	- 2

**GSM 850:**

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM850	824.2	33	32.45	-0.55	31.49	-9	22.49
	836.6	33	<b>32.55</b>	-0.45	<b>31.52</b>	-9	22.52
	848.8	33	32.20	-0.80	31.37	-9	22.37
GPRS850 (1 Slot)	824.2	33	32.41	-0.59	31.40	-9	22.40
	836.6	33	32.52	-0.48	31.40	-9	22.40
	848.8	33	32.13	-0.87	31.15	-9	22.15
GPRS850 (2 Slot)	824.2	30	29.54	-0.46	28.71	-6	22.71
	836.6	30	29.25	-0.75	28.59	-6	22.59
	848.8	30	29.12	-0.88	28.50	-6	22.50
GPRS850 (3 Slot)	824.2	28.23	27.97	-0.26	26.77	-4.26	22.51
	836.6	28.23	27.64	-0.59	26.42	-4.26	22.16
	848.8	28.23	27.64	-0.59	26.29	-4.26	22.03
GPRS850 (4 Slot)	824.2	27	26.57	-0.43	25.71	-3	22.71
	836.6	27	26.27	-0.73	25.76	-3	22.76
	848.8	27	26.26	-0.74	25.40	-3	22.40

Mode	Channel	Frequency (MHz)	Peak Power (dBm)	Avg.Burst Power (dBm)
EDGE (1 Slot)	128	824.2	27.90	24.59
	189	836.6	27.79	24.31
	251	848.8	27.34	24.14
EDGE (2 Slot)	128	824.2	24.73	21.71
	189	836.6	24.73	21.12
	251	848.8	24.16	21.72
EDGE (3 Slot)	128	824.2	23.75	20.28
	189	836.6	23.15	20.20
	251	848.8	23.28	20.13
EDGE (4 Slot)	128	824.2	22.77	18.64
	189	836.6	22.36	18.78
	251	848.8	22.05	18.64

**PCS 1900:**

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM1900	1850.2	30	28.22	-1.78	27.07	-9	18.07
	1880	30	<b>28.74</b>	-1.26	<b>27.53</b>	-9	18.53
	1909.8	30	28.54	-1.46	27.42	-9	18.42
GPRS1900 (1 Slot)	1850.2	30	28.31	-1.69	27.19	-9	18.19
	1880	30	28.52	-1.48	27.34	-9	18.34
	1909.8	30	28.29	-1.71	27.02	-9	18.02
GPRS1900 (2 Slot)	1850.2	27	25.53	-1.47	24.66	-6	18.66
	1880	27	25.67	-1.33	24.37	-6	18.37
	1909.8	27	25.51	-1.49	24.26	-6	18.26
GPRS1900 (3 Slot)	1850.2	25.23	23.52	-1.71	22.29	-4.26	18.03
	1880	25.23	23.43	-1.80	22.44	-4.26	18.18
	1909.8	25.23	23.36	-1.87	22.48	-4.26	18.22
GPRS1900 (4 Slot)	1850.2	24	22.39	-1.61	21.49	-3	18.49
	1880	24	22.69	-1.31	21.55	-3	18.55
	1909.8	24	22.40	-1.60	21.34	-3	18.34

Mode	Channel	Frequency (MHz)	Peak Power (dBm)	Avg.Burst Power (dBm)
EDGE (1 Slot)	512	1850.2	26.58	24.51
	661	1880	26.76	24.87
	810	1909.8	26.70	24.67
EDGE (2 Slot)	512	1850.2	23.36	21.49
	661	1880	23.66	21.76
	810	1909.8	23.41	21.55
EDGE (3 Slot)	512	1850.2	23.55	21.45
	661	1880	23.40	21.59
	810	1909.8	23.62	21.52
EDGE (4 Slot)	512	1850.2	22.52	20.37
	661	1880	22.45	20.55
	810	1909.8	22.29	20.15



**UMTS BAND II**

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA 1900 RMC	1852.6	24	23.47	-0.53	21.35
	1880	24	<b>23.78</b>	-0.22	<b>21.66</b>
	1907.4	24	23.51	-0.49	21.45
WCDMA 1900 AMR	1852.6	24	23.43	-0.57	21.31
	1880	24	23.55	-0.45	21.42
	1907.4	24	23.49	-0.51	21.58
HSDPA Subtest 1	1852.6	24	22.54	-1.46	20.50
	1880	24	22.53	-1.47	20.38
	1907.4	24	22.83	-1.17	20.24
HSDPA Subtest 2	1852.6	24	22.56	-1.44	20.20
	1880	24	22.57	-1.43	20.69
	1907.4	24	22.77	-1.23	20.63
HSDPA Subtest 3	1852.6	24	22.75	-1.25	20.26
	1880	24	22.56	-1.44	20.22
	1907.4	24	22.37	-1.63	20.67
HSDPA Subtest 4	1852.6	24	22.19	-1.81	20.25
	1880	24	22.79	-1.21	20.37
	1907.4	24	22.62	-1.38	20.37
HSUPA Subtest 1	1852.6	24	22.13	-1.87	20.31
	1880	24	22.24	-1.76	20.51
	1907.4	24	22.10	-1.90	20.39
HSUPA Subtest 2	1852.6	24	22.48	-1.52	20.52
	1880	24	22.36	-1.64	20.66
	1907.4	24	22.38	-1.62	20.59
HSUPA Subtest 3	1852.6	24	22.85	-1.15	20.90
	1880	24	22.73	-1.27	20.36
	1907.4	24	22.68	-1.32	20.48
HSUPA Subtest 4	1852.6	24	22.28	-1.72	20.53
	1880	24	22.28	-1.72	20.68
	1907.4	24	22.67	-1.33	20.68
HSUPA Subtest 5	1852.6	24	22.81	-1.19	20.57
	1880	24	22.62	-1.38	20.62
	1907.4	24	22.83	-1.17	20.85

**UMTS BAND IV**

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA 1700 RMC	1712.4	24	22.37	-1.18	20.46
	1732.6	24	22.78	-1.03	20.60
	1752.6	24	<b>22.80</b>	-0.98	<b>20.77</b>
WCDMA 1700 AMR	1712.4	24	22.39	-1.55	20.06
	1732.6	24	22.40	-1.09	20.33
	1752.6	24	22.58	-1.18	20.25
HSDPA Subtest 1	1712.4	24	22.24	-1.31	20.64
	1732.6	24	22.59	-1.77	20.34
	1752.6	24	22.40	-1.46	20.25
HSDPA Subtest 2	1712.4	24	22.30	-1.44	20.43
	1732.6	24	22.27	-1.66	20.59
	1752.6	24	22.17	-0.85	20.56
HSDPA Subtest 3	1712.4	24	22.31	-1.22	20.20
	1732.6	24	22.29	-1.57	20.26
	1752.6	24	22.33	-1.85	20.33
HSDPA Subtest 4	1712.4	24	22.19	-1.49	20.41
	1732.6	24	22.19	-1.42	20.49
	1752.6	24	22.25	-1.62	20.39
HSUPA Subtest 1	1712.4	24	22.40	-1.38	20.32
	1732.6	24	22.48	-1.32	20.32
	1752.6	24	22.62	-1.29	20.32
HSUPA Subtest 2	1712.4	24	22.40	-1.62	20.67
	1732.6	24	22.46	-1.50	20.32
	1752.6	24	22.30	-1.22	20.47
HSUPA Subtest 3	1712.4	24	22.60	-1.60	20.50
	1732.6	24	22.48	-1.41	20.30
	1752.6	24	22.65	-1.53	20.35
HSUPA Subtest 4	1712.4	24	22.53	-1.26	20.66
	1732.6	24	22.61	-1.44	20.43
	1752.6	24	22.42	-1.47	20.38
HSUPA Subtest 5	1712.4	24	22.43	-1.35	20.48
	1732.6	24	22.36	-1.36	20.47
	1752.6	24	22.44	-1.72	20.56

**UMTS BAND V**

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA 850 RMC	826.6	24	23.03	-1.22	20.92
	836.4	24	<b>23.12</b>	-1.52	<b>21.08</b>
	846.4	24	23.10	-1.02	21.04
WCDMA 850 AMR	826.6	24	22.81	-1.35	20.87
	836.4	24	22.92	-1.28	20.77
	846.4	24	22.95	-1.41	20.62
HSDPA Subtest 1	826.6	24	22.82	-1.60	20.30
	836.4	24	22.61	-1.87	20.33
	846.4	24	22.68	-1.73	20.89
HSDPA Subtest 2	826.6	24	22.67	-1.57	20.72
	836.4	24	22.46	-1.93	20.78
	846.4	24	22.42	-1.70	20.93
HSDPA Subtest 3	826.6	24	22.55	-1.42	20.36
	836.4	24	22.38	-1.69	20.23
	846.4	24	22.52	-1.74	20.84
HSDPA Subtest 4	826.6	24	22.51	-1.59	20.43
	836.4	24	23.04	-1.41	20.27
	846.4	24	22.83	-1.57	20.30
HSUPA Subtest 1	826.6	24	22.87	-1.40	20.92
	836.4	24	22.51	-1.45	20.91
	846.4	24	22.56	-1.48	20.58
HSUPA Subtest 2	826.6	24	22.31	-1.72	20.64
	836.4	24	22.75	-1.45	20.34
	846.4	24	22.56	-1.33	20.68
HSUPA Subtest 3	826.6	24	22.58	-1.40	20.44
	836.4	24	22.26	-1.70	20.45
	846.4	24	22.36	-1.81	20.31
HSUPA Subtest 4	826.6	24	22.64	-1.48	20.66
	836.4	24	22.77	-1.45	20.42
	846.4	24	22.59	-1.57	20.51
HSUPA Subtest 5	826.6	24	22.58	-1.45	20.32
	836.4	24	22.51	-1.65	20.52
	846.4	24	22.74	-1.41	20.39

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$\text{MAX}(CM-1,0)$
Note: CM=1 for $\beta_c/\beta_d=12/15$ , $\beta_{hs}/\beta_c=24/15$ .For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

## 6.2 RADIATED OUTPUT POWER

### 6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-D-2010 were applied.

1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl} = P_{in} + 2.15 - P_r$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$
4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
6. The EUT is then put into continuously transmitting mode at its maximum power level.
7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
9. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15dBi...$

### 6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) and 27.50(d)(4) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) and 27.50(d)(4) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

<b>Mode</b>	<b>Nominal Peak Power</b>
GSM/EDGE 850	$\leq 38.45$ dBm (7W)
GSM/EDGE 1900	$\leq 33$ dBm (2W)
UMTS BAND II	$\leq 33$ dBm (2W)
UMTS BAND IV	$\leq 33$ dBm (2W)
UMTS BAND V	$\leq 38.45$ dBm (7W)

### 6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM/EDGE 850				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM	824.2	30.29	Horizontal	Pass
	836.6	<b>30.46</b>	Horizontal	Pass
	848.8	30.30	Horizontal	Pass
	824.2	28.29	Vertical	Pass
	836.6	28.11	Vertical	Pass
	848.8	28.18	Vertical	Pass
EDGE	824.2	25.48	Horizontal	Pass
	836.6	25.10	Horizontal	Pass
	848.8	25.12	Horizontal	Pass
	824.2	23.91	Vertical	Pass
	836.6	23.36	Vertical	Pass
	848.8	23.10	Vertical	Pass

Radiated Power (E.I.R.P) for GSM/EDGE 1900				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM	1850.2	26.35	Horizontal	Pass
	1880.0	26.74	Horizontal	Pass
	1909.8	<b>26.95</b>	Horizontal	Pass
	1850.2	24.49	Vertical	Pass
	1880.0	24.62	Vertical	Pass
	1909.8	24.36	Vertical	Pass
EDGE	1850.2	24.78	Horizontal	Pass
	1880.0	24.47	Horizontal	Pass
	1909.8	24.30	Horizontal	Pass
	1850.2	22.90	Vertical	Pass
	1880.0	23.01	Vertical	Pass
	1909.8	22.68	Vertical	Pass



Radiated Power (E.I.R.P) for UMTS band II				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P (dBm)	Polarization Of Max. E.I.R.P	
UMTS	1852.6	21.85	Horizontal	Pass
	1880	21.48	Horizontal	Pass
	1907.4	21.28	Horizontal	Pass
	1852.6	19.99	Vertical	Pass
	1880	19.83	Vertical	Pass
	1907.4	19.85	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band IV				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. E.I.R.P.	
UMTS	1712.4	20.27	Horizontal	Pass
	1732.6	20.79	Horizontal	Pass
	1752.6	20.52	Horizontal	Pass
	1712.4	18.35	Vertical	Pass
	1732.6	18.82	Vertical	Pass
	1752.6	18.94	Vertical	Pass

Radiated Power (ERP) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. E.I.R.P.	
UMTS	826.6	20.68	Horizontal	Pass
	836.4	20.86	Horizontal	Pass
	846.4	20.60	Horizontal	Pass
	826.6	18.56	Vertical	Pass
	836.4	18.76	Vertical	Pass
	846.4	18.41	Vertical	Pass

Note: Above is the worst mode data.

### 6.3. PEAK-TO-AVERAGE RATIO

#### 6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

#### 6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 6.3.3 MEASUREMENT RESULT

Modes	GSM 850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency (MHz)	824.2	836.6	848.8
Peak-To-Average Ratio (dB)/GSM	0.95	0.98	0.92
Peak-To-Average Ratio (dB)/EDGE	3.33	3.36	3.28

Modes	PCS 1900 (GSM)		
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)/GSM	1.16	1.18	1.13
Peak-To-Average Ratio (dB)/EDGE	2.03	1.97	2.01

<b>Modes</b>	<b>UMTS BAND II</b>		
<b>Channel</b>	<b>9663</b>	<b>9800</b>	<b>9937</b>
	<b>(Low)</b>	<b>(Mid)</b>	<b>(High)</b>
<b>Frequency (MHz)</b>	<b>1852.6</b>	<b>1880</b>	<b>1907.4</b>
<b>Peak-To-Average Ratio (dB)</b>	2.10	2.08	2.05

<b>Modes</b>	<b>UMTS BAND IV</b>		
<b>Channel</b>	<b>1887</b>	<b>1987</b>	<b>2087</b>
	<b>(Low)</b>	<b>(Mid)</b>	<b>(High)</b>
<b>Frequency (MHz)</b>	<b>1712.4</b>	<b>1732.6</b>	<b>1752.6</b>
<b>Peak-To-Average Ratio (dB)</b>	1.97	2.06	2.02

<b>Modes</b>	<b>UMTS BAND V</b>		
<b>Channel</b>	<b>4358</b>	<b>4407</b>	<b>4457</b>
	<b>(Low)</b>	<b>(Mid)</b>	<b>(High)</b>
<b>Frequency (MHz)</b>	<b>826.6</b>	<b>836.6</b>	<b>846.4</b>
<b>Peak-To-Average Ratio (dB)</b>	2.08	2.05	2.06

## **7. OCCUPIED BANDWIDTH**

### **7.1 MEASUREMENT METHOD**

1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.
2. RBW=1~5% of the expected OBW, VBW $\geq$ 3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

### **7.2 PROVISIONS APPLICABLE**

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

### 7.3 MEASUREMENT RESULT

#### APPENDIX A: BANDWIDTH


##### Test Results







Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM850	GSM	LCH	244.33	309.02	PASS
		MCH	247.90	319.92	PASS
		HCH	245.27	310.59	PASS
	EDGE	LCH	254.48	307.87	PASS
		MCH	250.65	324.07	PASS
		HCH	250.68	307.41	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM1900	GSM	LCH	245.76	307.65	PASS
		MCH	246.07	317.11	PASS
		HCH	243.80	308.71	PASS
	EDGE	LCH	246.94	313.17	PASS
		MCH	249.91	313.98	PASS
		HCH	250.62	322.83	PASS

**For GSM**

Test Band=GSM850/GSM1900  
Test Mode=GSM/ EDGE

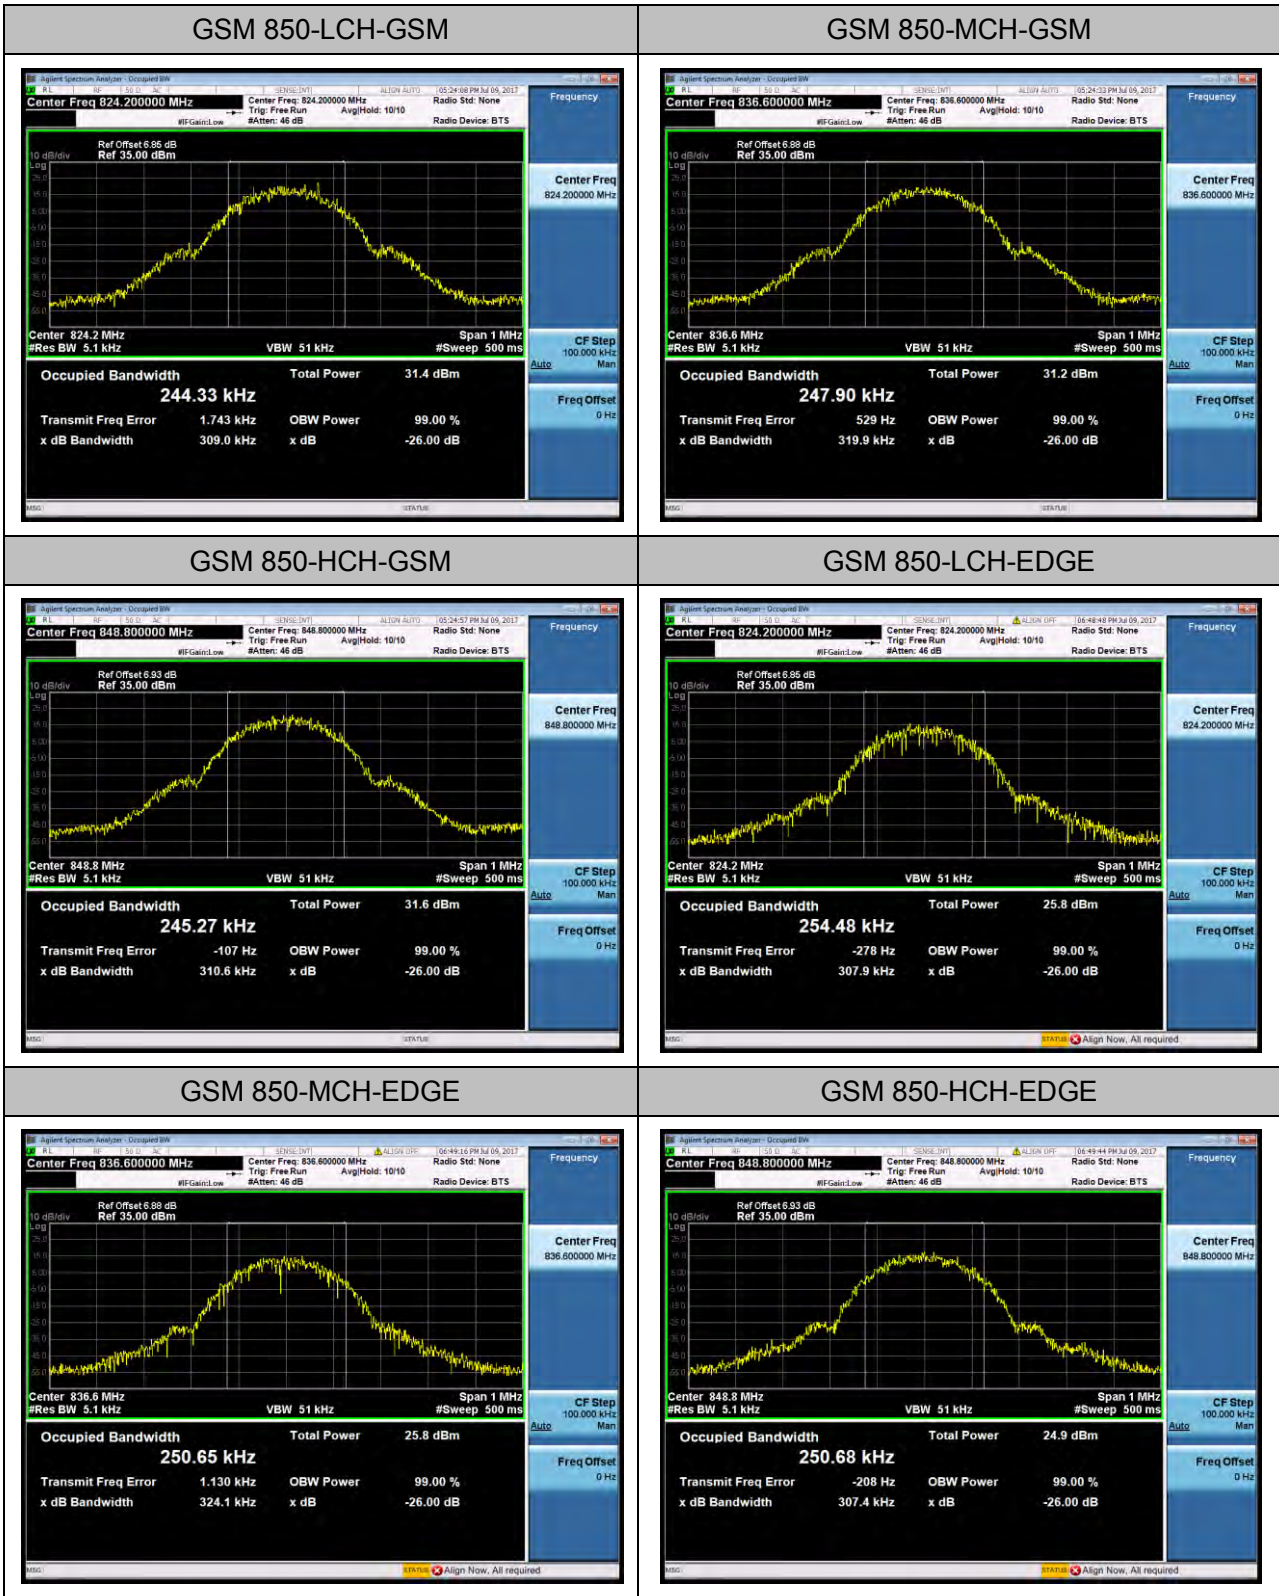

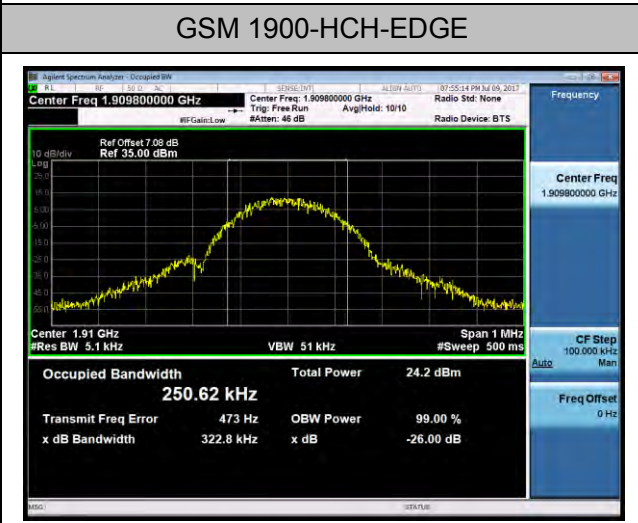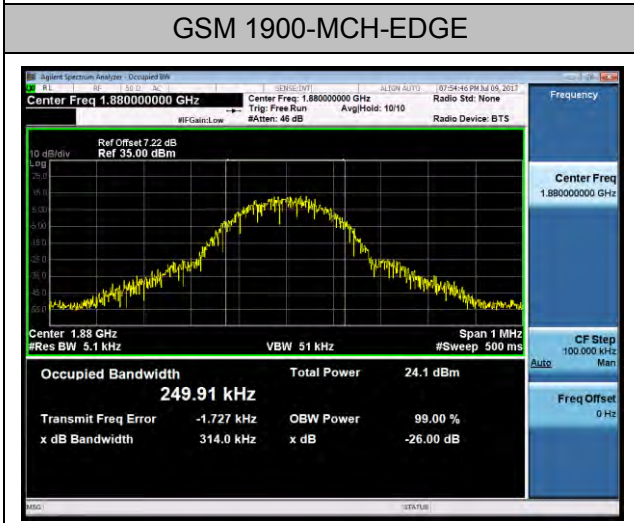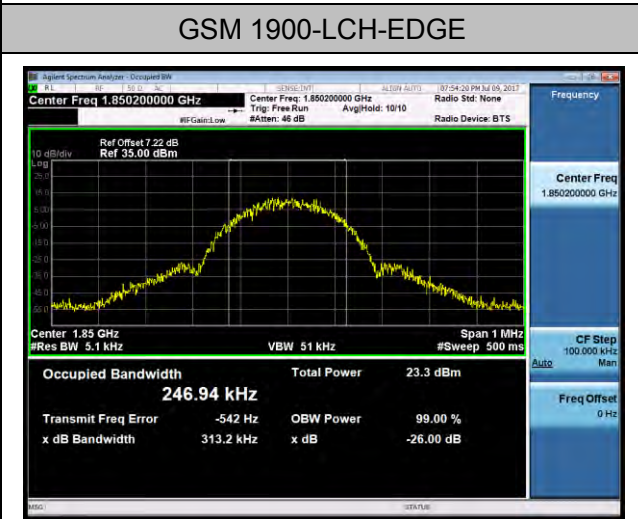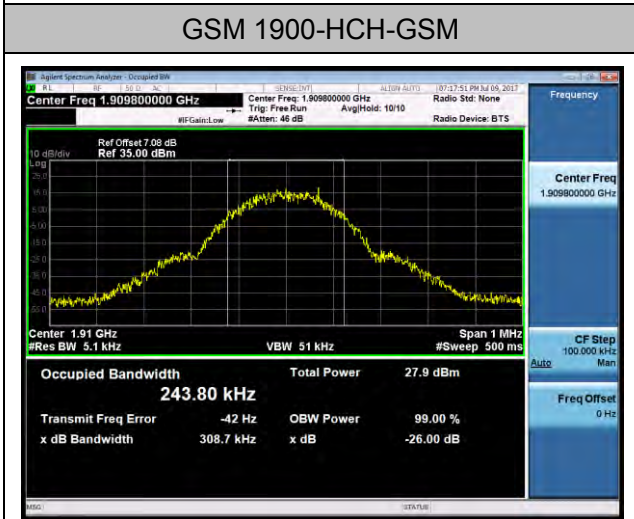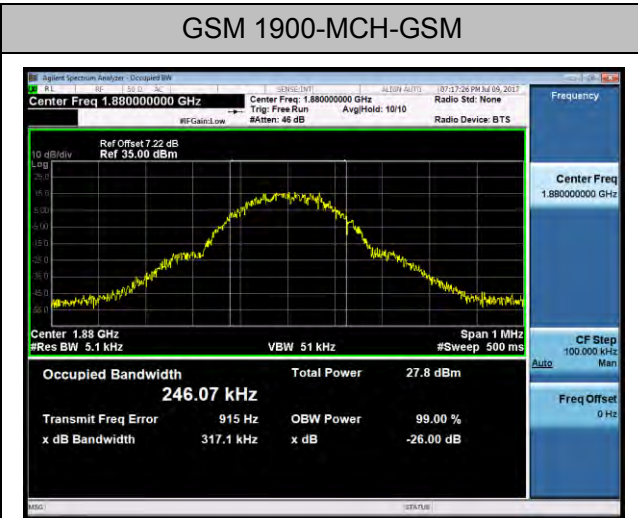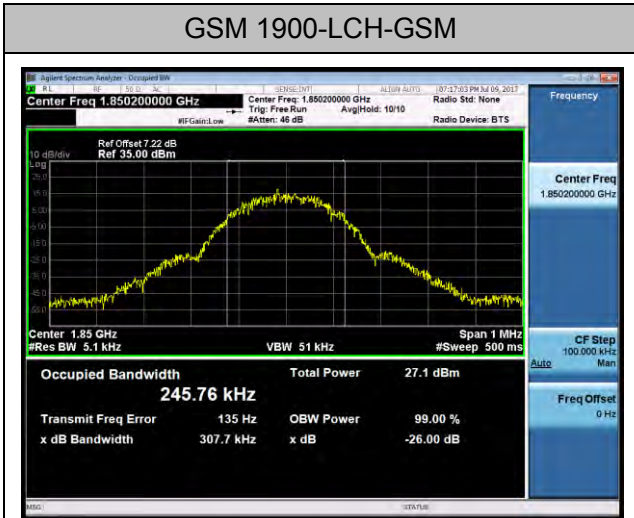

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 850	UMTS	LCH	4201.4	4886	PASS
		MCH	4218.7	4902	PASS
		HCH	4220.5	4908	PASS


Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 1700	UMTS	LCH	4210.8	4867	PASS
		MCH	4198.6	4886	PASS
		HCH	4213.6	4891	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 1900	UMTS	LCH	4211.0	4882	PASS
		MCH	4218.4	4901	PASS
		HCH	4222.7	4907	PASS

**For WCDMA**


**Test Band=WCDMA850/WCDMA1700/WCDMA1900**

**Test Mode=UMTS**

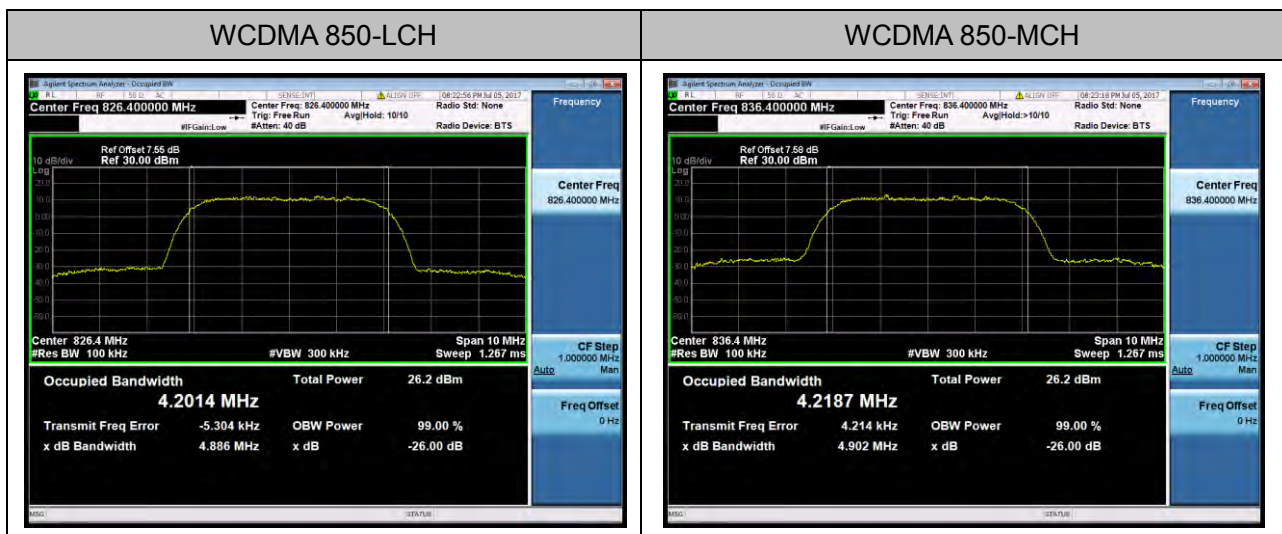





WCDMA 850-HCH

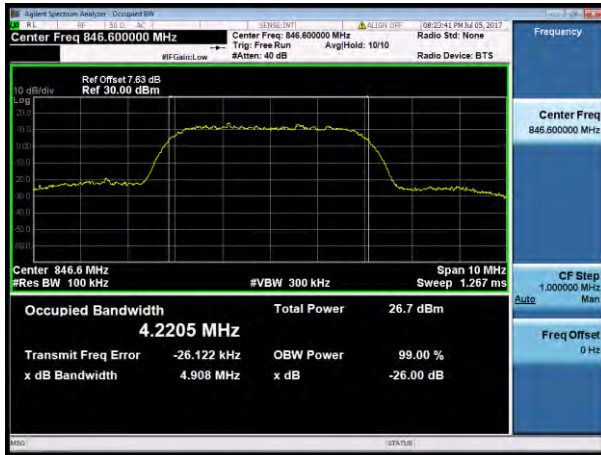


WCDMA 1700-LCH

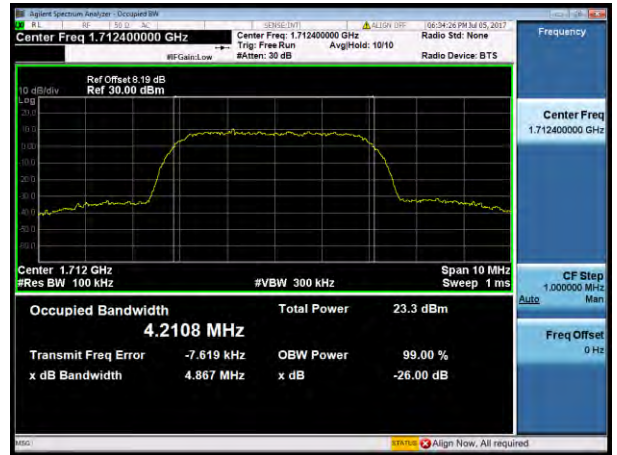


WCDMA 1700-MCH

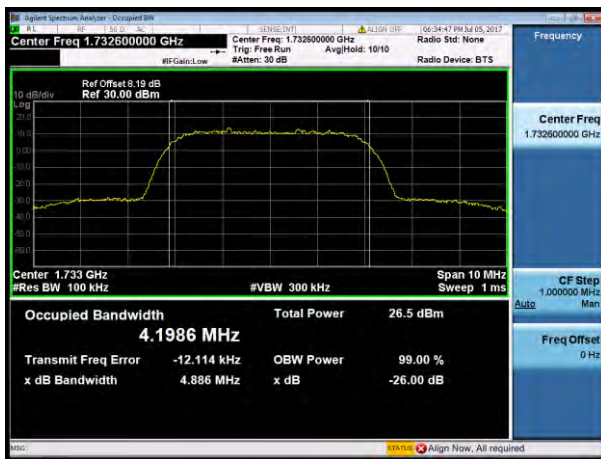


WCDMA 1700-HCH

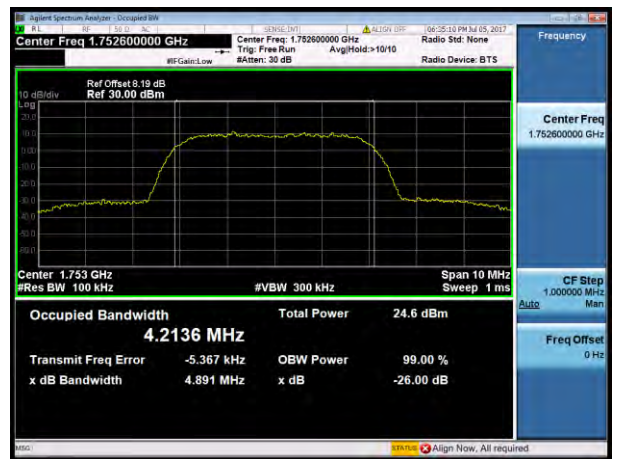


WCDMA 1900-LCH

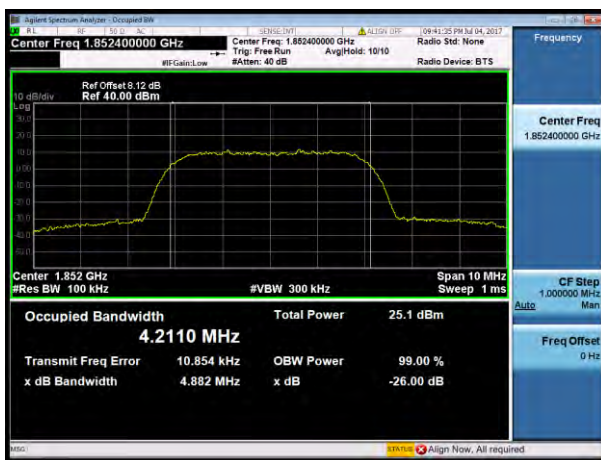

WCDMA 1900-MCH

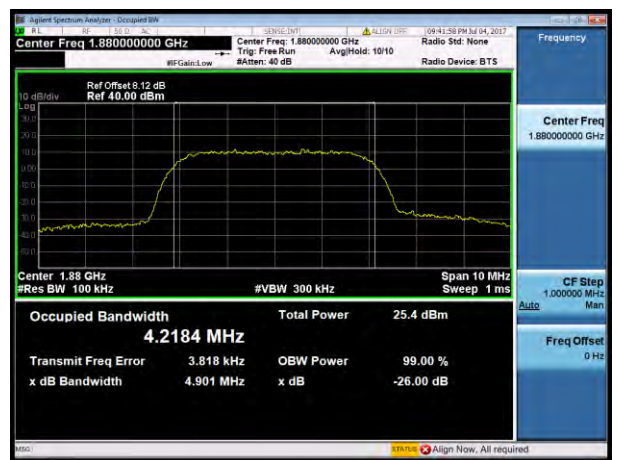

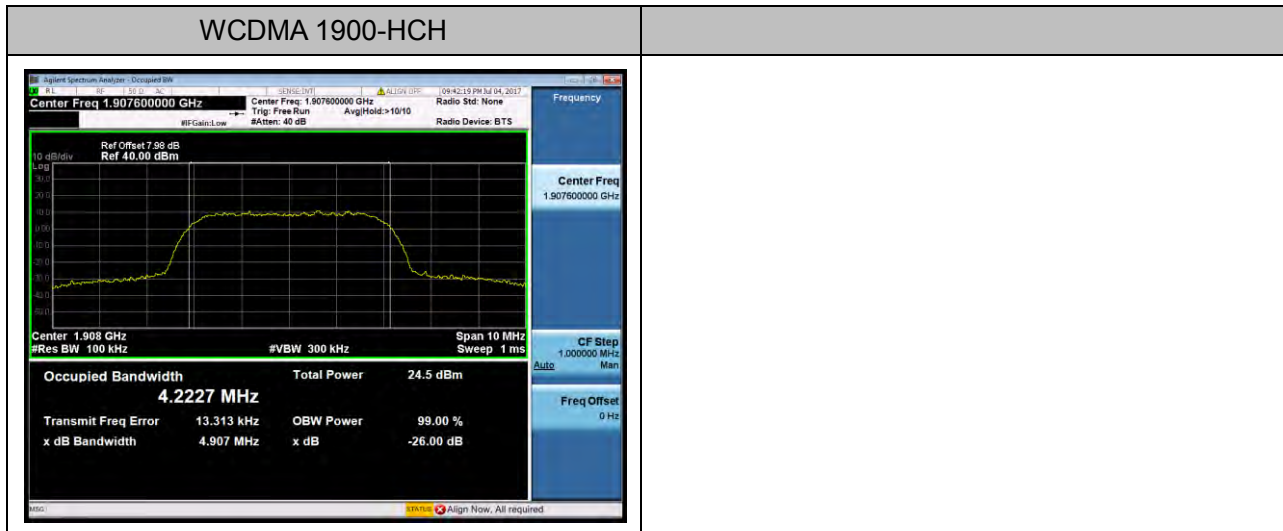

## 8. BAND EDGE

### 8.1 MEASUREMENT METHOD

1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration
2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
4. Span was set large enough so as to capture all out of band emissions near the band edge.
5. RBW>1% of the emission bandwidth, VBW >=3 x RBW, Detector=RMS, Number of points>=2 x Span/RBW, Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

### 8.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a) 、 24.238(a) and KDB 971168 V02r02

### 8.3 MEASUREMENT RESULT

## APPENDIX B: BAND EDGES COMPLIANCE


### Test Results

For GSM


Test Band=GSM850/GSM1900

Test Mode=GSM


GSM 850-LCH-GSM

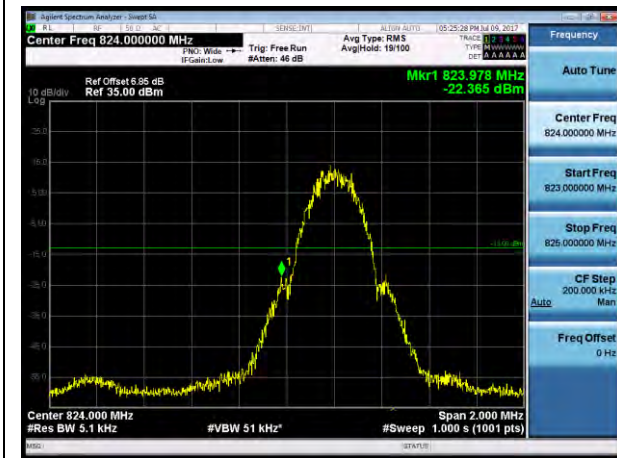


GSM 850-HCH-GSM

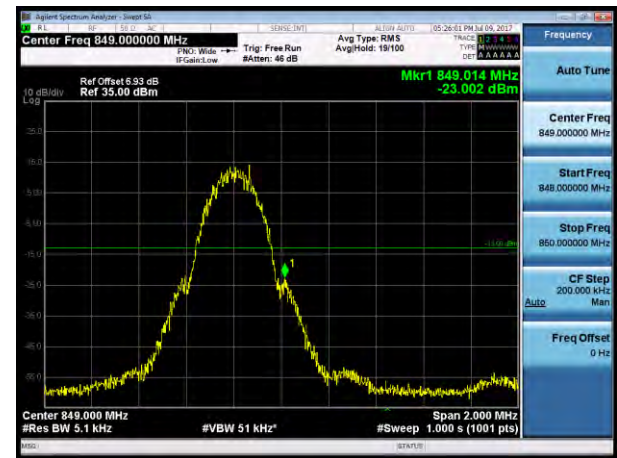


GSM 1900-LCH-GSM

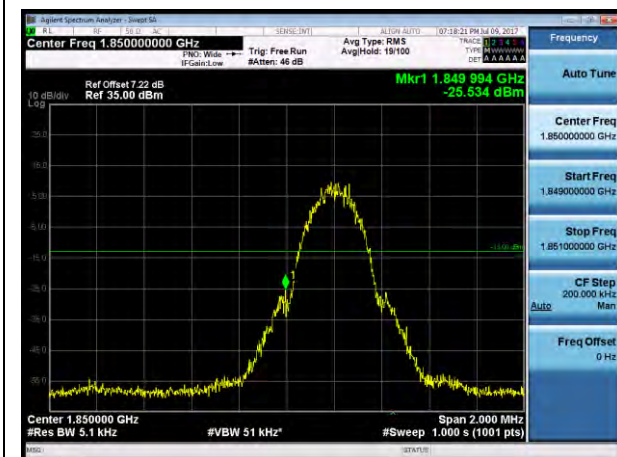

GSM 1900-HCH-GSM

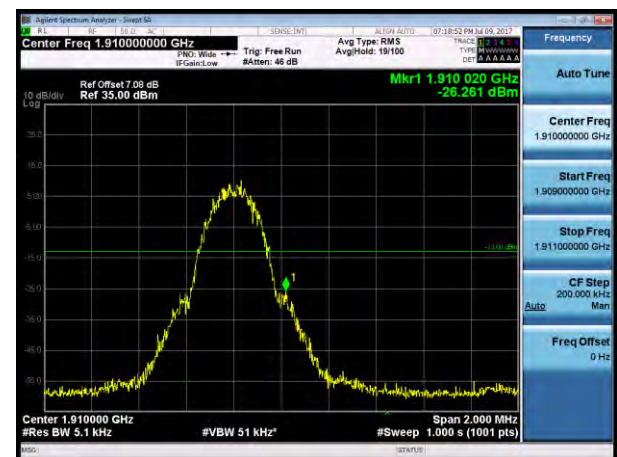

For WCDMA  
 Test Band=WCDMA850/WCDMA1700/WCDMA1900  
 Test Mode=UMTS

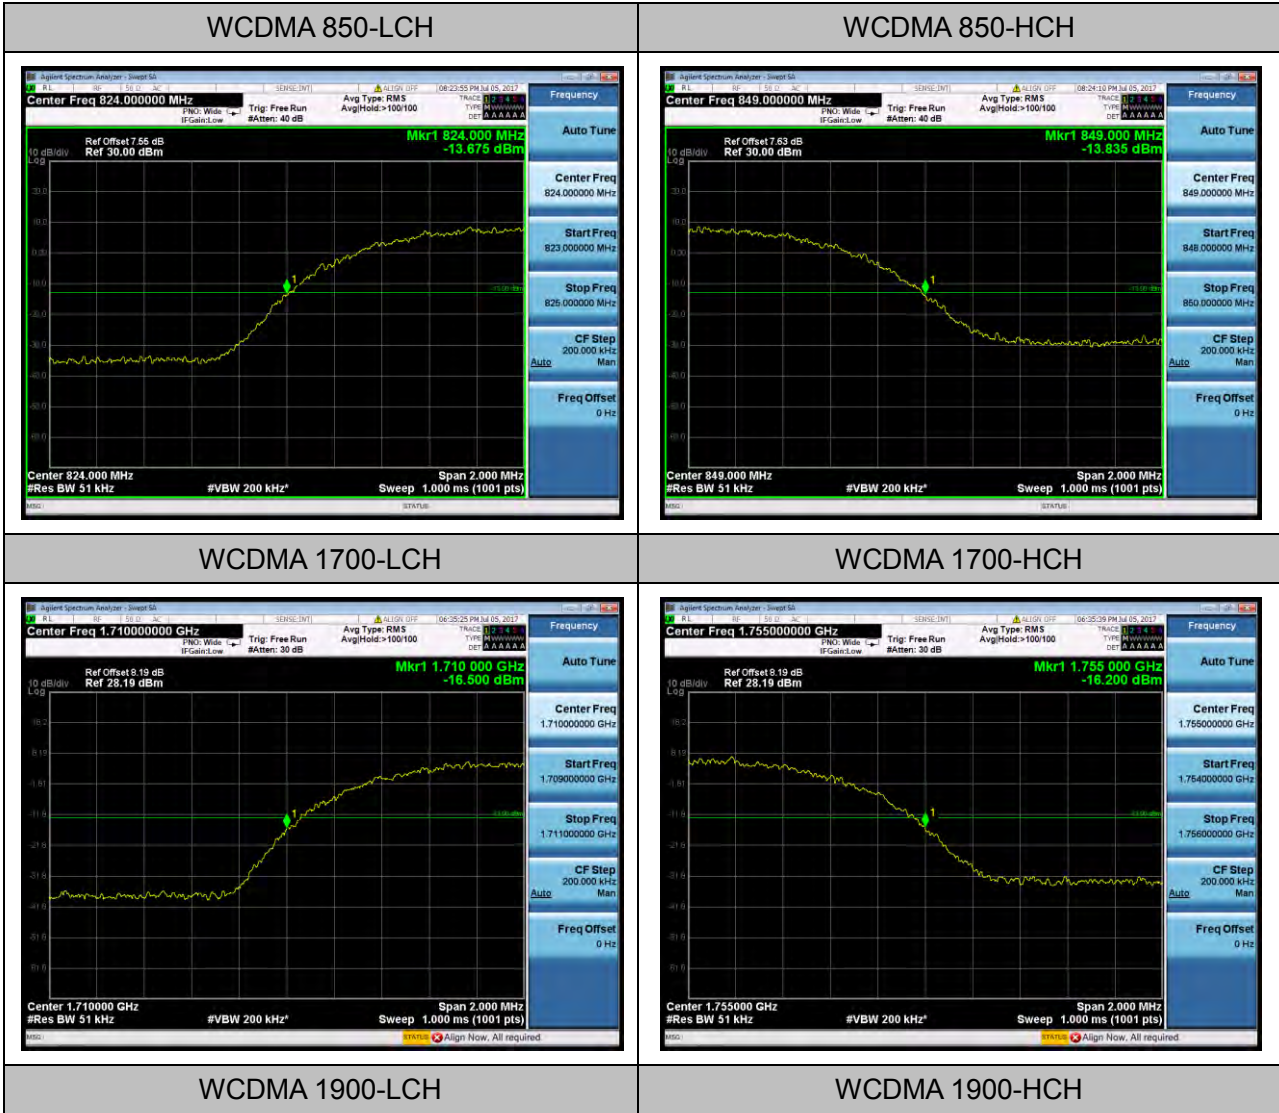

WCDMA 850-LCH

WCDMA 850-HCH

WCDMA 1700-LCH

WCDMA 1700-HCH

WCDMA 1900-LCH

WCDMA 1900-HCH



## 9. SPURIOUS EMISSION

### 9.1 CONDUCTED SPURIOUS EMISSION

#### 9.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. The level of the carrier and the various conducted spurious and harmonic frequency is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration.
2. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM 850, data taken from 30 MHz to 9 GHz.
3. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850/EDGE 8	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900/EDGE 8	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band II	
Channel	Frequency (MHz)
9663	1852.6
9800	1880
9937	1907.4

<b>Typical Channels for testing of UMTS band IV</b>	
Channel	Frequency (MHz)
1887	1712.4
1987	1732.6
2087	1752.6
<b>Typical Channels for testing of UMTS band V</b>	
Channel	Frequency (MHz)
4358	826.6
4407	836.4
4457	846.4

### 9.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


9.1.3 MEASUREMENT RESULT

APPENDIX C: SPURIOUS EMISSION AT ANTENNA TERMINAL



Test Results

Test Band=GSM850/GSM1900


Test Mode=GSM/EDGE

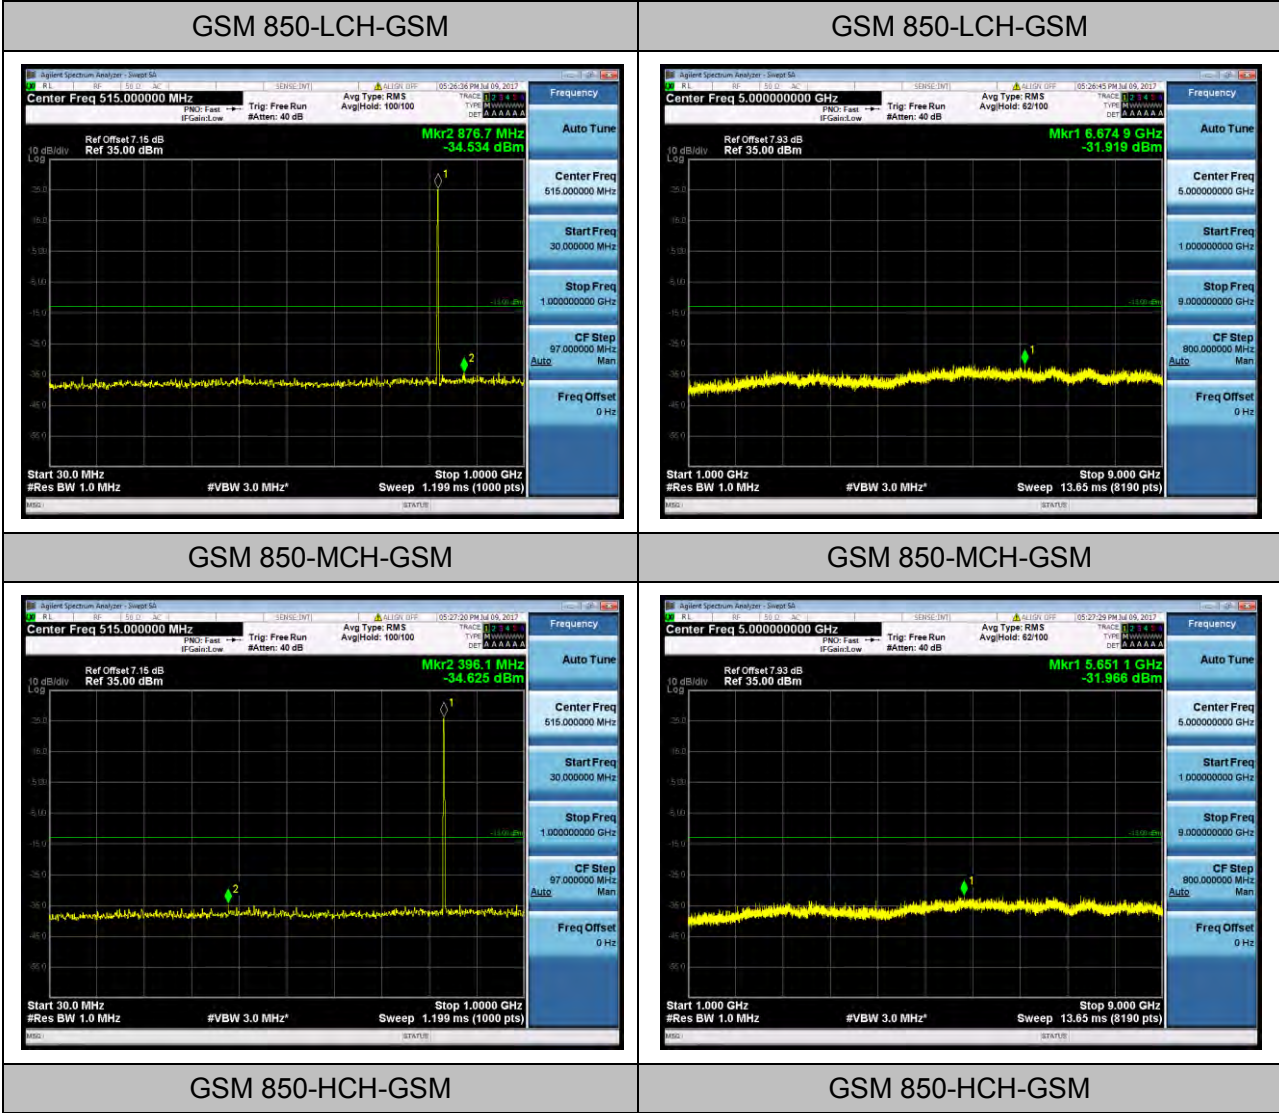




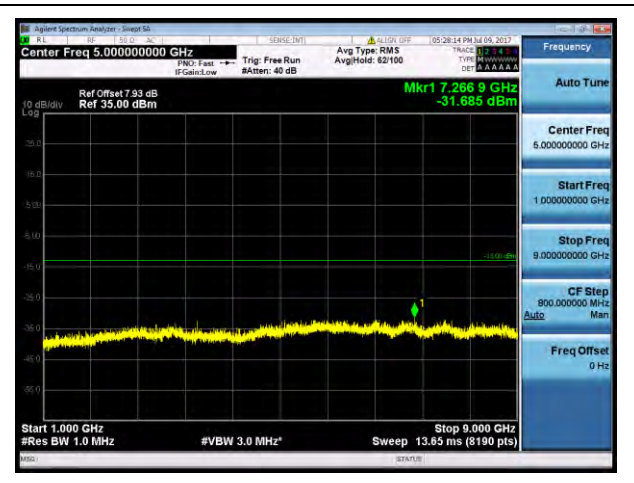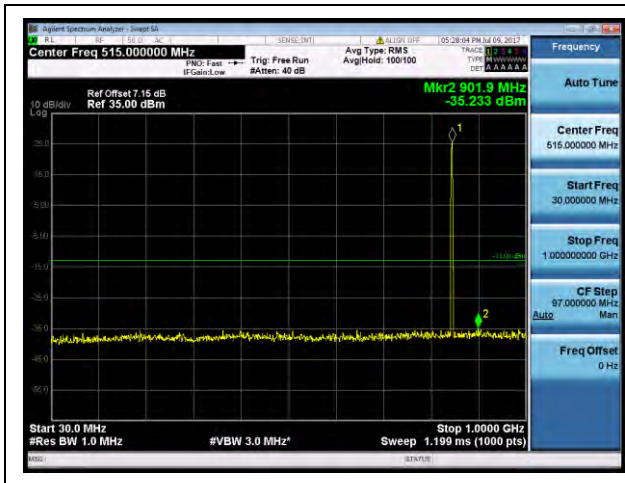

GSM 850-LCH-EDGE


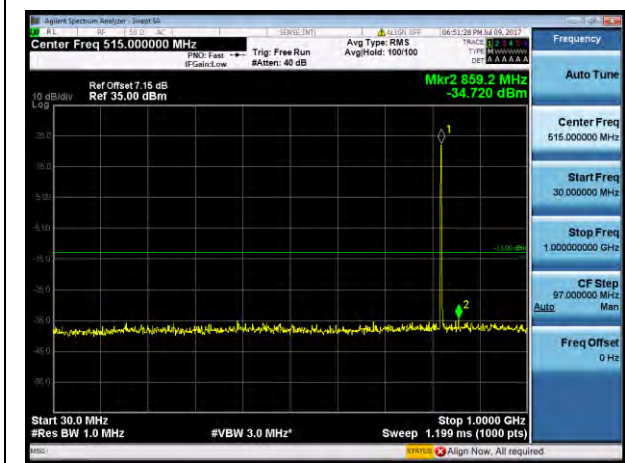


GSM 850-LCH-EDGE

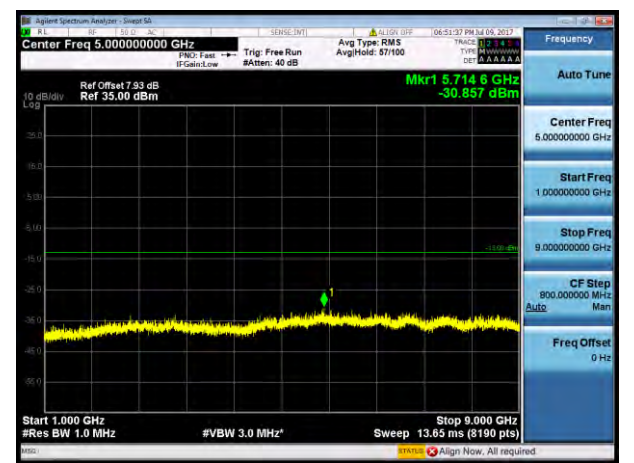





GSM 850-MCH-EDGE

GSM 850-MCH-EDGE

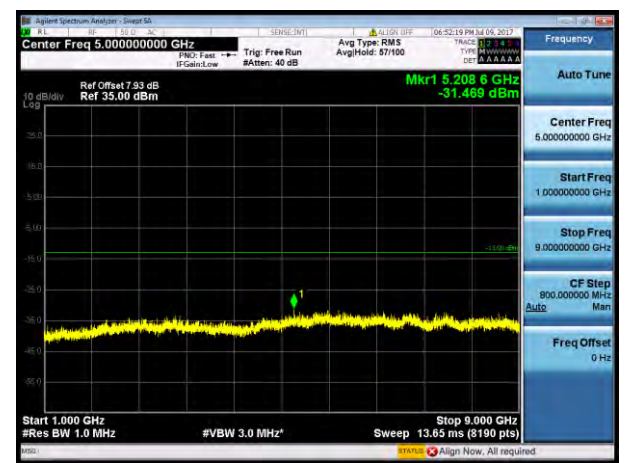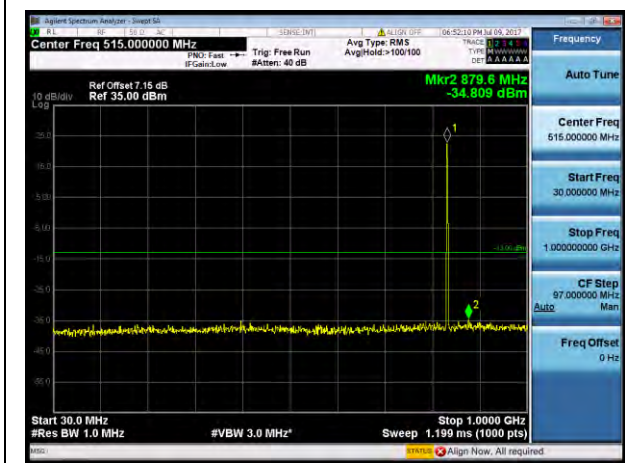



GSM 850-HCH-EDGE

GSM 850-HCH-EDGE

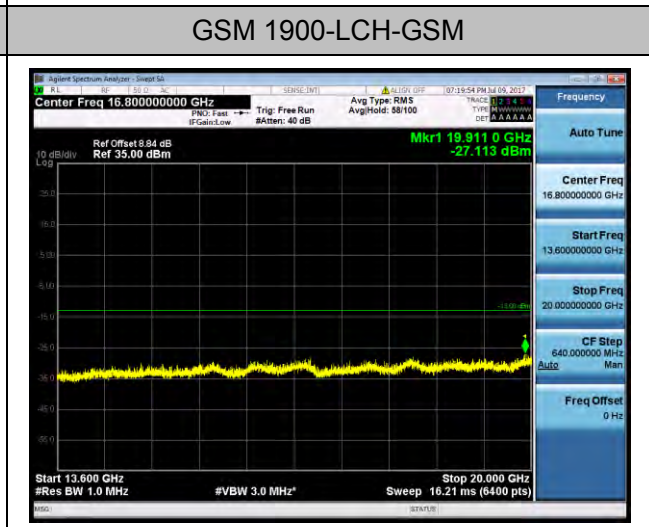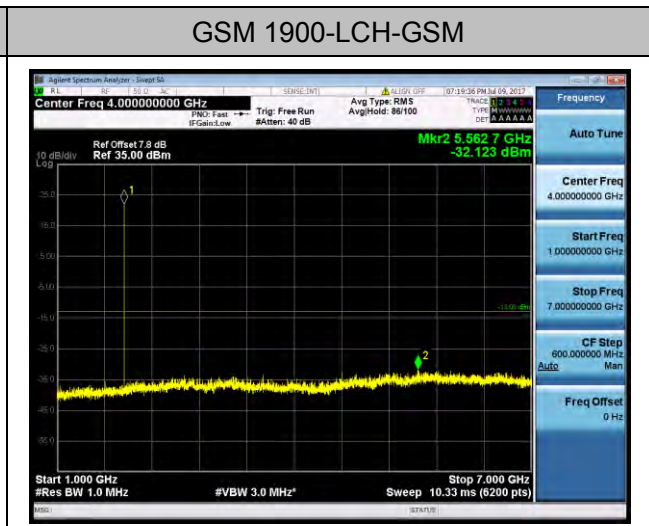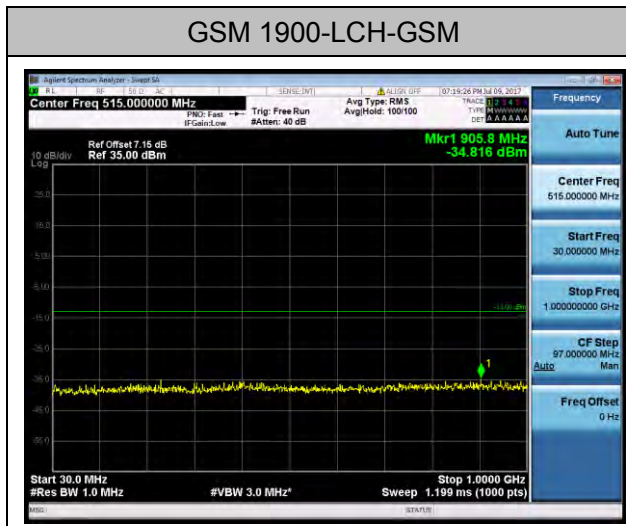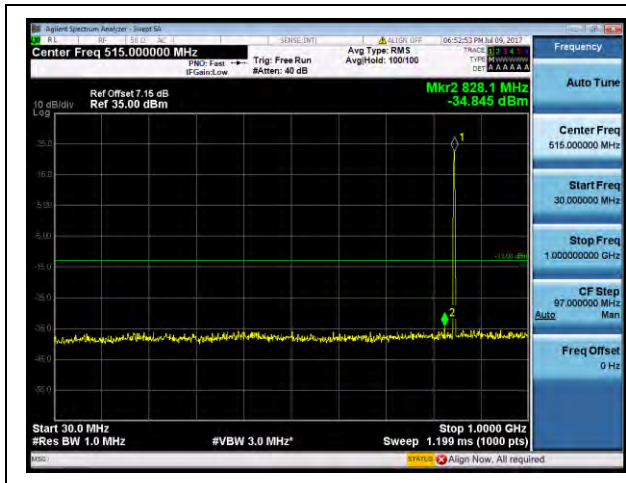


GSM 1900-MCH-GSM


GSM 1900-MCH-GSM

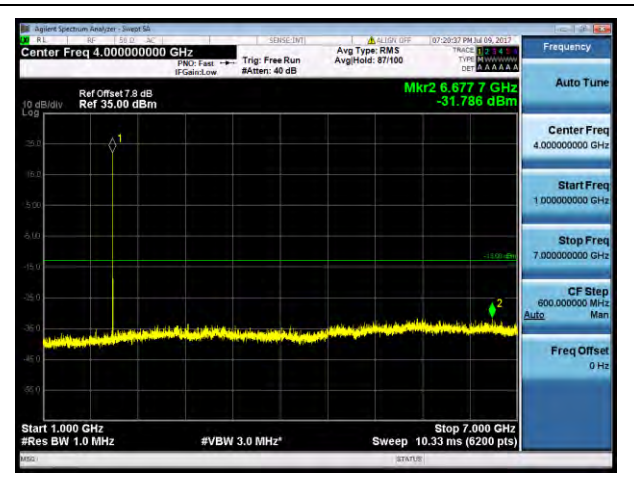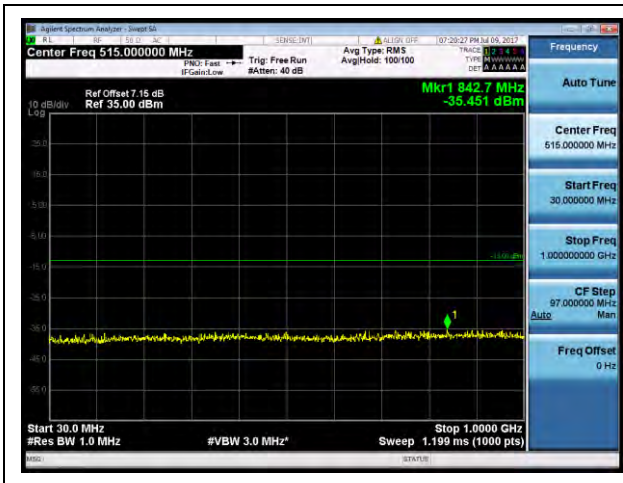


GSM 1900-MCH-GSM

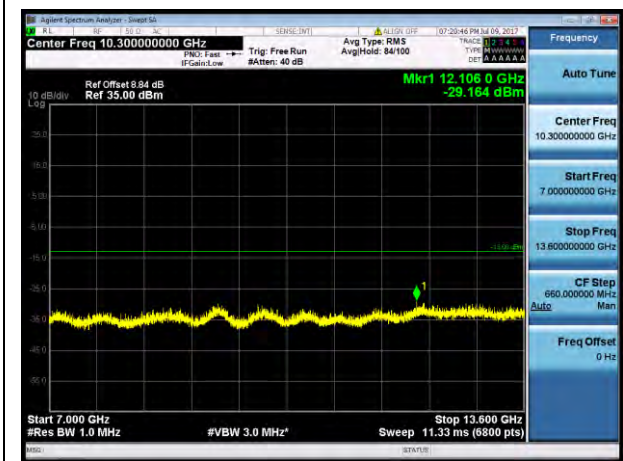


GSM 1900-MCH-GSM




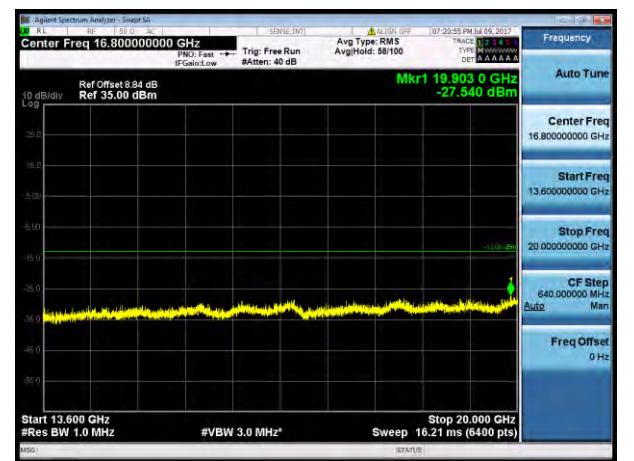


GSM 1900-HCH-GSM

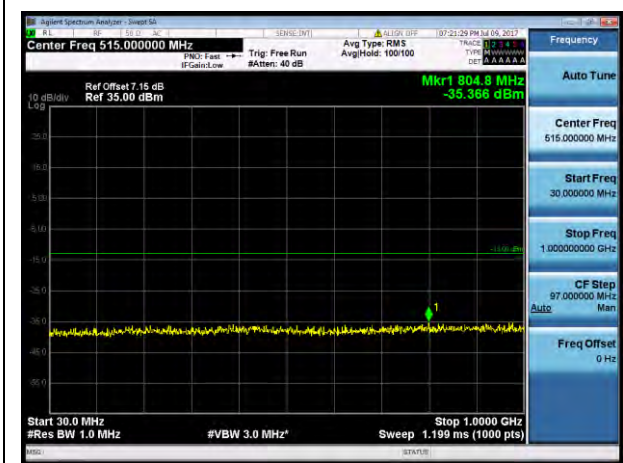


GSM 1900-HCH-GSM

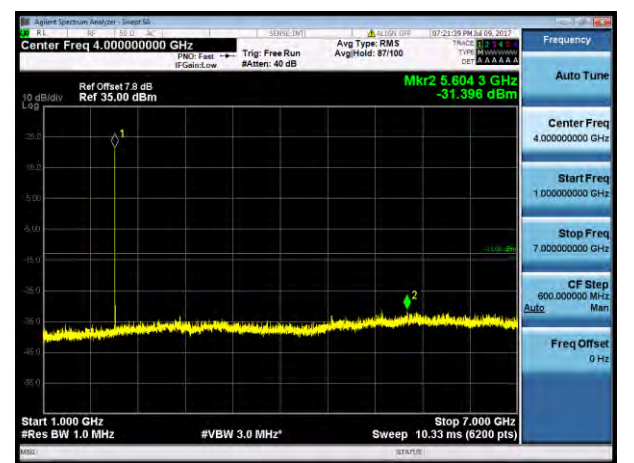

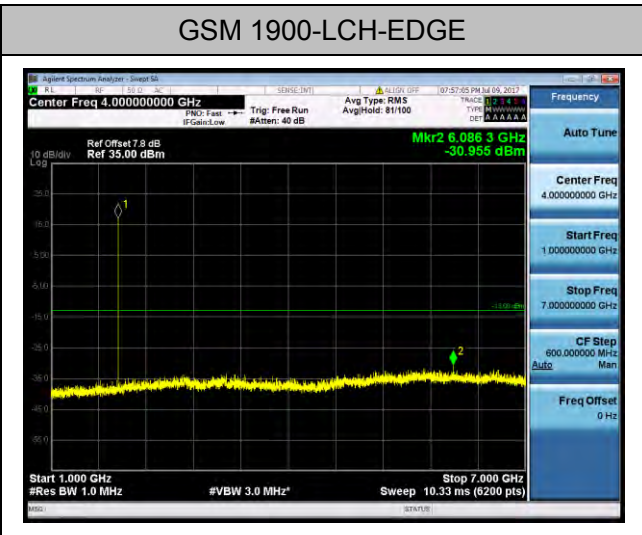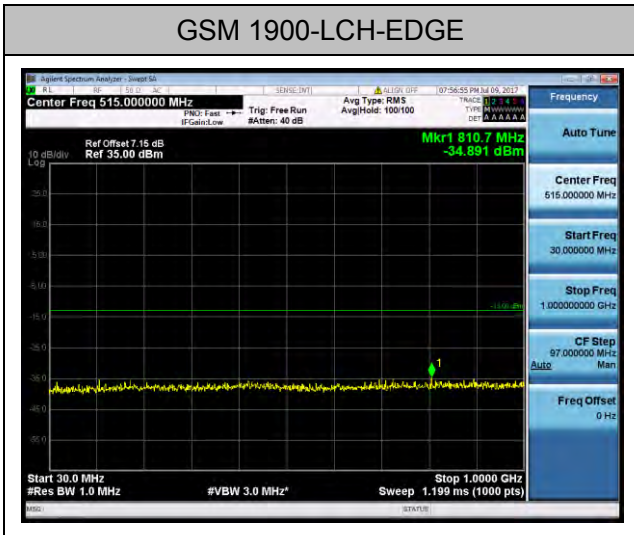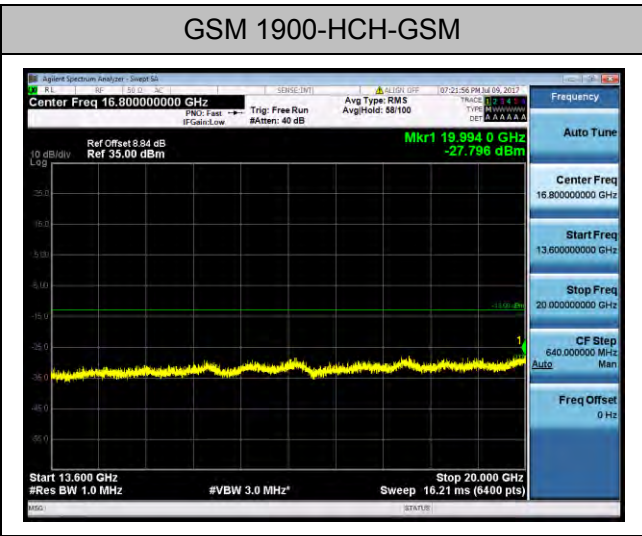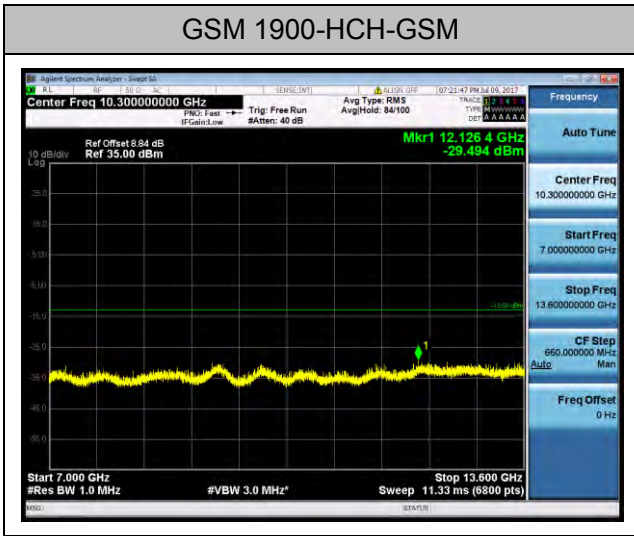


GSM 1900-LCH-EDGE


GSM 1900-LCH-EDGE

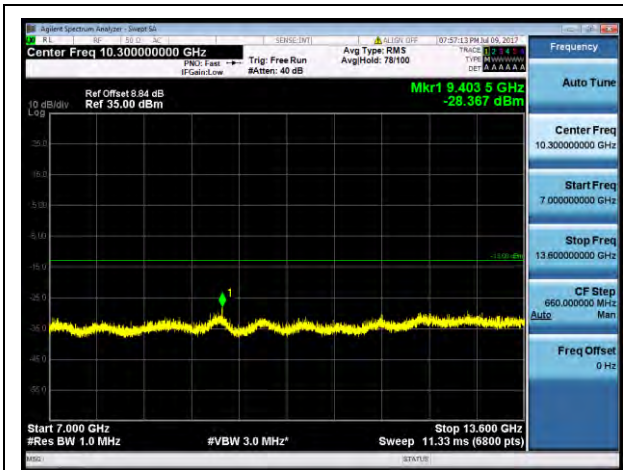


GSM 1900-MCH-EDGE

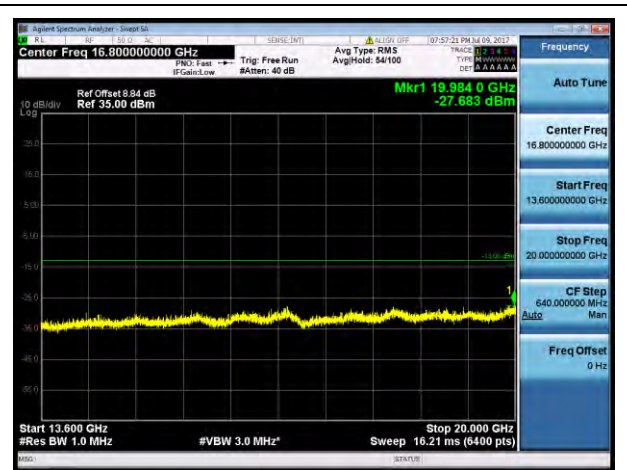


GSM 1900-MCH-EDGE

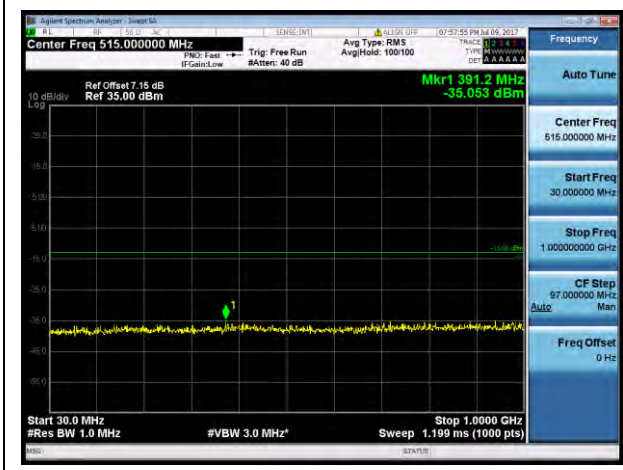


GSM 1900-MCH-EDGE

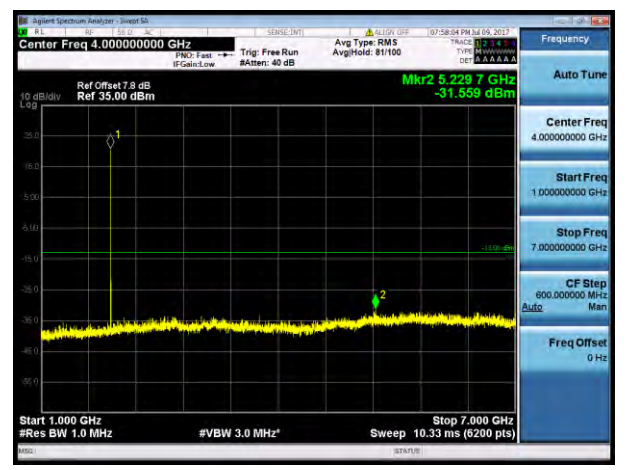


GSM 1900-MCH-EDGE

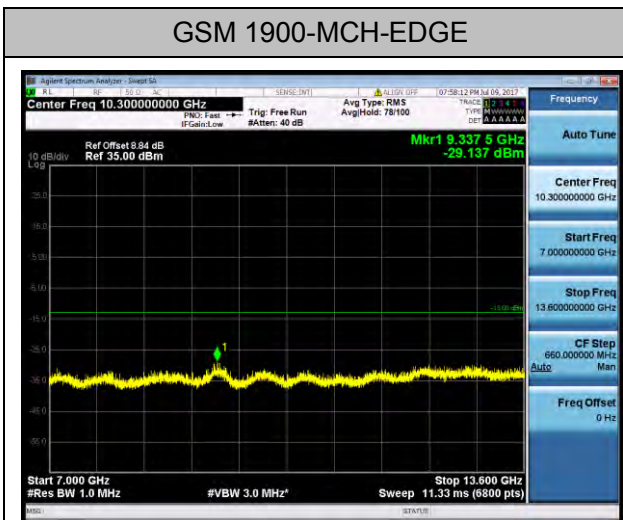


GSM 1900-HCH-EDGE

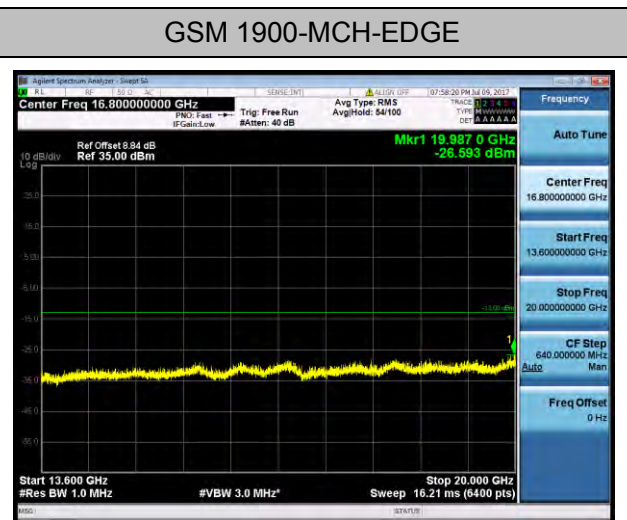



GSM 1900-HCH-EDGE

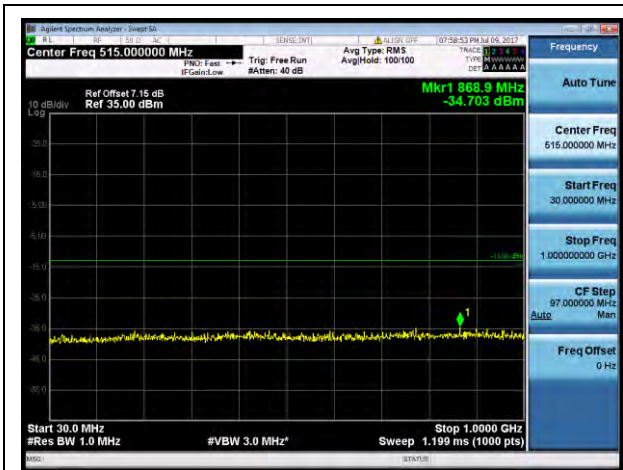

GSM 1900-HCH-EDGE

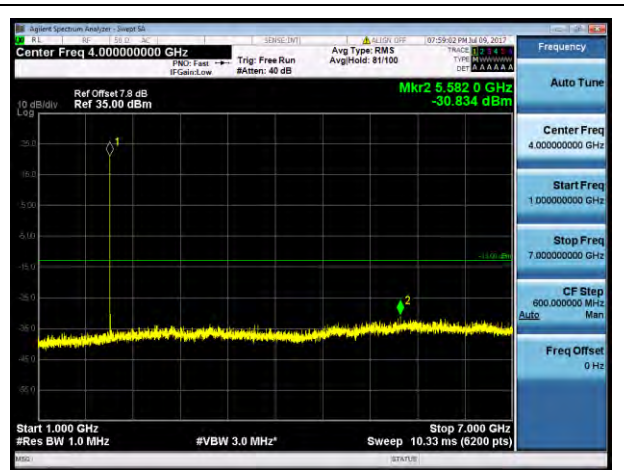


GSM 1900-HCH-EDGE

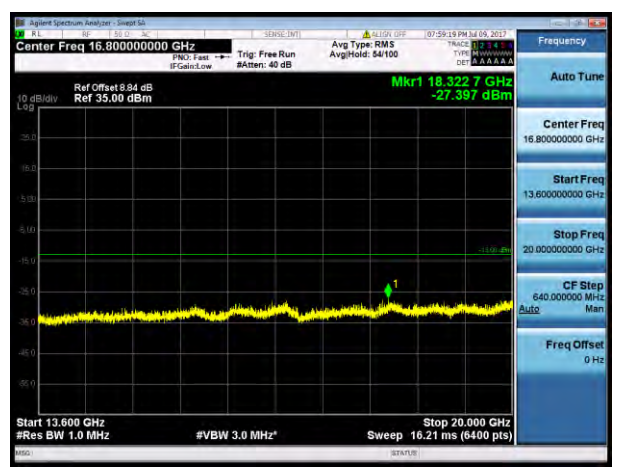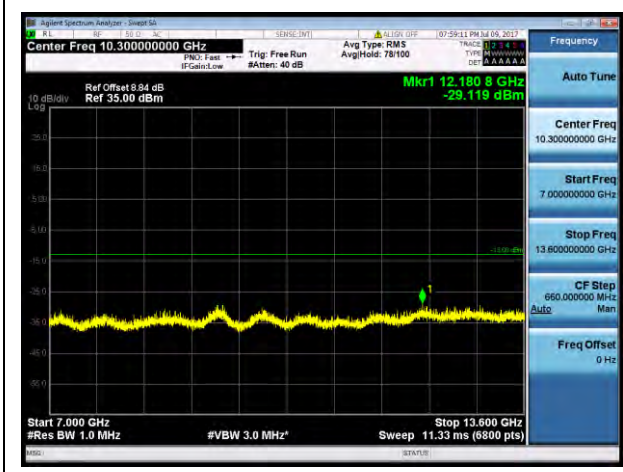

Test Band=WCDMA850/WCDMA1700/WCDMA1900


Test Mode=UMTS

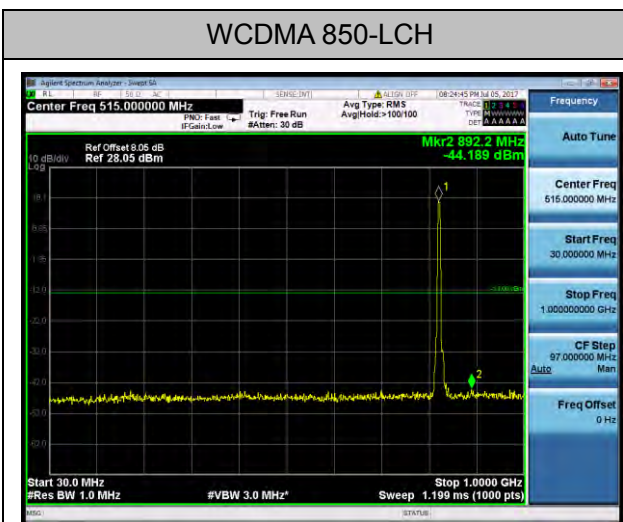


WCDMA 850-MCH




WCDMA 850-MCH

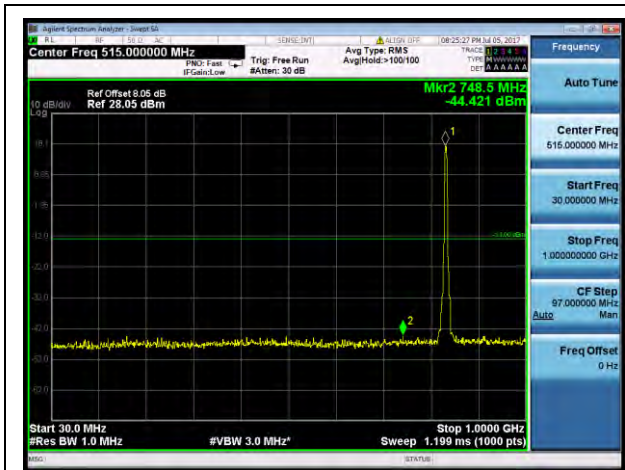

WCDMA 850-HCH

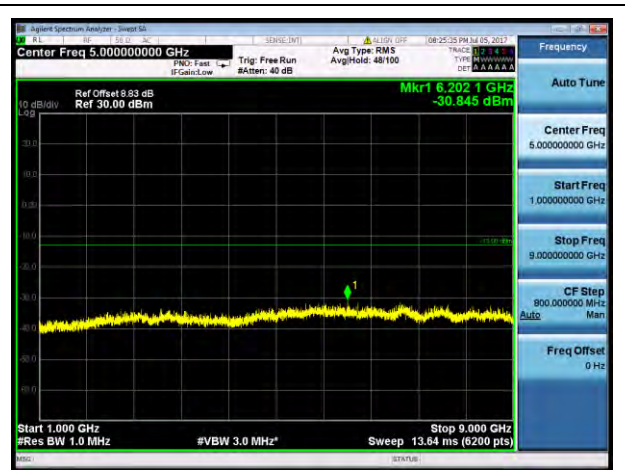


WCDMA 850-HCH

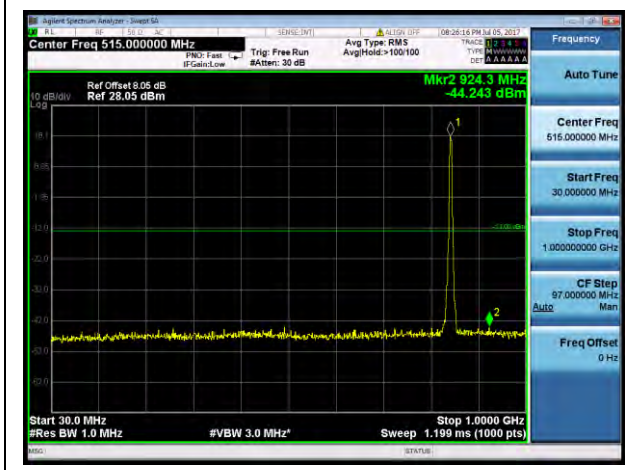


WCDMA 1700-LCH



WCDMA 1700-LCH

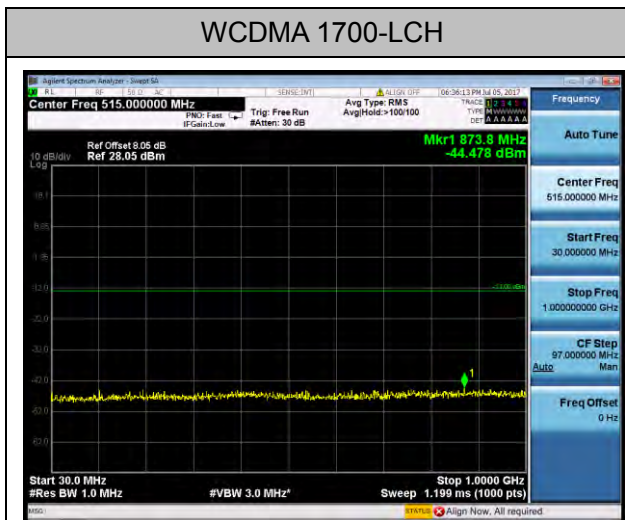


WCDMA 1700-LCH

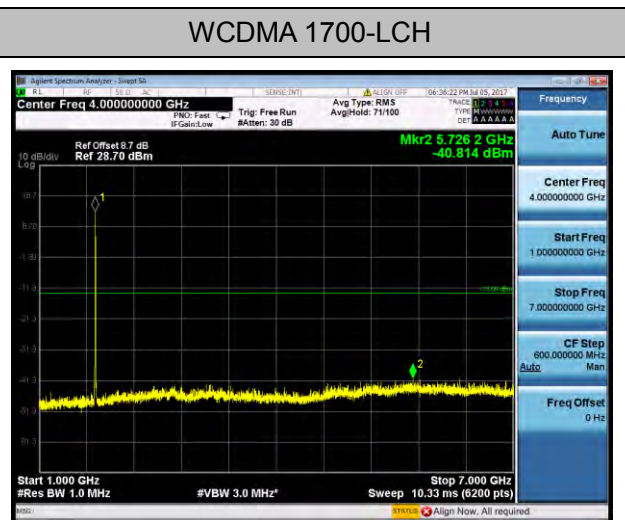


WCDMA 1700-LCH




WCDMA 1700-MCH

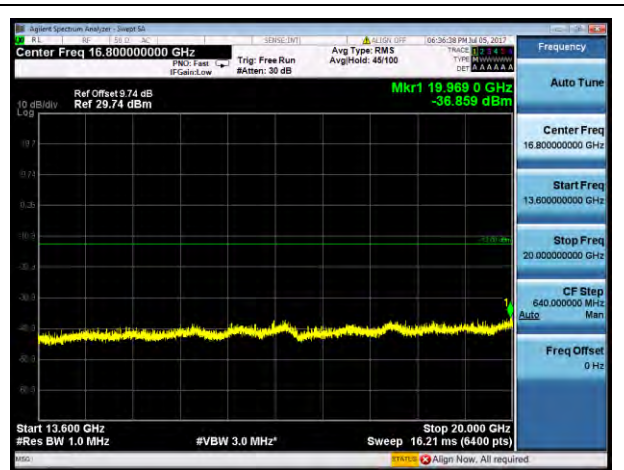


WCDMA 1700-MCH

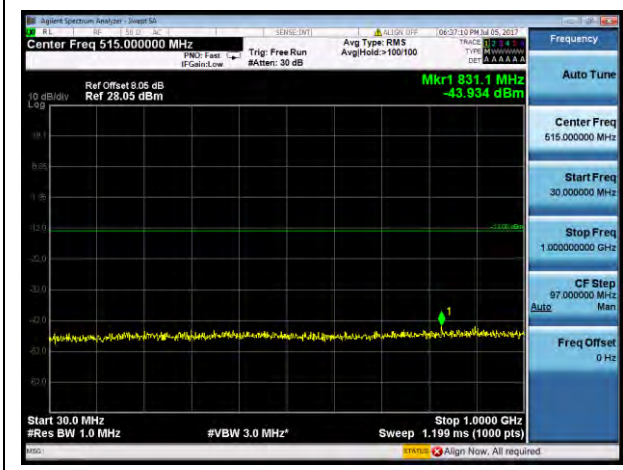


WCDMA 1700-MCH

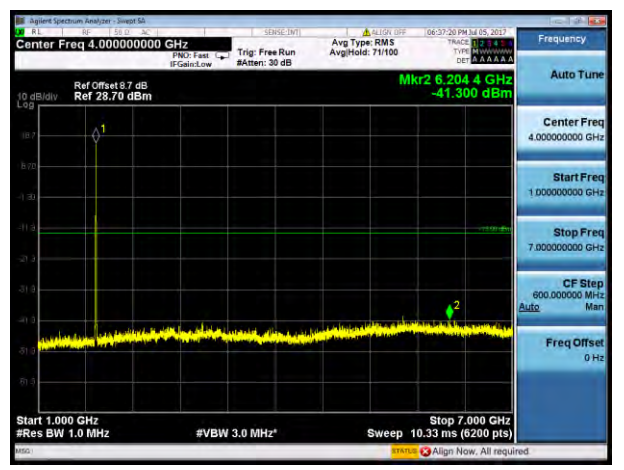

WCDMA 1700-MCH

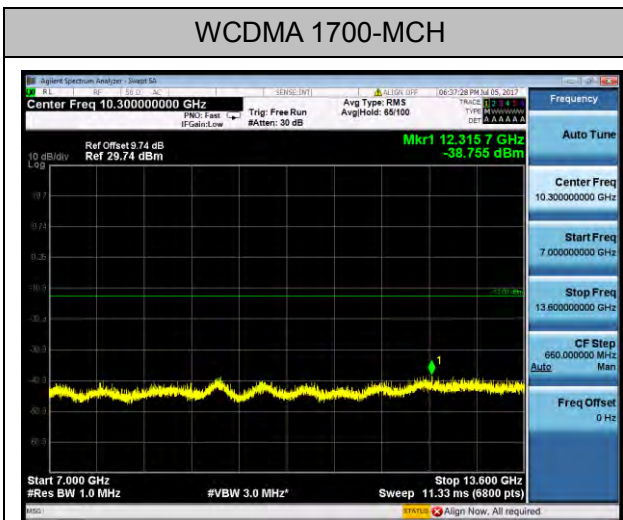


WCDMA 1700-HCH

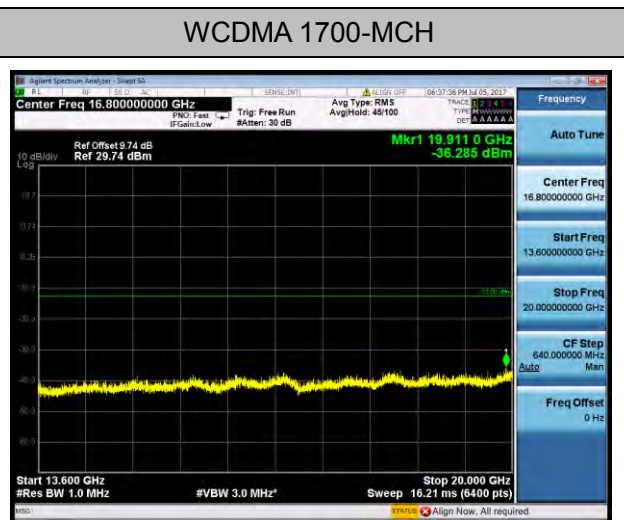


WCDMA 1700-HCH




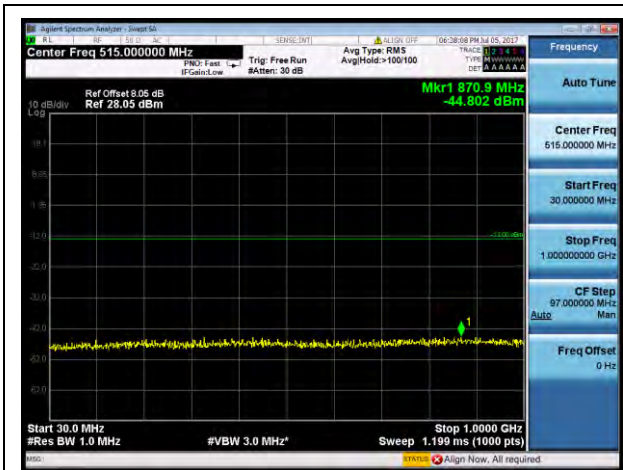


WCDMA 1700-HCH

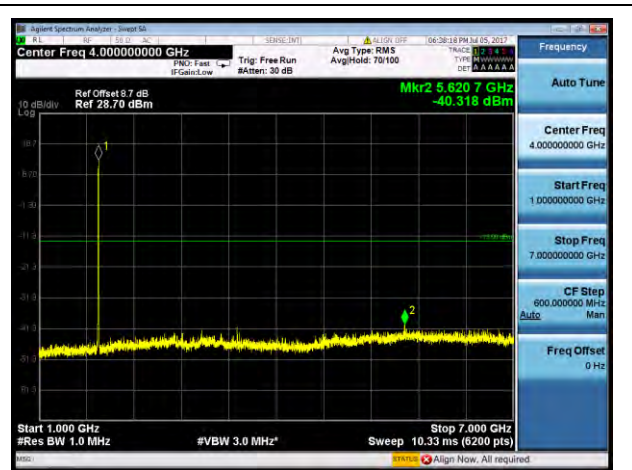


WCDMA 1700-HCH

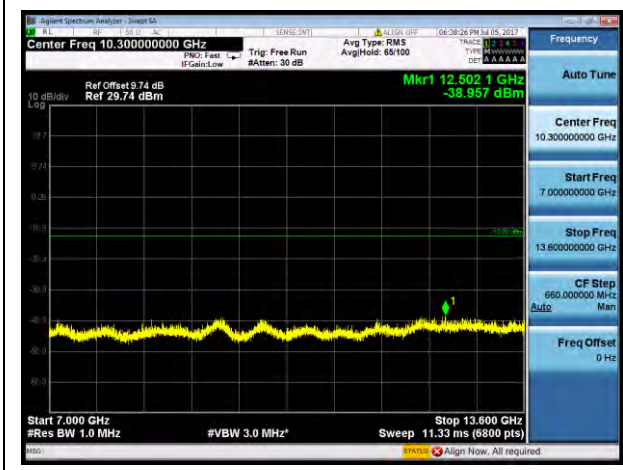


WCDMA 1900-LCH

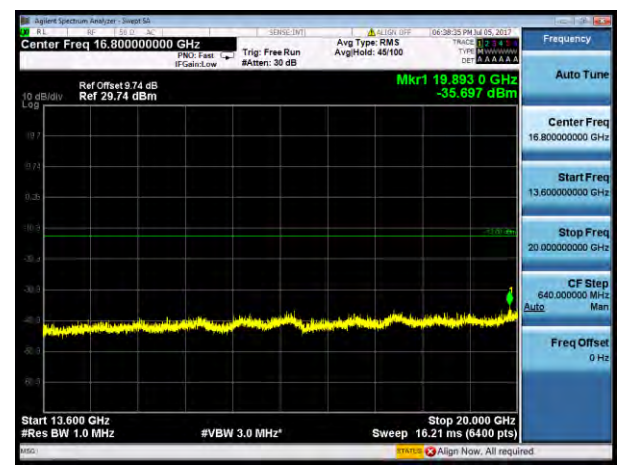

WCDMA 1900-LCH

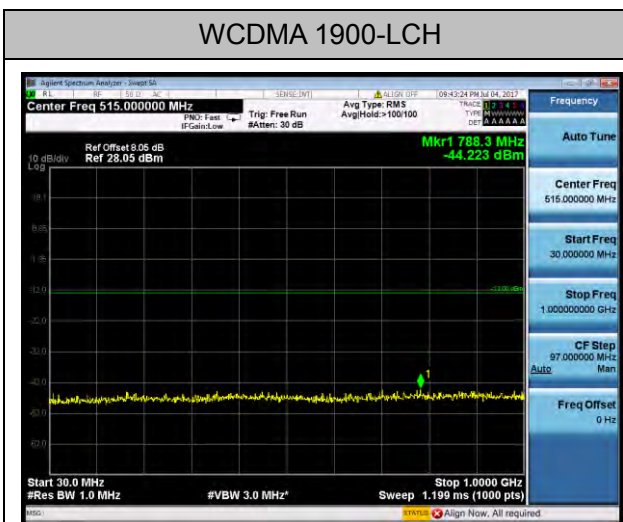

WCDMA 1900-LCH

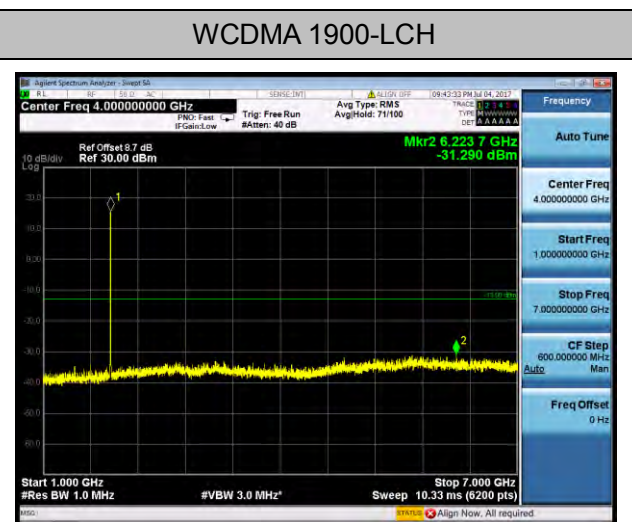


WCDMA 1900-LCH




WCDMA 1900-MCH




WCDMA 1900-MCH

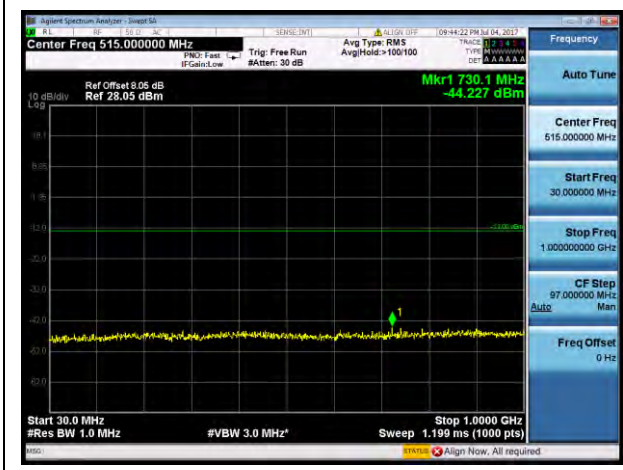


WCDMA 1900-MCH

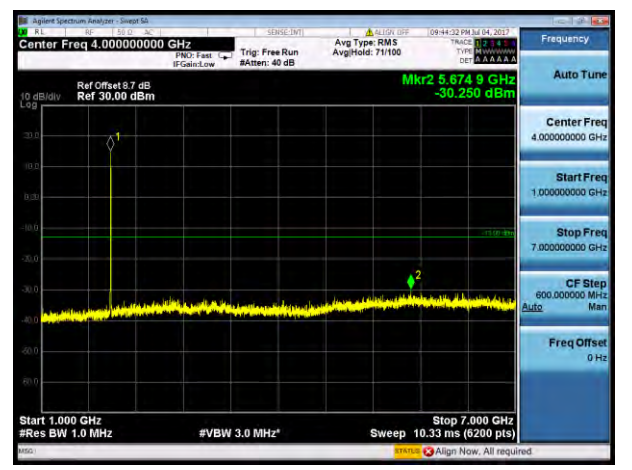


WCDMA 1900-MCH

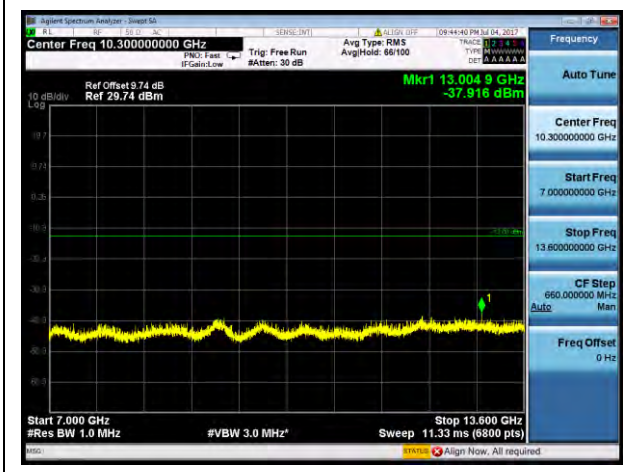

WCDMA 1900-HCH

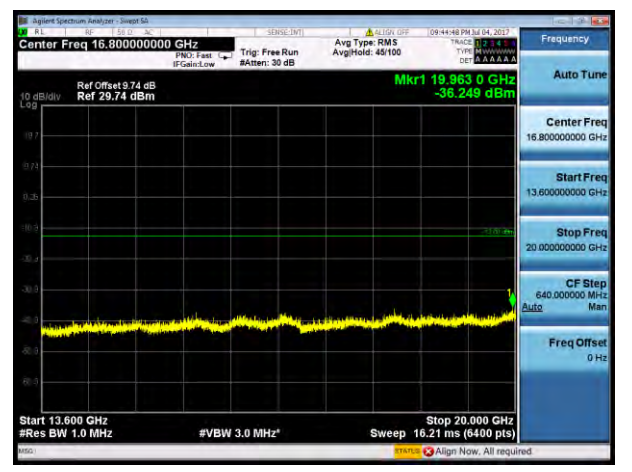

WCDMA 1900-HCH

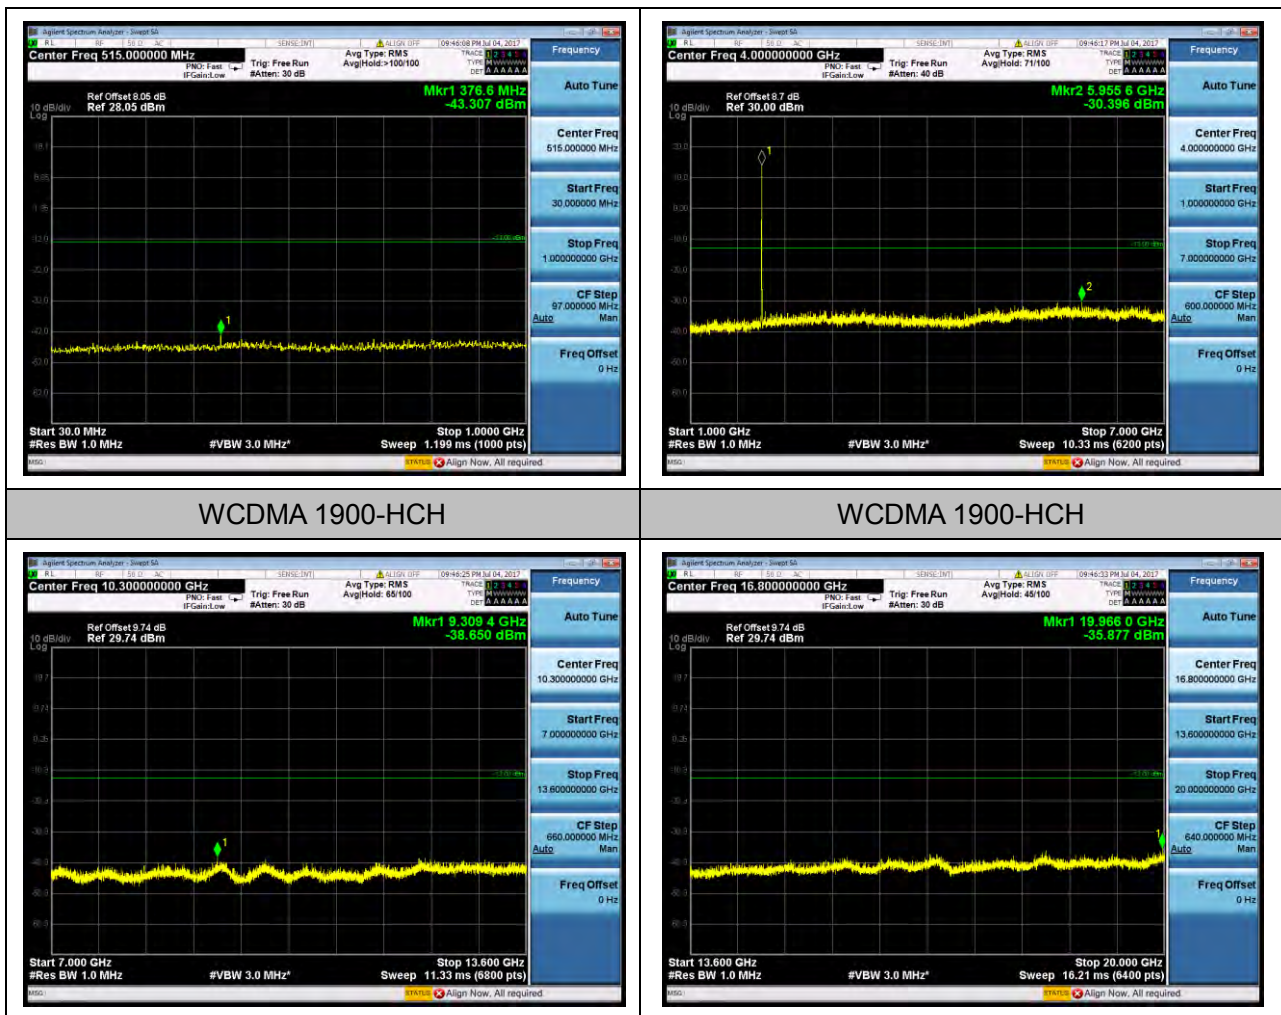

WCDMA 1900-HCH

WCDMA 1900-HCH

**Note:** 1. Below 30MHz no Spurious found and The GSM modes is the worst condition.  
2. As no emission found in standby or receive mode, no recording in this report.


## 9.2 RADIATED SPURIOUS EMISSION

### 9.2.1 MEASUREMENT METHOD


1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

9.2.2 TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

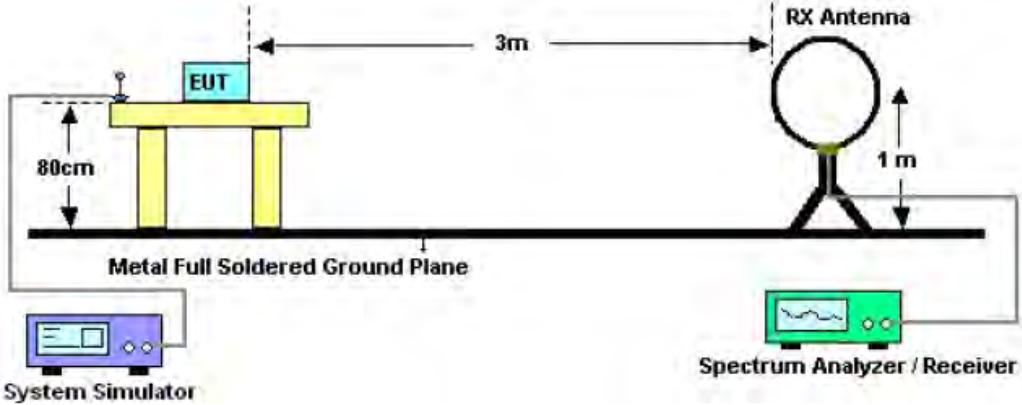

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

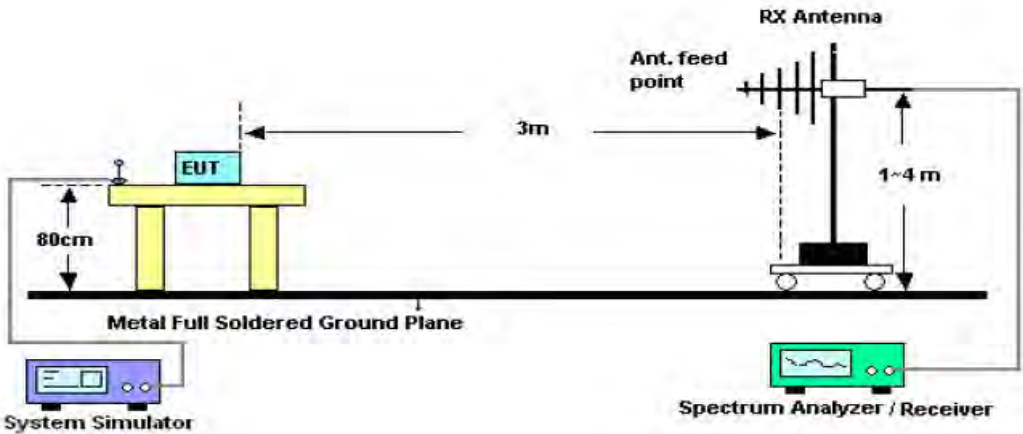

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

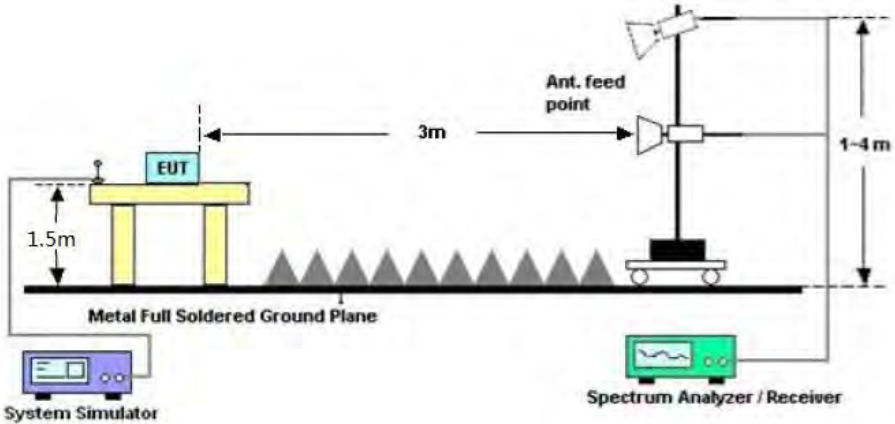

### 9.2.3 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** only result the worst condition of each test mode:

**9.2.4 MEASUREMENT RESULT**

**GSM 850:**

<b>The Worst Test Results for Channel 251/848.8 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1685.23	-44.42	-5.01	-49.43	-13.00	Horizontal
2456.12	-46.57	-2.18	-48.75	-13.00	Vertical
3645.78	-48.85	3.46	-45.39	-13.00	Vertical
4536.58	-45.65	2.79	-42.86	-13.00	Horizontal

**GSM 850(EDGE 8):**

<b>The Worst Test Results for Channel 251/848.8 MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1696.28	-48.68	-2.26	-50.94	-13.00	Horizontal
2162.19	-45.96	-3.12	-49.08	-13.00	Vertical
3645.78	-46.20	-1.74	-47.94	-13.00	Vertical
9257.65	-43.19	8.46	-34.73	-13.00	Horizontal

**PCS 1900:**

<b>The Worst Test Results for Channel 810/1909.8MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1429.36	-46.32	-3.22	-49.54	-13.00	Vertical
2563.47	-46.60	-0.24	-46.84	-13.00	Vertical
3645.26	-47.79	3.98	-43.81	-13.00	Horizontal
4563.56	-46.43	11.56	-34.87	-13.00	Vertical
5689.25	-46.59	17.89	-28.70	-13.00	Horizontal

**PCS 1900(EDGE 8):**

<b>The Worst Test Results for Channel 810/1909.8MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1430.15	-47.20	2.7	-44.50	-13.00	Vertical
9367.91	-48.45	11.6	-36.85	-13.00	Vertical
13356.68	-49.85	14.89	-34.96	-13.00	Horizontal
15249.71	-48.14	13.87	-34.27	-13.00	Vertical
17913.63	-43.78	19.76	-24.02	-13.00	Horizontal

**HSPA band II:**

<b>The Worst Test Results for Channel 9938/1907.4MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
2000.00	-38.45	-2.25	-40.70	-13.00	Vertical
9548.50	-41.59	-3.03	-44.62	-13.00	Horizontal
13367.40	-44.44	-1.87	-46.31	-13.00	Horizontal
15277.80	-40.16	8.52	-31.64	-13.00	Vertical
17931.60	-55.03	18.7	-36.33	-13.00	Horizontal

**HSPA band IV:**

<b>The Worst Test Results for Channel 2087/1752.5MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1536.98	-47.53	9.7	-37.83	-13.00	Vertical
2536.41	-47.58	11.6	-35.98	-13.00	Horizontal
3786.52	-49.72	14.89	-34.83	-13.00	Horizontal
5123.56	-48.49	13.87	-34.62	-13.00	Vertical
6615.32	-43.14	19.76	-23.38	-13.00	Horizontal



**HSPA band V:**

<b>The Worst Test Results for Channel 4458/846.4MHz</b>					
Frequency(MHz)	Power(dBm)	ARpl (dBm)	PMea(dBm)	Limit (dBm)	Polarity
1598.26	-40.35	-2.26	-42.61	-13.00	Vertical
2365.78	-38.33	-3.12	-41.45	-13.00	Horizontal
4967.65	-41.38	-1.74	-43.12	-13.00	Horizontal
6457.86	-39.26	8.74	-30.52	-13.00	Vertical
7896.56	-41.76	17.89	-23.87	-13.00	Horizontal

**Note:** ARpl= Factor=Antenna Factor+ Cable loss-Amplifier gain.

The "Factor" value can be calculated automatically by software of measurement system.

Below 30MHZ no Spurious found and The GSM modes is the worst condition.

## 10. FREQUENCY STABILITY

### 10.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -10°C to +55°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +55°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10°C increments from +55°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### 10.2 PROVISIONS APPLICABLE

#### 10.2.1 For Hand carried battery powered equipment

According to the ANSI/TIA-603-D-2010, the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

### **10.2.2 For equipment powered by primary supply voltage**

According to the ANSI/TIA-603-D-2010, the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

**10.3 MEASUREMENT RESULT**

**Appendix D:Frequency Stability**

Test Results

Frequency Error vs. Voltage:

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.(V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	GSM	LCH	TN	3.4	-13.43	-0.02	±2.5	PASS
			TN	3.7	-9.62	-0.01	±2.5	PASS
			TN	4.2	-10.85	-0.01	±2.5	PASS
		MCH	TN	3.4	-6.72	-0.01	±2.5	PASS
			TN	3.7	-8.59	-0.01	±2.5	PASS
			TN	4.2	-10.72	-0.01	±2.5	PASS
		HCH	TN	3.4	-7.36	-0.01	±2.5	PASS
			TN	3.7	-10.65	-0.01	±2.5	PASS
			TN	4.2	-7.17	-0.01	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.(V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	EDGE	LCH	TN	3.4	31.06	0.04	±2.5	PASS
			TN	3.7	29.28	0.04	±2.5	PASS
			TN	4.2	29.57	0.04	±2.5	PASS
		MCH	TN	3.4	29.74	0.04	±2.5	PASS
			TN	3.7	29.74	0.04	±2.5	PASS
			TN	4.2	30.25	0.04	±2.5	PASS
		HCH	TN	3.4	29.64	0.03	±2.5	PASS
			TN	3.7	29.41	0.03	±2.5	PASS
			TN	4.2	29.64	0.03	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt. (V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 1900	GSM	LCH	TN	3.4	60.25	0.03	±2.5	PASS
			TN	3.7	61.54	0.03	±2.5	PASS
			TN	4.2	62.12	0.03	±2.5	PASS
		MCH	TN	3.4	63.73	0.03	±2.5	PASS
			TN	3.7	65.28	0.03	±2.5	PASS
			TN	4.2	63.93	0.03	±2.5	PASS
		HCH	TN	3.4	66.32	0.03	±2.5	PASS
			TN	3.7	64.38	0.03	±2.5	PASS
			TN	4.2	62.44	0.03	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt. (V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 1900	EDGE	LCH	TN	3.4	53.40	0.03	±2.5	PASS
			TN	3.7	48.69	0.03	±2.5	PASS
			TN	4.2	48.40	0.03	±2.5	PASS
		MCH	TN	3.4	49.17	0.03	±2.5	PASS
			TN	3.7	47.62	0.03	±2.5	PASS
			TN	4.2	46.30	0.02	±2.5	PASS
		HCH	TN	3.4	49.98	0.03	±2.5	PASS
			TN	3.7	47.36	0.02	±2.5	PASS
			TN	4.2	50.08	0.03	±2.5	PASS

**Frequency Error vs. Temperature:**

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	GSM	LCH	VN	-10	-8.91	-0.01	±2.5	PASS
			VN	0	-10.98	-0.01	±2.5	PASS
			VN	10	-12.72	-0.02	±2.5	PASS
			VN	20	-11.82	-0.01	±2.5	PASS
			VN	30	-10.59	-0.01	±2.5	PASS
			VN	40	-10.59	-0.01	±2.5	PASS
			VN	50	-8.14	-0.01	±2.5	PASS
GSM850	GSM	MCH	VN	-10	-9.94	-0.01	±2.5	PASS
			VN	0	-9.49	-0.01	±2.5	PASS
			VN	10	-10.91	-0.01	±2.5	PASS
			VN	20	-8.78	-0.01	±2.5	PASS
			VN	30	-6.72	-0.01	±2.5	PASS
			VN	40	-9.94	-0.01	±2.5	PASS
			VN	50	-12.27	-0.01	±2.5	PASS
GSM850	GSM	HCH	VN	-10	-8.59	-0.01	±2.5	PASS
			VN	0	-9.69	-0.01	±2.5	PASS
			VN	10	-8.98	-0.01	±2.5	PASS
			VN	20	-11.49	-0.01	±2.5	PASS
			VN	30	-7.04	-0.01	±2.5	PASS
			VN	40	-11.11	-0.01	±2.5	PASS
			VN	50	-7.81	-0.01	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	EDGE	LCH	VN	-10	37.65	0.05	±2.5	PASS
			VN	0	34.64	0.04	±2.5	PASS
			VN	10	35.61	0.04	±2.5	PASS
			VN	20	34.22	0.04	±2.5	PASS
			VN	30	33.16	0.04	±2.5	PASS
			VN	40	33.22	0.04	±2.5	PASS
			VN	50	35.29	0.04	±2.5	PASS
GSM850	EDGE	MCH	VN	-10	29.99	0.04	±2.5	PASS
			VN	0	33.90	0.04	±2.5	PASS
			VN	10	31.32	0.04	±2.5	PASS
			VN	20	29.86	0.04	±2.5	PASS
			VN	30	29.74	0.04	±2.5	PASS
			VN	40	29.86	0.04	±2.5	PASS
			VN	50	28.57	0.03	±2.5	PASS
GSM850	EDGE	HCH	VN	-10	35.39	0.04	±2.5	PASS
			VN	0	27.64	0.03	±2.5	PASS
			VN	10	29.90	0.04	±2.5	PASS
			VN	20	33.77	0.04	±2.5	PASS
			VN	30	28.28	0.03	±2.5	PASS
			VN	40	29.80	0.04	±2.5	PASS
			VN	50	30.41	0.04	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 1900	GSM	LCH	VN	-10	60.12	0.03	±2.5	PASS
			VN	0	62.44	0.03	±2.5	PASS
			VN	10	61.60	0.03	±2.5	PASS
			VN	20	61.21	0.03	±2.5	PASS
			VN	30	63.02	0.03	±2.5	PASS
			VN	40	58.89	0.03	±2.5	PASS
			VN	50	62.63	0.03	±2.5	PASS

GSM 1900	GSM	MCH	VN	-10	62.51	0.03	±2.5	PASS
			VN	0	64.31	0.03	±2.5	PASS
			VN	10	62.38	0.03	±2.5	PASS
			VN	20	63.22	0.03	±2.5	PASS
			VN	30	63.34	0.03	±2.5	PASS
			VN	40	63.99	0.03	±2.5	PASS
			VN	50	62.76	0.03	±2.5	PASS
GSM 1900	GSM	HCH	VN	-10	61.60	0.03	±2.5	PASS
			VN	0	66.38	0.03	±2.5	PASS
			VN	10	60.50	0.03	±2.5	PASS
			VN	20	61.92	0.03	±2.5	PASS
			VN	30	61.28	0.03	±2.5	PASS
			VN	40	61.21	0.03	±2.5	PASS
			VN	50	58.24	0.03	±2.5	PASS



Test Band	Test Mode	Test Channel	Test Volt.	Test Temp	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM 1900	EDGE	LCH	VN	-10	57.21	0.03	±2.5	PASS
			VN	0	56.60	0.03	±2.5	PASS
			VN	10	63.93	0.03	±2.5	PASS
			VN	20	62.18	0.03	±2.5	PASS
			VN	30	52.17	0.03	±2.5	PASS
			VN	40	52.27	0.03	±2.5	PASS
			VN	50	56.05	0.03	±2.5	PASS
GSM 1900	EDGE	MCH	VN	-10	52.40	0.03	±2.5	PASS
			VN	0	45.20	0.02	±2.5	PASS
			VN	10	56.82	0.03	±2.5	PASS
			VN	20	50.04	0.03	±2.5	PASS
			VN	30	42.13	0.02	±2.5	PASS
			VN	40	54.95	0.03	±2.5	PASS
			VN	50	51.21	0.03	±2.5	PASS
GSM 1900	EDGE	HCH	VN	-10	48.65	0.03	±2.5	PASS
			VN	0	53.89	0.03	±2.5	PASS
			VN	10	46.85	0.02	±2.5	PASS
			VN	20	48.27	0.03	±2.5	PASS
			VN	30	54.18	0.03	±2.5	PASS
			VN	40	53.27	0.03	±2.5	PASS
			VN	50	49.04	0.03	±2.5	PASS

**Frequency Error vs. Voltage:**

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt. (V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA 850	UMTS	LCH	TN	3.4	-11.06	-0.01	±2.5	PASS
			TN	3.7	-11.40	-0.01	±2.5	PASS
			TN	4.2	-9.34	-0.01	±2.5	PASS
		MCH	TN	3.4	-3.71	0.00	±2.5	PASS
			TN	3.7	-2.40	0.00	±2.5	PASS
			TN	4.2	-0.64	0.00	±2.5	PASS
		HCH	TN	3.4	-0.64	0.00	±2.5	PASS
			TN	3.7	-0.63	0.00	±2.5	PASS
			TN	4.2	-0.09	0.00	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt. (V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA 1700	UMTS	LCH	TN	3.4	-14.48	-0.01	±2.5	PASS
			TN	3.7	-11.67	-0.01	±2.5	PASS
			TN	4.2	-6.64	0.00	±2.5	PASS
		MCH	TN	3.4	-2.81	0.00	±2.5	PASS
			TN	3.7	2.06	0.00	±2.5	PASS
			TN	4.2	-2.37	0.00	±2.5	PASS
		HCH	TN	3.4	-2.08	0.00	±2.5	PASS
			TN	3.7	0.14	0.00	±2.5	PASS
			TN	4.2	1.25	0.00	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt. (V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA 1900	UMTS	LCH	TN	3.4	7.22	0.00	±2.5	PASS
			TN	3.7	0.18	0.00	±2.5	PASS
			TN	4.2	2.44	0.00	±2.5	PASS
		MCH	TN	3.4	5.17	0.00	±2.5	PASS
			TN	3.7	21.51	0.01	±2.5	PASS

		HCH	TN	4.2	8.04	0.00	±2.5	PASS
			TN	3.4	16.94	0.01	±2.5	PASS
			TN	3.7	6.30	0.00	±2.5	PASS
			TN	4.2	9.77	0.01	±2.5	PASS

**Frequency Error vs. Temperature:**

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA 850	UMTS	LCH	VN	-10	-6.96	-0.01	±2.5	PASS
			VN	0	-8.88	-0.01	±2.5	PASS
			VN	10	-7.60	-0.01	±2.5	PASS
			VN	20	-6.74	-0.01	±2.5	PASS
			VN	30	-7.92	-0.01	±2.5	PASS
			VN	40	-6.97	-0.01	±2.5	PASS
			VN	50	-6.27	-0.01	±2.5	PASS
WCDMA 850	UMTS	MCH	VN	-10	-1.08	0.00	±2.5	PASS
			VN	0	-3.75	0.00	±2.5	PASS
			VN	10	-0.87	0.00	±2.5	PASS
			VN	20	-2.66	0.00	±2.5	PASS
			VN	30	-5.31	-0.01	±2.5	PASS
			VN	40	-4.93	-0.01	±2.5	PASS
			VN	50	0.82	0.00	±2.5	PASS
WCDMA 850	UMTS	HCH	VN	-10	-1.05	0.00	±2.5	PASS
			VN	0	0.41	0.00	±2.5	PASS
			VN	10	0.69	0.00	±2.5	PASS
			VN	20	-3.08	0.00	±2.5	PASS
			VN	30	-5.74	-0.01	±2.5	PASS
			VN	40	1.74	0.00	±2.5	PASS
			VN	50	1.10	0.00	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA1700	UMTS	LCH	VN	-10	-4.23	0.00	±2.5	PASS
			VN	0	-8.01	0.00	±2.5	PASS
			VN	10	-5.77	0.00	±2.5	PASS
			VN	20	-3.22	0.00	±2.5	PASS
			VN	30	-0.85	0.00	±2.5	PASS
			VN	40	3.23	0.00	±2.5	PASS
			VN	50	-1.92	0.00	±2.5	PASS
WCDMA1700	UMTS	MCH	VN	-10	1.63	0.00	±2.5	PASS
			VN	0	7.14	0.00	±2.5	PASS
			VN	10	0.93	0.00	±2.5	PASS
			VN	20	-3.66	0.00	±2.5	PASS
			VN	30	0.14	0.00	±2.5	PASS
			VN	40	0.95	0.00	±2.5	PASS
			VN	50	-1.17	0.00	±2.5	PASS
WCDMA1700	UMTS	HCH	VN	-10	5.77	0.00	±2.5	PASS
			VN	0	0.87	0.00	±2.5	PASS
			VN	10	1.98	0.00	±2.5	PASS
			VN	20	4.81	0.00	±2.5	PASS
			VN	30	1.53	0.00	±2.5	PASS
			VN	40	0.82	0.00	±2.5	PASS
			VN	50	3.81	0.00	±2.5	PASS


Test Band	Test Mode	Test Channel	Test Volt.	Test Temp.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA1900	UMTS	LCH	VN	-10	3.31	0.00	±2.5	PASS
			VN	0	3.89	0.00	±2.5	PASS
			VN	10	2.53	0.00	±2.5	PASS
			VN	20	4.61	0.00	±2.5	PASS
			VN	30	6.73	0.00	±2.5	PASS
			VN	40	7.46	0.00	±2.5	PASS
			VN	50	3.57	0.00	±2.5	PASS
WCDMA1900	UMTS	MCH	VN	-10	8.10	0.00	±2.5	PASS


			VN	0	6.82	0.00	±2.5	PASS
			VN	10	9.25	0.00	±2.5	PASS
			VN	20	7.95	0.00	±2.5	PASS
			VN	30	8.83	0.00	±2.5	PASS
			VN	40	10.50	0.01	±2.5	PASS
			VN	50	1.16	0.00	±2.5	PASS
WCDMA1900	UMTS	HCH	VN	-10	11.28	0.01	±2.5	PASS
			VN	0	7.61	0.00	±2.5	PASS
			VN	10	2.38	0.00	±2.5	PASS
			VN	20	5.54	0.00	±2.5	PASS
			VN	30	2.11	0.00	±2.5	PASS
			VN	40	5.37	0.00	±2.5	PASS
			VN	50	16.53	0.01	±2.5	PASS

### PHOTOGRAPHS OF TEST SETUP CONDUCTED EMISSION



### RADIATED SPURIOUS EMISSION

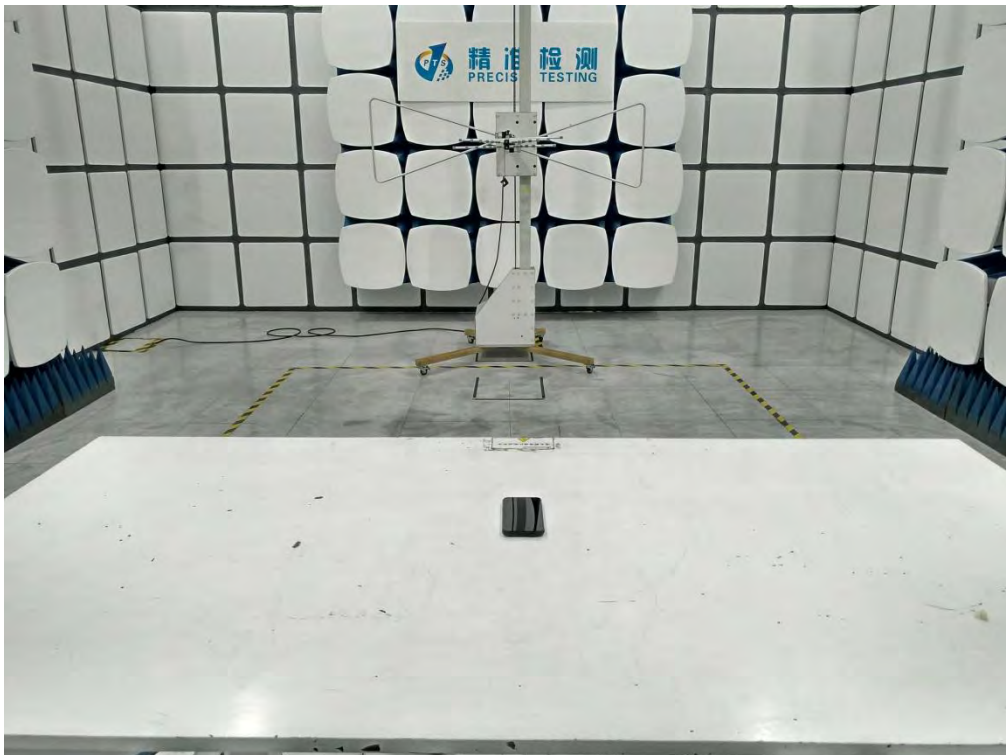

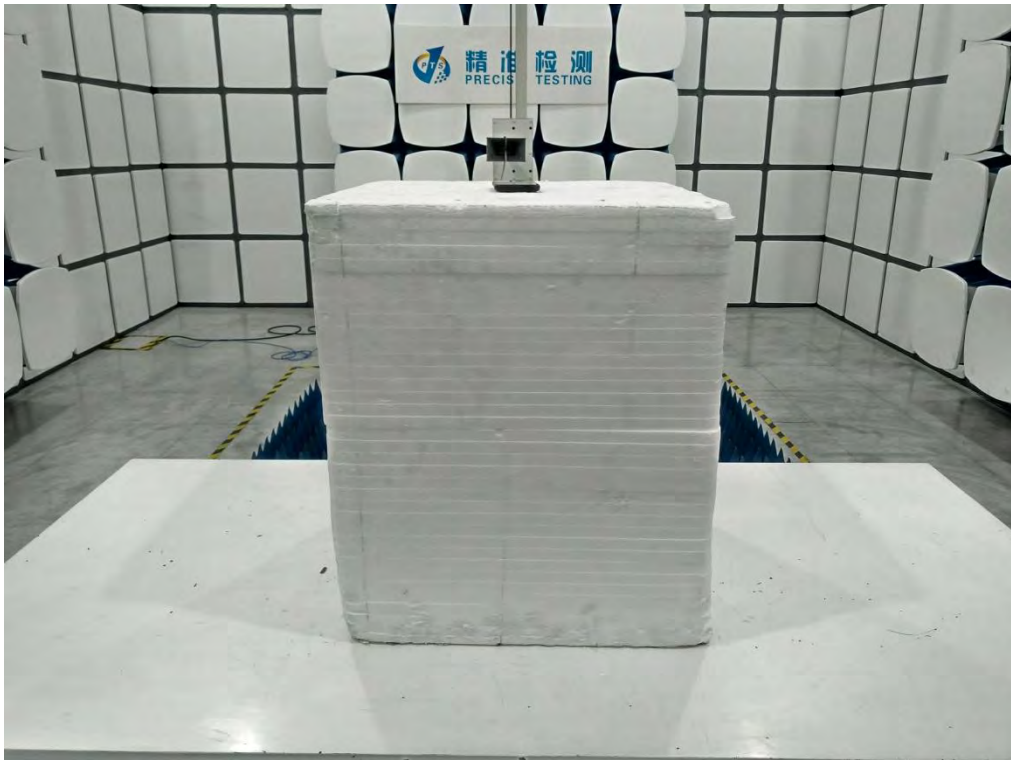

CONDUCTED MEASUREMENTS



----END OF REPORT----