


A B C D E F

| REV | DESCRIPTION | DATE | NAME |
|-----|-------------|------------|----------|
| A1 | NEW RELEASE | 07/28/2022 | Hu Linhu |
| | | | |
| | | | |

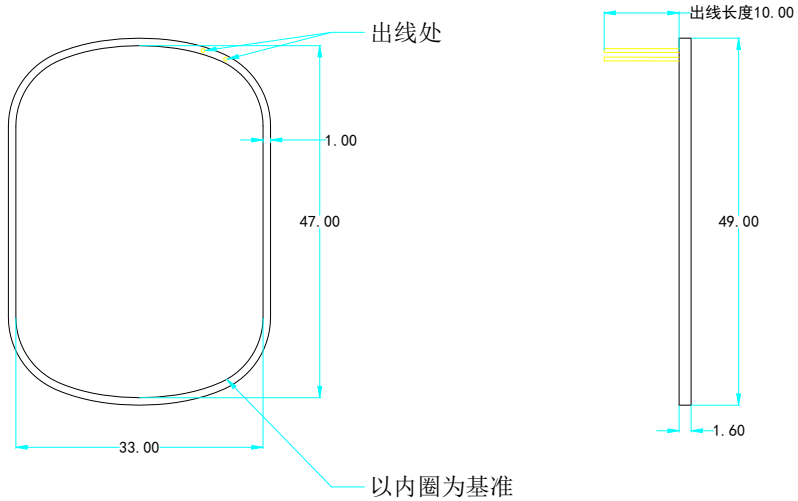

注释:

参数: 低频线圈, 工作频率125KHz, 线径0.1MM, 电感 L=345uH±1%@125KHz, Q: 20左右。

绕线形式: 多层平绕式;

封装形式: 普通电感; 磁芯: 空芯
(必须在125KHz频率在测试电感值, 测试时线圈远离金属物体)。

| | | | |
|---------------|--------|--|-------------------|
| Xhorse | | SHENZHEN XHORSE ELECTRONICS.,LTD. | |
| DRAW | DATE | TITLE | |
| CHKD. | DATE | 基站线圈 | |
| APPD. | DATE | MATERIAL | SURFACE FINISHING |
| MODEL | 云雀Lite | DWG NO | REV |
| P/N | --- | SIZE | A4 |
| | | SCALE | 1:1 |
| | | SHEET 1 OF 1 | |

4

3

2

1

A B C D E F