

RF TEST REPORT



Report No.: 16020292-FCC-R1

Supersede Report No.: N/A

Applicant	Digium, Inc.	
Product Name	IP Phone	
Main Model	D80	
Serial Model	N/A	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	July 07 to July 21, 2016	
Issue Date	July 21, 2016	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Amos Xia	Miro Bao	
Amos Xia Test Engineer	Miro Bao Checked By	
<p style="text-align: center;">This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only</p>		

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China

Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	16020292-FCC-R1
Page	3 of 54

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 ANTENNA REQUIREMENT.....	8
6.2 CHANNEL SEPARATION.....	9
6.3 20DB BANDWIDTH	13
6.4 PEAK OUTPUT POWER.....	17
6.5 NUMBER OF HOPPING CHANNEL	21
6.6 TIME OF OCCUPANCY (DWELL TIME)	24
6.7 BAND EDGE & RESTRICTED BAND	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	30
6.9 RADIATED SPURIOUS EMISSIONS & RESTRICTED BAND	36
ANNEX A. TEST INSTRUMENT.....	40
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	49
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....	53
ANNEX E. DECLARATION OF SIMILARITY	54

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16020292-FCC-R1	NONE	Original	July 21, 2016

2. Customer information

Applicant Name	Digium, Inc.
Applicant Add	445 jan davis dr nw, Huntsville, Alabama, United States
Manufacturer	Hong Kong JXD Corp. Ltd.
Manufacturer Add	B702-706 zhuoyue Bldg No.126, ZhongKang Rd, Futian District, Shen Zhen 518049, Guang Dong P.R, China

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	Labview of SIEMIC version 1.0

4. Equipment under Test (EUT) Information

Description of EUT:	IP Phone
Main Model:	D80
Serial Model:	N/A
Date EUT received:	June 23, 2016
Test Date(s):	July 07 to July 21, 2016
Equipment Category :	DSS
Antenna Gain:	Bluetooth: 2dBi
Type of Modulation:	Bluetooth: GFSK, π/4DQPSK, 8DPSK
RF Operating Frequency (ies):	Bluetooth: 2402-2480 MHz
Max. Output Power:	-0.595dBm
Number of Channels:	Bluetooth: 79CH
Port:	Power Port, Earphone Port, LAN Port, PHONE Port, EHS Port
Input Power:	DC 5V
Trade Name :	Rostech
FCC ID:	2AI4X-D80

5. Test Summary

The product was tested in accordance with the following specifications.
 All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antenna:

A permanently attached PIFA antenna for Bluetooth, the gain is 2dBi for Bluetooth.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	24°C
Relative Humidity	53%
Atmospheric Pressure	1001mbar
Test date :	July 07, 2016
Tested By :	Amos Xia

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span - Video (or Average) Bandwidth (VBW) \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 	
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.927	Pass
	Adjacency Channel	2403			
	Mid Channel	2441	1.002	0.930	Pass
	Adjacency Channel	2440			
	High Channel	2480	1.002	0.929	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.002	0.863	Pass
	Adjacency Channel	2403			
	Mid Channel	2441	0.999	0.855	Pass
	Adjacency Channel	2440			
	High Channel	2480	1.002	0.842	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.002	0.841	Pass
	Adjacency Channel	2403			
	Mid Channel	2441	1.002	0.825	Pass
	Adjacency Channel	2440			
	High Channel	2480	1.002	0.823	Pass
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result





8DPSK - Low Channel

8DPSK - Middle Channel




8DPSK - High Channel

6.3 20dB Bandwidth

Temperature	24°C
Relative Humidity	53%
Atmospheric Pressure	1001mbar
Test date :	July 07, 2016
Tested By :	Amos Xia

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A


Test Plot Yes (See below) N/A


Measurement result

Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.9273	0.8524
	Mid	2441	0.9297	0.8509
	High	2480	0.9288	0.8511
$\pi/4$ DQPSK	Low	2402	1.294	1.2113
	Mid	2441	1.282	1.2058
	High	2480	1.263	1.1977
8DPSK	Low	2402	1.262	1.2151
	Mid	2441	1.237	1.1998
	High	2480	1.235	1.1913

Test Plots

20dB Bandwidth measurement result

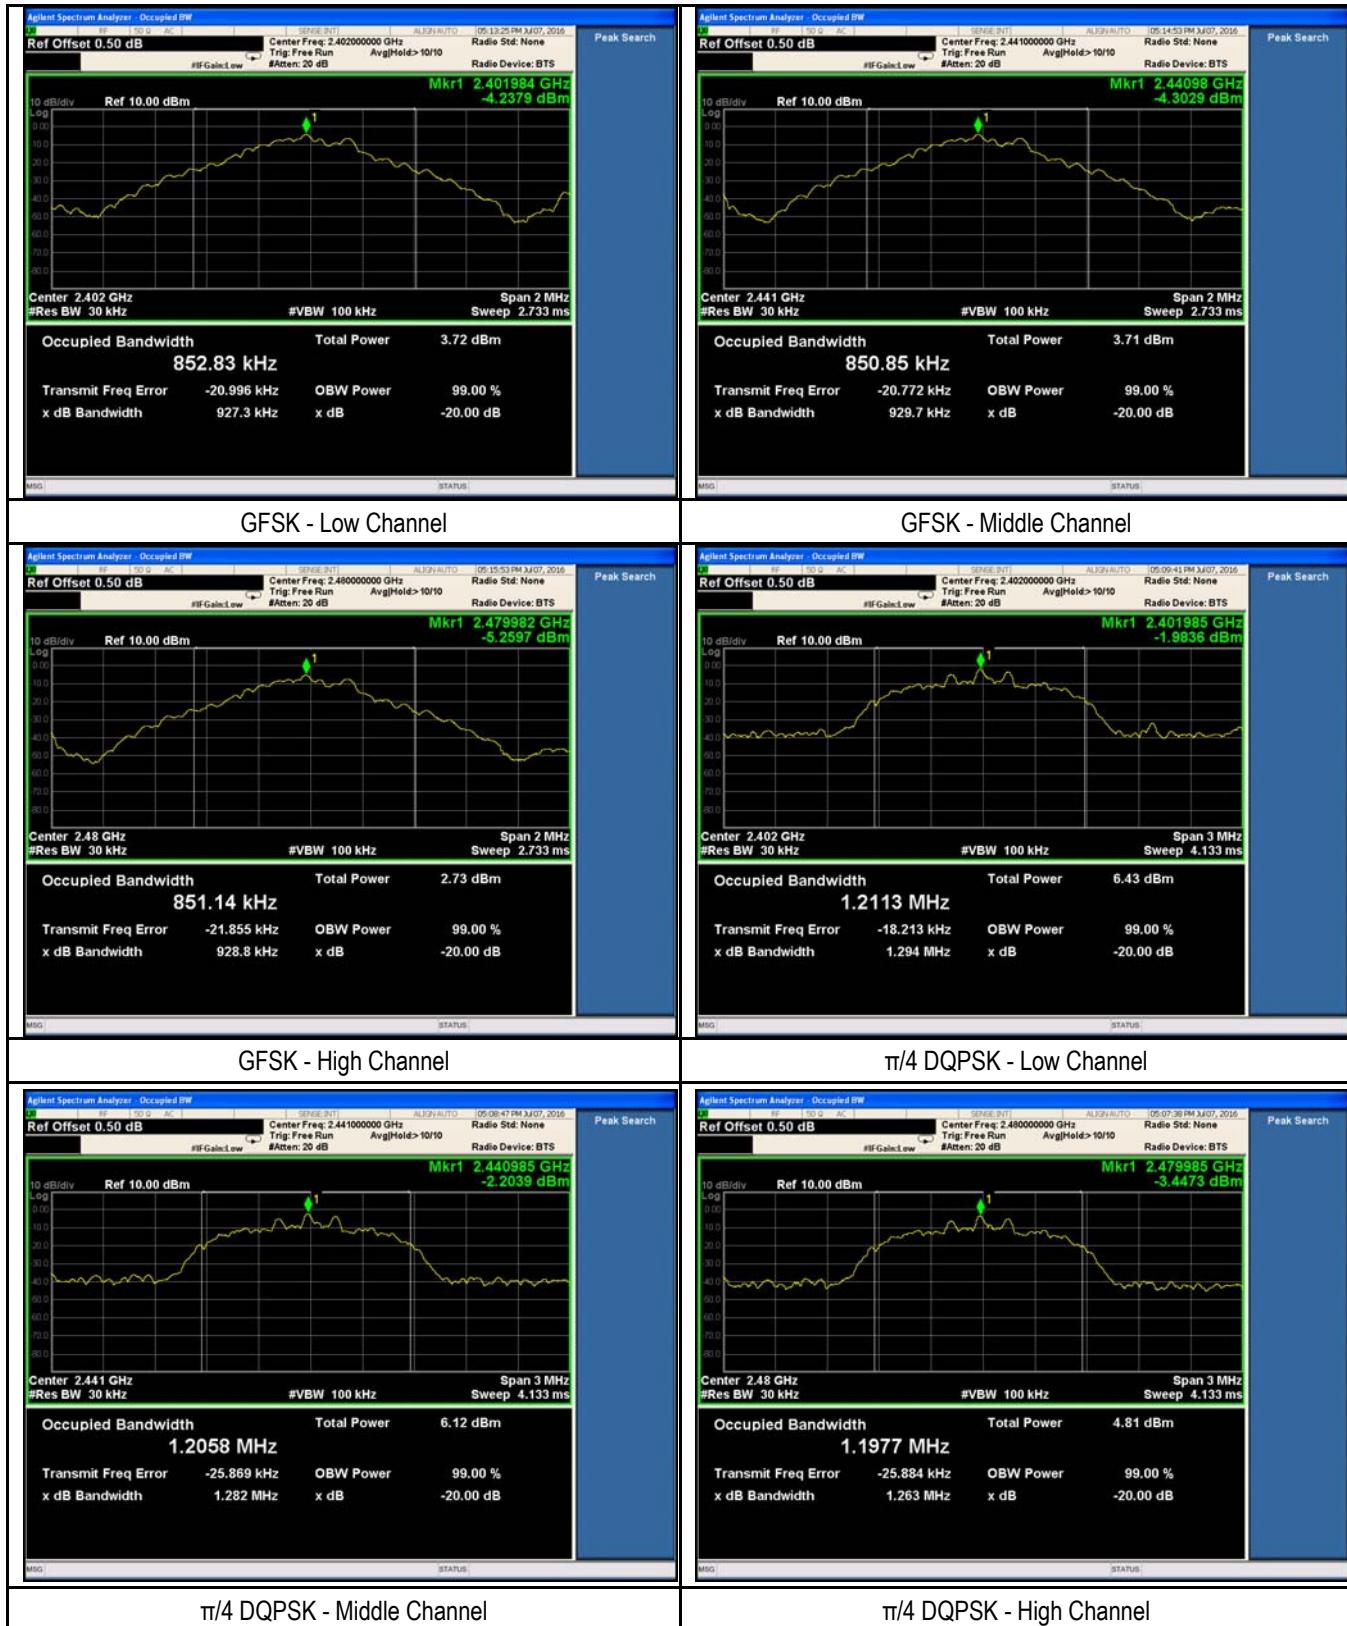


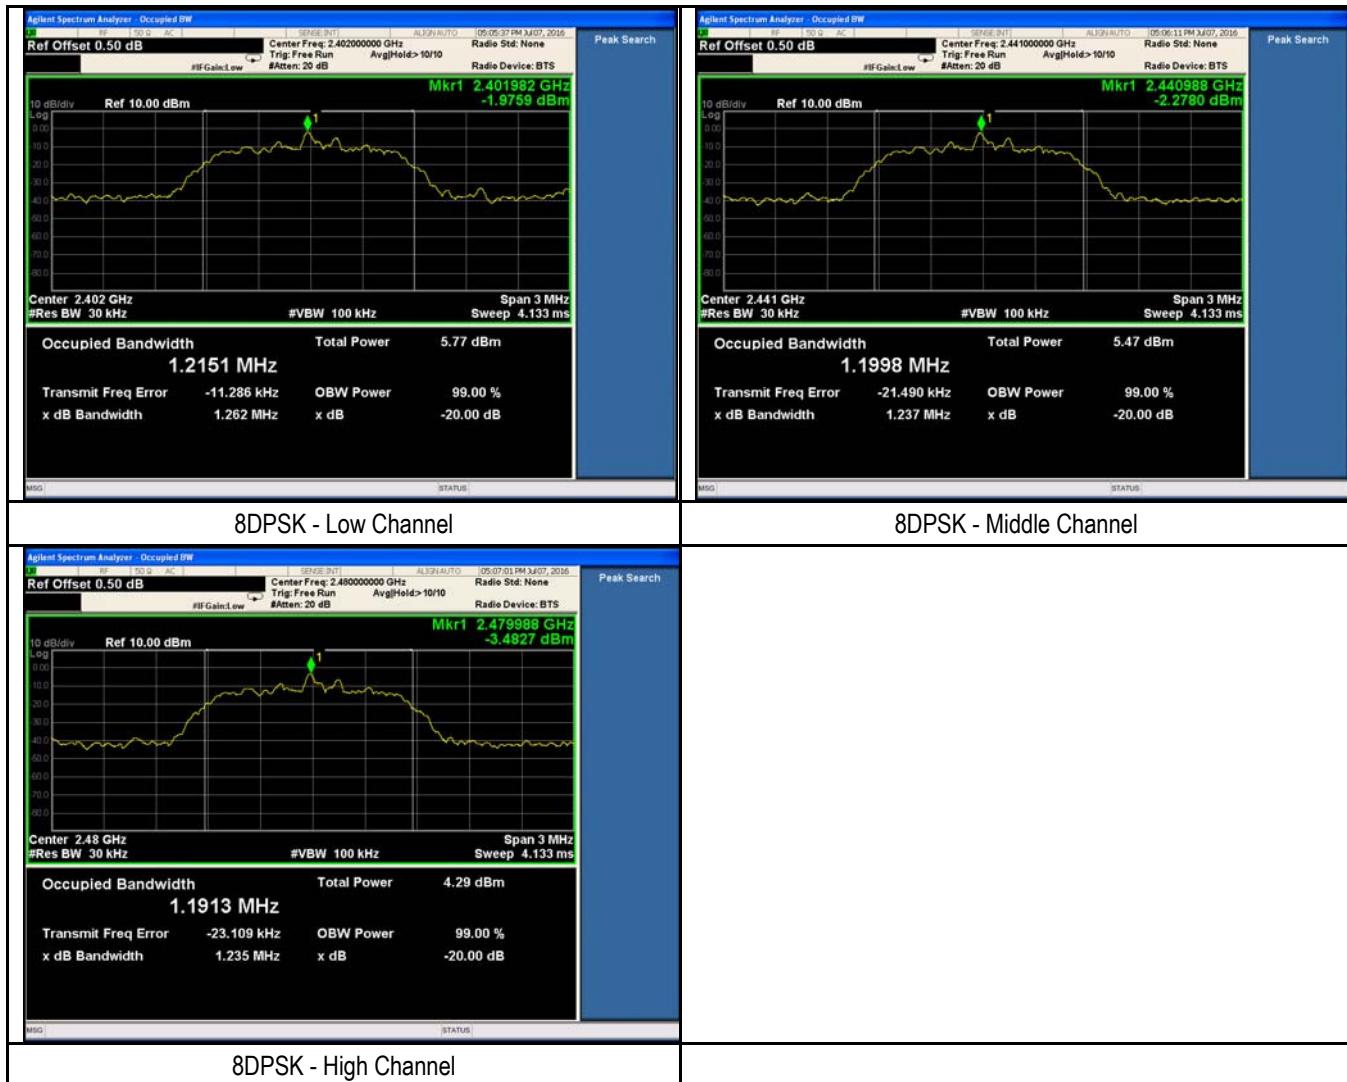

6.4 Peak Output Power

Temperature	24°C
Relative Humidity	53%
Atmospheric Pressure	1001mbar
Test date :	July 07, 2016
Tested By :	Amos Xia

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & $<$ 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: \leq 1 Watt	<input type="checkbox"/>
Test Setup			
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geqRBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer. 	
Remark			
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail	

Test Data Yes N/A

Test Plot Yes (See below) N/A


Peak Output Power measurement result

Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (mW)	Limit (mW)	Result
Output power	GFSK	Low	2402	-2.545	0.557	1000	Pass
		Mid	2441	-2.630	0.546	1000	Pass
		High	2480	-3.606	0.436	1000	Pass
	$\pi/4$ DQPSK	Low	2402	-0.796	0.833	125	Pass
		Mid	2441	-1.030	0.789	125	Pass
		High	2480	-2.217	0.600	125	Pass
	8DPSK	Low	2402	-0.595	0.872	125	Pass
		Mid	2441	-0.831	0.826	125	Pass
		High	2480	-1.970	0.800	125	Pass

Test Plots

Output Power measurement result




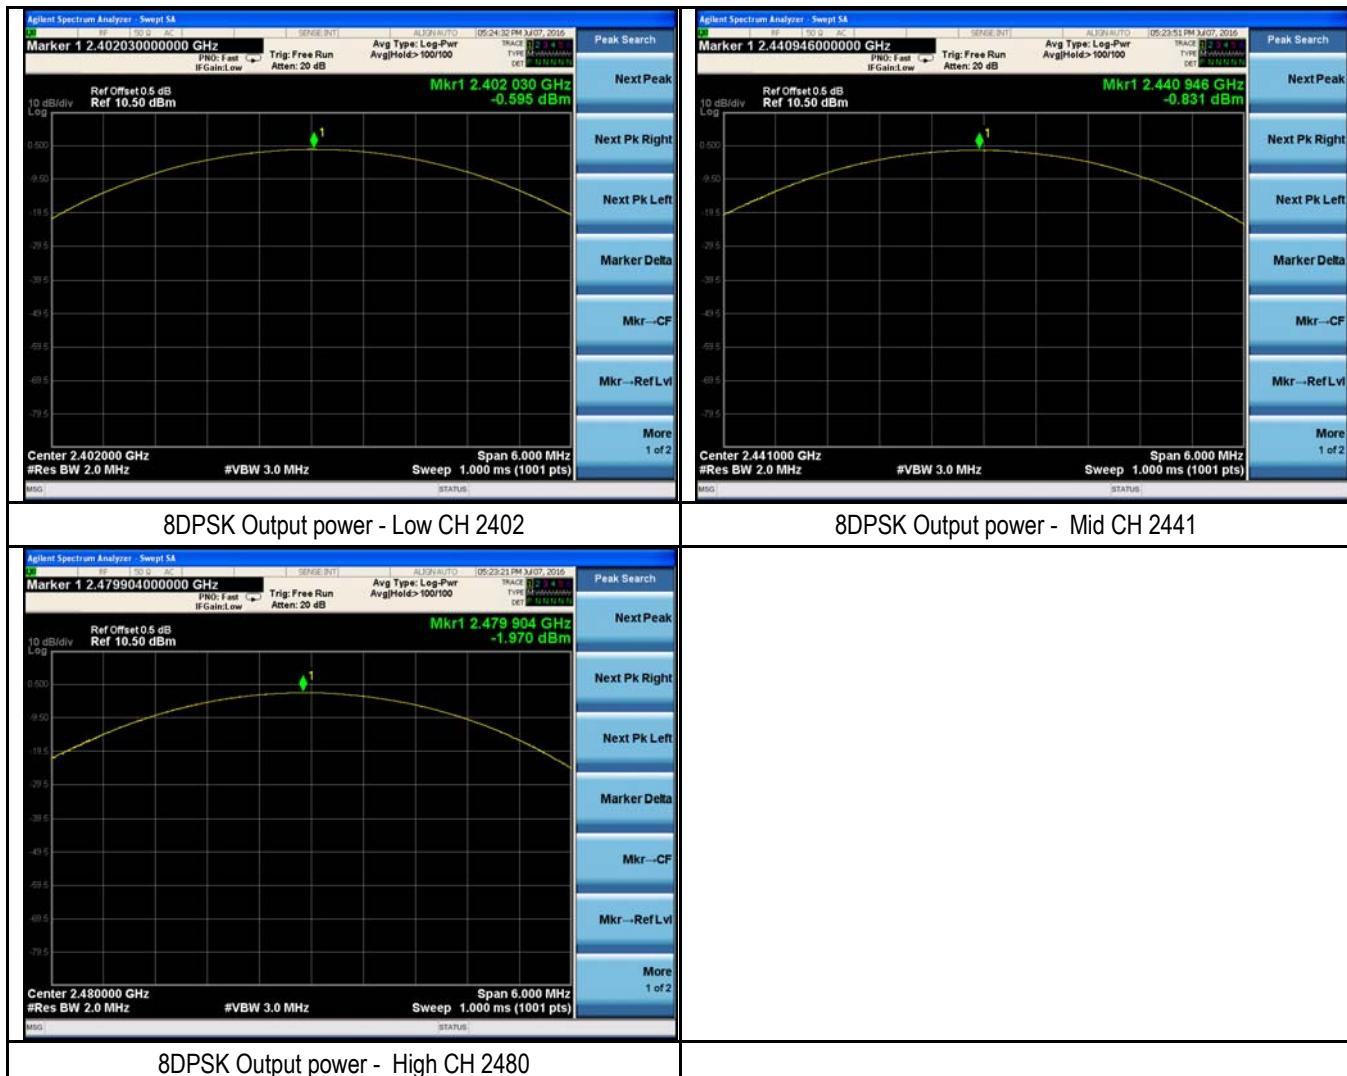

6.5 Number of Hopping Channel

Temperature	24°C
Relative Humidity	53%
Atmospheric Pressure	1001mbar
Test date :	July 07, 2016
Tested By :	Amos Xia

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz \geq 15 channels	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW \geq1% of the span - VBW \geqRBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A


Test Plot Yes (See below) N/A

Number of Hopping Channel measurement result



Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots

Number of Hopping Channels measurement result

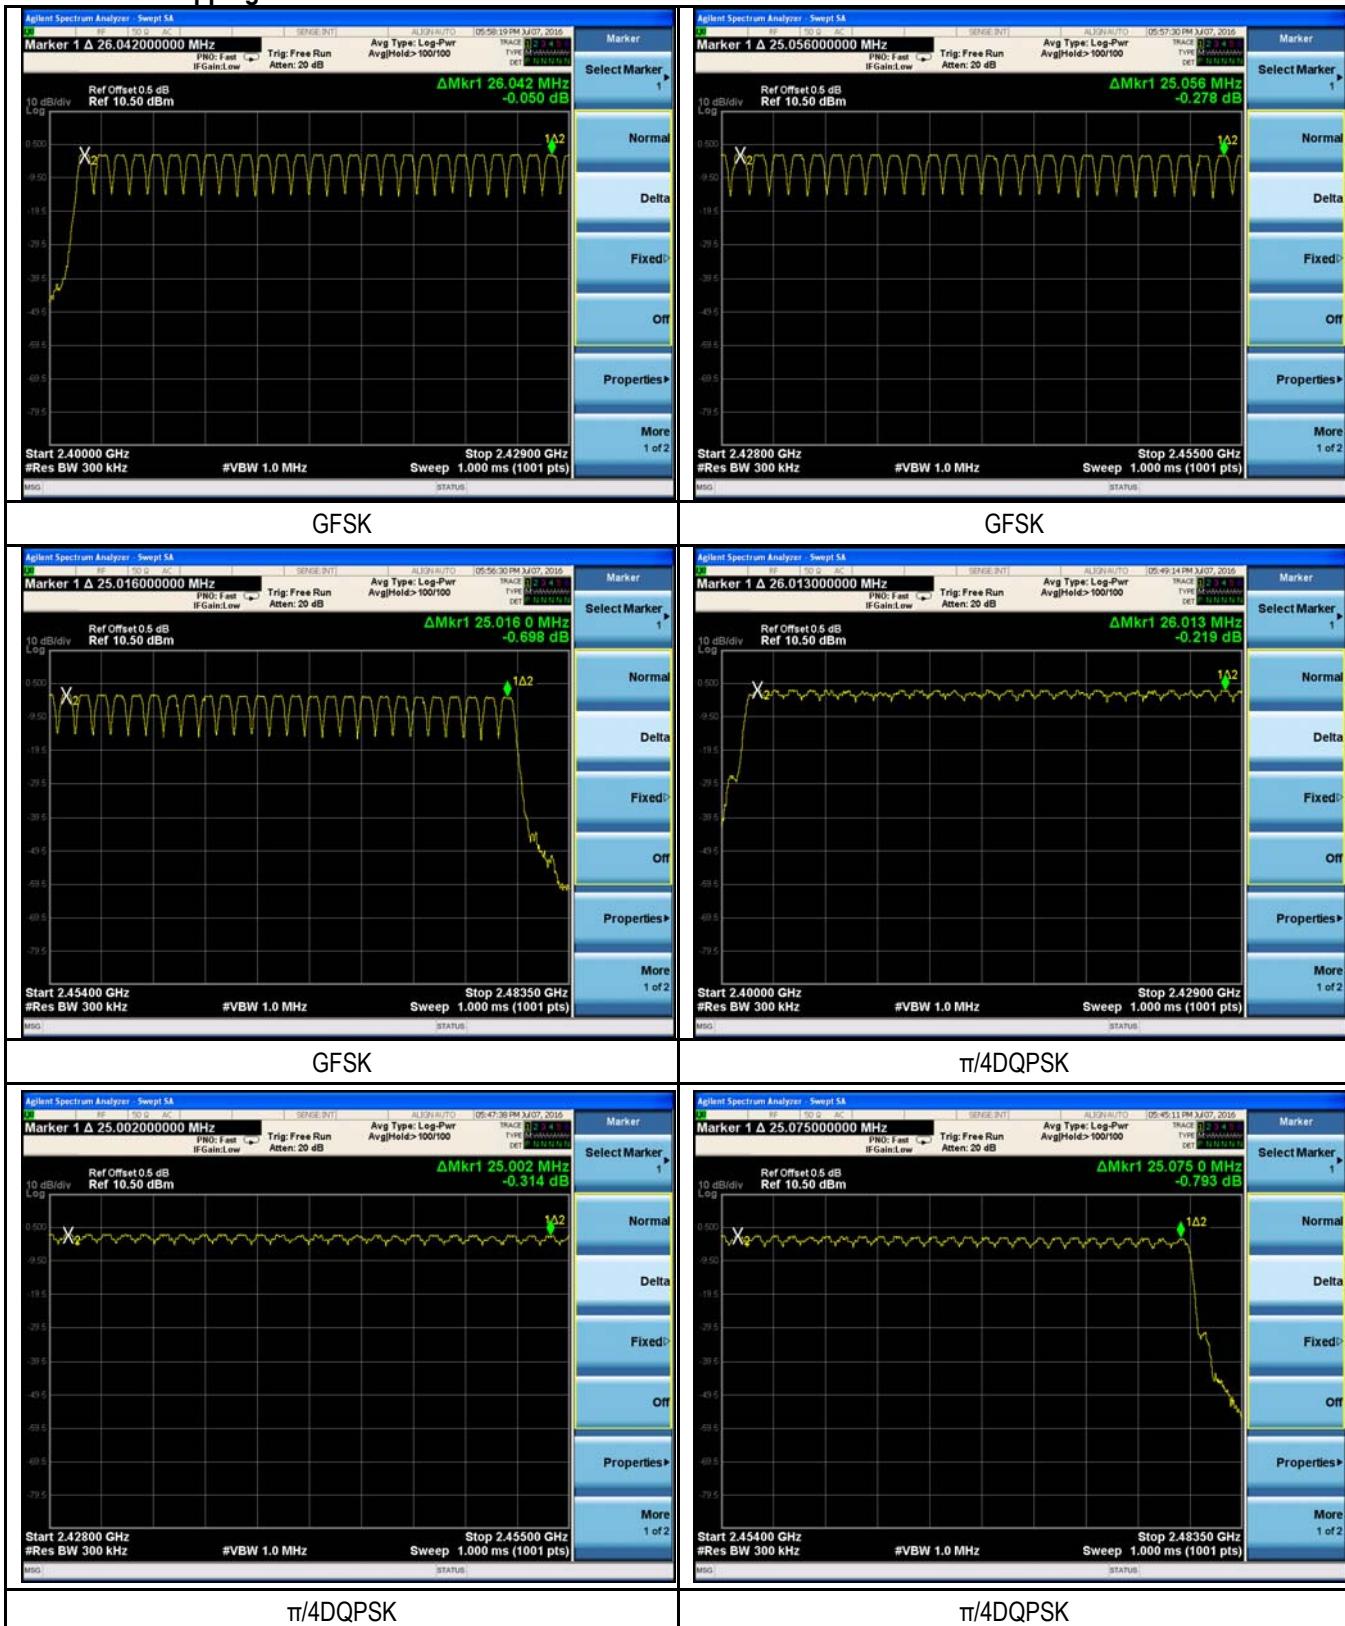

Test Report No.	16020292-FCC-R1
Page	23 of 54

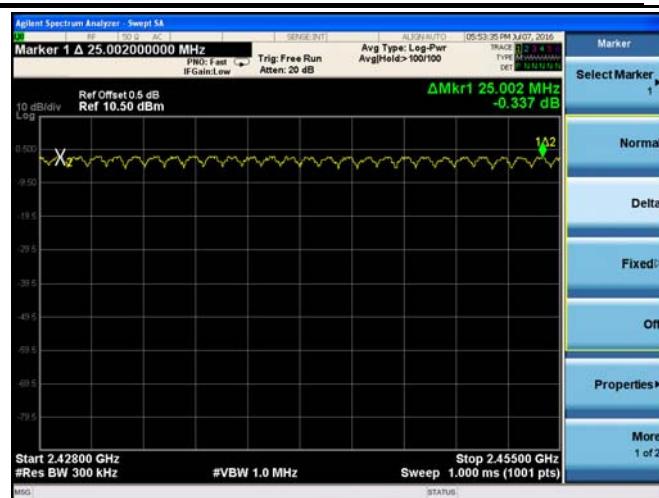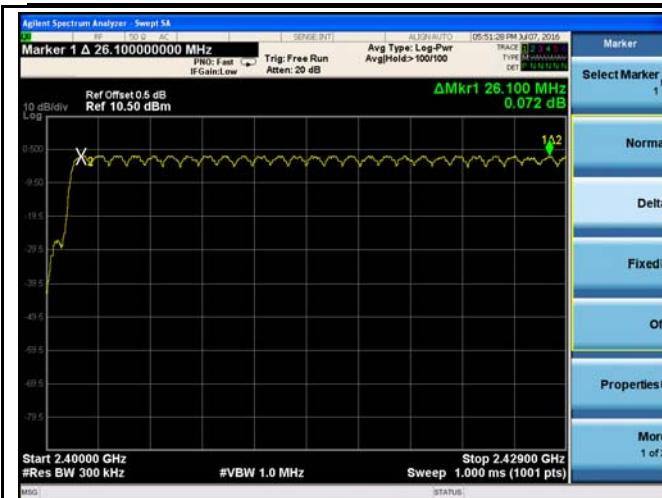

8DPSK

8DPSK




8DPSK

6.6 Time of Occupancy (Dwell Time)

Temperature	24°C
Relative Humidity	53%
Atmospheric Pressure	1001mbar
Test date :	July 08, 2016
Tested By :	Amos Xia

Requirement(s):

Spec	Item	Requirement	Applicable	
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>	
Test Setup				
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW \geqRBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 			
Remark				
Result	<input checked="" type="checkbox"/>	Pass	<input type="checkbox"/>	Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Dwell Time measurement result

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time (DH5)	GFSK	Low	3.075	328.000	400	Pass
		Mid	3.060	326.400	400	Pass
		High	3.045	324.800	400	Pass
	$\pi/4$ DQPSK	Low	3.075	328.000	400	Pass
		Mid	3.105	331.200	400	Pass
		High	3.075	328.000	400	Pass
	8-DPSK	Low	3.075	328.000	400	Pass
		Mid	3.105	331.200	400	Pass
		High	3.075	328.000	400	Pass


Note: Dwell time=Pulse Time (ms) \times (1600 \div 6 \div 79) \times 31.6


Note: we test the DH1, DH3 and DH5 mode of Dwell Time, but we only show the worst case DH5 in this report.

Test Report No.	16020292-FCC-R1
Page	26 of 54

Test Plots

Dwell Time measurement result

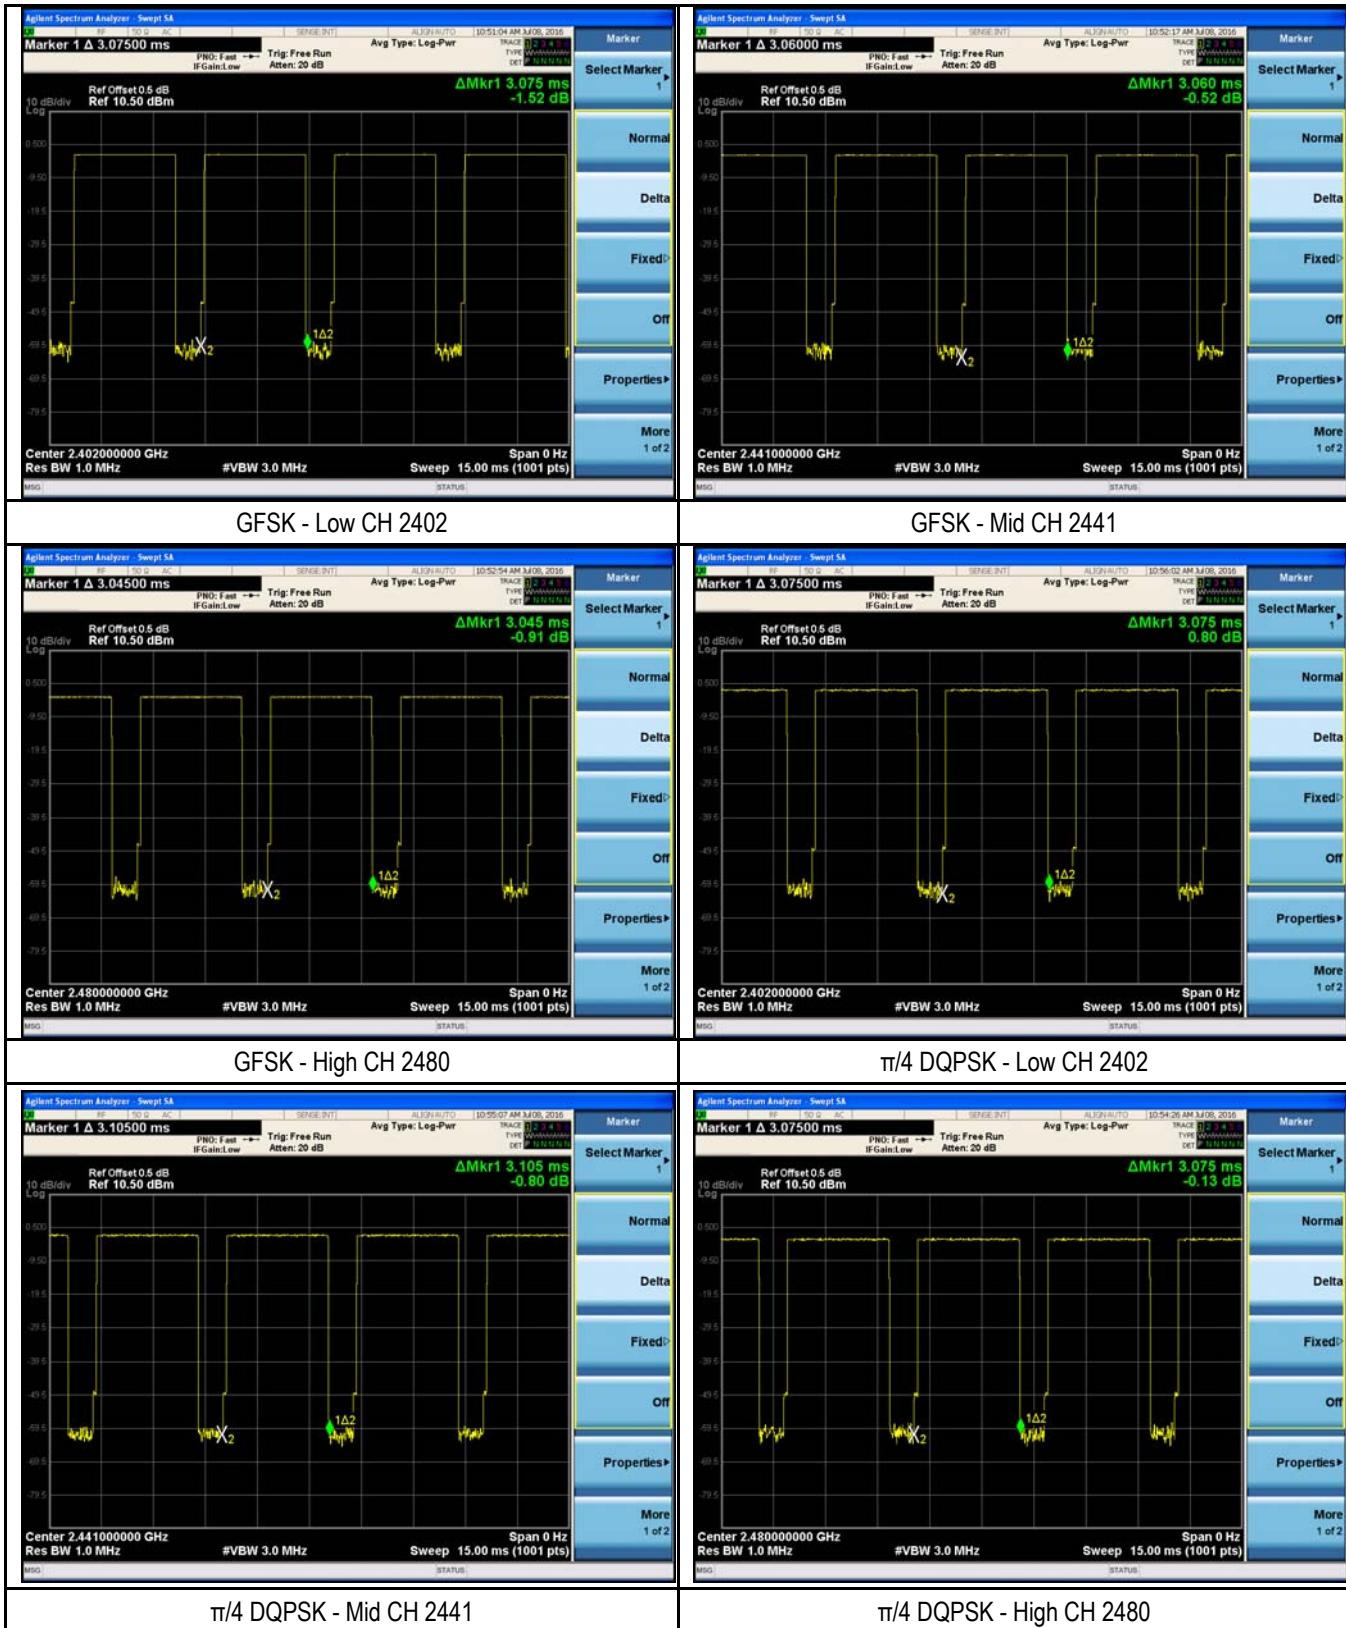


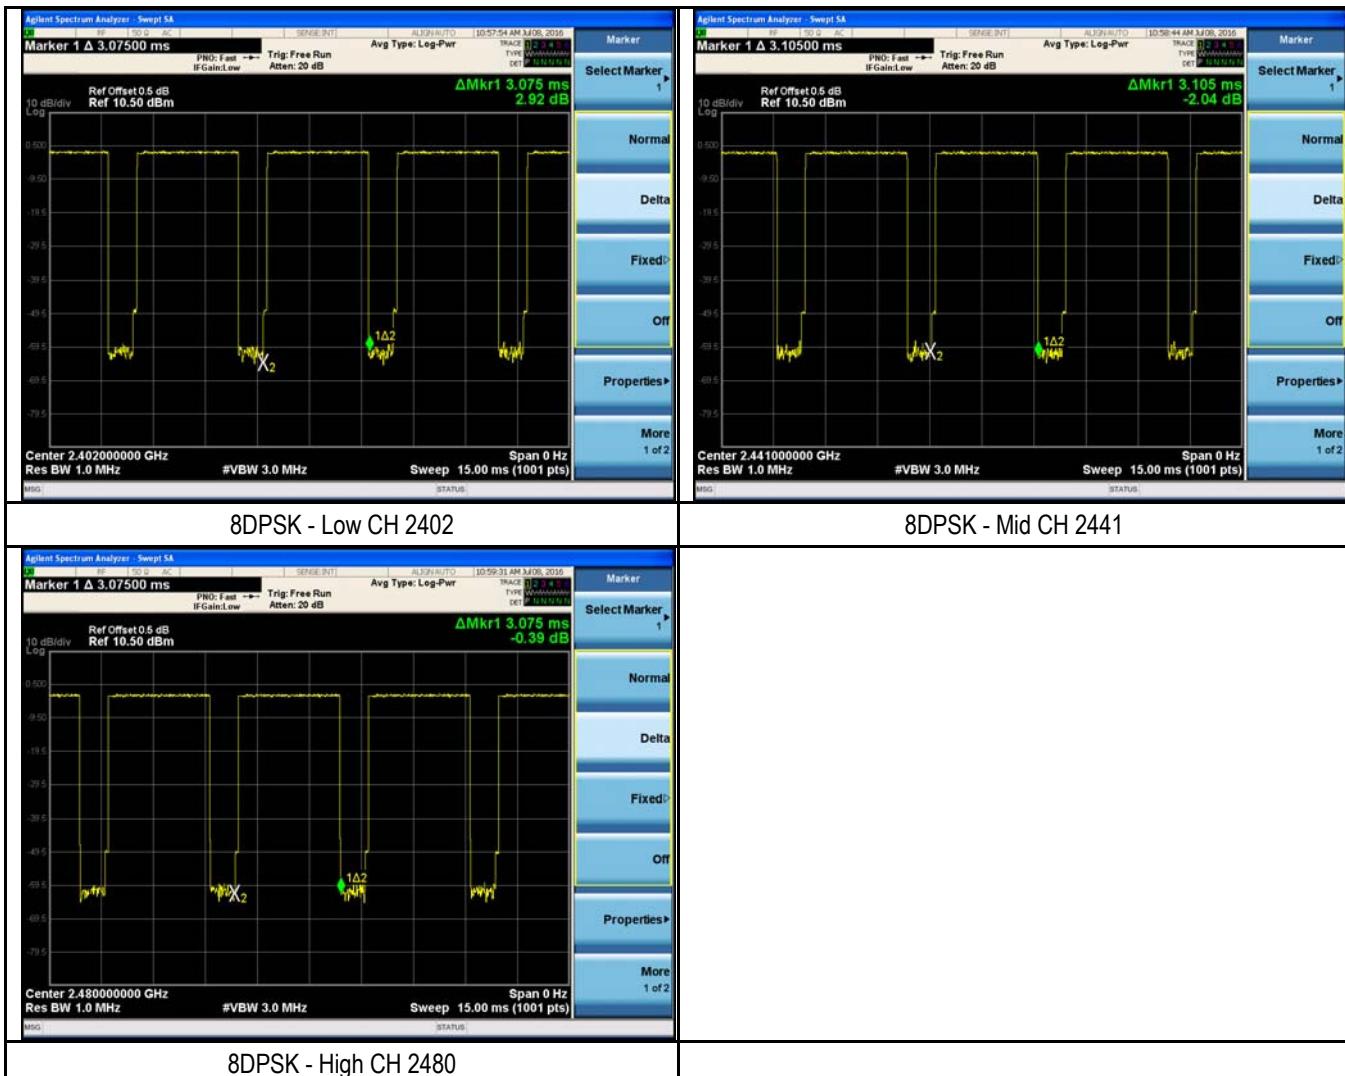

6.7 Band Edge & Restricted Band

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	July 21, 2016
Tested By :	Amos Xia

Requirement(s):

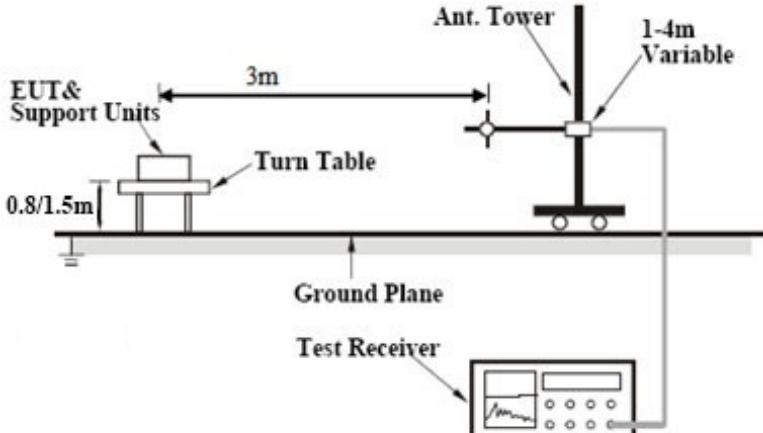Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. A Turn Table is positioned on a Ground Plane. An EUT & Support Units is placed on the turn table. A vertical Ant. Tower is connected to the EUT and is mounted on a height variable stand. The distance between the EUT and the Ant. Tower is 3m. The height of the Ant. Tower is variable, ranging from 1-4m. A Test Receiver is connected to the Ant. Tower to measure the signal.</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ol style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete. 		
Remark			

Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
--------	--	-------------------------------

 Test Data Yes N/A

 Test Plot Yes (See below) N/A

Results for Band edge Testing (Radiated)

Low Channel: GFSK Mode (Worst Case) (2402 MHz)-Non-hopping

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2376.39	45.41	PK	H	30.23	5.8	35.2	46.24	74	-27.76
2376.39	32.78	AV	H	30.23	5.8	35.2	33.61	54	-20.39
2389.97	47.98	PK	H	30.23	5.81	35.2	48.82	74	-25.18
2389.97	35.39	AV	H	30.23	5.81	35.2	36.23	54	-17.77
2376.48	45.12	PK	V	30.23	5.8	35.2	45.95	74	-28.05
2376.48	33.09	AV	V	30.23	5.8	35.2	33.92	54	-20.08
2390.03	50.13	PK	V	30.23	5.81	35.2	50.97	74	-23.03
2390.03	38.97	AV	V	30.23	5.81	35.2	39.81	54	-14.19

High Channel: GFSK Mode (Worst Case) (2480 MHz) -Non-hopping

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2483.5	49.21	PK	H	30.35	5.8	35	50.36	74	-23.64
2483.5	34.86	AV	H	30.35	5.8	35	36.01	54	-17.99
2488.76	46.31	PK	H	30.35	5.81	35	47.47	74	-26.53
2488.76	33.66	AV	H	30.35	5.81	35	34.82	54	-19.18
2483.49	49.55	PK	V	30.35	5.8	35	50.7	74	-23.3
2483.49	35.37	AV	V	30.35	5.8	35	36.52	54	-17.48
2488.74	47.98	PK	V	30.35	5.81	35	49.14	74	-24.86
2488.74	34.62	AV	V	30.35	5.81	35	35.78	54	-18.22

Low Channel: GFSK Mode (Worst Case) (2402 MHz)-Hopping

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2376.41	44.97	PK	H	30.23	5.8	35.2	45.8	74	-28.2
2376.41	31.68	AV	H	30.23	5.8	35.2	32.51	54	-21.49
2389.93	48.02	PK	H	30.23	5.81	35.2	48.86	74	-25.14
2389.93	35.64	AV	H	30.23	5.81	35.2	36.48	54	-17.52
2376.53	45.93	PK	V	30.23	5.8	35.2	46.76	74	-27.24
2376.53	33.57	AV	V	30.23	5.8	35.2	34.4	54	-19.6
2391.76	50.79	PK	V	30.23	5.81	35.2	51.63	74	-22.37
2391.76	39.64	AV	V	30.23	5.81	35.2	40.48	54	-13.52

High Channel: GFSK Mode (Worst Case) (2480 MHz) -Hopping


Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2483.5	48.95	PK	H	30.35	5.8	35	50.1	74	-23.9
2483.5	35.07	AV	H	30.35	5.8	35	36.22	54	-17.78
2484.43	46.07	PK	H	30.35	5.81	35	47.23	74	-26.77
2484.43	34.78	AV	H	30.35	5.81	35	35.94	54	-18.06
2483.51	48.79	PK	V	30.35	5.8	35	49.94	74	-24.06
2483.51	35.37	AV	V	30.35	5.8	35	36.52	54	-17.48
2484.71	45.98	PK	V	30.35	5.81	35	47.14	74	-26.86
2484.71	34.57	AV	V	30.35	5.81	35	35.73	54	-18.27

6.8 AC Power Line Conducted Emissions


Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar

Test date :	July 20, 2016
Tested By :	Amos Xia

Requirement(s):

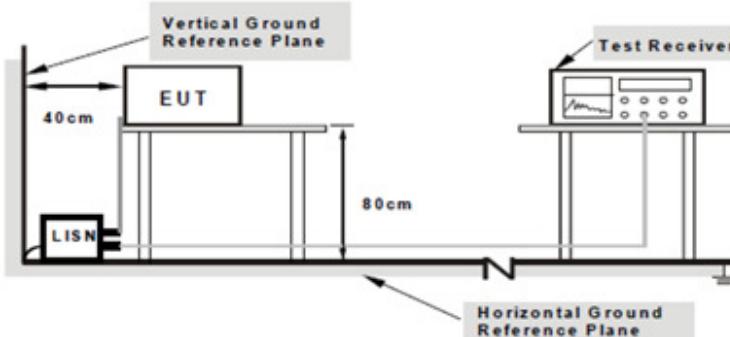Spec	Item	Requirement	Applicable														
47CFR§15.20 7, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 ~ 56</td> <td>56 ~ 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 ~ 56	56 ~ 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 ~ 56	56 ~ 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup			 <p>The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a 1.5m x 1m x 0.8m high, non-metallic table. A LISN (Line Impedance Stabilization Network) is connected to the EUT. A Test Receiver is connected to the LISN. The setup includes a Vertical Ground Reference Plane and a Horizontal Ground Reference Plane. The distance between the LISN and the EUT is 40cm, and the distance between the LISN and the test receiver is 80cm.</p> <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>														
Procedure			<ol style="list-style-type: none"> 1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. 2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power). 														
Remark																	
Result			<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail														

Test Data Yes N/A
 Test Plot Yes (See below) N/A

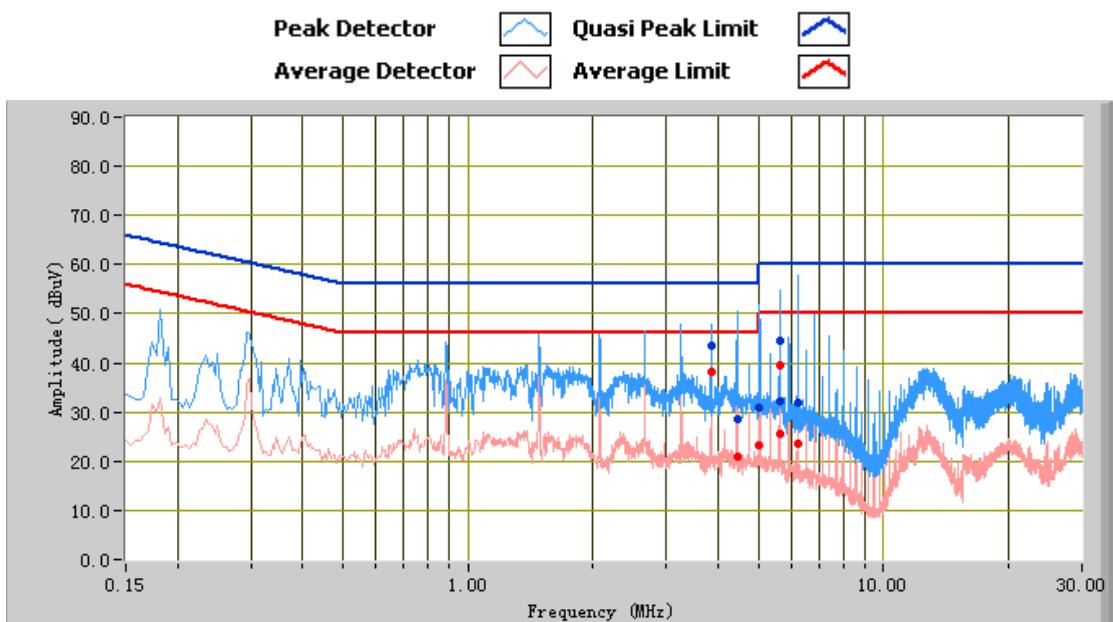Test Mode:
Transmitting Mode

Test Data
Phase Line Plot at AC 120V 60Hz

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
6.21	31.75	60.00	-28.25	23.73	50.00	-26.27	10.92
5.62	32.35	60.00	-27.65	25.51	50.00	-24.49	10.91
5.62	44.49	60.00	-15.51	39.40	50.00	-10.60	10.90
4.44	28.51	56.00	-27.49	20.87	46.00	-25.13	10.89
5.03	30.89	60.00	-29.11	23.29	50.00	-26.71	10.89
3.84	43.34	56.00	-12.66	38.05	46.00	-7.95	10.89

Test Mode:


Transmitting Mode

Peak Detector

 Quasi Peak Limit

Average Detector

 Average Limit

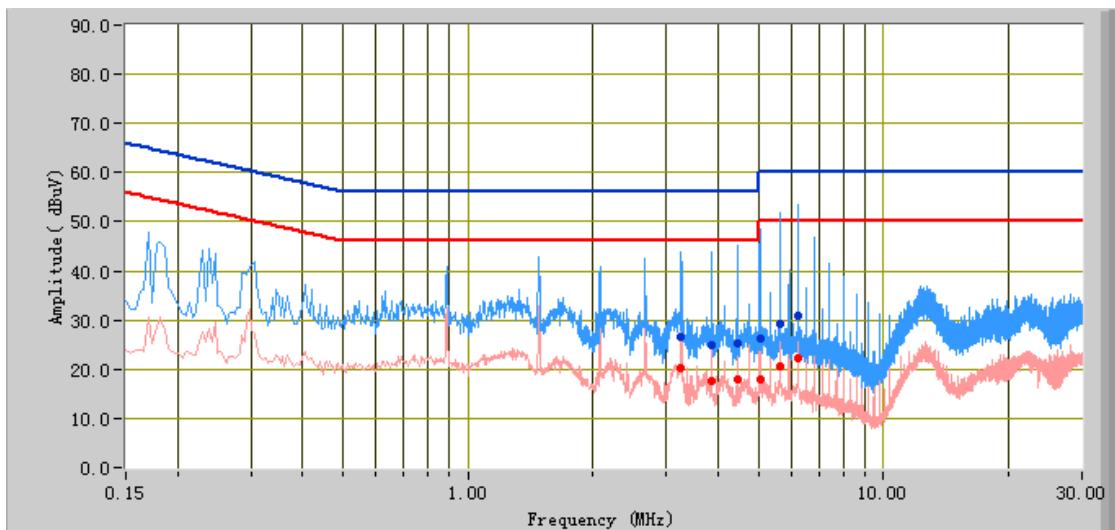


Test Data

Phase Neutral Plot at AC 120V 60Hz

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
6.22	31.02	60.00	-28.98	22.24	50.00	-27.76	10.96
5.63	29.29	60.00	-30.71	20.50	50.00	-29.50	10.96
4.44	25.31	56.00	-30.69	17.77	46.00	-28.23	10.94
5.03	26.16	60.00	-33.84	18.10	50.00	-31.90	10.95
3.85	25.00	56.00	-31.00	17.44	46.00	-28.56	10.94
3.26	26.70	56.00	-29.30	20.12	46.00	-25.88	10.93

Test Mode:

Transmitting Mode

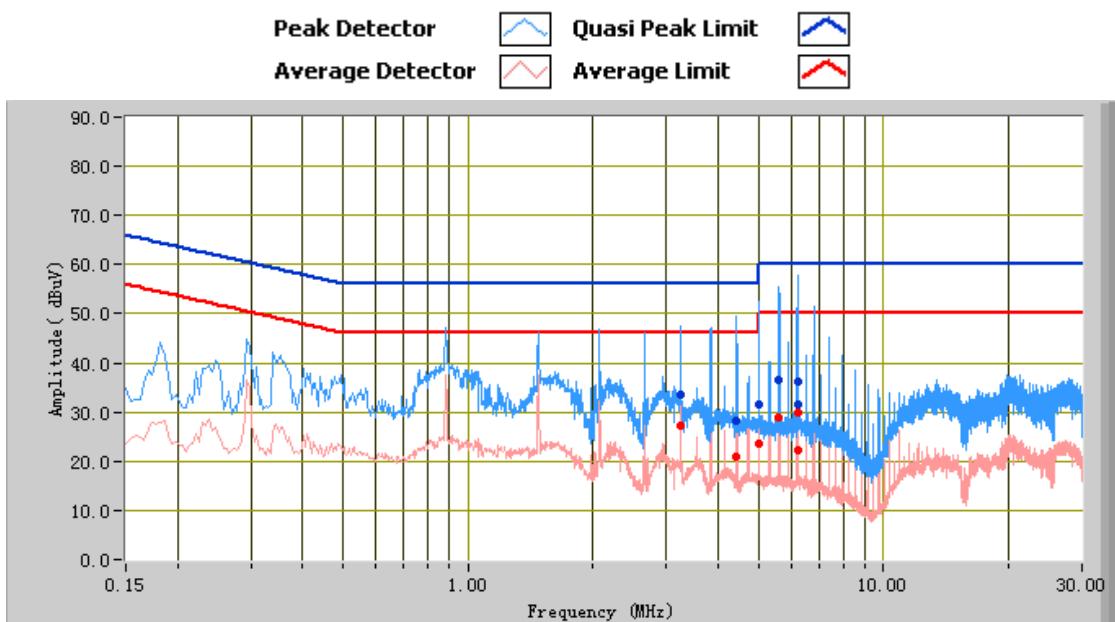


Test Data

Phase Line Plot at AC 240V 60Hz

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
6.20	31.56	60.00	-28.44	22.38	50.00	-27.62	10.92
6.19	36.07	60.00	-23.93	29.82	50.00	-20.18	10.92
5.61	36.47	60.00	-23.53	28.92	50.00	-21.08	10.90
4.43	28.27	56.00	-27.73	20.78	46.00	-25.22	10.89
5.02	31.63	60.00	-28.37	23.45	50.00	-26.55	10.89
3.25	33.71	56.00	-22.29	27.31	46.00	-18.69	10.88

Test Mode:
Transmitting Mode

Peak Detector  Quasi Peak Limit
 Average Detector  Average Limit

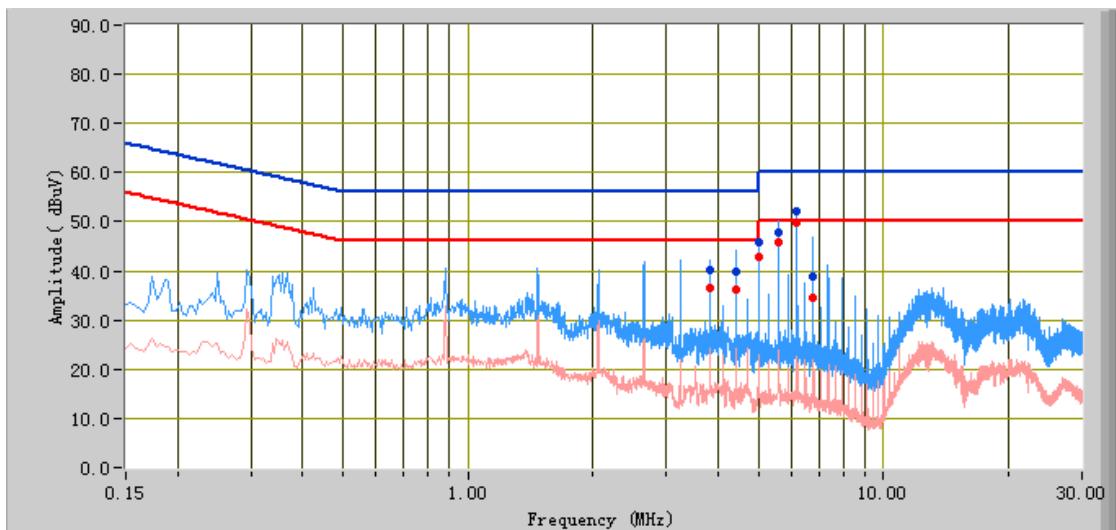

Test Data
Phase Neutral Plot at AC 240V 60Hz

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
6.18	52.23	60.00	-7.77	49.79	50.00	-0.21	10.96
5.59	47.99	60.00	-12.01	45.75	50.00	-4.25	10.96
5.00	45.73	56.00	-10.27	42.77	46.00	-3.23	10.95
4.41	39.79	56.00	-16.21	36.08	46.00	-9.92	10.94
6.77	38.83	60.00	-21.17	34.67	50.00	-15.33	10.97
3.83	40.02	56.00	-15.98	36.59	46.00	-9.41	10.94

6.9 Radiated Spurious Emissions & Restricted Band

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	July 20, 2016
Tested By :	Amos Xia

Requirement(s):

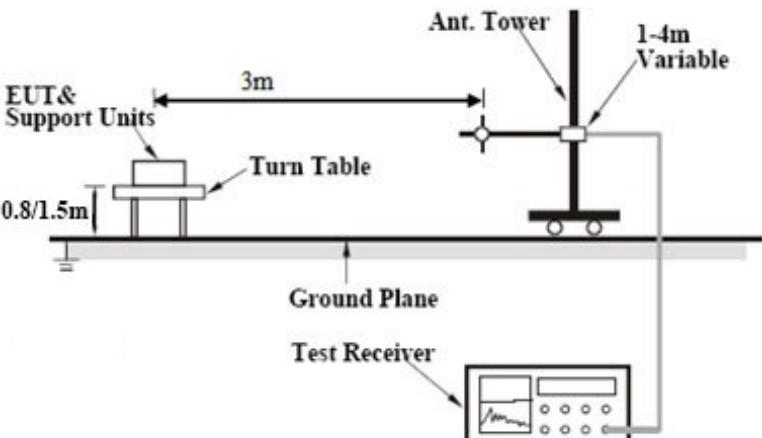Spec	Item	Requirement	Applicable										
47CFR§15.205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 – 960	200												
Above 960	500												
Test Setup													
Procedure			<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency below 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 										
Remark													

Result


Pass



Fail

Test Data

Yes




N/A

Test Plot

Yes (See below)



N/A

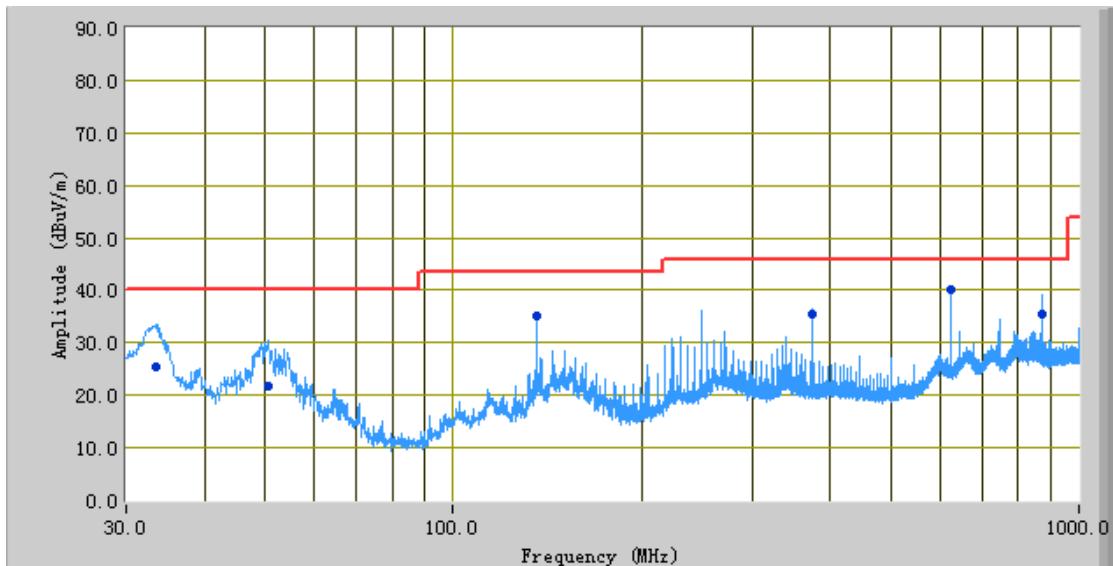Test Mode:**Transmitting Mode*****Below 1GHz***
 Peak Detector 
 Quasi Peak Limit 
**Test Data****Vertical Polarity Plot @3m**


Frequency (MHz)	Quasi Peak (dB μ V/m)	Azimuth	Polarity (H/V)	Height (cm)	Limit (dB μ V/m)	Margin (dB)	Factors (dB)
625.00	40.04	147.00	V	99.00	-22.05	46.00	-5.96
33.36	25.30	336.00	V	107.00	-25.98	40.00	-14.70
874.99	35.54	126.00	V	150.00	-18.30	46.00	-10.46
135.78	35.85	182.00	V	195.00	-31.31	43.50	-7.65
50.50	21.70	210.00	V	118.00	-34.64	40.00	-18.30
375.00	35.63	124.00	V	196.00	-28.33	46.00	-10.37

Test Mode:

Transmitting Mode

Below 1GHz

Peak Detector 
 Quasi Peak Limit 

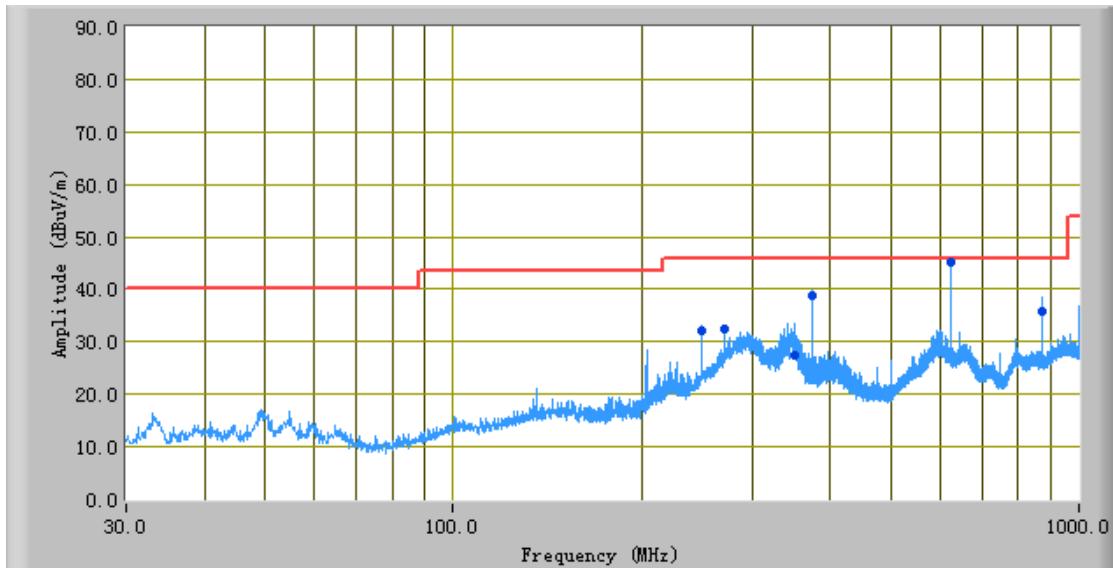

Test Data

Horizontal Polarity Plot @3m

Frequency (MHz)	Quasi Peak (dB μ V/m)	Azimuth	Polarity (H/V)	Height (cm)	Limit (dB μ V/m)	Margin (dB)	Factors (dB)
625.02	45.79	203.00	H	150.00	-20.77	46.00	-0.21
375.00	38.81	37.00	H	100.00	-28.77	46.00	-7.19
874.98	35.78	178.00	H	102.00	-19.31	46.00	-10.22
351.24	27.72	48.00	H	105.00	-29.65	46.00	-18.28
250.00	32.24	122.00	H	137.00	-28.60	46.00	-13.76
271.55	32.85	341.00	H	106.00	-28.83	46.00	-13.15

Test Mode:
Transmitting Mode (Above 1GHz)
Low Channel: GFSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4804	35.96	AV	V	33.83	6.86	31.72	44.93	54	-9.07
4804	34.46	AV	H	33.83	6.86	31.72	43.43	54	-10.57
4804	47.69	PK	V	33.83	6.86	31.72	56.66	74	-17.34
4804	46.35	PK	H	33.83	6.86	31.72	55.32	74	-18.68

Middle Channel: GFSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4882	33.46	AV	V	33.86	6.82	31.82	42.32	54	-11.68
4882	32.57	AV	H	33.86	6.82	31.82	41.43	54	-12.57
4882	46.09	PK	V	33.86	6.82	31.82	54.95	74	-19.05
4882	45.15	PK	H	33.86	6.82	31.82	54.01	74	-19.99

High Channel: GFSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	33.09	AV	V	33.9	6.76	31.92	41.83	54	-12.17
4960	32.35	AV	H	33.9	6.76	31.92	41.09	54	-12.91
4960	45.89	PK	V	33.9	6.76	31.92	54.63	74	-19.37
4960	44.97	PK	H	33.9	6.76	31.92	53.71	74	-20.29

Note:

- 1, The testing has been conformed to $10 \times 2480\text{MHz} = 24,800\text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
R&S EMI Test Receiver	ESPI3	101216	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
V-LISN	ESH3-Z5	838979/005	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
SIEMIC Conducted Emissions software	V1.0	N/A	N/A	N/A	<input checked="" type="checkbox"/>
RF conducted test					
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
Radiated Emissions					
Agilent Technologies Spectrum Analyzer	N9010A	MY47191130	03/11/2016	03/10/2017	<input checked="" type="checkbox"/>
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
Antenna (30MHz~6GHz)	JB6	A121411	10/31/2015	10/31/2016	<input checked="" type="checkbox"/>
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	10/09/2015	10/08/2016	<input checked="" type="checkbox"/>
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/31/2015	10/31/2016	<input checked="" type="checkbox"/>
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/30/2015	10/30/2016	<input checked="" type="checkbox"/>
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	AMF-7D-00101800-30-10P	1451709	10/27/2015	10/26/2016	<input checked="" type="checkbox"/>
SIEMIC Radiated Emissions software	V1.0	N/A	N/A	N/A	

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo



EUT- Front View



EUT- Rear View



EUT- Top View



EUT- Bottom View

Test Report No.	16020292-FCC-R1
Page	43 of 54



EUT- Left View




EUT- Right View


Annex B.ii. Photograph: EUT Internal Photo




EUT Uncover - Front View

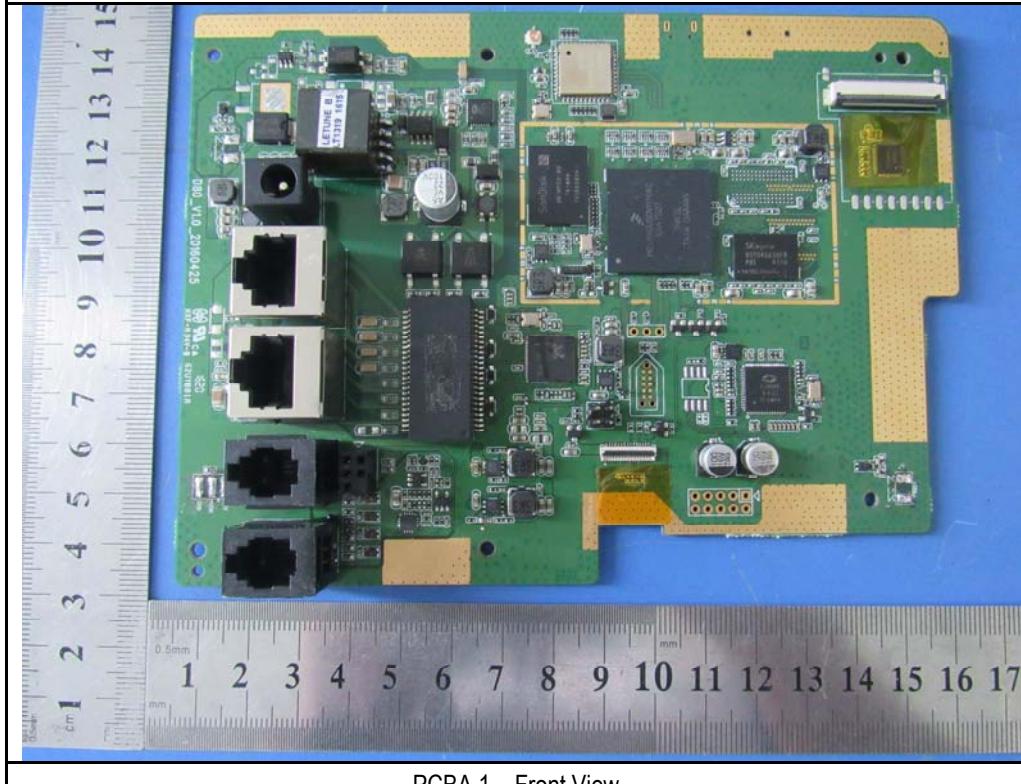


PCBA 1 – Front View

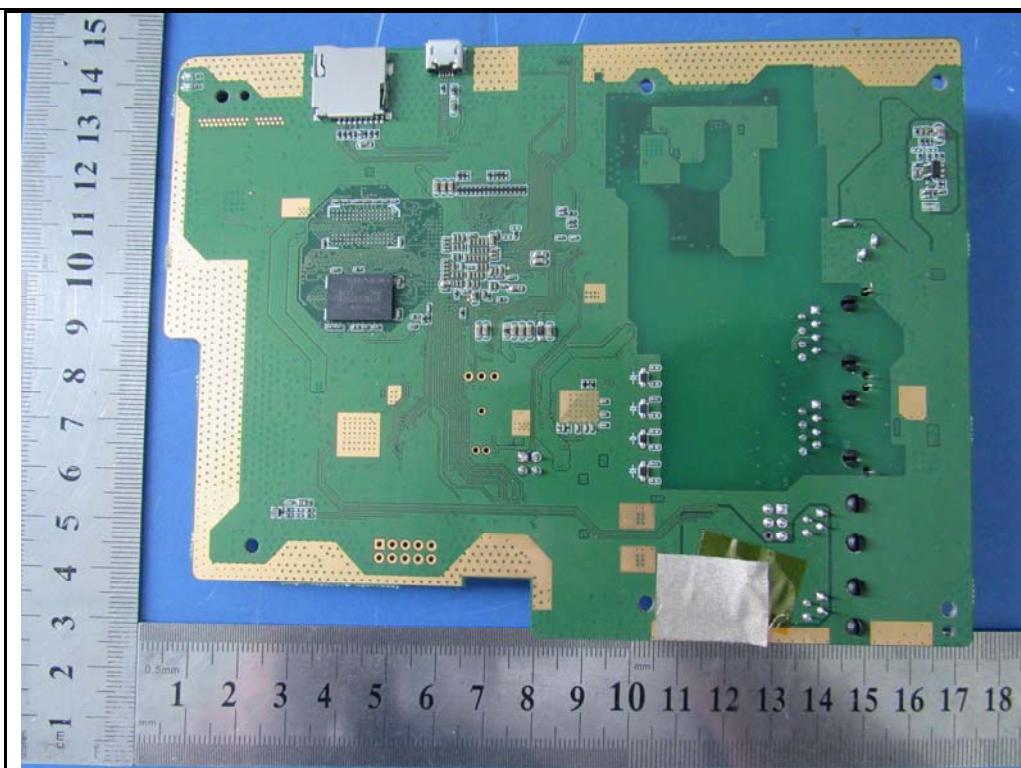


PCBA 1 – Front View

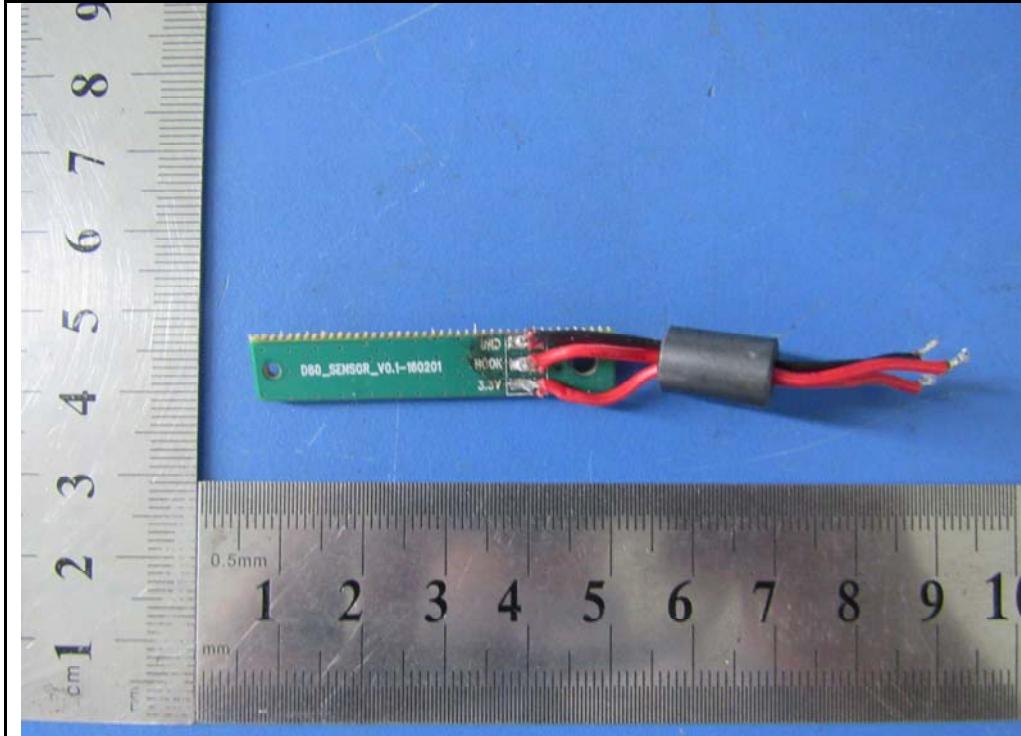

PCBA 2 – Front View

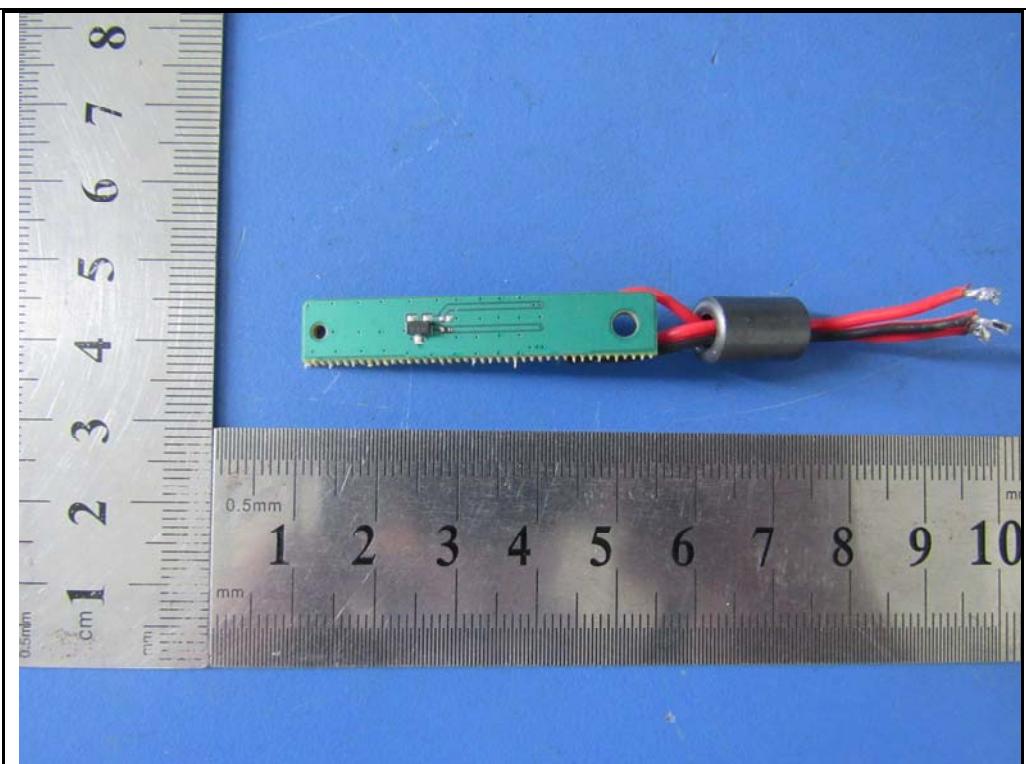

PCBA 2 – Front View

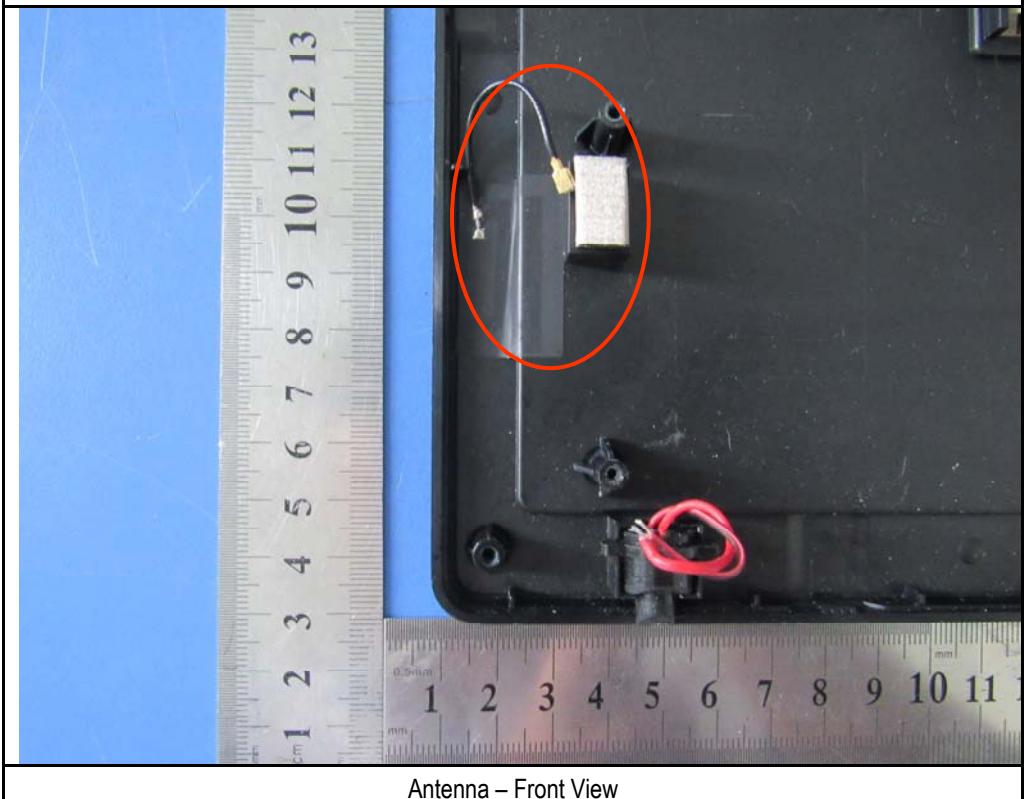

Antenna – Front View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

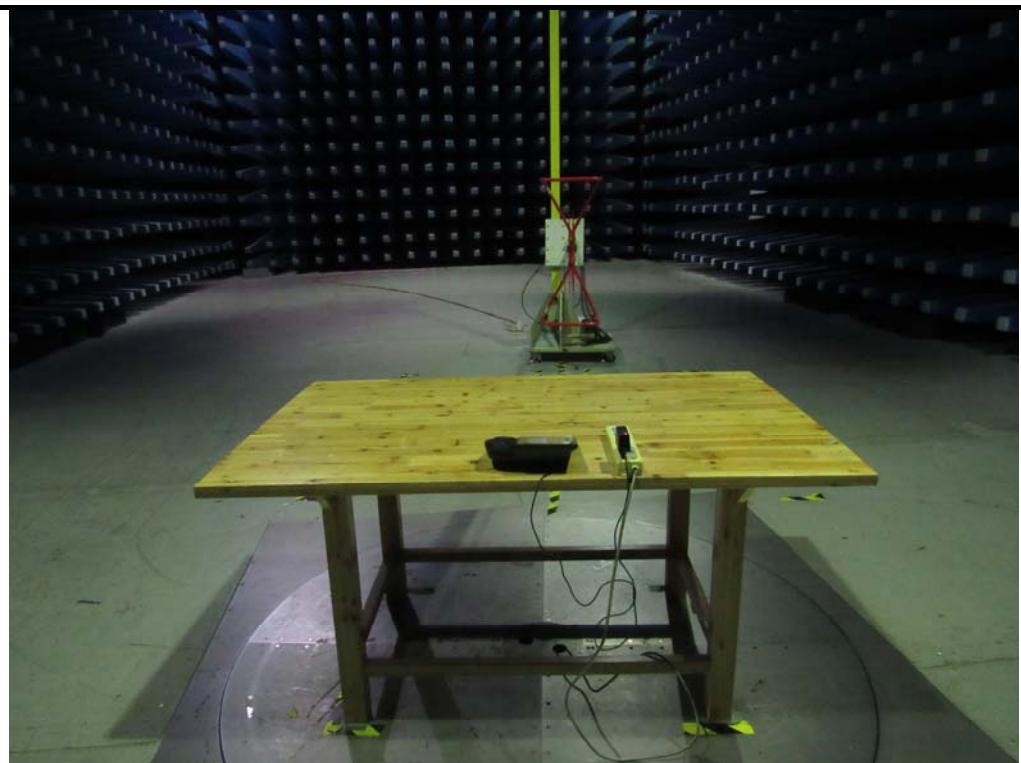

Radiated Spurious Emissions Test Setup Below
1GHz

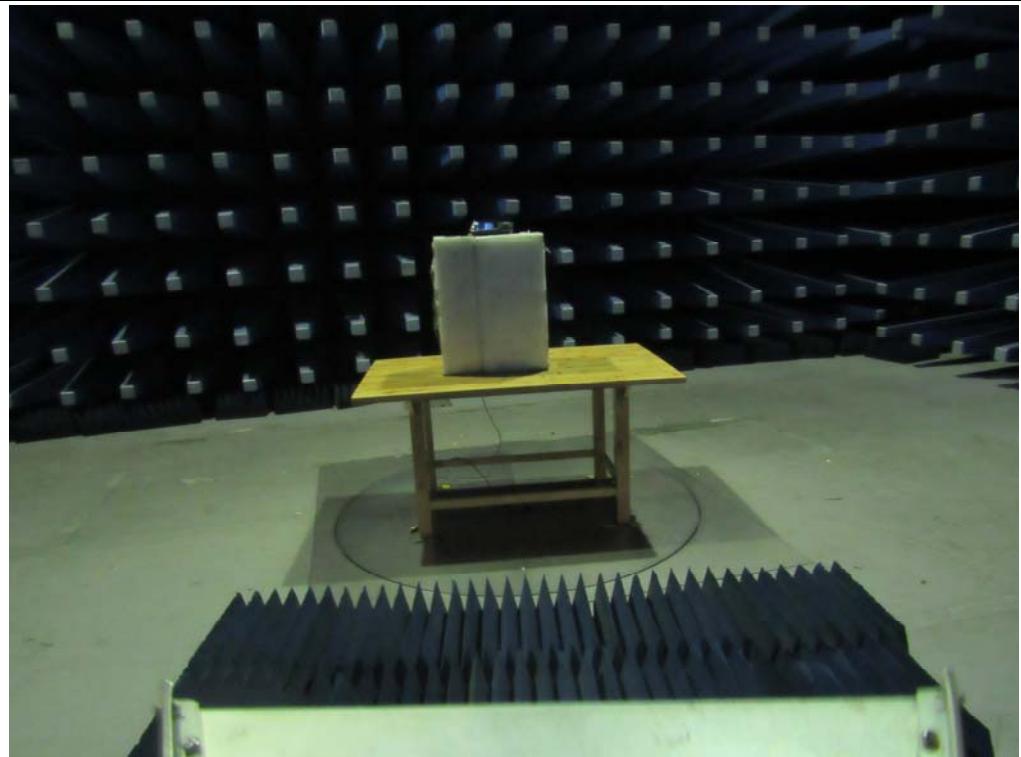


Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

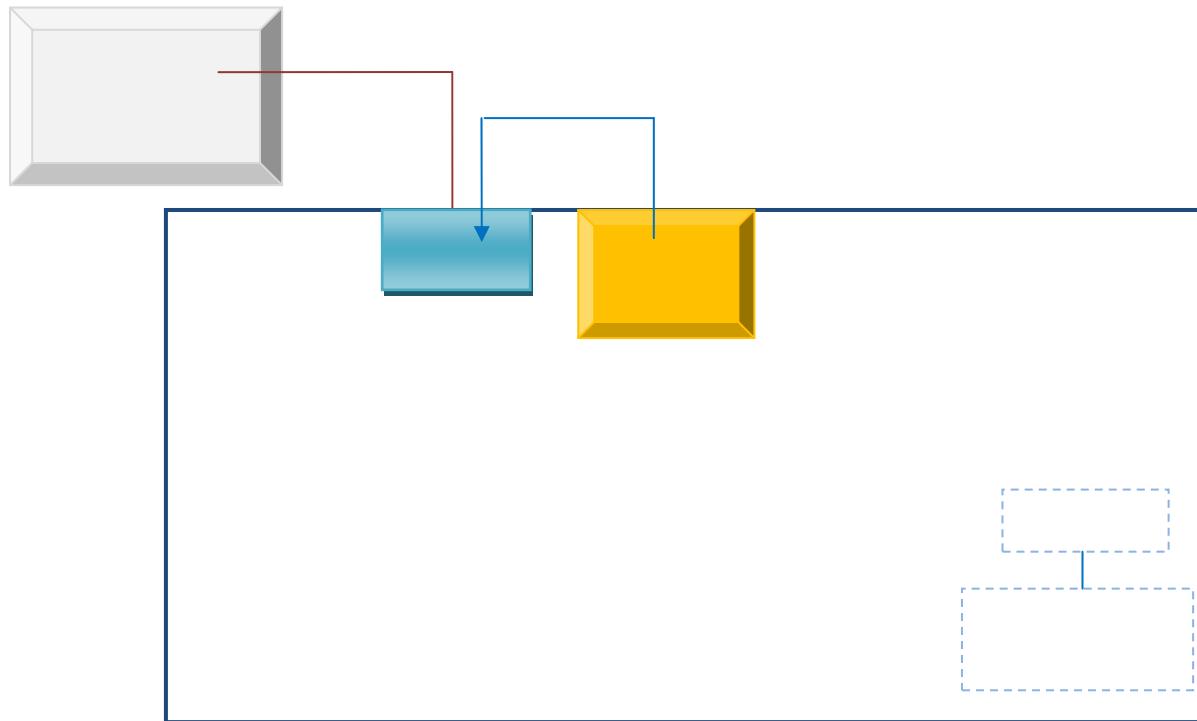

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

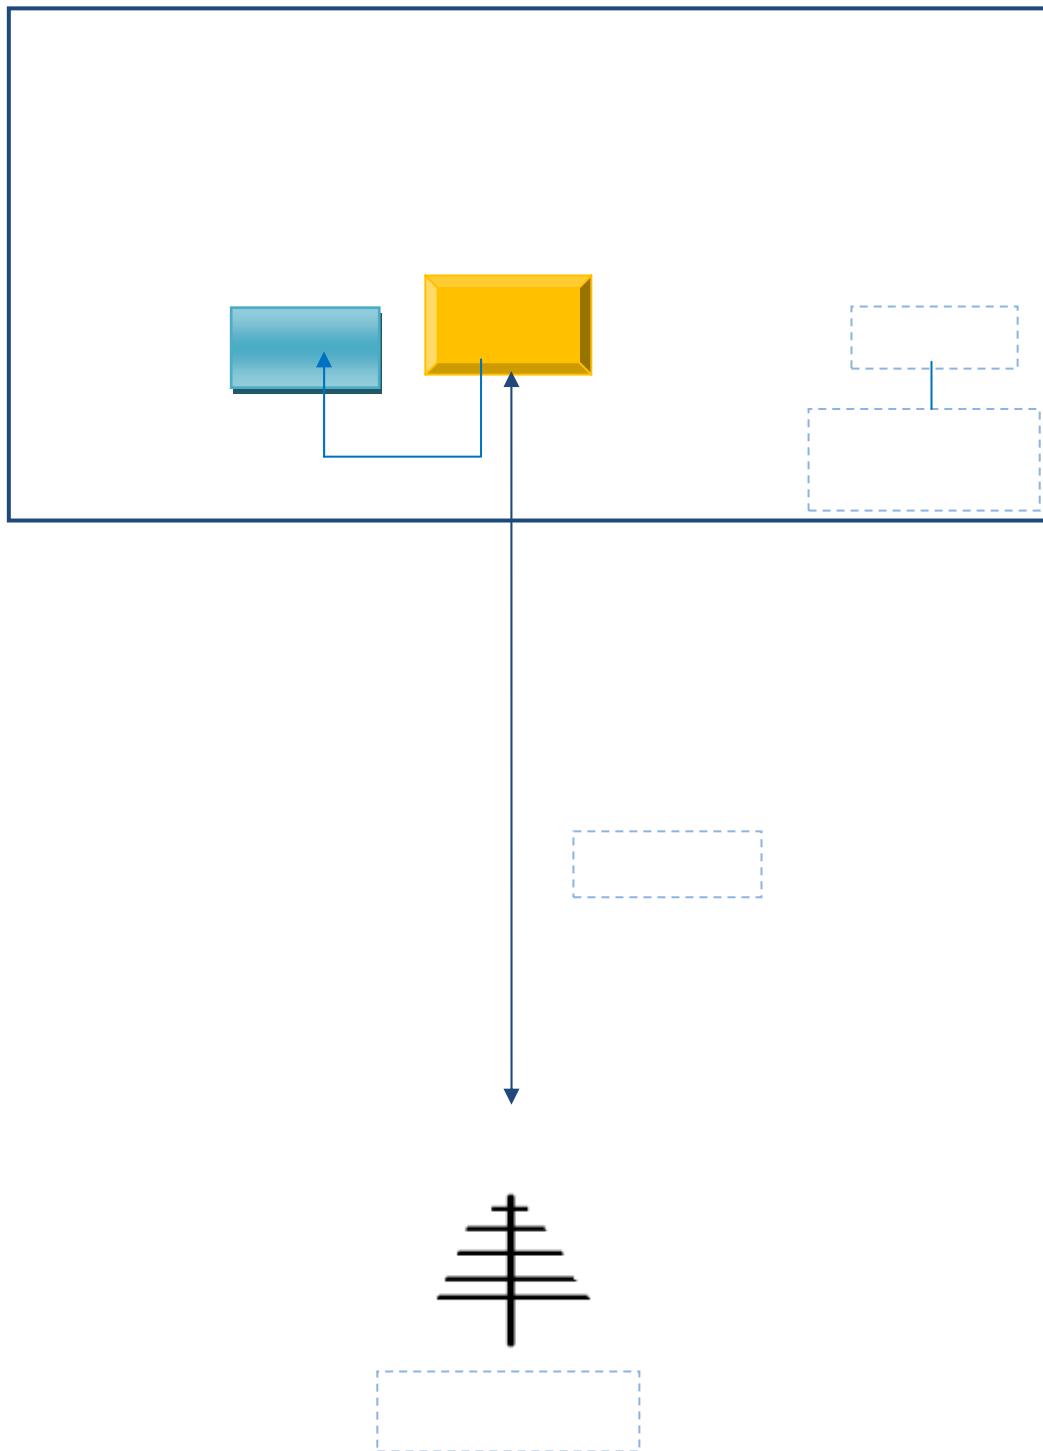

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

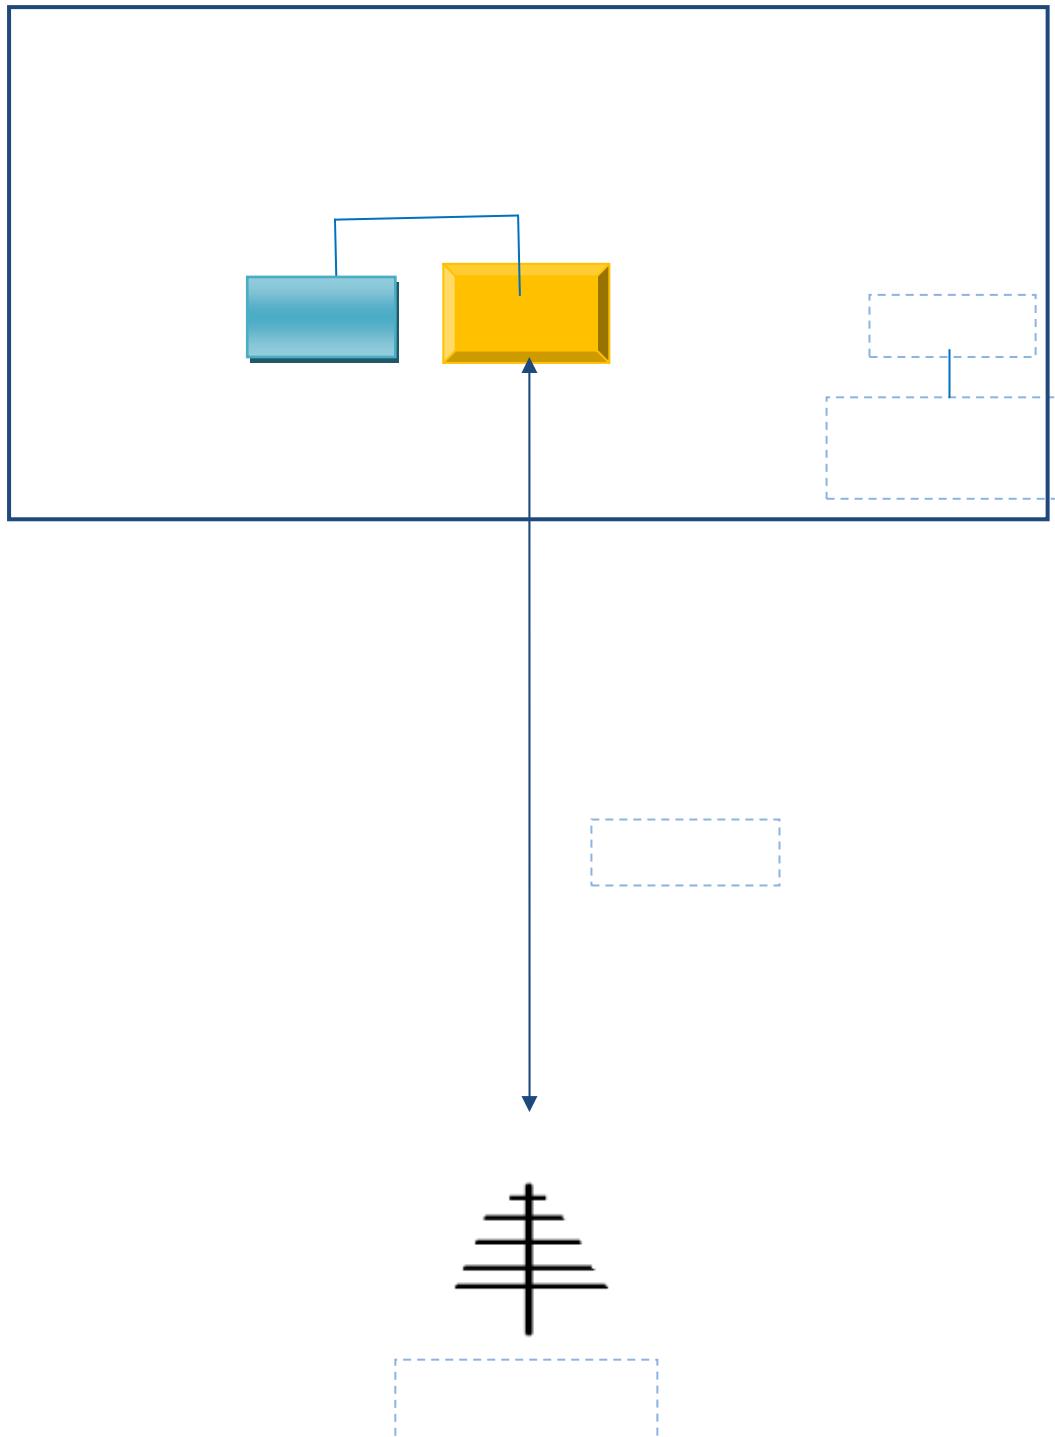

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Remark
N/A	Adapter	P-050B	INPUT: 100-240V~50/60Hz 0.3A OUTPUT: 5V dc 2.0A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
Power Cable	Un-shielding	No	1.8m	42T441636200034

Test Report No.	16020292-FCC-R1
Page	53 of 54

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report No.	16020292-FCC-R1
Page	54 of 54

Annex E. DECLARATION OF SIMILARITY

N/A