

8 7 6 5 4 3 2 1

A

A

B

B

C


C

D

D

E

E




38.0\*24.0MM

**merrytek**<sup>®</sup>

Detection Area    Hold Time    Daylight Sensor    Mode

1	2		3	4	5		6	7	8		9	
ON	ON	100%	ON	ON	ON	5S	ON	ON	ON	2 LUX	ON	Constant ON
-	ON	75%	-	ON	ON	30S	ON	ON	-	10LUX		
-	ON	50%	ON	-	ON	90S	-	ON	-	25LUX	-	Sensor
ON	-	50%	-	-	ON	3min	ON	-	-	50LUX		
-	-	10%	ON	ON	-	20min	-	-	-	Disable		
-	-	10%	-	-	-	30min	-	-	-	Disable		

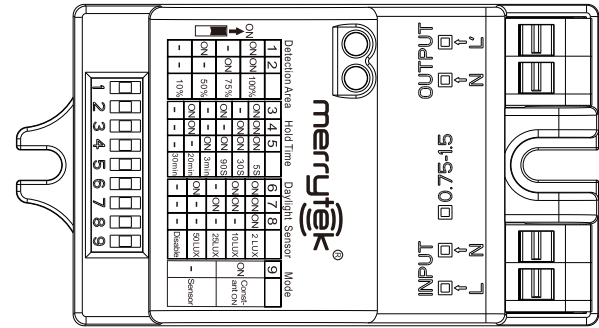

### Enlarged view

### Silk-screen location

Lighting Control Switch  
(Motion Sensor)  
Model:MC603S

UL E480996  
**UL**  
**LISTED**

Input: 120/277Vac 50/60Hz

Max.Load: 200W@120Vac 400W@277Vac-Ballast

400W@120Vac 800W@277Vac-Resistive

FCC ID: 2A153-MC603S  
www.merrytek.com

Shenzhen Merrytek Technology Co.,LTD

wire preparation of input/output  
22-16AWG

65\*22.5mm

Lighting Control Switch  
(Motion Sensor)  
Model:MC603S

UL E480996  
**UL**  
**LISTED**

Input: 120/277Vac 50/60Hz

Max.Load: 200W@120Vac 400W@277Vac-Ballast

400W@120Vac 800W@277Vac-Resistive

FCC ID: 2A153-MC603S  
www.merrytek.com

Shenzhen Merrytek Technology Co.,LTD

wire preparation of input/output  
22-16AWG

Lighting Control Switch  
(Motion Sensor)  
Model:MC603S

UL E480996  
**UL**  
**LISTED**

Input: 120/277Vac 50/60Hz

Max.Load: 200W@120Vac 400W@277Vac-Ballast

400W@120Vac 800W@277Vac-Resistive

FCC ID: 2A153-MC603S  
www.merrytek.com

Shenzhen Merrytek Technology Co.,LTD

wire preparation of input/output  
22-16AWG

深圳迈睿智能科技有限公司  
ShenZhenMerrytekTechnologyCO.,LTD

8 7 6 5 4 3 2 1