



## FCC TEST REPORT

**FCC ID: 2AI56-Q27CMA11**

On Behalf of

**HKC Corporation Limited**

intelligent signage

Model No.: Q27CMA11, Q27C\*\*\*\* (\*=0-9, A-Z, a-z, blank)

Prepared for : HKC Corporation Limited  
Address : Building 1,2,3, Huike Industrial Park, Mingying Industrial Zone,  
ShuiTian, ShiYan, Baoan, Shenzhen, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : A2310034-C01-R02  
Date of Receipt : October 16, 2023  
Date of Test : October 16, 2023- November 1, 2023  
Date of Report : November 1, 2023  
Version Number : V0

## TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
<b>1. Summary of Standards And Results .....</b>	<b>6</b>
1.1. Description of Standards and Results .....	6
<b>2. General Information.....</b>	<b>7</b>
2.1. Description of Device (EUT) .....	7
2.2. Accessories of Device (EUT) .....	8
2.3. Tested Supporting System Details .....	8
2.4. Block Diagram of connection between EUT and simulators .....	8
2.5. Test Mode Description .....	8
2.6. Test Conditions .....	9
2.7. Test Facility .....	9
2.8. Measurement Uncertainty .....	9
2.9. Test Equipment List.....	10
<b>3. Maximum Peak Output power .....</b>	<b>11</b>
3.1. Limit .....	11
3.2. Test Procedure.....	11
3.3. Test Setup.....	11
3.4. Test Result.....	11
<b>4. Bandwidth.....</b>	<b>12</b>
4.1. Limit .....	12
4.2. Test Procedure.....	12
4.3. Test Result.....	12
<b>5. Carrier Frequency Separation .....</b>	<b>23</b>
5.1. Limit .....	23
5.2. Test Procedure.....	23
5.3. Test Result.....	23
<b>6. Number Of Hopping Channel .....</b>	<b>25</b>
6.1. Limit .....	25
6.2. Test Procedure.....	25
6.3. Test Result.....	25
<b>7. Dwell Time .....</b>	<b>27</b>
7.1. Test limit.....	27
7.2. Test Procedure.....	27
7.3. Test Result.....	27
<b>8. Radiated emissions .....</b>	<b>37</b>
8.1. Limit .....	37
8.2. Block Diagram of Test setup .....	38
8.3. Test Procedure.....	39
8.4. Test Result.....	40
<b>9. Band Edge Compliance.....</b>	<b>55</b>
9.1. Block Diagram of Test Setup.....	55

---

9.2. Limit .....	55
9.3. Test Procedure.....	55
9.4. Test Result .....	55
<b>10. Power Line Conducted Emissions.....</b>	<b>71</b>
10.1. Block Diagram of Test Setup .....	71
10.2. Limit.....	71
10.3. Test Procedure .....	71
10.4. Test Result .....	71
<b>11. Antenna Requirements.....</b>	<b>74</b>
11.1. Limit .....	74
11.2. Result.....	74
<b>12. Test setup photo .....</b>	<b>75</b>
12.1. Photo of Radiated Emission test .....	75
12.2. Photo of Conducted Emission test .....	76

### TEST REPORT DECLARATION

Applicant : HKC Corporation Limited

Address : Building 1,2,3, Huike Industrial Park, Mingying Industrial Zone, ShuiTian, ShiYan, Baoan, Shenzhen, China

Manufacturer : HKC Corporation Limited

Address : Building 1,2,3, Huike Industrial Park, Mingying Industrial Zone, ShuiTian, ShiYan, Baoan, Shenzhen, China

EUT Description : intelligent signage

(A) Model No. : Q27CMA11, Q27C\*\*\*\* (\*=0-9, A-Z, a-z, blank)

(B) Trademark : N/A

Measurement Standard Used:



**FCC Rules and Regulations Part 15 Subpart C Section 15.247**

**ANSI C63.10:2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:	Lucas Pang Project Engineer	 -----
Approved by (name + signature).....:	Reak Yang Project Manager	 -----
Date of issue.....:	November 1, 2023	

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	November 1, 2023	Initial released Issue	Lucas Pang

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P

Note: 1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Description : intelligent signage

Model Number : Q27CMA11, Q27C\*\*\*\* (\*=0-9, A-Z, a-z, blank)

Diff : There is no difference except the name of the model. All tests are made with the Q27CMA11 model.

Power supply : DC 24V from adapter, DC 19.2V from battery.

Radio Technology : Bluetooth V5.2 EDR

Operation frequency : 2402-2480MHz

Channel No. : 79 Channels

Channel spacing : 1MHz

Modulation type : GFSK,  $\pi/4$  DQPSK, 8DPSK

Antenna Type : Internal Antenna, max gain -3.98dBi  
(Antenna information is provided by applicant.)

Software version : V1.0

Hardware version : V1.0

Connector cable loss : N/A

Intend use environment : Residential, commercial and light industrial environment


## 2.2. Accessories of Device (EUT)

Accessories : AC ADAPTOR  
 Manufacturer : Shenzhen Guijin Technology Co., Ltd.  
 Model : GJ100WD-2400400W1  
 Ratings : INPUT: 100-240V~50/60Hz 1.5A  
 OUTPUT: 24.0V=4.0A 96.0W

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	--	--	--	--	--

## 2.4. Block Diagram of connection between EUT and simulators

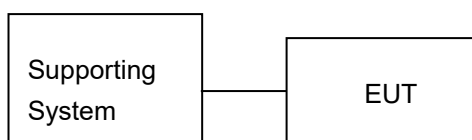

## 2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
$\pi/4$ DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
8DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480



## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd  
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
 Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
 Registration Number: 293961

September 15, 2019 Certificated by IC  
 Registration Number: 12135A

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB(Polarize: H)
	4.16dB(Polarize: V)
Uncertainty for radio frequency	$5.4 \times 10^{-8}$
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

## 2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2023.08.16	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2023.08.16	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2023.08.16	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2023.08.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	1Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	1Year
RF Cable	Resenberger	Cable 1	/	RE1	2023.08.16	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2023.08.16	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2023.08.16	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2023.08.16	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2023.08.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2023.08.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2023.08.16	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	1Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2023.08.16	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2023.08.16	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2023.08.16	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2023.08.16	1 Year
Adjustable attenuator	MWRftest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

## Software Information

Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MWRftest	V2.0.0.0

### 3. MAXIMUM PEAK OUTPUT POWER

#### 3.1. Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

#### 3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

#### 3.3. Test Setup

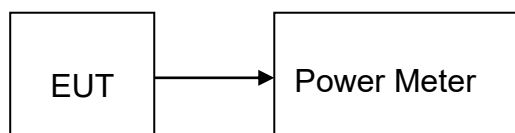

#### 3.4. Test Result

Mode	Freq (MHz)	PK Output Power (dBm)	PK Output Power (mW)	Limit (dBm)	Result
GFSK	2402	1.358	1.367	21	Pass
	2441	1.49	1.409	21	Pass
	2480	1.198	1.318	21	Pass
$\pi/4$ DQPSK	2402	1.673	1.470	30	Pass
	2441	1.89	1.545	30	Pass
	2480	1.49	1.409	30	Pass
8DPSK	2402	1.477	1.405	30	Pass
	2441	<b>3.064</b>	2.025	30	Pass
	2480	2.76	1.888	30	Pass

## 4. BANDWIDTH

### 4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 4.3. Test Result

**-20dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH1	2402	Ant1	0.852
NVNT	1-DH1	2441	Ant1	0.926
NVNT	1-DH1	2480	Ant1	0.862
NVNT	2-DH1	2402	Ant1	1.248
NVNT	2-DH1	2441	Ant1	1.248
NVNT	2-DH1	2480	Ant1	1.256
NVNT	3-DH1	2402	Ant1	1.206
NVNT	3-DH1	2441	Ant1	1.204
NVNT	3-DH1	2480	Ant1	1.204

-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

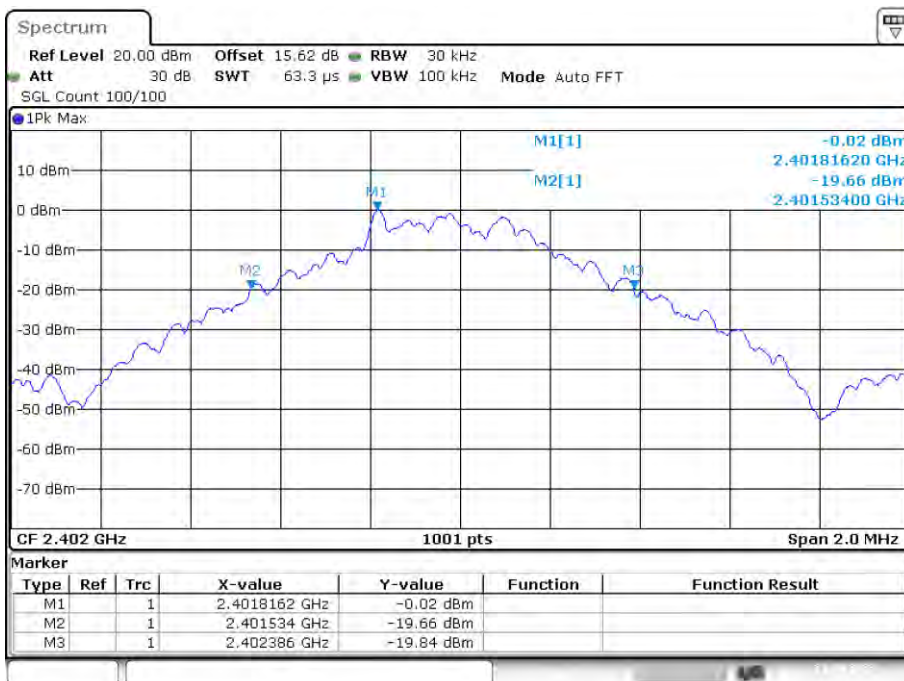


Date: 23.OCT.2023 12:06:09

-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

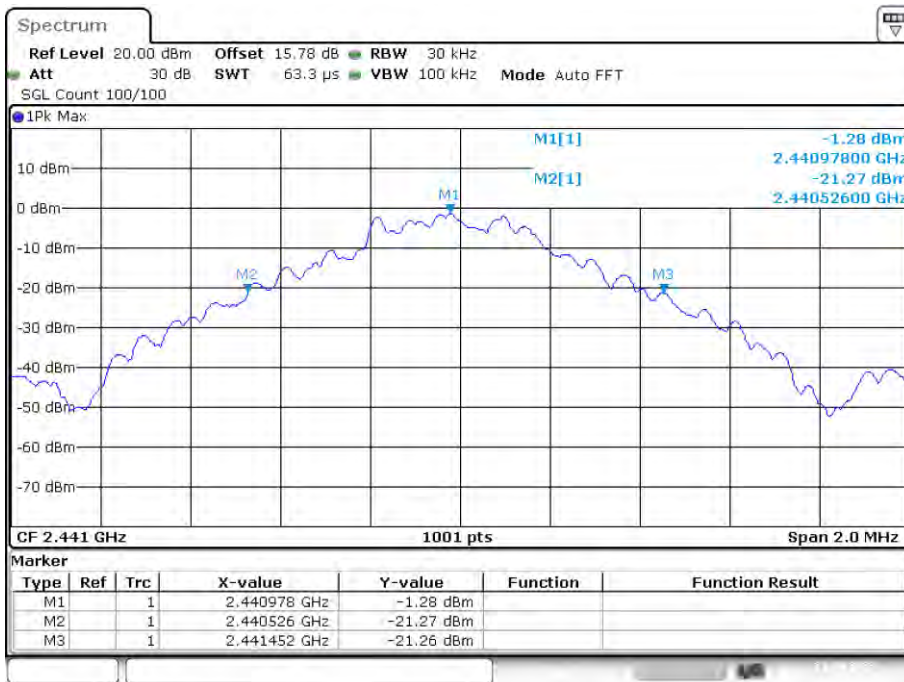


Date: 23.OCT.2023 12:09:03

-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

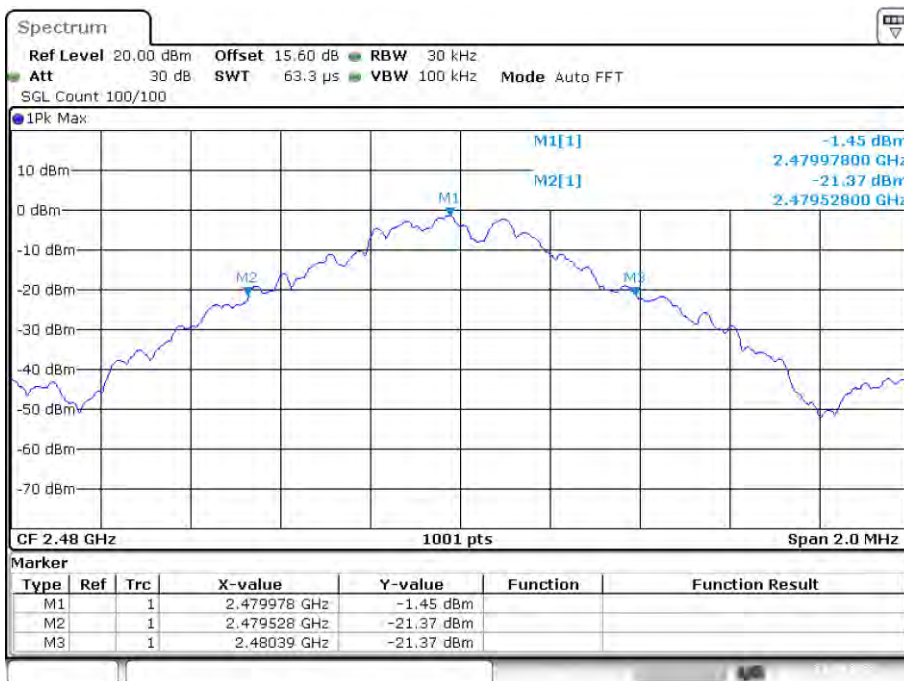


Date: 23.OCT.2023 12:10:33

-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

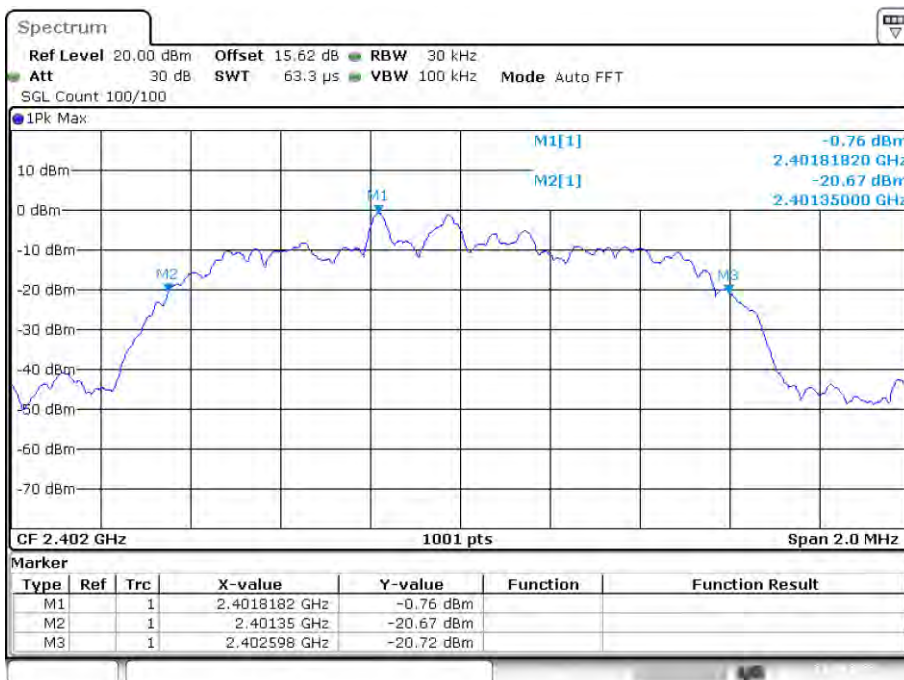


Date: 23.OCT.2023 12:34:56

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

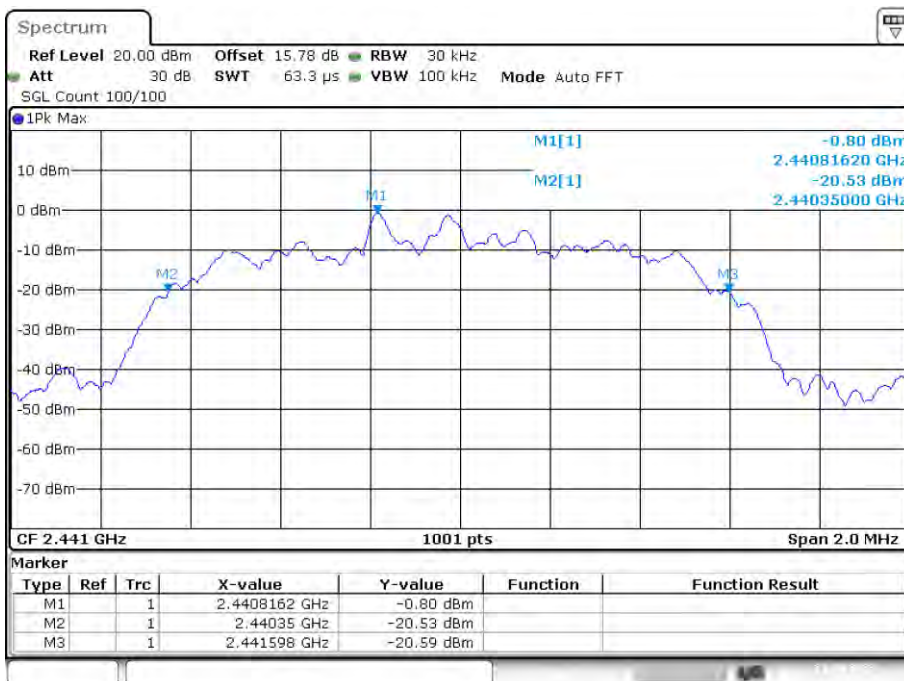


Date: 23.OCT.2023 12:37:54

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

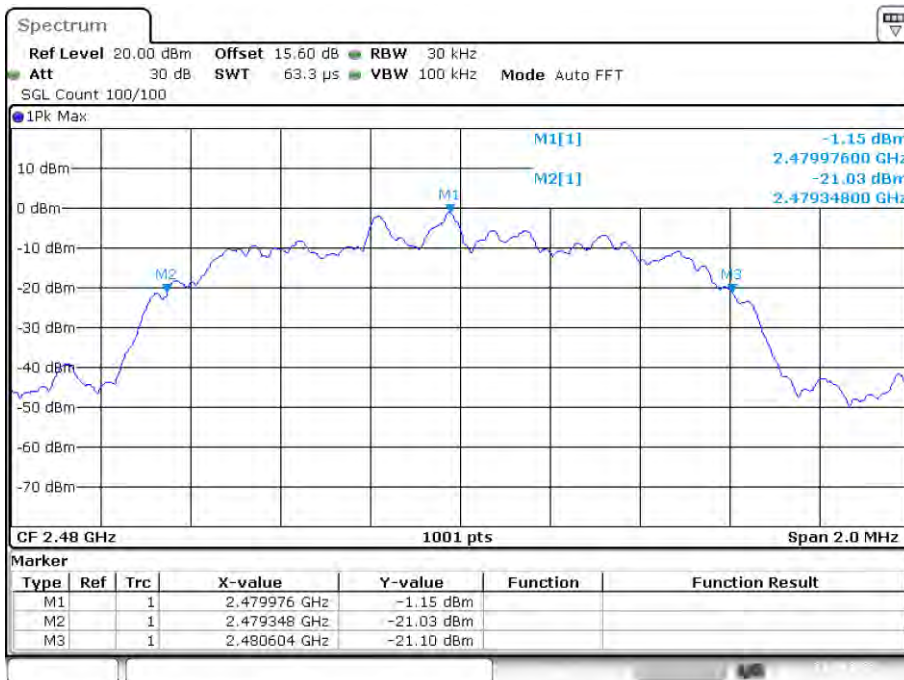


Date: 23.OCT.2023 12:39:12

-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

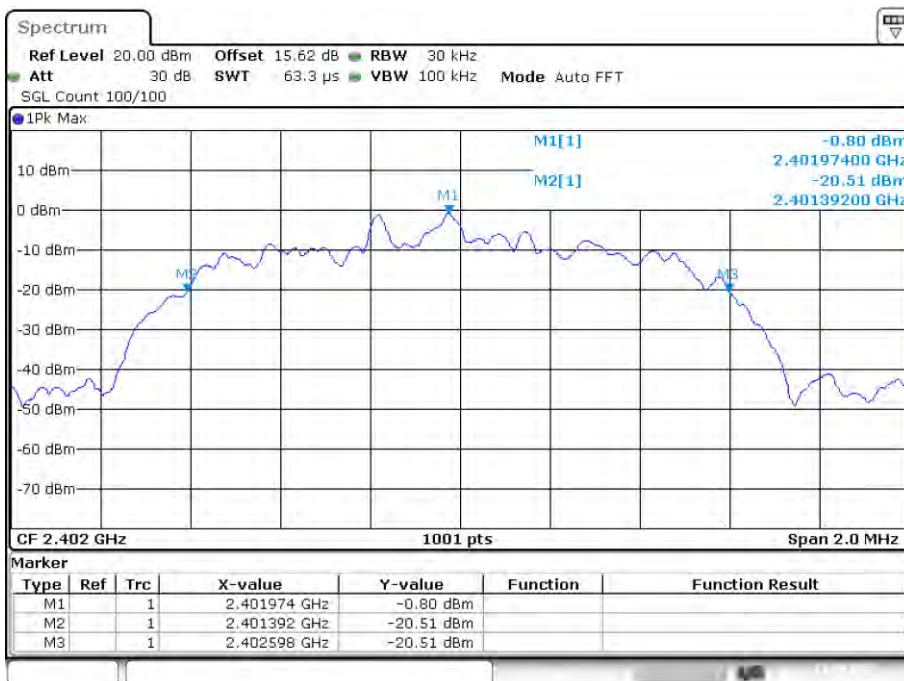

Date: 23.OCT.2023 13:00:13


-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

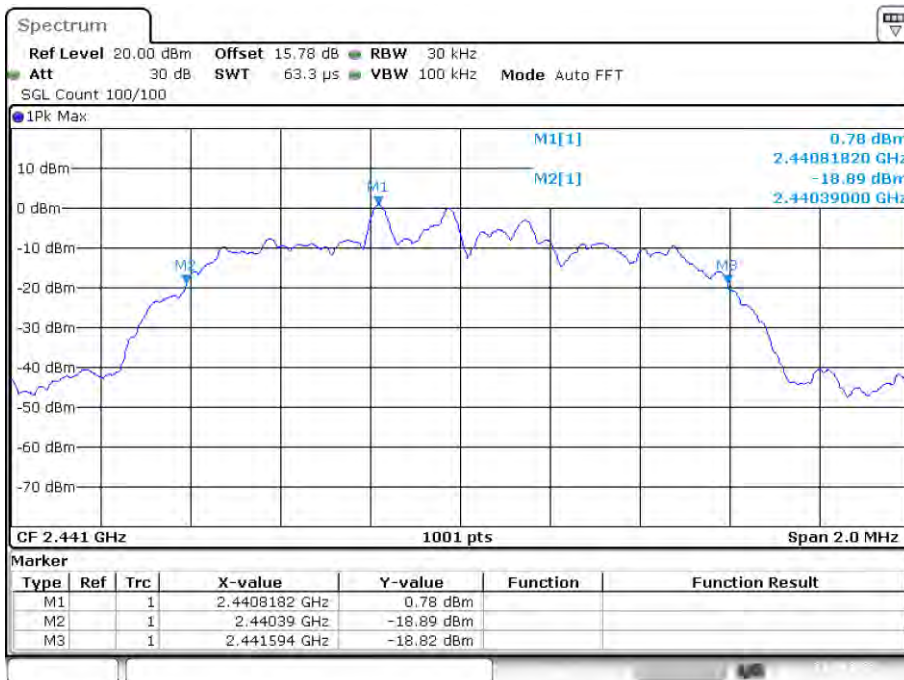

Date: 23.OCT.2023 13:29:24



-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

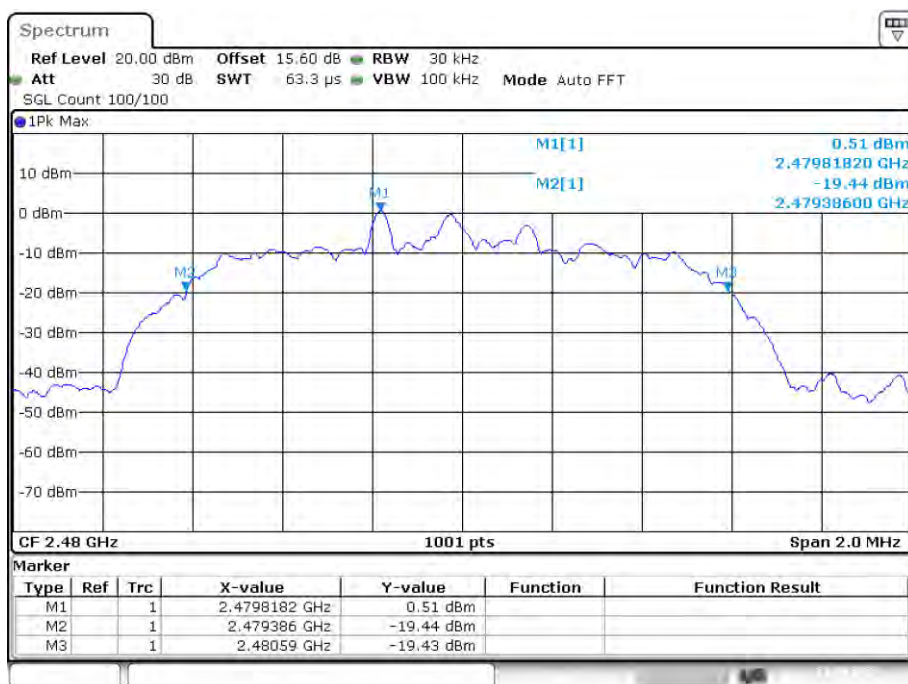


Date: 23.OCT.2023 13:33:34

**Occupied Channel Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.805
NVNT	1-DH1	2441	Ant1	0.801
NVNT	1-DH1	2480	Ant1	0.805
NVNT	2-DH1	2402	Ant1	1.149
NVNT	2-DH1	2441	Ant1	1.153
NVNT	2-DH1	2480	Ant1	1.153
NVNT	3-DH1	2402	Ant1	1.157
NVNT	3-DH1	2441	Ant1	1.159
NVNT	3-DH1	2480	Ant1	1.151

OBW NVNT 1-DH1 2402MHz Ant1

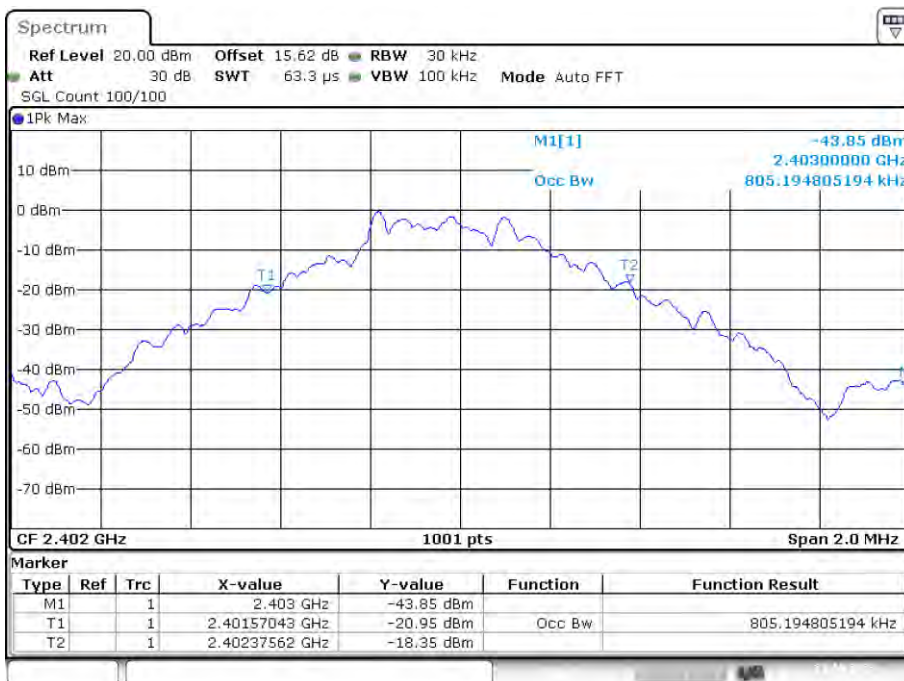


Date: 23.OCT.2023 12:06:01

OBW NVNT 1-DH1 2441MHz Ant1

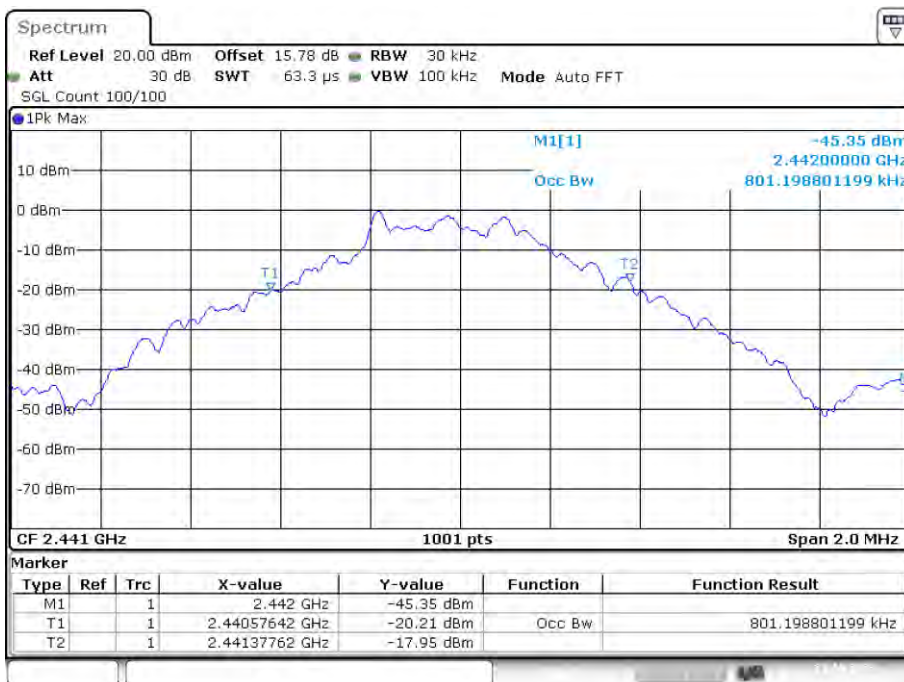


Date: 23.OCT.2023 12:08:55

OBW NVNT 1-DH1 2480MHz Ant1

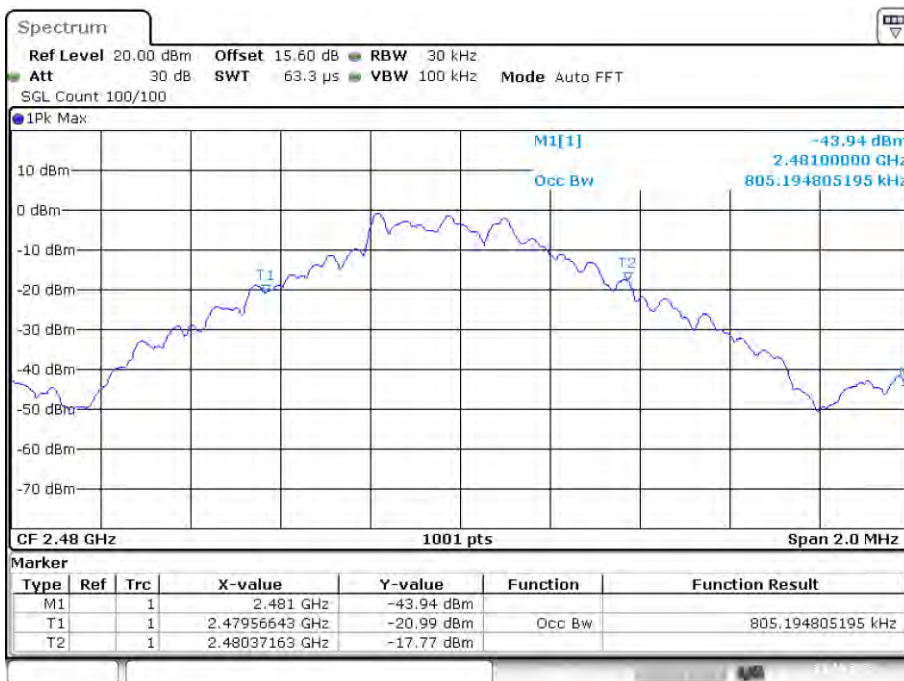


Date: 23.OCT.2023 12:10:25

OBW NVNT 2-DH1 2402MHz Ant1

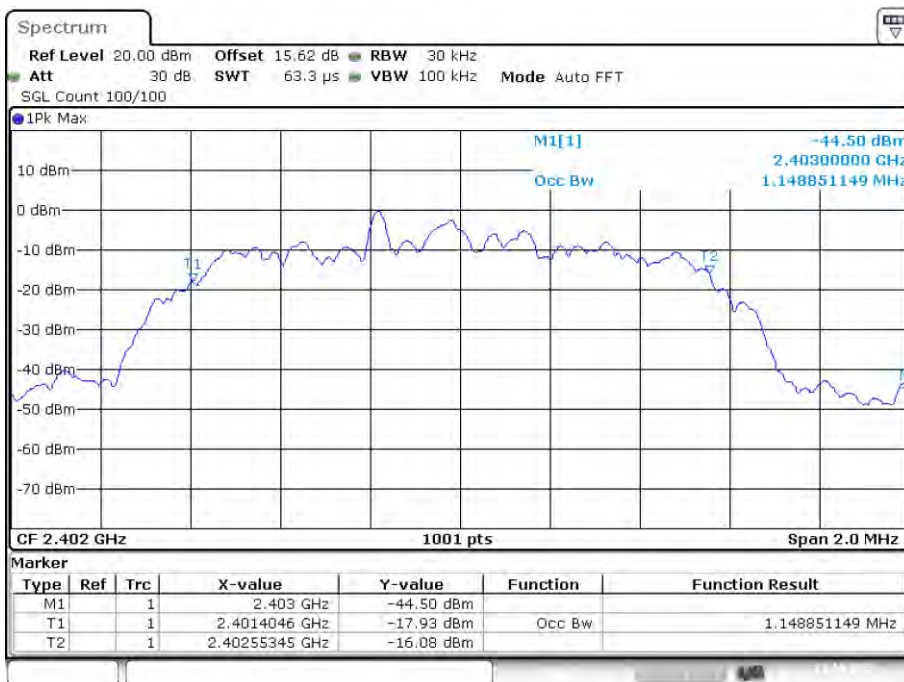


Date: 23.OCT.2023 12:34:46

OBW NVNT 2-DH1 2441MHz Ant1

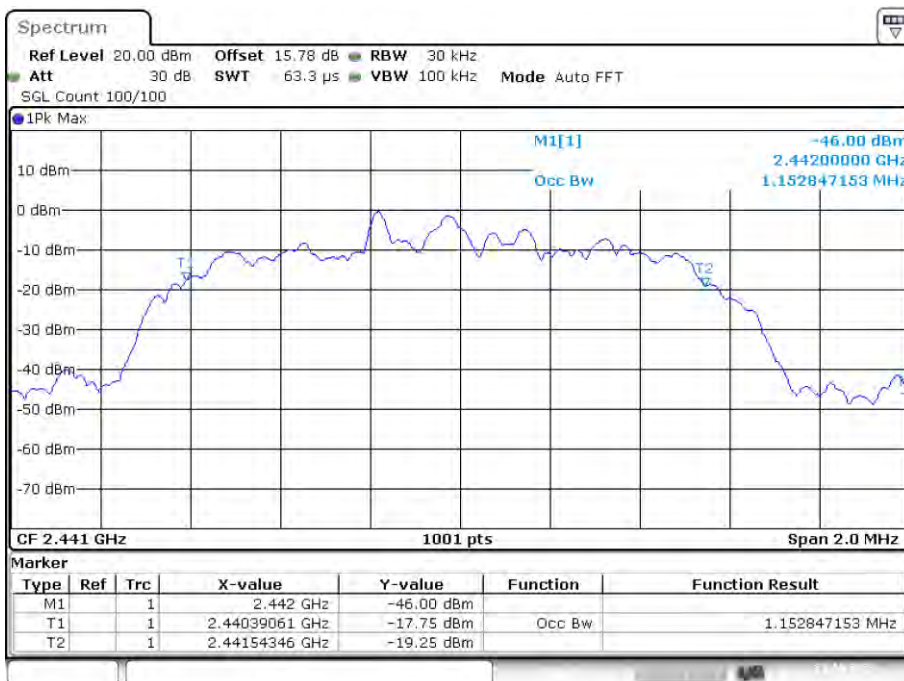


Date: 23.OCT.2023 12:37:43

OBW NVNT 2-DH1 2480MHz Ant1

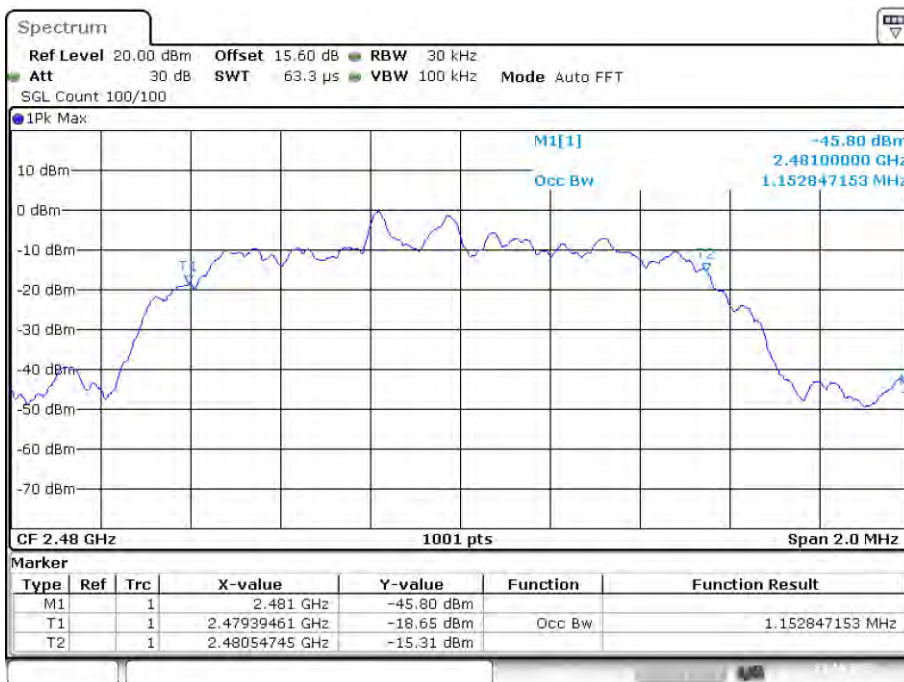


Date: 23.OCT.2023 12:39:00

OBW NVNT 3-DH1 2402MHz Ant1

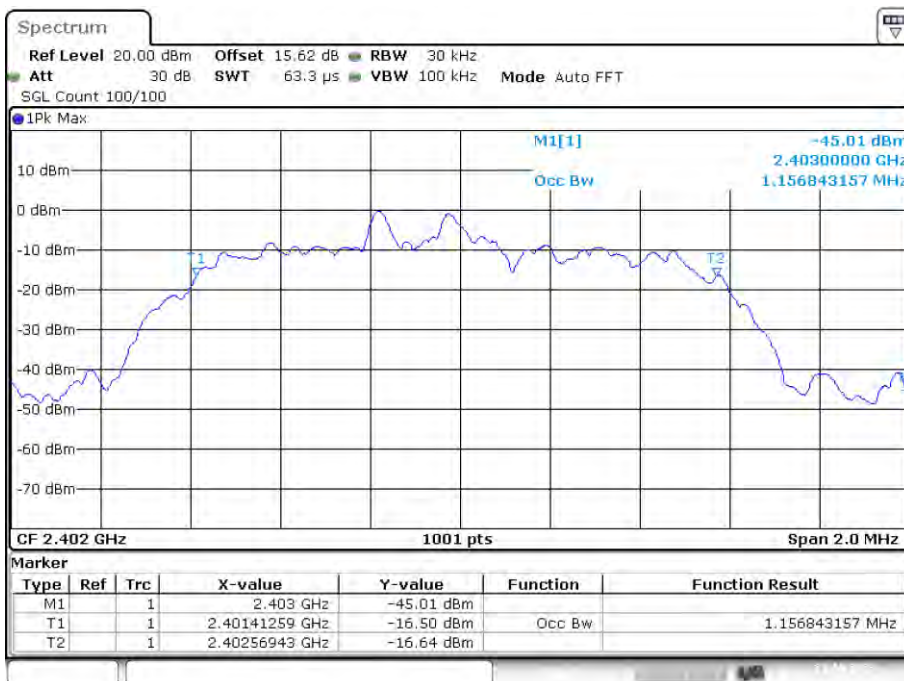


Date: 23.OCT.2023 13:00:01

OBW NVNT 3-DH1 2441MHz Ant1

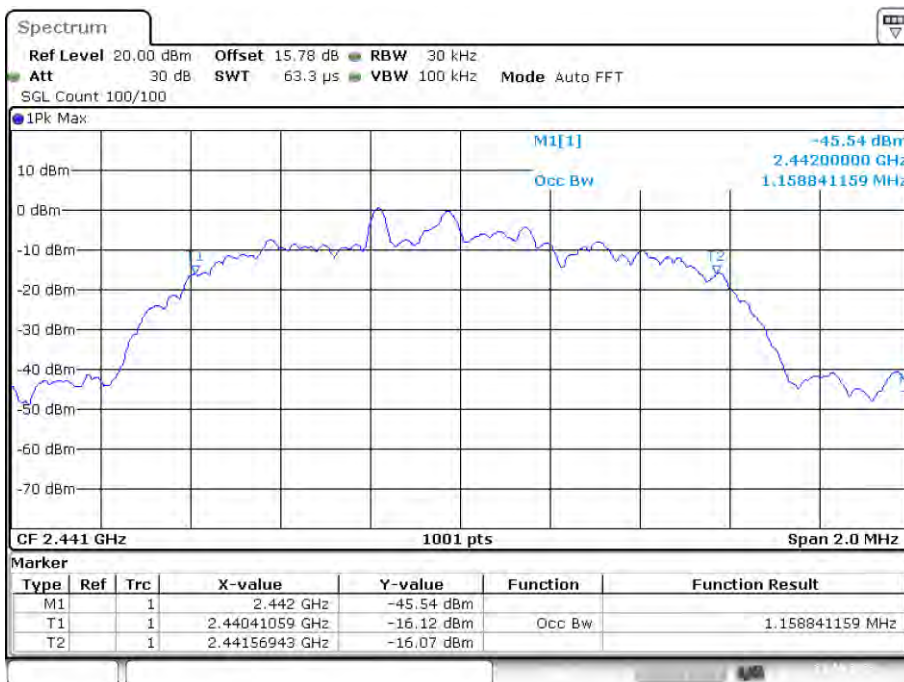

Date: 23.OCT.2023 13:29:11

OBW NVNT 3-DH1 2480MHz Ant1

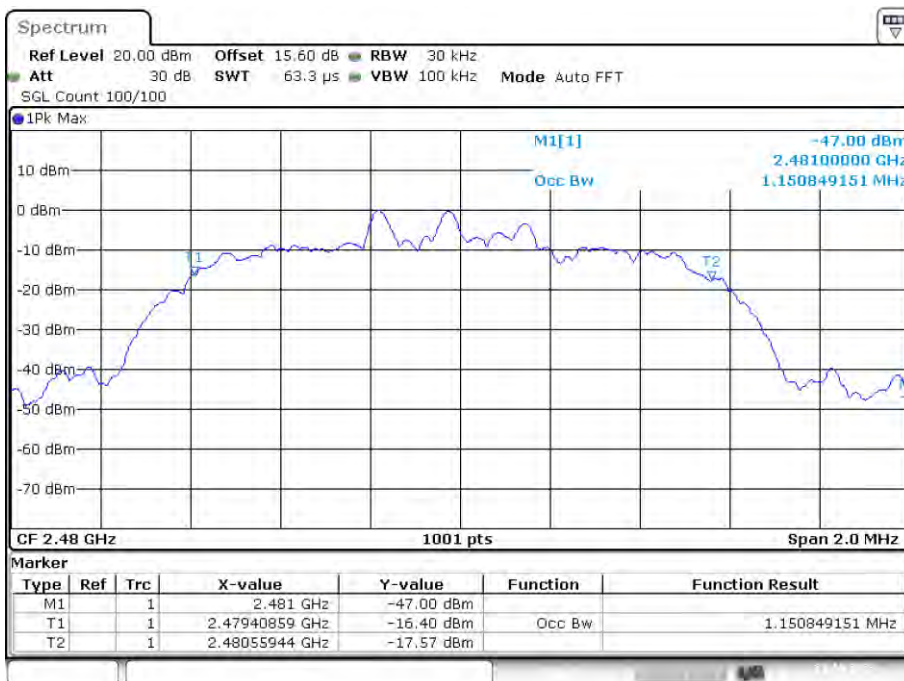

Date: 23.OCT.2023 13:33:20

## 5. CARRIER FREQUENCY SEPARATION

### 5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


### 5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

### 5.3. Test Result


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2440.816	2441.818	1.002	0.926	Pass
NVNT	2-DH1	Ant1	2440.816	2441.818	1.002	0.832	Pass
NVNT	3-DH1	Ant1	2440.818	2441.818	1	0.803	Pass

CFS NVNT 1-DH1 2441MHz Ant1

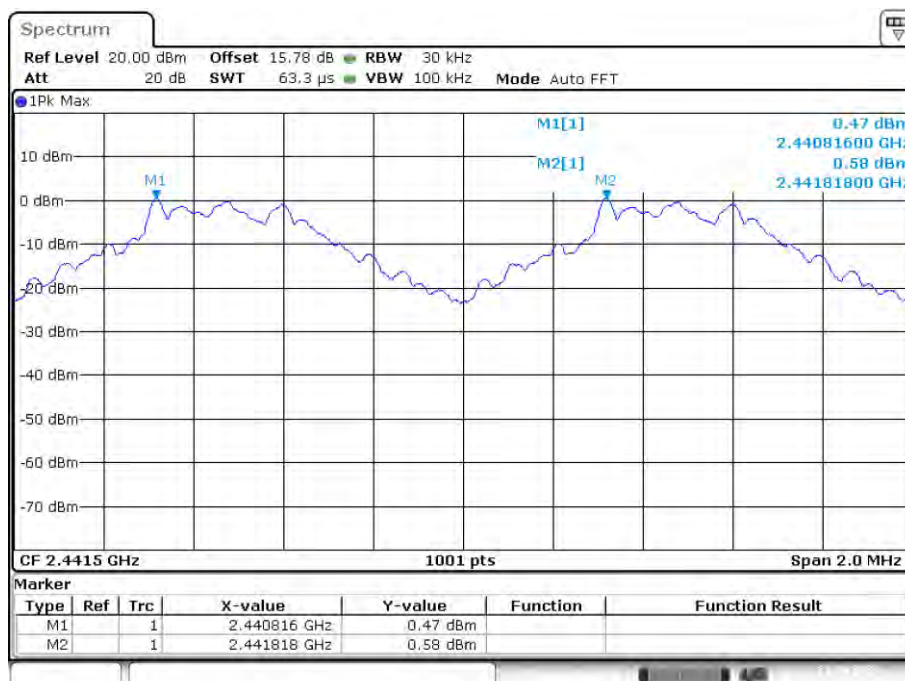


Date: 23.OCT.2023 12:16:47

CFS NVNT 2-DH1 2441MHz Ant1

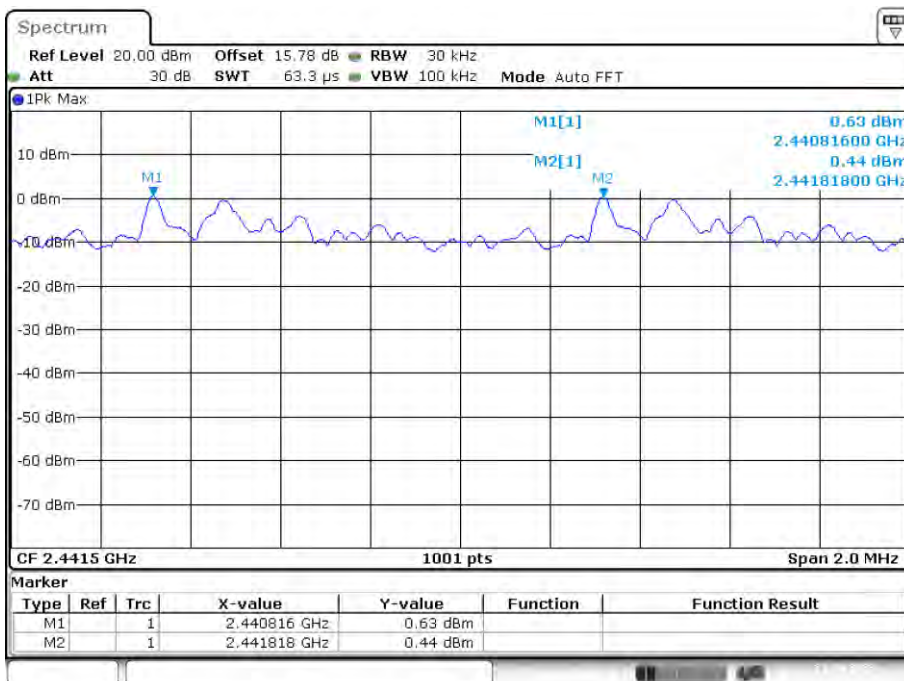

Date: 23.OCT.2023 12:46:01

CFS NVNT 3-DH1 2441MHz Ant1

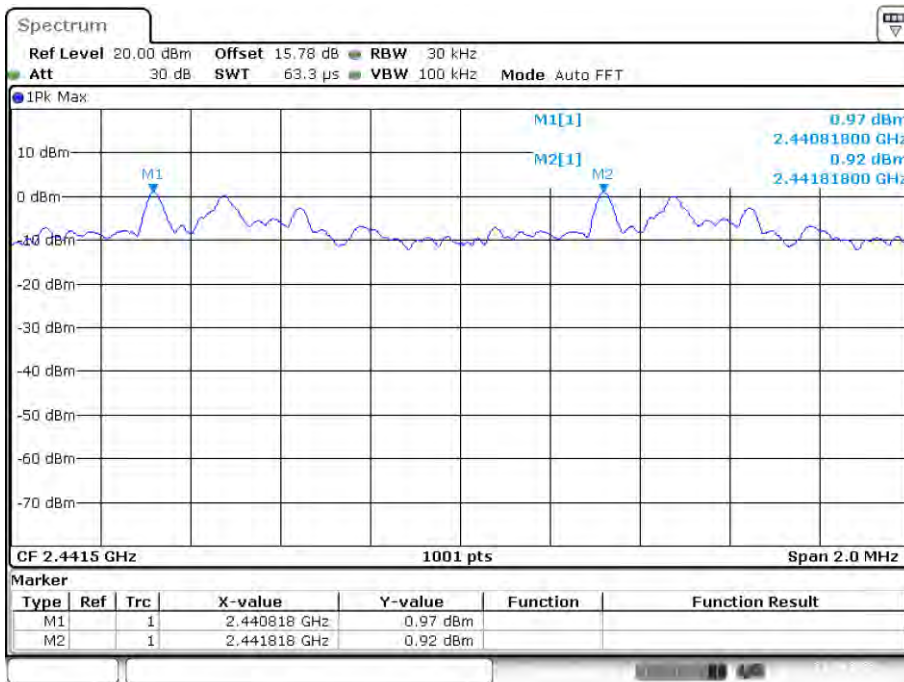

Date: 23.OCT.2023 13:44:06



## 6. NUMBER OF HOPPING CHANNEL

### 6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


### 6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

### 6.3. Test Result


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz Ant1

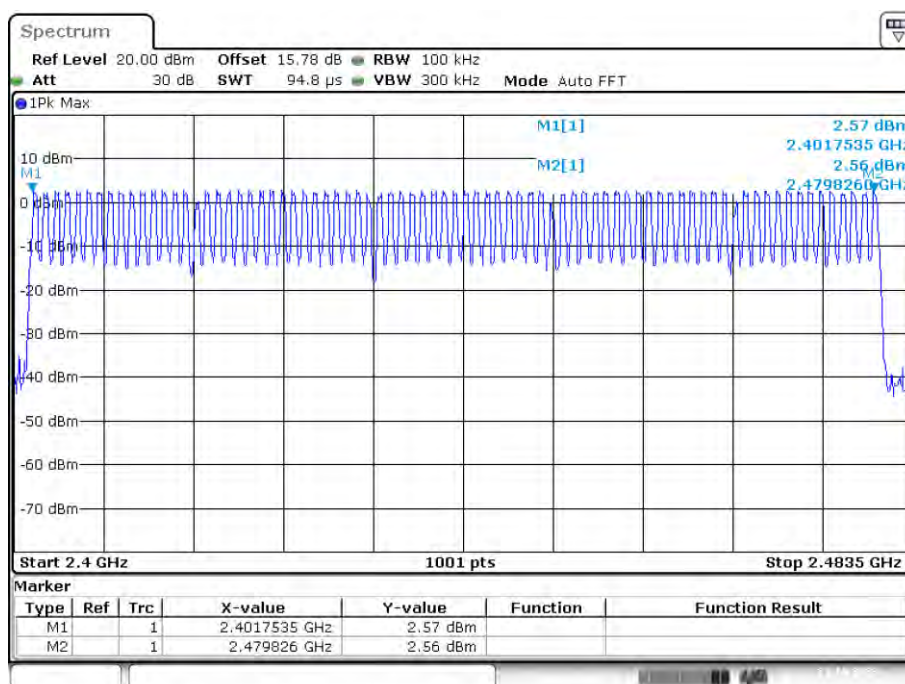


Date: 23.OCT.2023 12:22:32

### Hopping No. NVNT 2-DH1 2441MHz Ant1

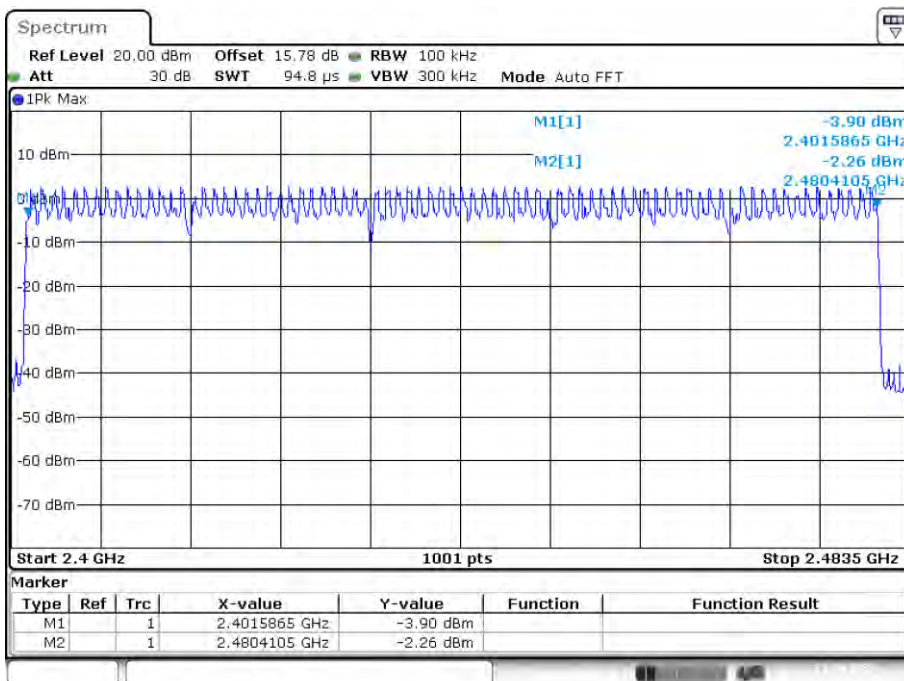

Date: 23.OCT.2023 12:49:33

### Hopping No. NVNT 3-DH1 2441MHz Ant1

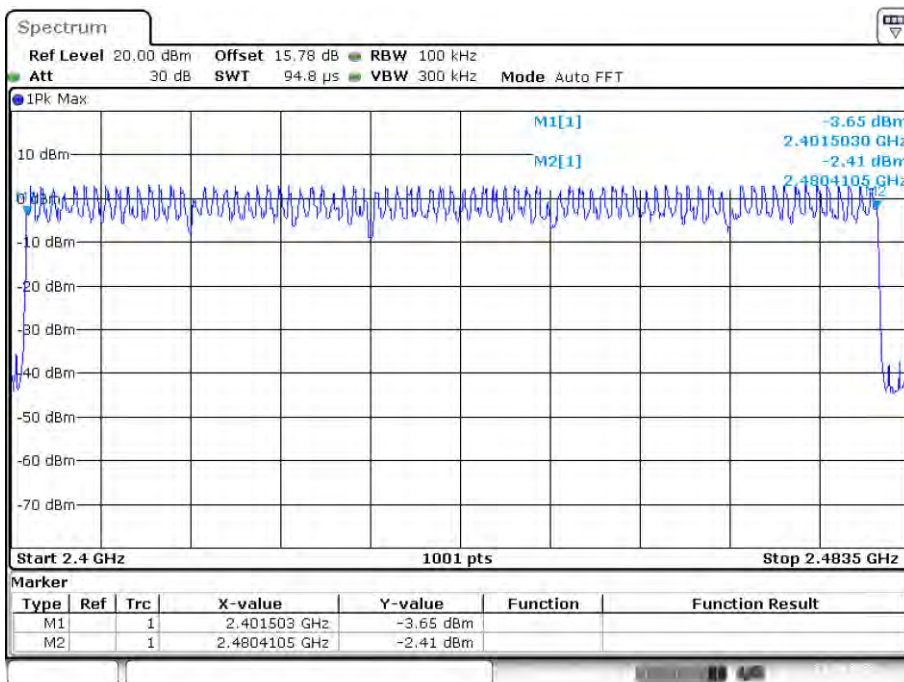

Date: 23.OCT.2023 13:47:42

## 7. DWELL TIME

### 7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

### 7.2. Test Procedure


- 7.2.1. Place the EUT on the table and set it in transmitting mode.
- 7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 7.2.3. Set center frequency of spectrum analyzer = operating frequency.
- 7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 7.2.5. Repeat above procedures until all frequency measured were complete.

### 7.3. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.377	119.509	317	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.632	259.488	159	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.881	290.981	101	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.386	123.134	319	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.637	268.468	164	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.885	300.04	104	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.388	123.384	318	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.636	263.396	161	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.887	268.491	93	31600	400	Pass


Note: Total Dwell Time= Pulse Time\* Burst Count

### Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

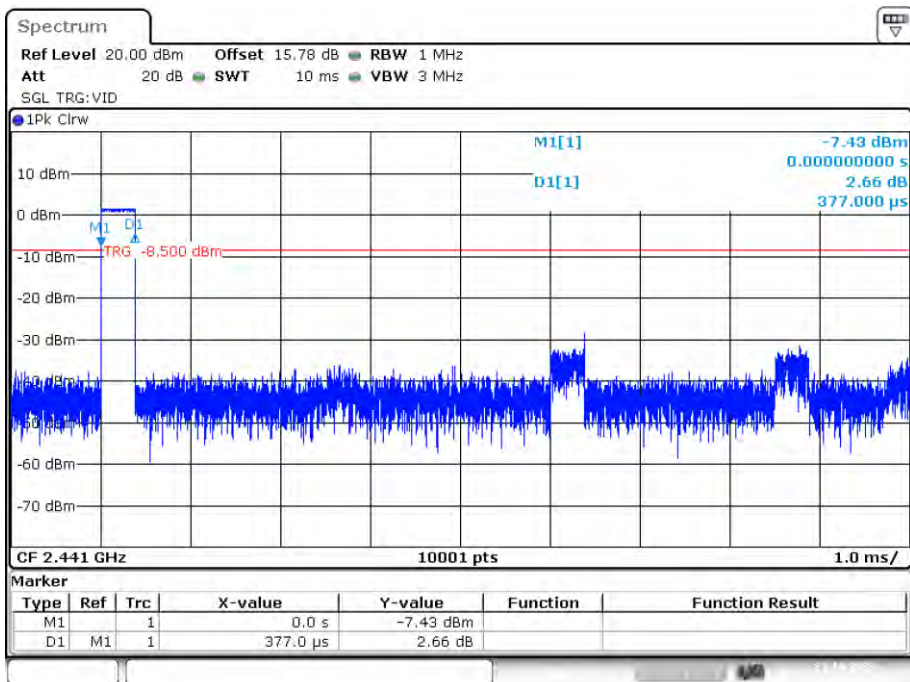


Date: 23.OCT.2023 12:22:42

### Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

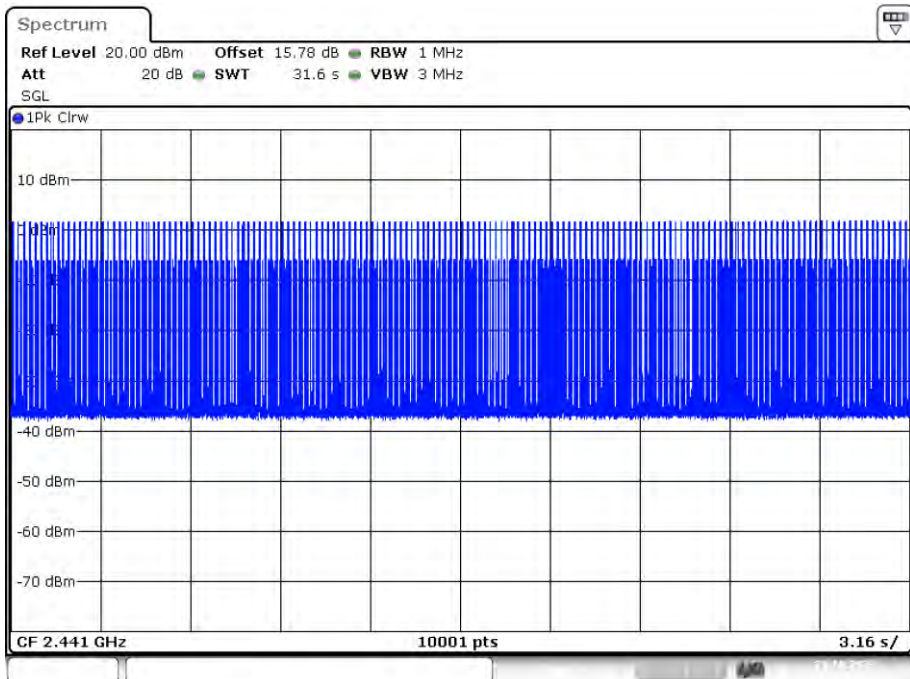


Date: 23.OCT.2023 12:23:16


### Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

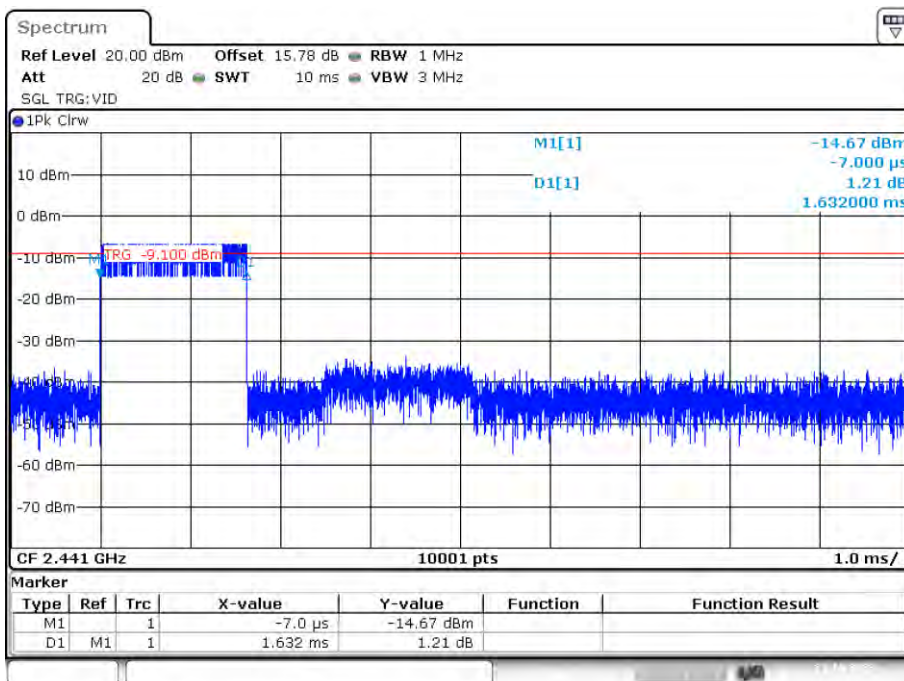

### Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

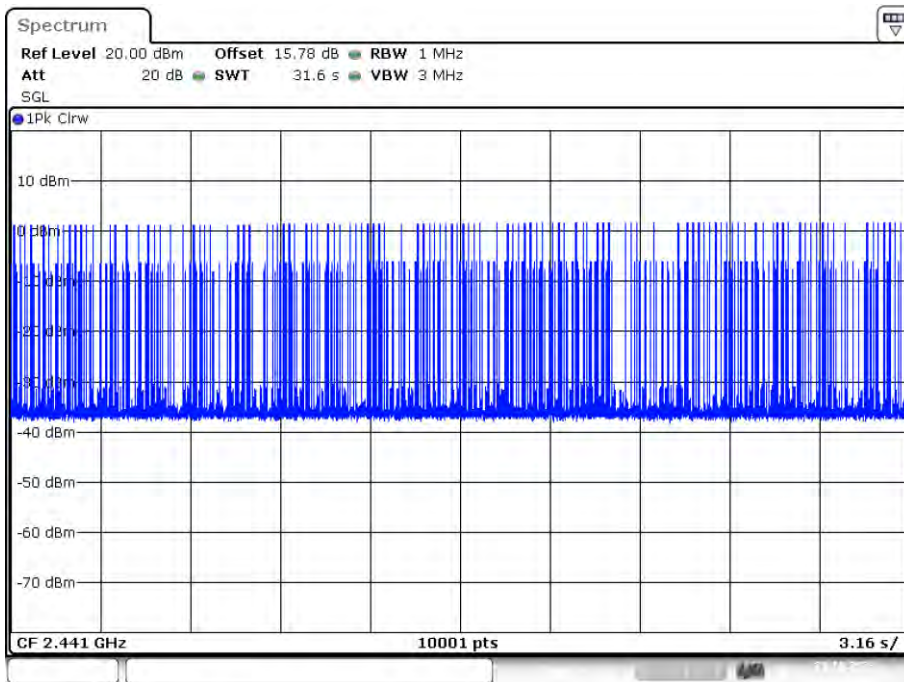


### Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

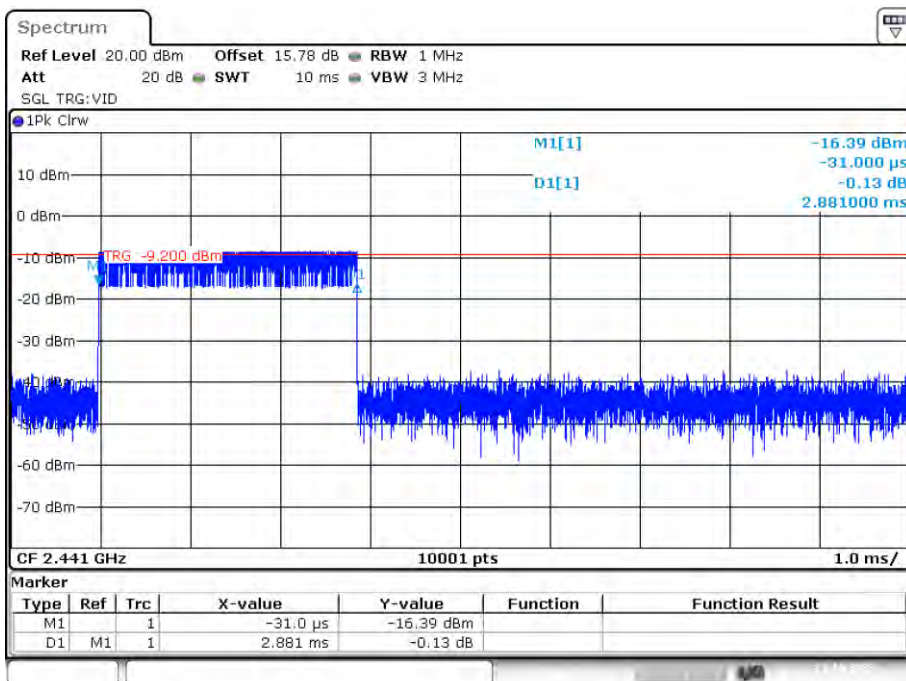


Date: 23.OCT.2023 12:33:03

### Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

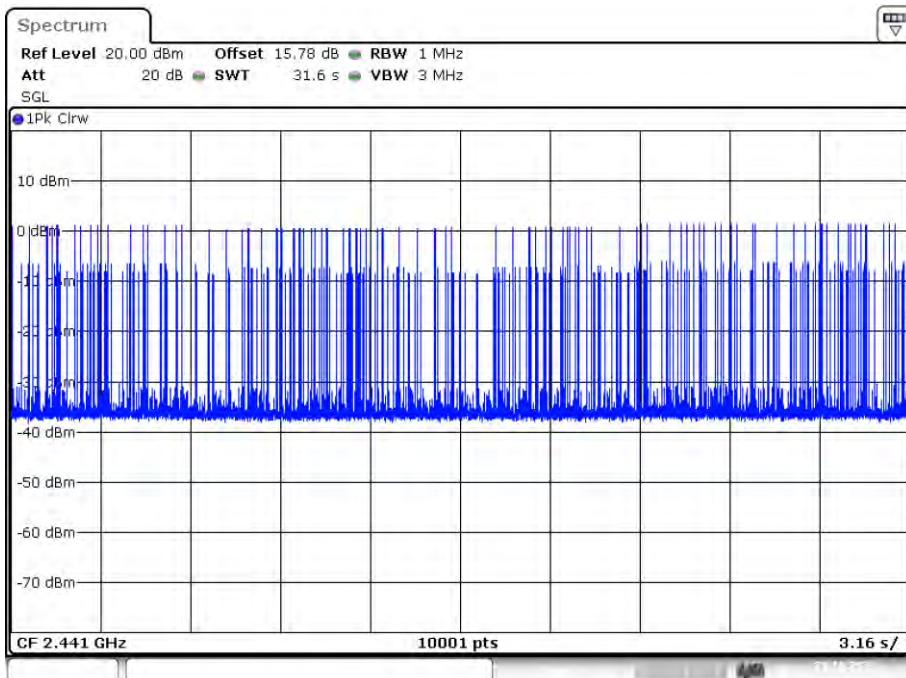


Date: 23.OCT.2023 12:33:38

### Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

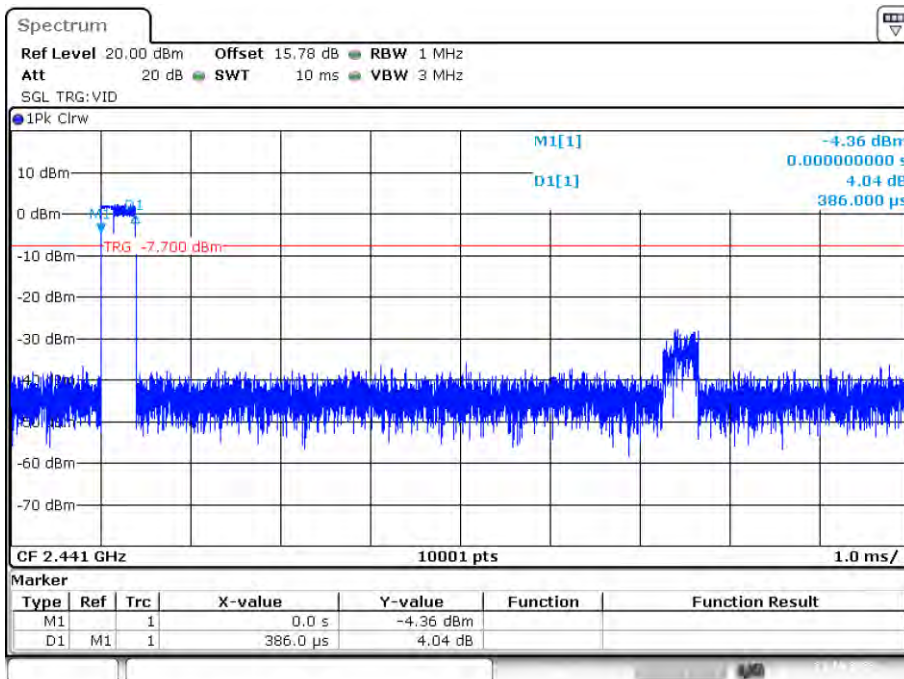


Date: 23.OCT.2023 12:54:04

### Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

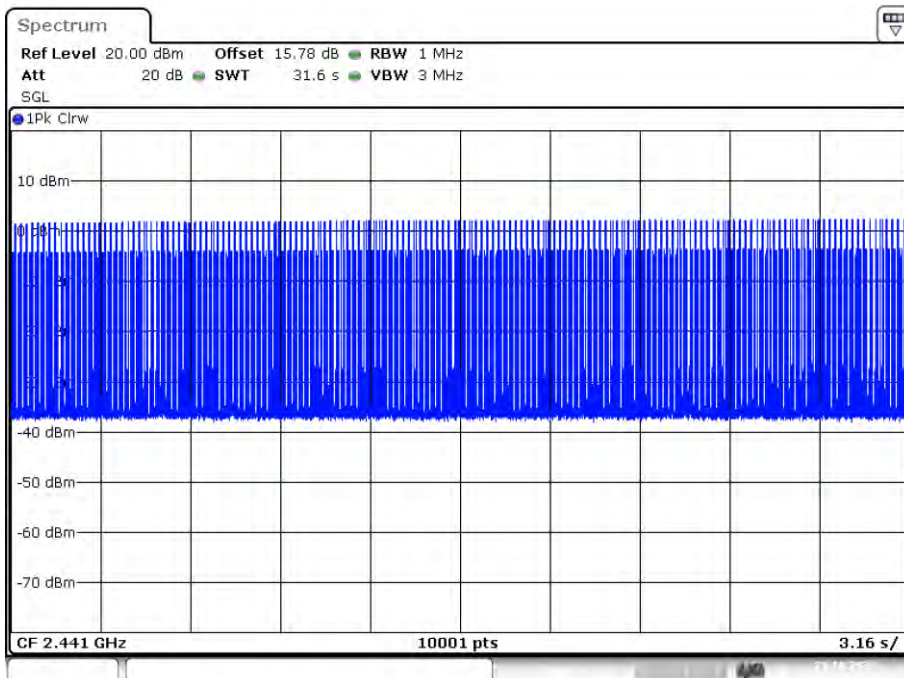


Date: 23.OCT.2023 12:54:38

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

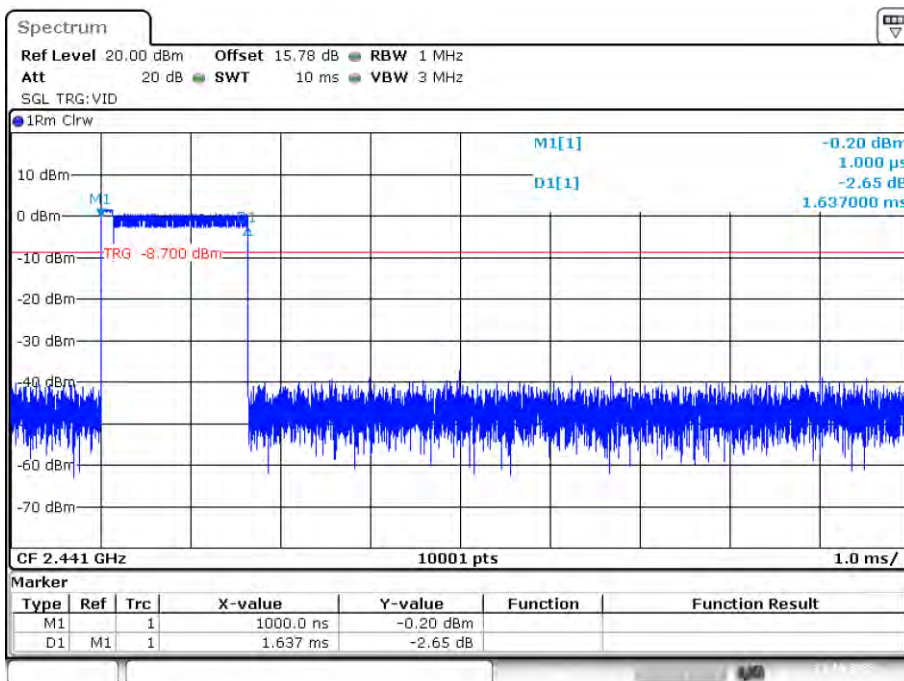

Date: 23.OCT.2023 12:56:06


Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

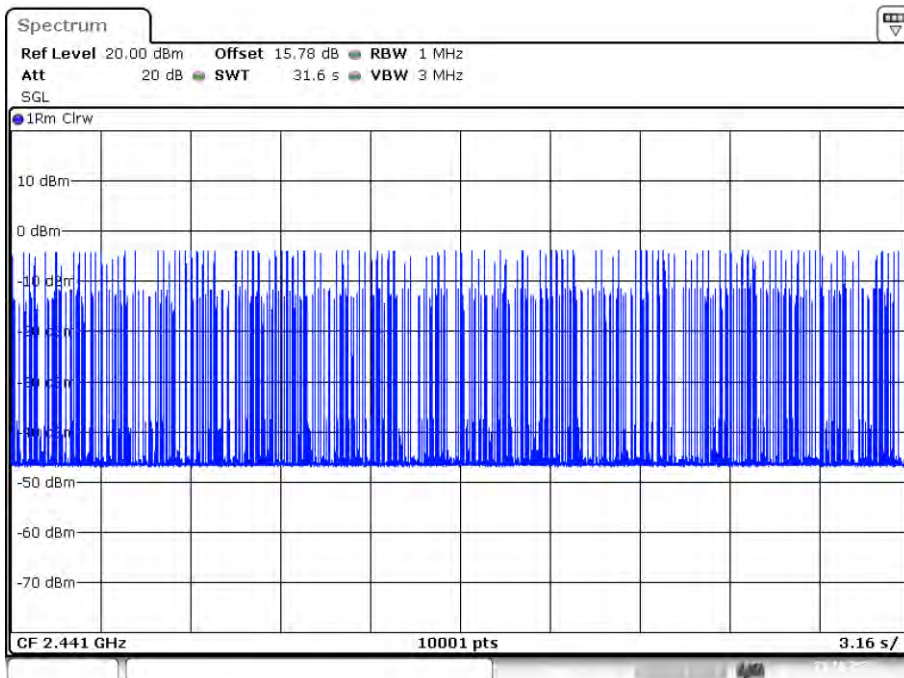

Date: 23.OCT.2023 12:56:41




### Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

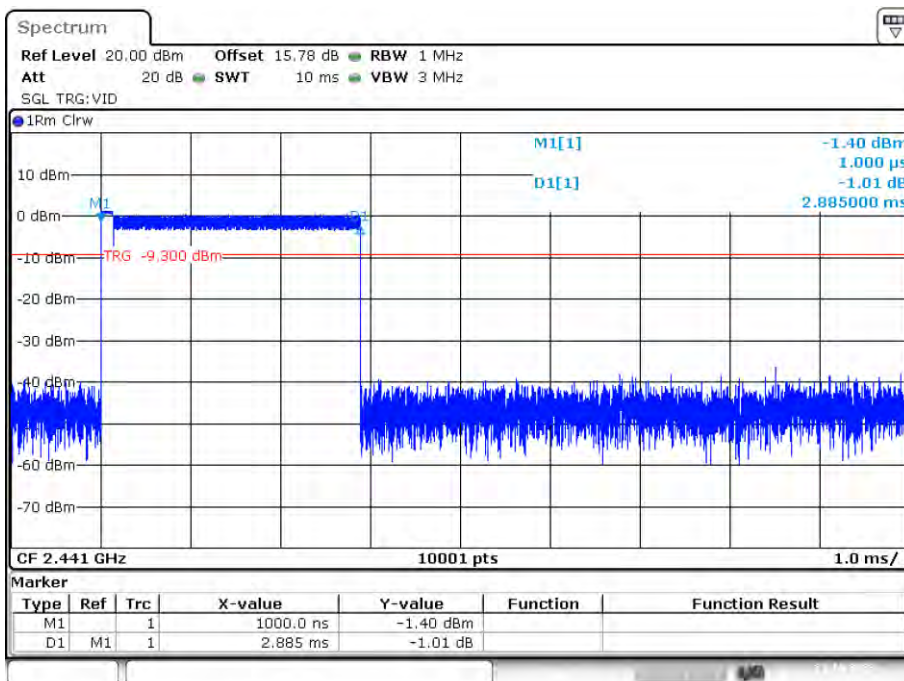


Date: 23.OCT.2023 12:57:28

### Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

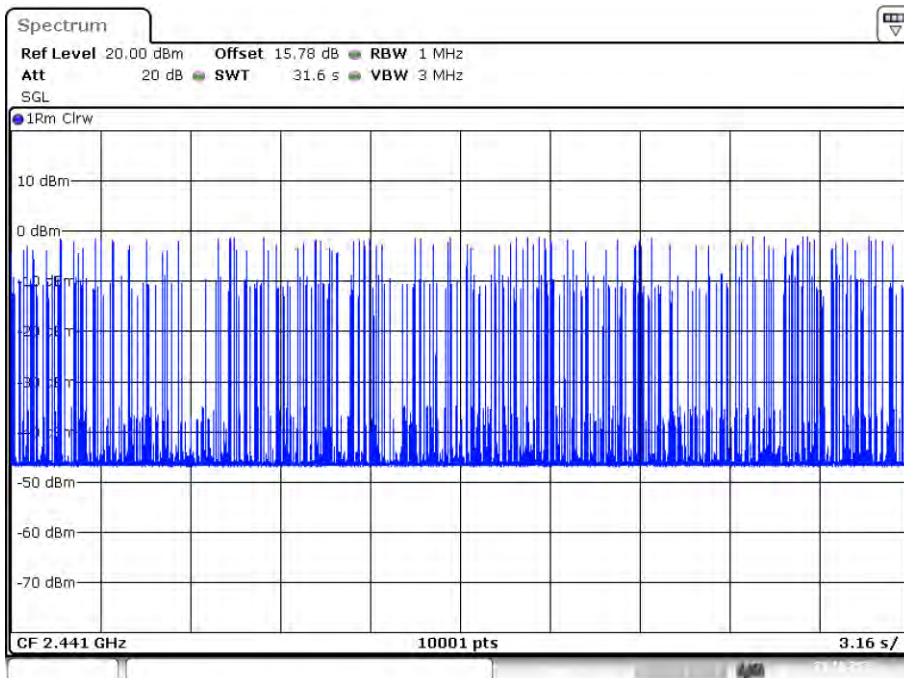


Date: 23.OCT.2023 12:58:02

### Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

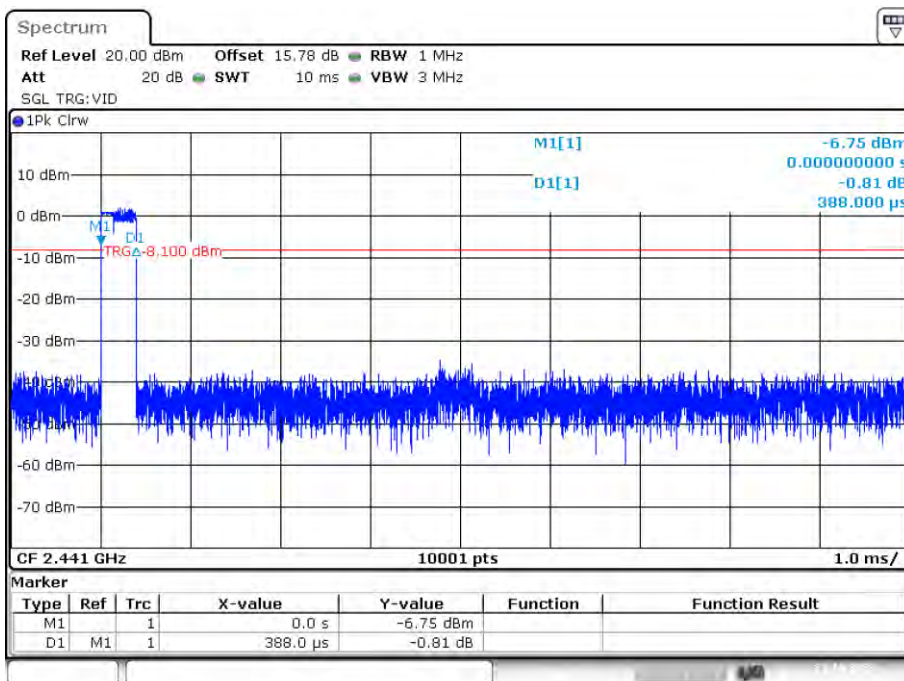


Date: 23.OCT.2023 13:51:11

### Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

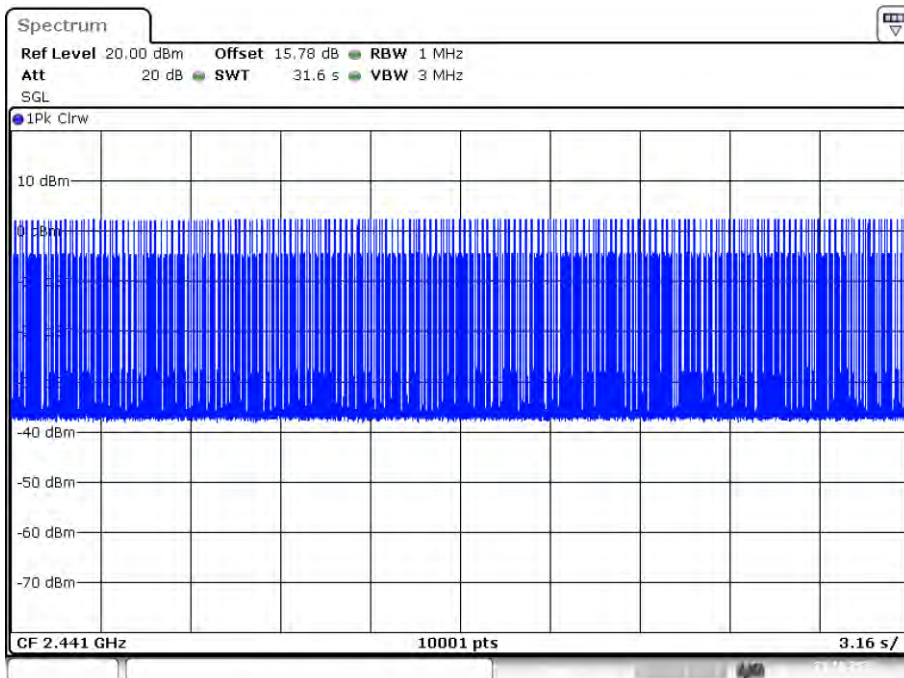


Date: 23.OCT.2023 13:51:45

### Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

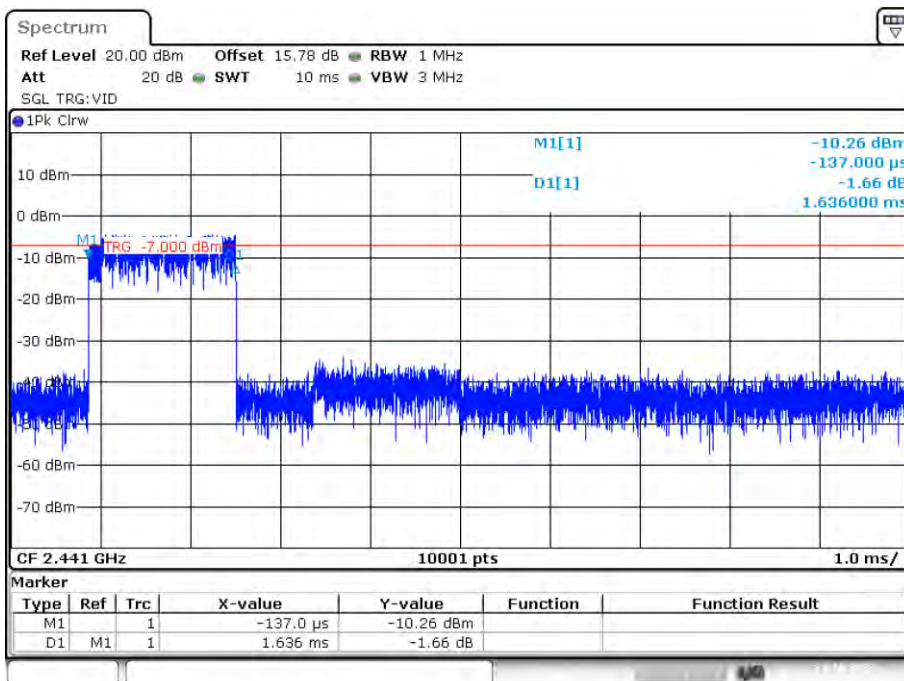


Date: 24.OCT.2023 04:35:33

### Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

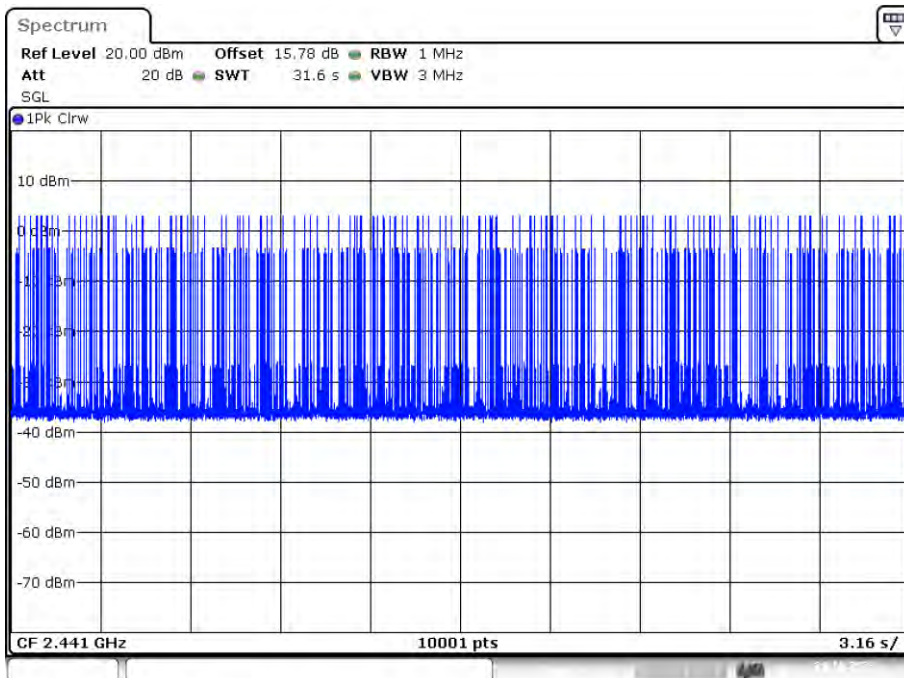


Date: 24.OCT.2023 04:36:09

### Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

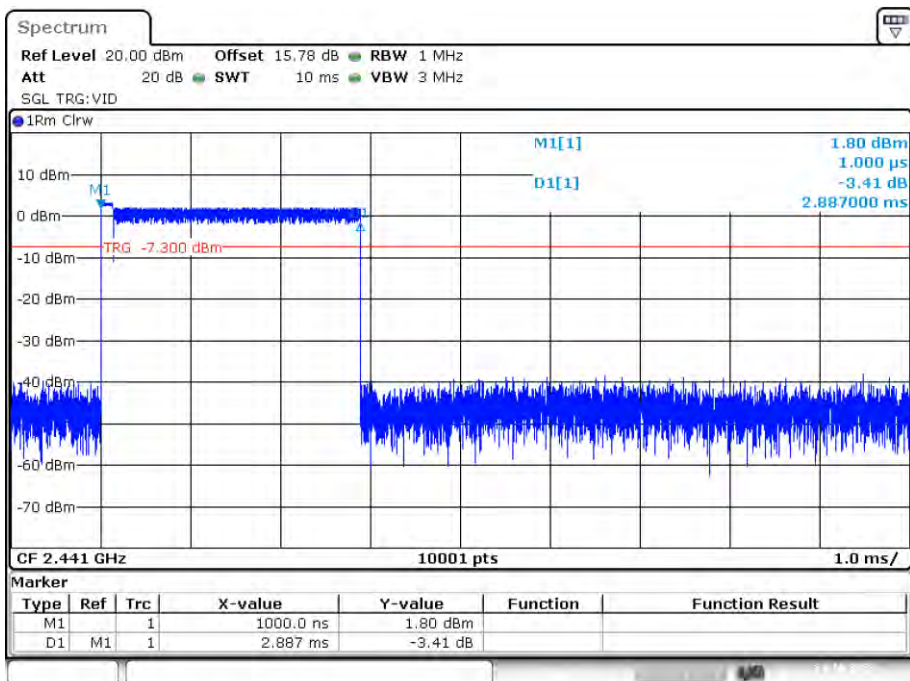

Date: 24.OCT.2023 04:36:37

### Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

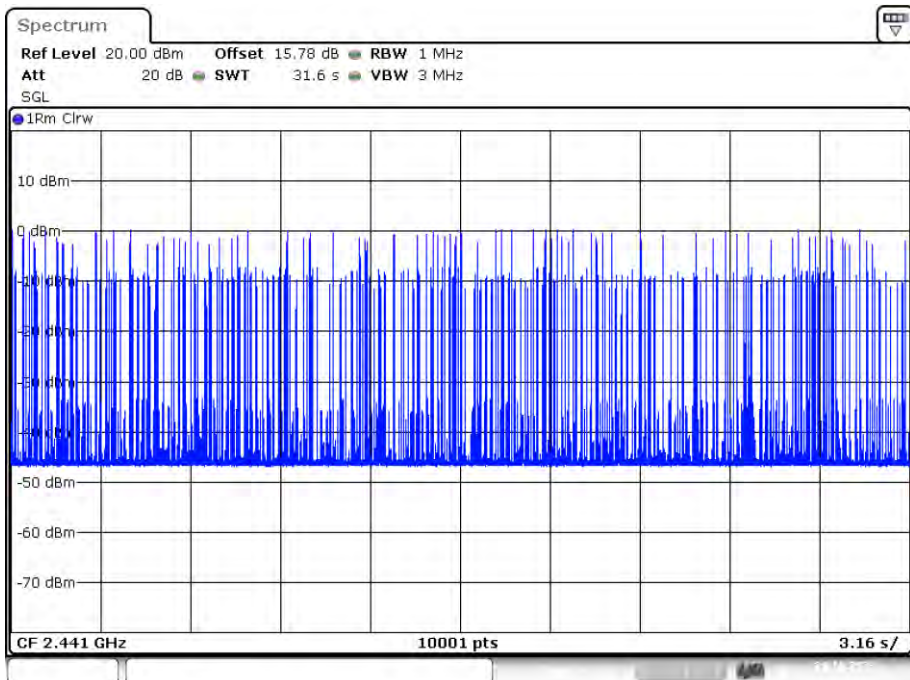

Date: 24.OCT.2023 04:37:12

## 8. RADIATED EMISSIONS

### 8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### 15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB( $\mu\text{V}$ )/m (Peak) 54.0 dB( $\mu\text{V}$ )/m (Average)	

## 8.2. Block Diagram of Test setup


### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

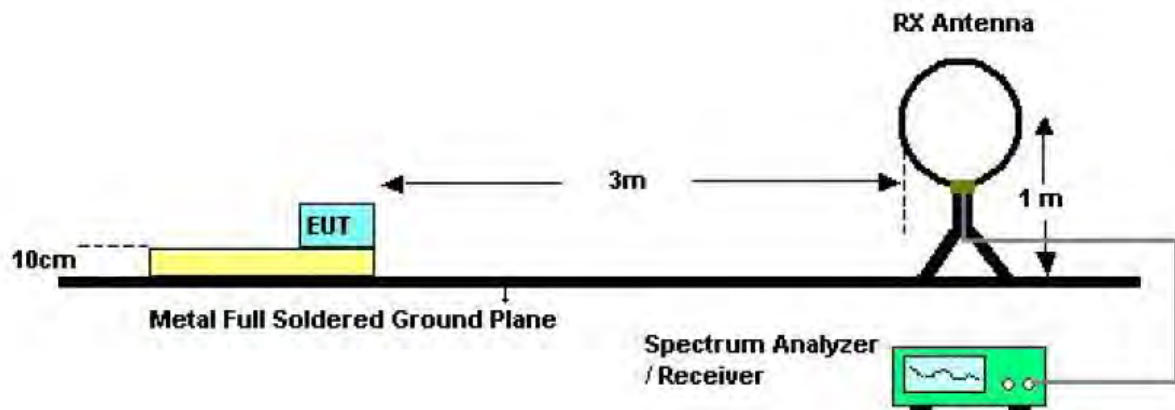

### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

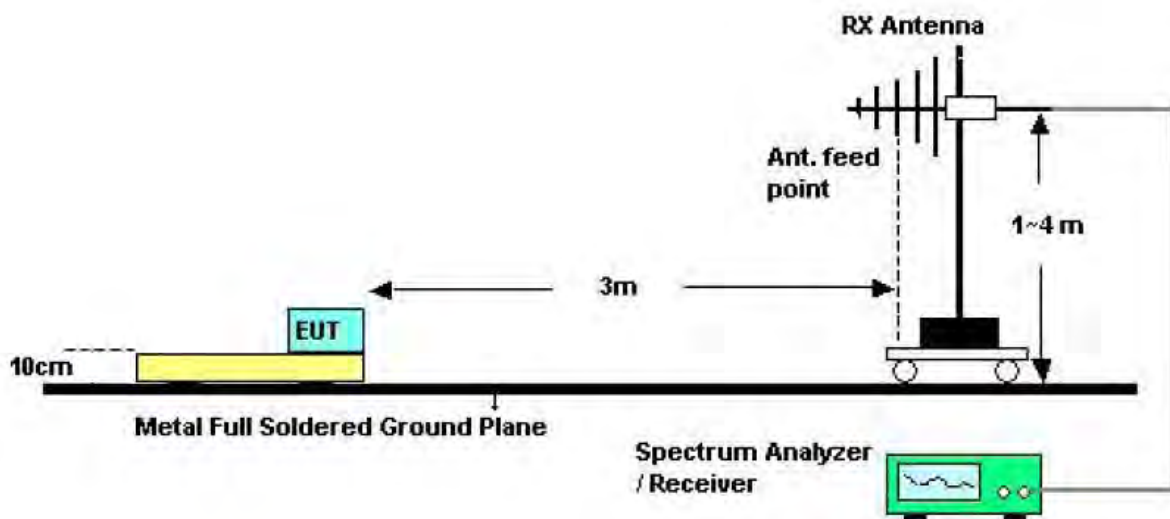

### 8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

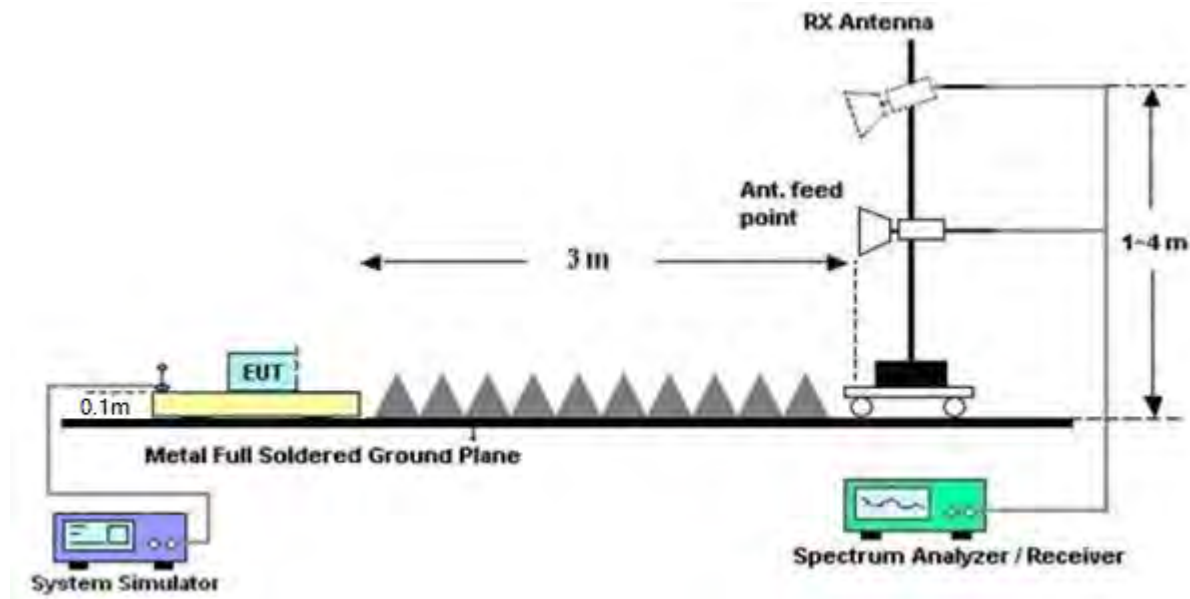

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

### 8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 10 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

#### 8.4. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.  
Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

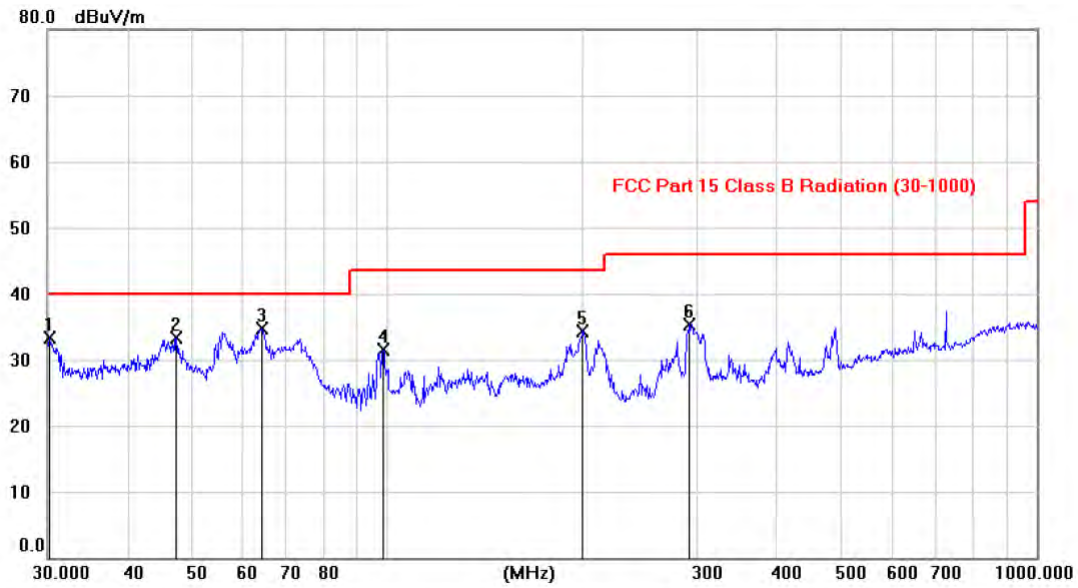


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		30.2393	19.72	13.53	33.25	40.00	-6.75	peak		
2		47.4307	19.16	14.07	33.23	40.00	-6.77	peak		
3	*	64.2600	22.28	12.42	34.70	40.00	-5.30	peak		
4		98.5671	20.70	10.78	31.48	43.50	-12.02	peak		
5		200.6410	23.30	10.91	34.21	43.50	-9.29	peak		
6		292.9128	21.39	13.94	35.33	46.00	-10.67	peak		

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal:

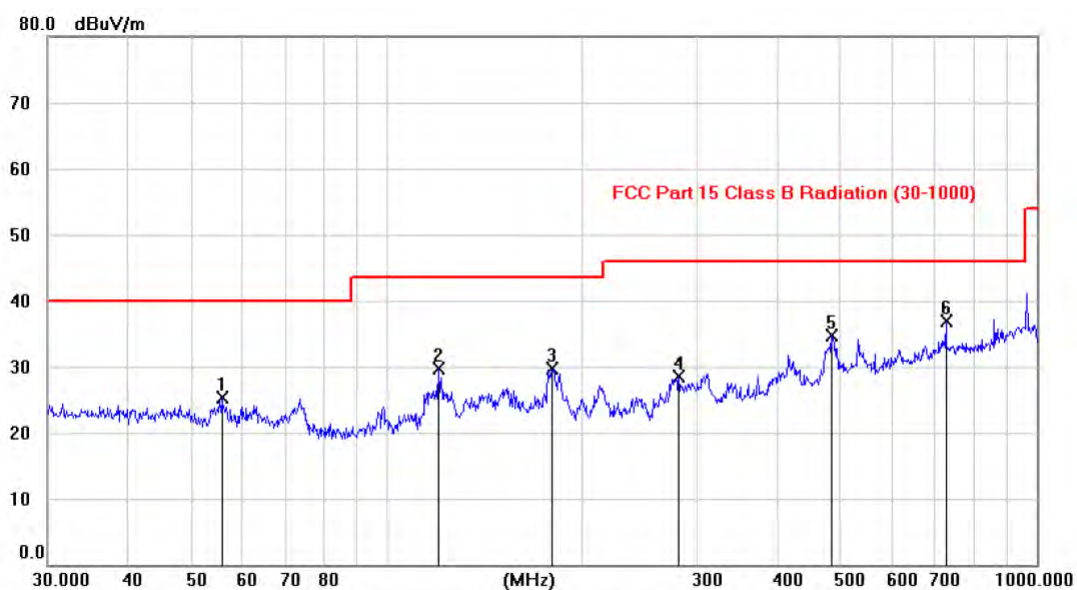

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	55.7004	11.71	13.57	25.28	40.00	-14.72	peak	
2	120.0098	16.62	13.04	29.66	43.50	-13.84	peak	
3	179.9744	17.11	12.68	29.79	43.50	-13.71	peak	
4	281.0731	14.98	13.60	28.58	46.00	-17.42	peak	
5	482.9488	16.63	17.99	34.62	46.00	-11.38	peak	
6 *	724.5151	14.89	22.07	36.96	46.00	-9.04	peak	

Note:1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

From 1G-25GHz


Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	46.80	V	33.95	10.18	34.26	56.67	74	-17.33	PK
4804	38.50	V	33.95	10.18	34.26	48.37	54	-5.63	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	43.43	H	33.95	10.18	34.26	53.30	74	-20.70	PK
4804	36.97	H	33.95	10.18	34.26	46.84	54	-7.16	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	42.25	V	33.93	10.2	34.29	52.09	74	-21.91	PK
4882	35.73	V	33.93	10.2	34.29	45.57	54	-8.43	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	43.90	H	33.93	10.2	34.29	53.74	74	-20.26	PK
4882	33.06	H	33.93	10.2	34.29	42.90	54	-11.10	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	45.92	V	33.98	10.22	34.25	55.87	74	-18.13	PK
4960	34.57	V	33.98	10.22	34.25	44.52	54	-9.48	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	43.68	H	33.98	10.22	34.25	53.63	74	-20.37	PK
4960	31.86	H	33.98	10.22	34.25	41.81	54	-12.19	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Test Mode: $\pi/4$ DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.52	V	33.95	10.18	34.26	57.39	74	-16.61	PK
4804	37.84	V	33.95	10.18	34.26	47.71	54	-6.29	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	43.80	H	33.95	10.18	34.26	53.67	74	-20.33	PK
4804	33.53	H	33.95	10.18	34.26	43.40	54	-10.60	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX Mid									
4882	42.52	V	33.93	10.2	34.29	52.36	74	-21.64	PK
4882	35.28	V	33.93	10.2	34.29	45.12	54	-8.88	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	42.97	H	33.93	10.2	34.29	52.81	74	-21.19	PK
4882	35.47	H	33.93	10.2	34.29	45.31	54	-8.69	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: $\pi/4$ DQPSK TX High									
4960	43.82	V	33.98	10.22	34.25	53.77	74	-20.23	PK
4960	34.55	V	33.98	10.22	34.25	44.50	54	-9.50	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	45.06	H	33.98	10.22	34.25	55.01	74	-18.99	PK
4960	33.61	H	33.98	10.22	34.25	43.56	54	-10.44	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Test Mode: 8DPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.59	V	33.95	10.18	34.26	57.46	74	-16.54	PK
4804	37.26	V	33.95	10.18	34.26	47.13	54	-6.87	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	44.80	H	33.95	10.18	34.26	54.67	74	-19.33	PK
4804	36.78	H	33.95	10.18	34.26	46.65	54	-7.35	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: 8DPSK TX Mid									
4882	43.32	V	33.93	10.2	34.29	53.16	74	-20.84	PK
4882	33.29	V	33.93	10.2	34.29	43.13	54	-10.87	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	44.52	H	33.93	10.2	34.29	54.36	74	-19.64	PK
4882	35.45	H	33.93	10.2	34.29	45.29	54	-8.71	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: 8DPSK TX High									
4960	46.38	V	33.98	10.22	34.25	56.33	74	-17.67	PK
4960	34.22	V	33.98	10.22	34.25	44.17	54	-9.83	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.40	H	33.98	10.22	34.25	52.35	74	-21.65	PK
4960	35.12	H	33.98	10.22	34.25	45.07	54	-8.93	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


Conducted RF Spurious Emission

Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

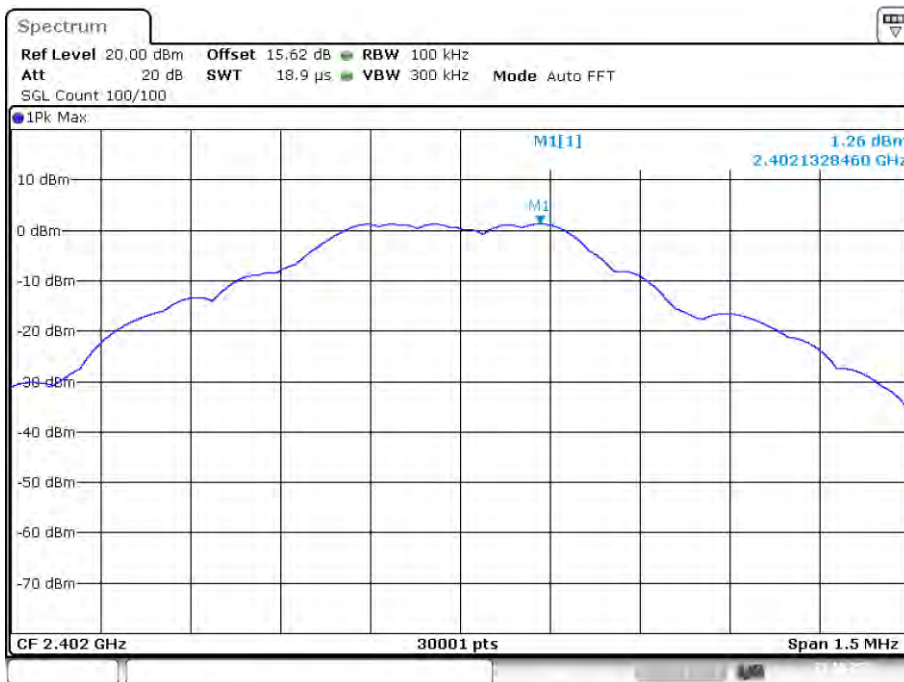


Date: 23.OCT.2023 12:06:31

Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

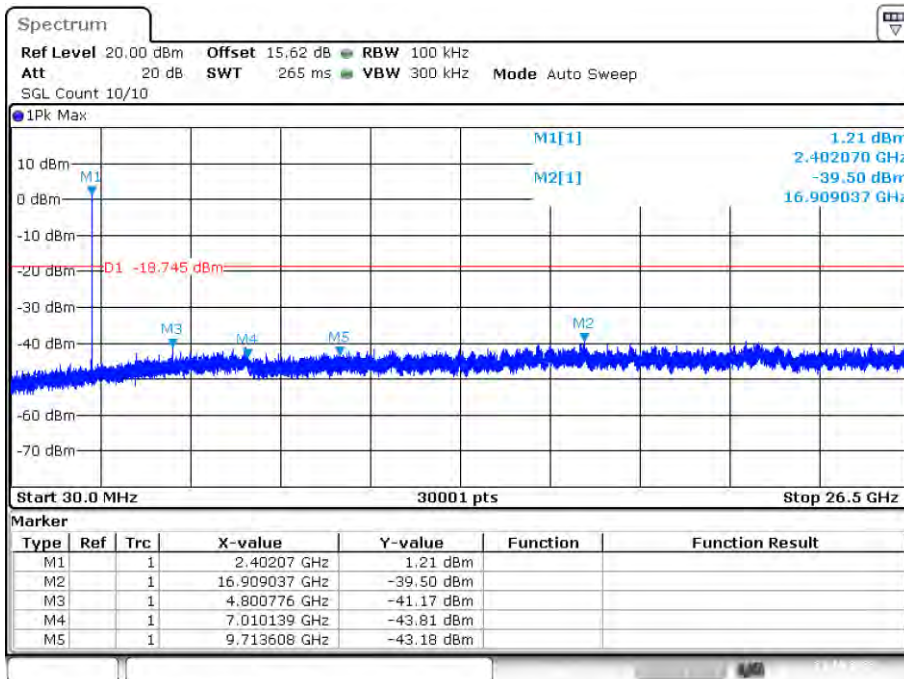


Date: 23.OCT.2023 12:06:44

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

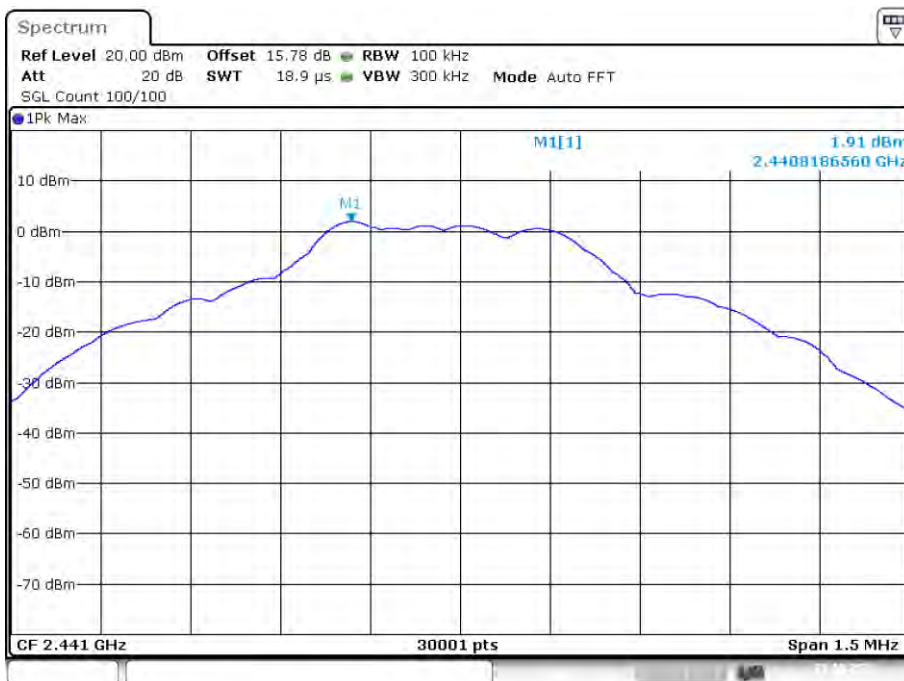


Date: 23.OCT.2023 12:09:13

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

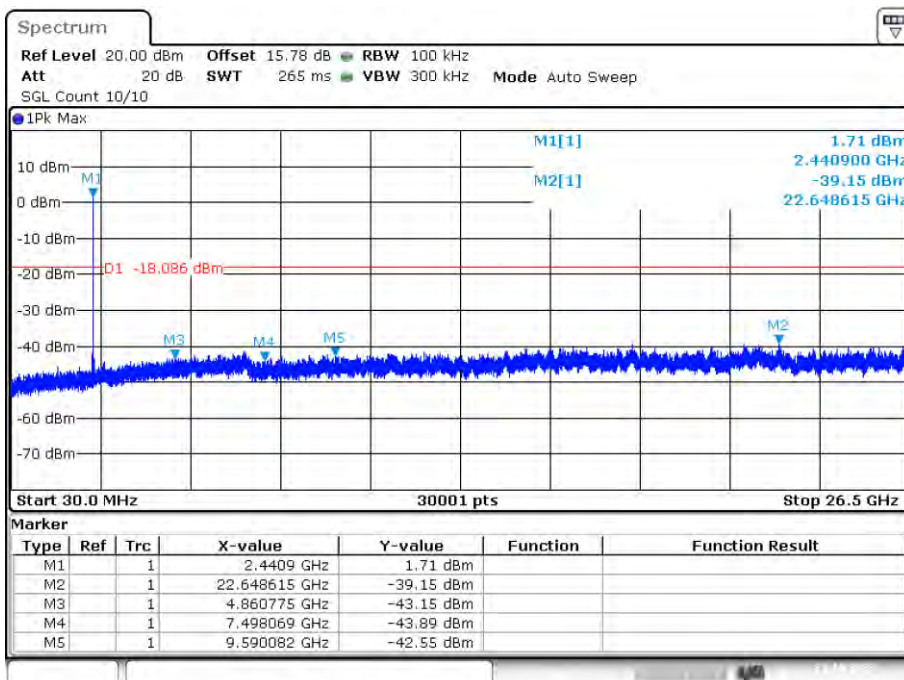


Date: 23.OCT.2023 12:09:27

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref

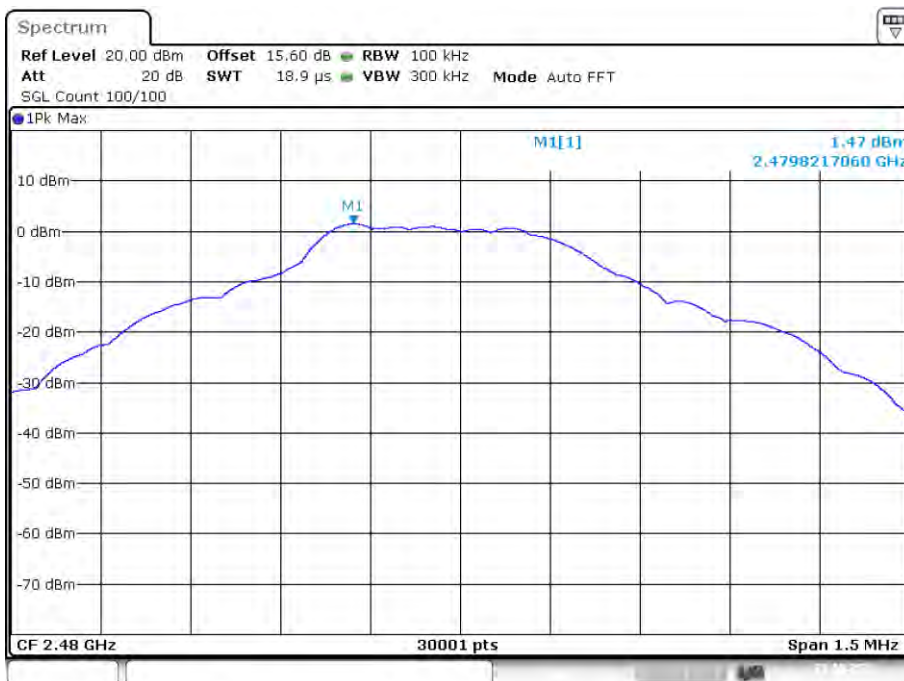

Date: 23.OCT.2023 12:10:57


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

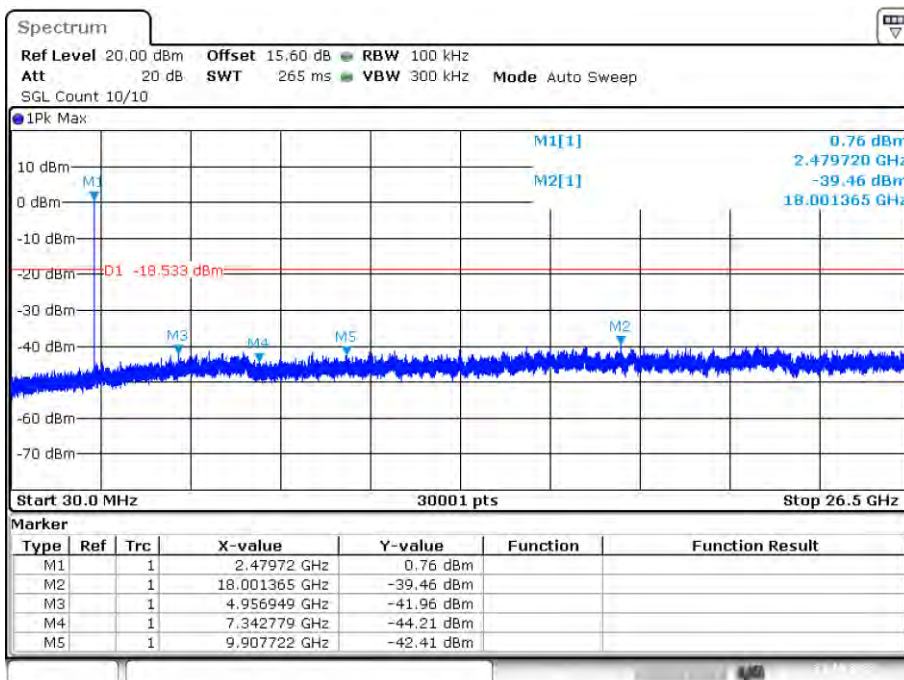

Date: 23.OCT.2023 12:11:11




Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Ref

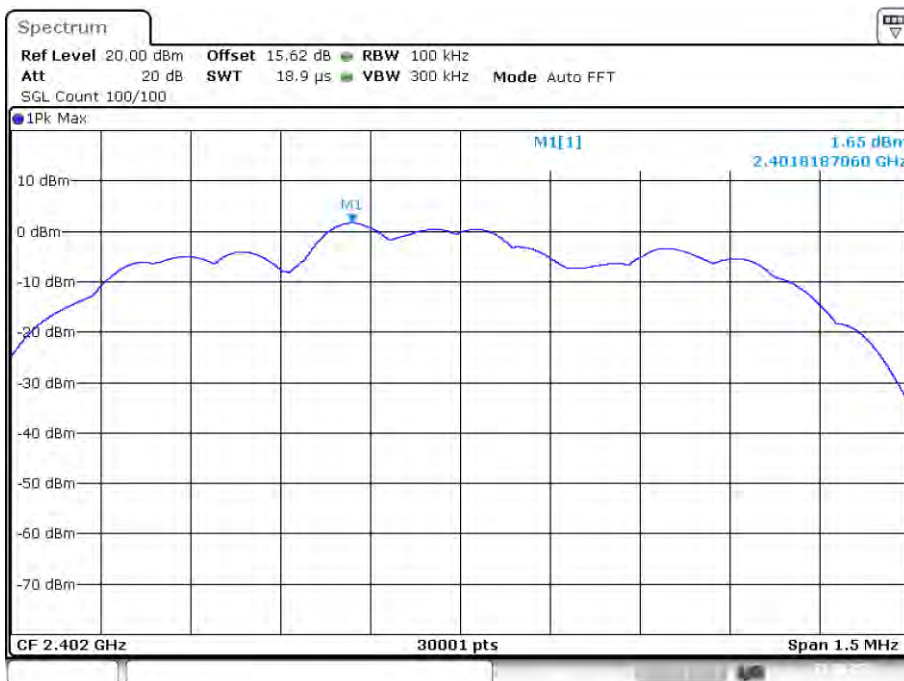


Date: 23.OCT.2023 12:35:23

Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

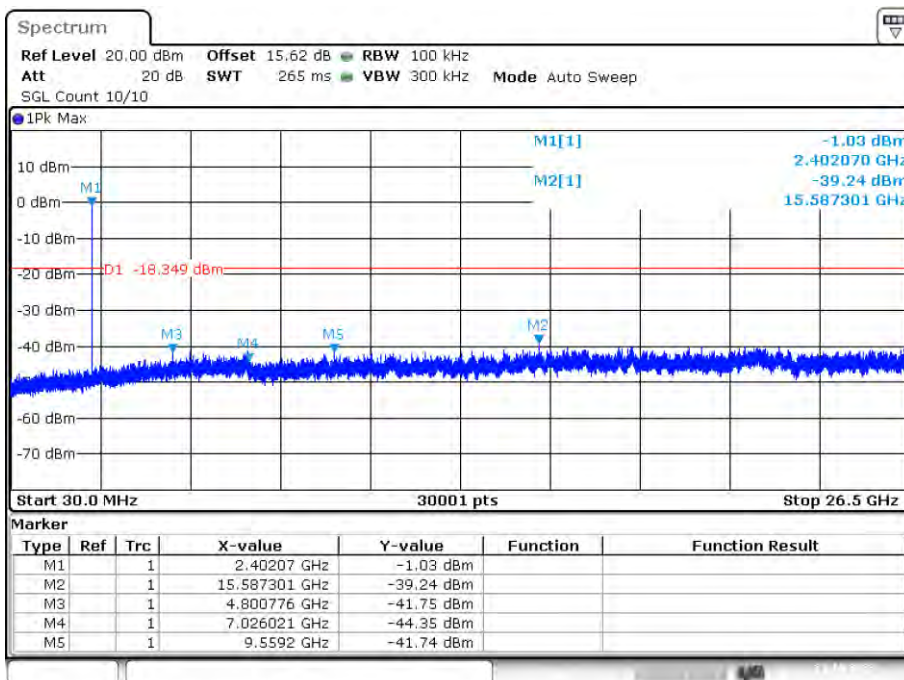


Date: 23.OCT.2023 12:35:36

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref

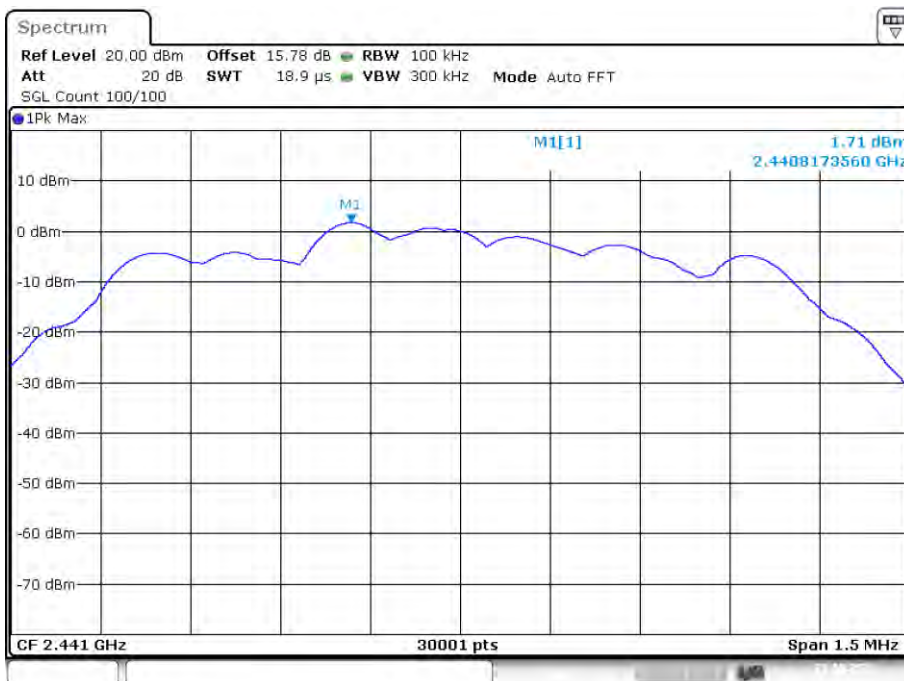


Date: 23.OCT.2023 12:38:06

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

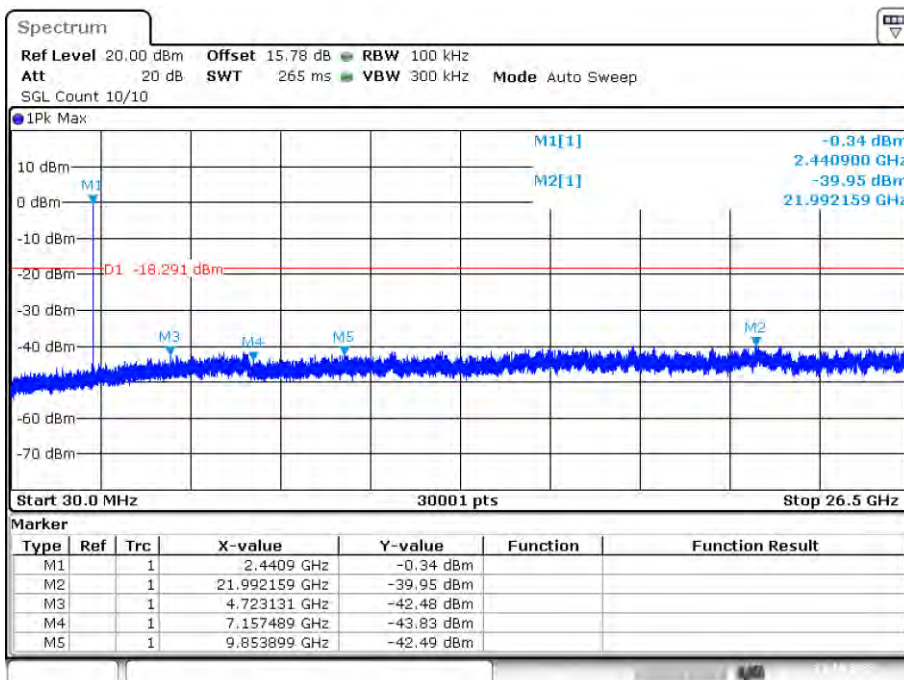


Date: 23.OCT.2023 12:38:20

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref

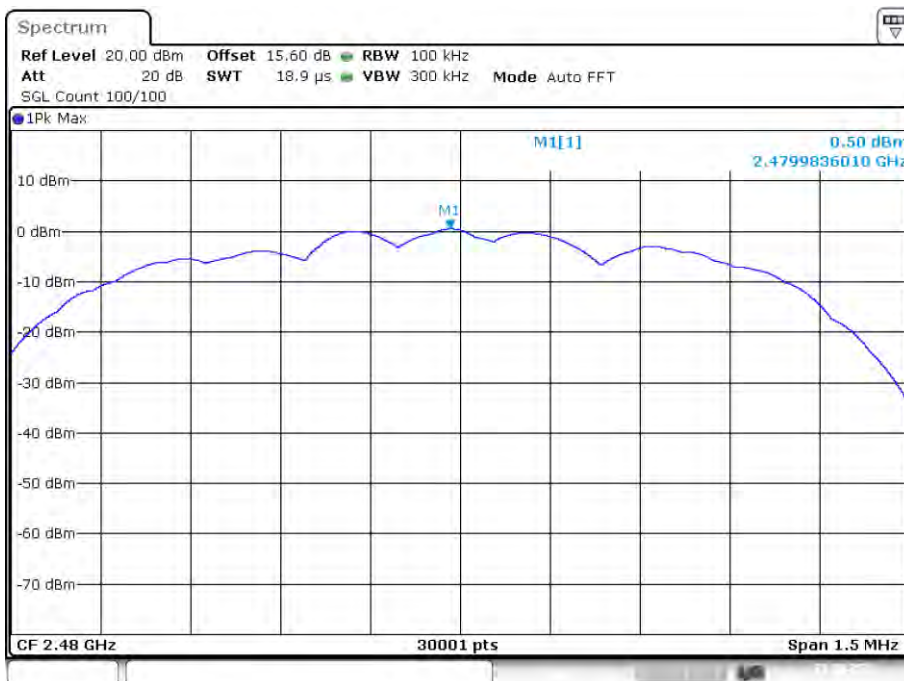


Date: 23.OCT.2023 12:39:41

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

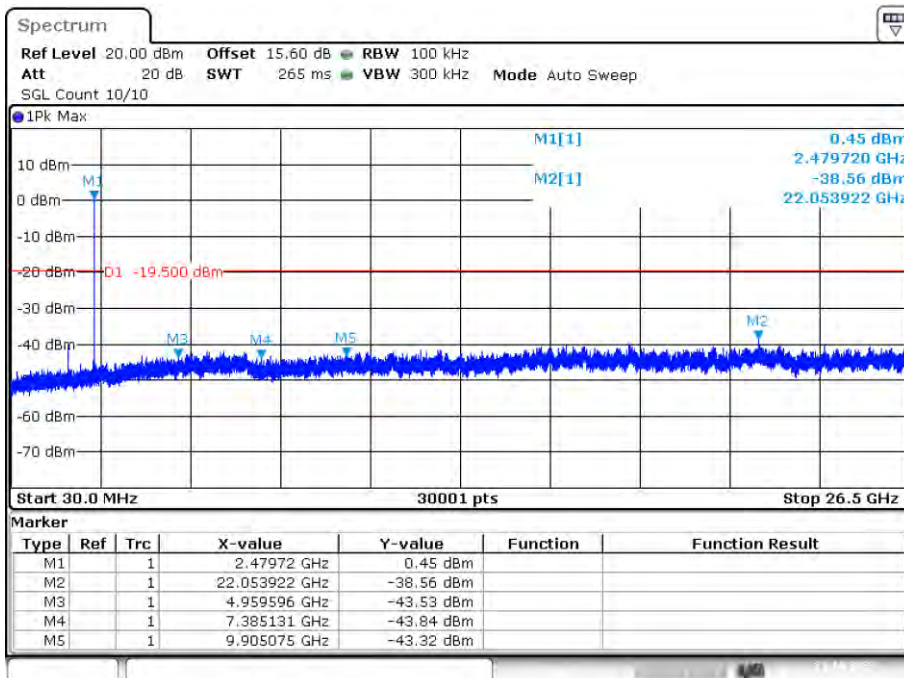


Date: 23.OCT.2023 12:39:54

Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Ref

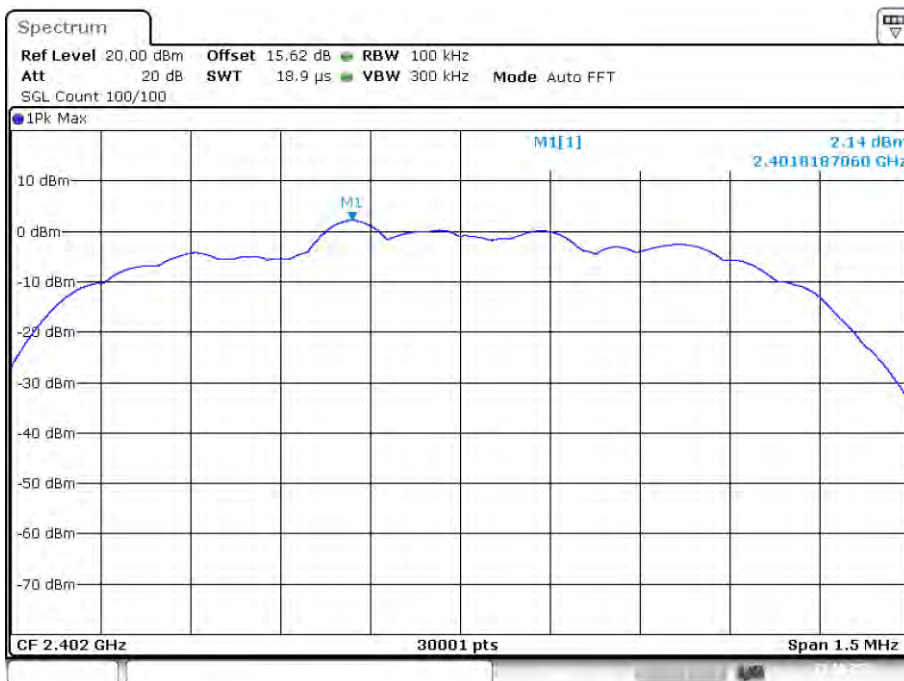


Date: 23.OCT.2023 13:00:45

Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission

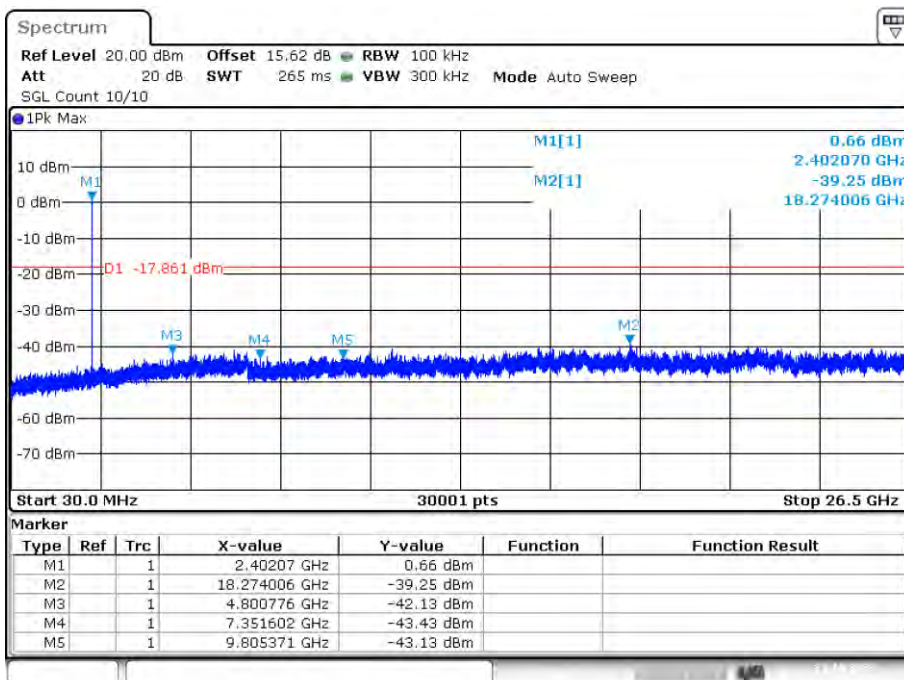


Date: 23.OCT.2023 13:00:59

Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Ref

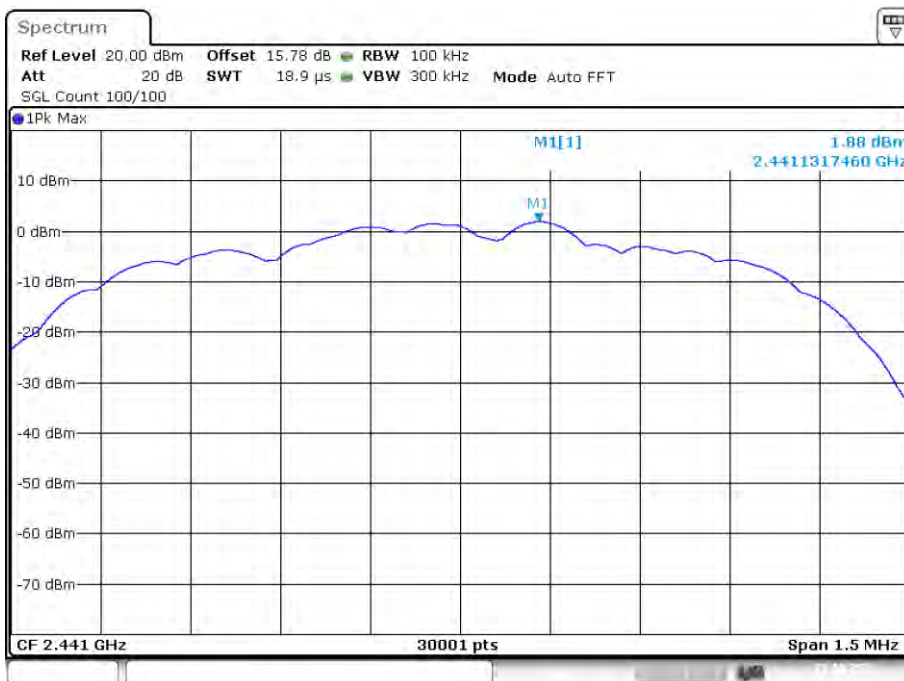


Date: 23.OCT.2023 13:29:39

Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission

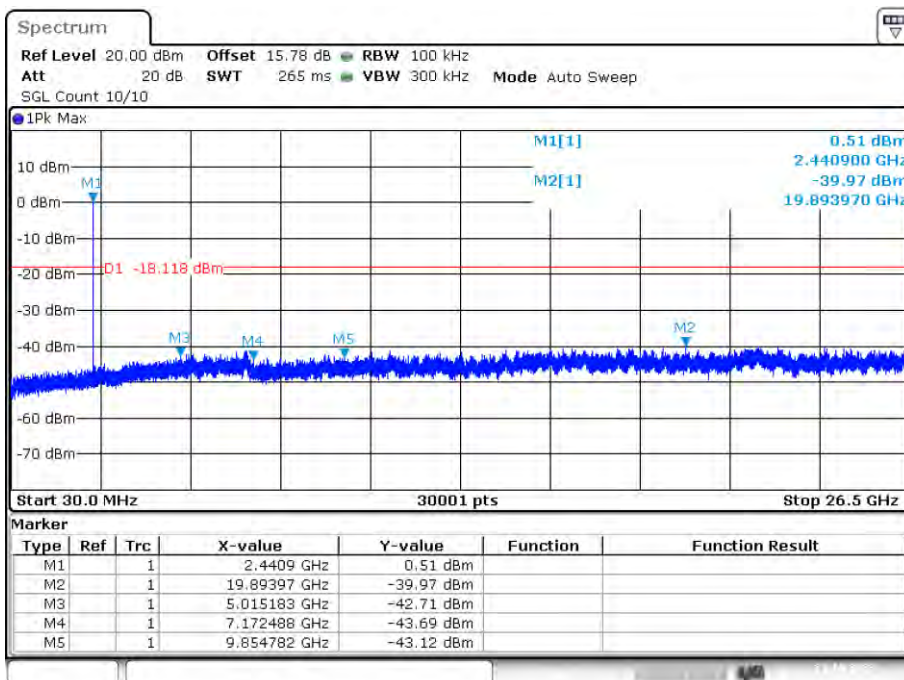


Date: 23.OCT.2023 13:29:53

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Ref

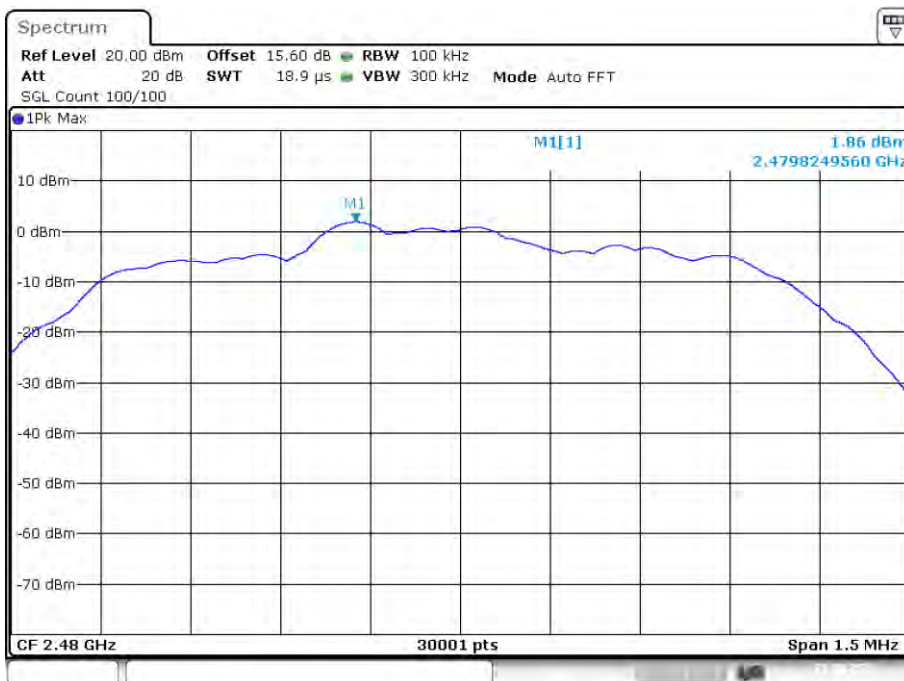

Date: 23.OCT.2023 13:34:09


Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

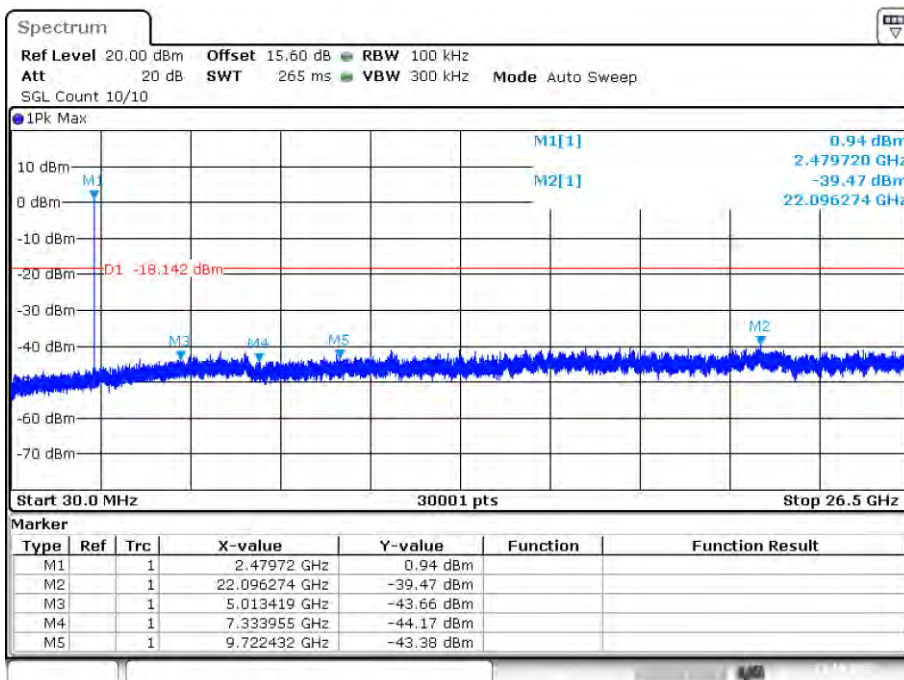

Date: 23.OCT.2023 13:34:23

## 9. BAND EDGE COMPLIANCE

### 9.1. Block Diagram of Test Setup

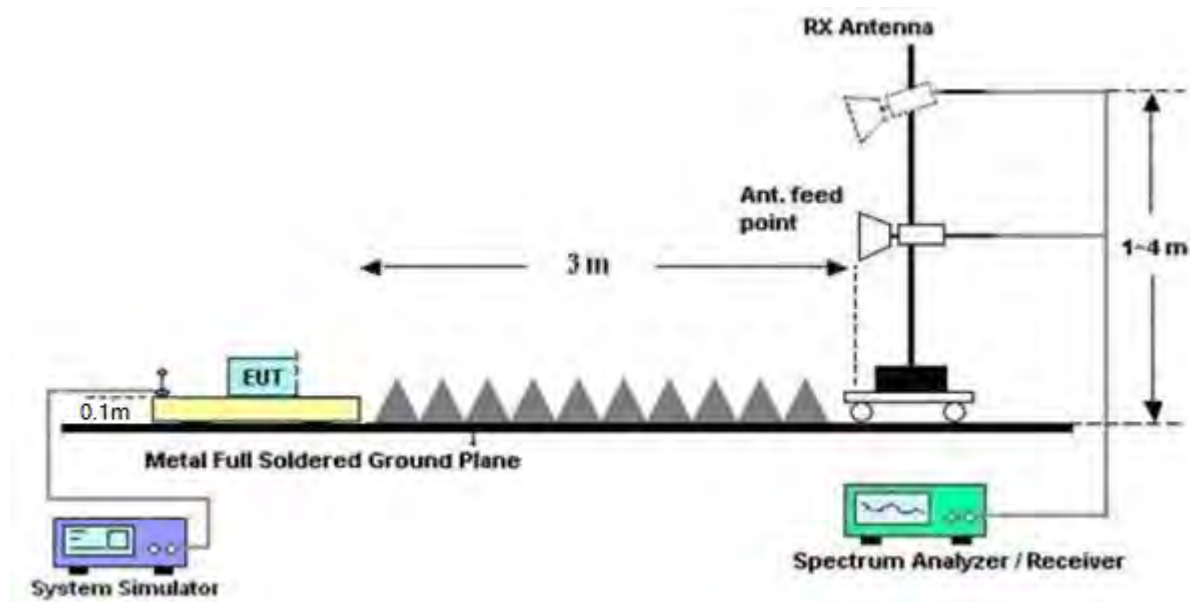

### 9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


### 9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.


### 9.4. Test Result

PASS. (See below detailed test data)


Test Mode: GFSK-Low Hopping-off

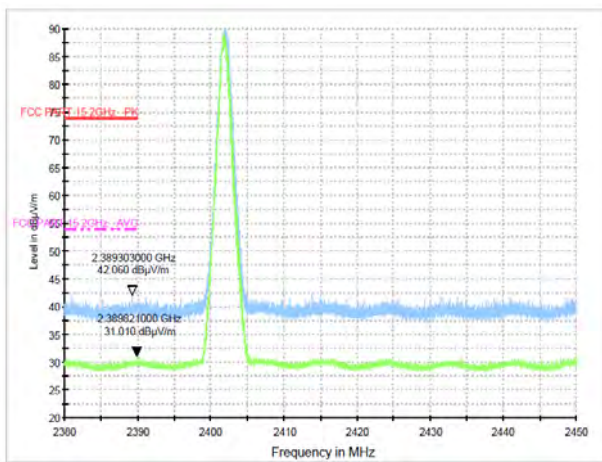


Test Mode: GFSK-High Hopping-off

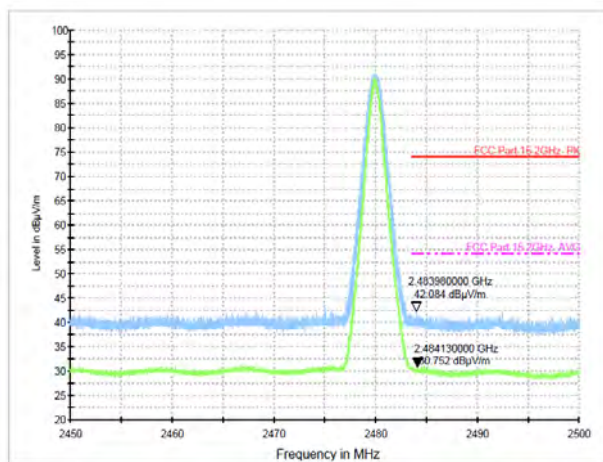

Test Mode: GFSK-Low Hopping-on

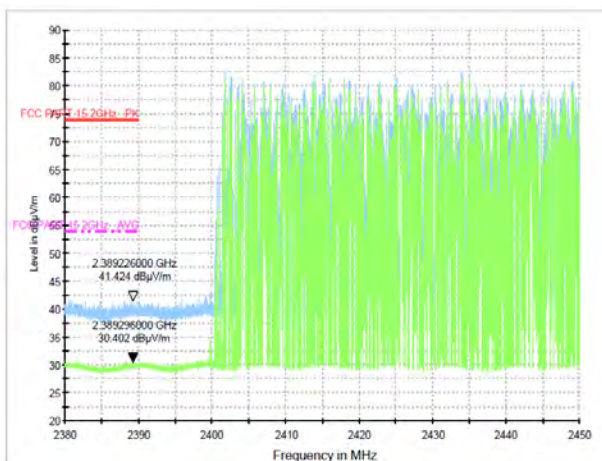



Test Mode: GFSK-High Hopping-on

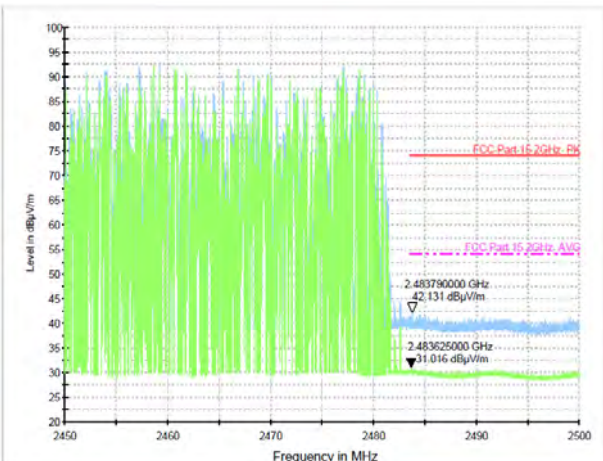





Test Mode:  $\pi/4$  DQPSK-Low Hopping-off

Test Mode:  $\pi/4$  DQPSK-High Hopping-off

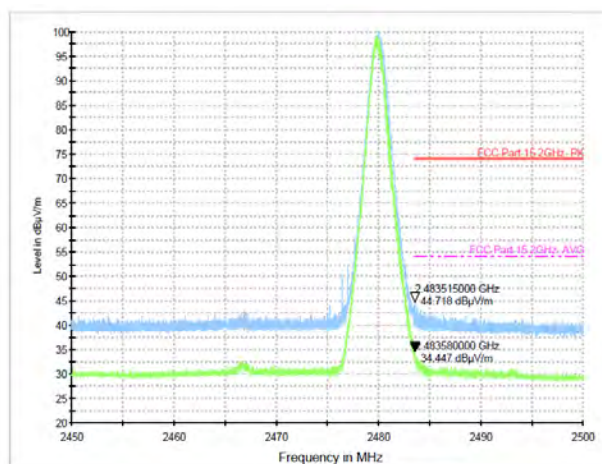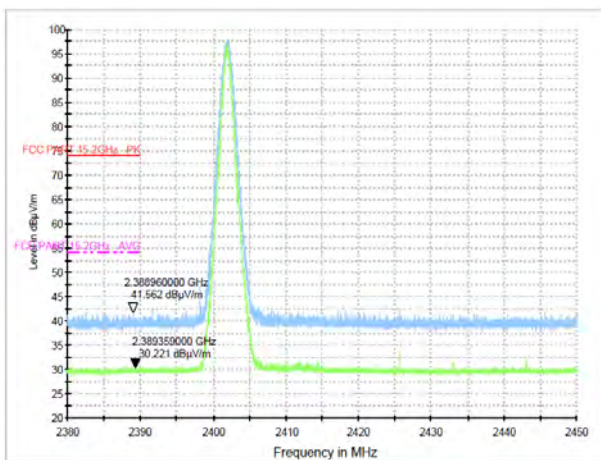


Test Mode:  $\pi/4$  DQPSK-Low Hopping-on


Test Mode:  $\pi/4$  DQPSK-High Hopping-on

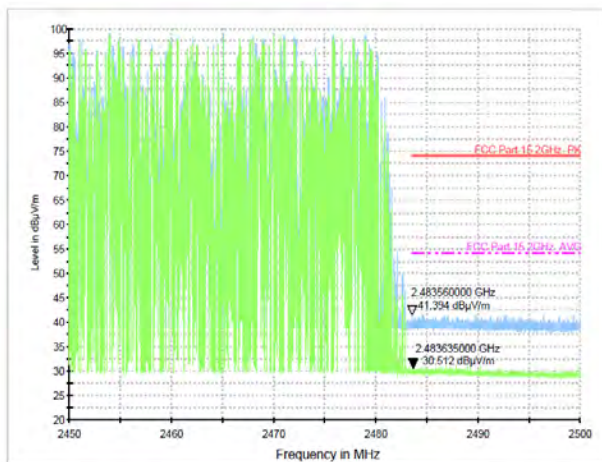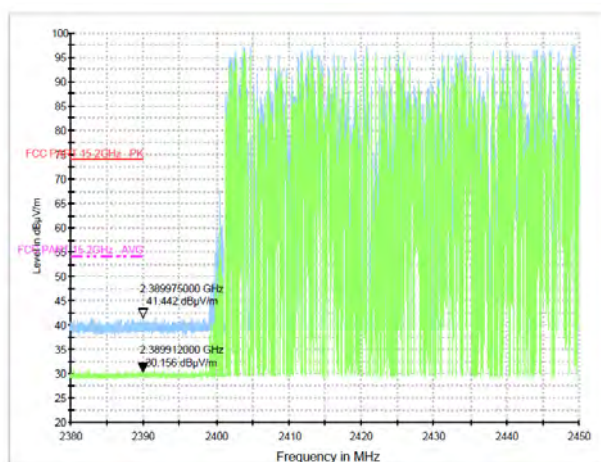


Test Mode: 8DPSK-Low Hopping-off

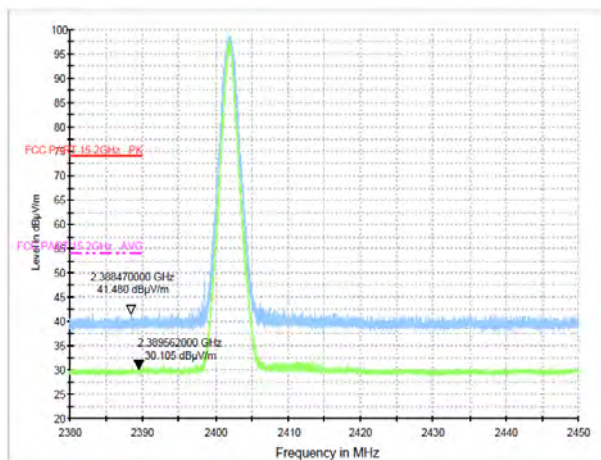


Test Mode: 8DPSK-High Hopping-off

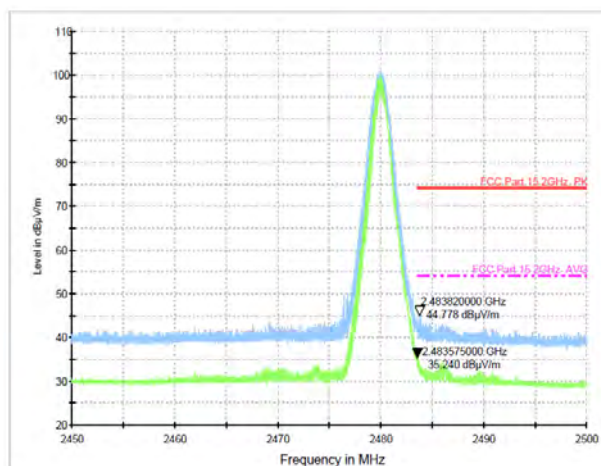

Test Mode: 8DPSK-Low Hopping-on

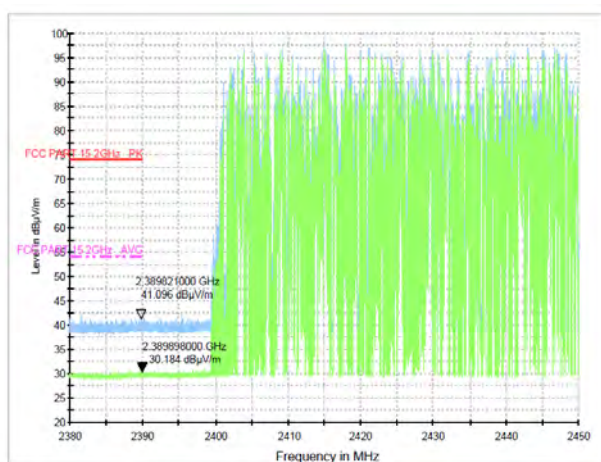


Test Mode: 8DPSK-High Hopping-on

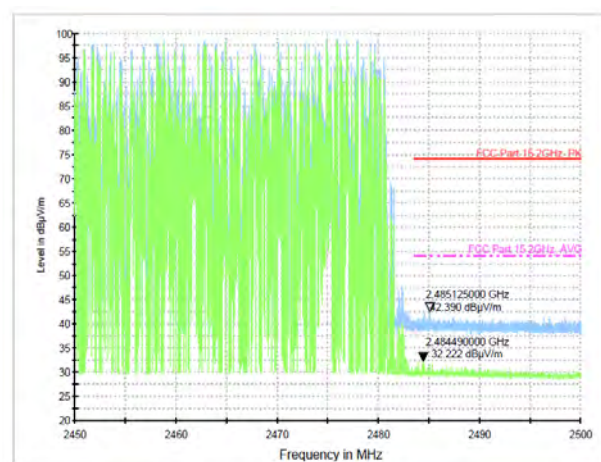


Conducted Method

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref

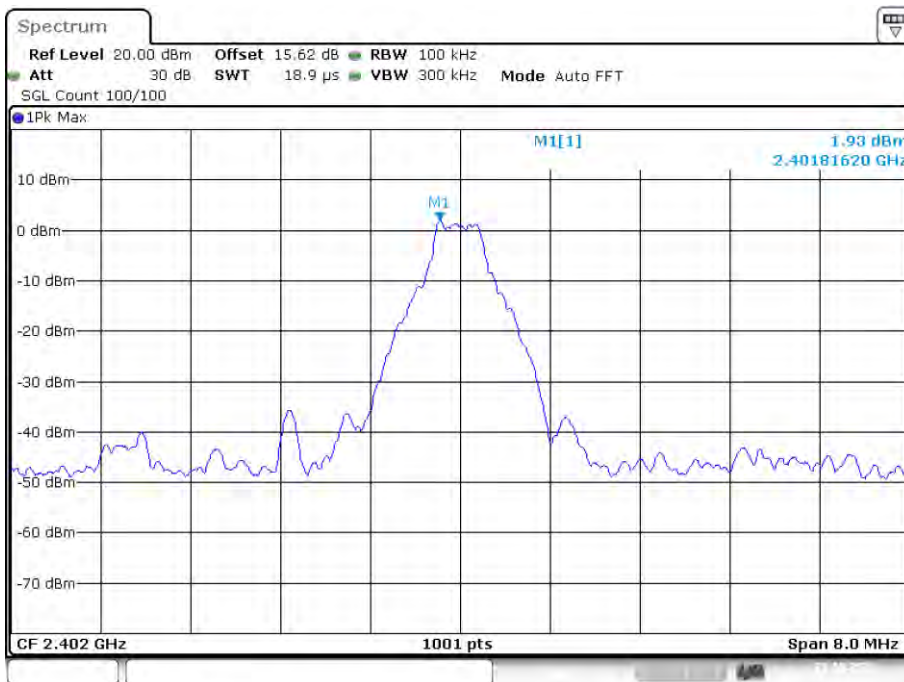


Date: 23.OCT.2023 12:06:16

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

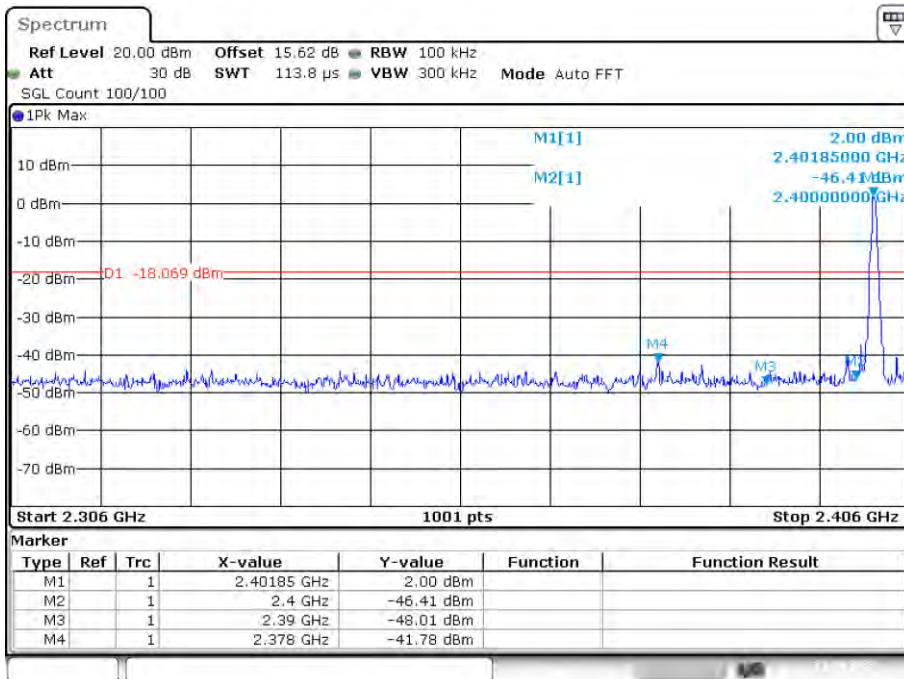


Date: 23.OCT.2023 12:06:21

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref

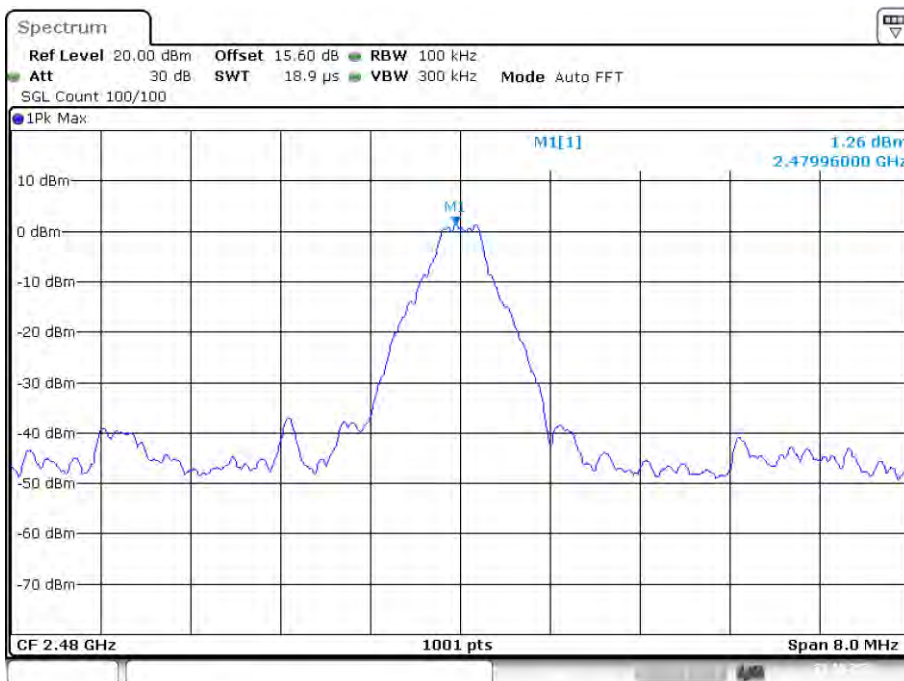


Date: 23.OCT.2023 12:10:41

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

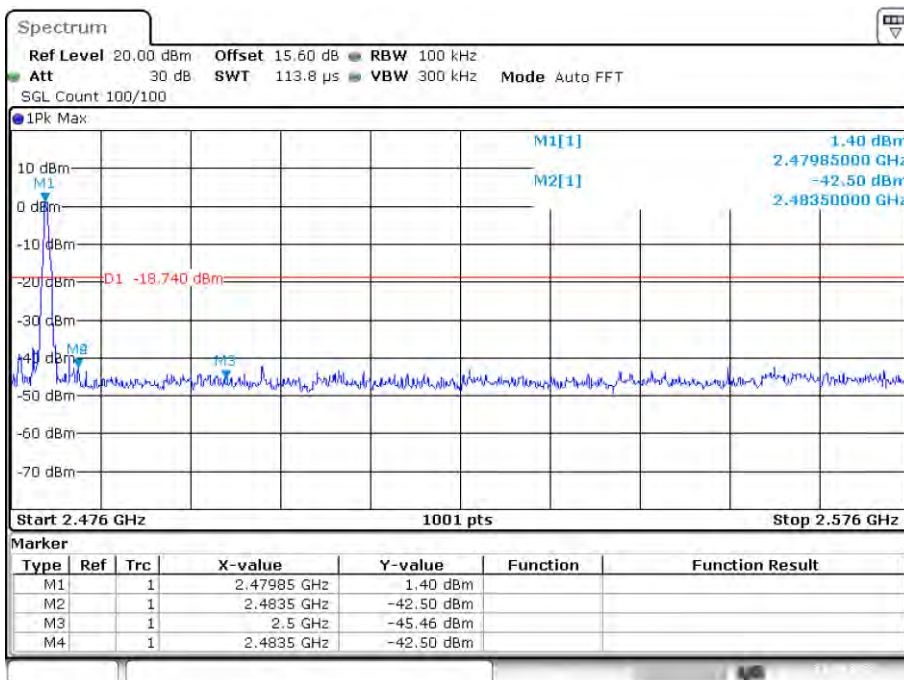


Date: 23.OCT.2023 12:10:47

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref

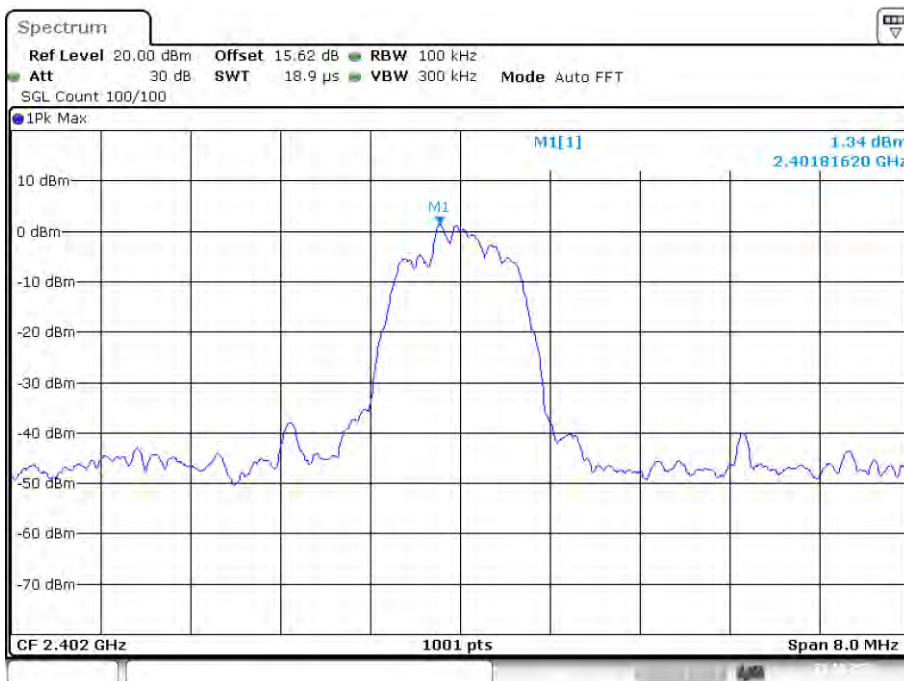


Date: 23.OCT.2023 12:35:05

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

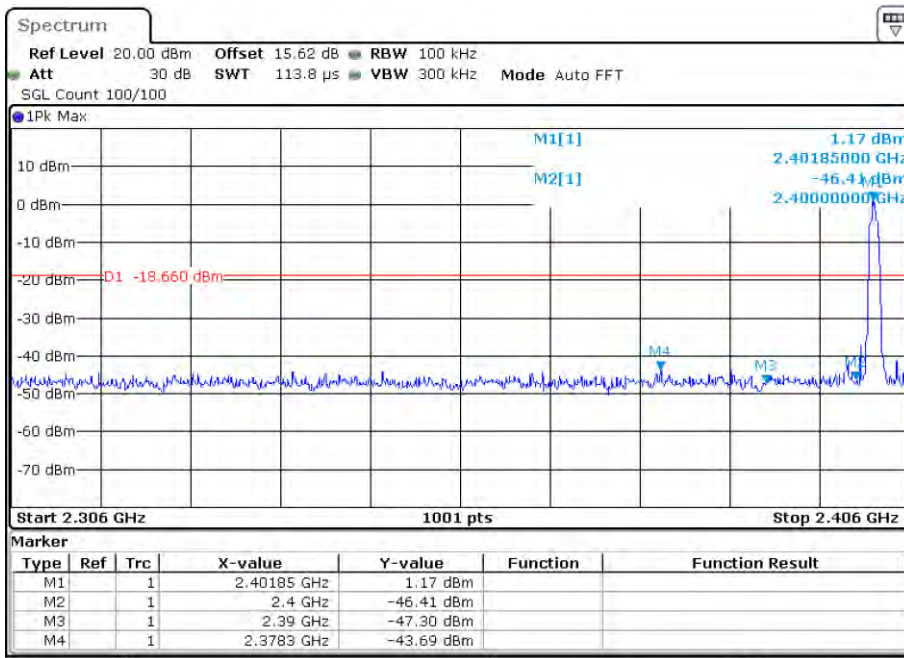


Date: 23.OCT.2023 12:35:11

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref

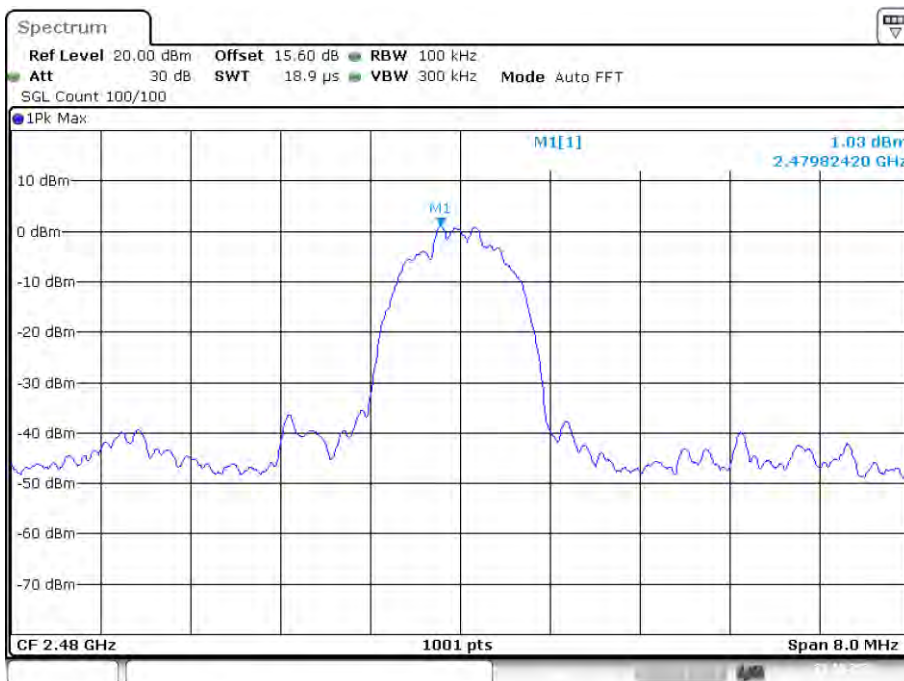


Date: 23.OCT.2023 12:39:22

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

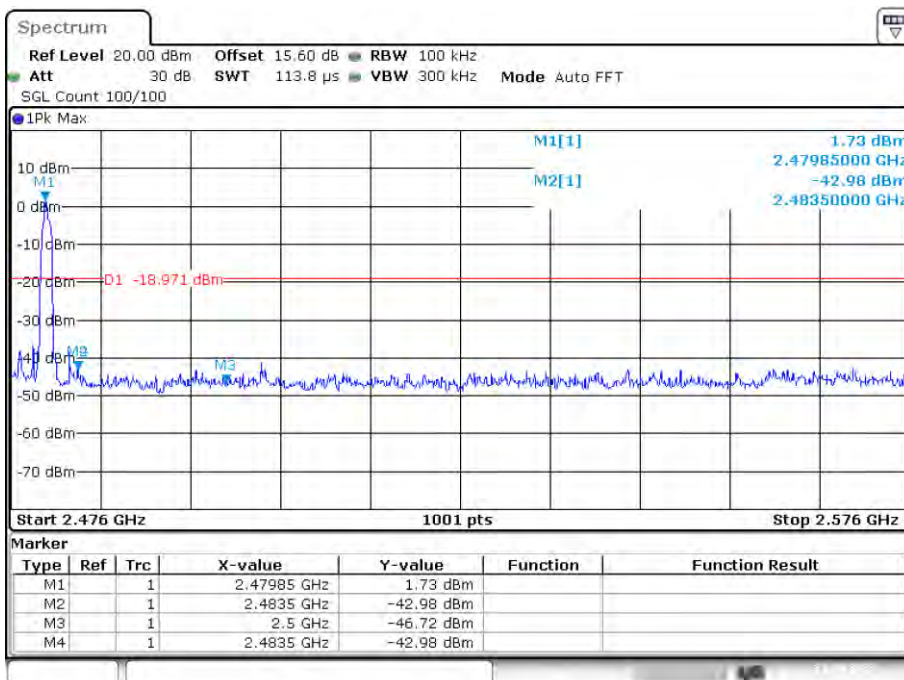


Date: 23.OCT.2023 12:39:28

Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Ref

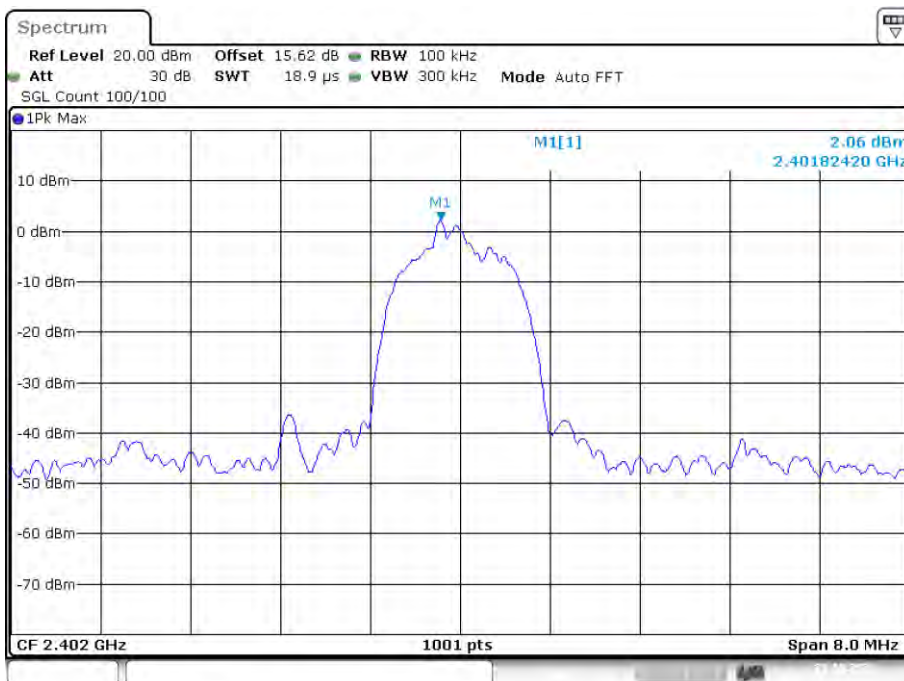


Date: 23.OCT.2023 13:00:25

Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Emission

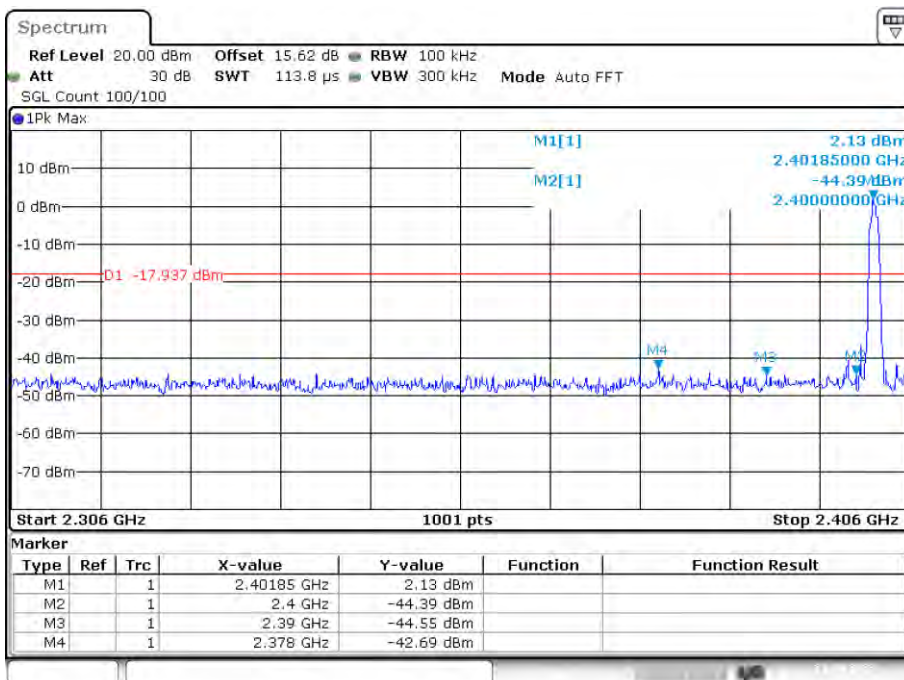


Date: 23.OCT.2023 13:00:31

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Ref

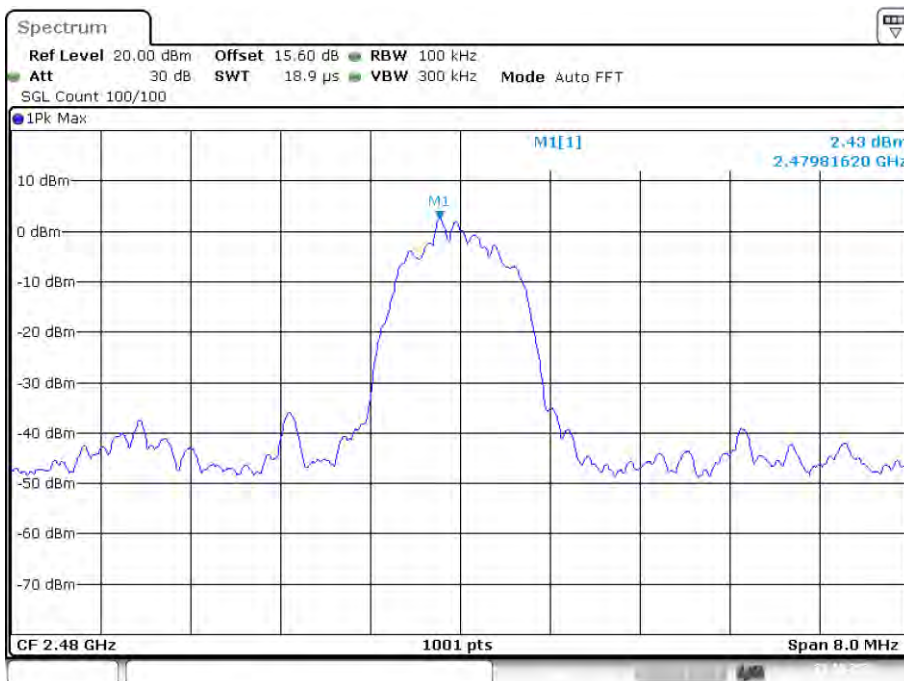

Date: 23.OCT.2023 13:33:48


Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Emission

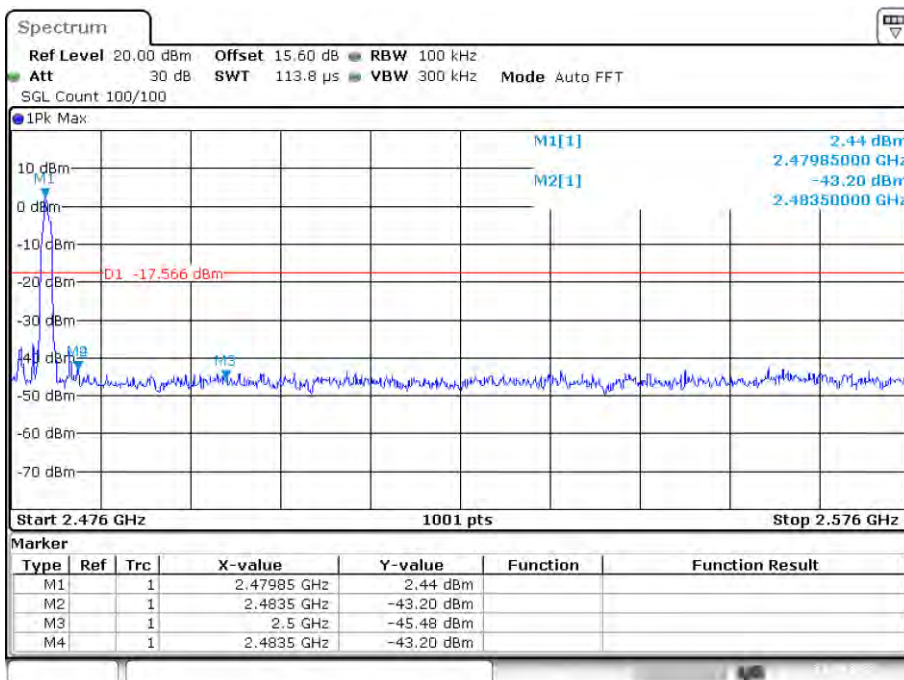

Date: 23.OCT.2023 13:33:53




Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref

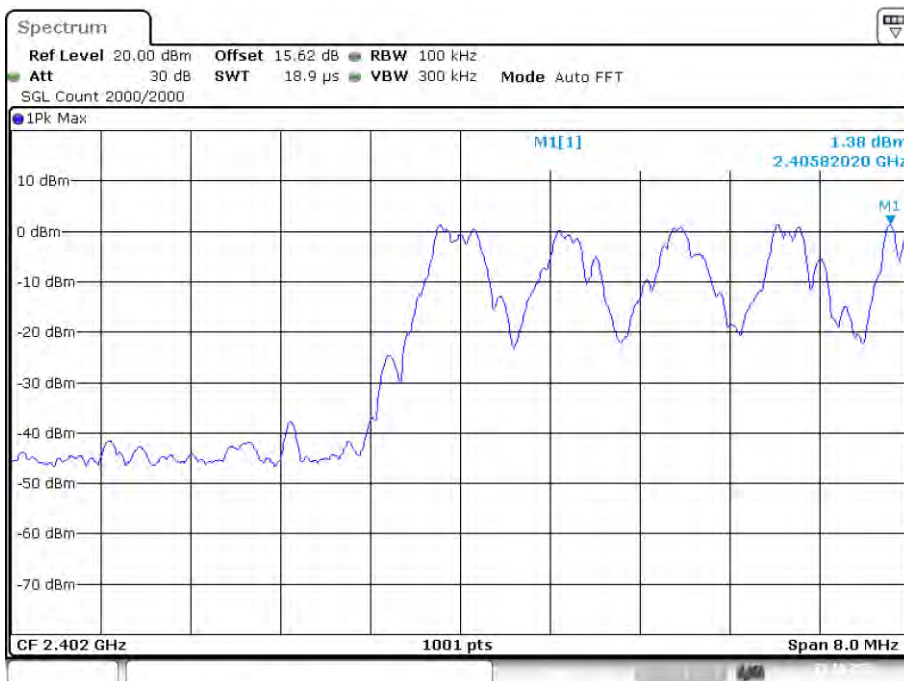


Date: 23.OCT.2023 12:12:00

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission

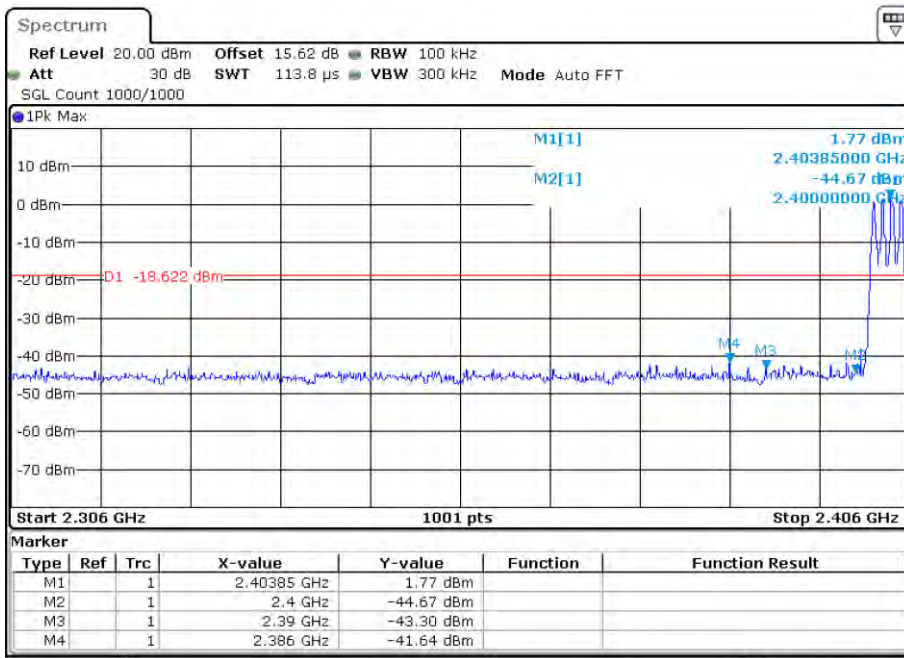


Date: 23.OCT.2023 12:12:30

Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref

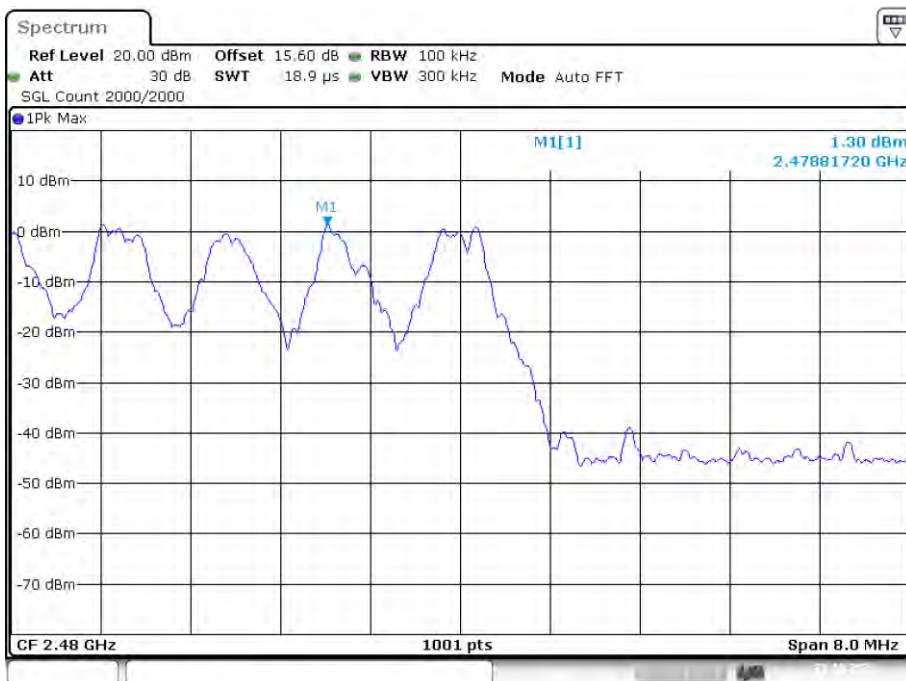


Date: 23.OCT.2023 12:24:28

Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission

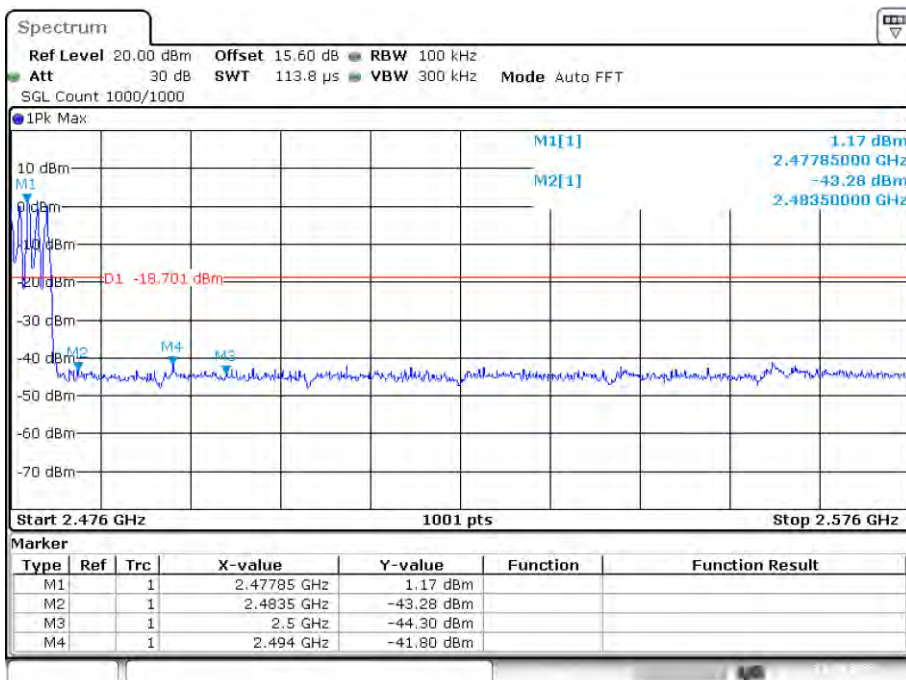


Date: 23.OCT.2023 12:24:57

Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Ref

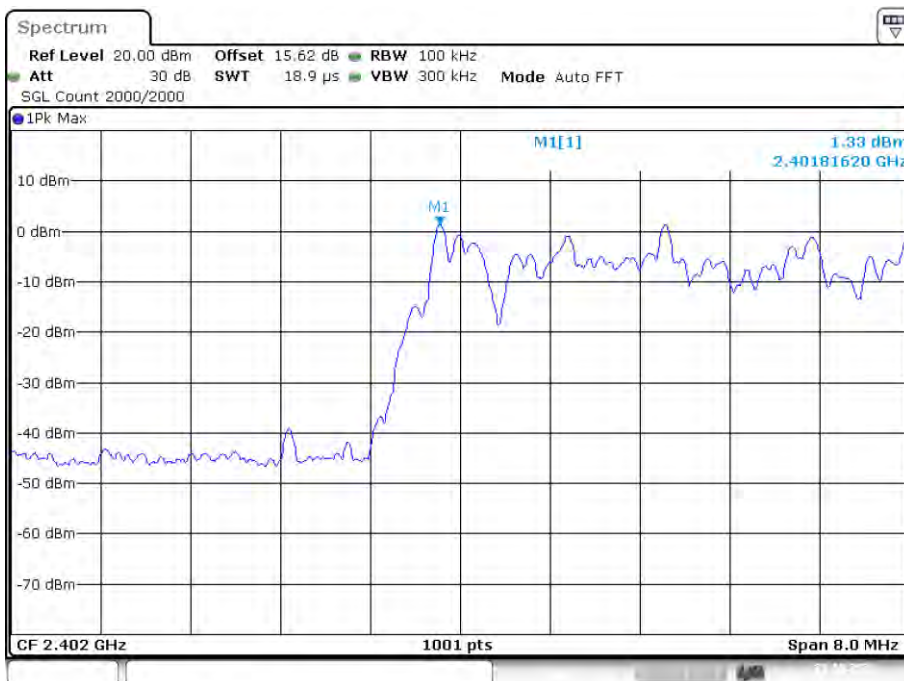


Date: 23.OCT.2023 12:41:08

Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Emission

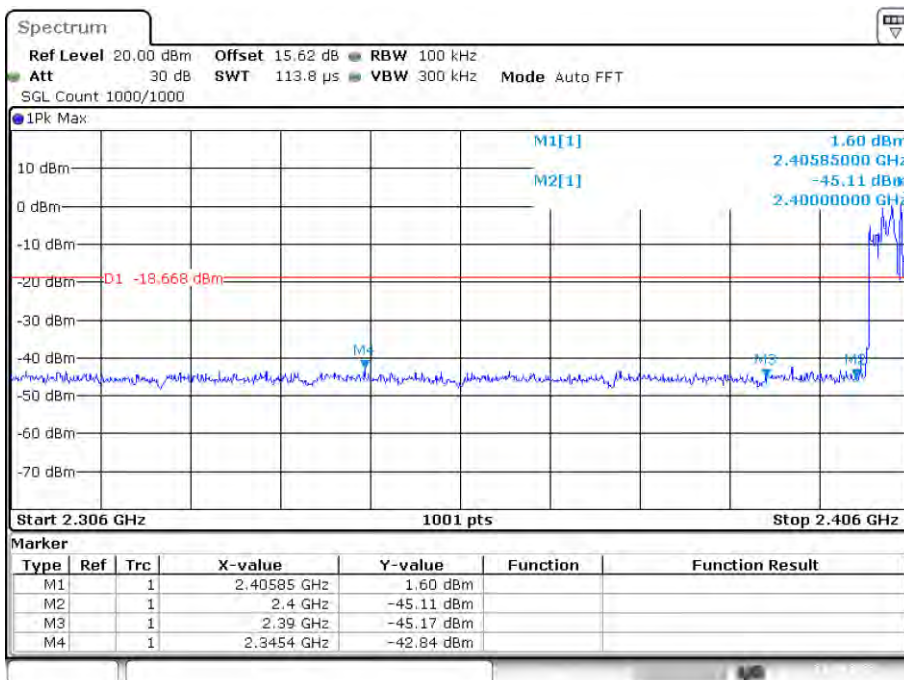


Date: 23.OCT.2023 12:41:39

Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Ref

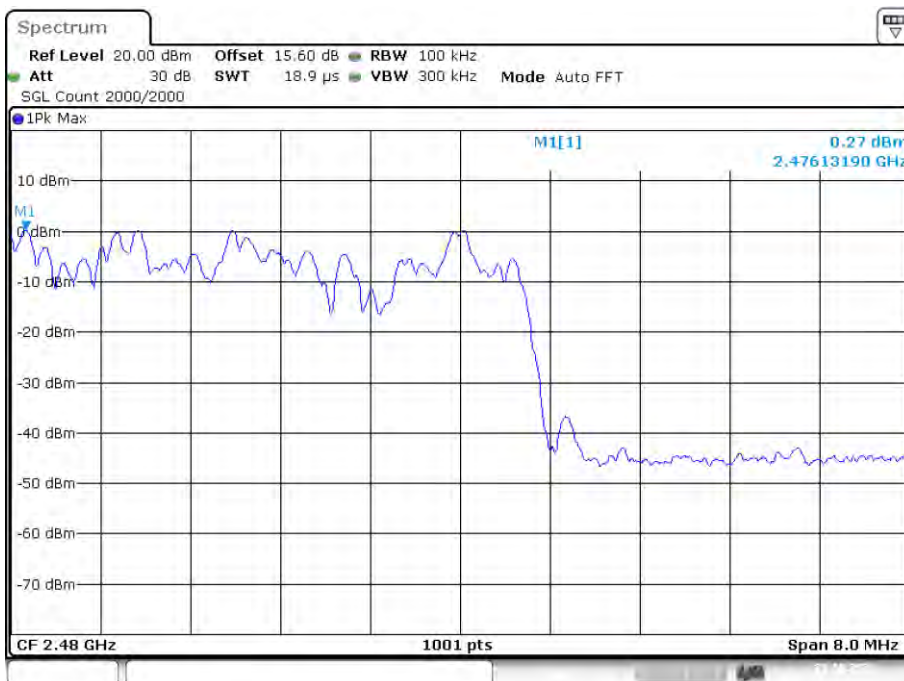


Date: 23.OCT.2023 12:52:27

Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Emission

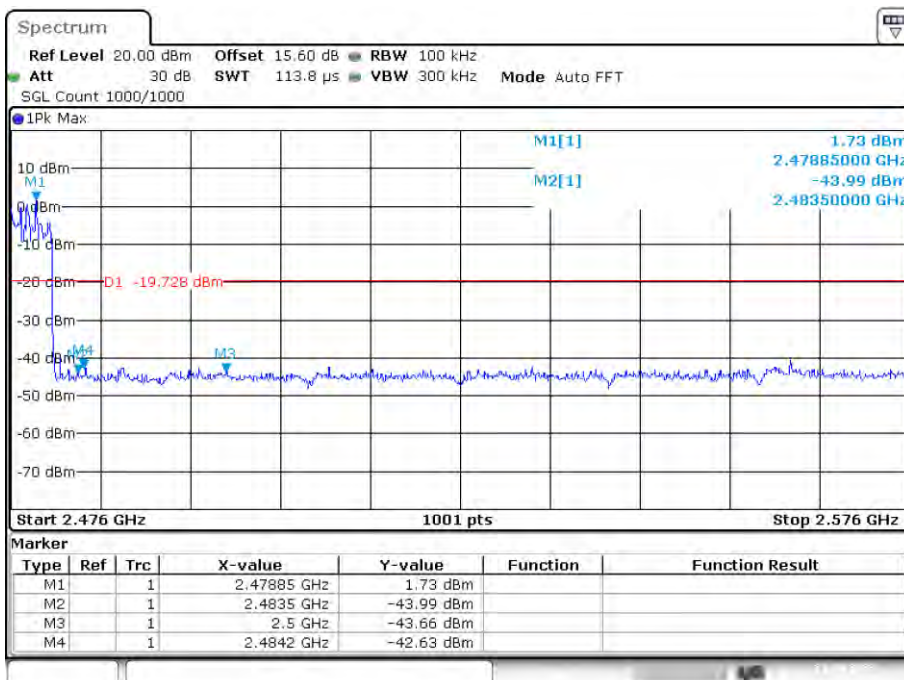


Date: 23.OCT.2023 12:52:56

Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Ref

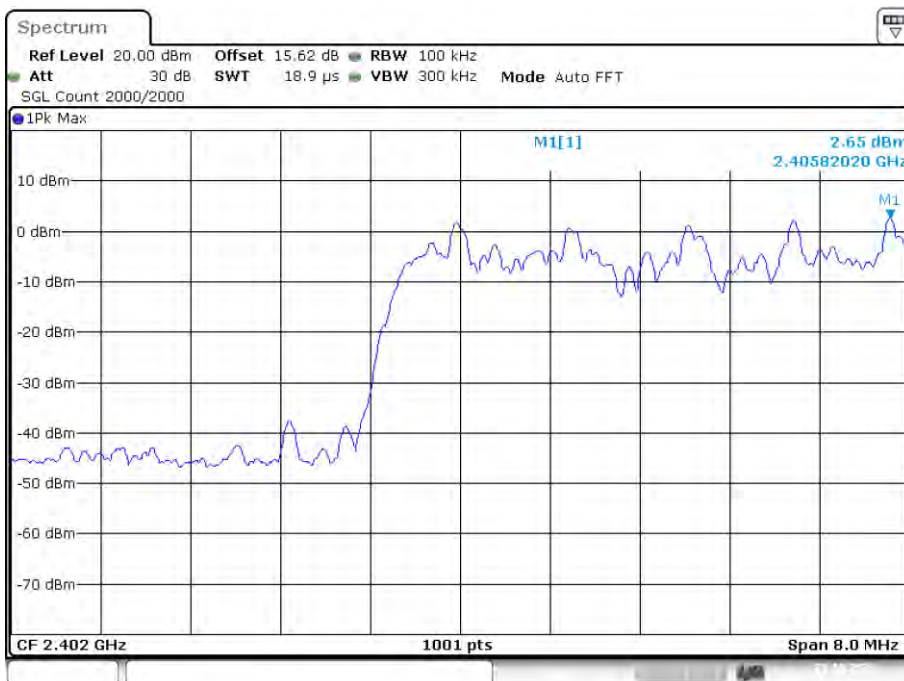

Date: 23.OCT.2023 13:36:46

Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Emission

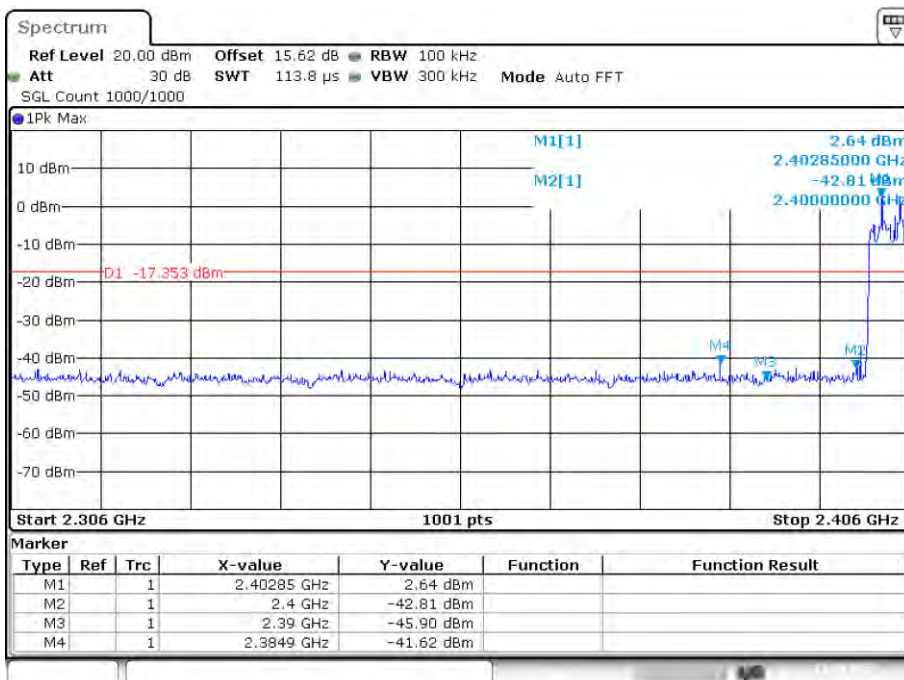


Date: 23.OCT.2023 13:37:15

Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Ref



Date: 23.OCT.2023 13:49:35


Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Emission

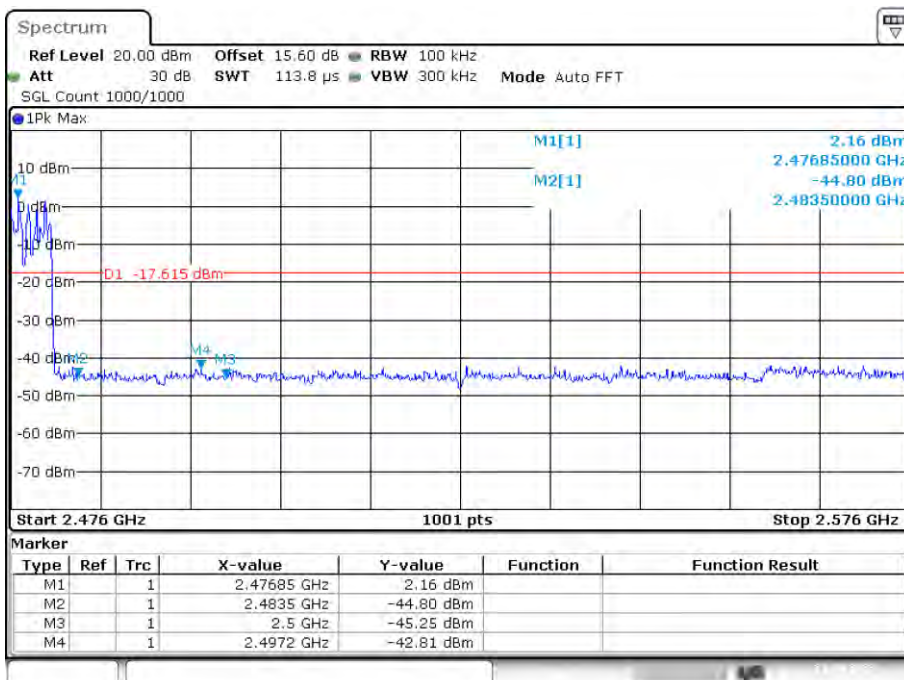

Date: 23.OCT.2023 13:50:04

## 10. POWER LINE CONDUCTED EMISSIONS

### 10.1. Block Diagram of Test Setup

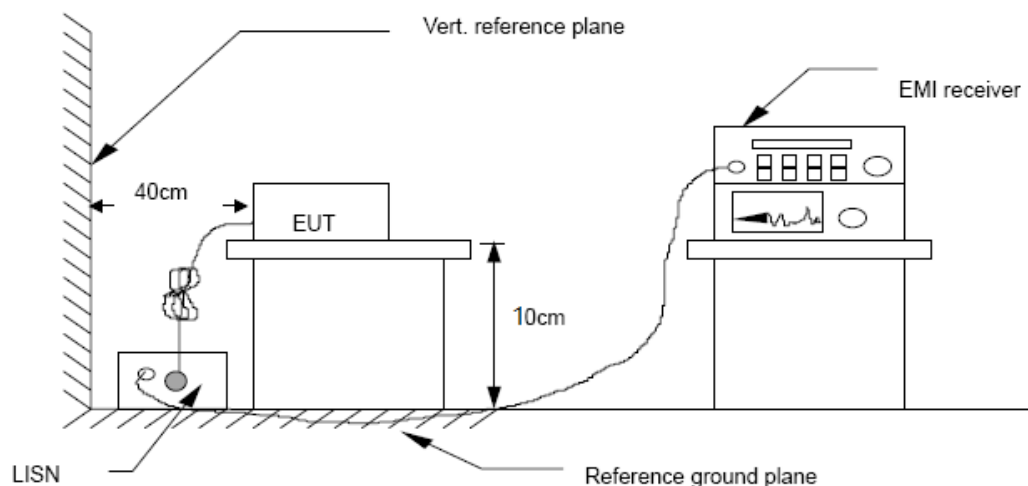

### 10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 10cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

### 10.4. Test Result

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

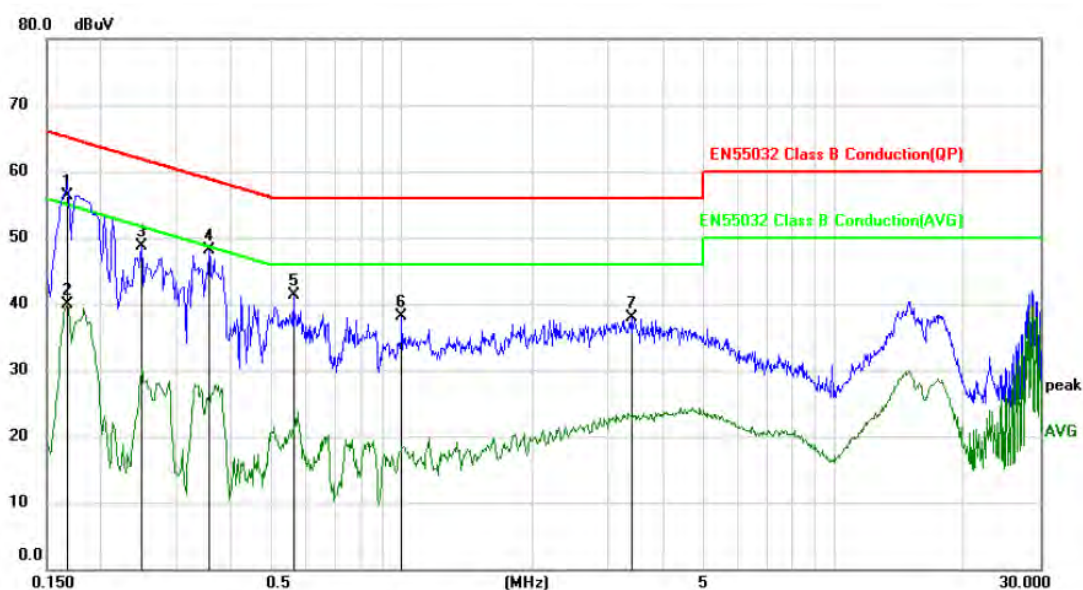


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1680	46.40	9.93	56.33	65.06	-8.73	QP	
2		0.1680	29.92	9.93	39.85	55.06	-15.21	AVG	
3		0.2490	38.80	9.97	48.77	61.79	-13.02	peak	
4		0.3570	38.16	9.95	48.11	58.80	-10.69	peak	
5		0.5610	31.28	9.94	41.22	56.00	-14.78	peak	
6		0.9990	28.26	9.92	38.18	56.00	-17.82	peak	
7		3.3990	27.92	9.96	37.88	56.00	-18.12	peak	

\*:Maximum data x:Over limit !:over margin (Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable



Neutral:

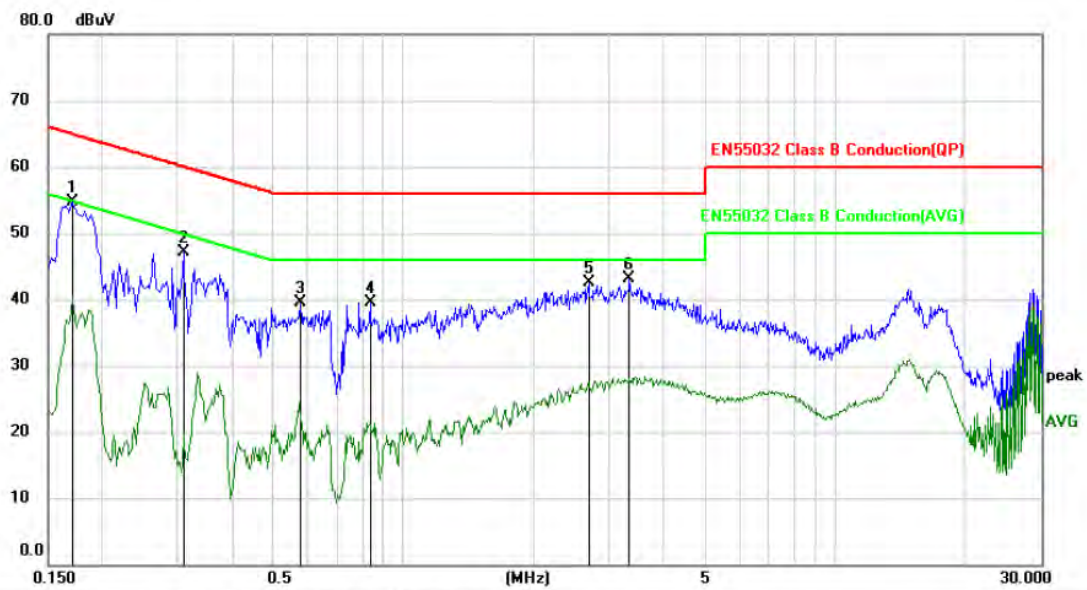

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1710	44.82	9.93	54.75	64.91	-10.16	peak	
2		0.3090	37.11	9.93	47.04	60.00	-12.96	peak	
3		0.5790	29.60	9.93	39.53	56.00	-16.47	peak	
4		0.8370	29.60	9.95	39.55	56.00	-16.45	peak	
5		2.6850	32.57	9.92	42.49	56.00	-13.51	peak	
6		3.3330	33.18	9.95	43.13	56.00	-12.87	peak	

\*:Maximum data    x:Over limit    !:over margin

< Reference Only

Note: Measurement=Reading Level+Correc Factor.    Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the GFSK 2402MHz mode with the worst data is listed.

## **11. ANTENNA REQUIREMENTS**

### **11.1. Limit**



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **11.2. Result**


The use of an antenna that is uniquely coupled to the intended radiator shall be considered sufficient to comply with the provisions of this section.

## 12. TEST SETUP PHOTO

### 12.1. Photo of Radiated Emission test

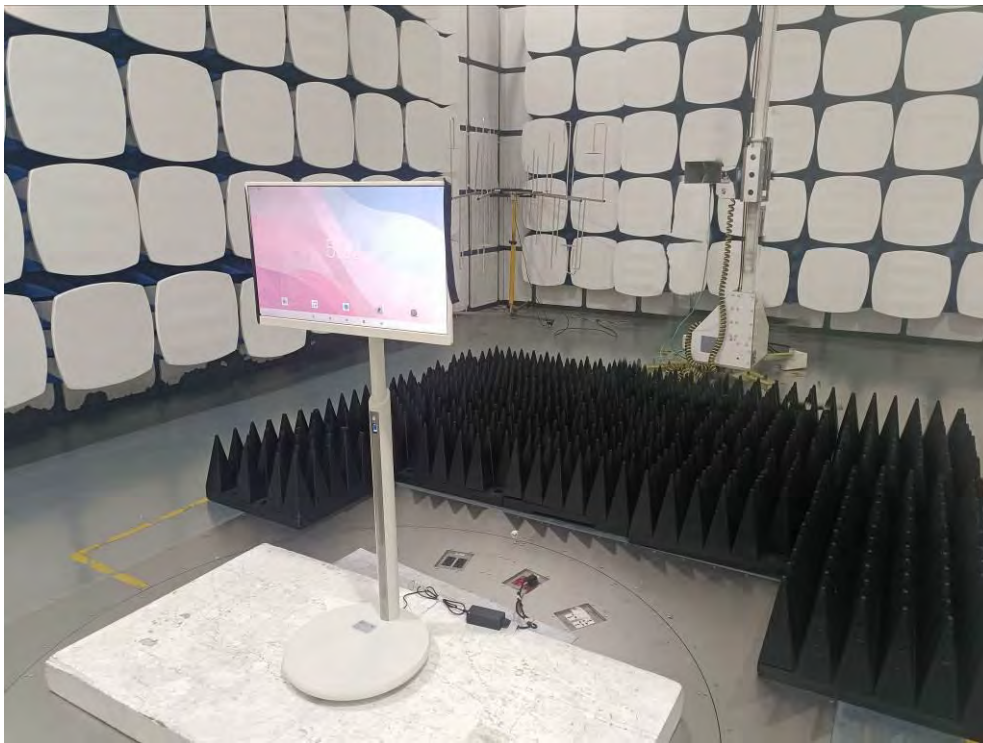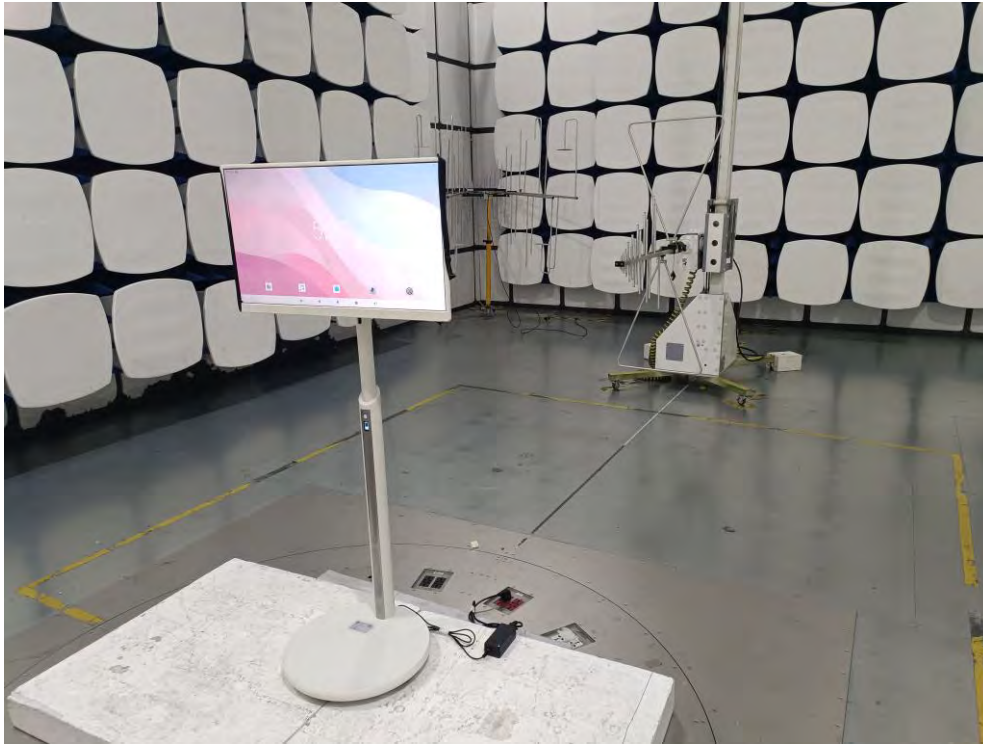

12.2.Photo of Conducted Emission test

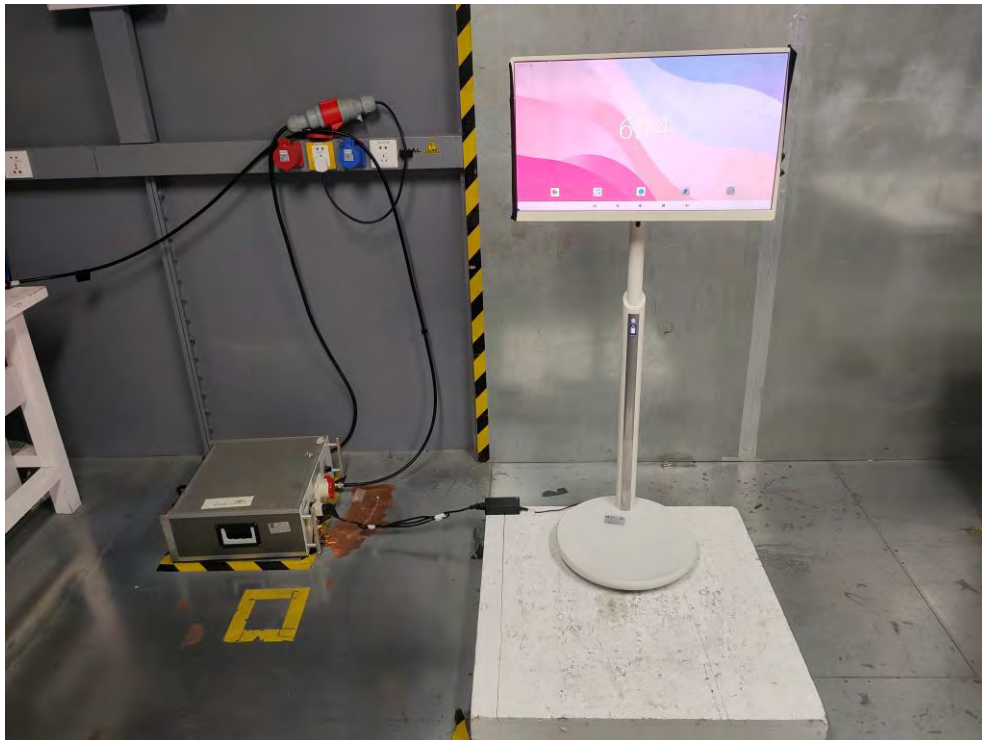

-----END OF REPORT-----