



FCC TEST REPORT

FCC ID: 2AI56-Q27CMA11

On Behalf of

HKC Corporation Limited
intelligent signage

Model No.: Q27CMA11, Q27C**** (*=0-9, A-Z, a-z, blank)

Prepared for : HKC Corporation Limited
Address : Building 1,2,3, Huike Industrial Park, Mingying Industrial Zone,
ShuiTian, ShiYan, Baoan, Shenzhen, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2310034-C01-R03
Date of Receipt : October 16, 2023
Date of Test : October 16, 2023- November 1, 2023
Date of Report : November 1, 2023
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	5
1.1. Description of Standards and Results	5
2. General Information	6
2.1. Description of Device (EUT)	6
2.2. Accessories of Device (EUT)	7
2.3. Tested Supporting System Details.....	7
2.4. Block Diagram of connection between EUT and simulators	7
2.5. Test Mode Description.....	7
2.6. Test Conditions.....	8
2.7. Test Facility.....	8
2.8. Measurement Uncertainty	8
2.9. Test Equipment List	9
3. Spurious Emission	10
3.1. Test Limits	10
3.2. Test Procedure	10
3.3. Test Setup	11
3.4. Test Results	12
4. Power Line Conducted Emission	23
4.1. Test Limits	23
4.2. Test Procedure	23
4.3. Test Setup	23
4.4. Test Results	23
5. Conducted Maximum Output Power	26
5.1. Test limits	26
5.2. Test Procedure	26
5.3. Test Setup	26
5.4. Test Results	26
6. Peak Power Spectral Density	30
6.1. Test limits	30
6.2. Test Procedure	30
6.3. Test Setup	30
6.4. Test Results	30
7. Bandwidth	34
7.1. Test limits	34
7.2. Test Procedure	34
7.3. Test Setup	34
7.4. Test Results	34
8. Band Edge Check	42
8.1. Test limits	42
8.2. Test Procedure	42
8.3. Test Setup	42
8.4. Test Results	42
9. Antenna Requirement	48
9.1. Standard Requirement	48
9.2. Antenna Connected Construction	48
9.3. Results	48
10. Test setup photo	49
10.1. Photo of Radiated Emission test.....	49
10.2. Photo of Conducted Emission test	50

TEST REPORT DECLARATION

Applicant : HKC Corporation Limited

Address : Building 1,2,3, Huike Industrial Park, Mingying Industrial Zone, ShuiTian, ShiYan, Baoan, Shenzhen, China

Manufacturer : HKC Corporation Limited

Address : Building 1,2,3, Huike Industrial Park, Mingying Industrial Zone, ShuiTian, ShiYan, Baoan, Shenzhen, China

EUT Description : intelligent signage

(A) Model No. Q27CMA11, Q27C**** (*=0-9, A-Z, a-z, blank)

(B) Trademark N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10-2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.


After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang
Project Engineer



Approved by (name + signature).....: Reak Yang
Project Manager



Date of issue..... : November 1, 2023

Revision History

Revision	Issue Date	Revisions	Revised By
V0	November 1, 2023	Initial released Issue	Lucas Pang

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Test Requirement	Standards Paragraph	Result
Conducted Emission	FCC PART 15	15.207	P
6dB Bandwidth	FCC PART 15	15.247 (a)(2)	P
Output Power	FCC PART 15	15.247 (b)(3)	P
Radiated Spurious Emission	FCC PART 15	15.247 (c)	P
Conducted Spurious & Band Edge Emission	FCC PART 15	15.247 (d)	P
Power Spectral Density	FCC PART 15	15.247 (e)	P
Radiated Band Edge Emission	FCC PART 15	15.205	P
Antenna Requirement	FCC PART 15	15.203	P

Note: 1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	:	intelligent signage
Model Number	:	Q27CMA11, Q27C**** (*=0-9, A-Z, a-z, blank)
Diff	:	There is no difference except the name of the model. All tests are made with the Q27CMA11 model.
Power supply	:	DC 24V from adapter, DC 19.2V from battery.
Radio Technology	:	Bluetooth V5.2 BLE
Operation frequency	:	2402-2480MHz
Channel No.	:	40 Channels
Channel spacing	:	2MHz
Rate	:	1Mbps/2Mbps
Modulation type	:	GFSK
Antenna Type	:	Internal Antenna, max gain -3.98dBi (Antenna information is provided by applicant.)
Software version	:	V1.0
Hardware version	:	V1.0
Connector cable loss	:	N/A
Intend use environment	:	Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories : AC ADAPTOR
 Manufacturer : Shenzhen Guijin Technology Co., Ltd.
 Model : GJ100WD-2400400W1
 Ratings : INPUT: 100-240V~50/60Hz 1.5A
 OUTPUT: 24.0V=4.0A 96.0W

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	--	--	--	--	--

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK (1M/2M)	Low :CH1	2402
	Middle: CH20	2440
	High: CH40	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
 Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
 Registration Number: 293961

July 25, 2017 Certificated by IC
 Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB(Polarize: H)
	4.16dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2023.08.16	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2023.08.16	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2023.08.16	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2023.08.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	1Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	1Year
RF Cable	Resenberger	Cable 1	/	RE1	2023.08.16	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2023.08.16	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2023.08.16	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2023.08.16	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2023.08.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2023.08.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2023.08.16	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	1Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2023.08.16	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2023.08.16	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2023.08.16	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2023.08.16	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. SPURIOUS EMISSION

3.1. Test Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

NOTE:

- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(uv/m)

3.2. Test Procedure

The measuring distance of 3m shall be used for measurements at frequency up to 1GH and above 1GHz, The EUT was placed on a rotating 0.1m high above ground for below 1GHz and 0.1m high for above1GHz testing, The table was rotated 360 degrees to determine the position of the highest radiation


The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.

The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured


If Peak value comply with QP limit Below 1GHz.The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.


3.3. Test Setup

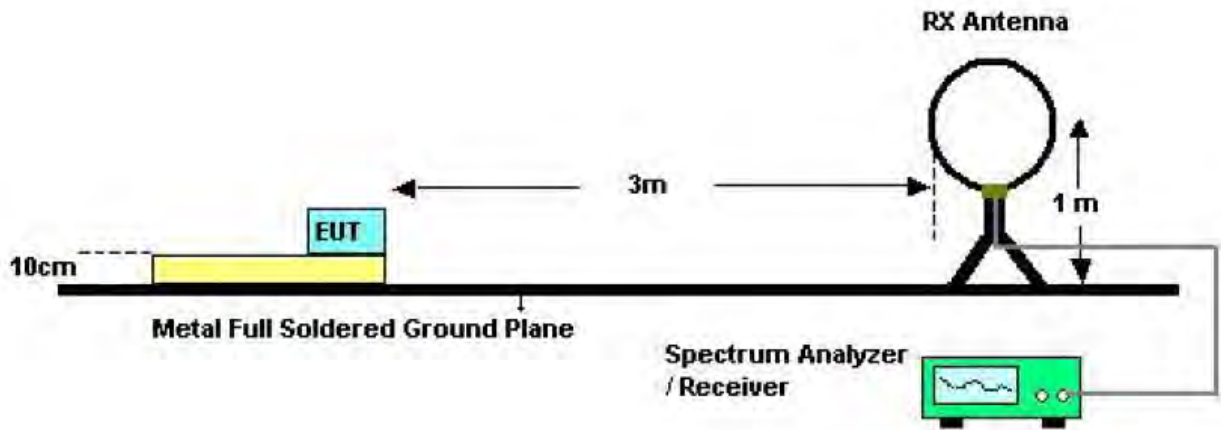

Below 30MHz Test Setup

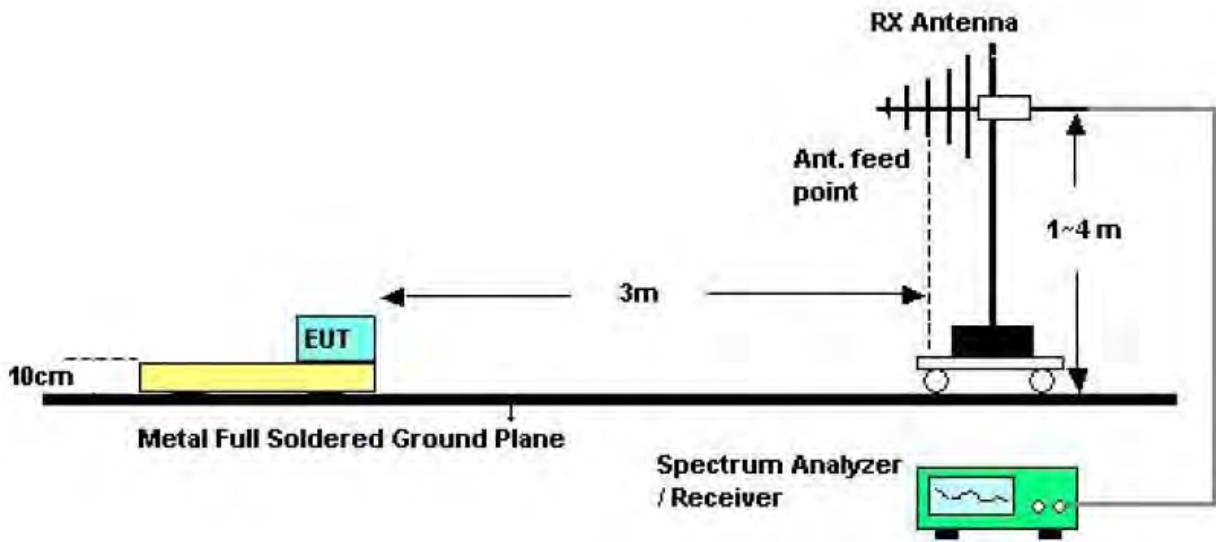

Above 30MHz Test Setup

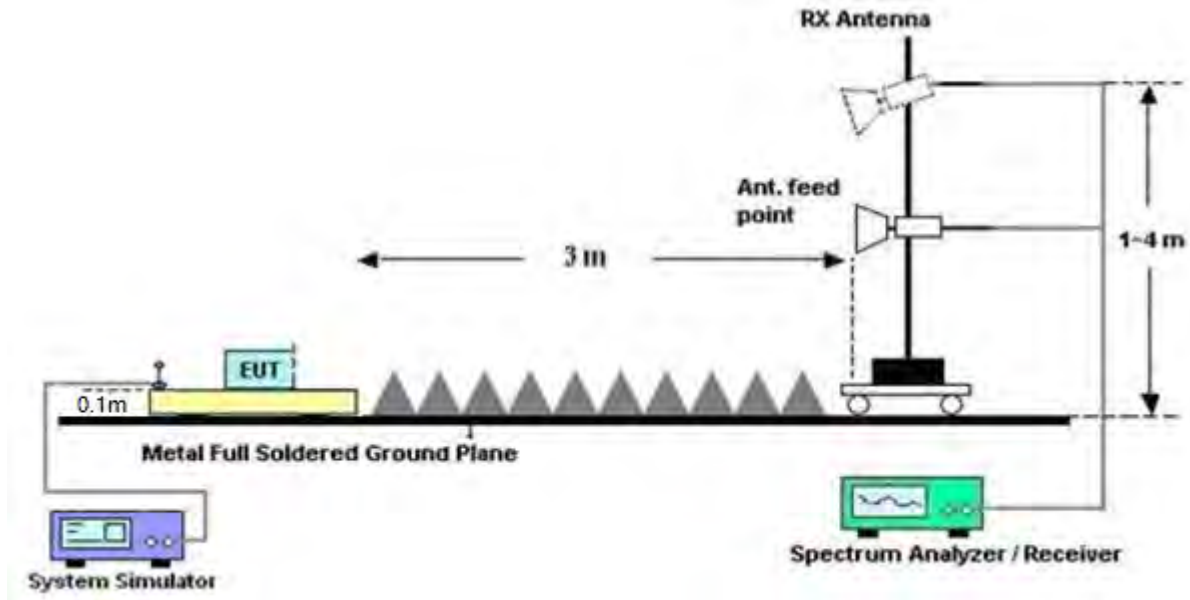

Above 1GHz Test Setup

3.4. Test Results

Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the 10th harmonic from 9 kHz to the EUT.

Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: 1.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2. Only show the test data of the worst Channel in this report.

From 30MHz to 1000MHz: Conclusion: PASS

Antenna polarity: Horizontal

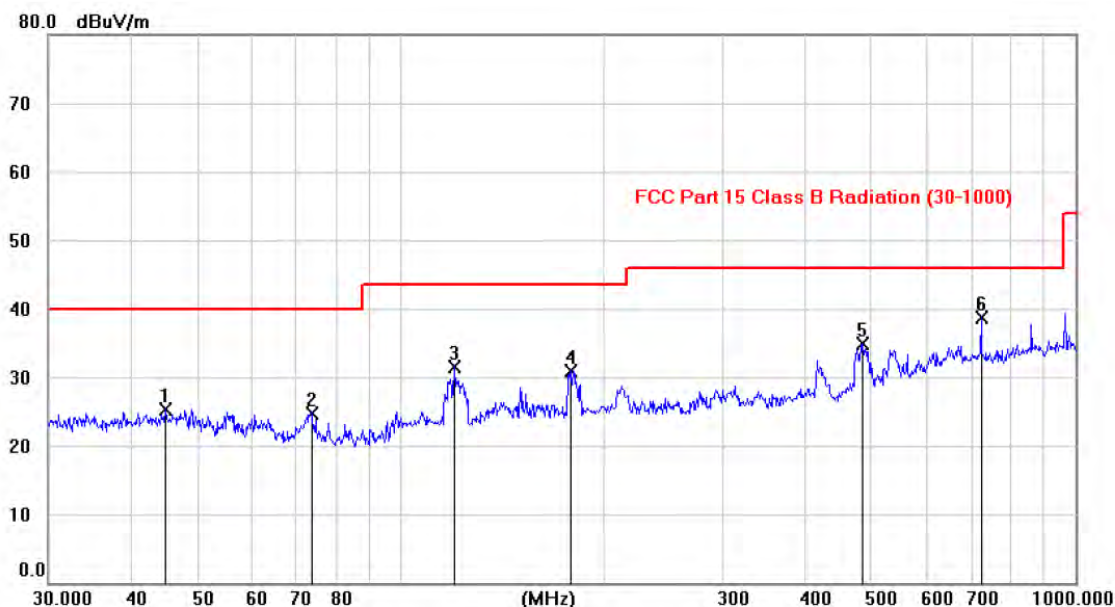


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		44.8534	11.26	14.12	25.38	40.00	-14.62	peak	
2		73.7806	13.95	10.81	24.76	40.00	-15.24	peak	
3		119.9957	18.38	13.04	31.42	43.50	-12.08	peak	
4		178.4244	18.04	12.90	30.94	43.50	-12.56	peak	
5		483.1182	16.99	17.99	34.98	46.00	-11.02	peak	
6	*	724.5997	16.64	22.08	38.72	46.00	-7.28	peak	

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Antenna polarity: Vertical

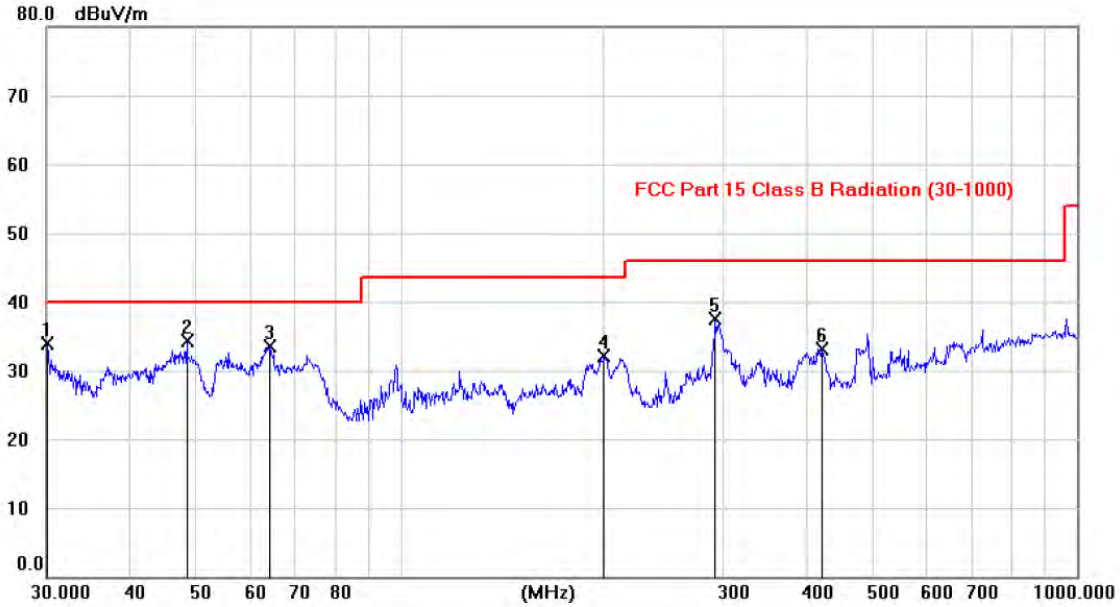

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		30.0948	20.31	13.53	33.84	40.00	-6.16	peak	
2	*	48.3996	20.32	14.06	34.38	40.00	-5.62	peak	
3		64.2825	21.04	12.41	33.45	40.00	-6.55	peak	
4		200.3130	21.23	10.91	32.14	43.50	-11.36	peak	
5		292.9129	23.60	13.94	37.54	46.00	-8.46	peak	
6		420.5311	16.43	16.75	33.18	46.00	-12.82	peak	

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Notes: Above is below 1GHz test data. This report only shall the worst case mode for TX 2402MHz(1Mbps).

1Mbps:
From 1G-25GHz


Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	48.49	V	33.93	10.18	34.26	58.34	74	-15.66	PK
4804	36.31	V	33.93	10.18	34.26	46.16	54	-7.84	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	47.39	H	33.93	10.18	34.26	57.24	74	-16.76	PK
4804	35.80	H	33.93	10.18	34.26	45.65	54	-8.35	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	49.05	V	33.95	10.20	34.26	58.94	74	-15.06	PK
4880	35.11	V	33.95	10.20	34.26	45.00	54	-9.00	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	48.91	H	33.95	10.20	34.26	58.80	74	-15.20	PK
4880	35.39	H	33.95	10.20	34.26	45.28	54	-8.72	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	47.47	V	33.98	10.22	34.25	57.42	74	-16.58	PK
4960	34.75	V	33.98	10.22	34.25	44.70	54	-9.30	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	47.22	H	33.98	10.22	34.25	57.17	74	-16.83	PK
4960	34.06	H	33.98	10.22	34.25	44.01	54	-9.99	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

2Mbps:
From 1G-25GHz

Test Mode: TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	44.68	V	33.95	10.18	34.26	54.55	74	-19.45	PK
4804	39.16	V	33.95	10.18	34.26	49.03	54	-4.97	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.08	H	33.95	10.18	34.26	55.95	74	-18.05	PK
4804	34.09	H	33.95	10.18	34.26	43.96	54	-10.04	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: TX Mid									
4880	44.89	V	33.93	10.2	34.29	54.73	74	-19.27	PK
4880	35.10	V	33.93	10.2	34.29	44.94	54	-9.06	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
4880	44.17	H	33.93	10.2	34.29	54.01	74	-19.99	PK
4880	33.76	H	33.93	10.2	34.29	43.60	54	-10.40	AV
7320	/	/	/	/	/	/	/	/	/
9760	/	/	/	/	/	/	/	/	/
Test Mode: TX High									
4960	45.16	V	33.98	10.22	34.25	55.11	74	-18.89	PK
4960	36.49	V	33.98	10.22	34.25	46.44	54	-7.56	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	43.59	H	33.98	10.22	34.25	53.54	74	-20.46	PK
4960	34.12	H	33.98	10.22	34.25	44.07	54	-9.93	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


Conducted RF Spurious Emission

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

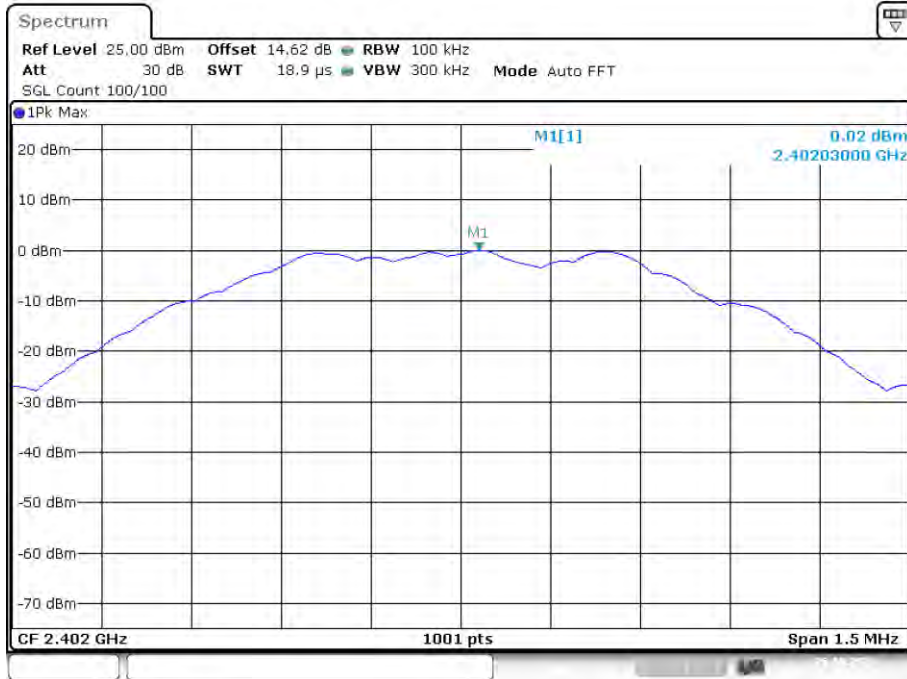


Date: 26.OCT.2023 06:49:50

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

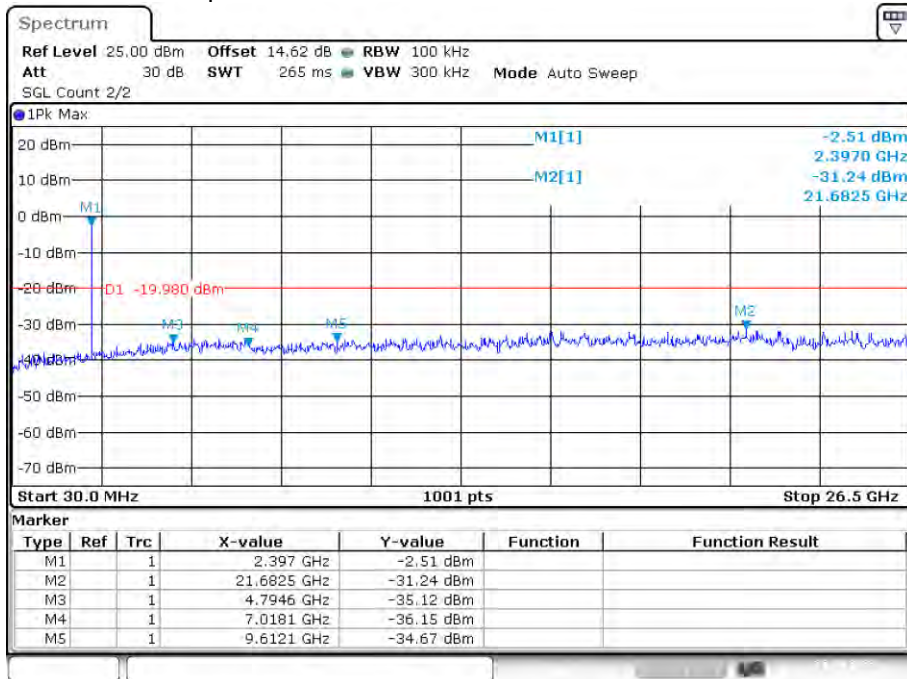


Date: 26.OCT.2023 06:49:55

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

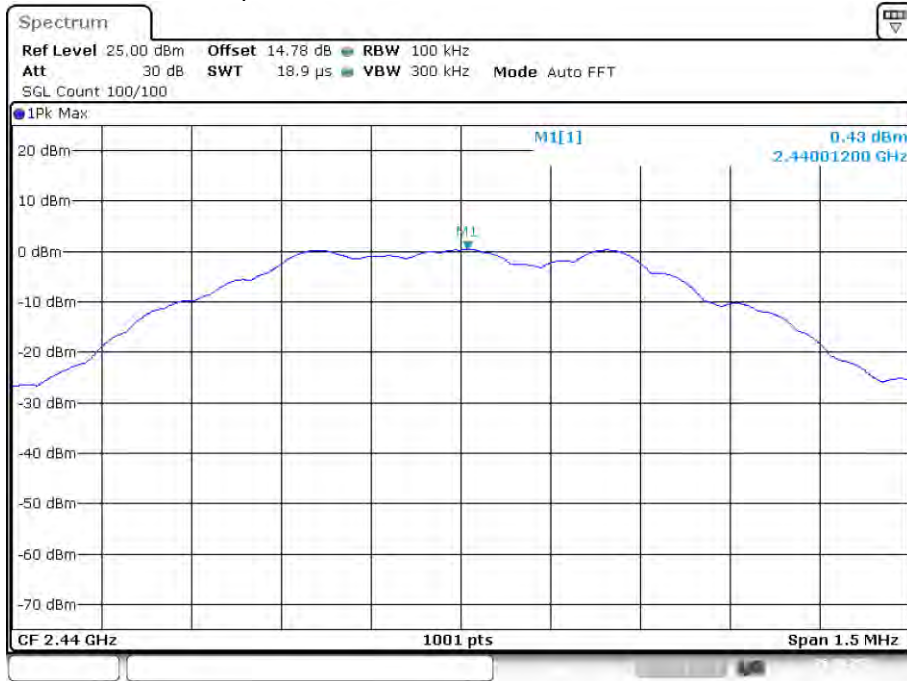


Date: 26.OCT.2023 06:46:46

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

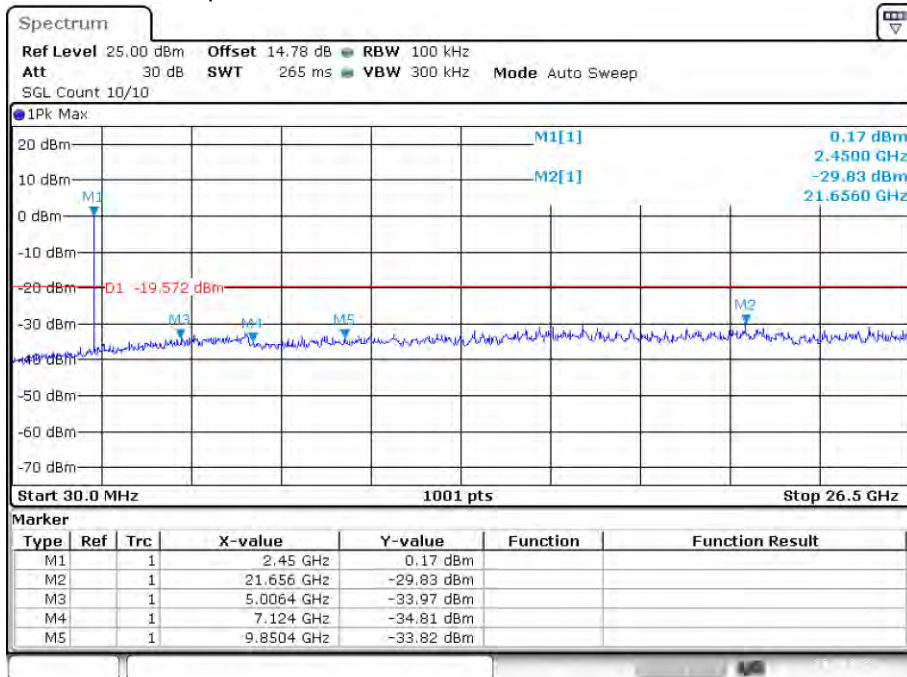


Date: 26.OCT.2023 06:47:03

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

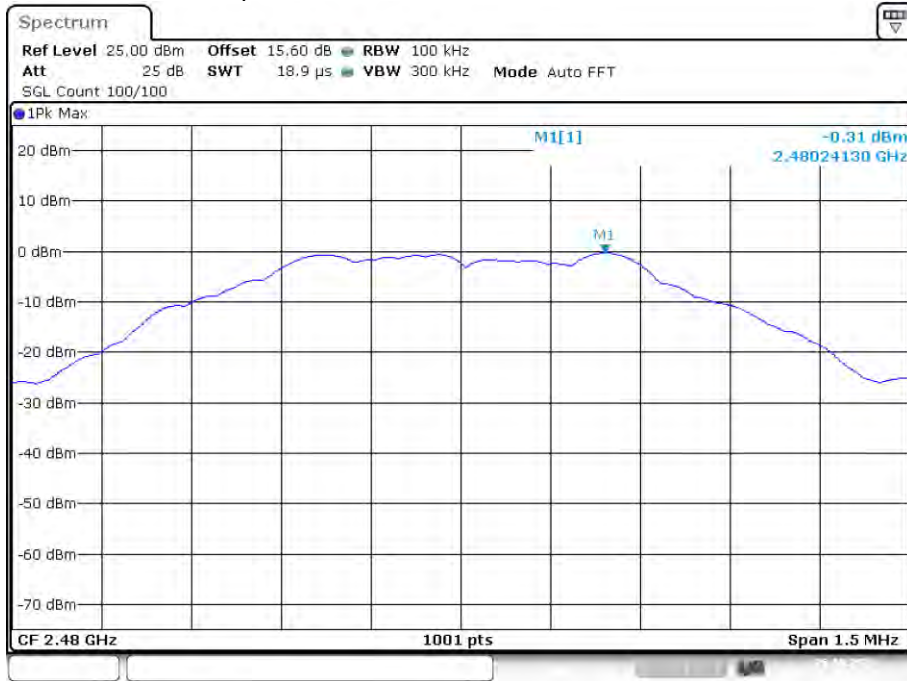


Date: 26.OCT.2023 06:42:47

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

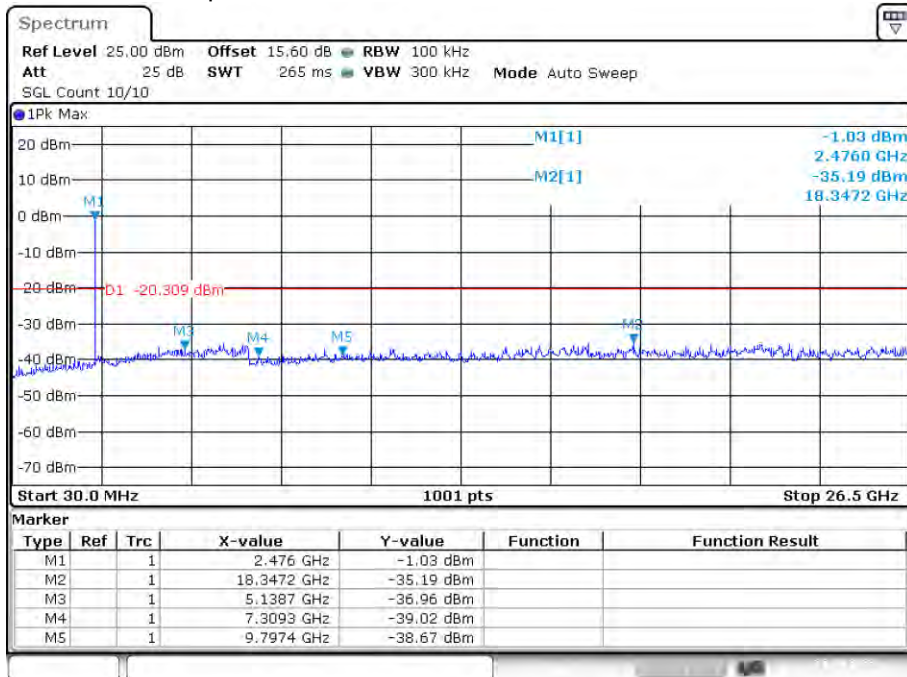


Date: 26.OCT.2023 06:43:04

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

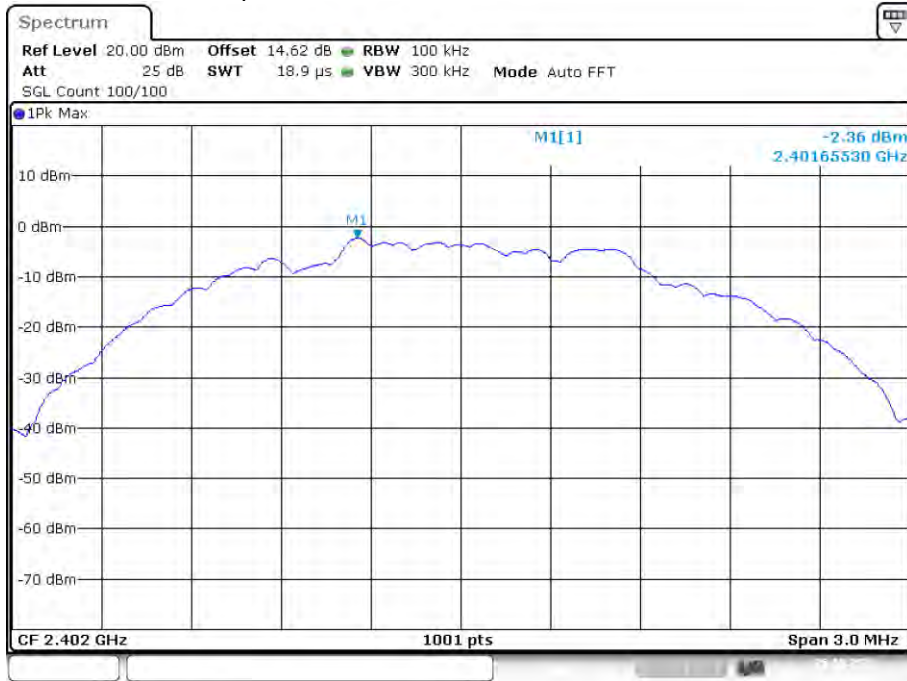

Date: 26.OCT.2023 05:58:32

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

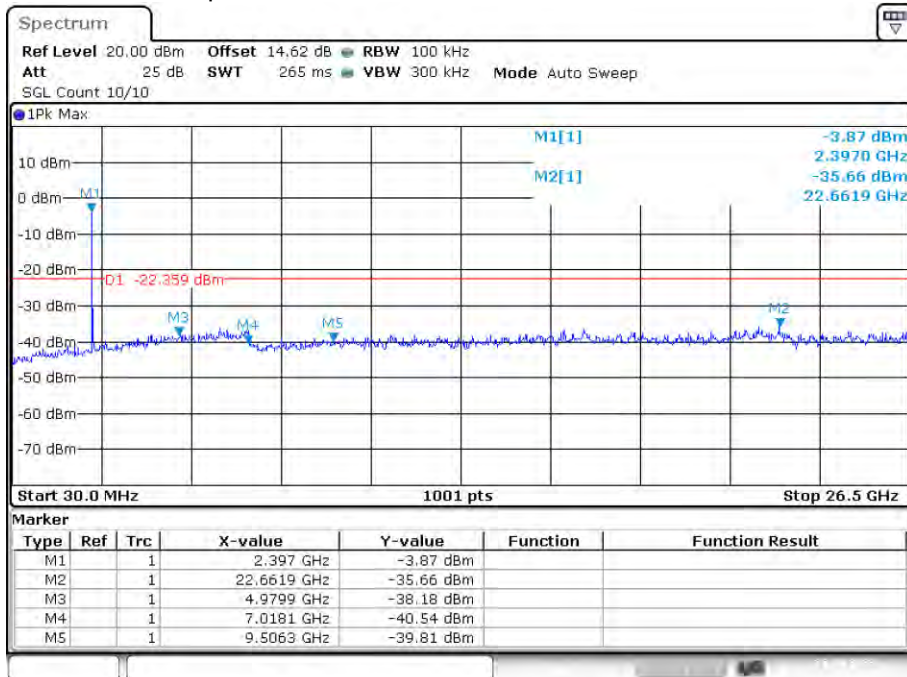


Date: 26.OCT.2023 05:58:50

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref



Date: 26.OCT.2023 06:36:17

Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

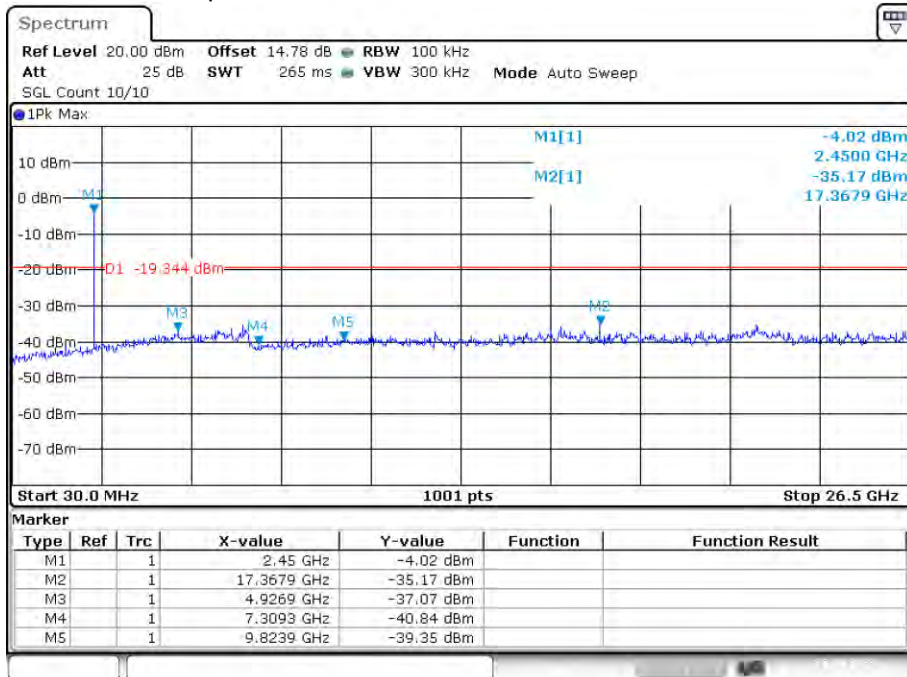


Date: 26.OCT.2023 06:36:34

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref



Date: 26.OCT.2023 06:38:21

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

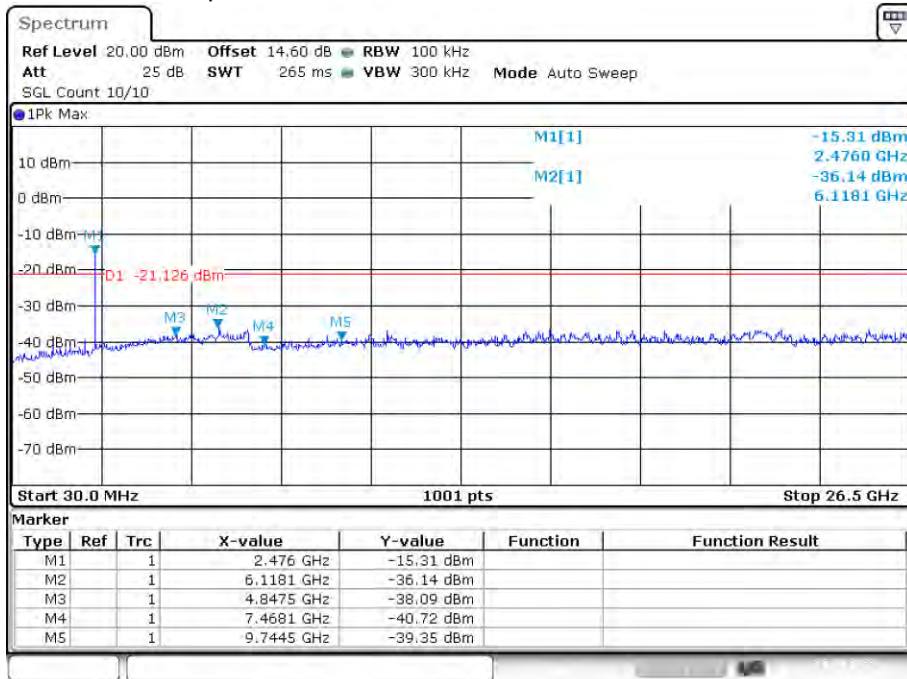

Date: 26.OCT.2023 06:38:39

4. POWER LINE CONDUCTED EMISSION

4.1. Test Limits

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in rang of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.1m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.


4.3. Test Setup

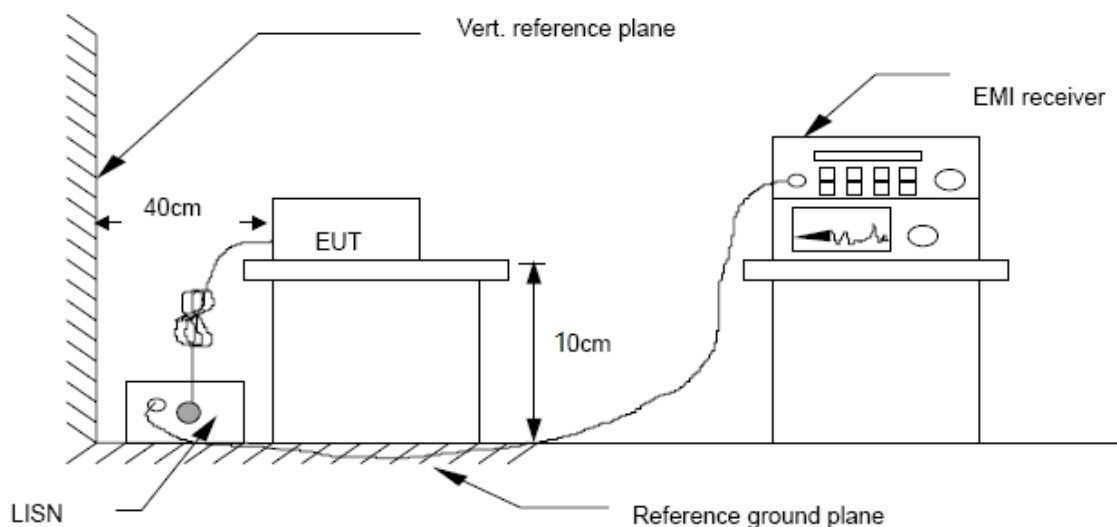

4.4. Test Results

Pass

Polarity: L

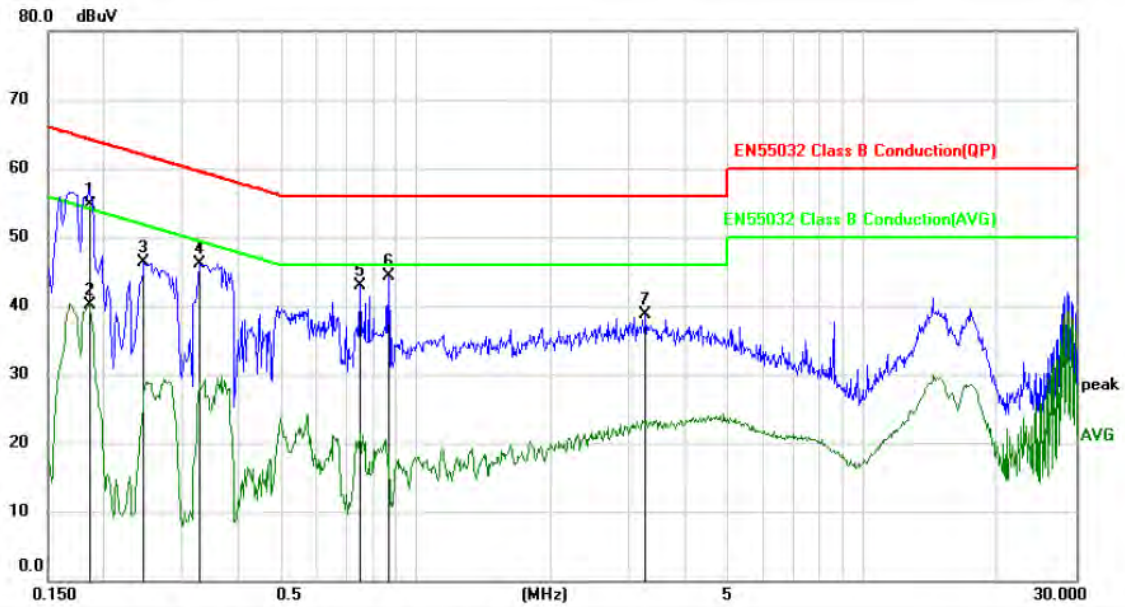


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1860	44.85	9.92	54.77	64.21	-9.44	QP	
2		0.1860	30.09	9.92	40.01	54.21	-14.20	AVG	
3		0.2460	36.34	9.97	46.31	61.89	-15.58	peak	
4		0.3270	36.12	9.94	46.06	59.53	-13.47	peak	
5		0.7500	32.87	9.94	42.81	56.00	-13.19	peak	
6		0.8670	34.30	9.96	44.26	56.00	-11.74	peak	
7		3.2670	28.68	9.95	38.63	56.00	-17.37	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Polarity: N

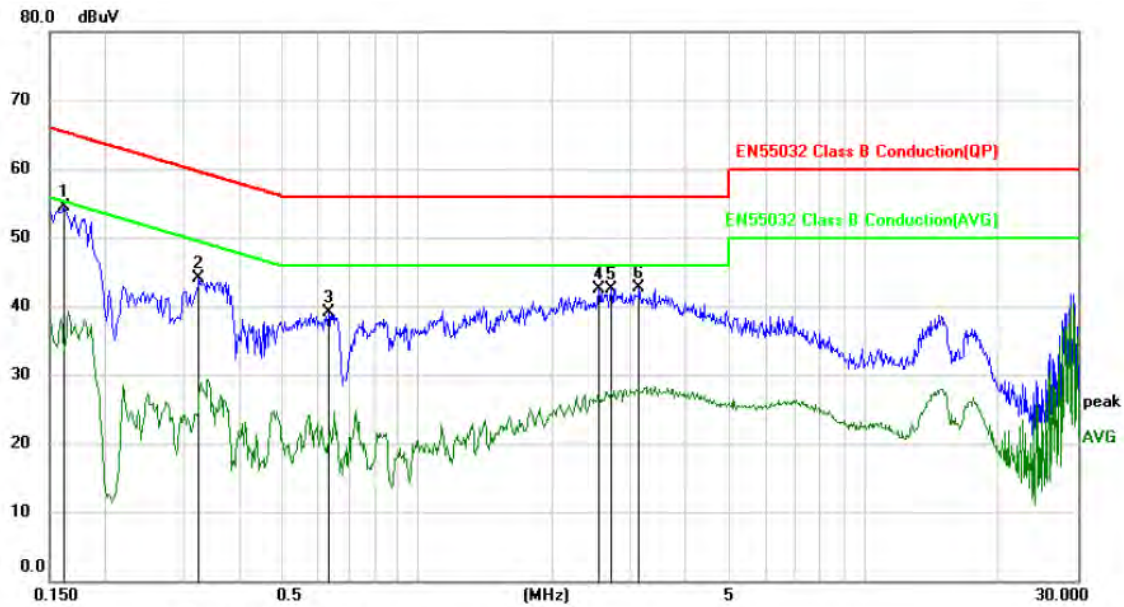

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1620	44.55	9.93	54.48	65.36	-10.88	peak	
2		0.3240	34.24	9.93	44.17	59.60	-15.43	peak	
3		0.6330	29.15	9.92	39.07	56.00	-16.93	peak	
4		2.5530	32.56	9.91	42.47	56.00	-13.53	peak	
5		2.7150	32.68	9.92	42.60	56.00	-13.40	peak	
6		3.1350	32.70	9.96	42.66	56.00	-13.34	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the BLE 2402MHz(1Mbps) mode with the worst data is listed.

5. CONDUCTED MAXIMUM OUTPUT POWER

5.1. Test limits

Please refer section RSS-247 & 15.247.

5.2. Test Procedure


Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.3. Test Setup



5.4. Test Results


Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	Ant1	0.96	0	0.96	30	Pass
BLE 1M	2440	Ant1	1.433	0	1.433	30	Pass
BLE 1M	2480	Ant1	0.834	0	0.834	30	Pass
BLE 2M	2402	Ant1	1.357	0	1.357	30	Pass
BLE 2M	2440	Ant1	1.659	0	1.659	30	Pass
BLE 2M	2480	Ant1	0.375	0	0.375	30	Pass

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)
NVNT	BLE 1M	2402	Ant1	88.57
NVNT	BLE 1M	2440	Ant1	90.86
NVNT	BLE 1M	2480	Ant1	90.96


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)
NVNT	BLE 2M	2402	Ant1	78.57
NVNT	BLE 2M	2440	Ant1	83.24
NVNT	BLE 2M	2480	Ant1	84.09

Duty Cycle NVNT BLE 1M 2402MHz Ant1

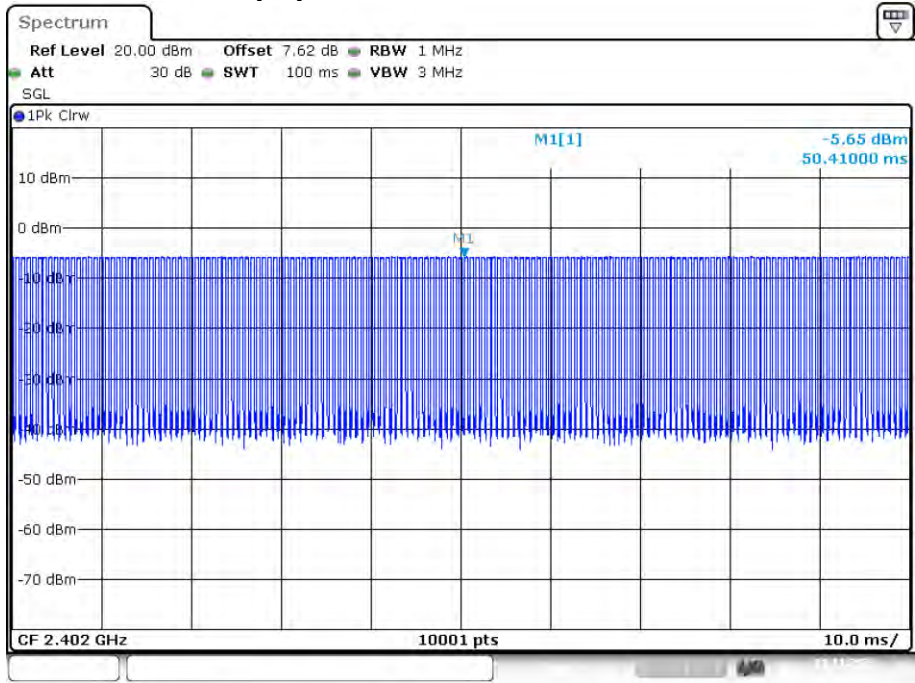


Date: 1.NOV.2023 15:25:49

Duty Cycle NVNT BLE 1M 2440MHz Ant1

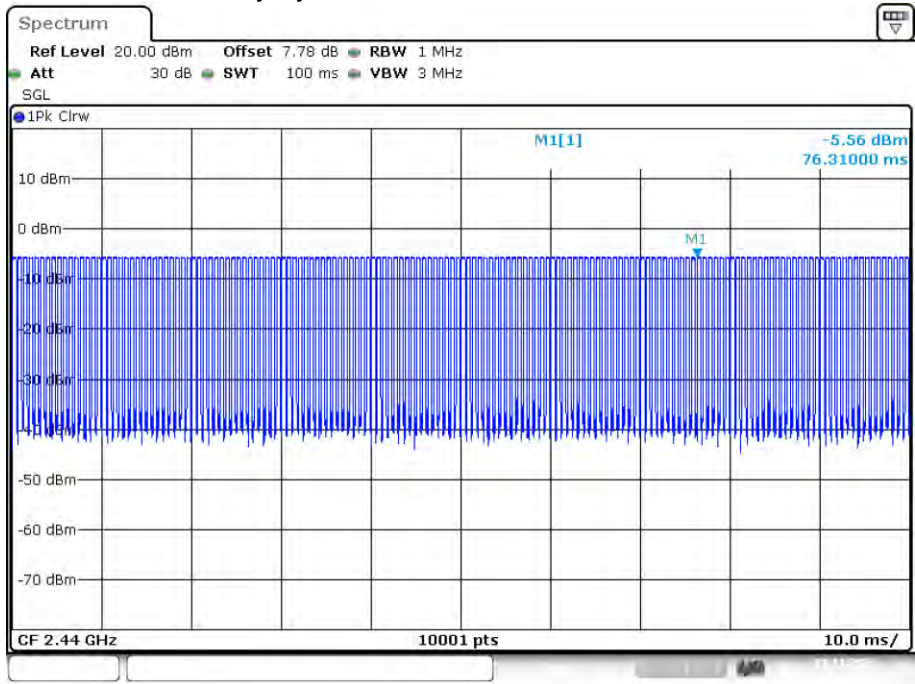


Date: 1.NOV.2023 15:24:02

Duty Cycle NVNT BLE 1M 2480MHz Ant1

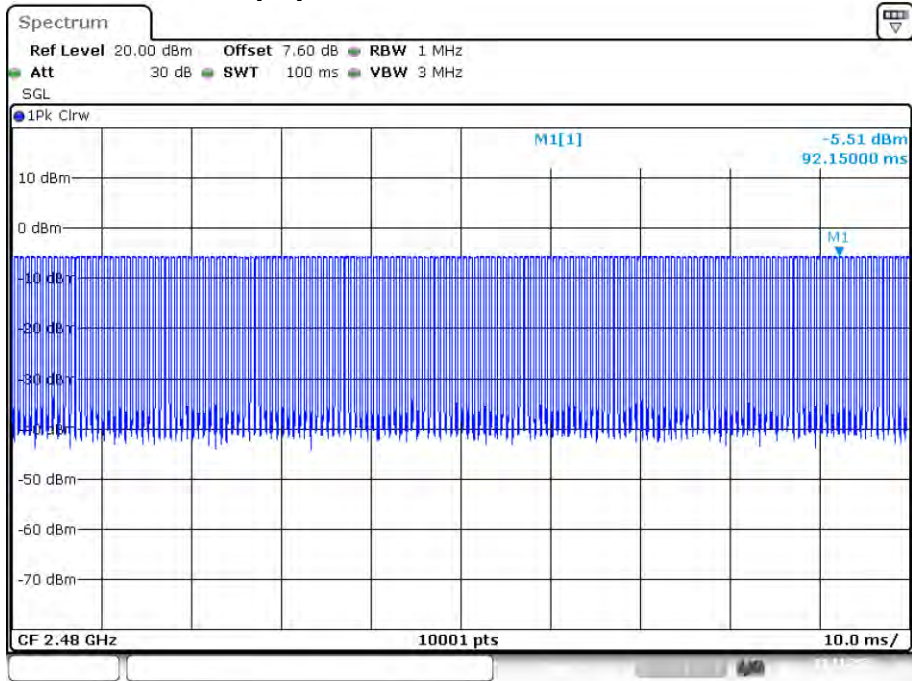


Date: 1.NOV.2023 15:23:40

Duty Cycle NVNT BLE 2M 2402MHz Ant1

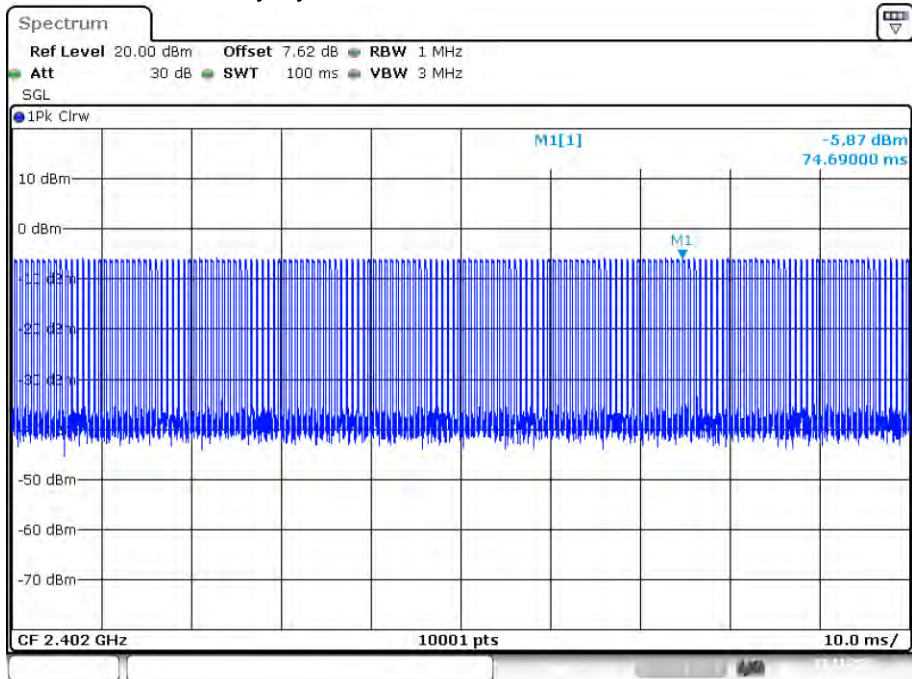


Date: 1.NOV.2023 15:20:38

Duty Cycle NVNT BLE 2M 2440MHz Ant1

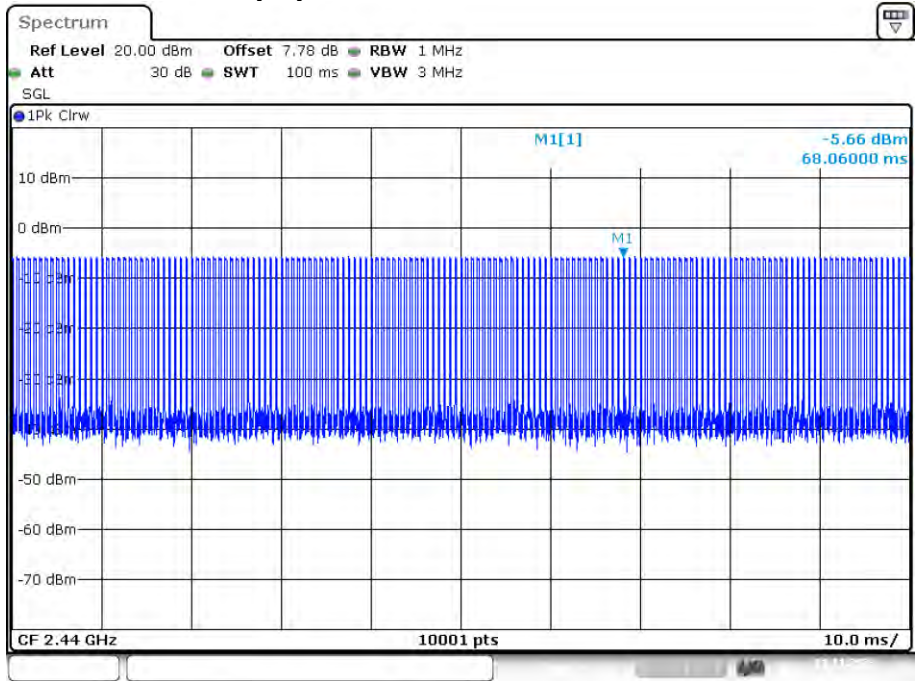

Date: 1.NOV.2023 15:21:41

Duty Cycle NVNT BLE 2M 2480MHz Ant1

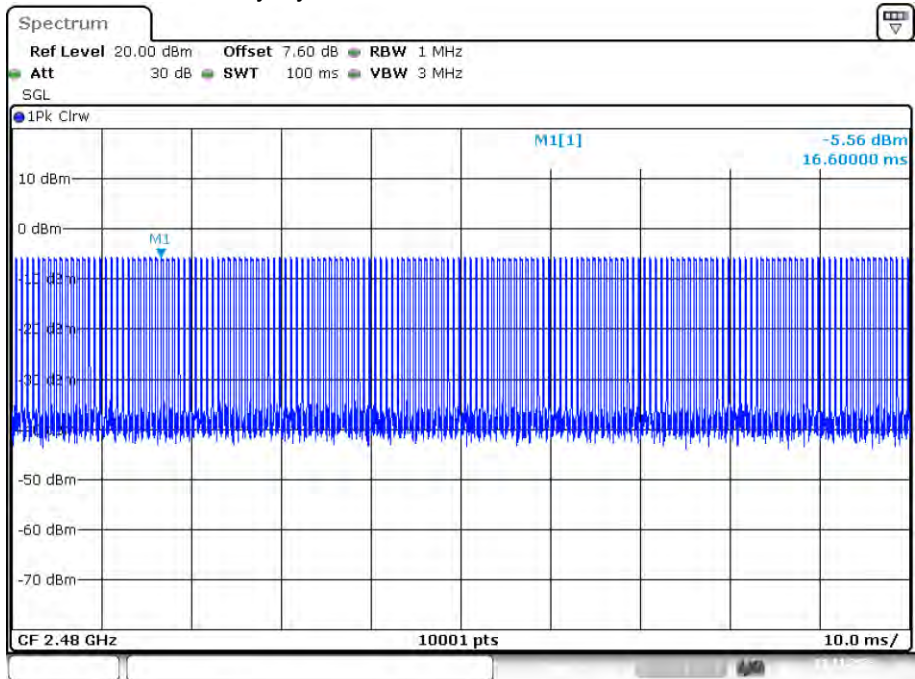

Date: 1.NOV.2023 15:22:04

6. PEAK POWER SPECTRAL DENSITY

6.1. Test limits

6.1.1 Please refer section RSS-247 & 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

6.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as RBW = 3kHz(Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.), VBW = 10kHz(Set the $\text{VBW} \geq 3 \times \text{RBW}$), span=1.5×DTS bandwidth., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.


6.3. Test Setup



6.4. Test Results


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-15.44	8	Pass
NVNT	BLE 1M	2440	Ant1	-14.977	8	Pass
NVNT	BLE 1M	2480	Ant1	-15.42	8	Pass
NVNT	BLE 2M	2402	Ant1	-17.59	8	Pass
NVNT	BLE 2M	2440	Ant1	-17.552	8	Pass
NVNT	BLE 2M	2480	Ant1	-18.647	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1

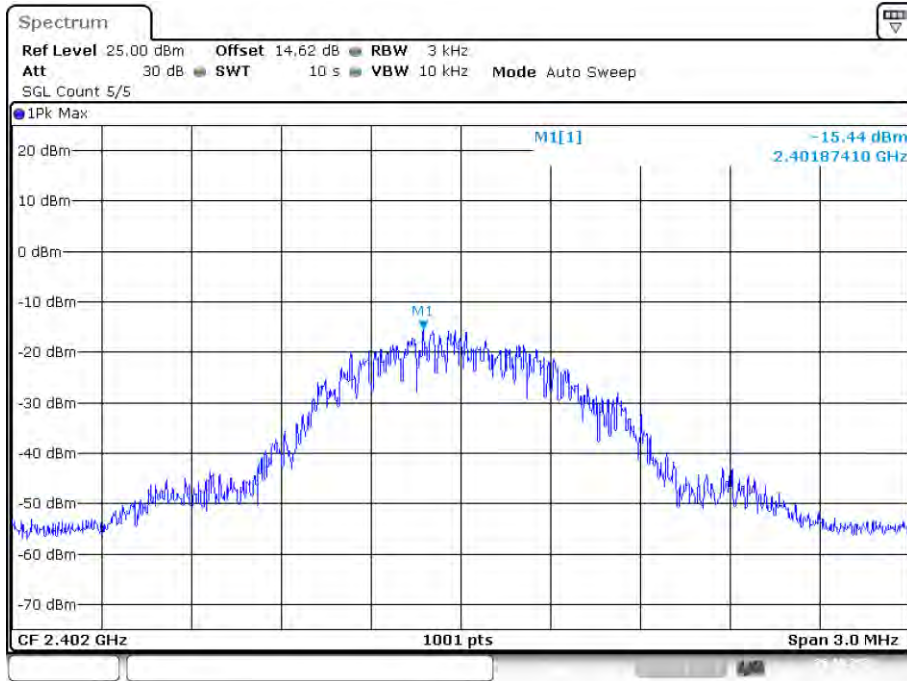


Date: 26.OCT.2023 06:49:31

PSD NVNT BLE 1M 2440MHz Ant1

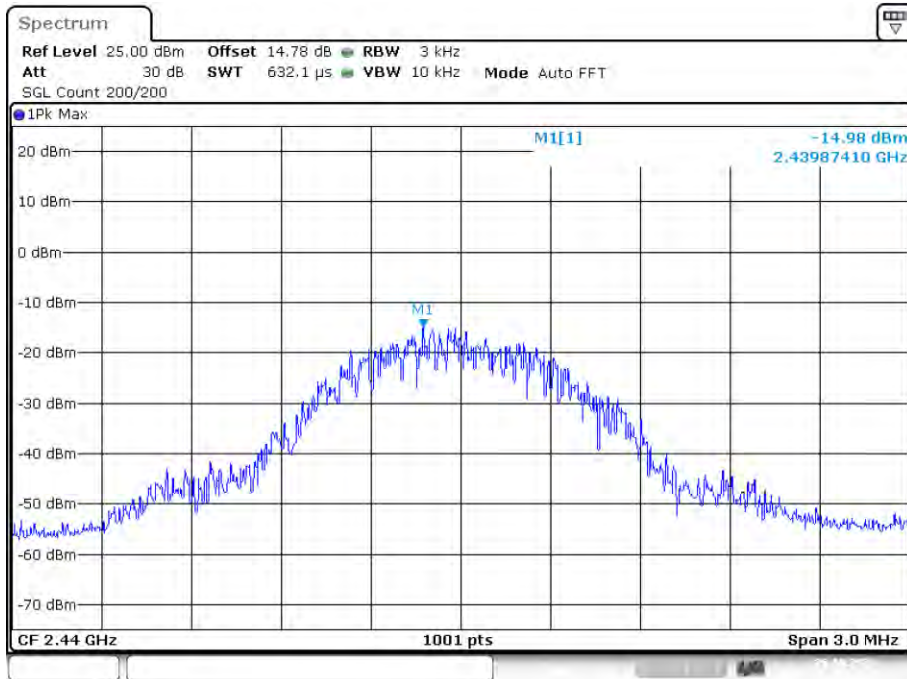


Date: 26.OCT.2023 06:46:40

PSD NVNT BLE 1M 2480MHz Ant1

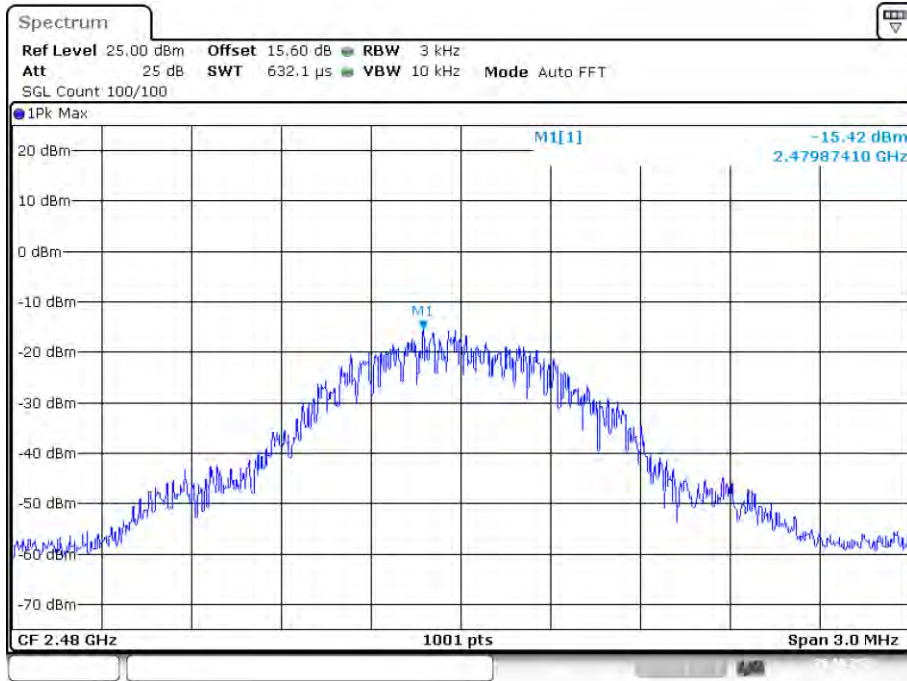


Date: 26.OCT.2023 06:42:29

PSD NVNT BLE 2M 2402MHz Ant1

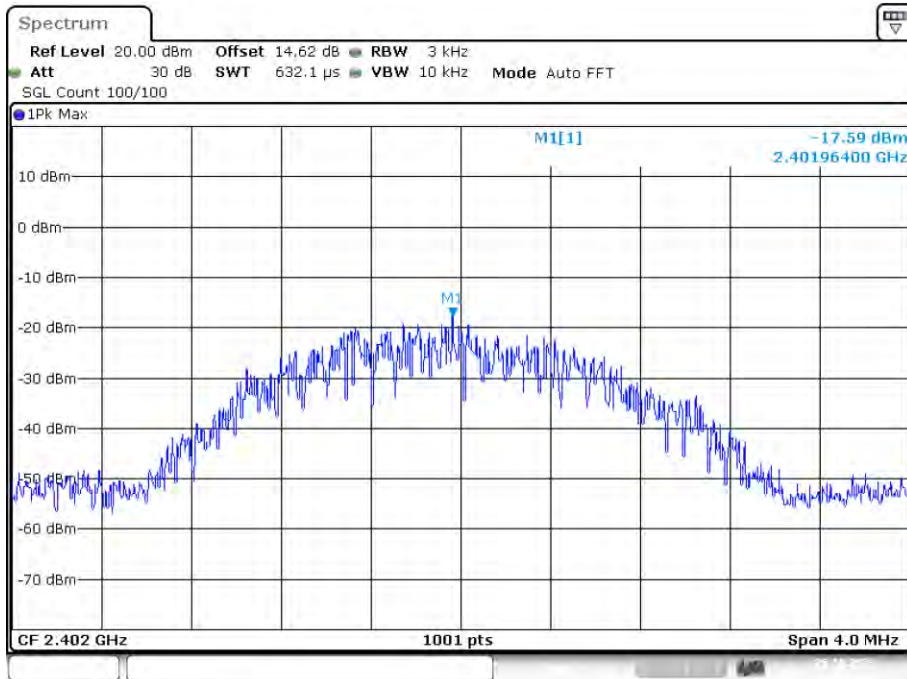


Date: 26.OCT.2023 05:58:14

PSD NVNT BLE 2M 2440MHz Ant1

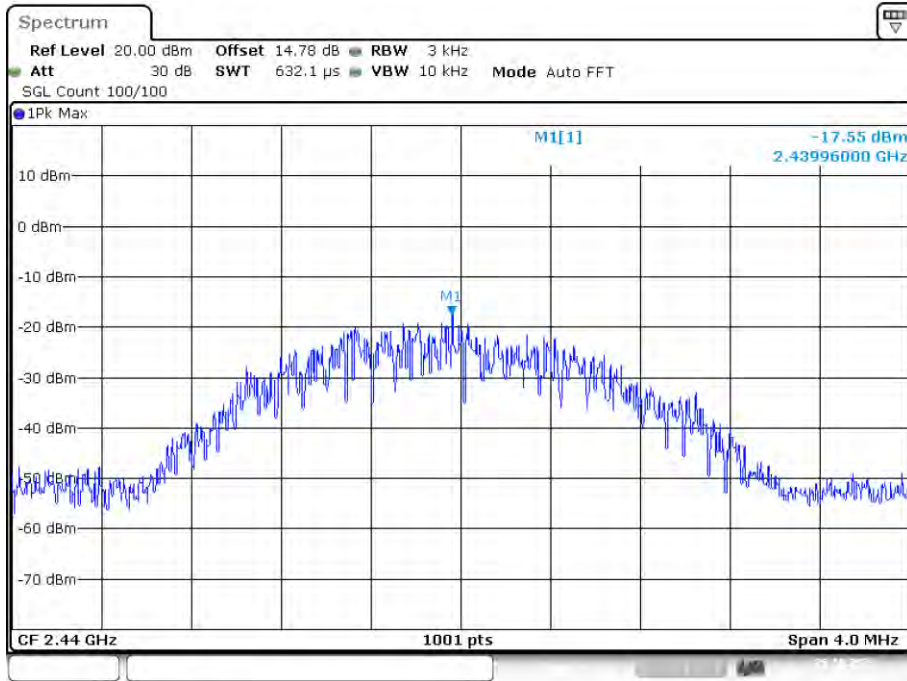

Date: 26.OCT.2023 06:36:09

PSD NVNT BLE 2M 2480MHz Ant1

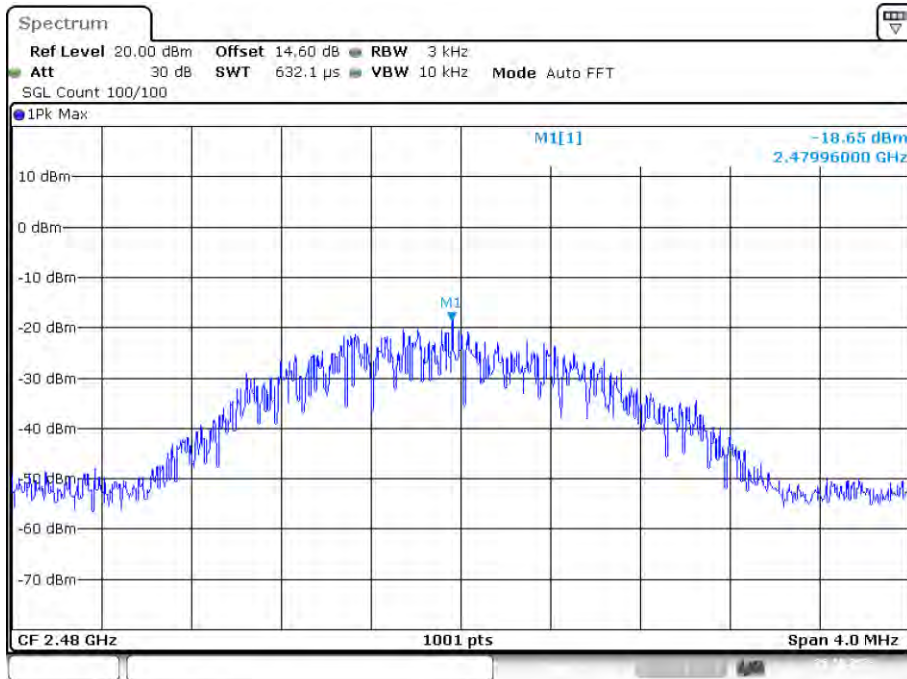

Date: 26.OCT.2023 06:38:01

7. BANDWIDTH

7.1. Test limits

Please refer section RSS-247 & 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.


7.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = 100kHz, VBW \geq 3*RBW =300kHz, sweep time set auto, detail see the test plot.

7.3. Test Setup




7.4. Test Results

-6dB Bandwidth


Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	Ant1	0.732	0.5	Pass
BLE 1M	2440	Ant1	0.725	0.5	Pass
BLE 1M	2480	Ant1	0.685	0.5	Pass
BLE 2M	2402	Ant1	1.016	0.5	Pass
BLE 2M	2440	Ant1	1.058	0.5	Pass
BLE 2M	2480	Ant1	1.171	0.5	Pass

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

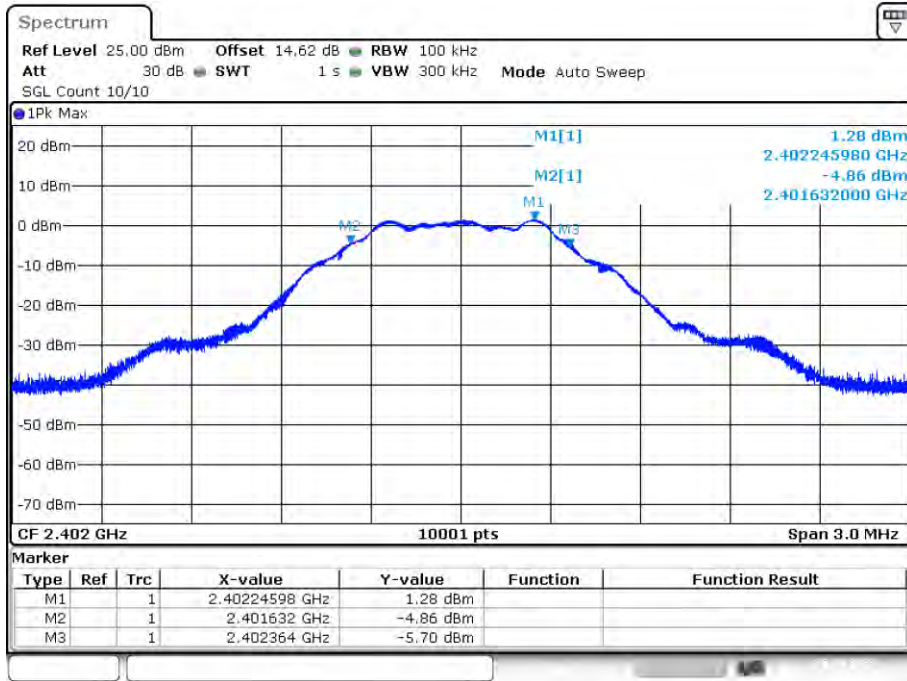


Date: 26.OCT.2023 06:48:34

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

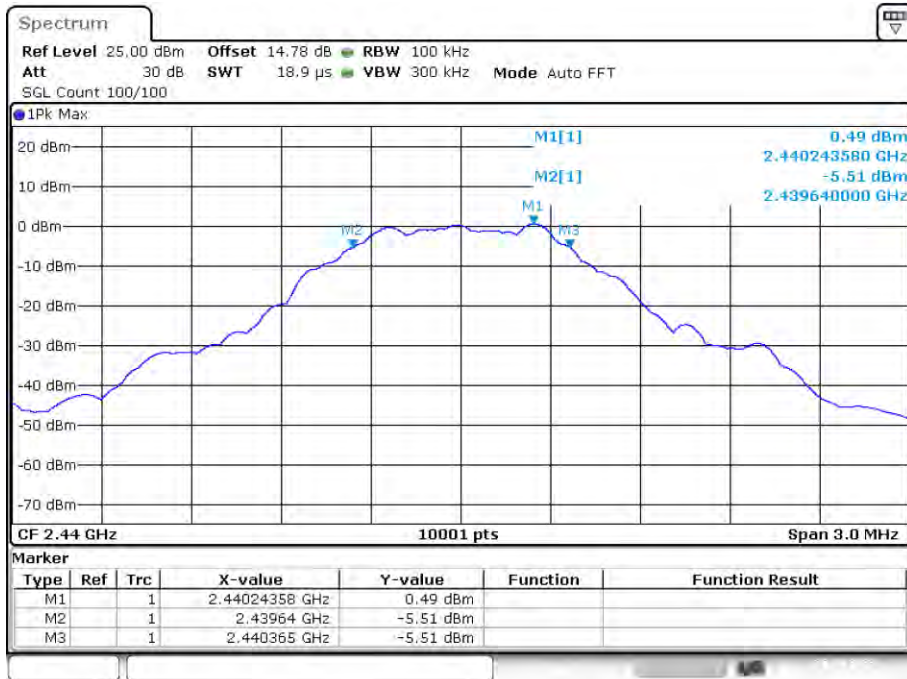


Date: 26.OCT.2023 06:46:32

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

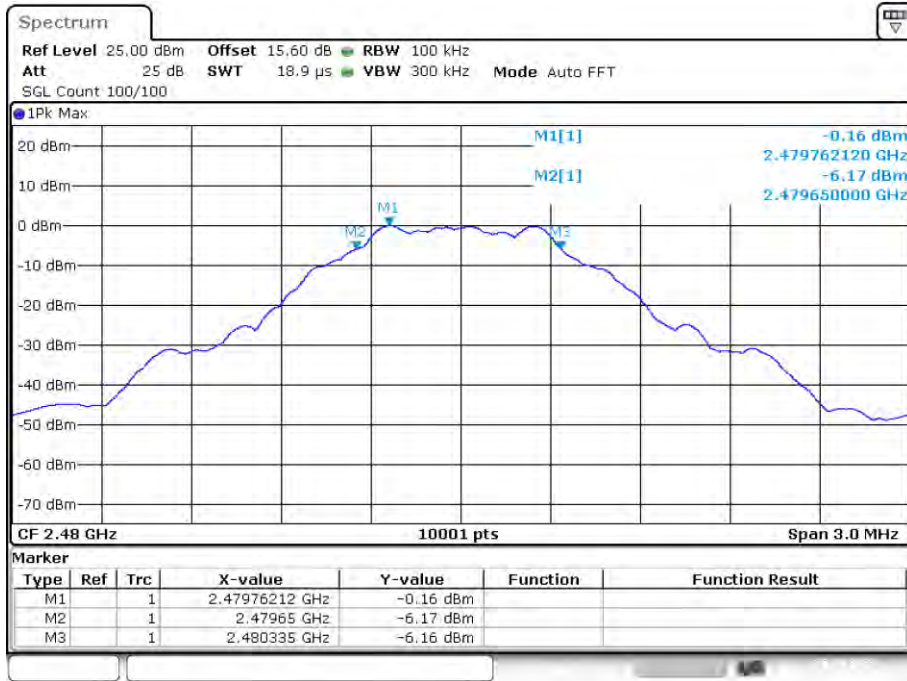


Date: 26.OCT.2023 06:42:22

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

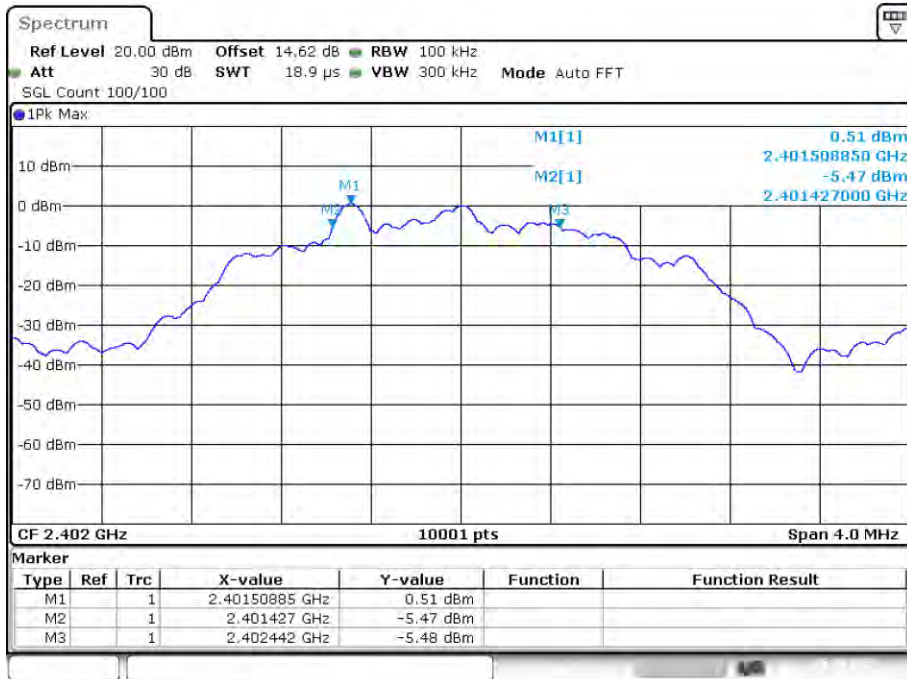


Date: 26.OCT.2023 05:58:07

-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

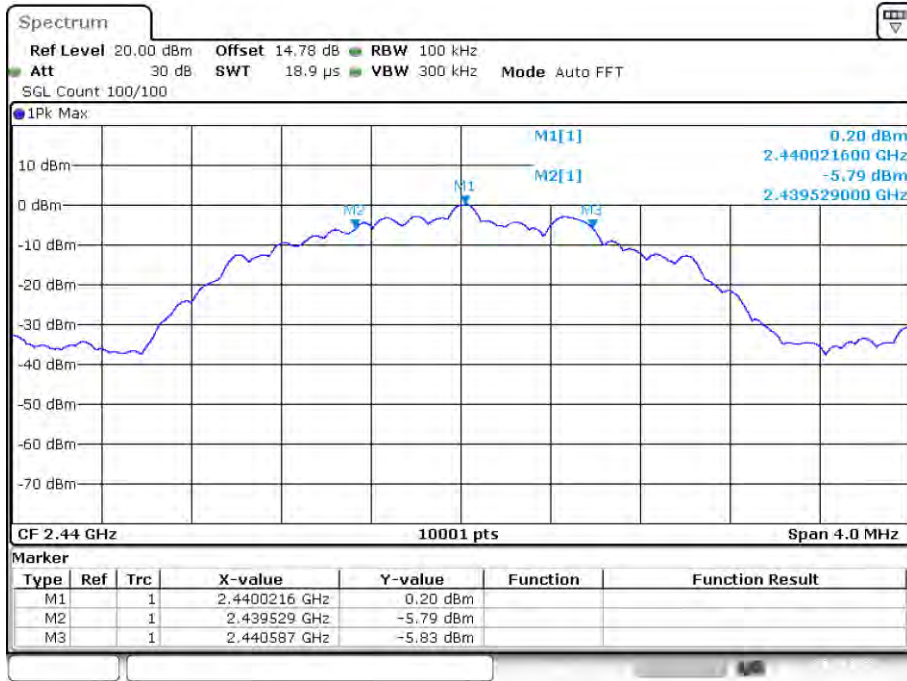

Date: 26.OCT.2023 06:36:02

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

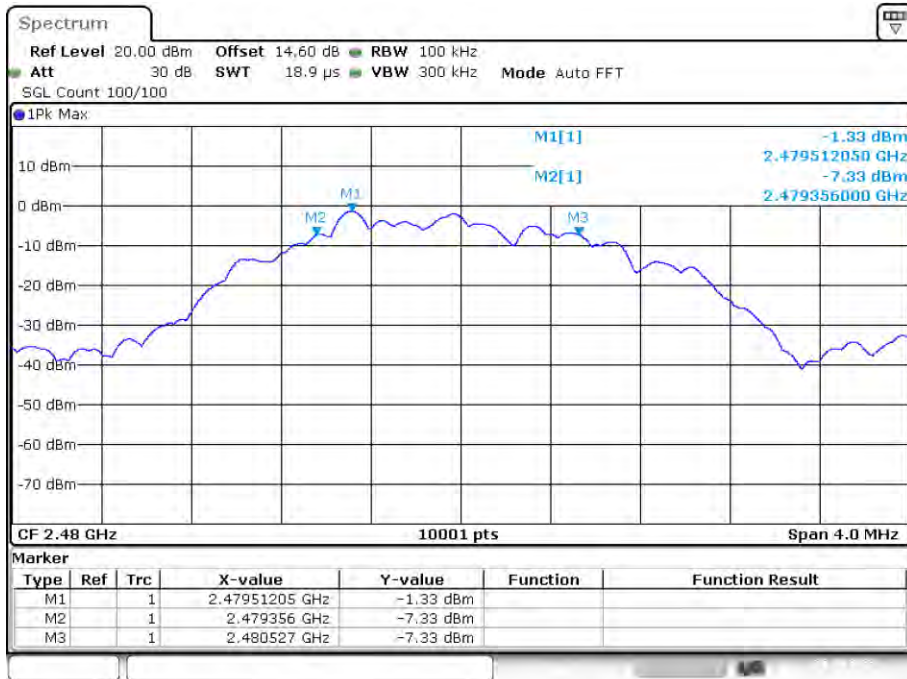


Date: 26.OCT.2023 06:37:53

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.04
NVNT	BLE 1M	2440	Ant1	1.046
NVNT	BLE 1M	2480	Ant1	1.052
NVNT	BLE 2M	2402	Ant1	2.046
NVNT	BLE 2M	2440	Ant1	2.042
NVNT	BLE 2M	2480	Ant1	2.042

OBW NVNT BLE 1M 2402MHz Ant1

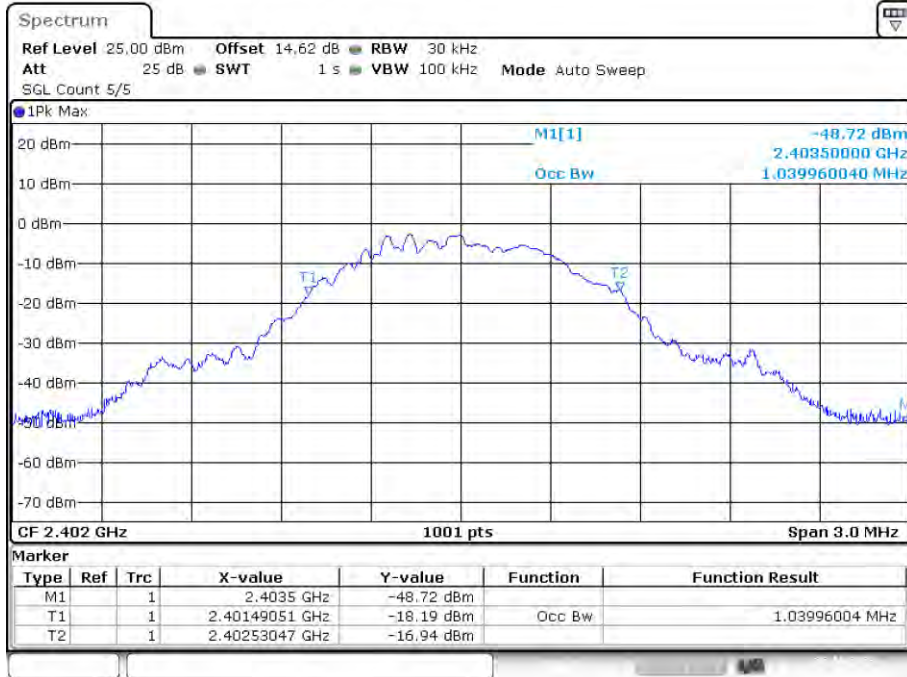


Date: 26.OCT.2023 06:48:15


OBW NVNT BLE 1M 2440MHz Ant1

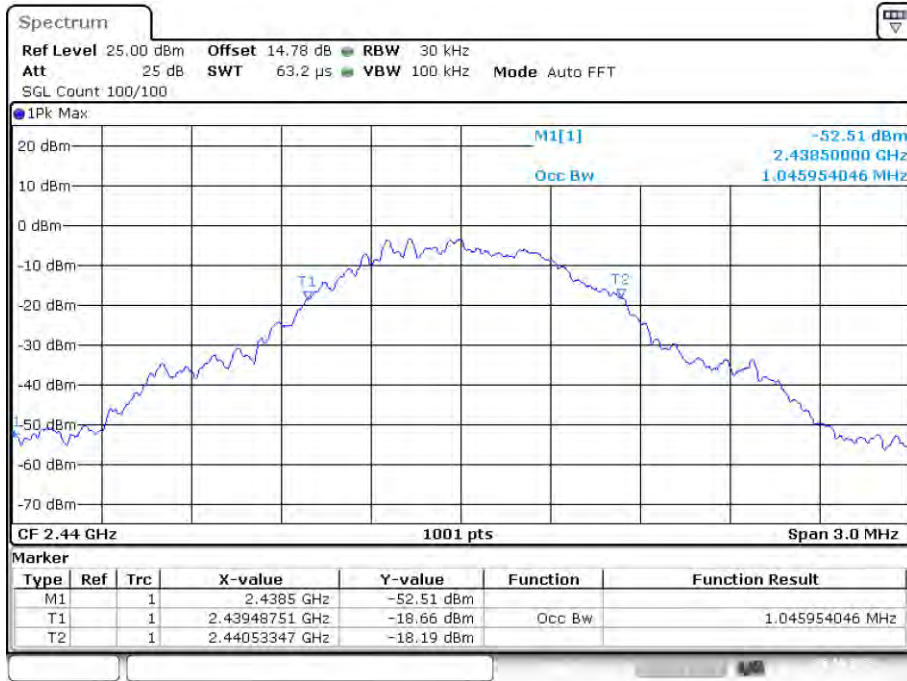

OBW NVNT BLE 1M 2480MHz Ant1

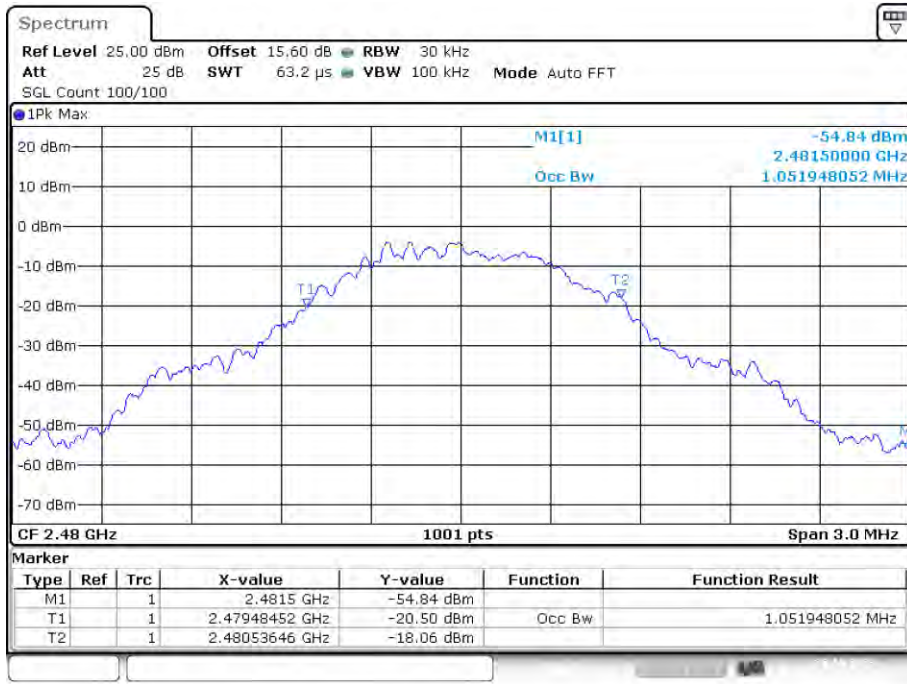


OBW NVNT BLE 2M 2402MHz Ant1

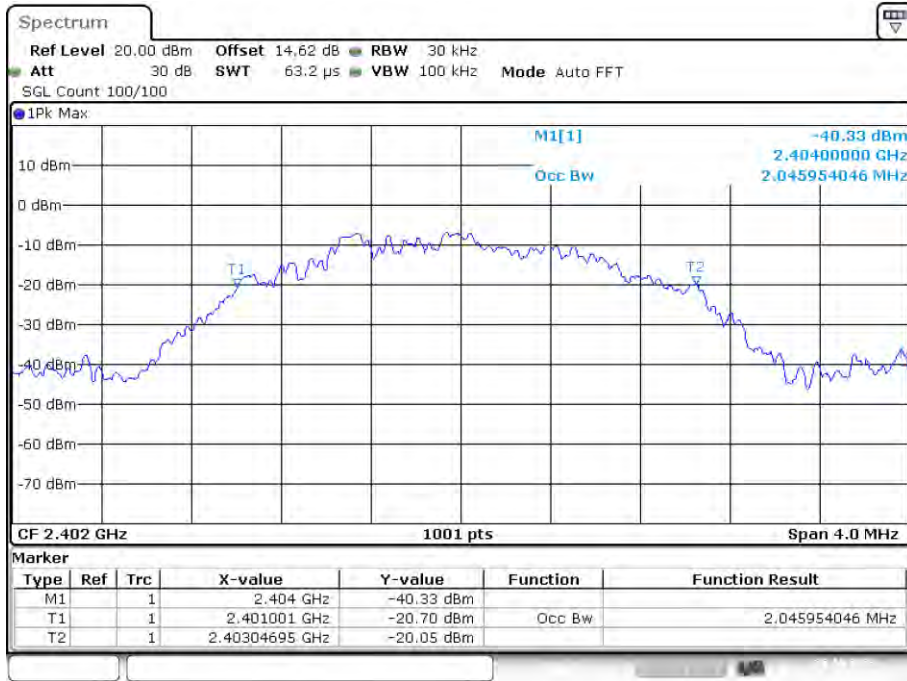


Date: 26.OCT.2023 05:57:59

OBW NVNT BLE 2M 2440MHz Ant1

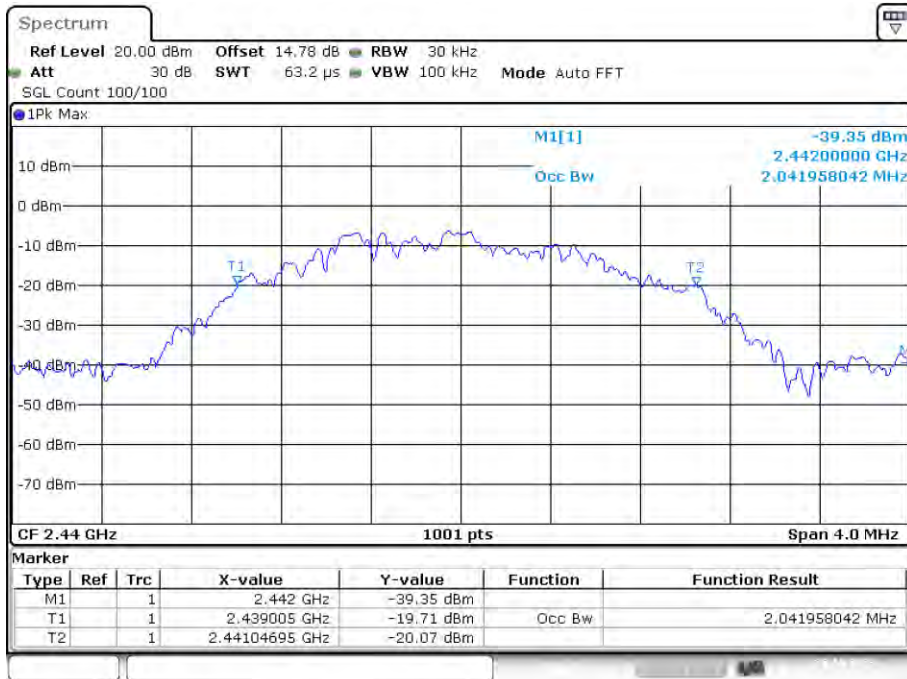

Date: 26.OCT.2023 06:35:53

OBW NVNT BLE 2M 2480MHz Ant1

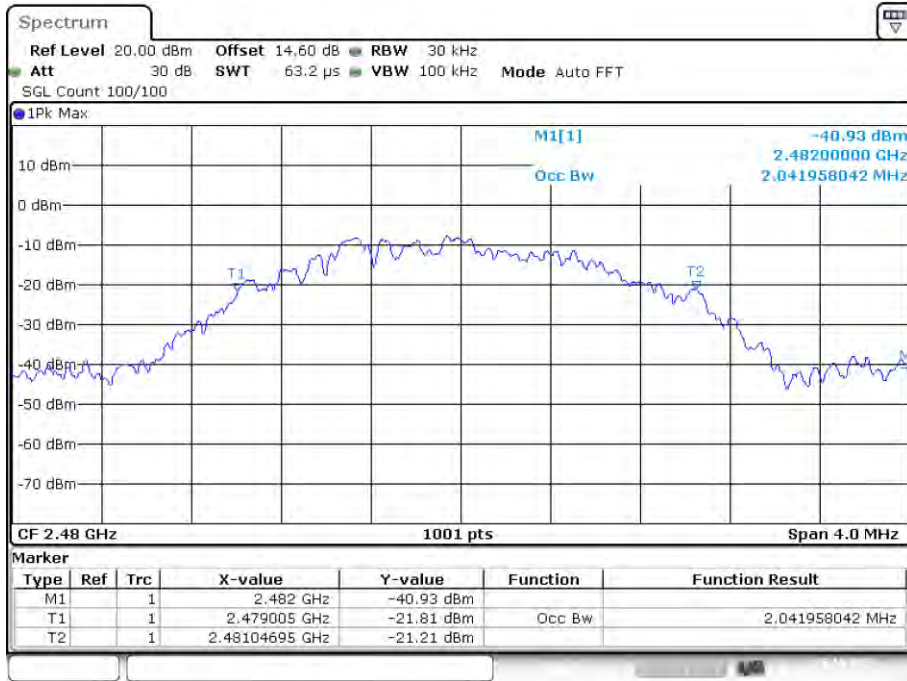

Date: 26.OCT.2023 06:37:44

8. BAND EDGE CHECK

8.1. Test limits

Please refer section RSS-GEN&15.247.

8.2. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

8.2.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 3MHz, RMS detector for AV value.

8.3. Test Setup


Same as 5.2.2.

8.4. Test Results

Pass


The test results are listed in next pages.

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

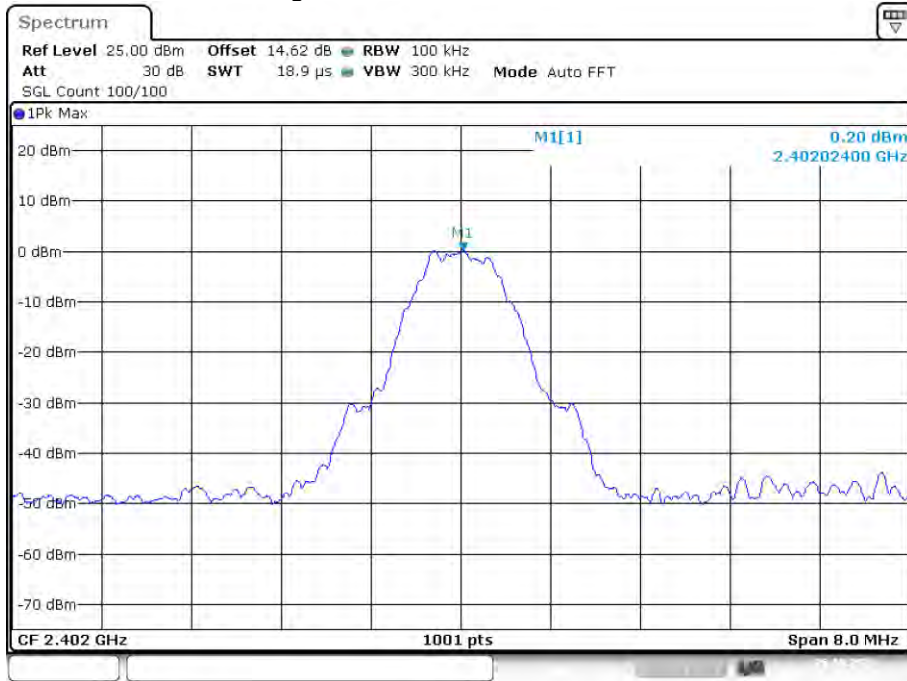


Date: 26.OCT.2023 06:49:37

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

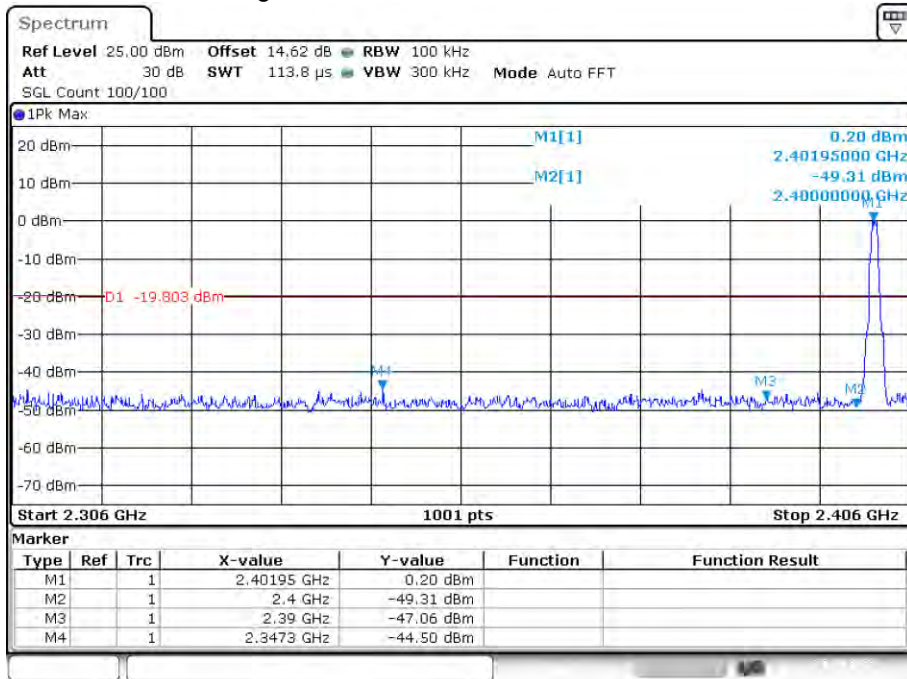


Date: 26.OCT.2023 06:49:43

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

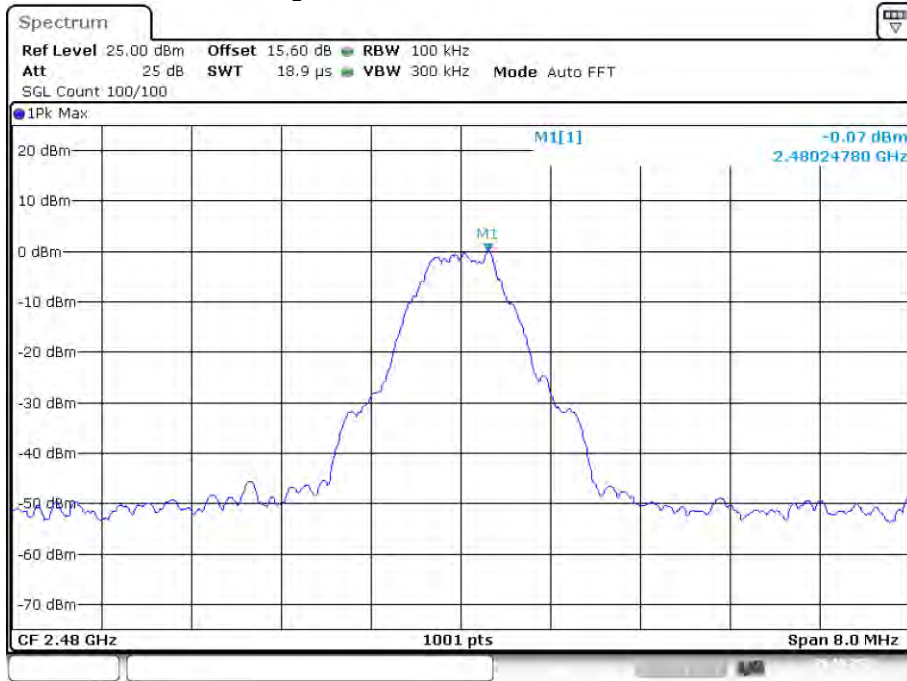

Date: 26.OCT.2023 06:42:35

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

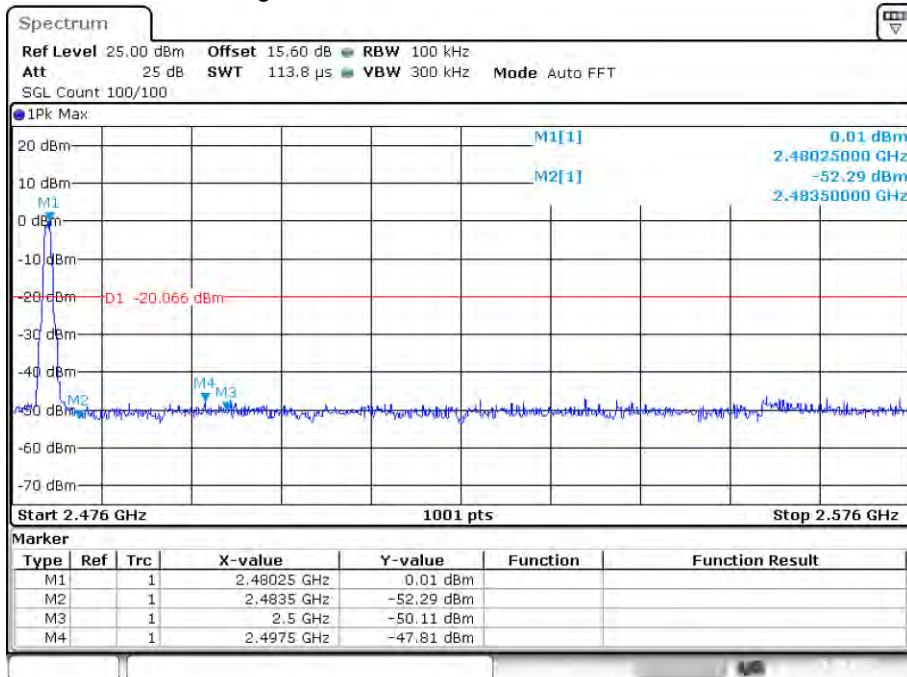


Date: 26.OCT.2023 06:42:40

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref



Date: 26.OCT.2023 05:58:20

Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

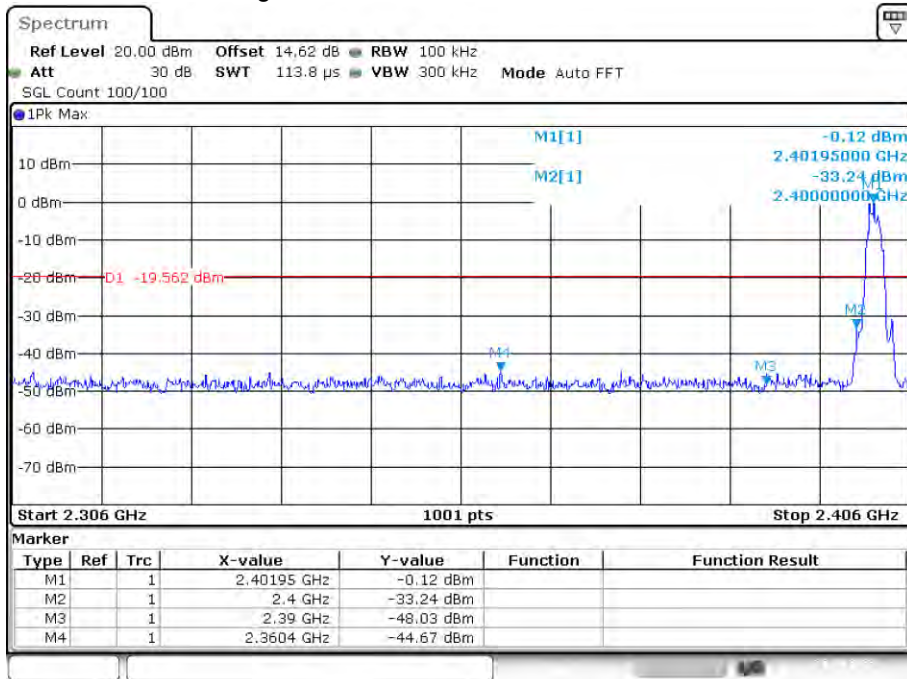


Date: 26.OCT.2023 05:58:26

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref



Date: 26.OCT.2023 06:38:08


Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

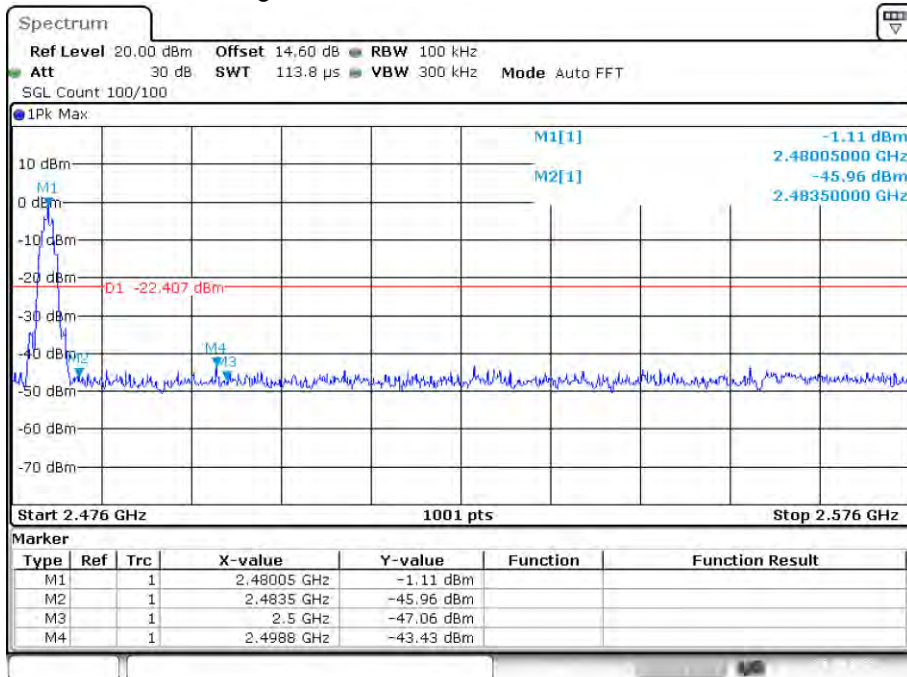


Date: 26.OCT.2023 06:38:14

Radiated Method: GFSK(1Mbps)

Test Mode: CH-L

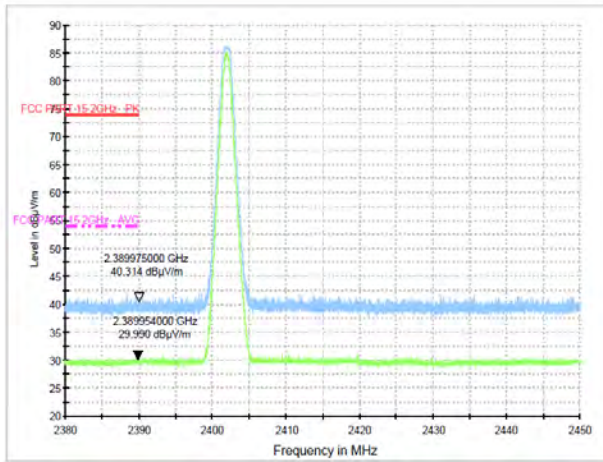


Test Mode: CH-H

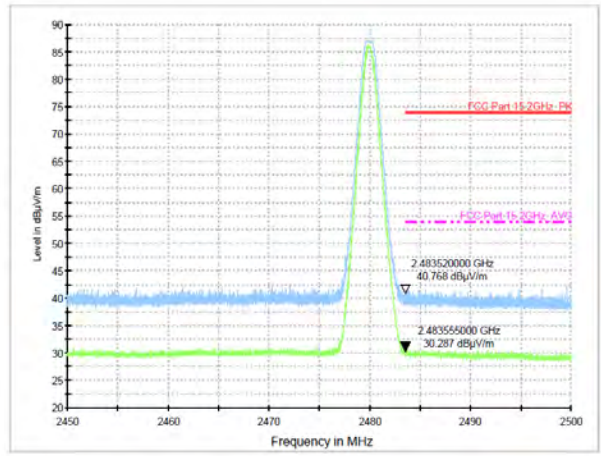


Radiated Method: GFSK(2Mbps)

Test Mode: CH-L

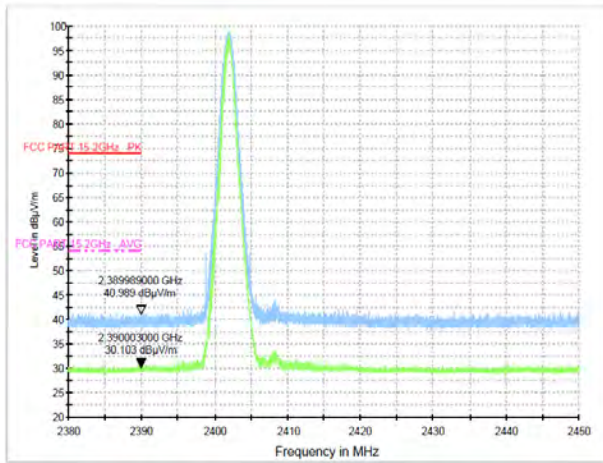

Test Mode: CH-H

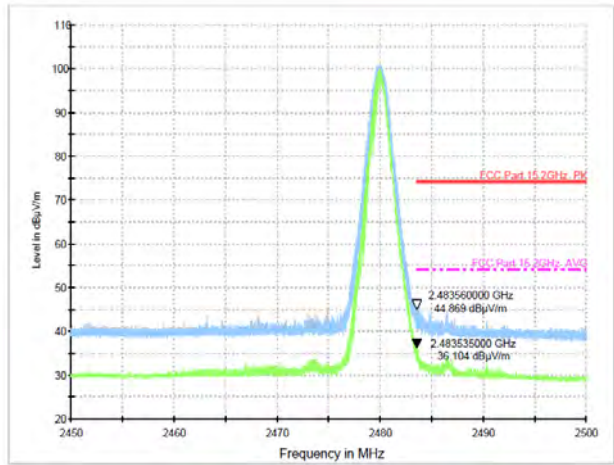

9. ANTENNA REQUIREMENT

9.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2. Antenna Connected Construction



The antenna is internal antenna and no consideration of replacement. Please see EUT photo for details.

9.3. Results


The use of an antenna that is uniquely coupled to the intended radiator shall be considered sufficient to comply with the provisions of this section.

10. TEST SETUP PHOTO

10.1. Photo of Radiated Emission test

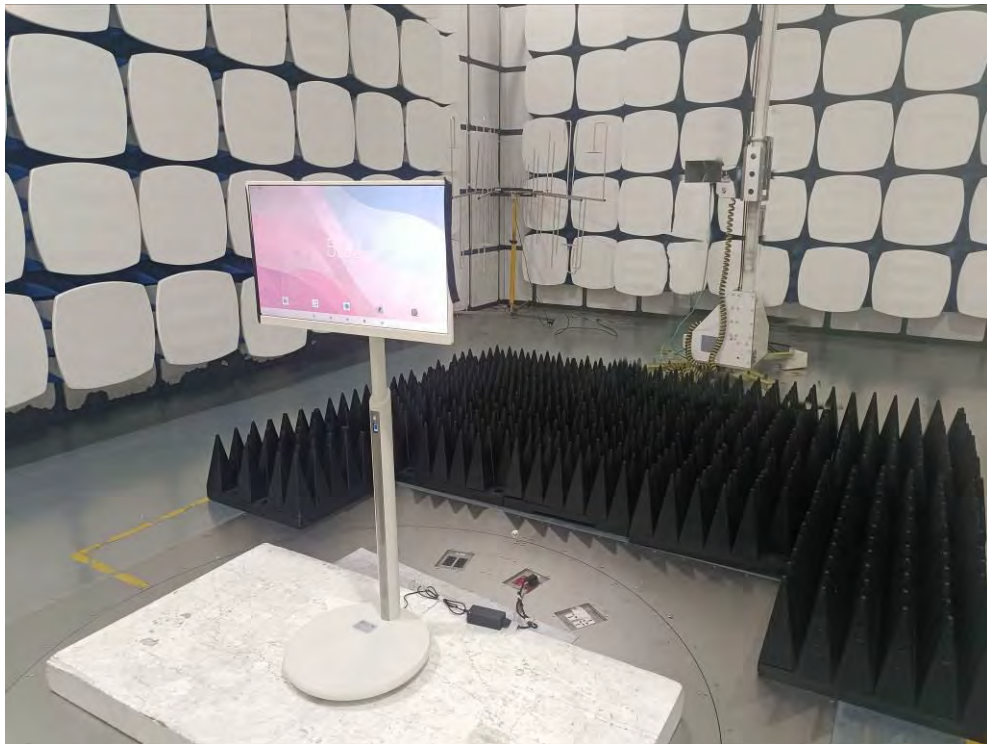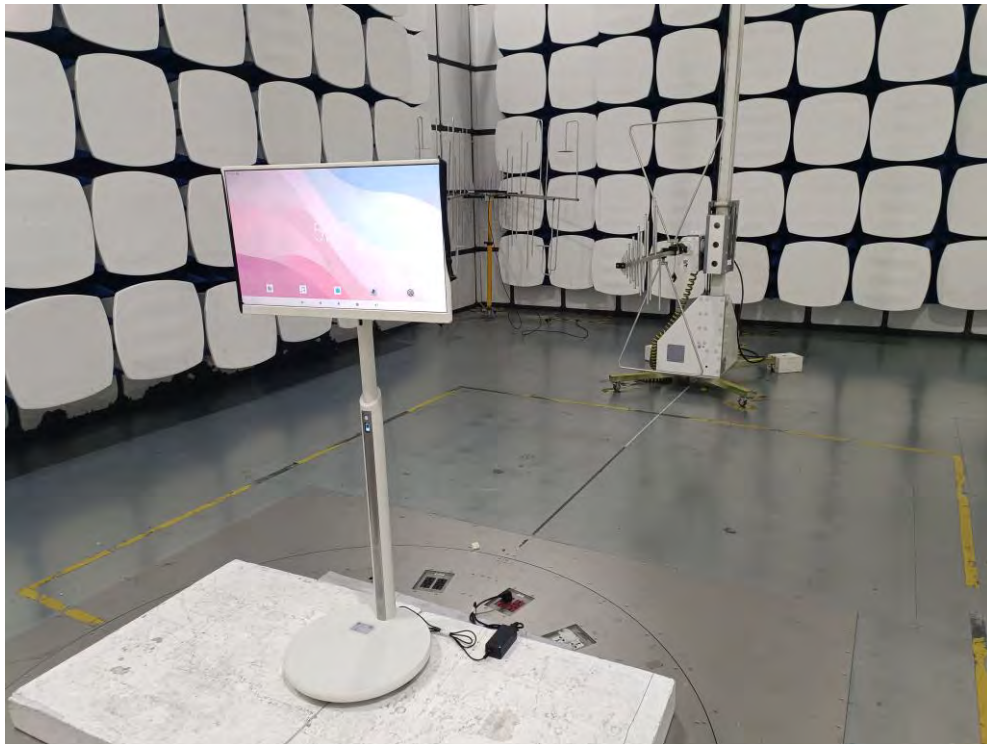

10.2.Photo of Conducted Emission test

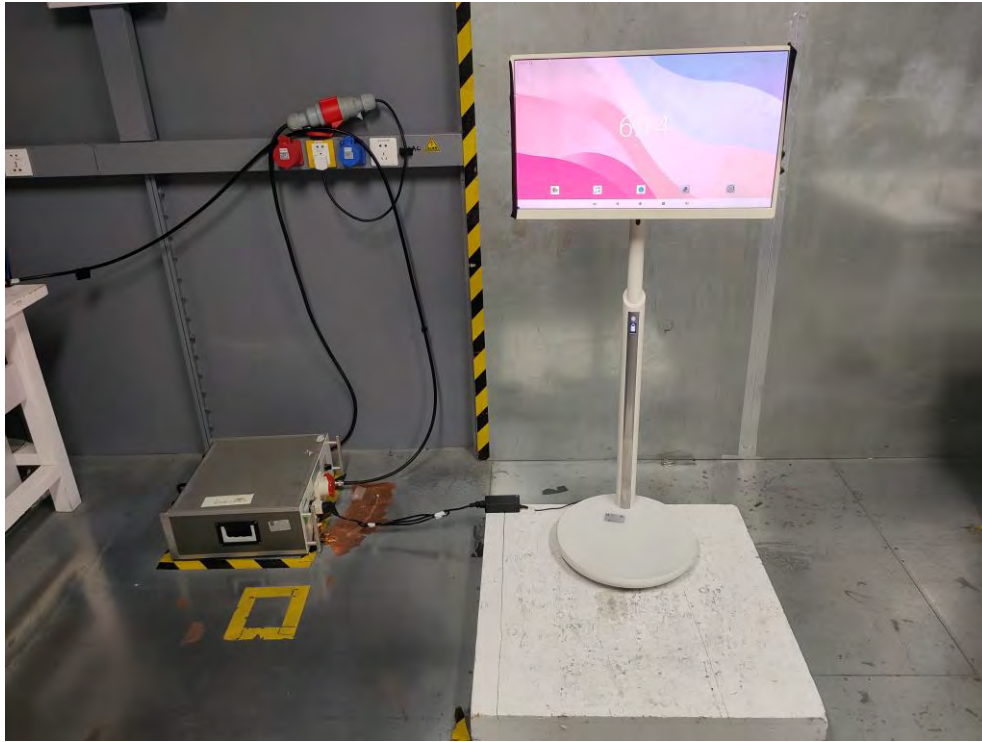

-----END OF REPORT-----