

FCC TEST REPORT

Client Name : Sam Nazarko Trading Ltd

Address : 25 Grovelands Road, Purley, Surrey, United Kingdom,
CR8 4LB

Product Name : 2.4G Voice Remote Control

Date : Mar 25, 2021



Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	6
1.6. Description of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiated Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	18
5. 20dB Bandwidth Test.....	28
5.1. Test Standard and Limit.....	28
5.2. Test Setup.....	28
5.3. Test Procedure.....	28
5.4. Test Data.....	28
6. Antenna Requirement.....	31
6.1. Test Standard and Requirement.....	31
6.2. Antenna Connected Construction.....	31
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	32
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	34
APPENDIX III -- INTERNAL PHOTOGRAPH.....	37



TEST REPORT

Applicant : Sam Nazarko Trading Ltd
Manufacturer : Dongguan Anycon Intelligent Technology Co.,Ltd
Product Name : 2.4G Voice Remote Control
Model No. : OSMC RF Remote Controller
Trade Mark : N.A.
Rating(s) : Input: DC 3.5-4.2V, 90mA Max, (with 3.7V, 630mAh Battery inside)

Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Feb. 25, 2021

Date of Test

Feb. 25~Mar. 26, 2021

Prepared by



(Ella Liang)

Approved & Authorized Signer



(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Sam Nazarko Trading Ltd
Address	:	25 Grovelands Road, Purley, Surrey, United Kingdom, CR8 4LB
Manufacturer	:	Dongguan Anycon Intelligent Technology Co.,Ltd
Address	:	No12, Limin Road, Jinxiaotang Industrial Park, Fenggang, Dongguan, Guangdong, China
Factory	:	Dongguan Anycon Intelligent Technology Co.,Ltd
Address	:	No12, Limin Road, Jinxiaotang Industrial Park, Fenggang, Dongguan, Guangdong, China

1.2. Description of Device (EUT)

Product Name	:	2.4G Voice Remote Control
Model No.	:	OSMC RF Remote Controller
Trade Mark	:	N.A.
Test Power Supply	:	DC 3.7V
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	2404~2480MHz
	Number of Channel:	20 Channels
	Modulation Type:	GFSK
	Antenna Type:	PCB Antenna
	Antenna Gain(Peak):	2 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH0
Mode 2	CH9
Mode 3	CH19

For Conducted Emission	
Final Test Mode	Description
Mode 1	CH0
Mode 2	CH9
Mode 3	CH19

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH0
Mode 2	CH9
Mode 3	CH19

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.




1.5. List of Channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2404	1	2408	2	2412	3	2416	4	2420
5	2424	6	2428	7	2432	8	2436	9	2440
10	2444	11	2448	12	2452	13	2456	14	2460
15	2464	16	2468	17	2472	18	2476	19	2480



1.6. Description of Test Setup

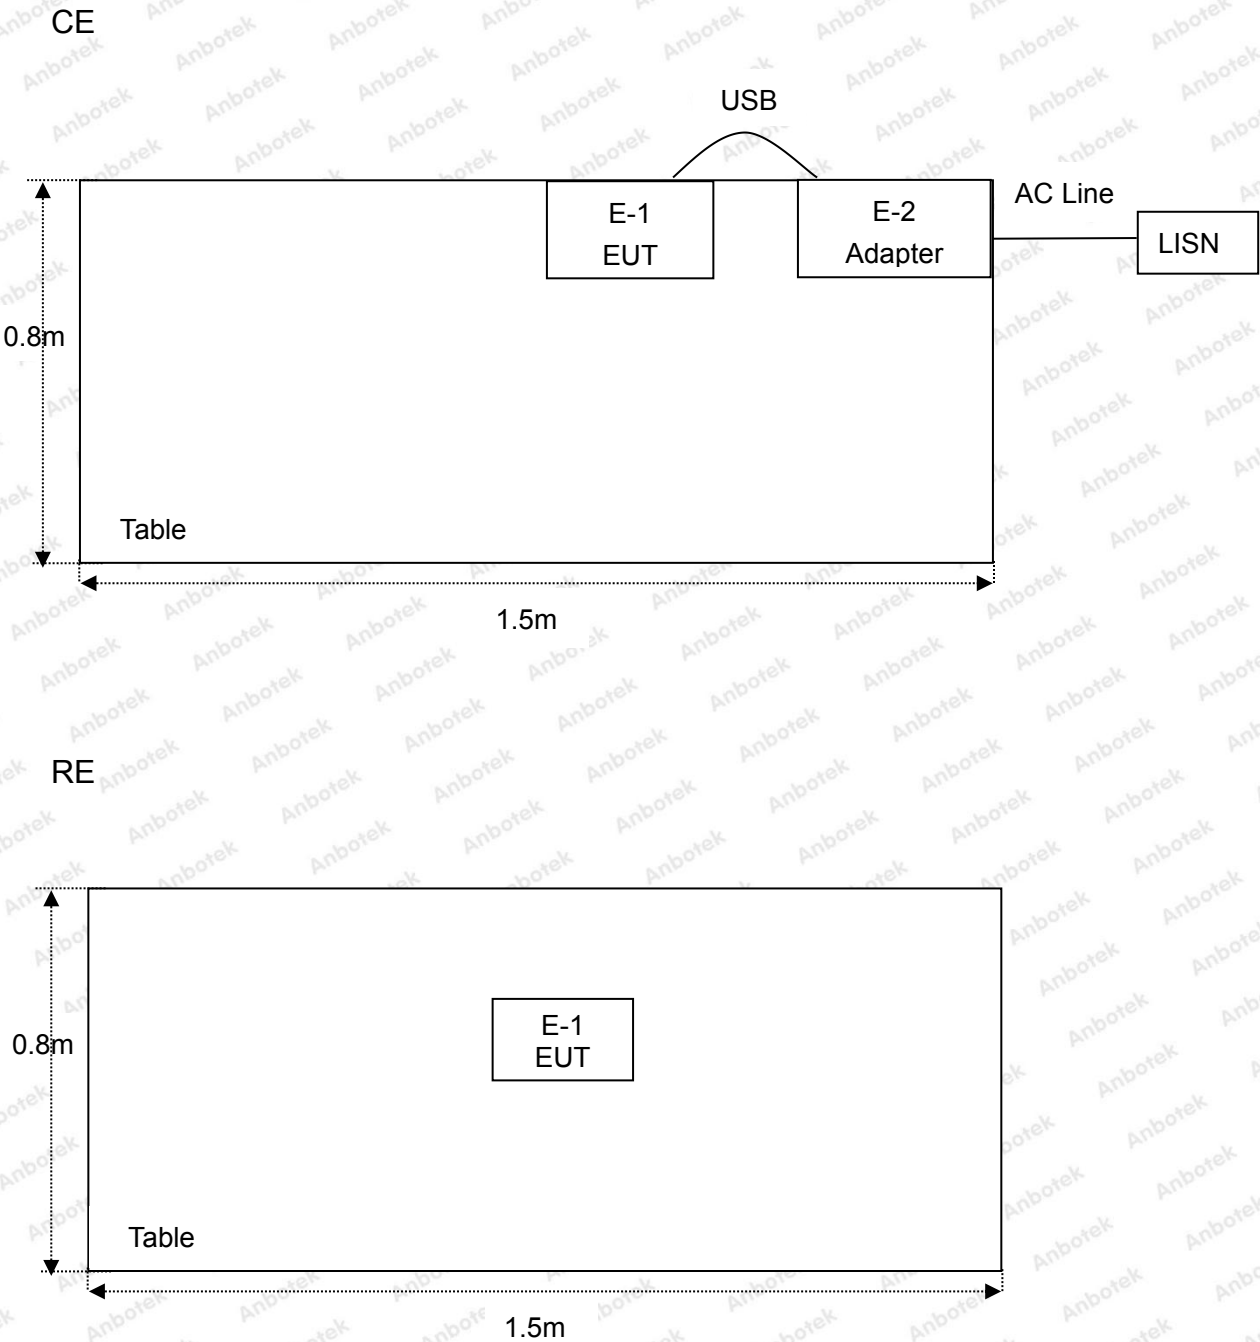

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year



1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

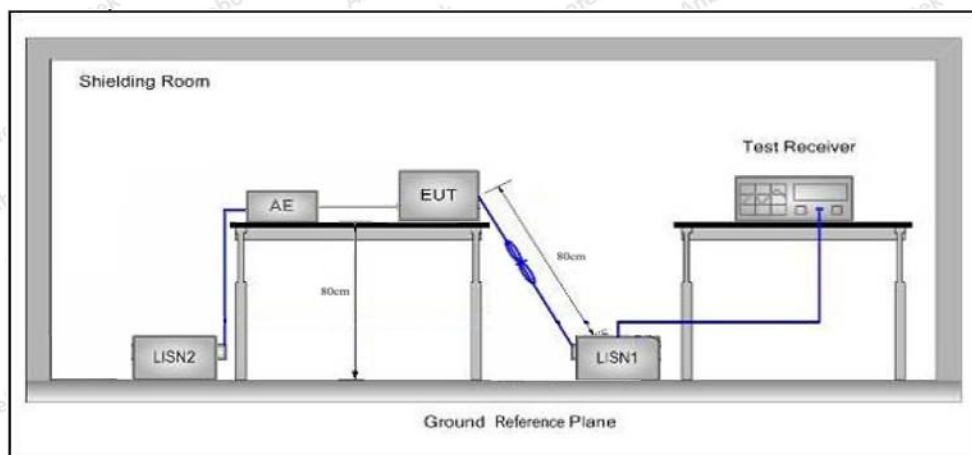

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


3.4. Test Data

During the test, pre-scan all the modes, only the worst case is recorded in the report.

Please to see the following pages.

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: CH0
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 21.6°C Hum.: 50%

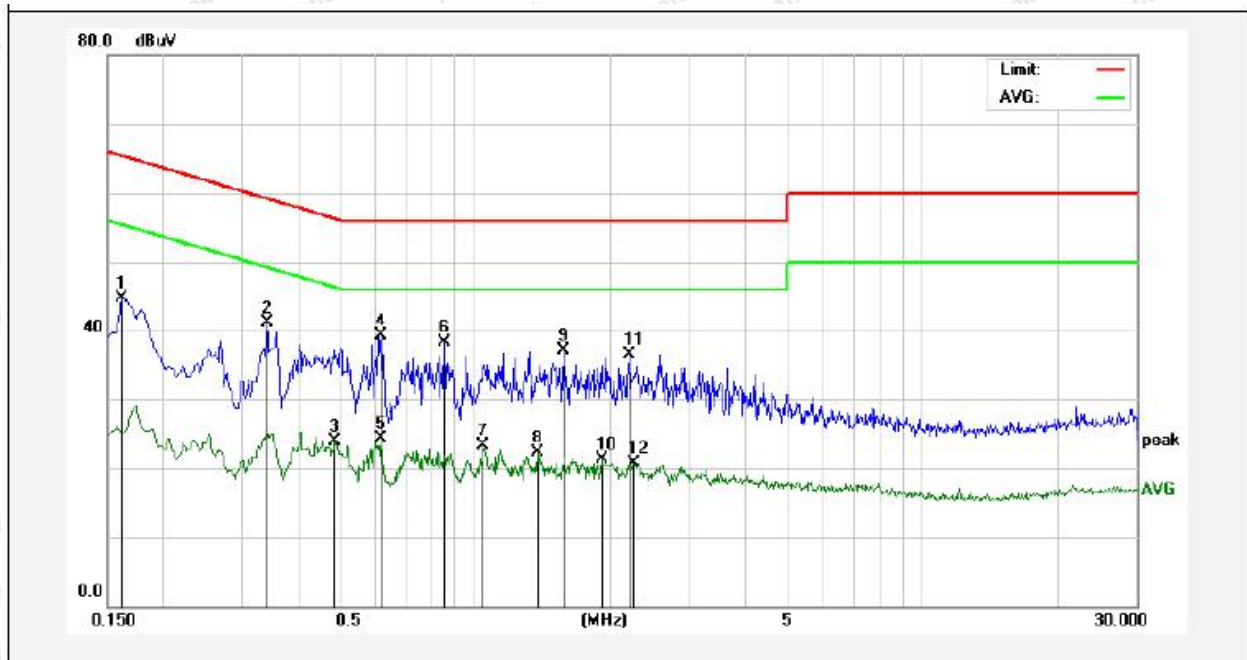


No.	Freq. (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Over Limit (dB)	Detector	Remark
1	0.1620	24.77	19.90	44.67	65.36	-20.69	QP	
2	0.3420	21.13	19.91	41.04	59.15	-18.11	QP	
3	0.4860	3.92	19.97	23.89	46.24	-22.35	AVG	
4	0.6140	19.33	20.01	39.34	56.00	-16.66	QP	
5	0.6140	4.20	20.01	24.21	46.00	-21.79	AVG	
6	0.8500	18.30	20.08	38.38	56.00	-17.62	QP	
7	1.0420	3.23	20.12	23.35	46.00	-22.65	AVG	
8	1.3779	2.26	20.13	22.39	46.00	-23.61	AVG	
9	1.5700	16.96	20.13	37.09	56.00	-18.91	QP	
10	1.9140	1.14	20.14	21.28	46.00	-24.72	AVG	
11	2.2100	16.36	20.14	36.50	56.00	-19.50	QP	
12	2.2500	0.50	20.14	20.64	46.00	-25.36	AVG	



Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: CH0
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 21.6℃ Hum.: 50%

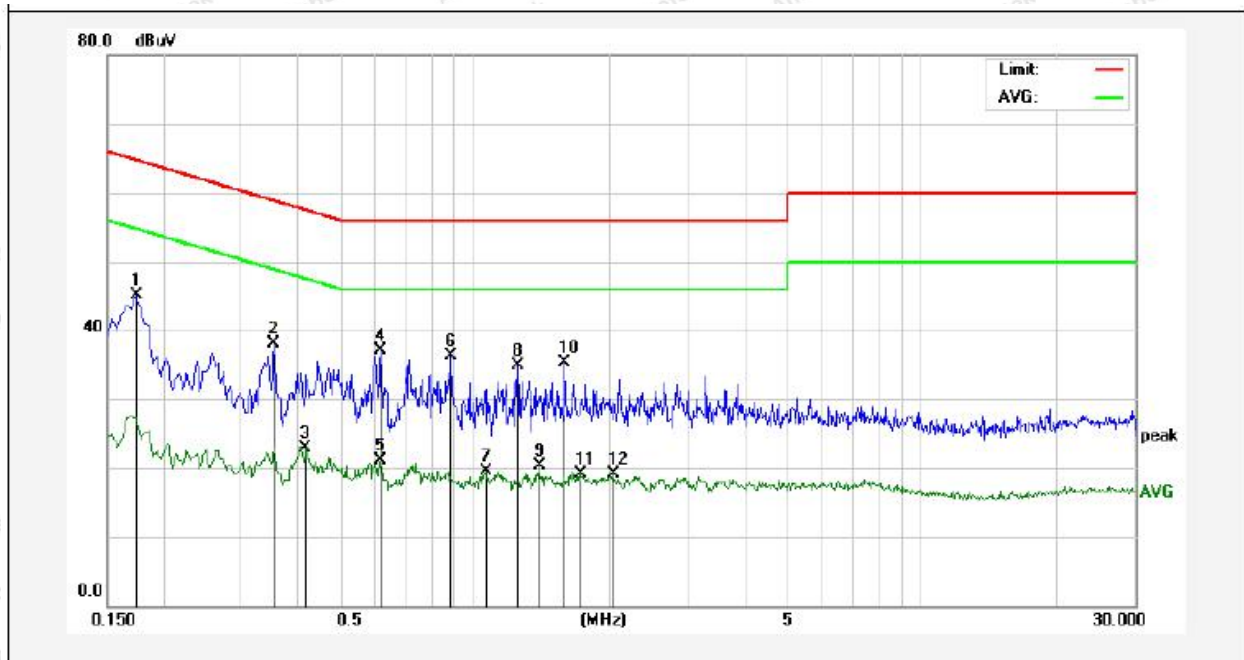

No.	Freq. (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Over Limit (dB)	Detector	Remark
1	0.1740	25.12	19.90	45.02	64.76	-19.74	QP	
2	0.3540	18.20	19.91	38.11	58.87	-20.76	QP	
3	0.4180	3.03	19.94	22.97	47.49	-24.52	AVG	
4	0.6140	17.01	20.01	37.02	56.00	-18.98	QP	
5	0.6140	1.04	20.01	21.05	46.00	-24.95	AVG	
6	0.8820	16.23	20.09	36.32	56.00	-19.68	QP	
7	1.0580	-0.61	20.12	19.51	46.00	-26.49	AVG	
8	1.2460	14.76	20.12	34.88	56.00	-21.12	QP	
9	1.3940	0.18	20.13	20.31	46.00	-25.69	AVG	
10	1.5900	15.18	20.13	35.31	56.00	-20.69	QP	
11	1.7140	-1.00	20.13	19.13	46.00	-26.87	AVG	
12	2.0340	-1.07	20.14	19.07	46.00	-26.93	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: CH0
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 21.6°C Hum.: 50%

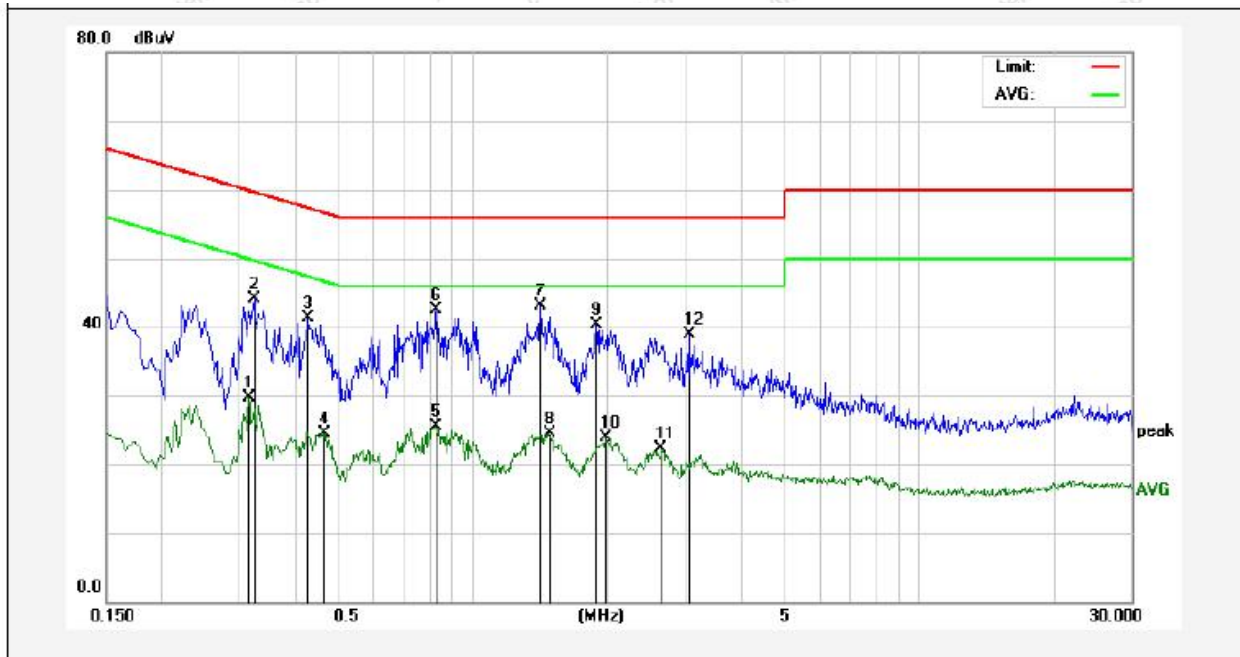


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.3140	9.78	19.90	29.68	49.86	-20.18	AVG	
2	0.3220	24.30	19.90	44.20	59.65	-15.45	QP	
3	0.4260	21.40	19.95	41.35	57.33	-15.98	QP	
4	0.4660	4.54	19.96	24.50	46.58	-22.08	AVG	
5	0.8260	5.45	20.07	25.52	46.00	-20.48	AVG	
6	0.8300	22.51	20.07	42.58	56.00	-13.42	QP	
7	1.4180	23.02	20.13	43.15	56.00	-12.85	QP	
8	1.4780	4.43	20.13	24.56	46.00	-21.44	AVG	
9	1.8900	20.19	20.14	40.33	56.00	-15.67	QP	
10	1.9900	3.75	20.14	23.89	46.00	-22.11	AVG	
11	2.6380	2.18	20.15	22.33	46.00	-23.67	AVG	
12	3.0540	18.83	20.16	38.99	56.00	-17.01	QP	



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: CH0
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 21.6°C Hum.: 50%

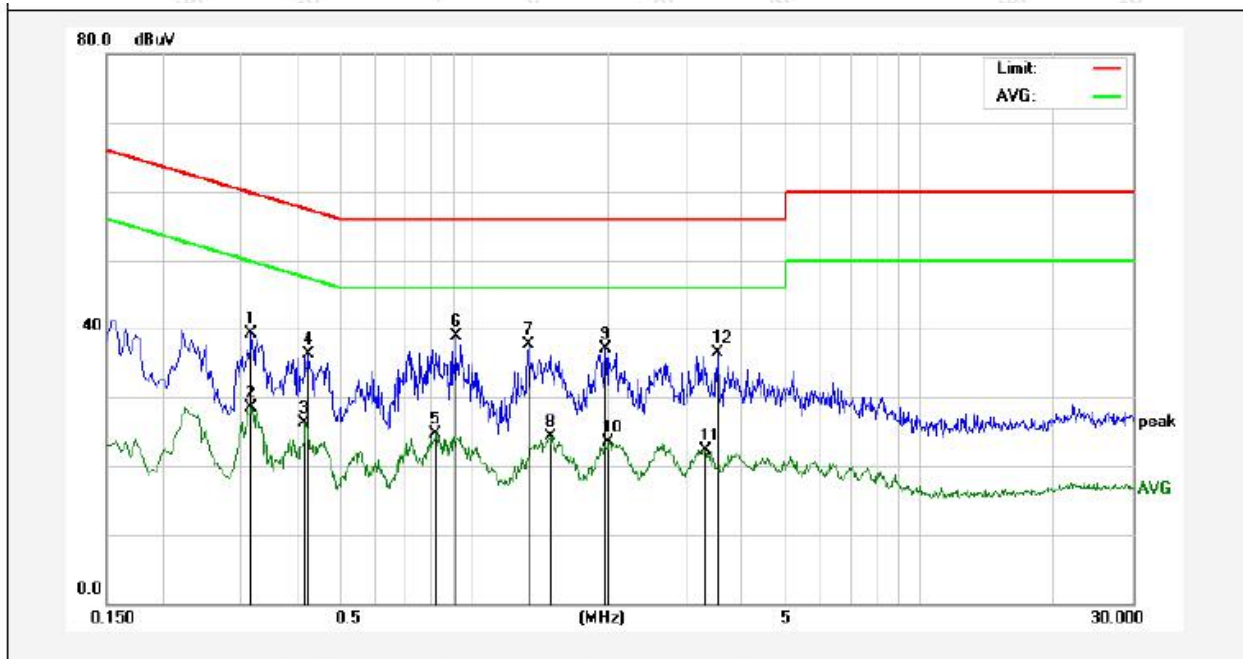

No.	Freq. (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Over Limit (dB)	Detector	Remark
1	0.3180	19.38	19.90	39.28	59.76	-20.48	QP	
2	0.3180	8.56	19.90	28.46	49.76	-21.30	AVG	
3	0.4180	6.44	19.94	26.38	47.49	-21.11	AVG	
4	0.4260	16.29	19.95	36.24	57.33	-21.09	QP	
5	0.8260	4.61	20.07	24.68	46.00	-21.32	AVG	
6	0.9100	18.88	20.10	38.98	56.00	-17.02	QP	
7	1.3260	17.50	20.13	37.63	56.00	-18.37	QP	
8	1.4819	4.18	20.13	24.31	46.00	-21.69	AVG	
9	1.9780	17.04	20.14	37.18	56.00	-18.82	QP	
10	2.0100	3.43	20.14	23.57	46.00	-22.43	AVG	
11	3.2980	2.07	20.17	22.24	46.00	-23.76	AVG	
12	3.5220	16.33	20.17	36.50	56.00	-19.50	QP	



4. Radiated Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1) The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

Remark:

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



4.2. Test Setup

Figure 1. Below 30MHz

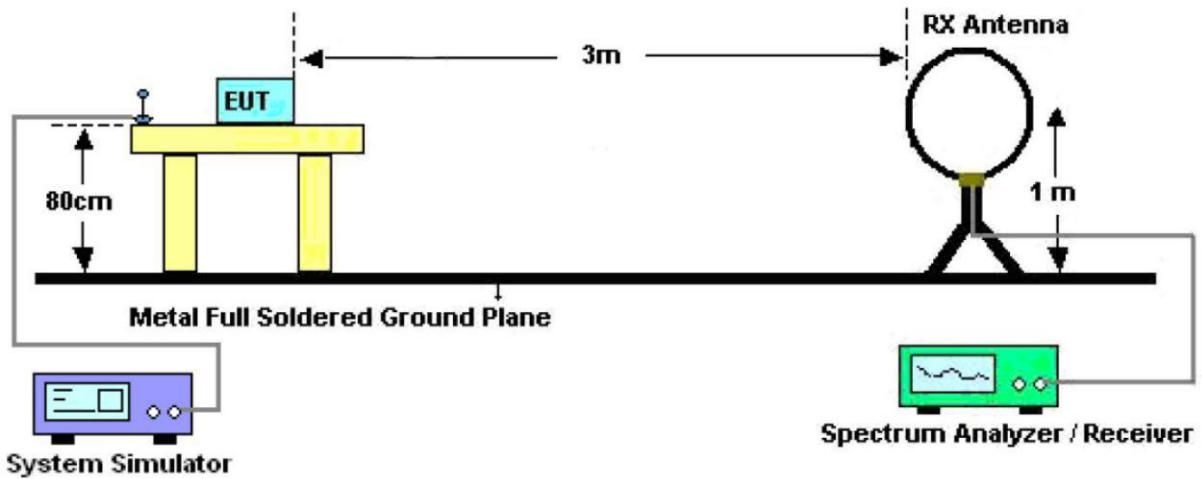


Figure 2. 30MHz to 1GHz


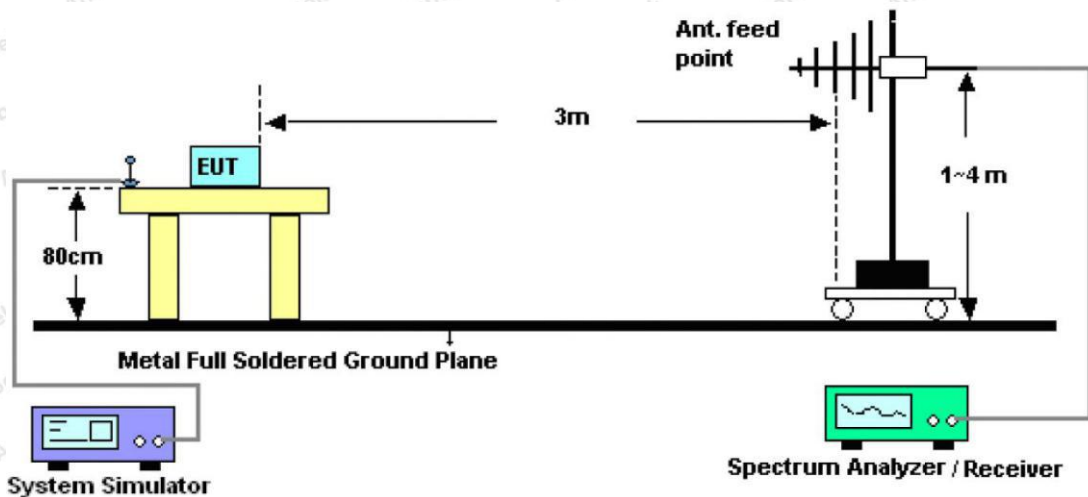


Figure 3. Above 1 GHz

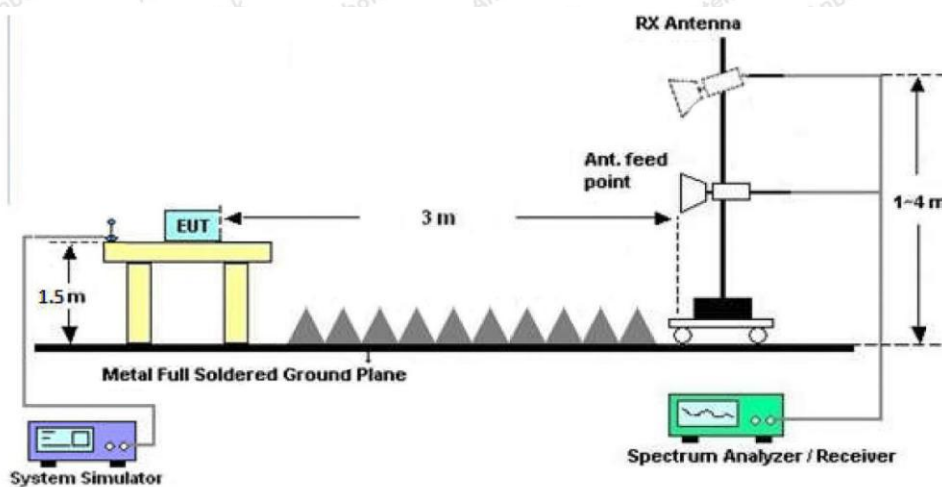

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep - auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep - auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep - auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep - auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep - auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, only the worst case is recorded in the report.


Report No.: 18220WC10032101

FCC ID: 2A157OSMCRF

Page19 of 39

Test Results (30~1000MHz)

Test Mode: CH0
Power Source: DC 3.7V
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 22.5°C/50%RH

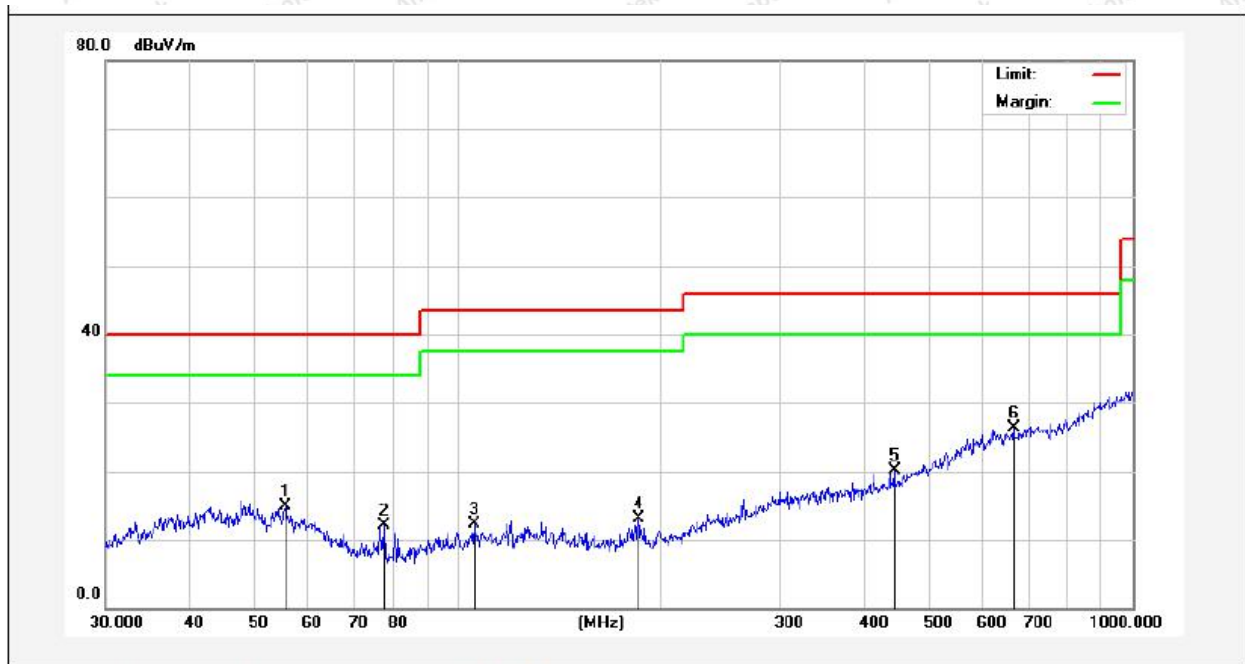

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	55.4147	31.37	-16.51	14.86	40.00	-25.14	QP	100	360	
2	77.5928	30.20	-18.02	12.18	40.00	-27.82	QP	100	0	
3	105.6415	27.83	-15.56	12.27	43.50	-31.23	QP	100	360	
4	185.1379	31.13	-17.98	13.15	43.50	-30.35	QP	100	0	
5	443.2943	30.48	-10.40	20.08	46.00	-25.92	QP	100	360	
6	665.8035	32.87	-6.56	26.31	46.00	-19.69	QP	100	0	


Report No.: 18220WC10032101

FCC ID: 2A157OSMCRF

Page20 of 39

Test Results (30~1000MHz)

Test Mode: CH0
Power Source: DC 3.7V
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 22.5°C/50%RH

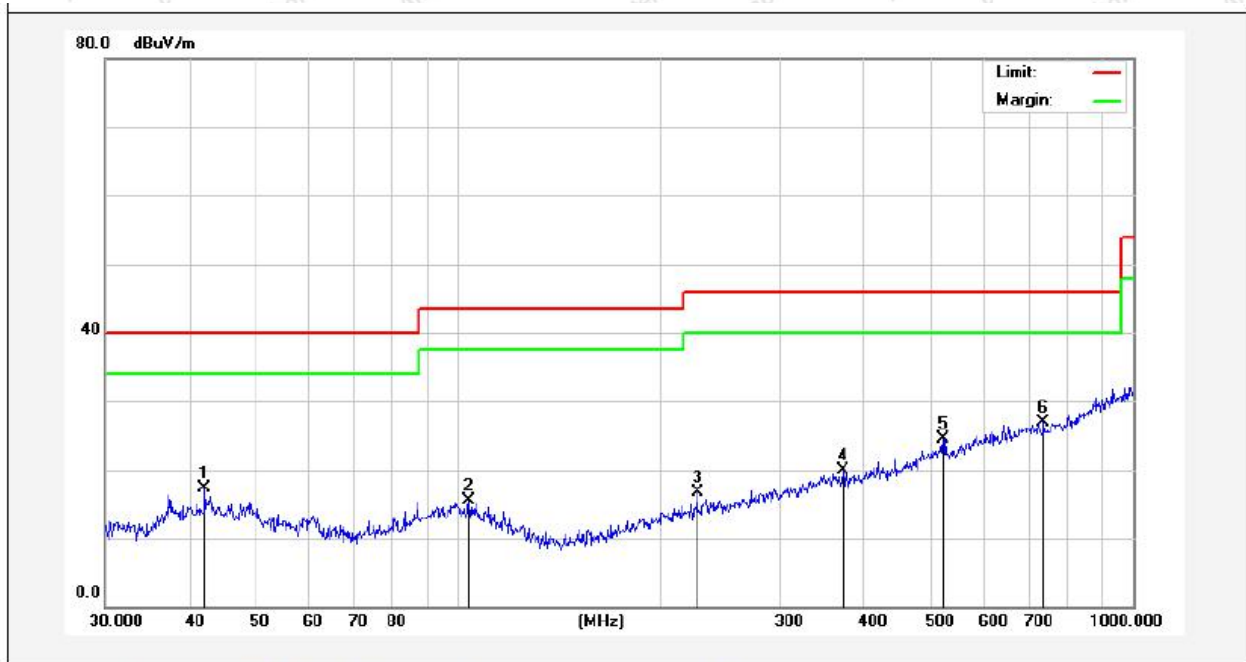

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	42.1542	31.94	-14.71	17.23	40.00	-22.77	QP	100	360	
2	103.8055	35.56	-20.08	15.48	43.50	-28.02	QP	100	0	
3	226.0994	36.09	-19.33	16.76	46.00	-29.24	QP	100	360	
4	372.0045	32.92	-12.99	19.93	46.00	-26.07	QP	100	0	
5	522.7180	33.63	-9.15	24.48	46.00	-21.52	QP	100	360	
6	737.0714	32.36	-5.43	26.93	46.00	-19.07	QP	100	0	



Test Results (1GHz-25GHz)

Test Mode: CH0 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2404.0000	93.80	31.12	2.18	35.33	91.77	114.00	-22.23	V	Peak
2404.0000	83.94	31.12	2.18	35.33	81.91	94.00	-12.09	V	AVG
4808.0000	47.25	34.01	2.58	34.65	49.19	74.00	-24.81	V	Peak
4808.0000	39.46	34.01	2.58	34.65	41.40	54.00	-12.60	V	AVG
7212.0000	47.65	36.16	2.97	35.07	51.71	74.00	-22.29	V	Peak
7212.0000	37.55	36.16	2.97	35.07	41.61	54.00	-12.39	V	AVG
9616.0000	*								
12020.0000	*								
14424.0000	*								
16828.0000	*								
2404.0000	93.00	31.12	2.18	35.33	90.97	114.00	-23.03	H	Peak
2404.0000	83.68	31.12	2.18	35.33	81.65	94.00	-12.35	H	AVG
4808.0000	47.94	34.01	2.58	34.65	49.88	74.00	-24.12	H	Peak
4808.0000	39.93	34.01	2.58	34.65	41.87	54.00	-12.13	H	AVG
7212.0000	46.99	36.16	2.97	35.07	51.05	74.00	-22.95	H	Peak
7212.0000	38.11	36.16	2.97	35.07	42.17	54.00	-11.83	H	AVG
9616.0000	*								
12020.0000	*								
14424.0000	*								
16828.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Test Mode: CH9 (Middle channel)									
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Pol.	Detector
2440.0000	96.62	31.12	2.20	34.51	95.43	114.00	-18.57	V	Peak
2440.0000	85.70	31.22	2.20	34.51	84.61	94.00	-9.39	V	AVG
4880.0000	48.53	34.98	2.49	34.14	51.86	74.00	-22.14	V	Peak
4880.0000	38.08	34.98	2.49	34.14	41.41	54.00	-12.59	V	AVG
7320.0000	47.97	36.01	3.01	34.56	52.43	74.00	-21.57	V	Peak
7320.0000	38.54	36.01	3.01	34.56	43.00	54.00	-11.00	V	AVG
9760.0000	*								
12200.0000	*								
14640.0000	*								
17080.0000	*								
2440.0000	96.24	31.12	2.20	34.51	95.05	114.00	-18.95	H	Peak
2440.0000	82.06	31.12	2.20	34.51	80.87	94.00	-13.13	H	AVG
4880.0000	49.97	34.98	2.49	34.14	53.30	74.00	-20.70	H	Peak
4880.0000	39.05	34.98	2.49	34.14	42.38	54.00	-11.62	H	AVG
7320.0000	47.01	36.01	3.01	34.56	51.47	74.00	-22.53	H	Peak
7320.0000	37.08	36.01	3.01	34.56	41.54	54.00	-12.46	H	AVG
9760.0000	*								
12200.0000	*								
14640.0000	*								
17080.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.




Test Mode: CH19(High channel)									
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Pol.	Detector
2480.0000	96.86	31.65	2.23	36.07	94.67	114.00	-19.33	V	Peak
2480.0000	82.52	31.65	2.23	36.07	80.33	94.00	-13.67	V	AVG
4960.0000	50.52	35.06	2.60	34.93	53.25	74.00	-20.75	V	Peak
4960.0000	40.48	35.06	2.60	34.93	43.21	54.00	-10.79	V	AVG
7440.0000	46.79	36.19	3.12	35.11	50.99	74.00	-23.01	V	Peak
7440.0000	36.39	36.19	3.12	35.11	40.59	54.00	-13.41	V	AVG
9920.0000	*								
12400.0000	*								
14880.0000	*								
17360.0000	*								
2480.0000	93.28	31.65	2.23	36.07	91.09	114.00	-22.91	H	Peak
2480.0000	84.29	31.65	2.23	36.07	82.10	94.00	-11.90	H	AVG
4960.0000	50.91	35.06	2.60	34.93	53.64	74.00	-20.36	H	Peak
4960.0000	41.17	35.06	2.60	34.93	43.90	54.00	-10.10	H	AVG
7440.0000	47.30	36.19	3.12	35.11	51.50	74.00	-22.50	H	Peak
7440.0000	35.10	36.19	3.12	35.11	39.30	54.00	-14.70	H	AVG
9920.0000	*								
12400.0000	*								
14880.0000	*								
17360.0000	*								

Note:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.




Radiated Band Edge:

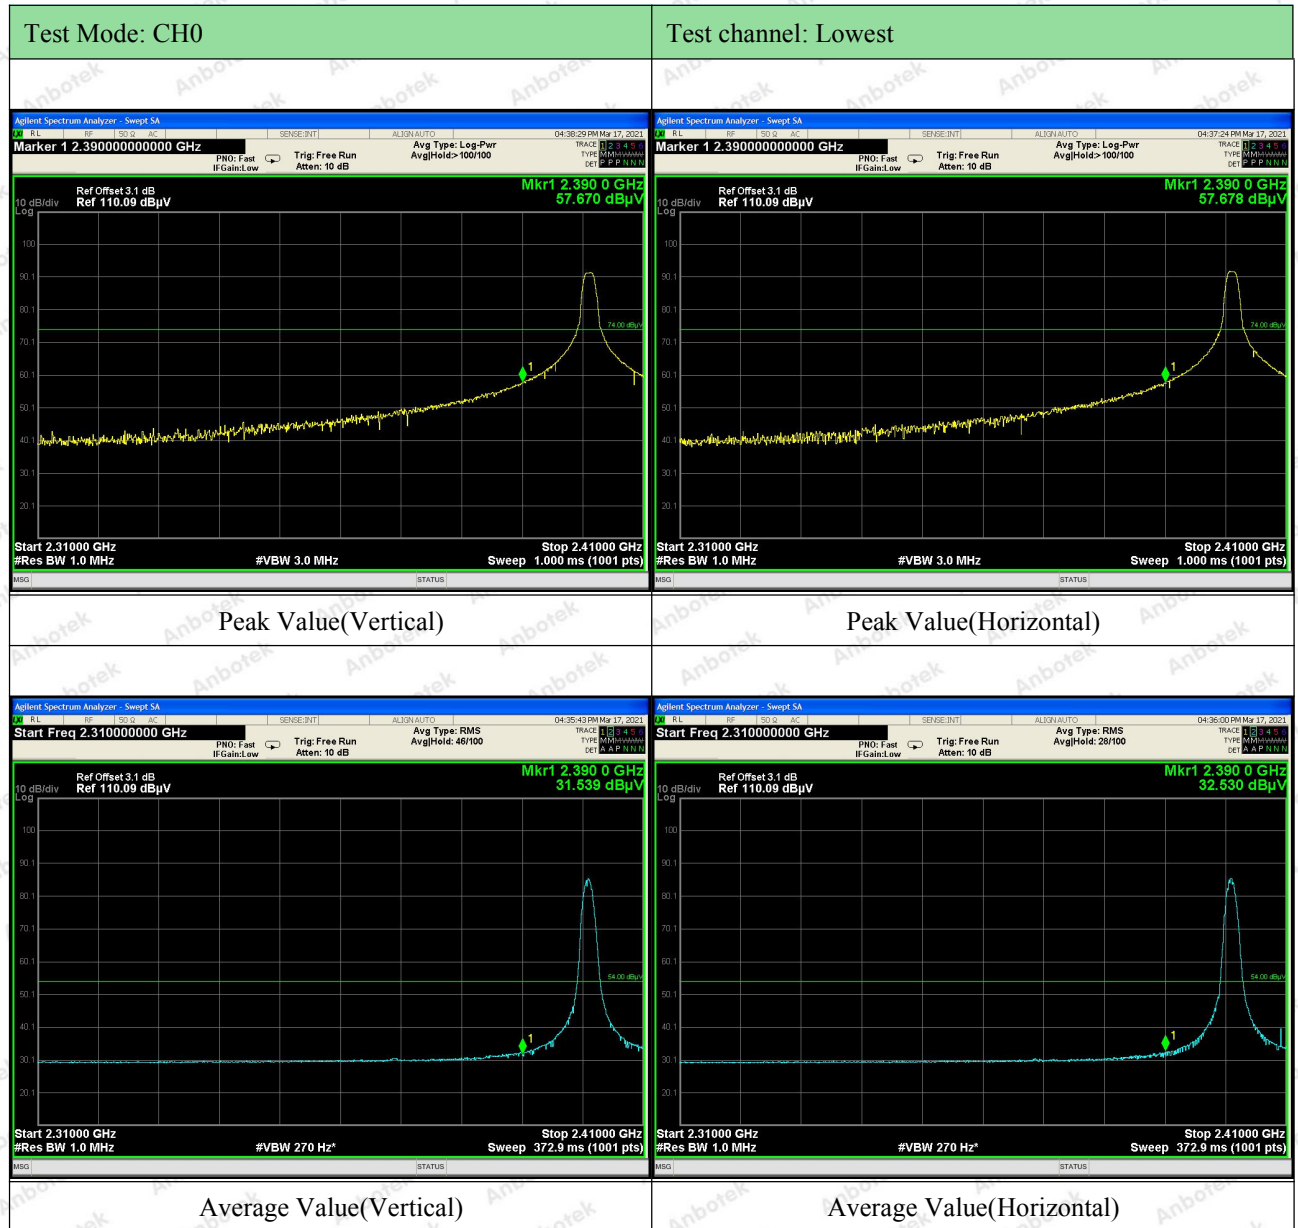


Test Mode: CH19


Test channel: Highest

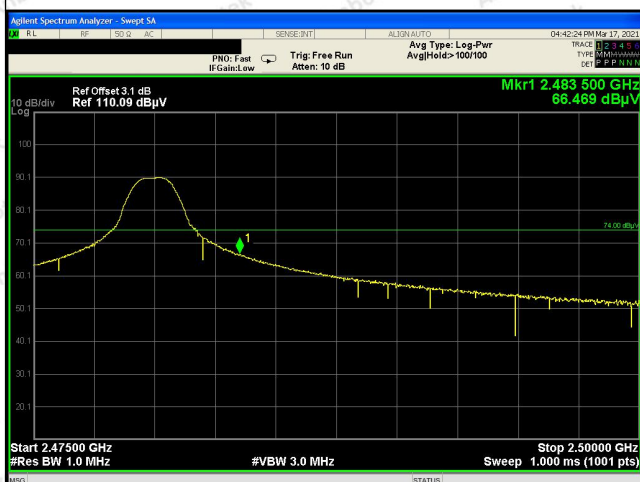


Peak Value(Vertical)

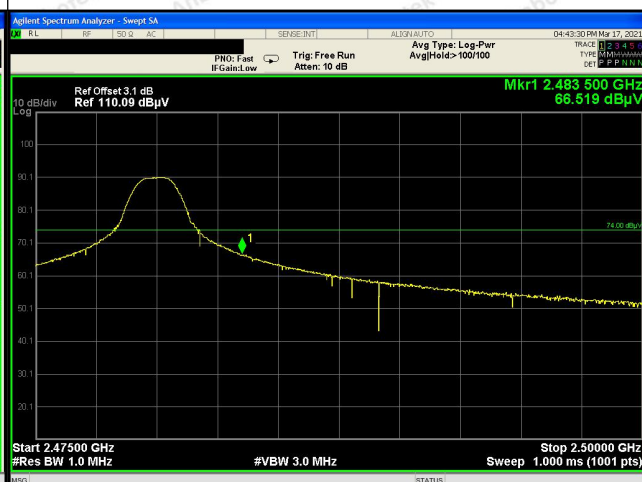

Peak Value(Horizontal)

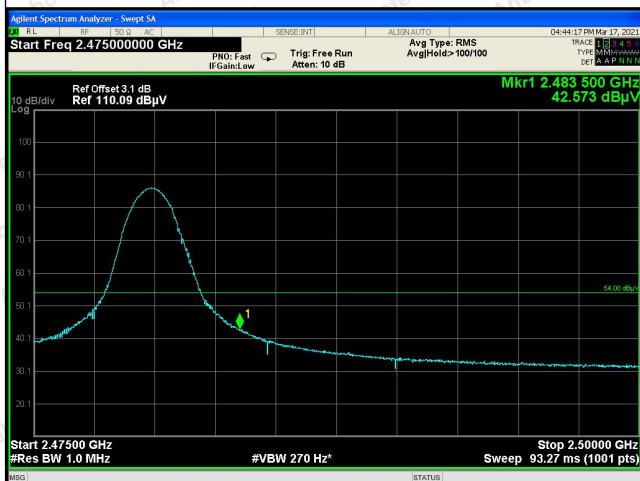

Average Value(Vertical)

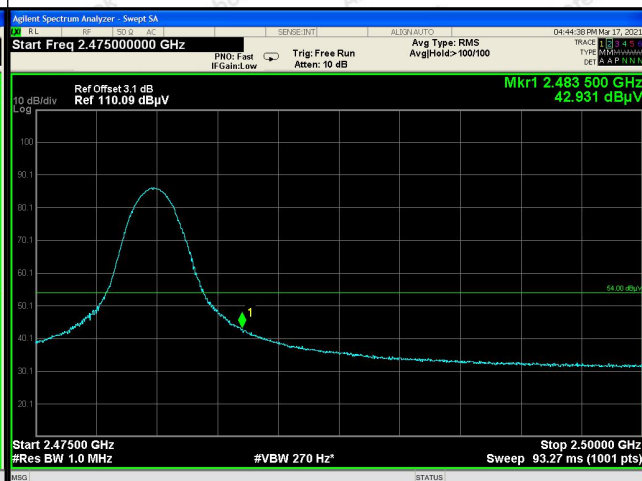


Average Value(Horizontal)

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor



Conducted Emission Method

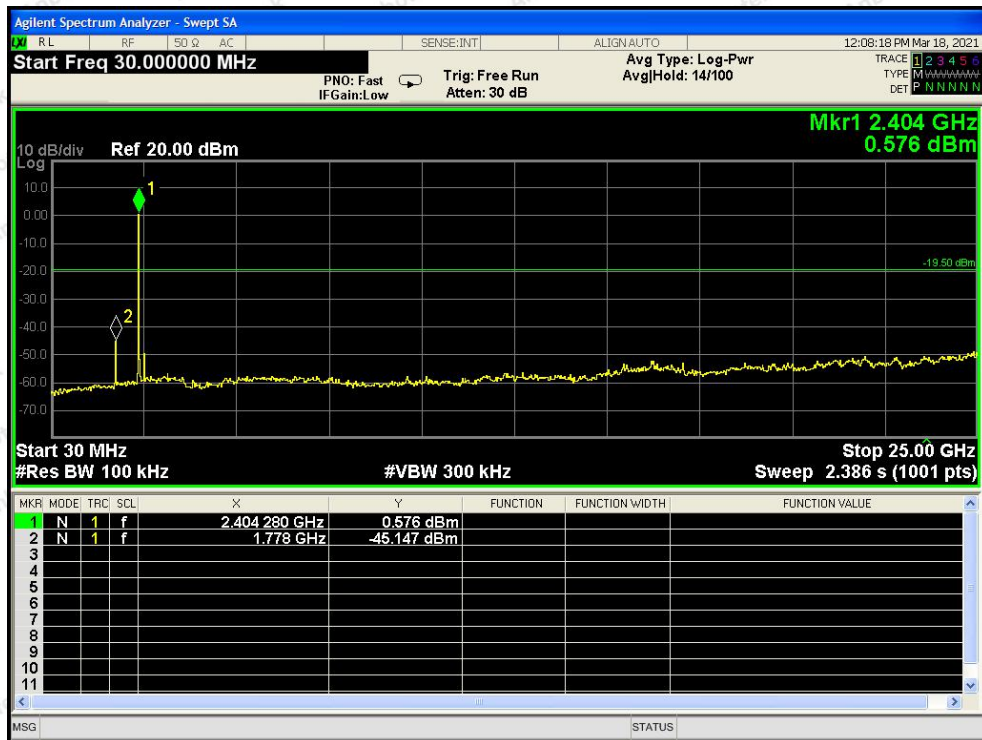

CH: Low

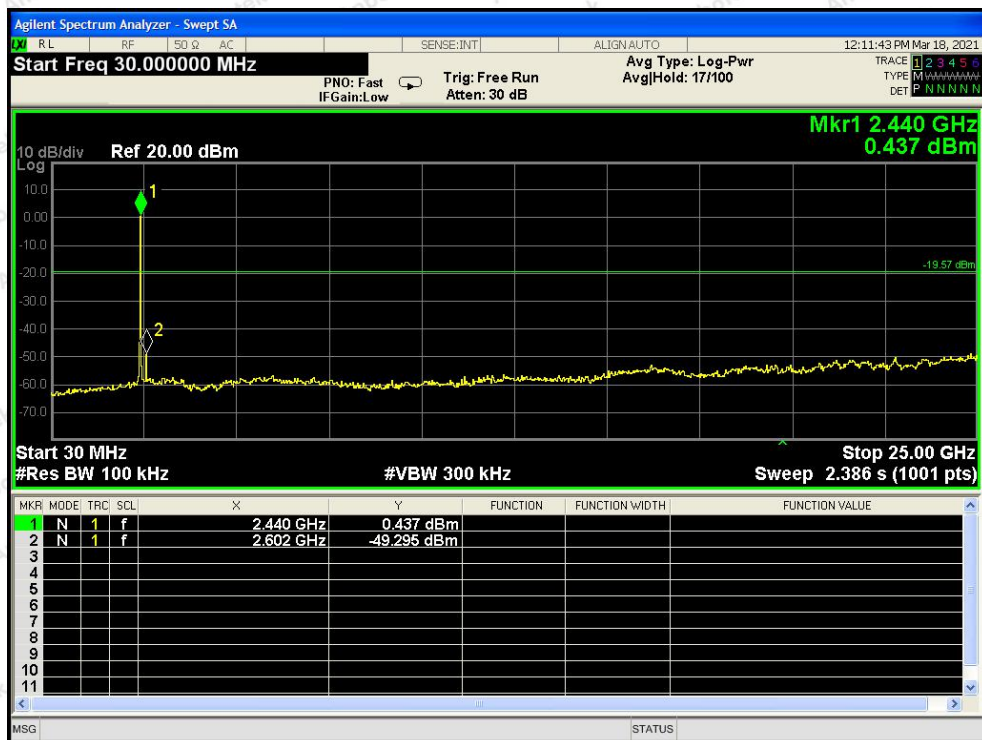

CH: Middle

Shenzhen Anbotek Compliance Laboratory Limited

Code: AB-RF-05-a

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.


Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

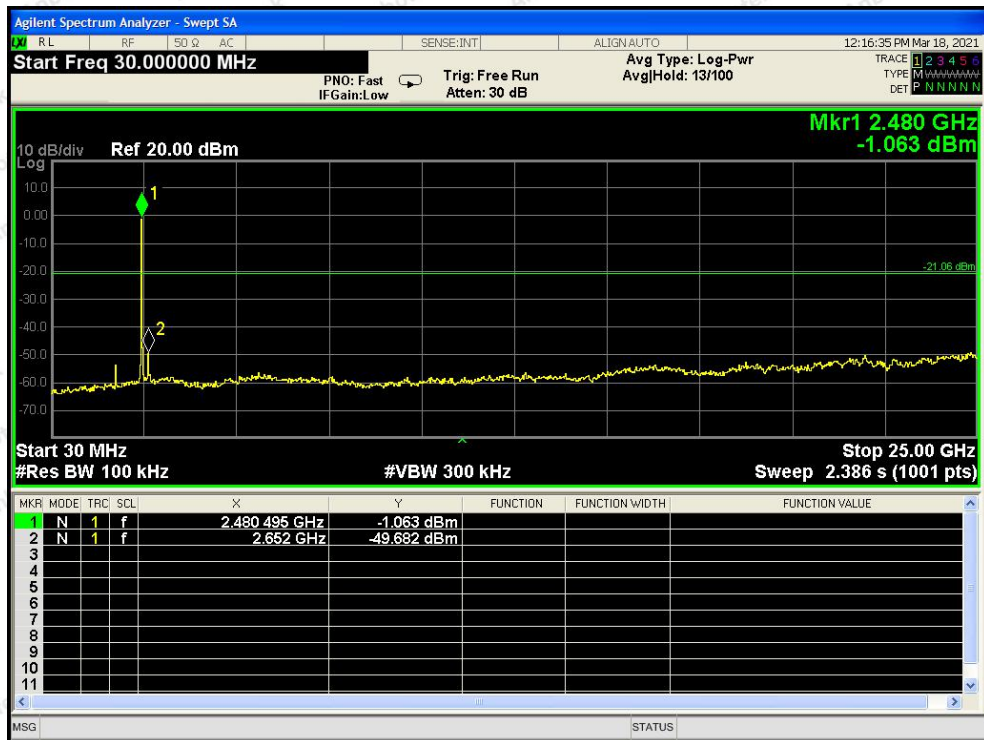

CH: High




5. 20dB Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

5.2. Test Setup



5.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 30kHz, VBW $\geq$ 3*RBW =100kHz,
Detector= Average
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

5.4. Test Data

Test Item	:	20dB Bandwidth
Test Voltage	:	DC 3.7V
Test Result	:	PASS

Test Mode	:	Mode 1
Temperature	:	22.4℃
Humidity	:	55%RH

Frequency (MHz)	Bandwidth (kHz)	Result
2404MHZ	1205	PASS
2440MHZ	1149	PASS
2480MHZ	1212	PASS





Test Mode: Low



Test Mode: Middle





Test Mode: High




6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2. Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 2 dBi. It complies with the standard requirement.

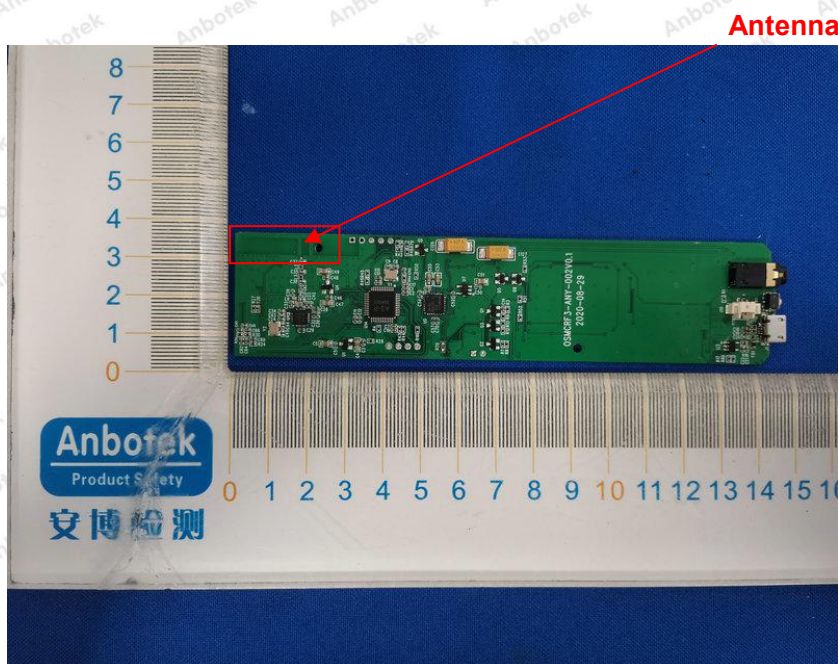

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test








APPENDIX II -- EXTERNAL PHOTOGRAPH



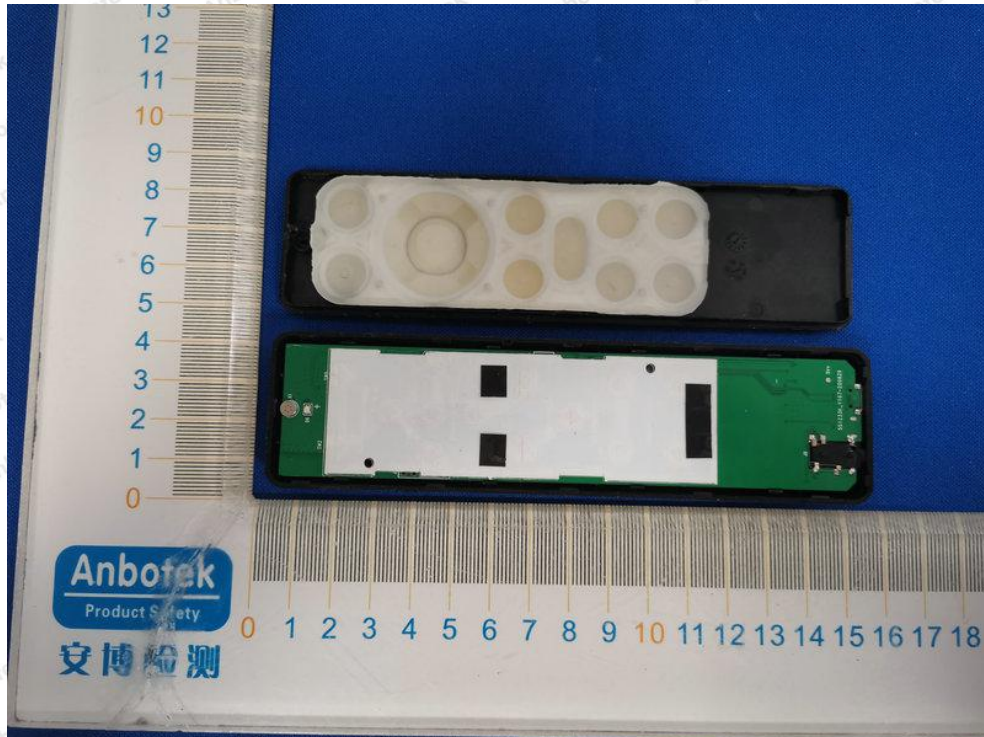

APPENDIX III -- INTERNAL PHOTOGRAPH

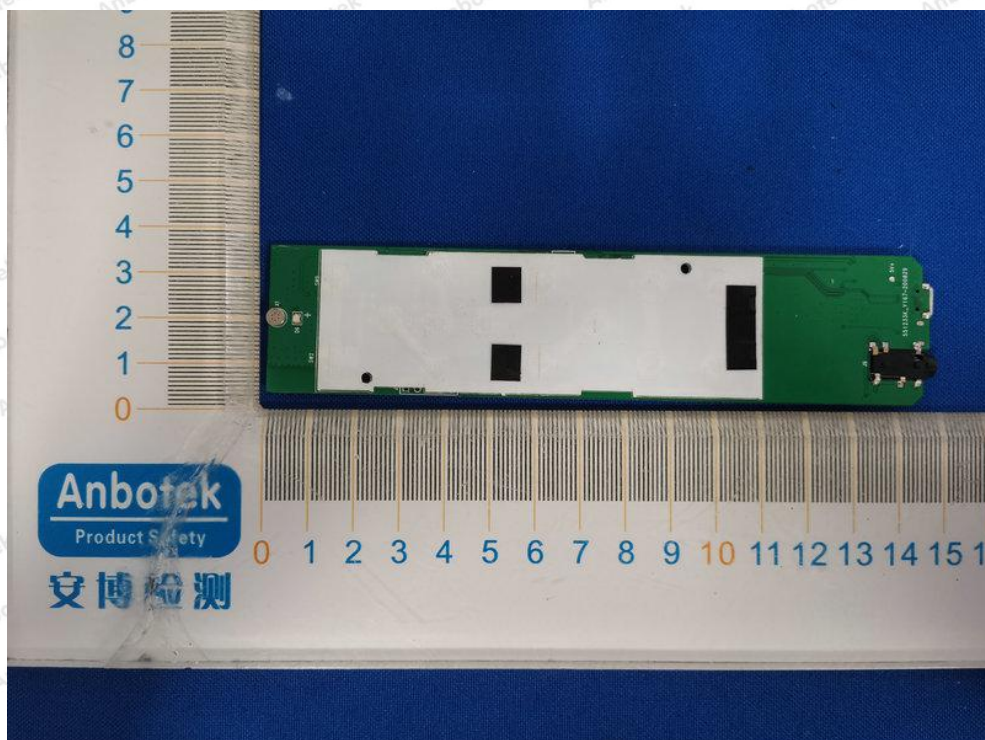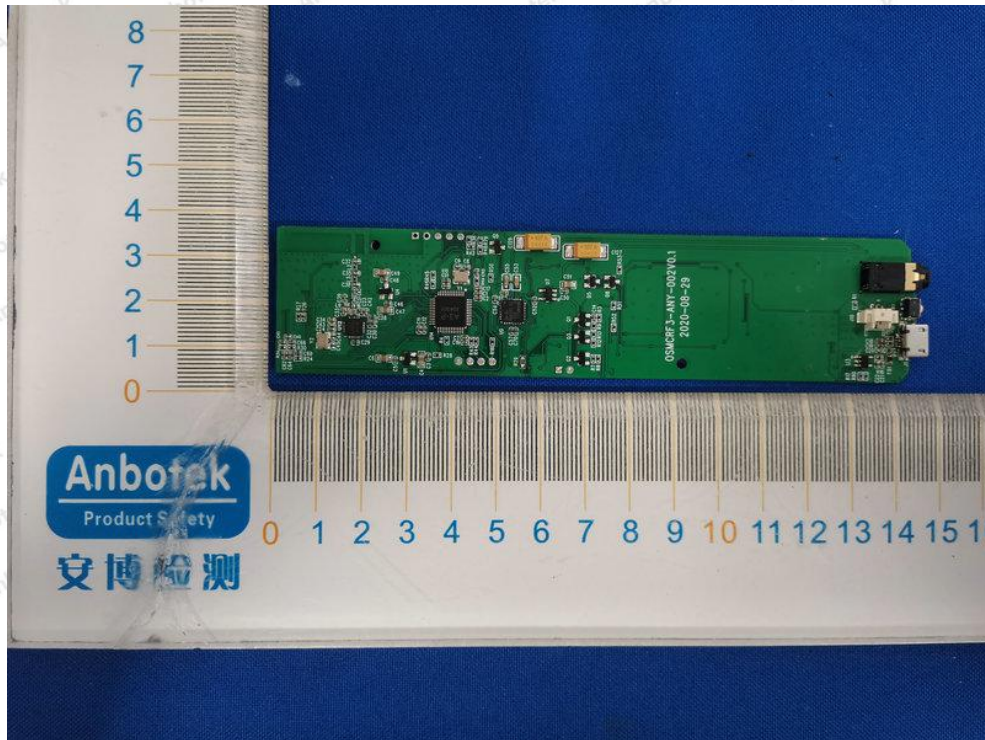



----- End of Report -----

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

Code: AB-RF-05-a



Hotline

400-003-0500

www.anbotech.com