TECHNICAL REPORT

Report No:	FCC 1706049-02
File reference No:	2017-06-13
Applicant:	SPRITE LIMITED
Product:	Action camera
Model No:	CGX3, CGX4, SP9000B, SP9000B+, DV6000 , DV600, DV060
Trademark:	N/A
Test Standards:	FCC Part 15.247
Test result:	It is herewith confirmed and found to comply with the requirements set up by ANSI C63.10, FCC Part 15.247 for the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 13, 2017

Results appearing herein relate only to the sample tested
The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

Test Report Conclusion

Content

1.0 General Details

1.1 Test Lab Details

Name : Global United Technology Service Co., Ltd
Address: 2nd Floor, Block No.2, Laodong Industrial Zone,Shenzhen,China
Telephone: (755) 27798480
Fax: (755) 2779 8960
Site on File with the Federal Communications Commission – United Sates
Registration Number: 600491
For 3m Anechoic Chamber
Site Listed with Industry Canada of Ottawa, Canada
Registration Number: IC: 9079A-02
For 3m Anechoic Chamber

1.2 Applicant Details

Applicant:	SPRITE LIMITED
Address:	Floor 4-7th, A Bldg.,Chuangyu Industry Zone, NO.1222 Guanguang Road,Guanlan Town,, Shenzhen, Guangdong, China.518110
Telephone:	86-75527988266
Fax:	+86-755-27988922

1.3 Description of EUT

Product:	Action camera
Manufacturer:	SPRITE LIMITED
Address:	Floor 4-7th, A Bldg.,Chuangyu Industry Zone, NO.1222 Guanguang Road,Guanlan Town,, Shenzhen, Guangdong, China.518110
Brand Name:	N/A
Model Number:	CGX3

Additional Model Number: CGX4, SP9000B, SP9000B+, DV6000 , DV600, DV060

Type of Modulation	IEEE 802.11b : DSSS (CCK, QPSK, DBPSK) IEEE 802.11g/n (HT20/40) : OFDM(64QAM, 16QAM, QPSK, BPSK)
Frequency range	IEEE 802.11b/g/n (HT20) : 2412-2462MHz, IEEE802.11n (HT40) : 2422-2452MHz
Channel Spacing	5MHz for IEEE 802.11b/g/n(HT20/40)
Air Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48,36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20/40 : 150, 135, 117 ,104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6.5 Mbps
Frequency Selection	By software
Channel Number	IEEE 802.11b/g/n (HT20) : 11 Channels, IEEE 802.11n (HT40) : 7 Channels
Antenna:	Integral Antenna and the maximum Gain of this antenna is 0dBi;

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2017-06-06 to 2017-06-13

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by Terry Tang

Print Name: Terry Tang

2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2016-08-19	2017-08-18
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2016-08-20	2017-08-29
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2016-08-20	2017-08-19
Ultra Broadband ANT	R&S	HL562	100157	2016-08-24	2017-08-23
ESDV Test Receiver	R&S	ESDV	100008	2016-08-22	2017-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2016-08-19	2017-08-20
System Controller	CT	SC100	-	--	--
Printer	EPSON	PHOTO EX3	CFNH234850	--	--
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2016-08-23	2017-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2016-08-19	2017-08-20
3m OATS	--	--	N/A	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2016-08-24	2017-08-23
Power meter	Anritsu	ML2487A	6K00003613	2016-08-19	2017-08-18
Power sensor	Anritsu	MA2491A	32263	2016-08-19	2017-08-18
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2016-08-24	2017-08-23
LISN	AFJ	LS16C	10010947251	2016-08-22	2017-08-21
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2016-08-20	2017-08-19
9*6*6 Anechoic	--	--	N/A	2016-08-24	2017-08-23
EMI Test Receiver	RS	ESCS30	100139	2016-08-19	2017-08-20
RF Cable	SCHWARZBECK	--	--	2016-08-23	2017-08-22
Pre-Amplifier	HP	8447D	2727A05017	2016-08-05	2017-08-04
Pre-Amplifier	EM	EM30265	--	2016-08-05	2017-08-04

3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: 6.5Mbps data rate (worst case) were chosen for full testing （dutycycle>98%）

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: 6.5Mbps data rate (worst case) were chosen for full testing

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes. （dutycycle>98%）

3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit a	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

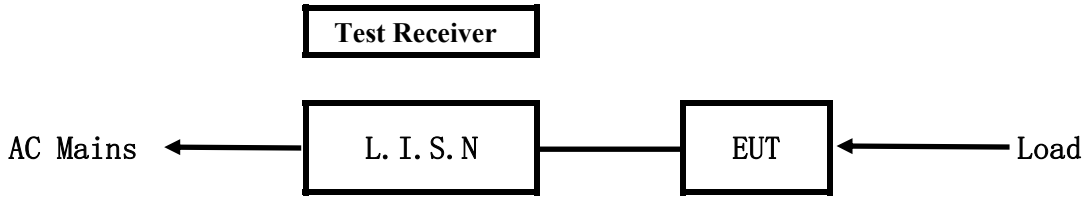

EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014.The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2014.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

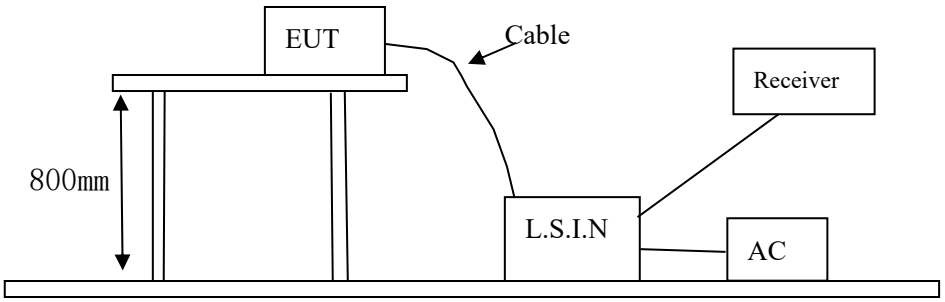

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Action camera	SPRITE LIMITED	CGX3, CGX4, SP9000B, SP9000B+, DV6000 , DV600, DV060	2AI5C-CYCLOPSGEAR

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Rating
Power Supply	AoHai	A68-50200	VOC	Input: 100-240~, 50/60Hz, 0.35A; Output:DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014.

A Setup the EUT and simulators as shown on follow

B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency (MHz)	Class A Limits (dB μ V)		Class B Limits (dB μ V)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ～ 0.50	79.0	66.0	66.0～56.0*	56.0～46.0*
0.50 ～ 5.00	73.0	60.0	56.0	46.0
5.00 ～ 30.00	73.0	60.0	60.0	50.0

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

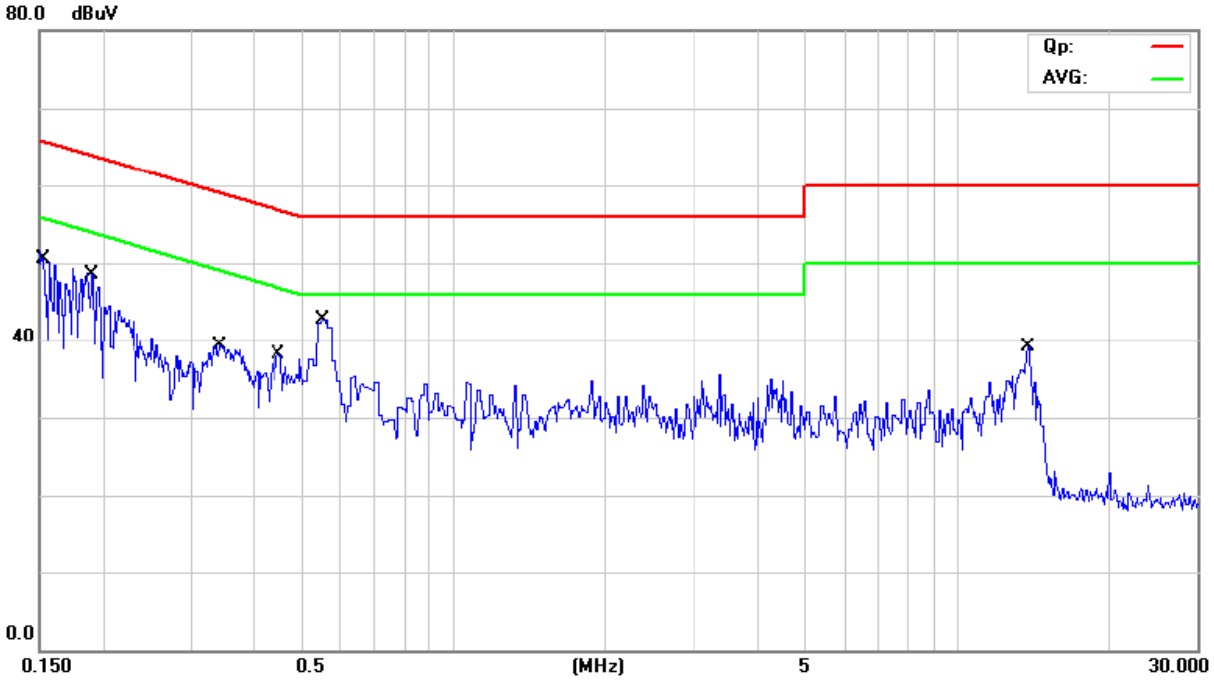

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1521	37.20	9.84	47.04	65.88	-18.84	QP	
2		0.1521	2.90	9.84	12.74	55.88	-43.14	AVG	
3		0.1907	30.30	9.89	40.19	64.01	-23.82	QP	
4		0.1907	6.10	9.89	15.99	54.01	-38.02	AVG	
5		0.5526	26.30	10.34	36.64	56.00	-19.36	QP	
6		0.5526	11.60	10.34	21.94	46.00	-24.06	AVG	
7		0.3387	23.80	10.08	33.88	59.24	-25.36	QP	
8		0.3387	2.10	10.08	12.18	49.24	-37.06	AVG	
9		0.4491	21.80	10.21	32.01	56.89	-24.88	QP	
10		0.4491	4.10	10.21	14.31	46.89	-32.58	AVG	
11		13.8423	17.30	11.32	28.62	60.00	-31.38	QP	
12		13.8423	7.10	11.32	18.42	50.00	-31.58	AVG	

B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

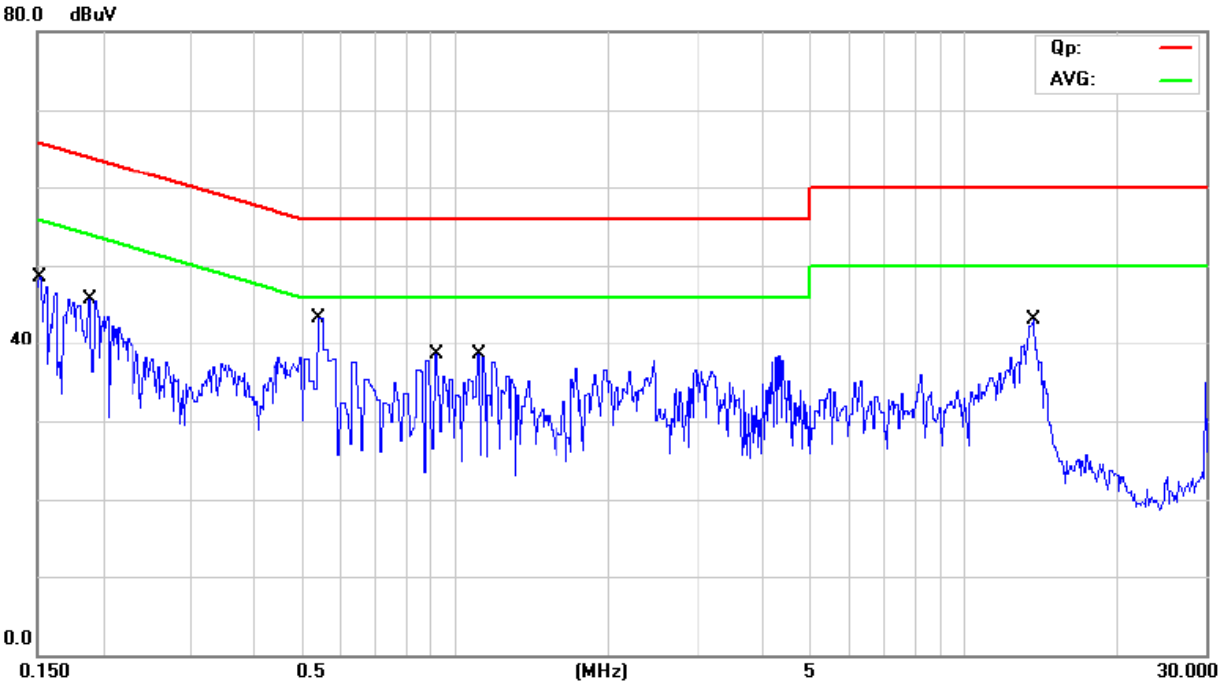

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1515	33.20	9.84	43.04	65.92	-22.88	QP	
2		0.1515	0.80	9.84	10.64	55.92	-45.28	AVG	
3		0.1896	29.30	9.89	39.19	64.05	-24.86	QP	
4		0.1896	5.10	9.89	14.99	54.05	-39.06	AVG	
5	*	0.5367	26.70	10.32	37.02	56.00	-18.98	QP	
6		0.5367	6.80	10.32	17.12	46.00	-28.88	AVG	
7		0.9128	18.80	10.79	29.59	56.00	-26.41	QP	
8		0.9128	0.20	10.79	10.99	46.00	-35.01	AVG	
9		1.1165	18.30	10.90	29.20	56.00	-26.80	QP	
10		1.1165	0.30	10.90	11.20	46.00	-34.80	AVG	
11		13.7820	20.70	11.32	32.02	60.00	-27.98	QP	
12		13.7820	6.90	11.32	18.22	50.00	-31.78	AVG	

6 Radiated Emission Test

6.1 Test Method and test Procedure:

(1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 899988

(2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.

(3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.

(4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.

(5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.

(6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup

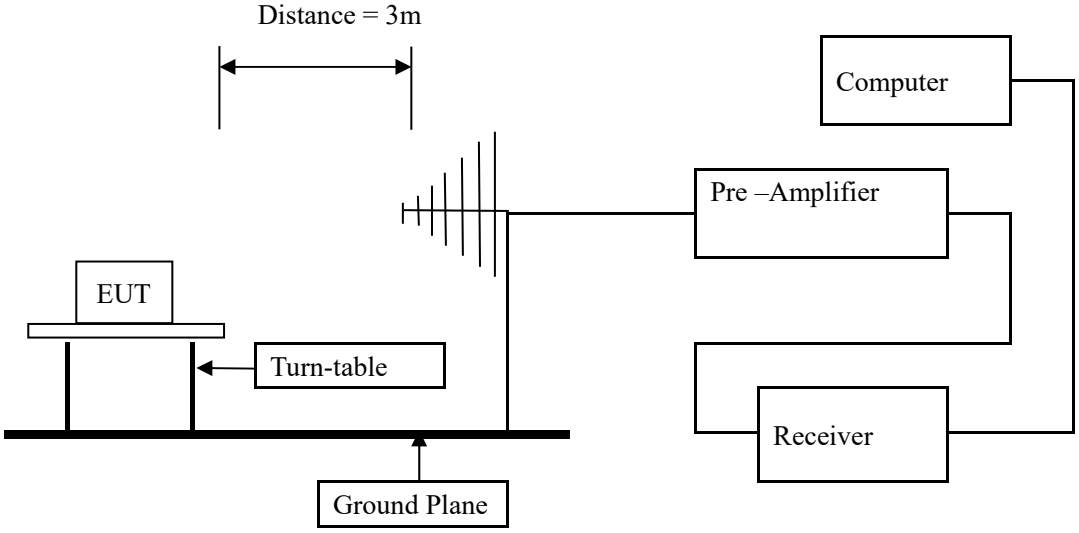

6.2 Configuration of The EUT

Same as section 5.3 of this report

6.3 EUT Operating Condition

Same as section 5.4 of this report.

6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

2. In the Above Table, the higher limit applies at the band edges.

3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: **Pass**

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
100.000	39.34	H	43.50
720.040	40.95	H	46.00
220.000	40.58	H	46.00
340.000	39.42	H	46.00
220.040	39.08	V	46.00
580.040	40.43	V	46.00
640.040	40.24	V	46.00
100.000	39.74	V	43.50

Test Figure:

H

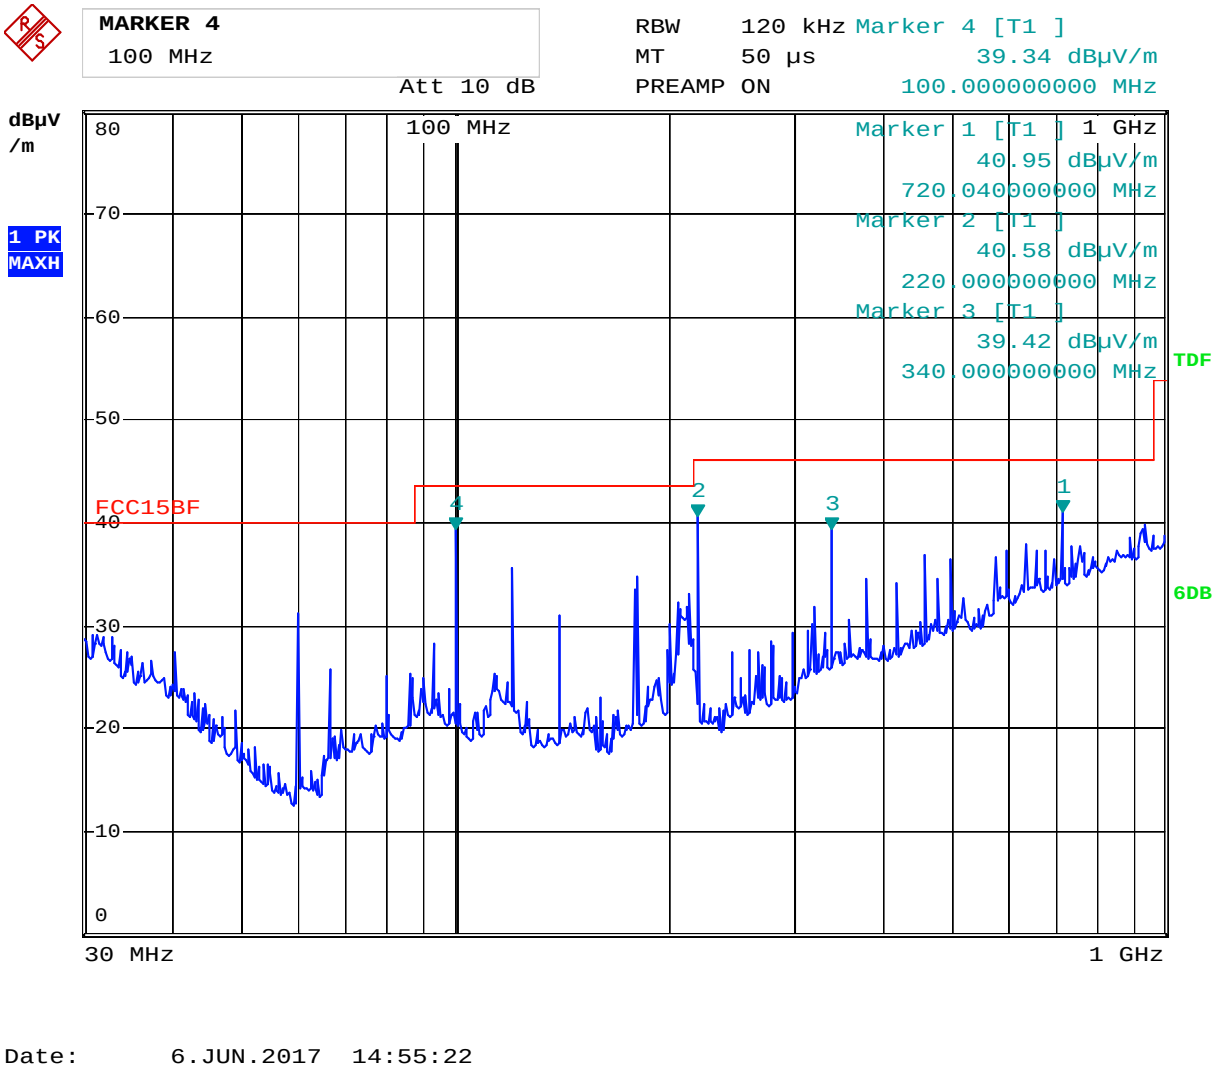

Date: 6.JUN.2017 14:55:22

Test Figure:

V

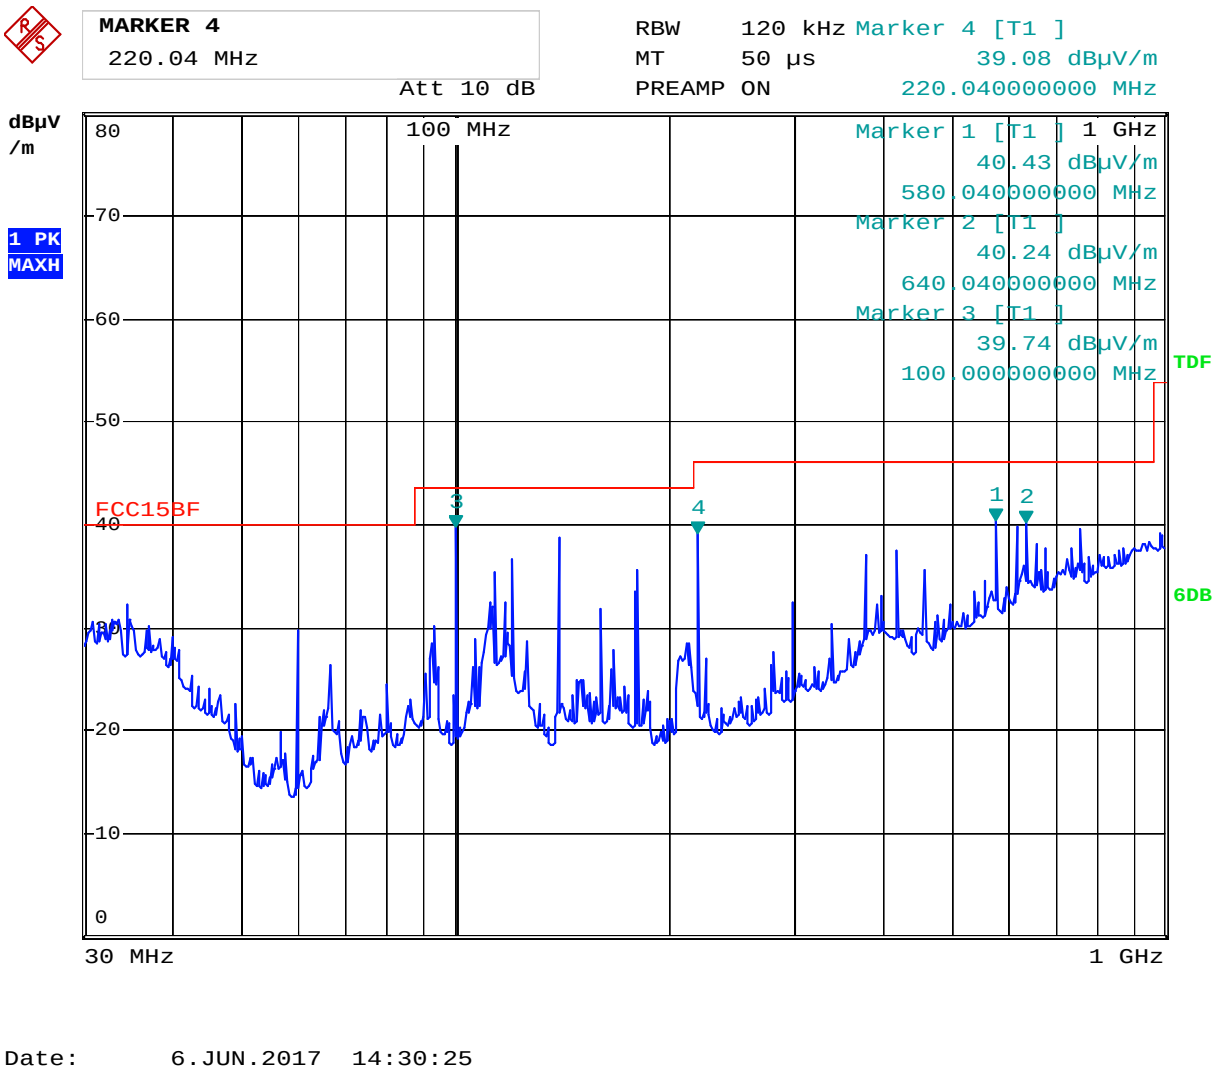

Date: 6.JUN.2017 14:30:25

Operation Mode: Transmitting under CH01 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4824.00	51.28（PK）	H	74(Peak)/ 54(AV)
4824.00	51.82（PK）	V	74(Peak)/ 54(AV)
7236.00	--	H/V	74(Peak)/ 54(AV)
9648.00	--	H/V	74(Peak)/ 54(AV)
12060	--	H/V	74(Peak)/ 54(AV)
14472	--	H/V	74(Peak)/ 54(AV)
16884	--	H/V	74(Peak)/ 54(AV)
19296	--	H/V	74(Peak)/ 54(AV)
21708	--	H/V	74(Peak)/ 54(AV)
24120	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark “---” means that the emissions level is too low to be measured

3. For 802.11g mode 54Mbps

Operation Mode: Transmitting under CH06 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4874.00	50.70（PK）	V	74(Peak)/ 54(AV)
4874.00	50.65（PK）	H	74(Peak)/ 54(AV)
7311.00	--	H/V	74(Peak)/ 54(AV)
9748.00	--	H/V	74(Peak)/ 54(AV)
12185	--	H/V	74(Peak)/ 54(AV)
14622	--	H/V	74(Peak)/ 54(AV)
17059	--	H/V	74(Peak)/ 54(AV)
19496	--	H/V	74(Peak)/ 54(AV)
21933	--	H/V	74(Peak)/ 54(AV)
24370	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
2. Remark "---" means that the emissions level is too low to be measured
3. For 802.11g mode 54 Mbps

Operation Mode: Transmitting under CH11 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4924	51.58（PK）	H	74(Peak)/ 54(AV)
4924	51.14（PK）	V	74(Peak)/ 54(AV)
7368	--	H/V	74(Peak)/ 54(AV)
9848	--	H/V	74(Peak)/ 54(AV)
12310	--	H/V	74(Peak)/ 54(AV)
14772	--	H/V	74(Peak)/ 54(AV)
17234	--	H/V	74(Peak)/ 54(AV)
19696	--	H/V	74(Peak)/ 54(AV)
22158	--	H/V	74(Peak)/ 54(AV)
24620	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
2. Remark "---" means that the emissions level is too low to be measured
3. For 802.11g mode at 54 Mbps

Please refer to the following test plots for details:

CH01 for 11g at 54Mbps: Horizontal

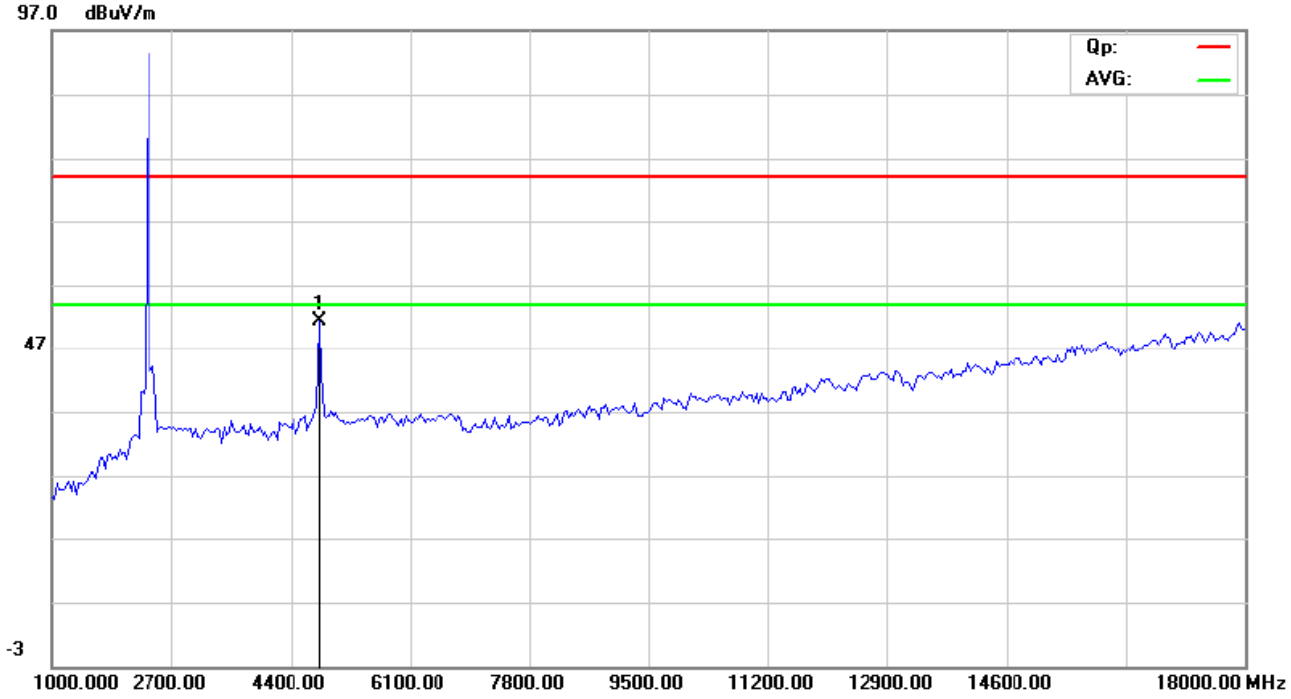

CH01 for 11g at 54Mbps: Vertical

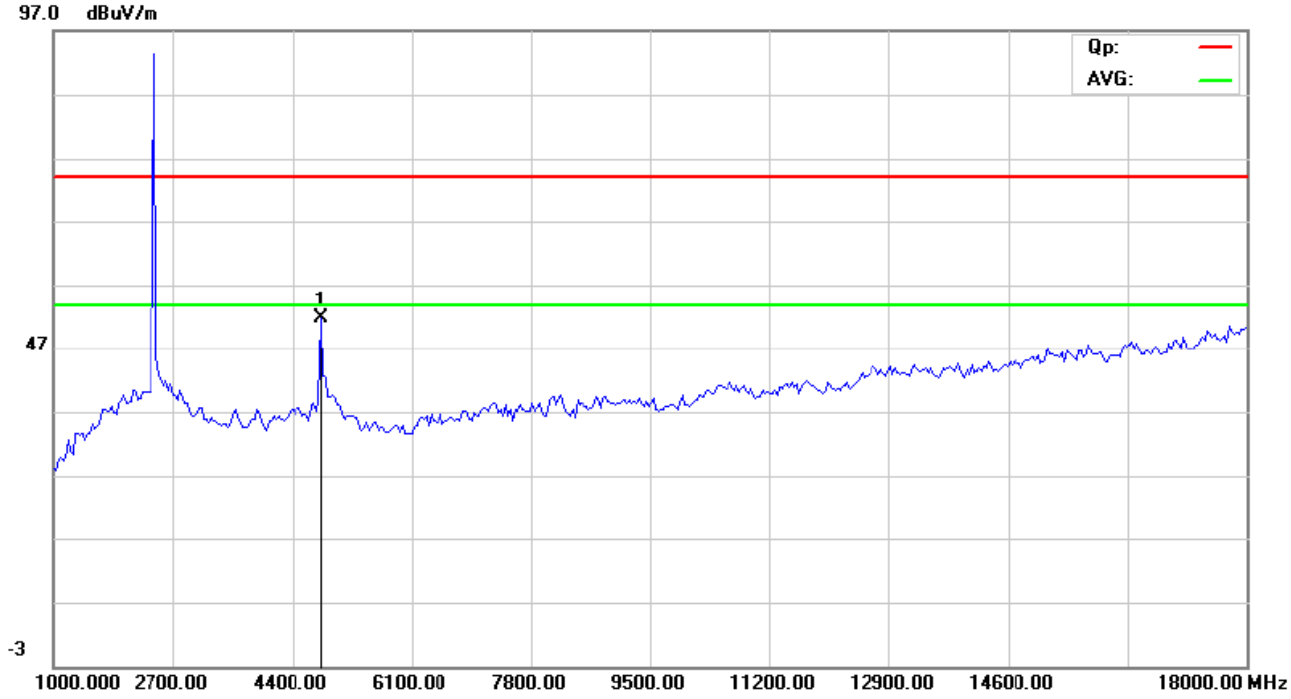

CH06 for 11g at 54Mbps: Vertical

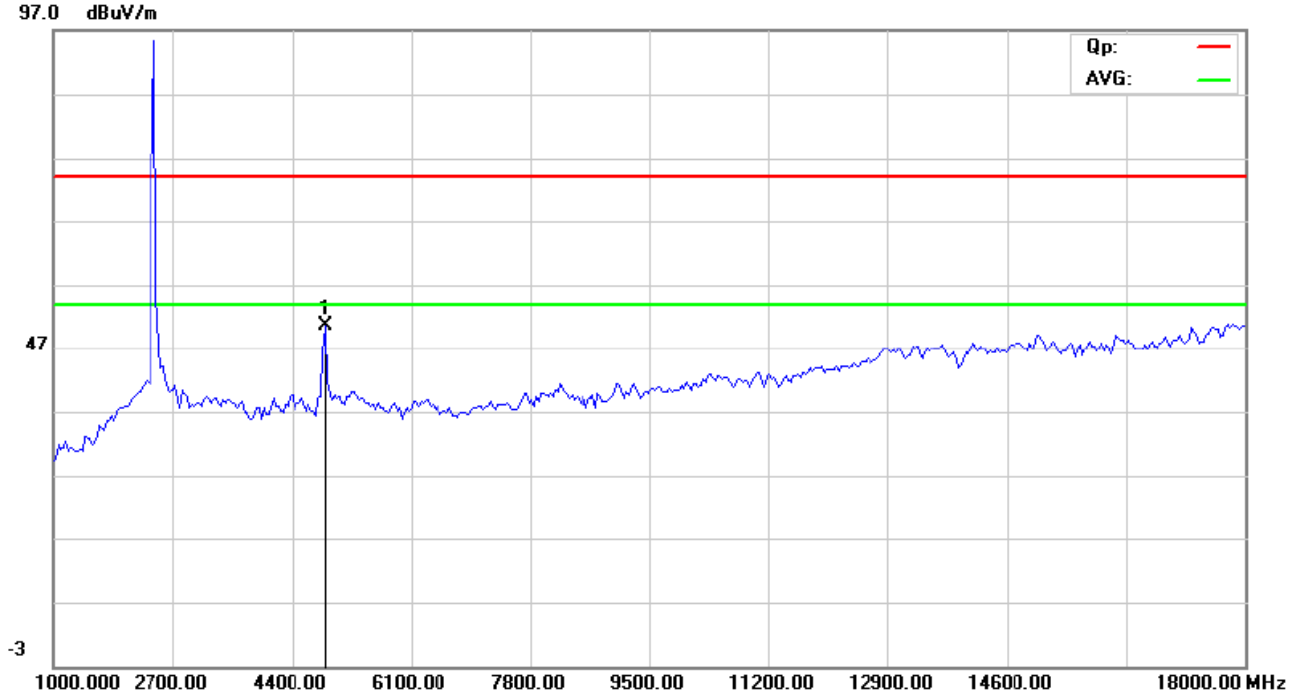

CH06 for 11g at 54Mbps: Horizontal

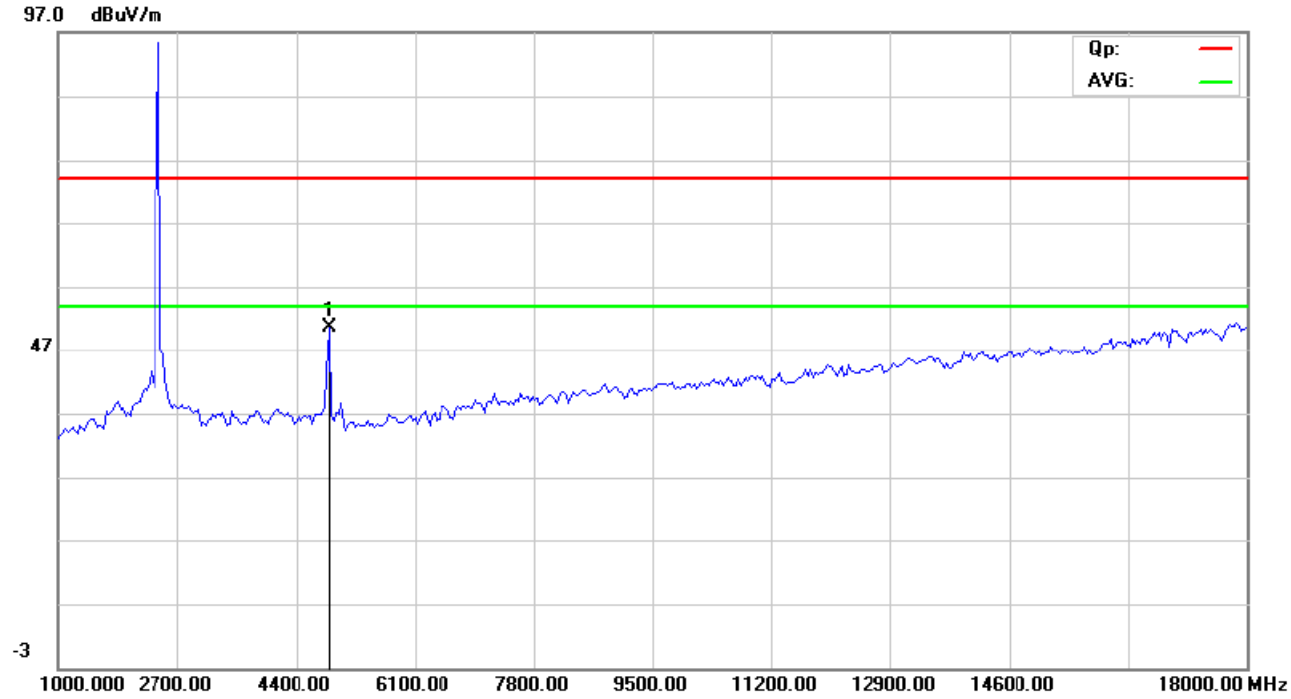

CH11 for 11g at 54Mbps: Vertical

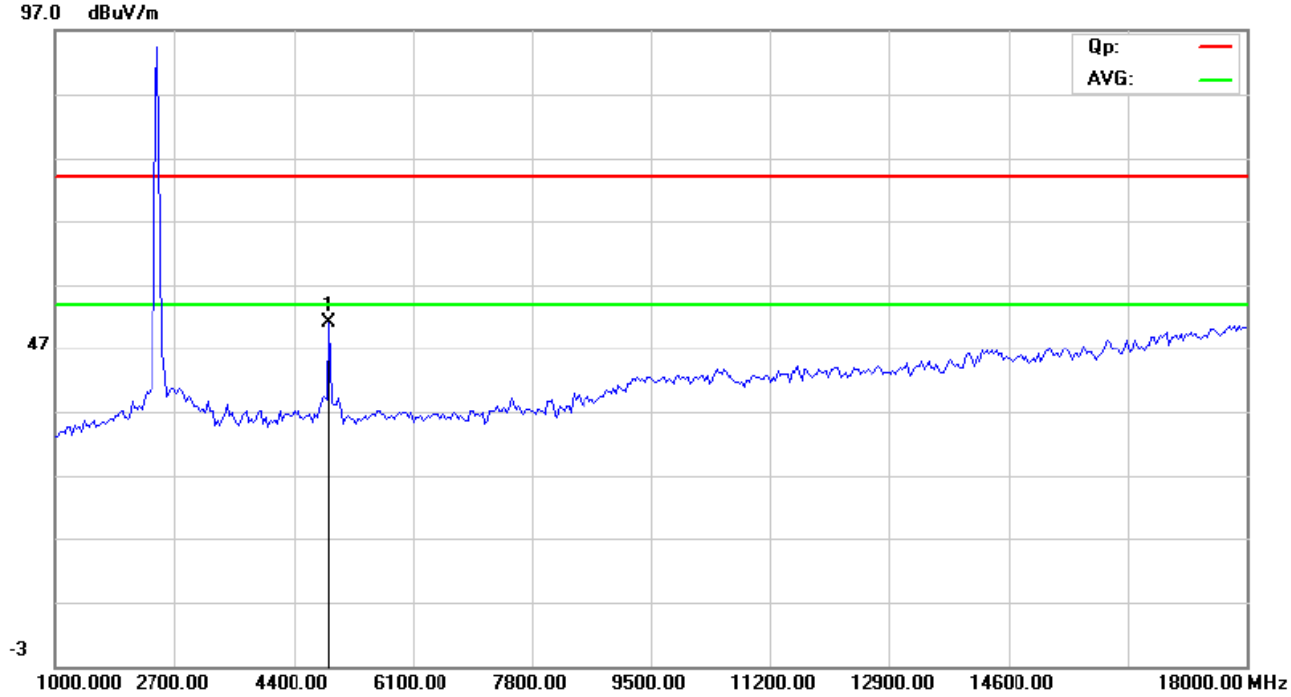

CH11 for 11g at 54Mbps: Horizontal

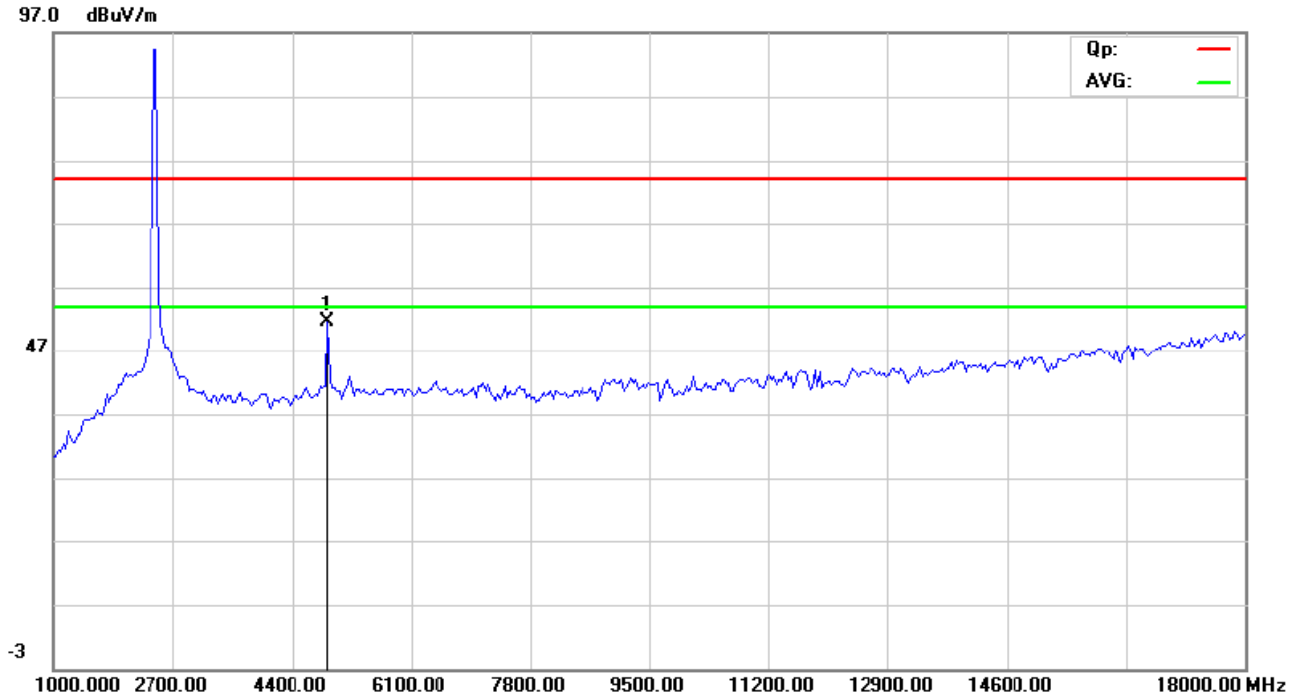

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Operation Mode: Transmitting under CH01 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4824.00	51.32（PK）	H	74(Peak)/ 54(AV)
4824.00	51.59（PK）	V	74(Peak)/ 54(AV)
7236.00	--	H/V	74(Peak)/ 54(AV)
9648.00	--	H/V	74(Peak)/ 54(AV)
12060	--	H/V	74(Peak)/ 54(AV)
14472	--	H/V	74(Peak)/ 54(AV)
16684	--	H/V	74(Peak)/ 54(AV)
19296	--	H/V	74(Peak)/ 54(AV)
21708	--	H/V	74(Peak)/ 54(AV)
24120	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
2. Remark "---" means that the emissions level is too low to be measured
3. For 802.11b mode 11Mbps

Operation Mode: Transmitting under CH06 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4874.00	50.51（PK）	H	74(Peak)/ 54(AV)
4874.00	50.08（PK）	V	74(Peak)/ 54(AV)
7311.00	--	H/V	74(Peak)/ 54(AV)
9748.00	--	H/V	74(Peak)/ 54(AV)
12185	--	H/V	74(Peak)/ 54(AV)
14622	--	H/V	74(Peak)/ 54(AV)
17059	--	H/V	74(Peak)/ 54(AV)
19496	--	H/V	74(Peak)/ 54(AV)
21933	--	H/V	74(Peak)/ 54(AV)
24370	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
2. Remark "---" means that the emissions level is too low to be measured
3. For 802.11b mode 11Mbps

Operation Mode: Transmitting under CH11 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4924	49.79（PK）	H	74(Peak)/ 54(AV)
4924	49.63（PK）	V	74(Peak)/ 54(AV)
7368	--	H/V	74(Peak)/ 54(AV)
9848	--	H/V	74(Peak)/ 54(AV)
12310	--	H/V	74(Peak)/ 54(AV)
14772	--	H/V	74(Peak)/ 54(AV)
17234	--	H/V	74(Peak)/ 54(AV)
19696	--	H/V	74(Peak)/ 54(AV)
22158	--	H/V	74(Peak)/ 54(AV)
24620	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark “---” means that the emissions level is too low to be measured

3. For 802.11b mode at 11Mbps

Please refer to the following test plots for details:

CH01 for 11b at 11Mbps: Horizontal

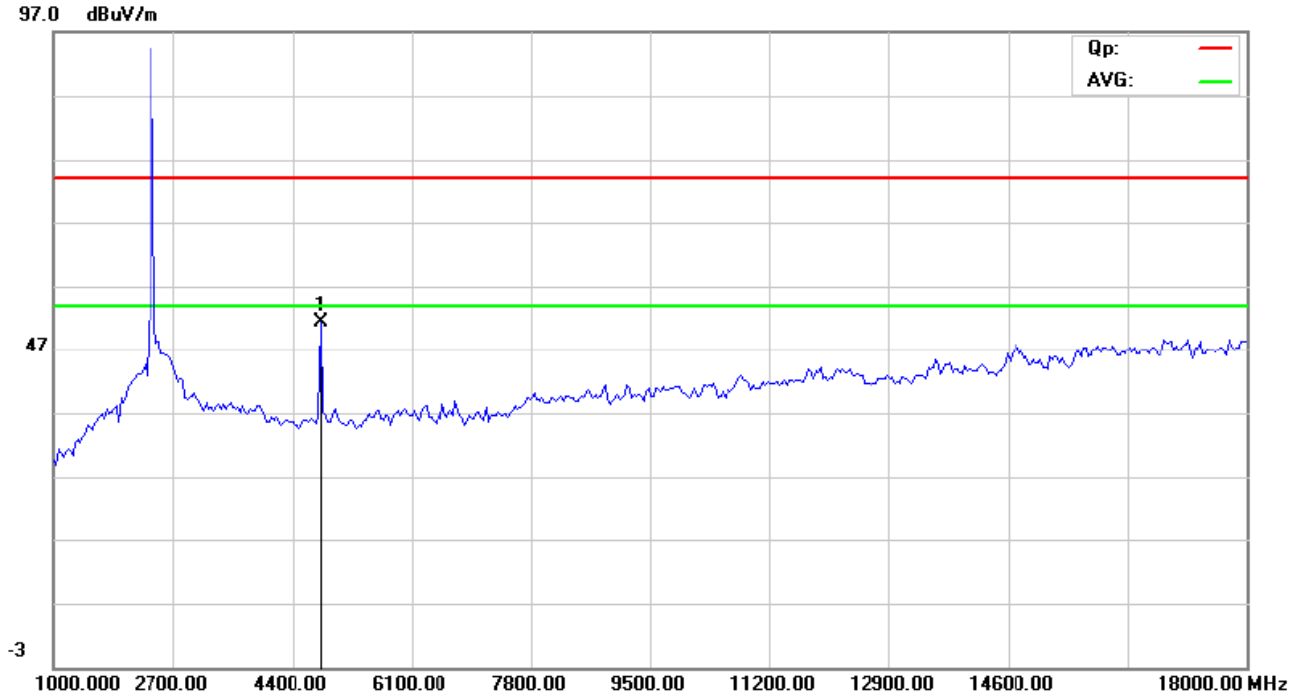

CH01 for 11b at 11Mbps: Vertical

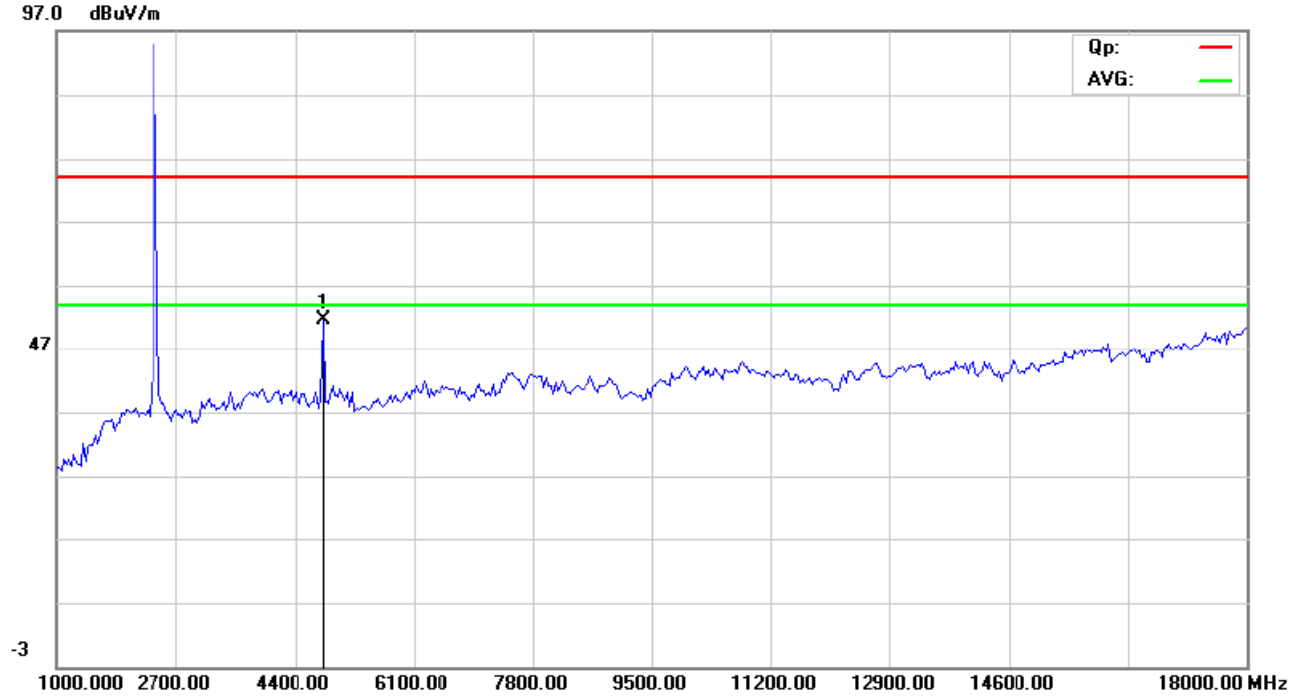

CH06 for 11b at 11Mbps: Vertical

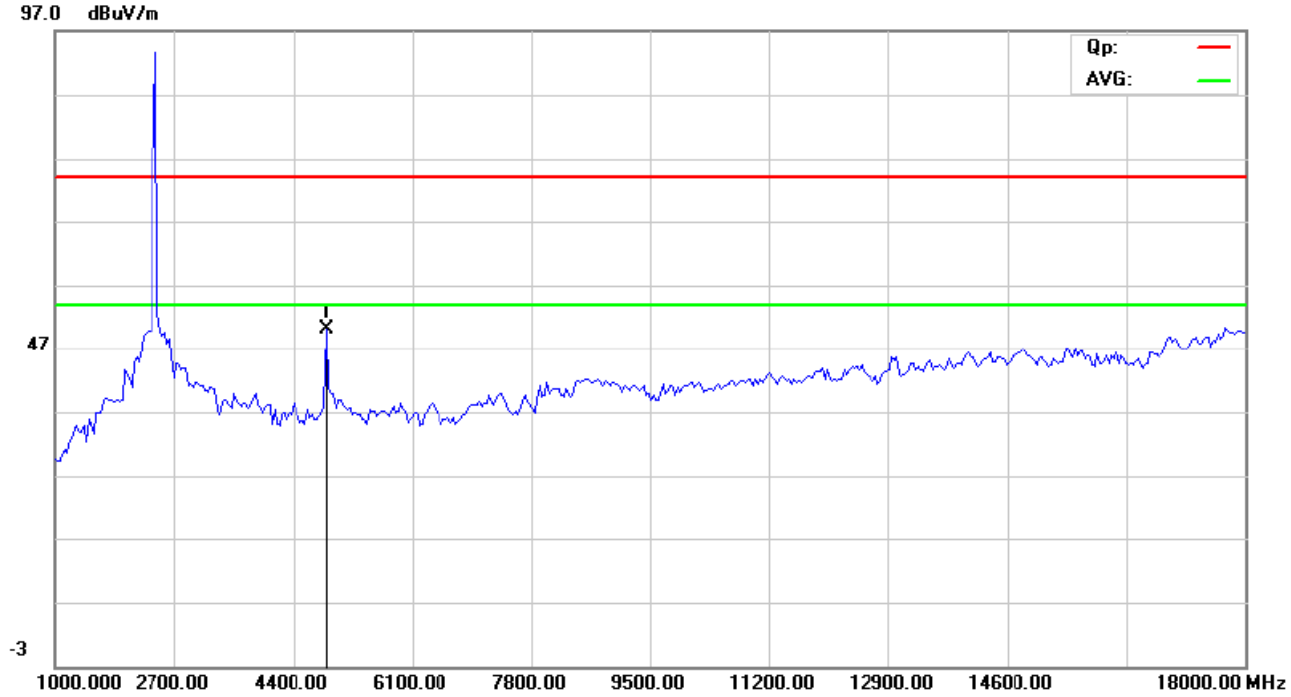

CH06 for 11b at 11Mbps: Horizontal

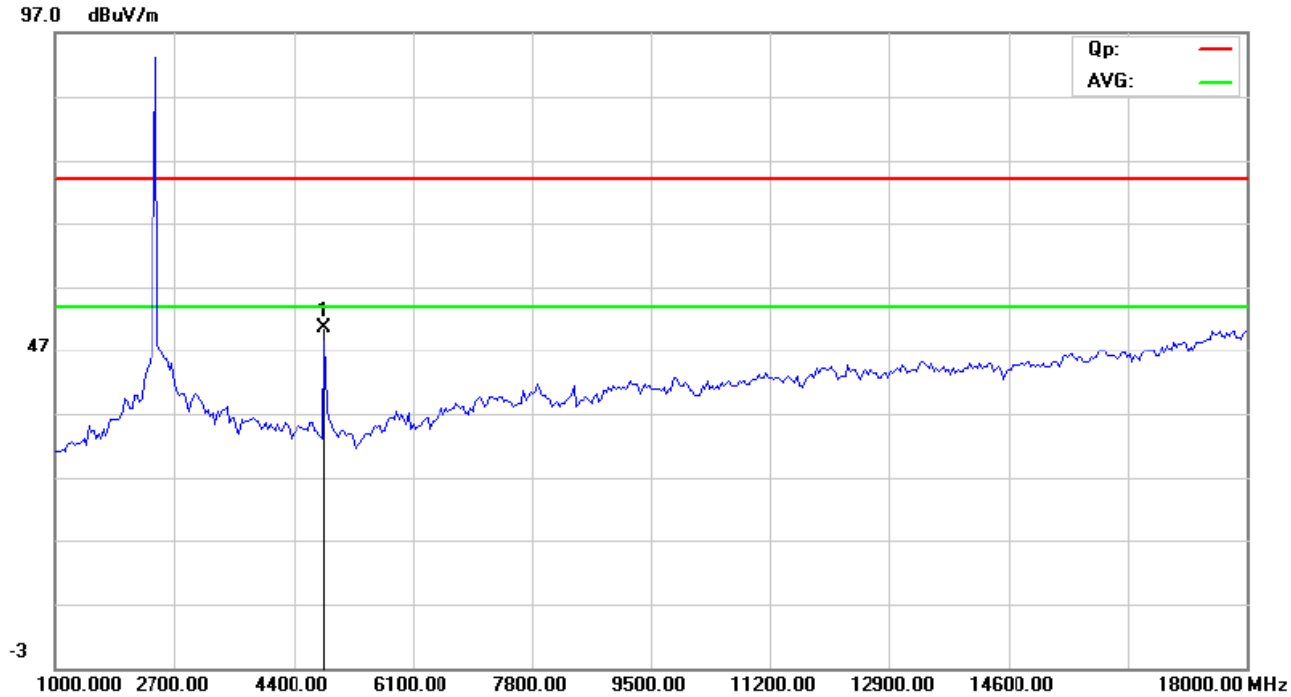

CH11 for 11b at 11Mbps: Vertical

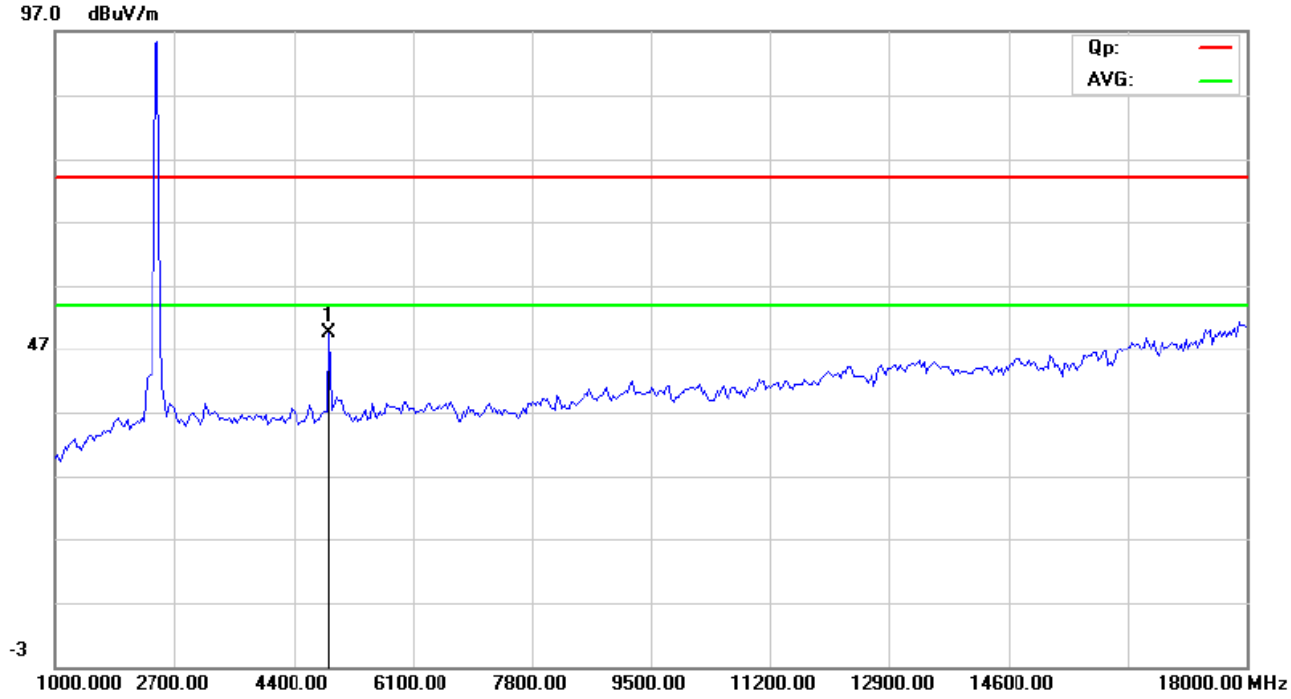

CH11 for 11b at 11Mbps: Horizontal

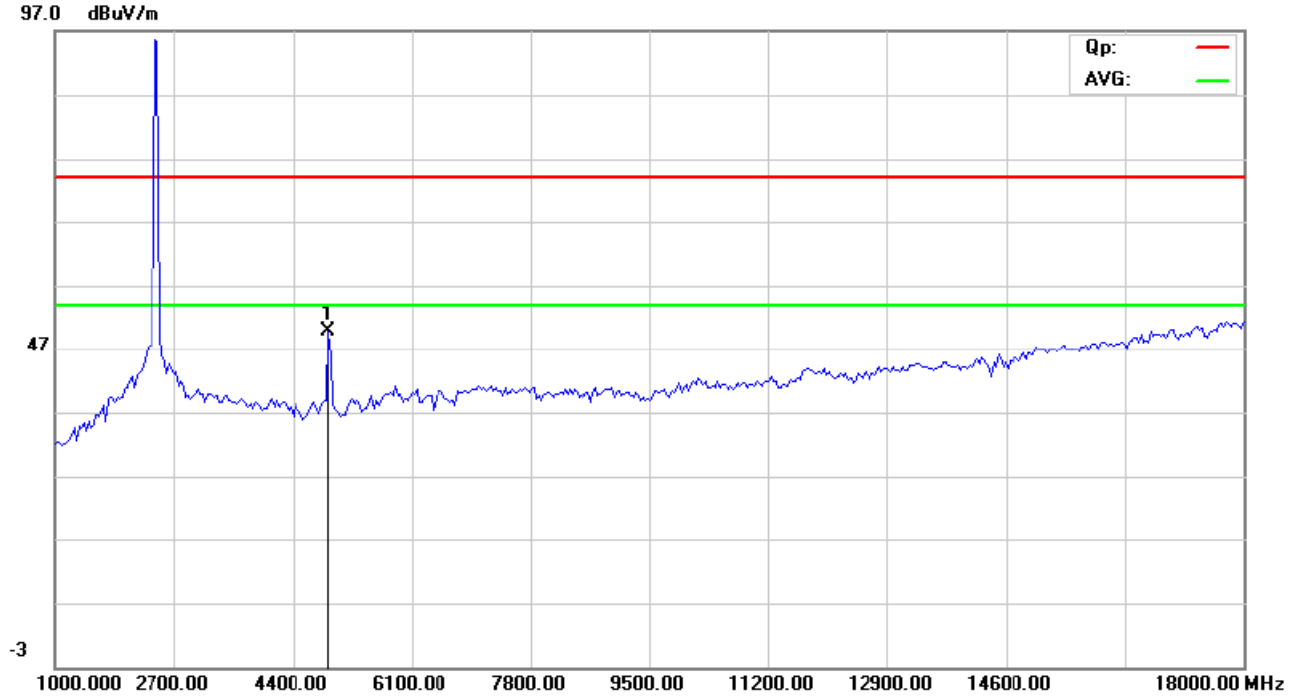

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Operation Mode: Transmitting under CH01 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4824.00	49.35（PK）	H	74(Peak)/ 54(AV)
4824.00	49.59（PK）	V	74(Peak)/ 54(AV)
7236.00	--	H/V	74(Peak)/ 54(AV)
9648.00	--	H/V	74(Peak)/ 54(AV)
12060	--	H/V	74(Peak)/ 54(AV)
14472	--	H/V	74(Peak)/ 54(AV)
16684	--	H/V	74(Peak)/ 54(AV)
19296	--	H/V	74(Peak)/ 54(AV)
21708	--	H/V	74(Peak)/ 54(AV)
24120	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
2. Remark "---" means that the emissions level is too low to be measured
3. For 802.11n (HT20) mode 6.5Mbps

Operation Mode: Transmitting under CH06 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4874.00	50.54（PK）	H	74(Peak)/ 54(AV)
4874.00	50.69（PK）	V	74(Peak)/ 54(AV)
7311.00	--	H/V	74(Peak)/ 54(AV)
9748.00	--	H/V	74(Peak)/ 54(AV)
12185	--	H/V	74(Peak)/ 54(AV)
14622	--	H/V	74(Peak)/ 54(AV)
17059	--	H/V	74(Peak)/ 54(AV)
19496	--	H/V	74(Peak)/ 54(AV)
21933	--	H/V	74(Peak)/ 54(AV)
24370	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
2. Remark "---" means that the emissions level is too low to be measured
3. For 802.11n (HT20) mode 6.5Mbps

Operation Mode: Transmitting under CH11 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4924	48.19（PK）	H	74(Peak)/ 54(AV)
4924	48.64（PK）	V	74(Peak)/ 54(AV)
7368	--	H/V	74(Peak)/ 54(AV)
9848	--	H/V	74(Peak)/ 54(AV)
12310	--	H/V	74(Peak)/ 54(AV)
14772	--	H/V	74(Peak)/ 54(AV)
17234	--	H/V	74(Peak)/ 54(AV)
19696	--	H/V	74(Peak)/ 54(AV)
22158	--	H/V	74(Peak)/ 54(AV)
24620	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark “---” means that the emissions level is too low to be measured

3. For 802.11n (HT20) mode 6.5Mbps

Please refer to the following test plots for details:

CH01 for 11n HT20 at 6.5Mbps: Horizontal

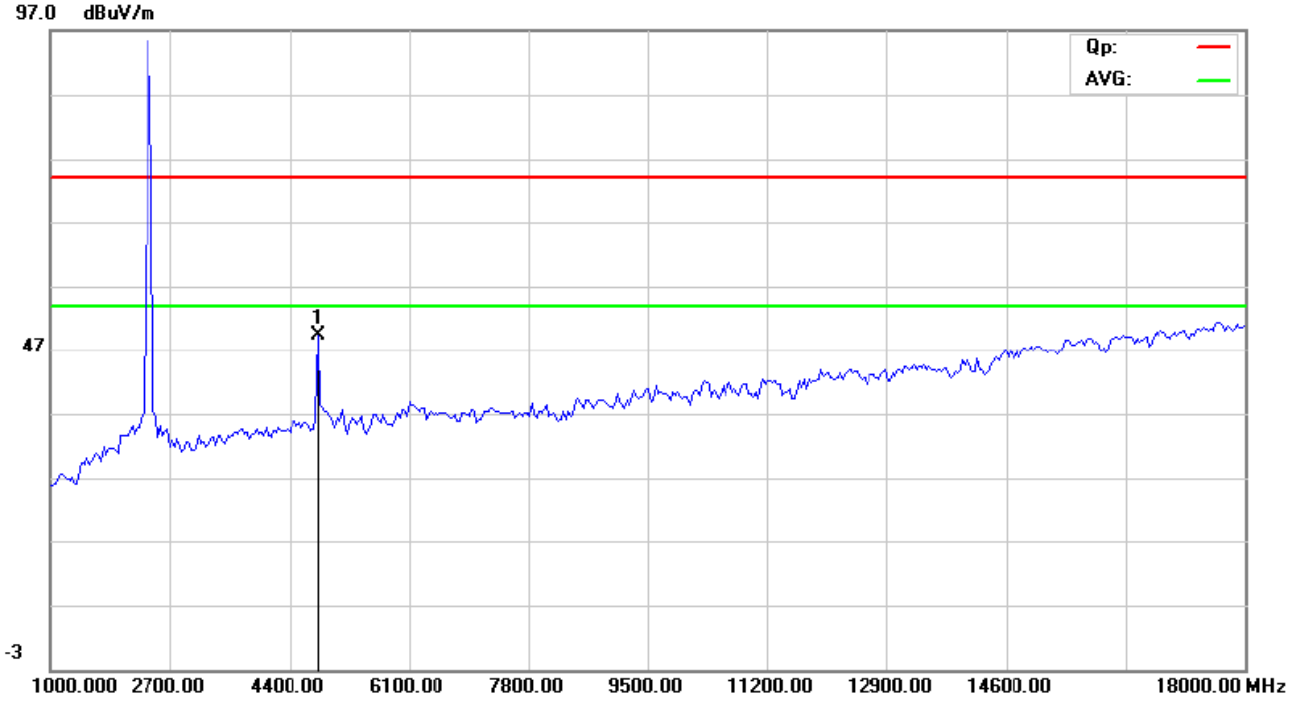

CH01 for 11n HT20 at 6.5Mbps: Vertical

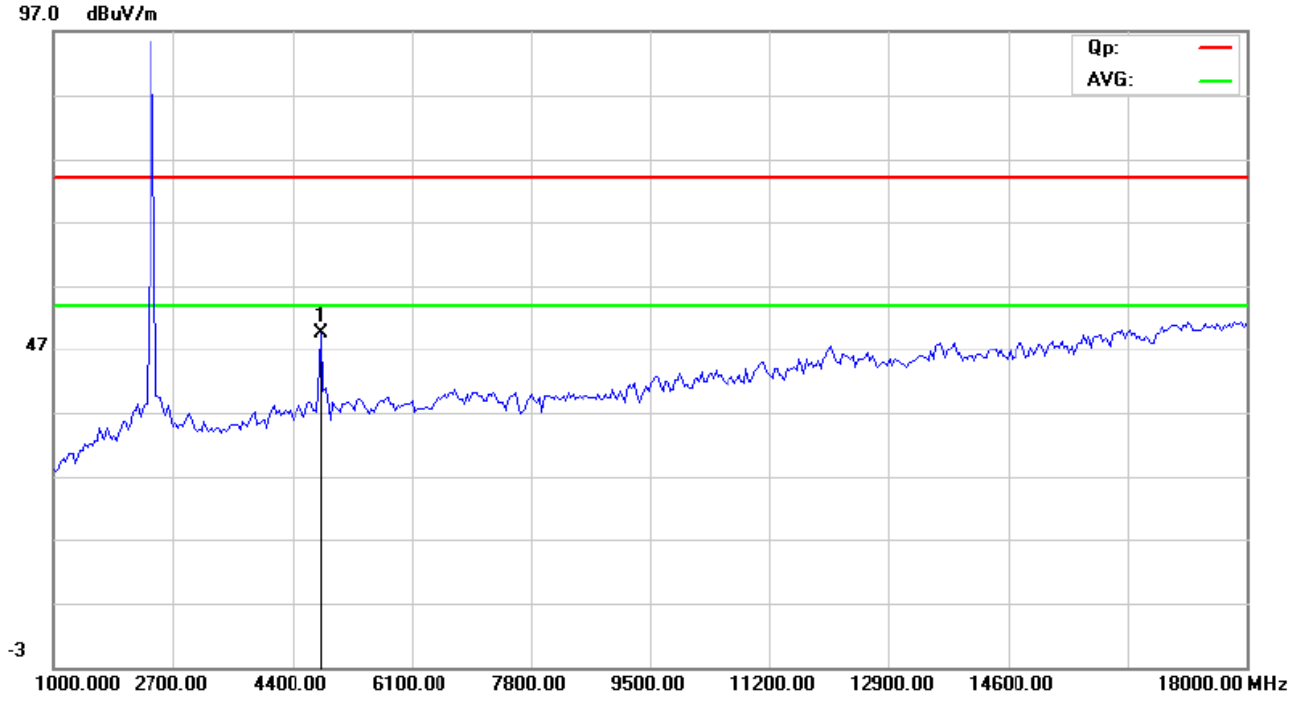

CH06 for 11n HT20 at 6.5Mbps: Vertical

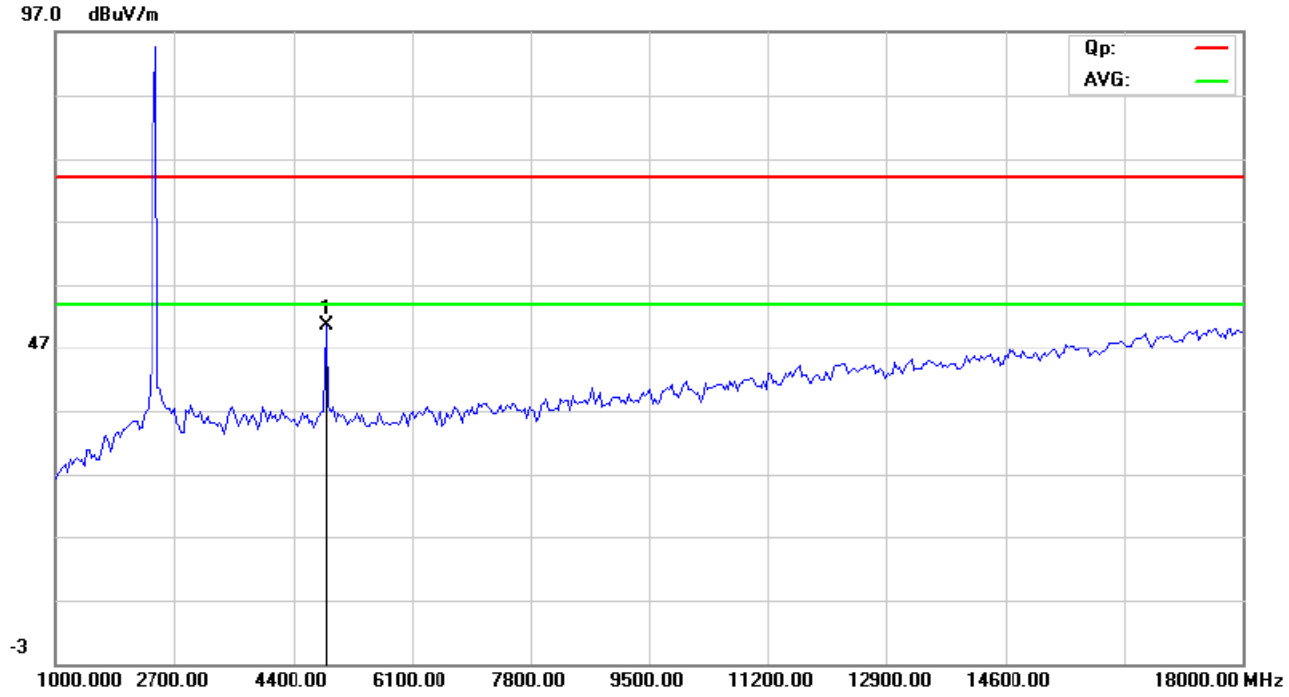

CH06 for 11n HT20 at 6.5Mbps: Horizontal

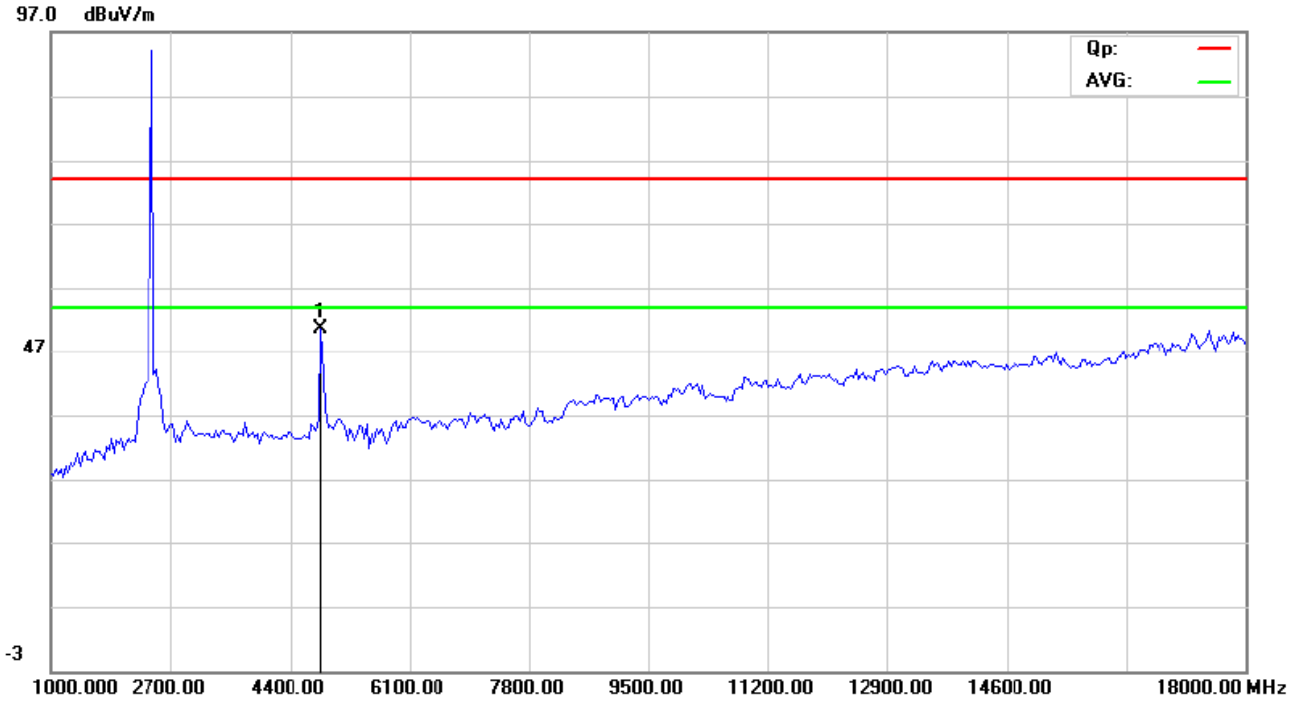

CH11 for 11n HT20 at 6.5Mbps: Vertical

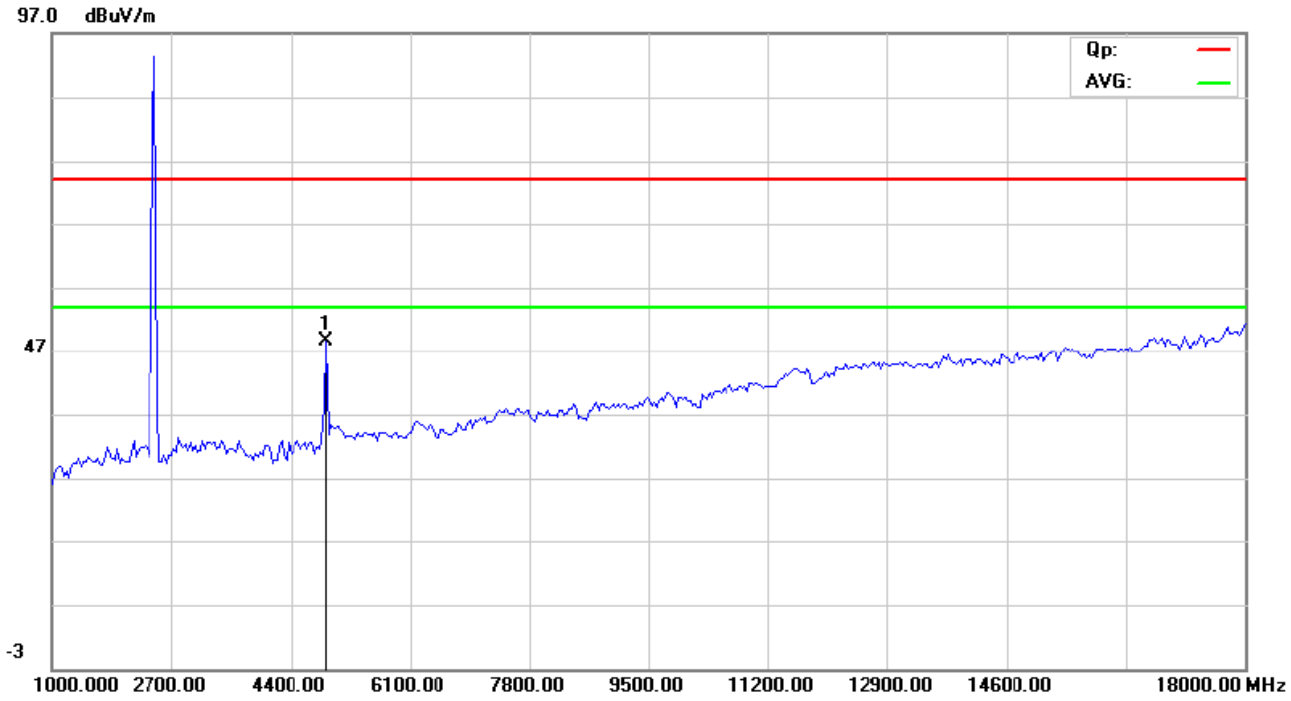

CH11 for 11n HT20 at 6.5Mbps: Horizontal

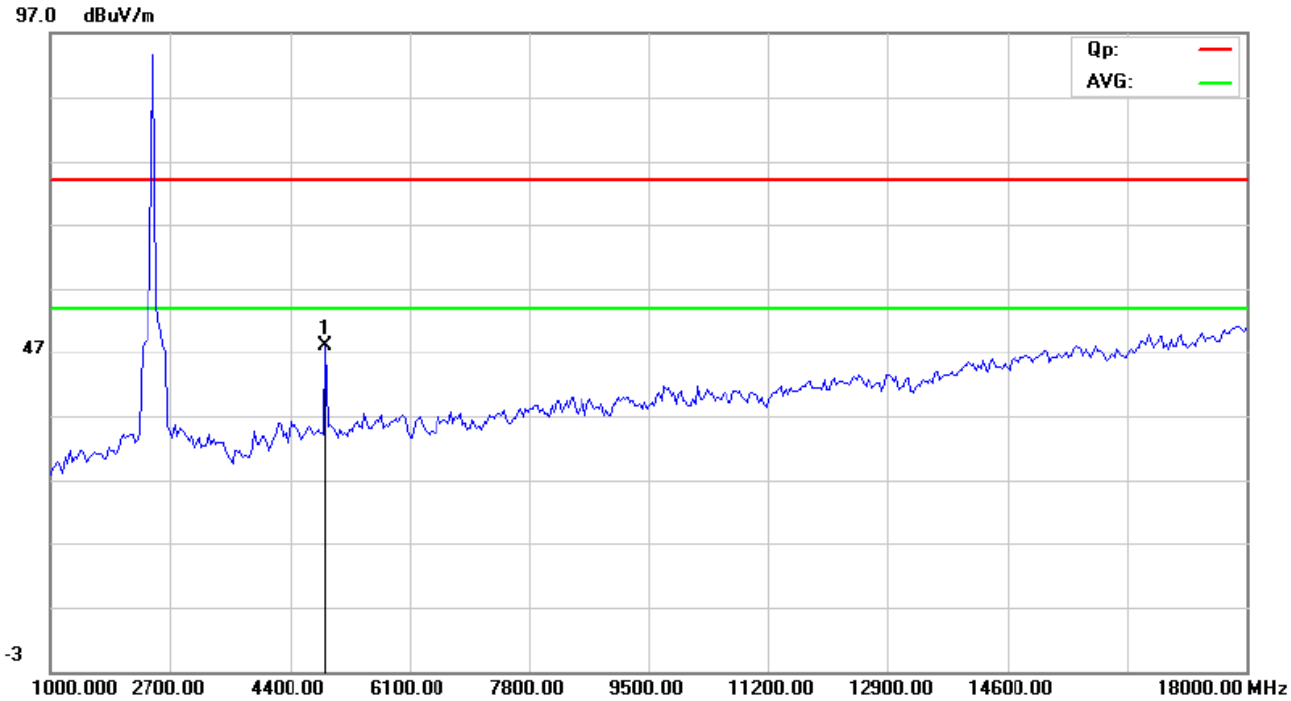

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Operation Mode: Transmitting under CH01 for 11n HT40 at 6.5Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4844.00	50.51（PK）	H	74(Peak)/ 54(AV)
4844.00	50.27（PK）	V	74(Peak)/ 54(AV)
7266.00	--	H/V	74(Peak)/ 54(AV)
9688.00	--	H/V	74(Peak)/ 54(AV)
12110	--	H/V	74(Peak)/ 54(AV)
14532	--	H/V	74(Peak)/ 54(AV)
16954	--	H/V	74(Peak)/ 54(AV)
19376	--	H/V	74(Peak)/ 54(AV)
21798	--	H/V	74(Peak)/ 54(AV)
24220	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
2. Remark "---" means that the emissions level is too low to be measured
3. For 802.11n (HT40) mode 6.5Mbps

Operation Mode: Transmitting under CH04 for 11n HT40 at 6.5Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4874.00	50.66（PK）	H	74(Peak)/ 54(AV)
4874.00	50.53（PK）	V	74(Peak)/ 54(AV)
7311.00	--	H/V	74(Peak)/ 54(AV)
9748.00	--	H/V	74(Peak)/ 54(AV)
12185	--	H/V	74(Peak)/ 54(AV)
14622	--	H/V	74(Peak)/ 54(AV)
17059	--	H/V	74(Peak)/ 54(AV)
19496	--	H/V	74(Peak)/ 54(AV)
21933	--	H/V	74(Peak)/ 54(AV)
24370	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
2. Remark "---" means that the emissions level is too low to be measured
3. For 802.11n (HT40) mode 6.5Mbps

Operation Mode: Transmitting under CH07 for 11n HT40 at 6.5Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
4904	49.58（PK）	H	74(Peak)/ 54(AV)
4904	49.66（PK）	V	74(Peak)/ 54(AV)
7356	--	H/V	74(Peak)/ 54(AV)
9808	--	H/V	74(Peak)/ 54(AV)
12260	--	H/V	74(Peak)/ 54(AV)
14712	--	H/V	74(Peak)/ 54(AV)
17164	--	H/V	74(Peak)/ 54(AV)
19616	--	H/V	74(Peak)/ 54(AV)
22068	--	H/V	74(Peak)/ 54(AV)
24520	--	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark “---” means that the emissions level is too low to be measured

3. For 802.11n (HT40) mode 6.5Mbps

Please refer to the following test plots for details:

CH01 for 11n HT40 at 6.5Mbps: Horizontal

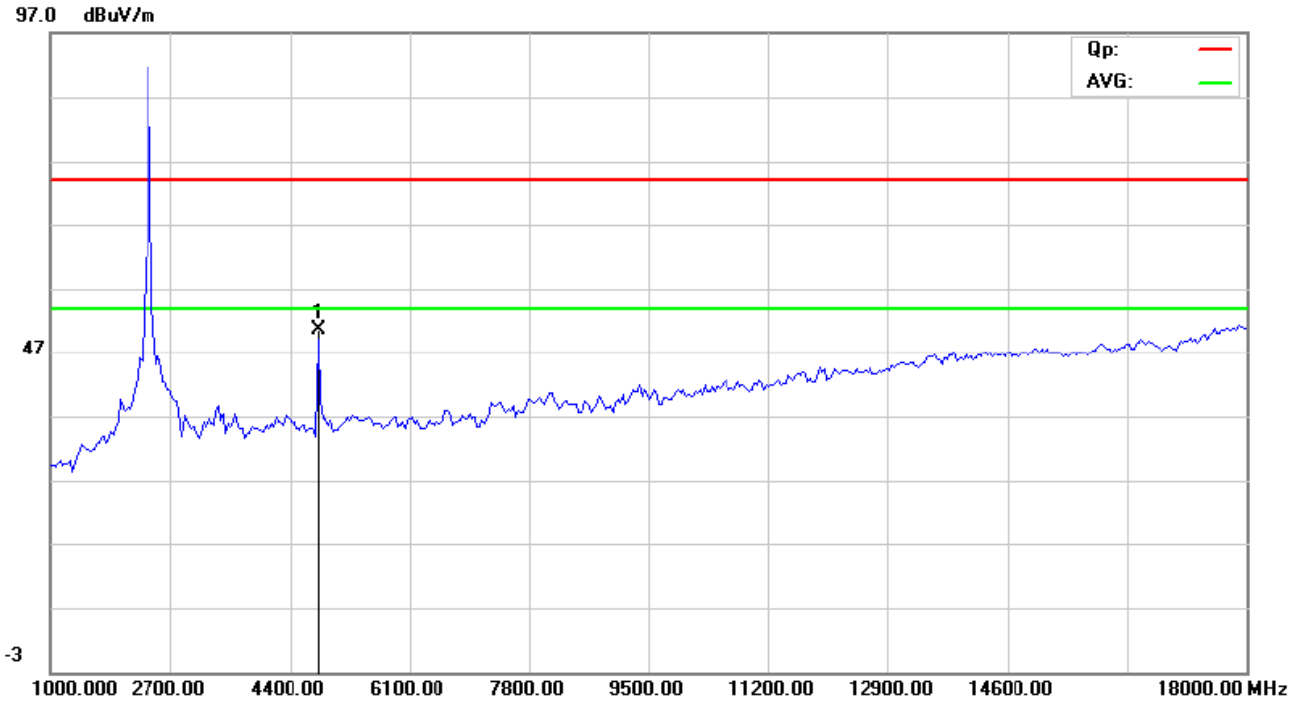

CH01 for 11n HT40 at 6.5Mbps: Vertical

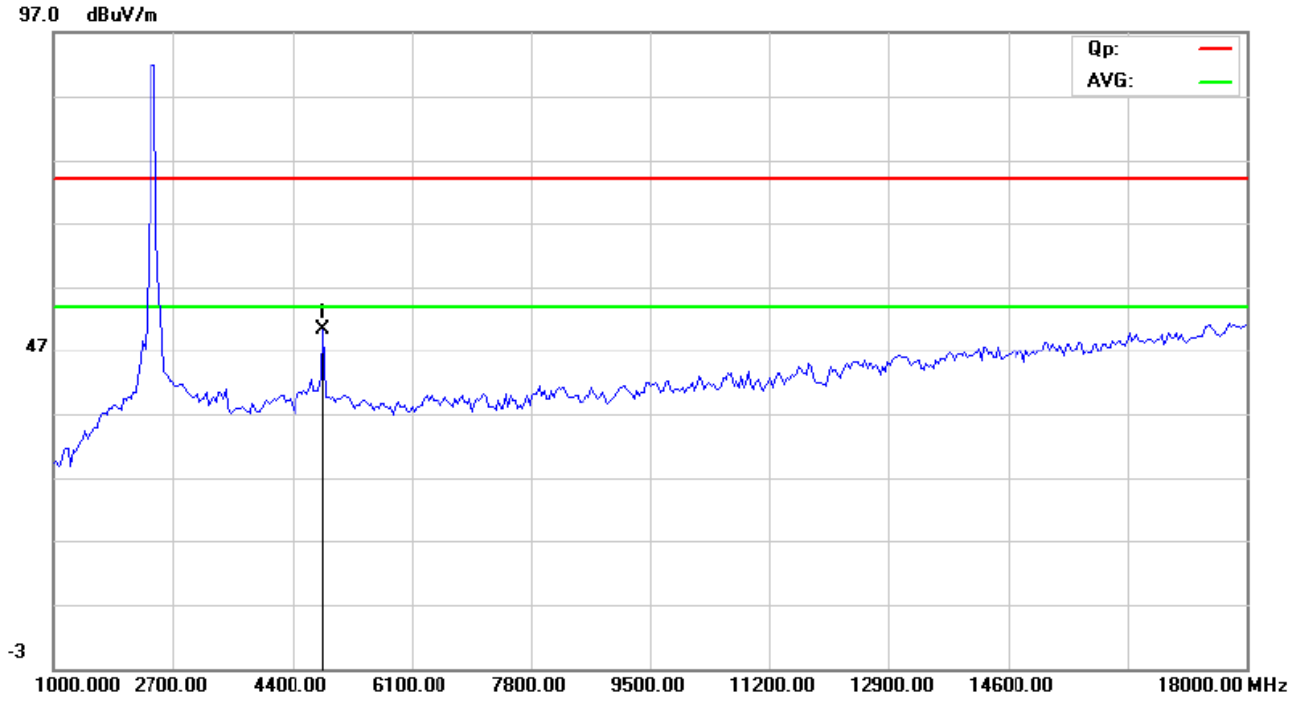

CH04 for 11n HT40 at 6.5Mbps: Vertical

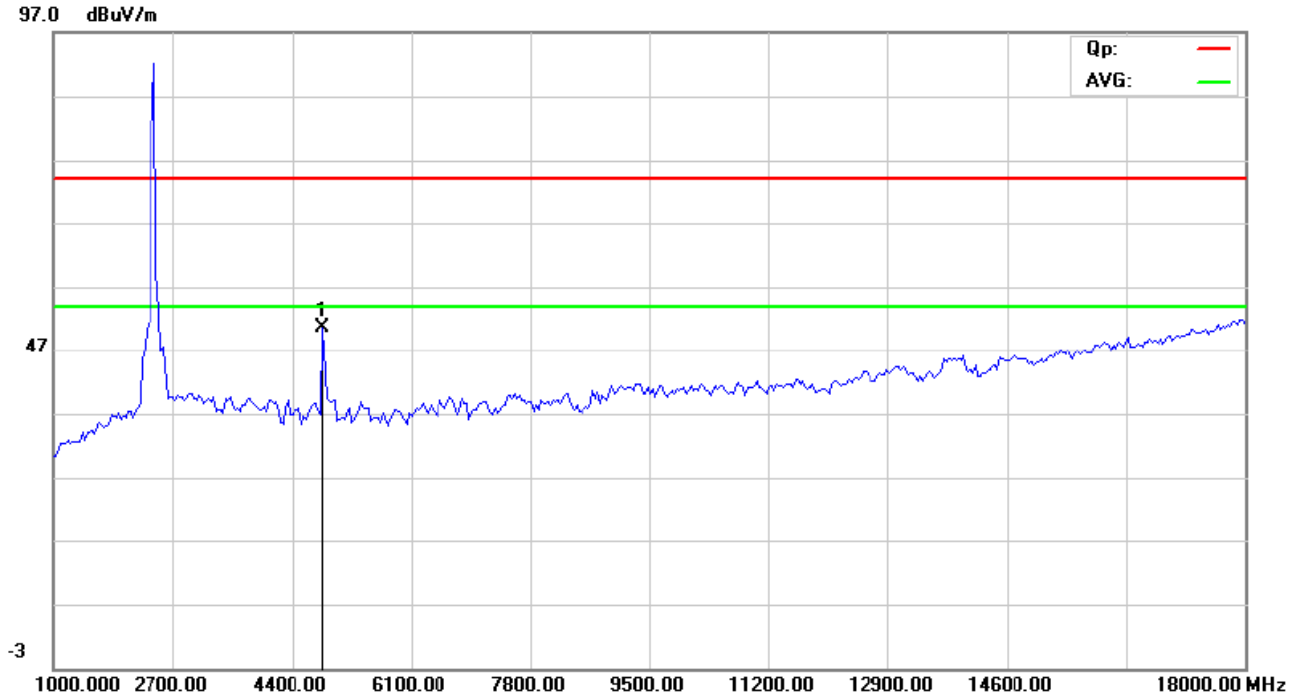

CH04 for 11n HT40 at 6.5Mbps: Horizontal

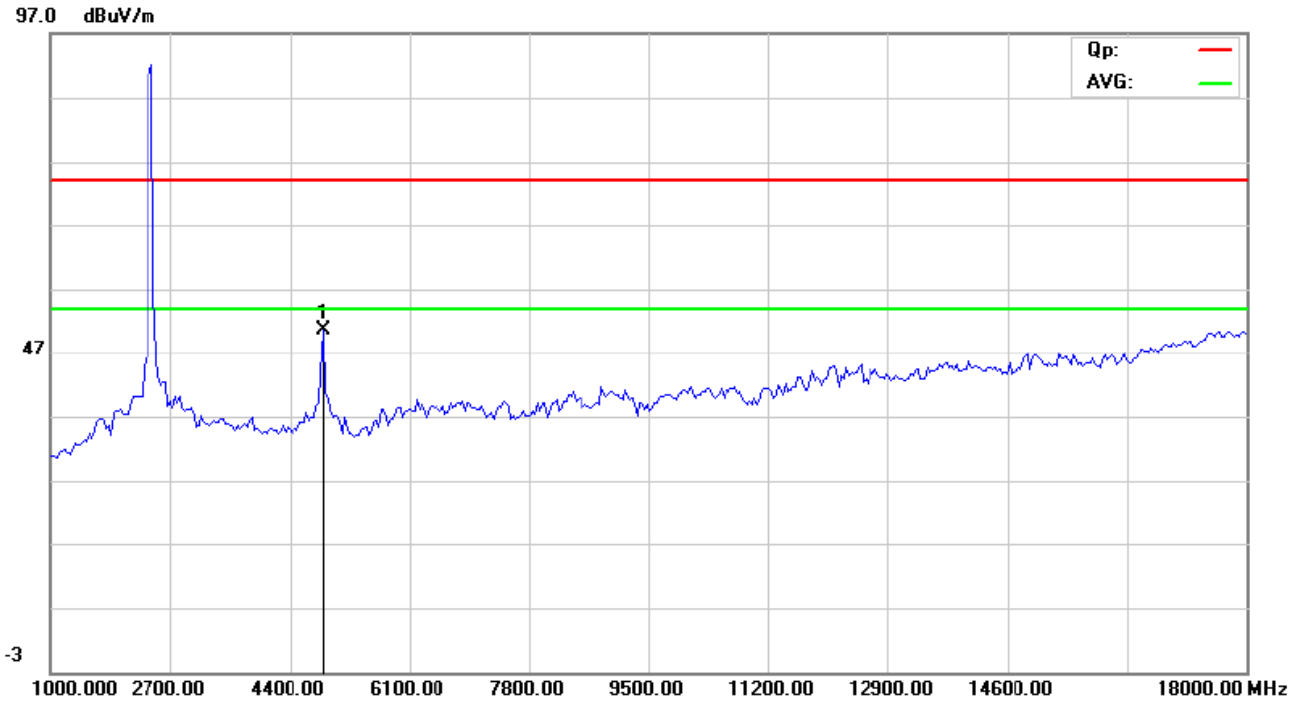

CH07 for 11n HT40 at 6.5Mbps: Vertical

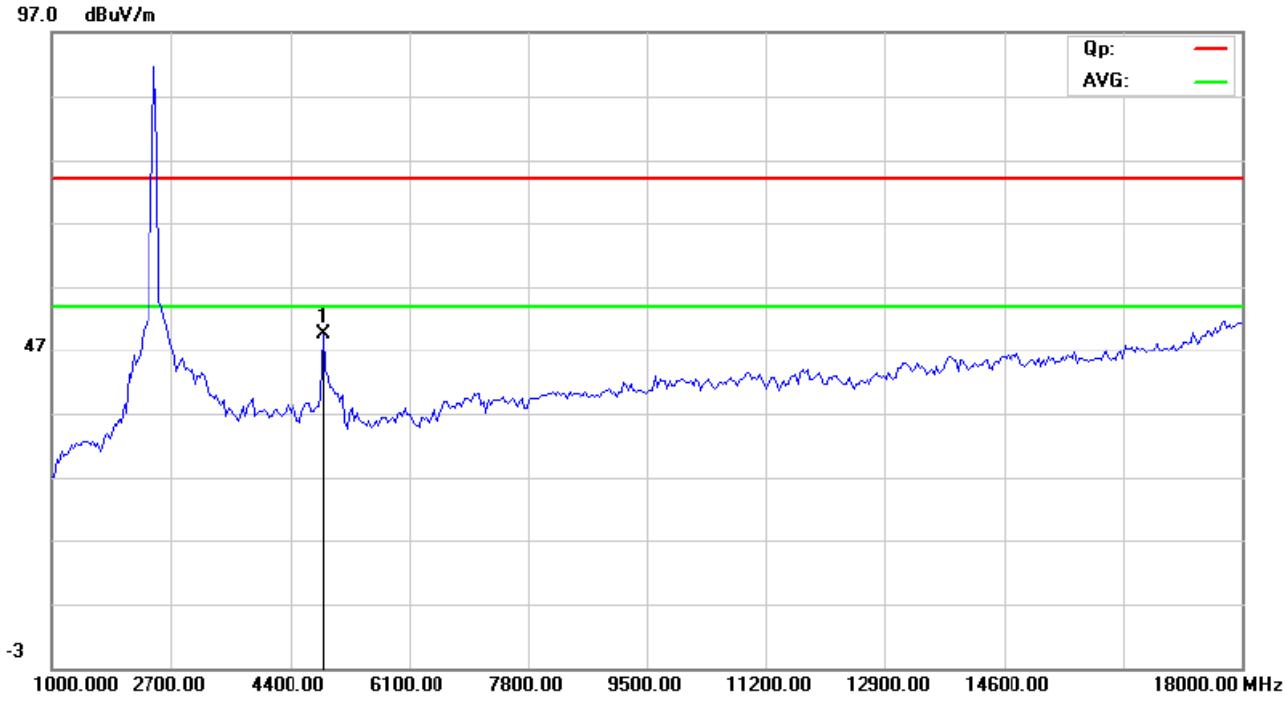

CH07 for 11n HT40 at 6.5Mbps: Horizontal

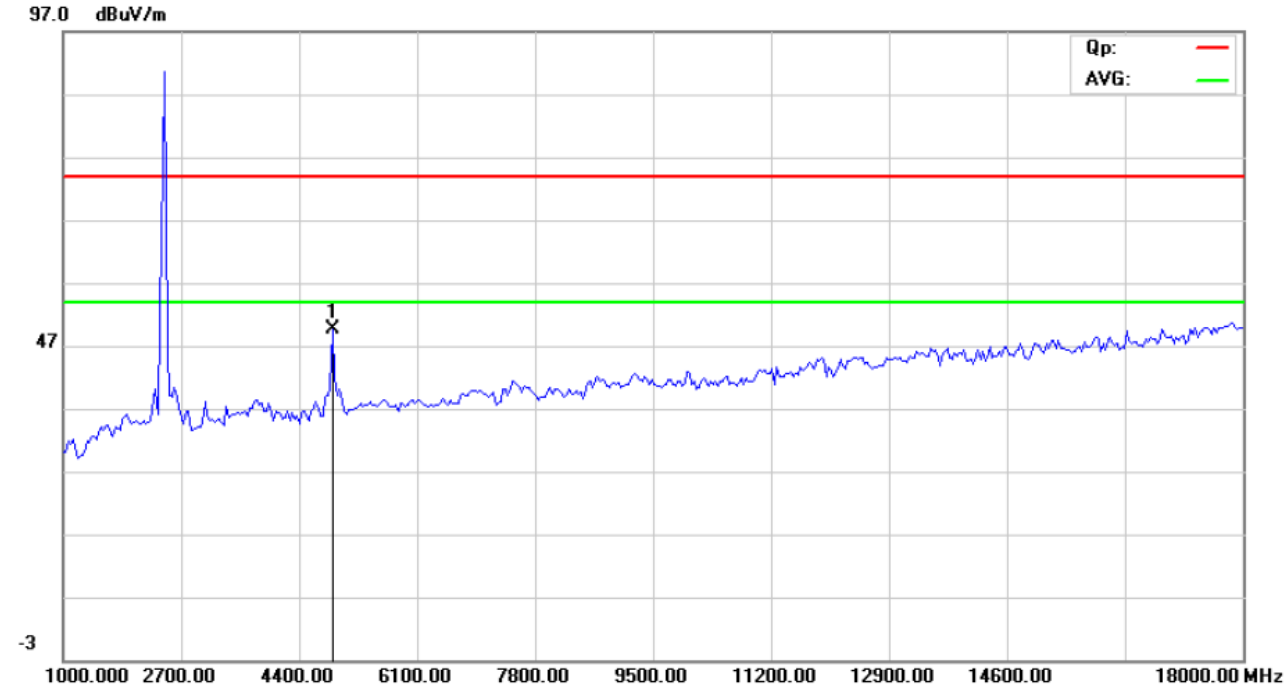

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

7.0 6dB and 99% Bandwidth Measurement

7.1 Test Setup

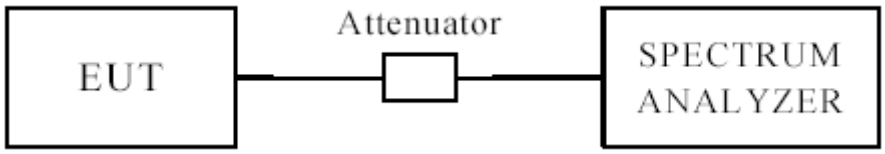

7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

6dB Occupied Bandwidth

EUT	Action camera	Model	CGX3
Mode	802.11b	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2412	1	10.04	0.5	Pass
6	2437	1	10.04	0.5	Pass
11	2462	1	10.04	0.5	Pass
1	2412	11	9.32	0.5	Pass
6	2437	11	9.32	0.5	Pass
11	2462	11	9.32	0.5	Pass

1. 802.11b at 1Mbps of CH01

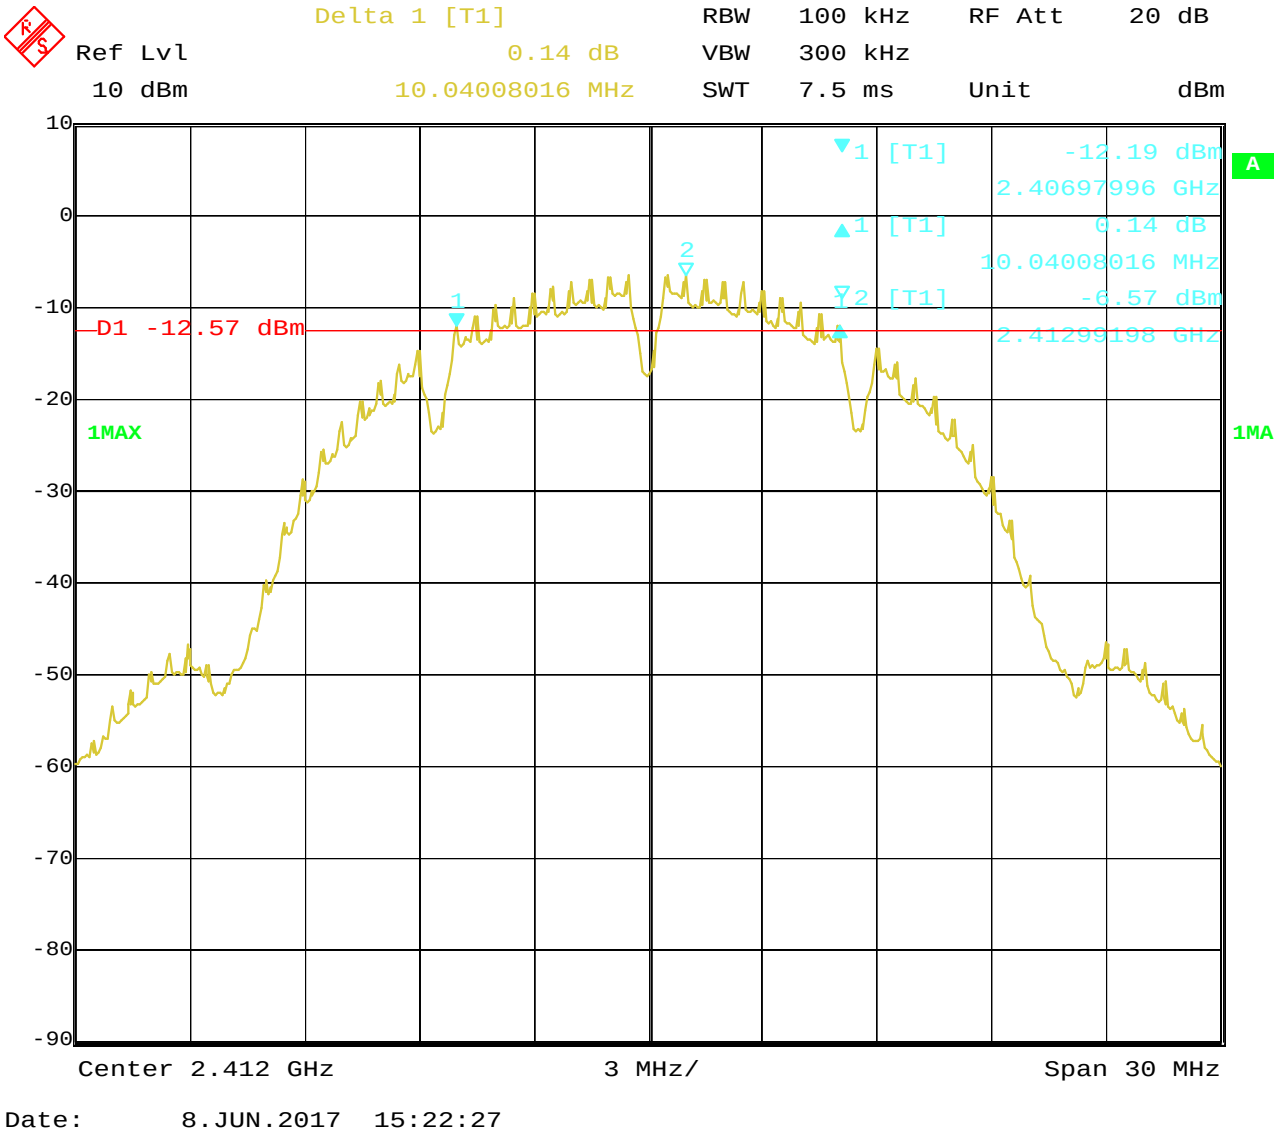

2. 802.11b at 1Mbps of CH06

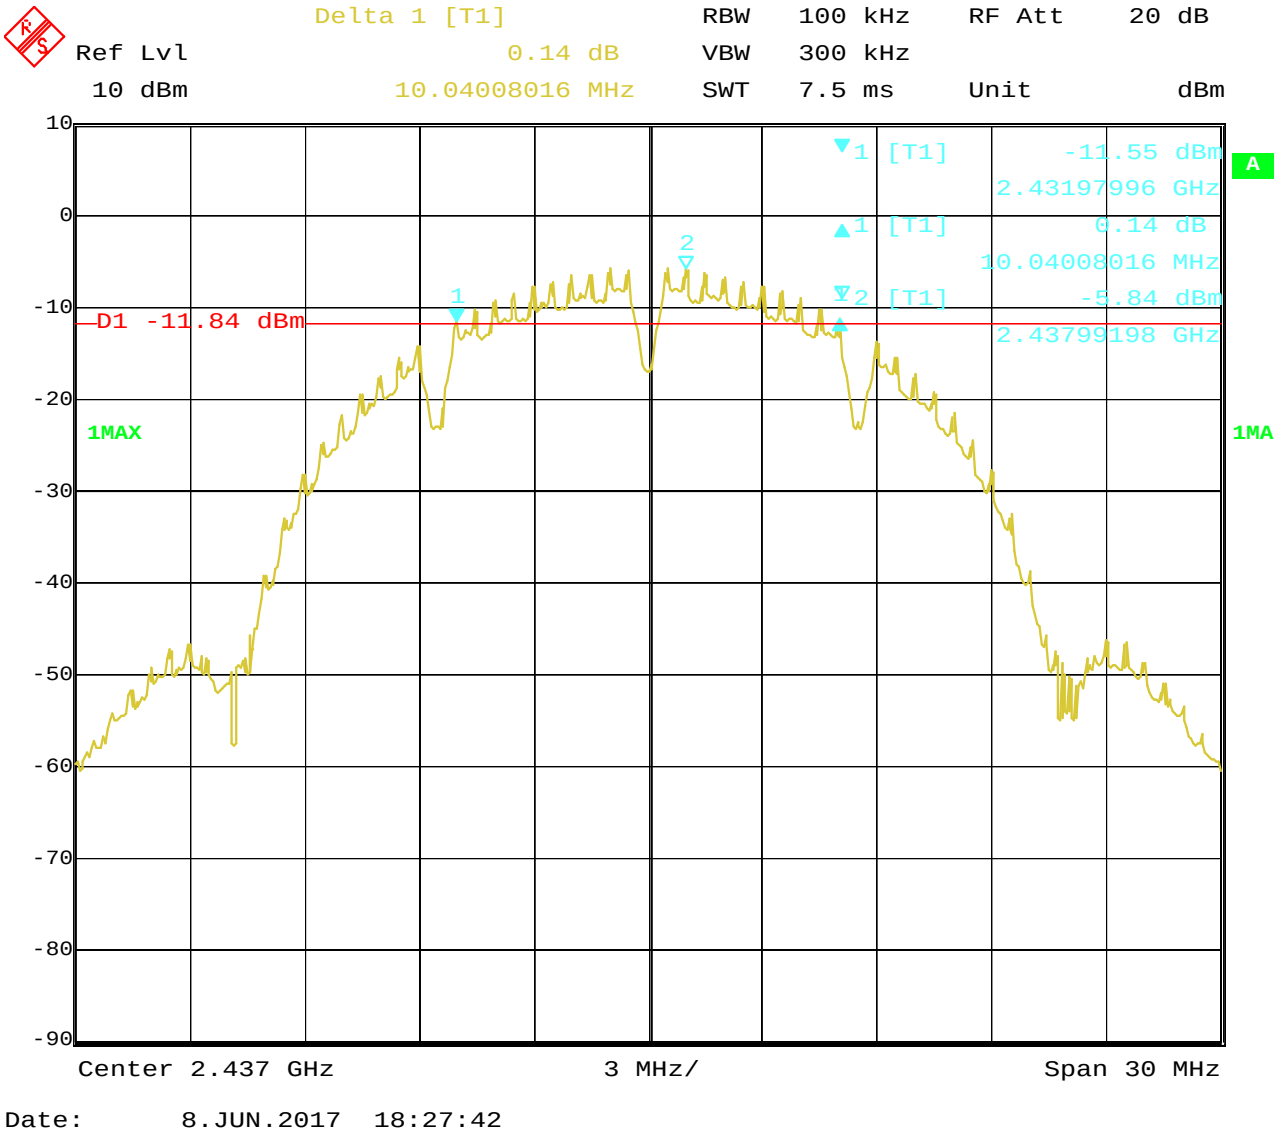

3. 802.11b at 1Mbps of CH11

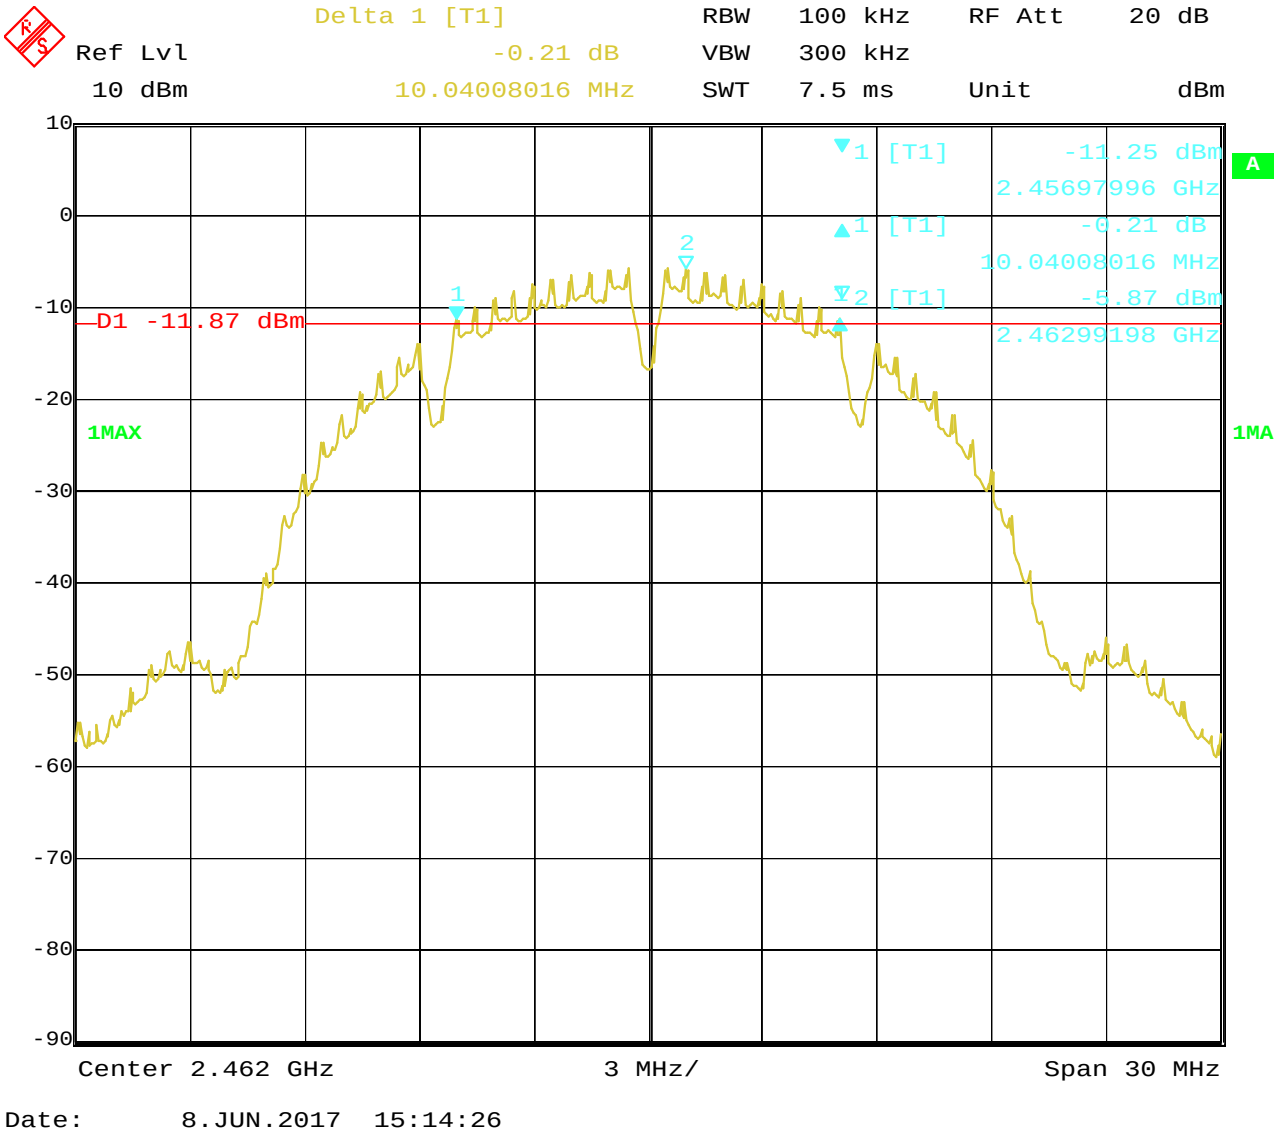

4. 802.11b at 11Mbps of CH01

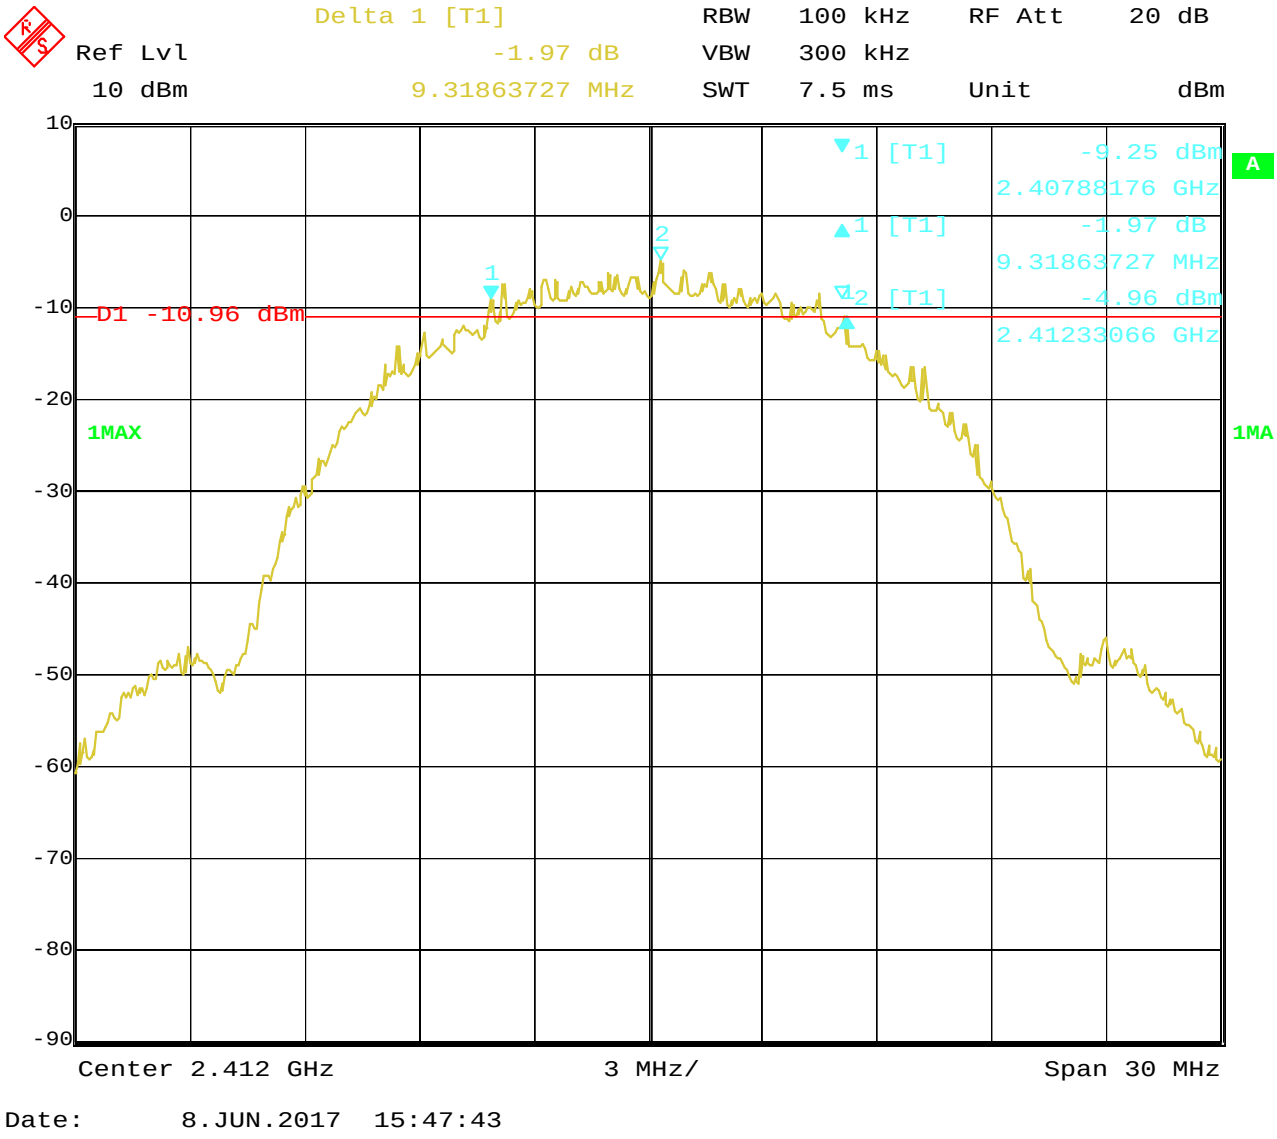

5. 802.11b at 11Mbps of CH06

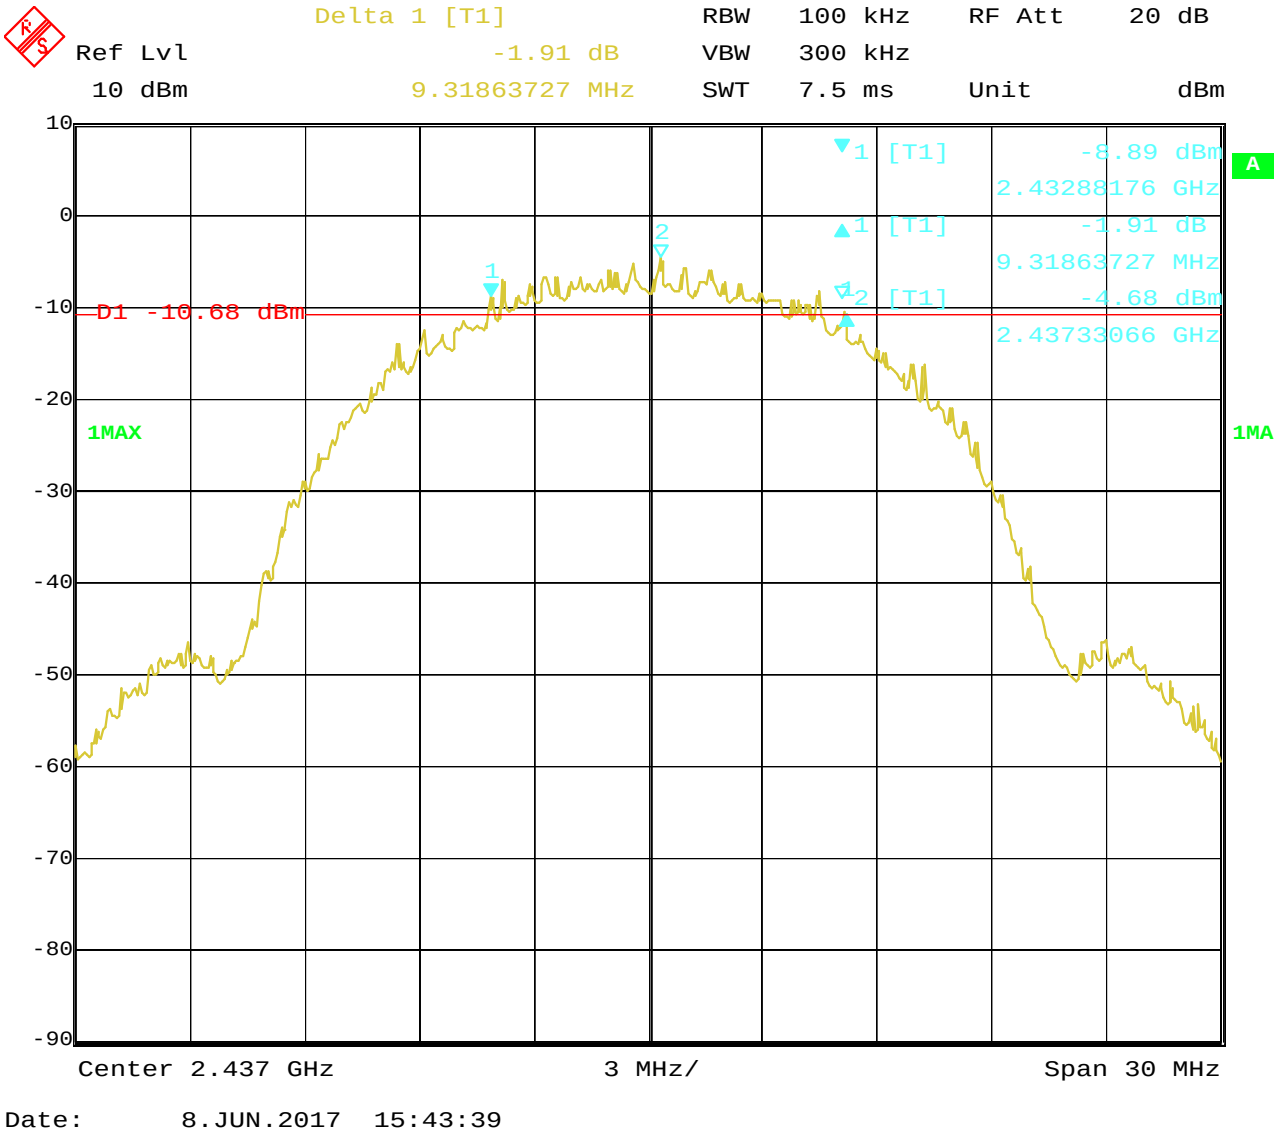

6. 802.11b at 11Mbps of CH11

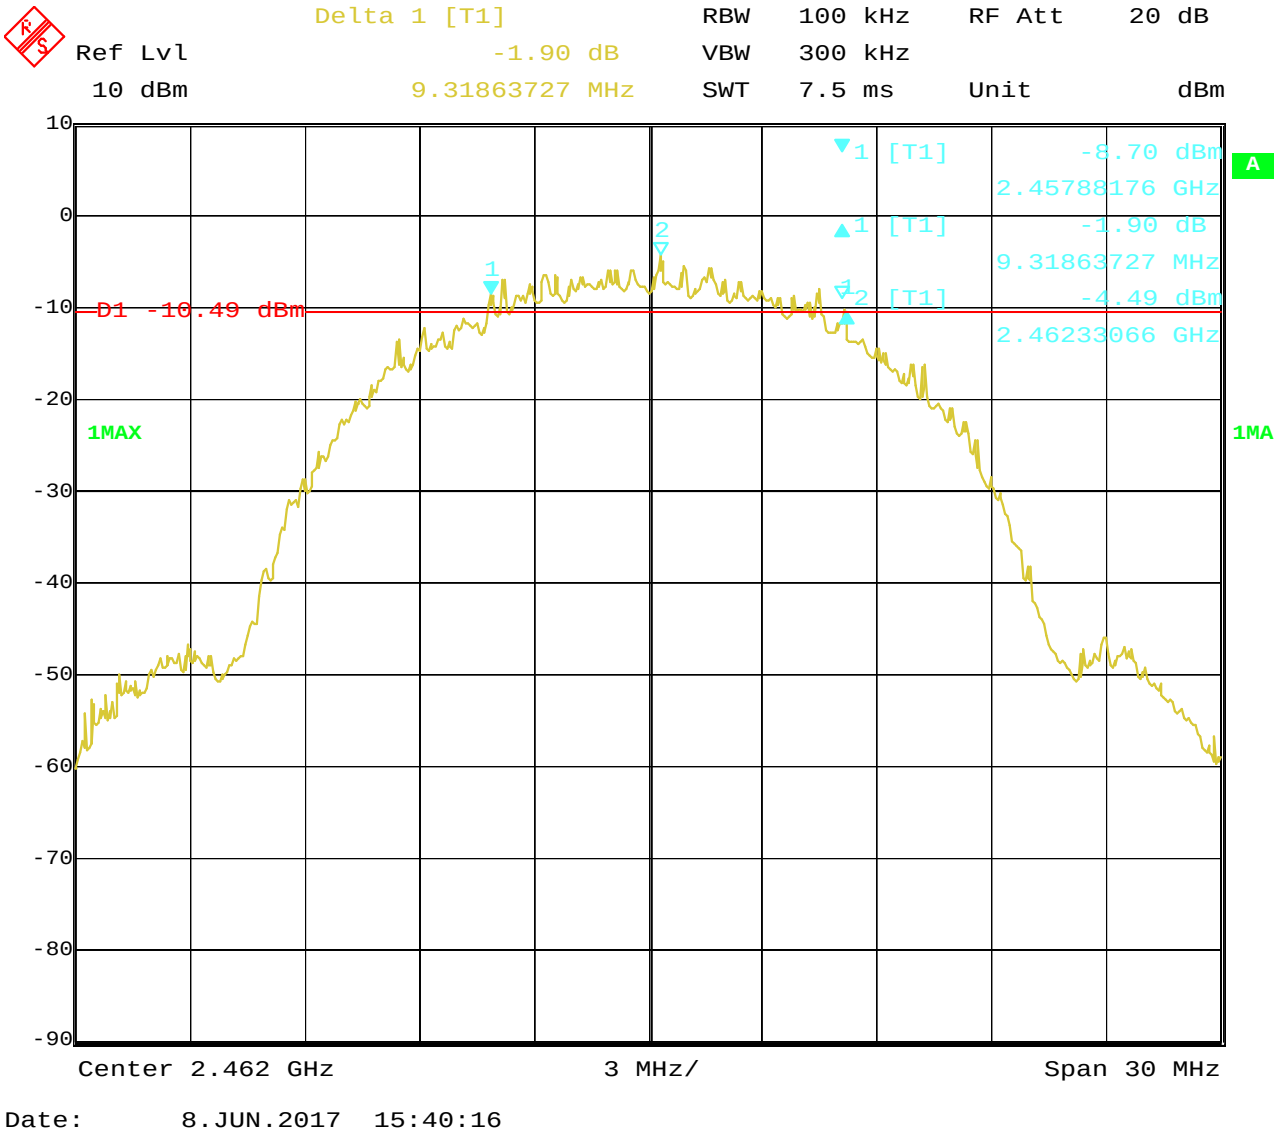

6dB Occupied Bandwidth

EUT	Action camera	Model	CGX3
Mode	802.11g	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2412	54	16.41	0.5	Pass
6	2437	54	16.41	0.5	Pass
11	2462	54	16.41	0.5	Pass

Test Plots:

1. 802.11g at 54Mbps of CH01

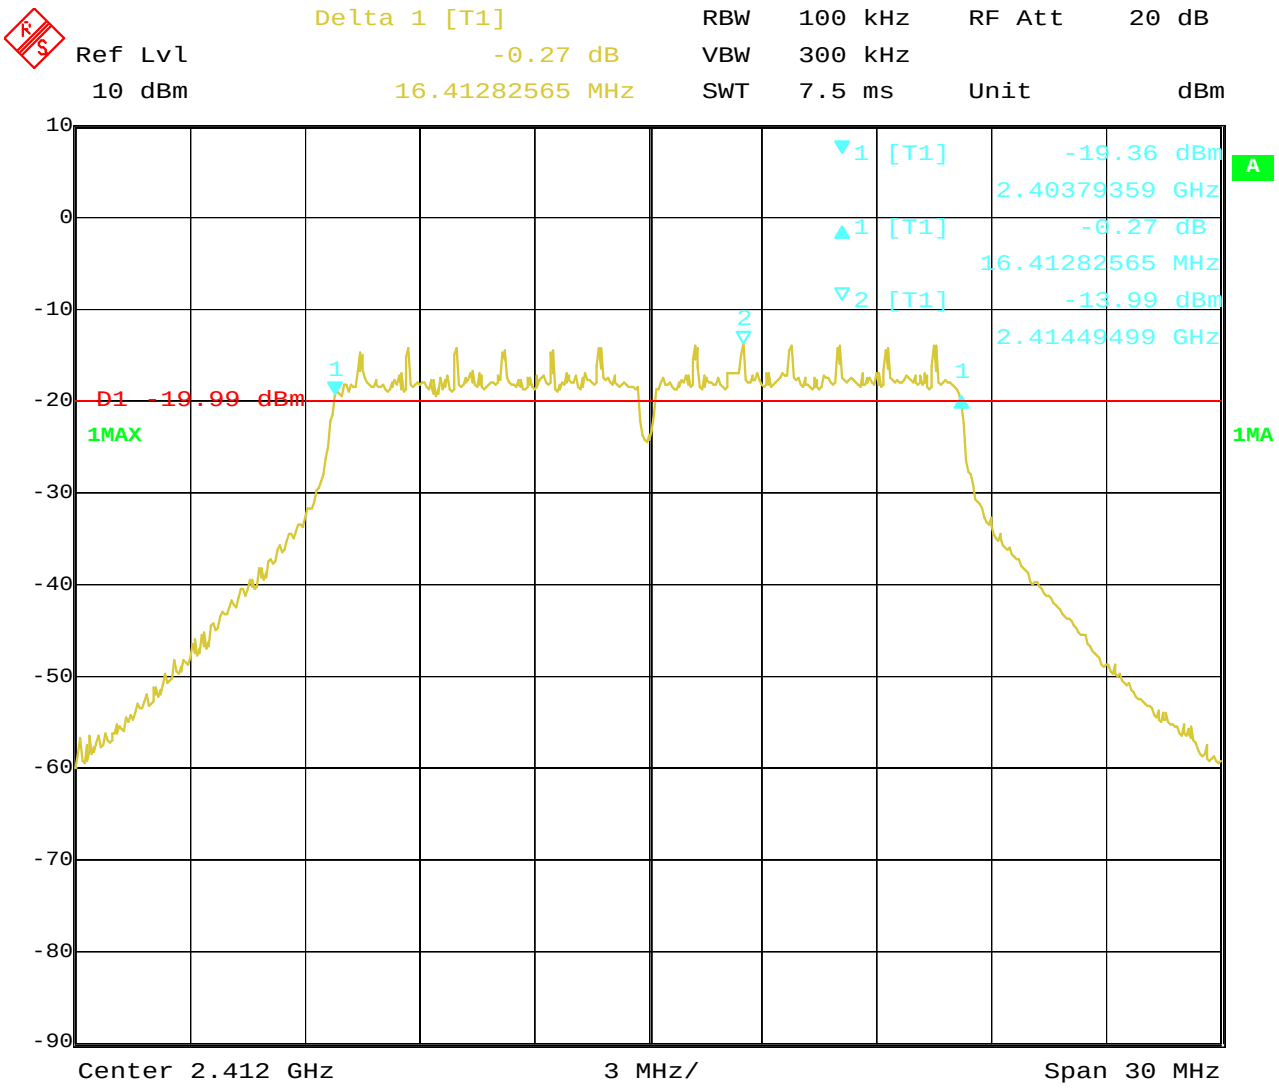

2. 802.11g at 54Mbps of CH06

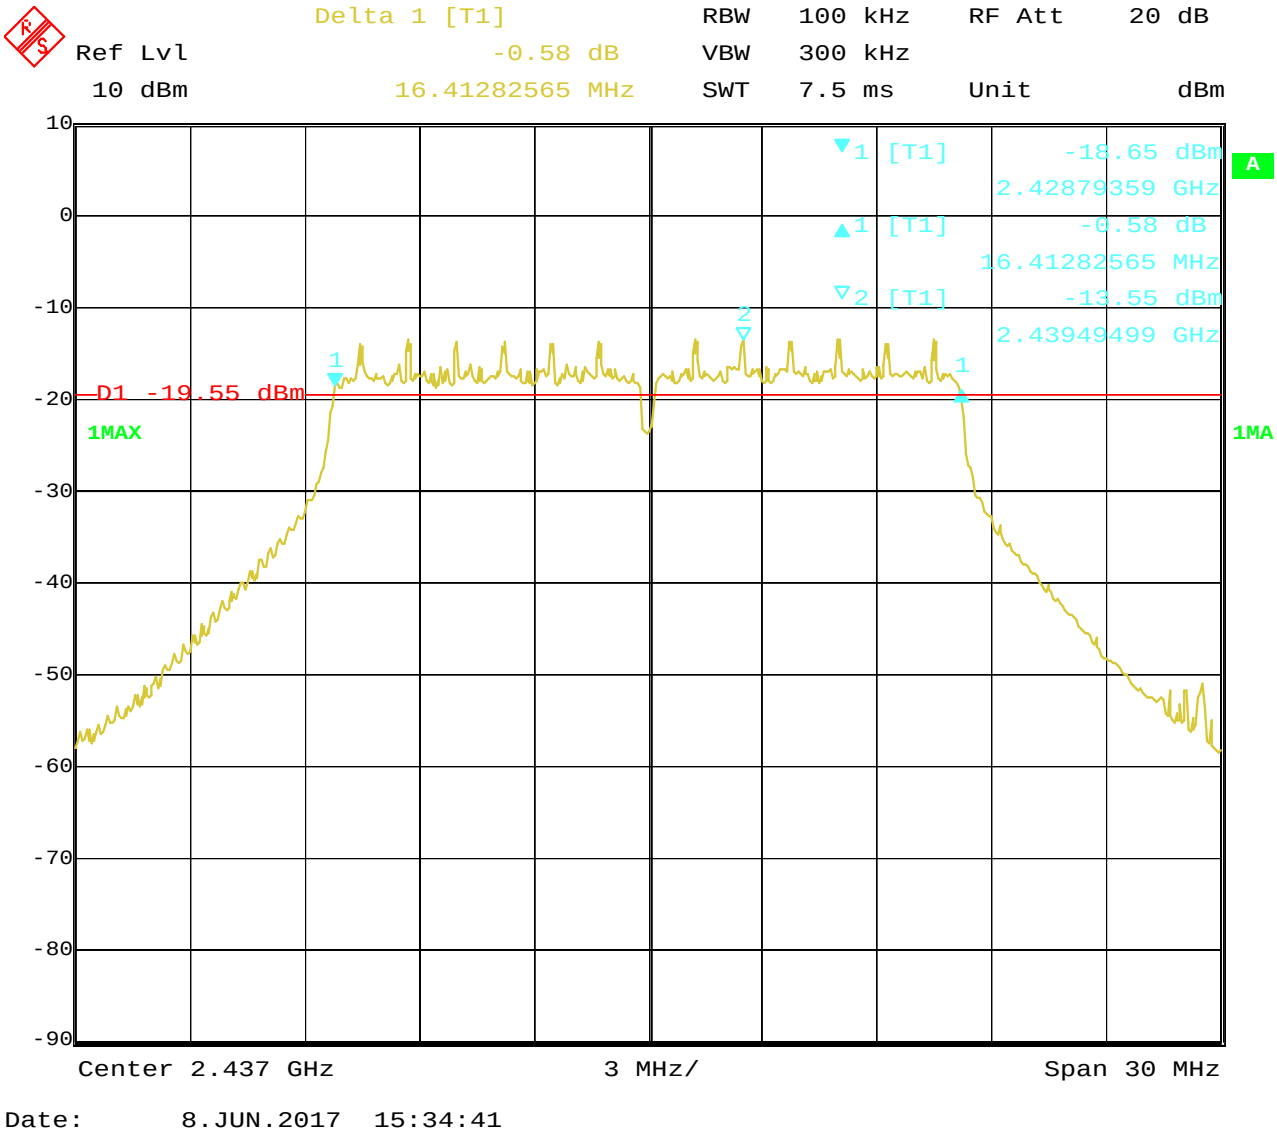

3. 802.11g at 54Mbps of CH11

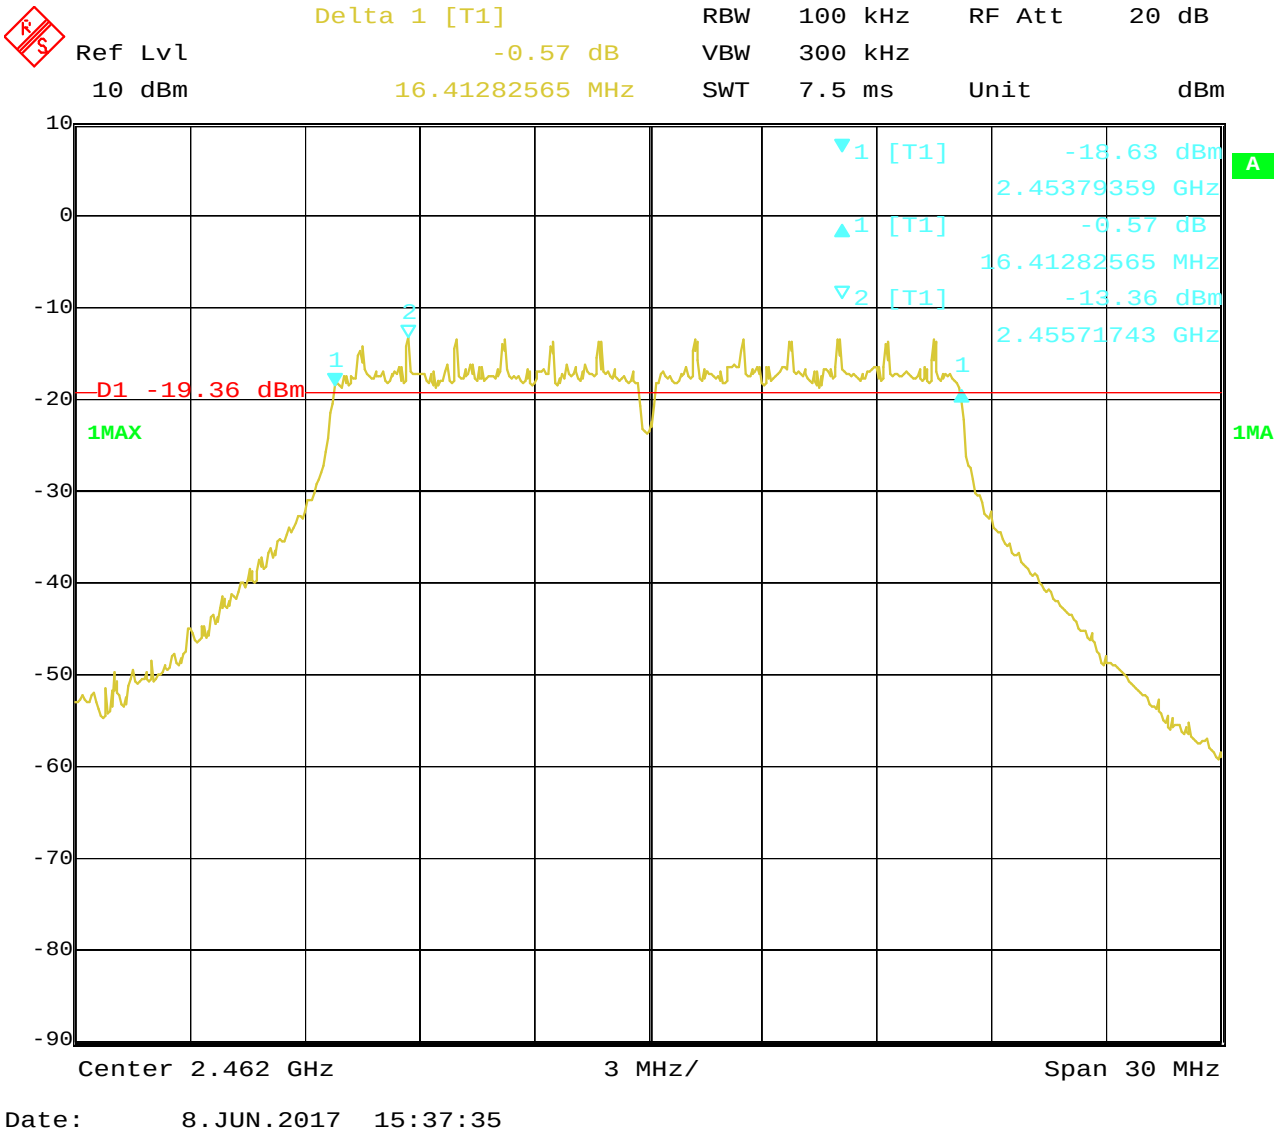

6dB Occupied Bandwidth

EUT	Action camera	Model	CGX3
Mode	802.11n HT20	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2412	6.5M	17.56	0.5	Pass
6	2437	6.5M	17.56	0.5	Pass
11	2462	6.5M	17.56	0.5	Pass

Test Plots:

1. 802.11n at HT20 of CH01

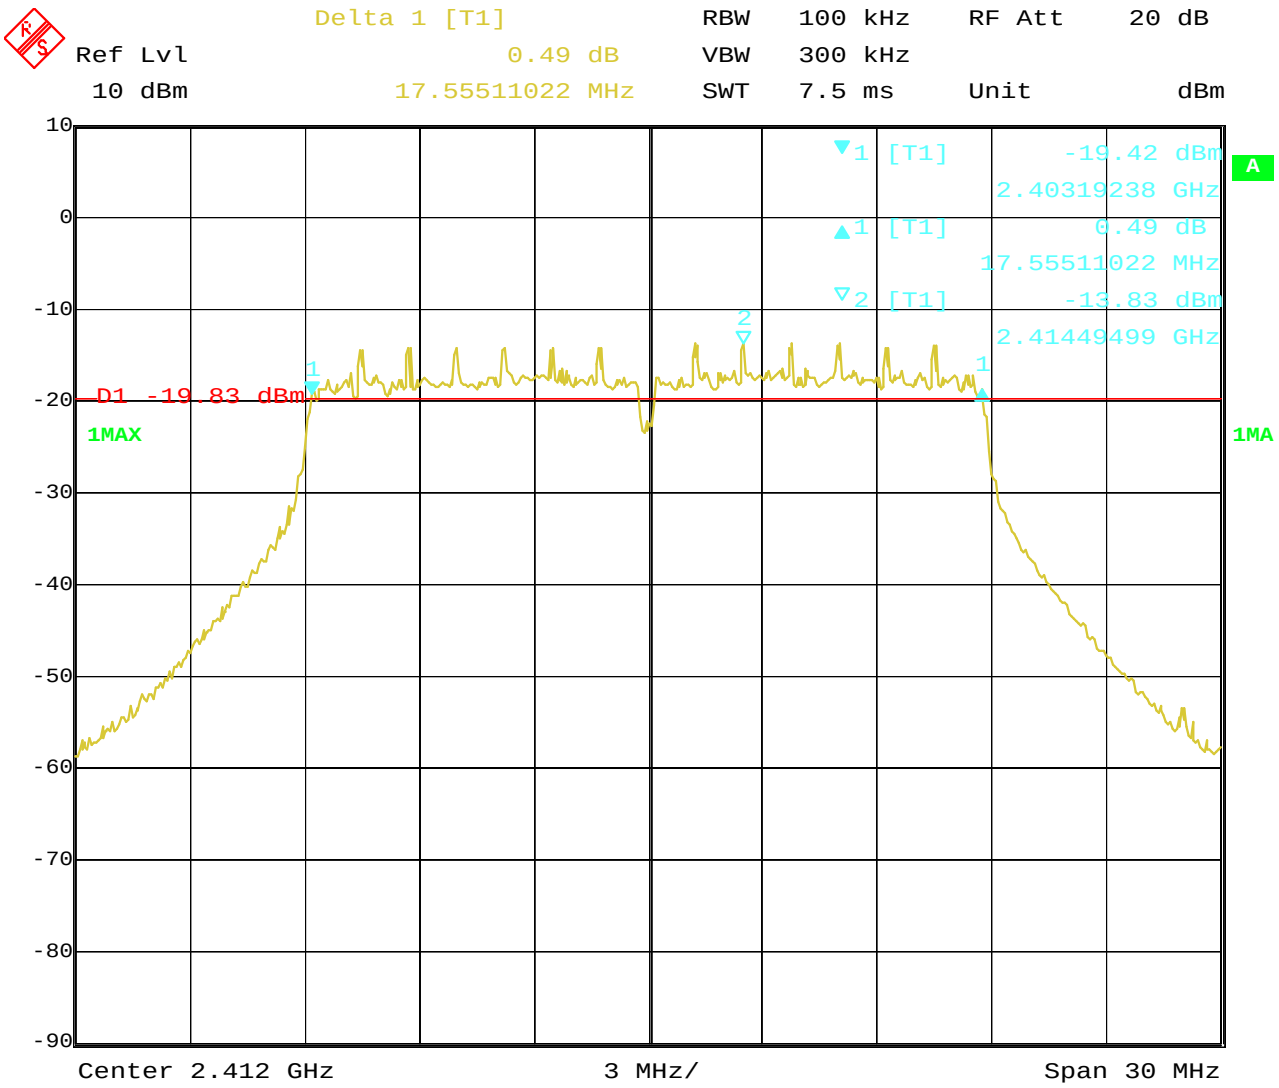

2. 802.11n at HT20 of CH06

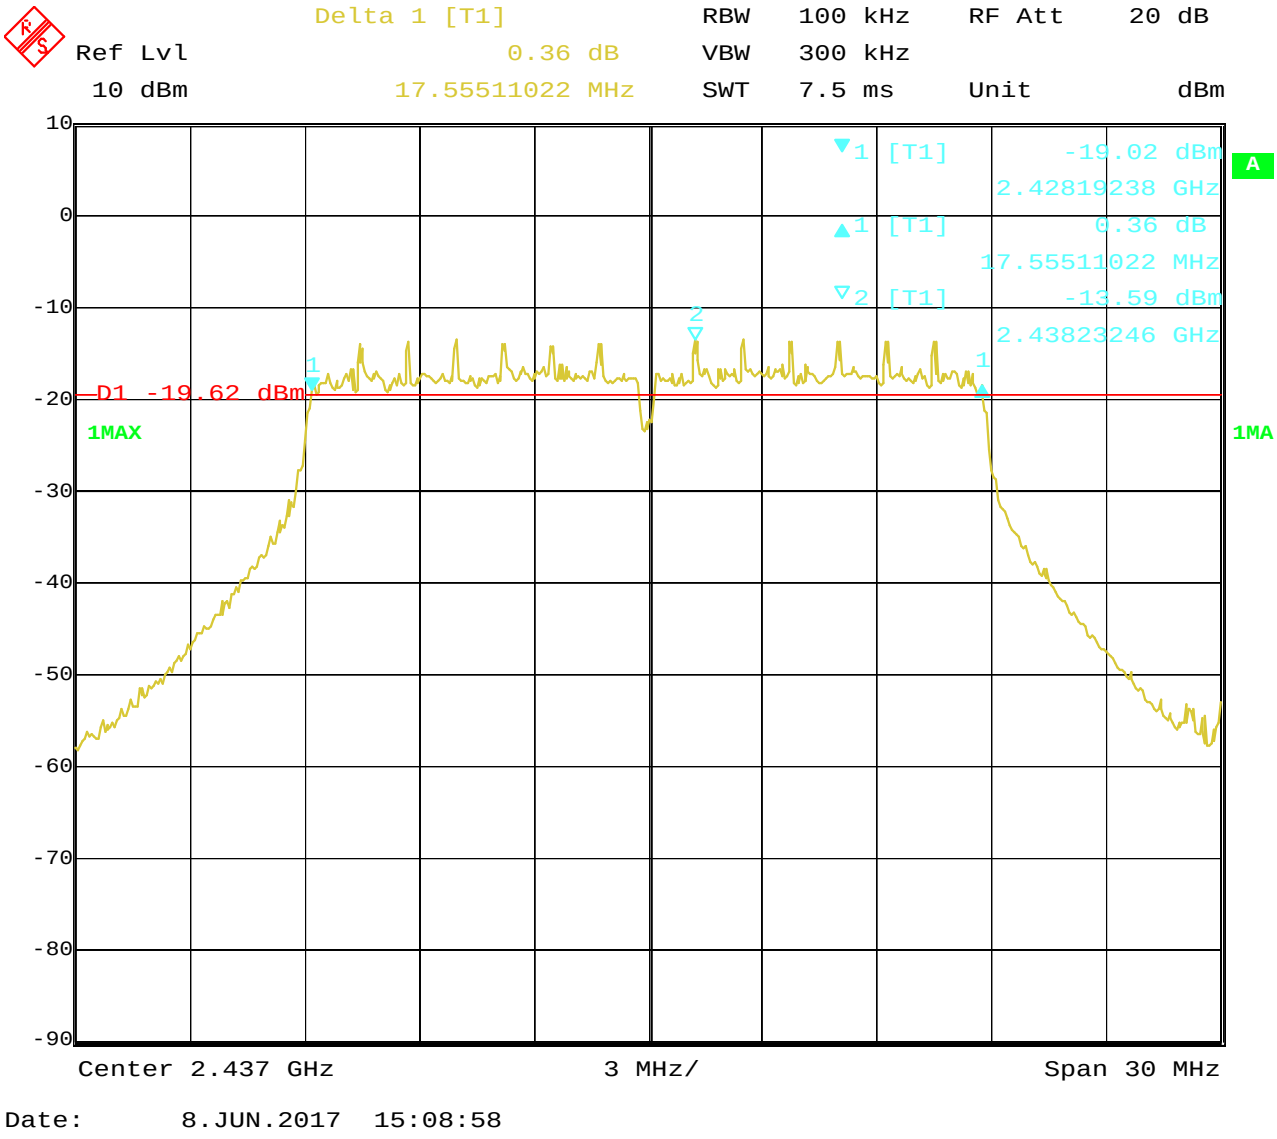

3. 802.11n at HT20 of CH11

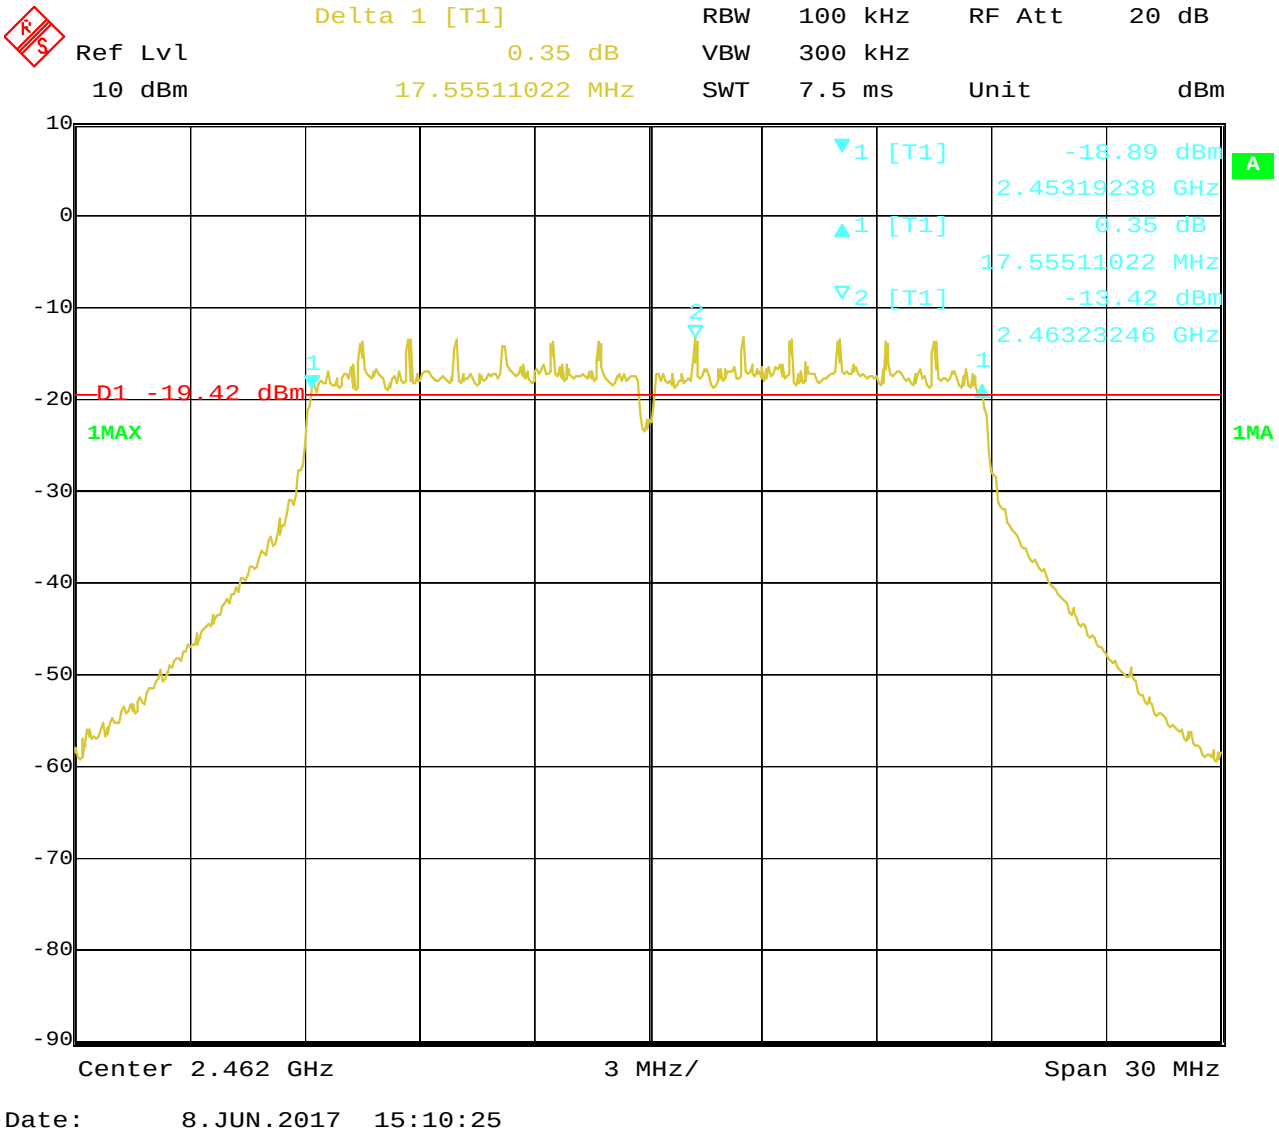

6dB Occupied Bandwidth

EUT	Action camera	Model	CGX3
Mode	802.11n HT40	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2422	6.5M	35.37	0.5	Pass
4	2437	6.5M	35.37	0.5	Pass
7	2452	6.5M	35.37	0.5	Pass

Test Plots:

1. 802.11n at HT40 of CH01

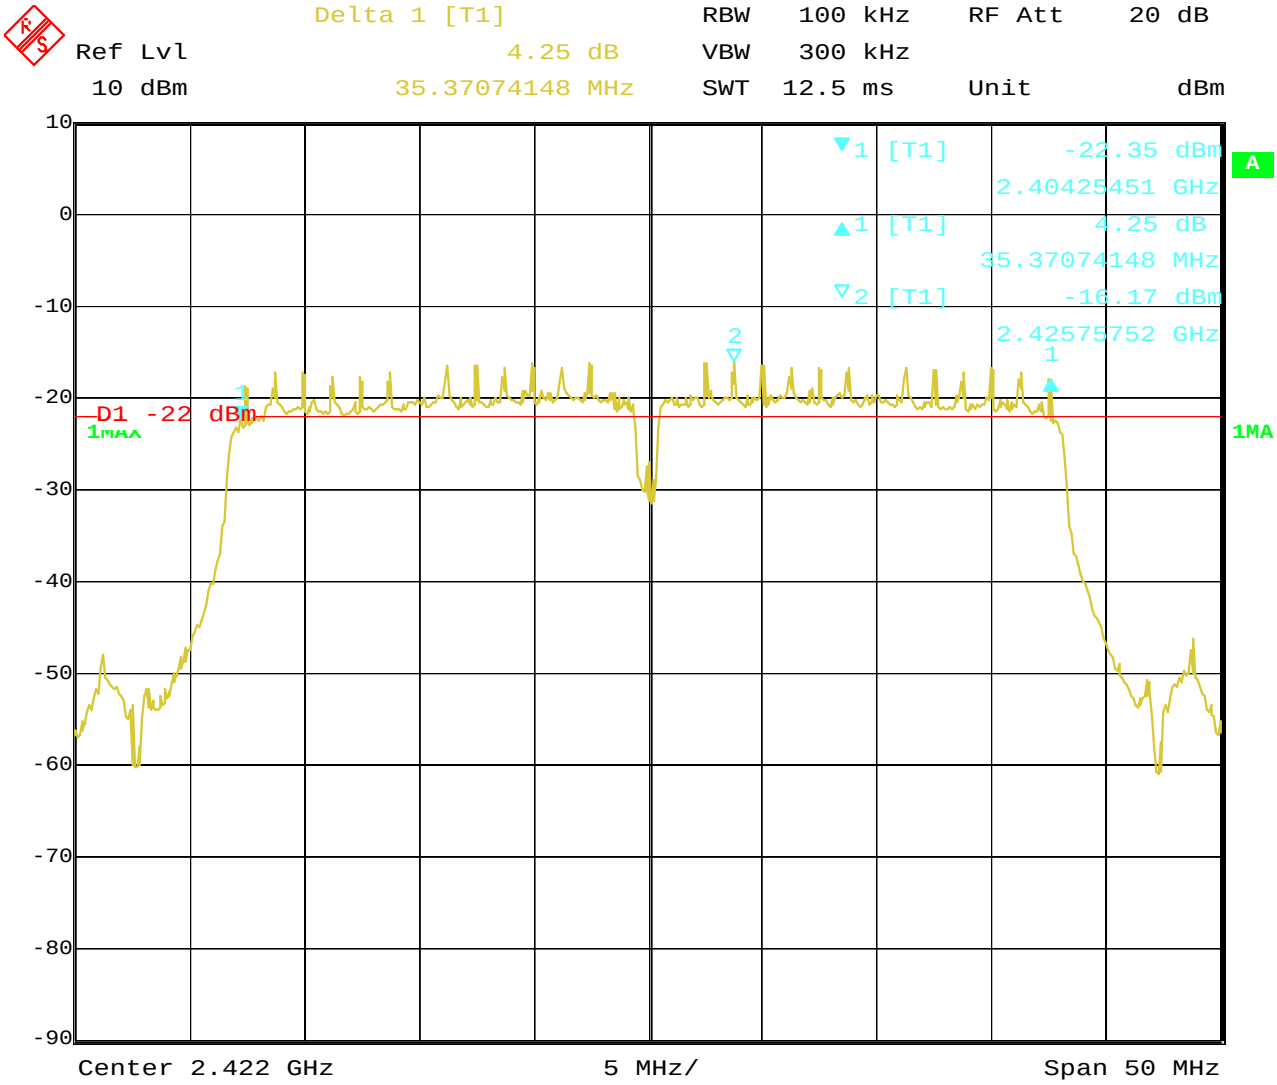

2. 802.11n at HT40 of CH04

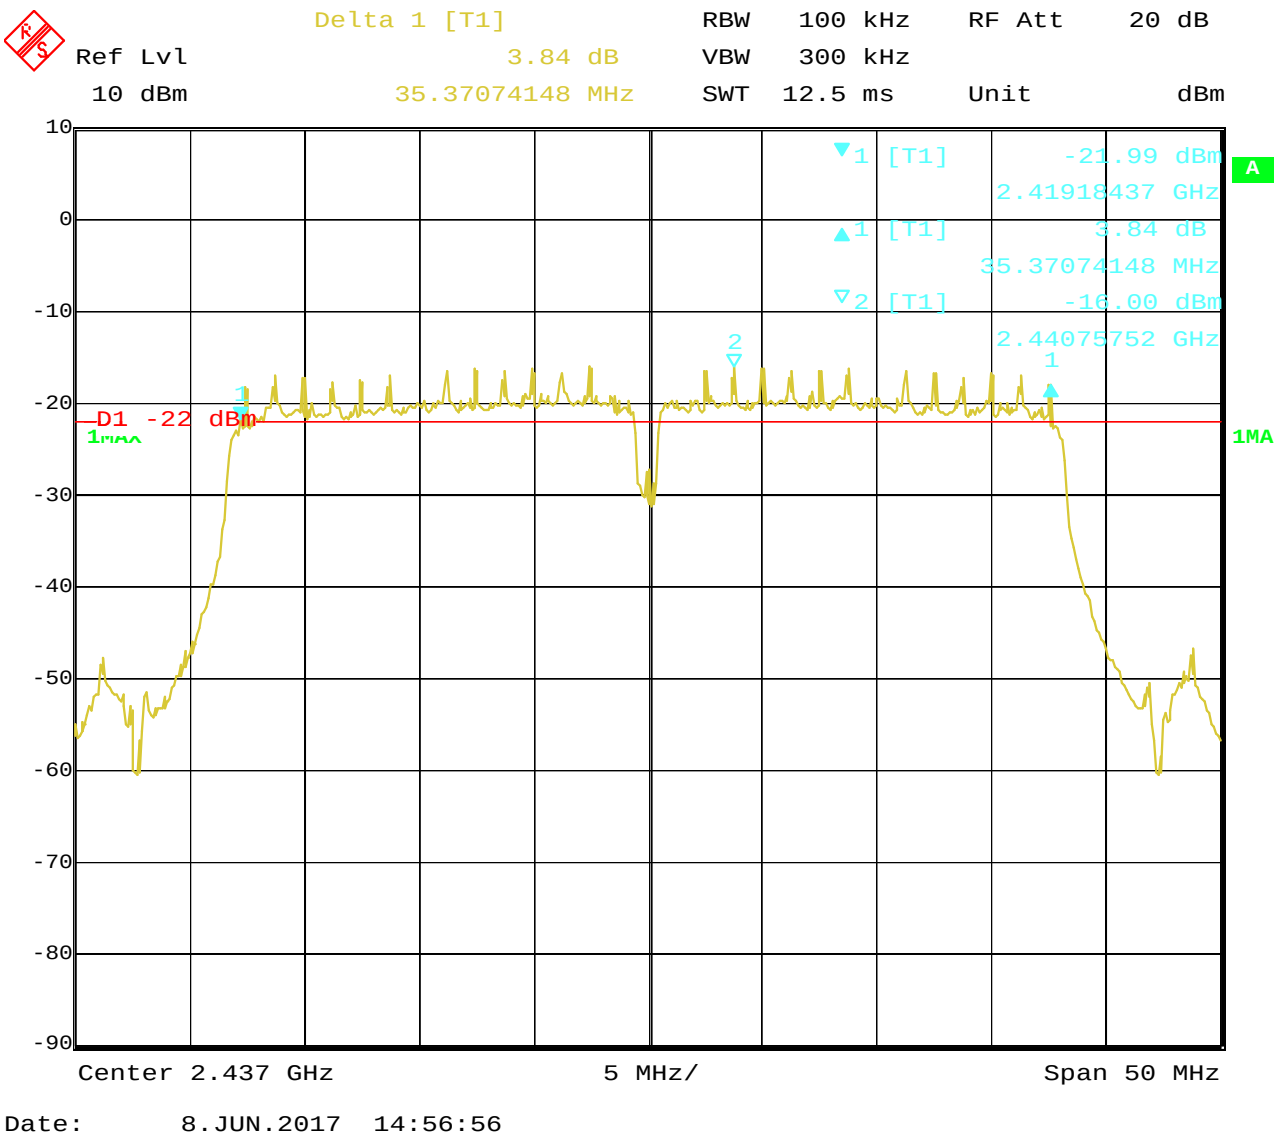

3. 802.11n at HT40 of CH07

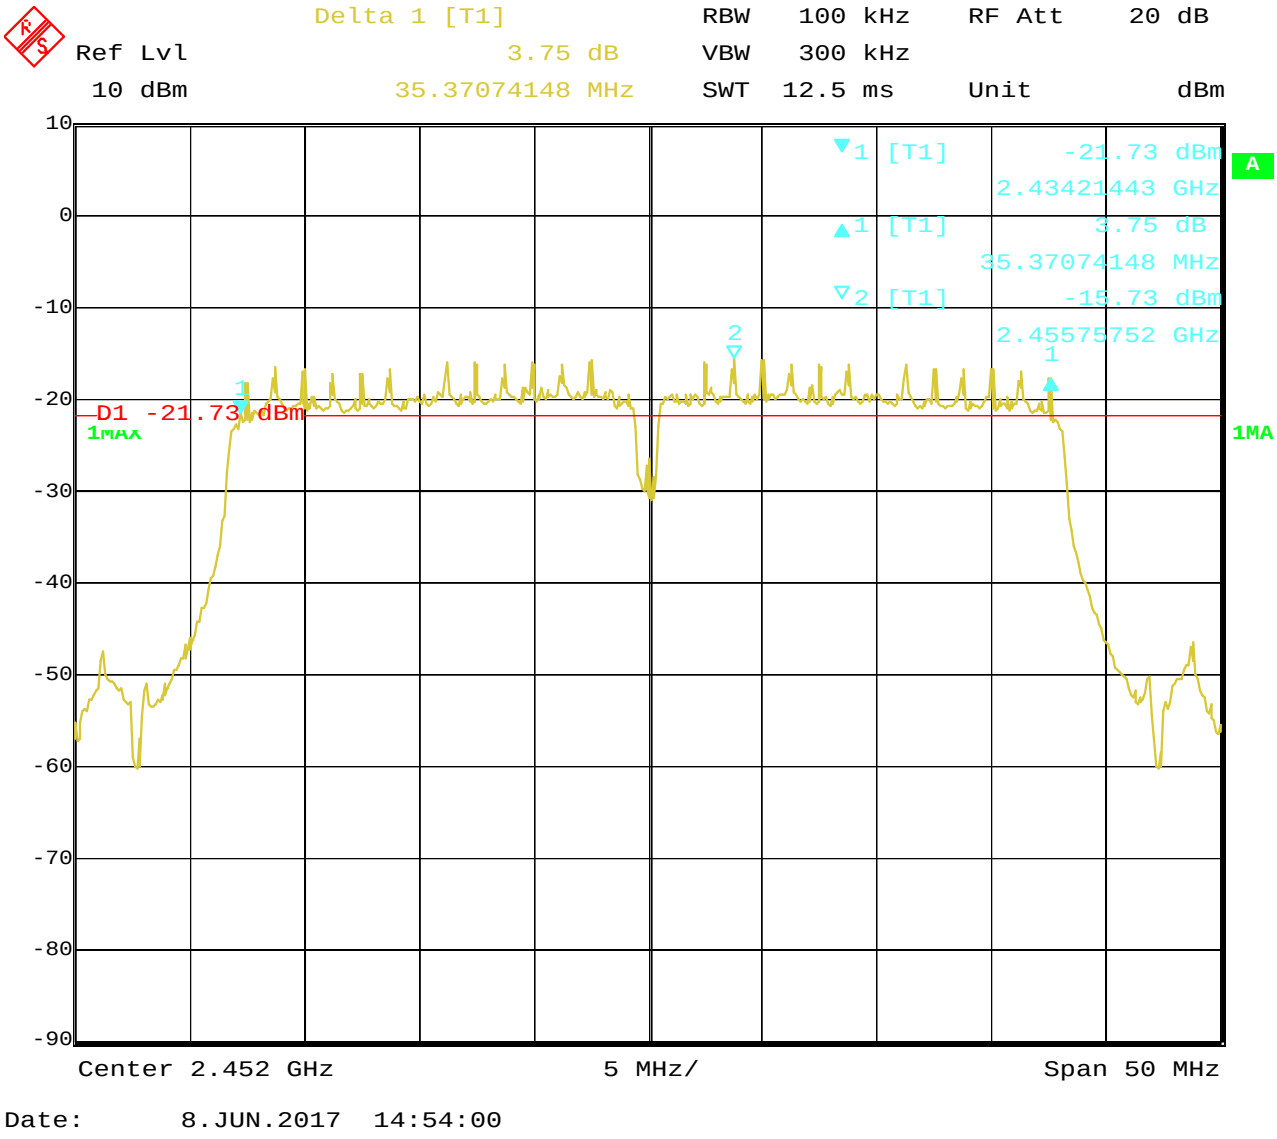

99% Occupied Bandwidth

EUT	Action camera	Model	CGX3
Mode	802.11b	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	99% Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2412	1	14.97	--	Pass
6	2437	1	14.97	--	Pass
11	2462	1	14.97	--	Pass
1	2412	11	14.79	--	Pass
6	2437	11	14.73	--	Pass
11	2462	11	14.73	--	Pass

1. 802.11b at 1Mbps of CH01

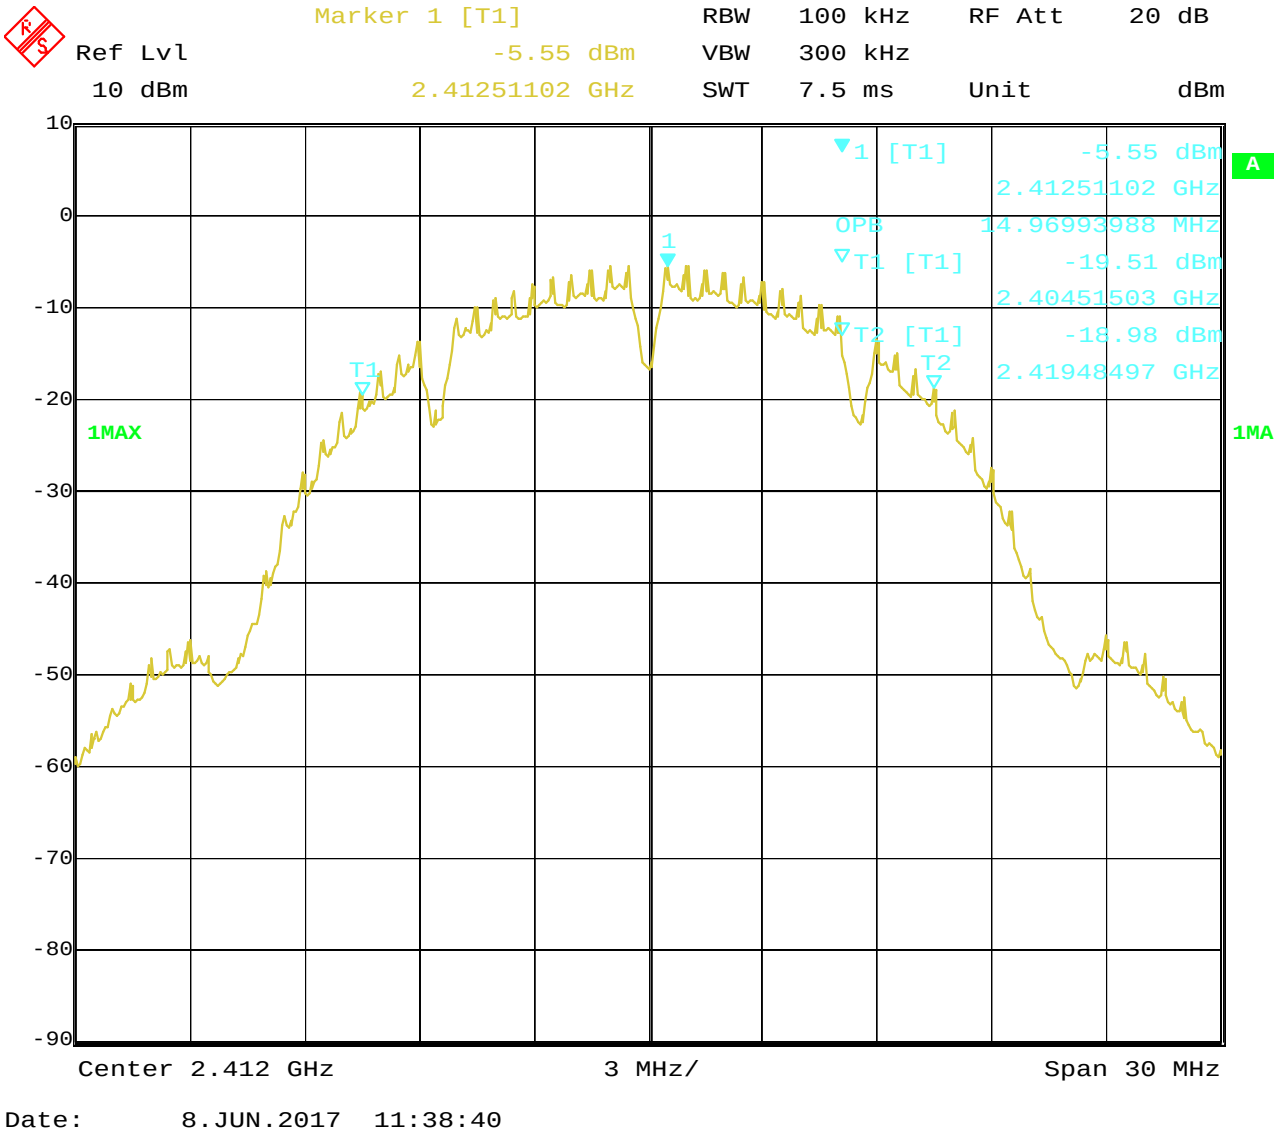

2. 802.11b at 1Mbps of CH06

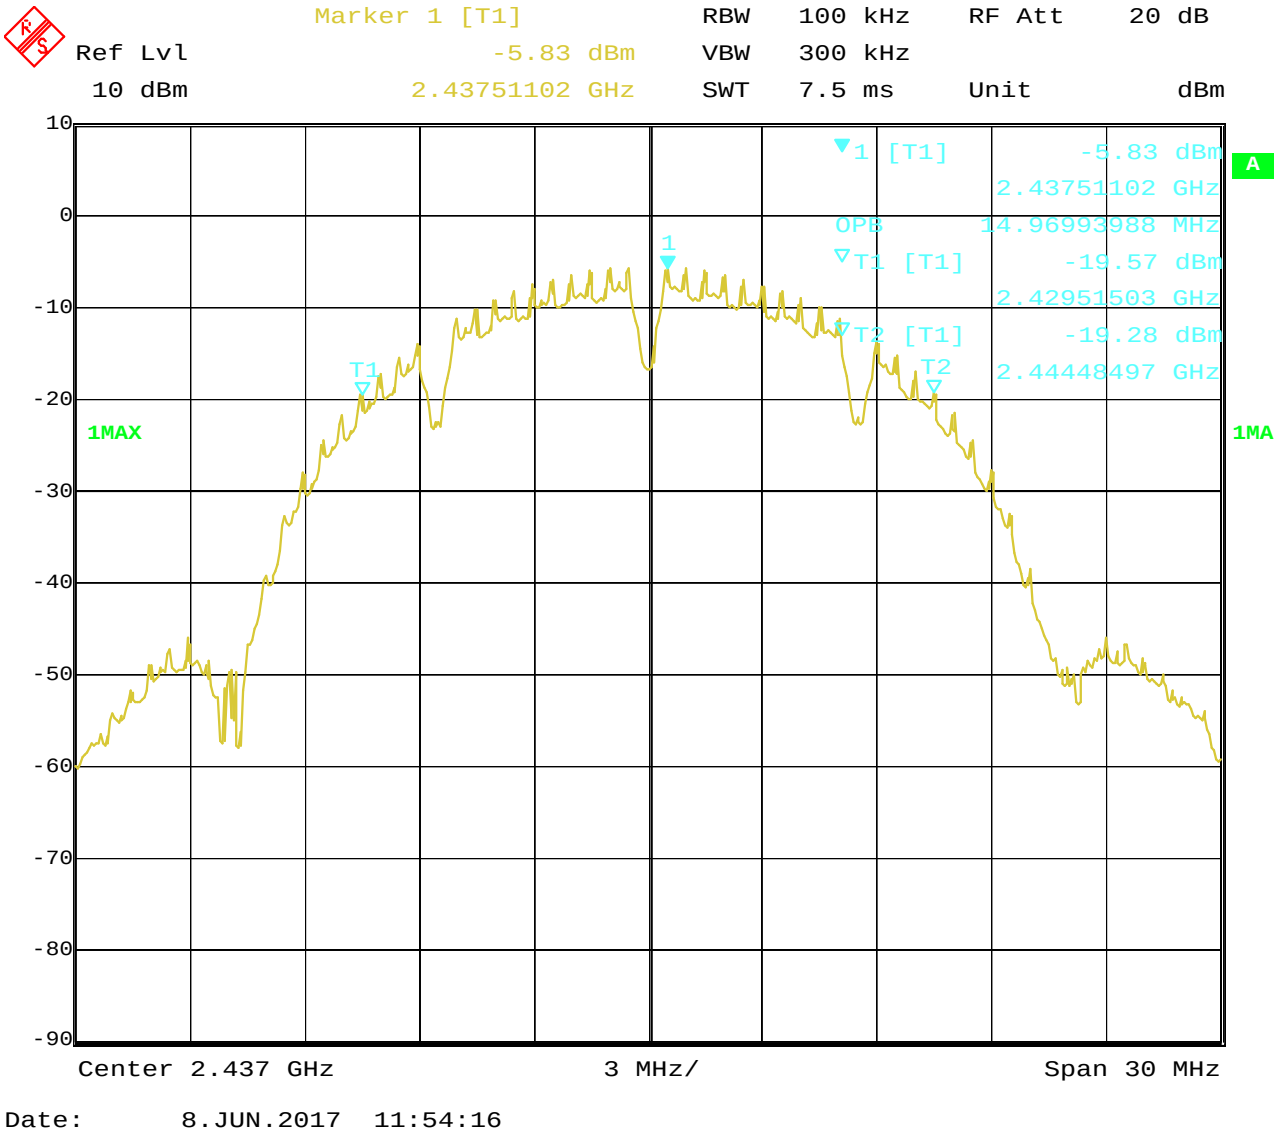

3. 802.11b at 1Mbps of CH11

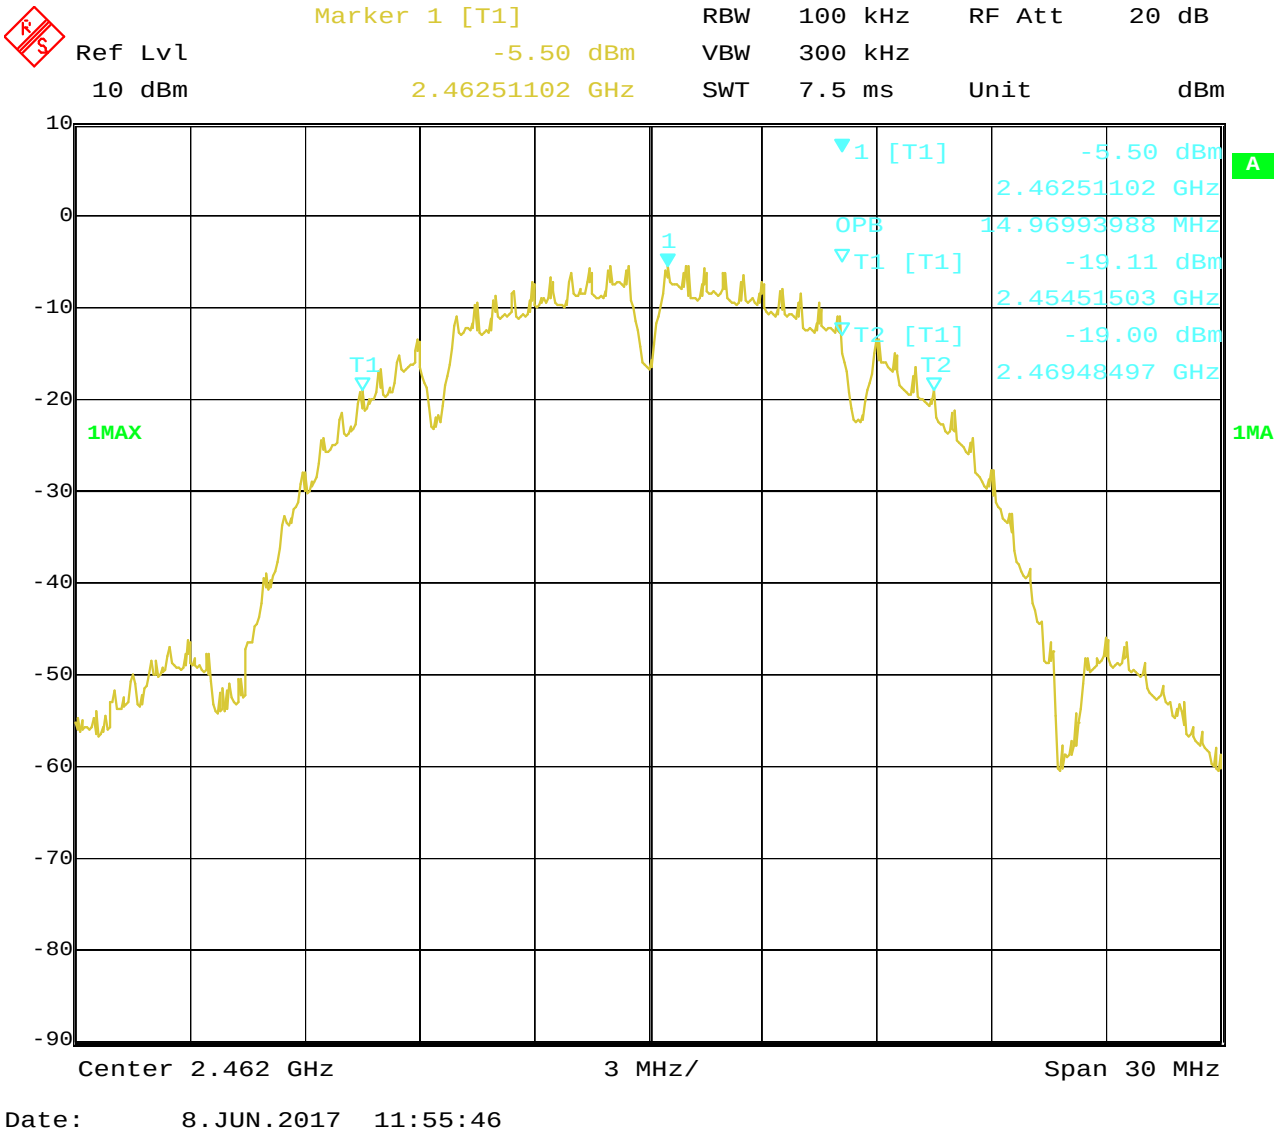

4. 802.11b at 11Mbps of CH01

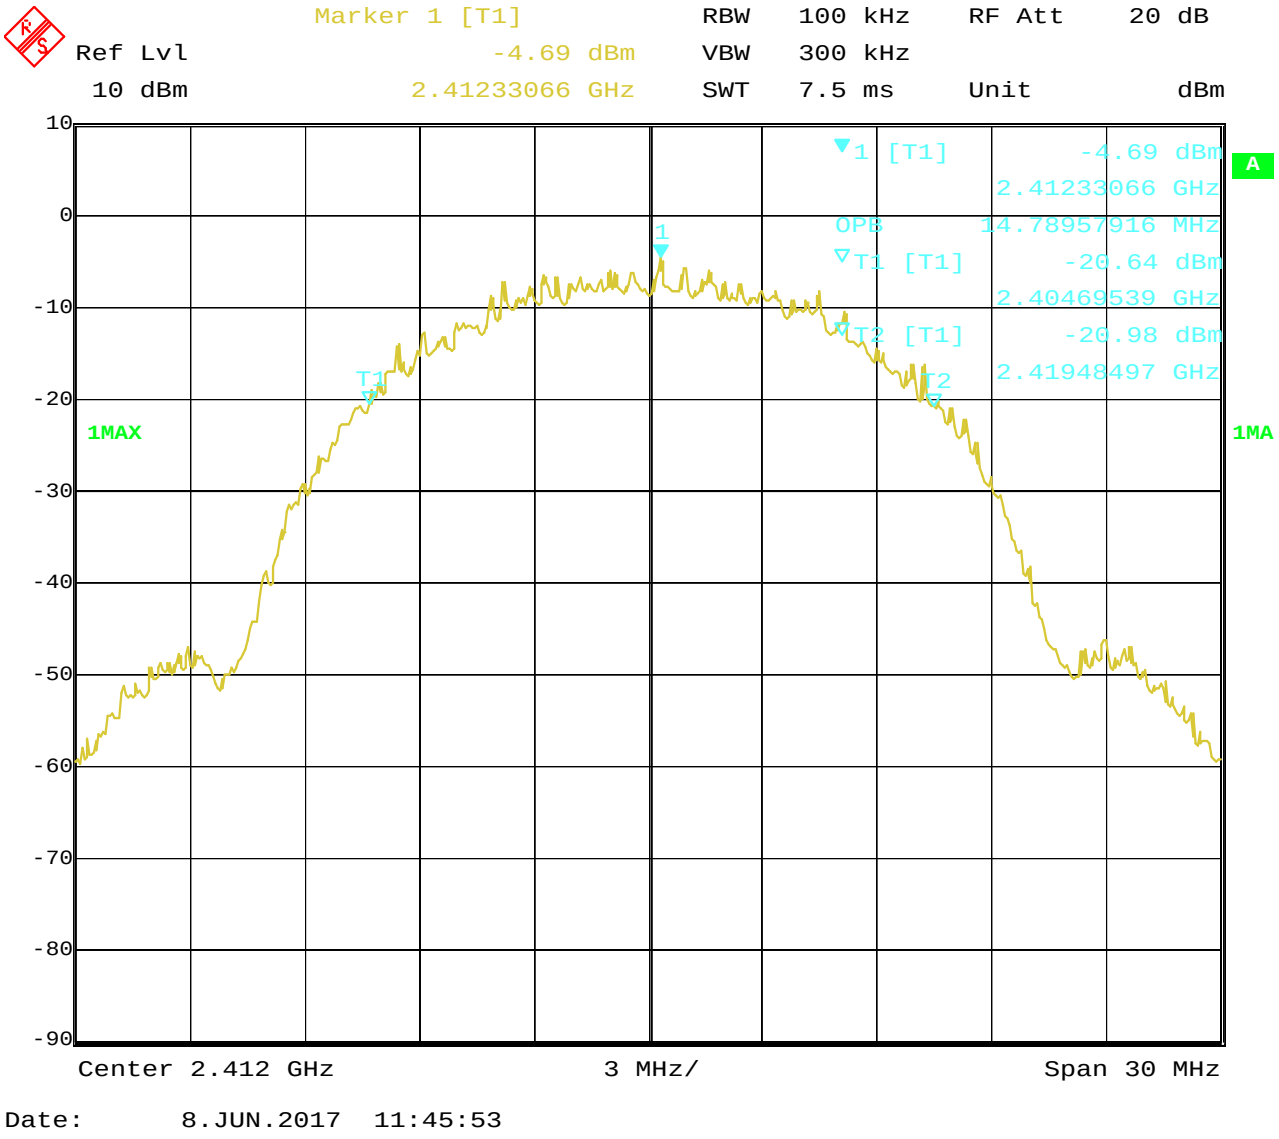

5. 802.11b at 11Mbps of CH06

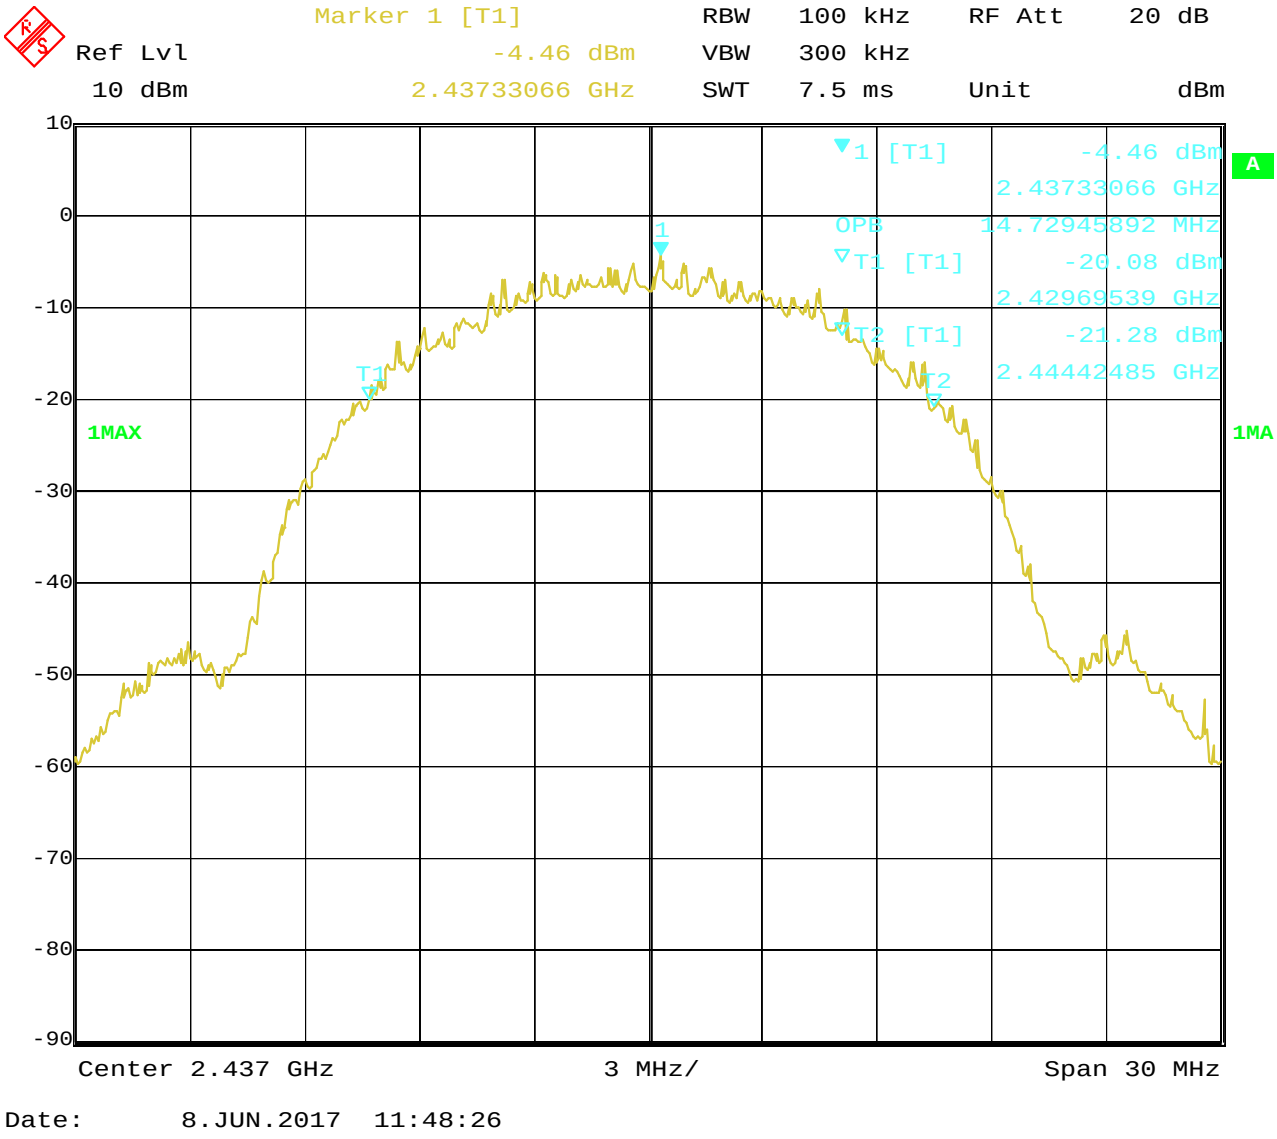

6. 802.11b at 11Mbps of CH11

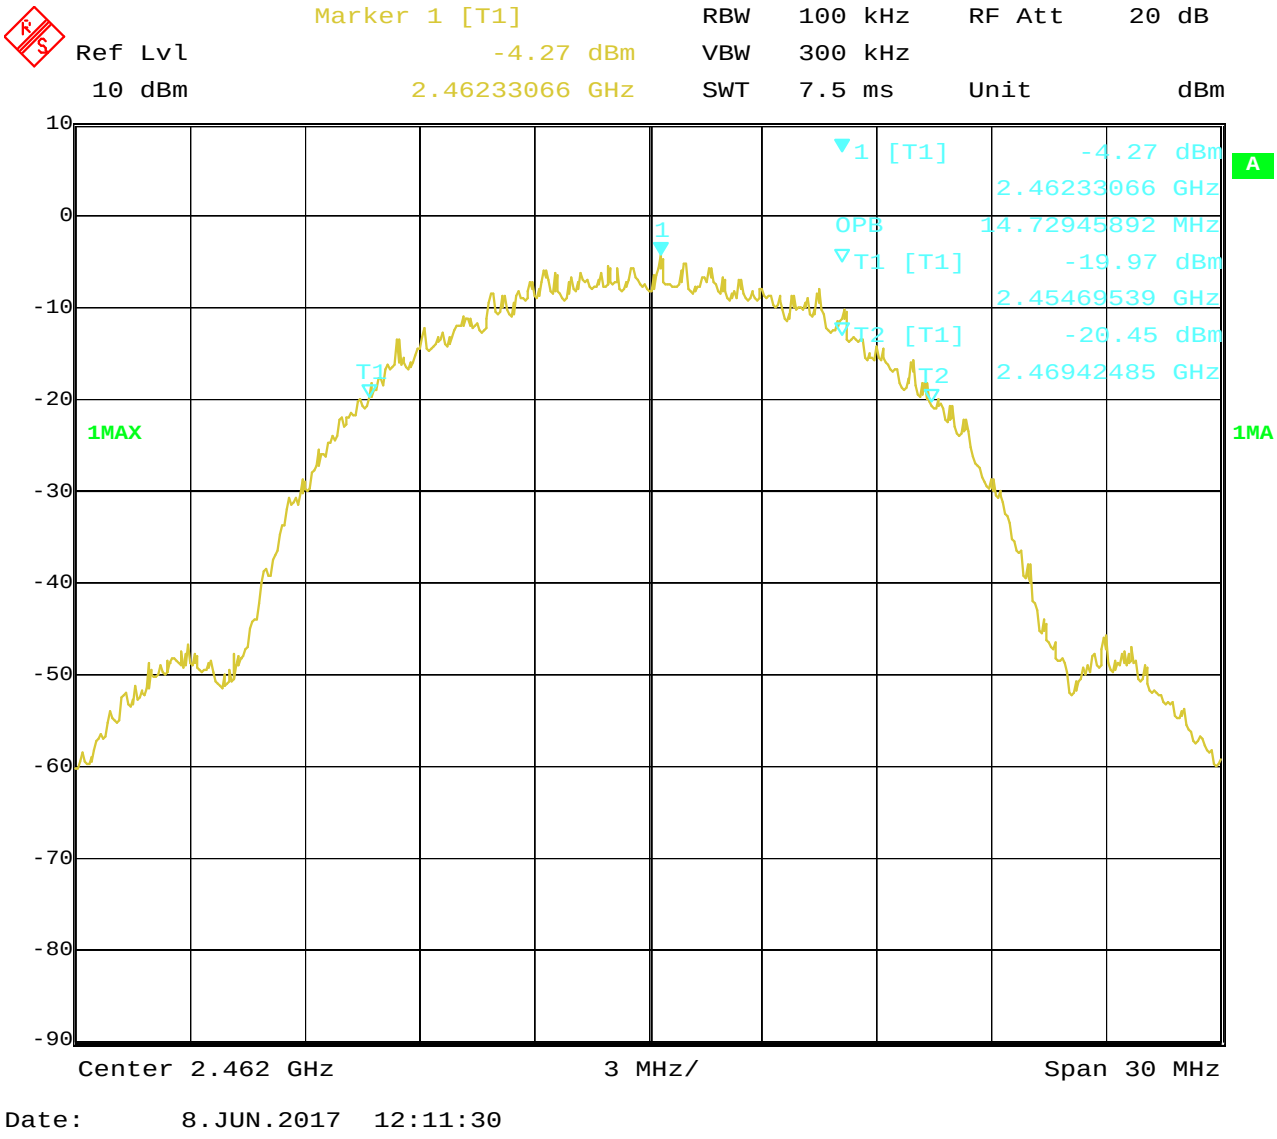

99% Occupied Bandwidth

EUT	Action camera	Model	CGX3
Mode	802.11g	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	99% Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2412	54	16.59	0.5	Pass
6	2437	54	16.59	0.5	Pass
11	2462	54	16.59	0.5	Pass

Test Plots:

1. 802.11g at 54Mbps of CH01

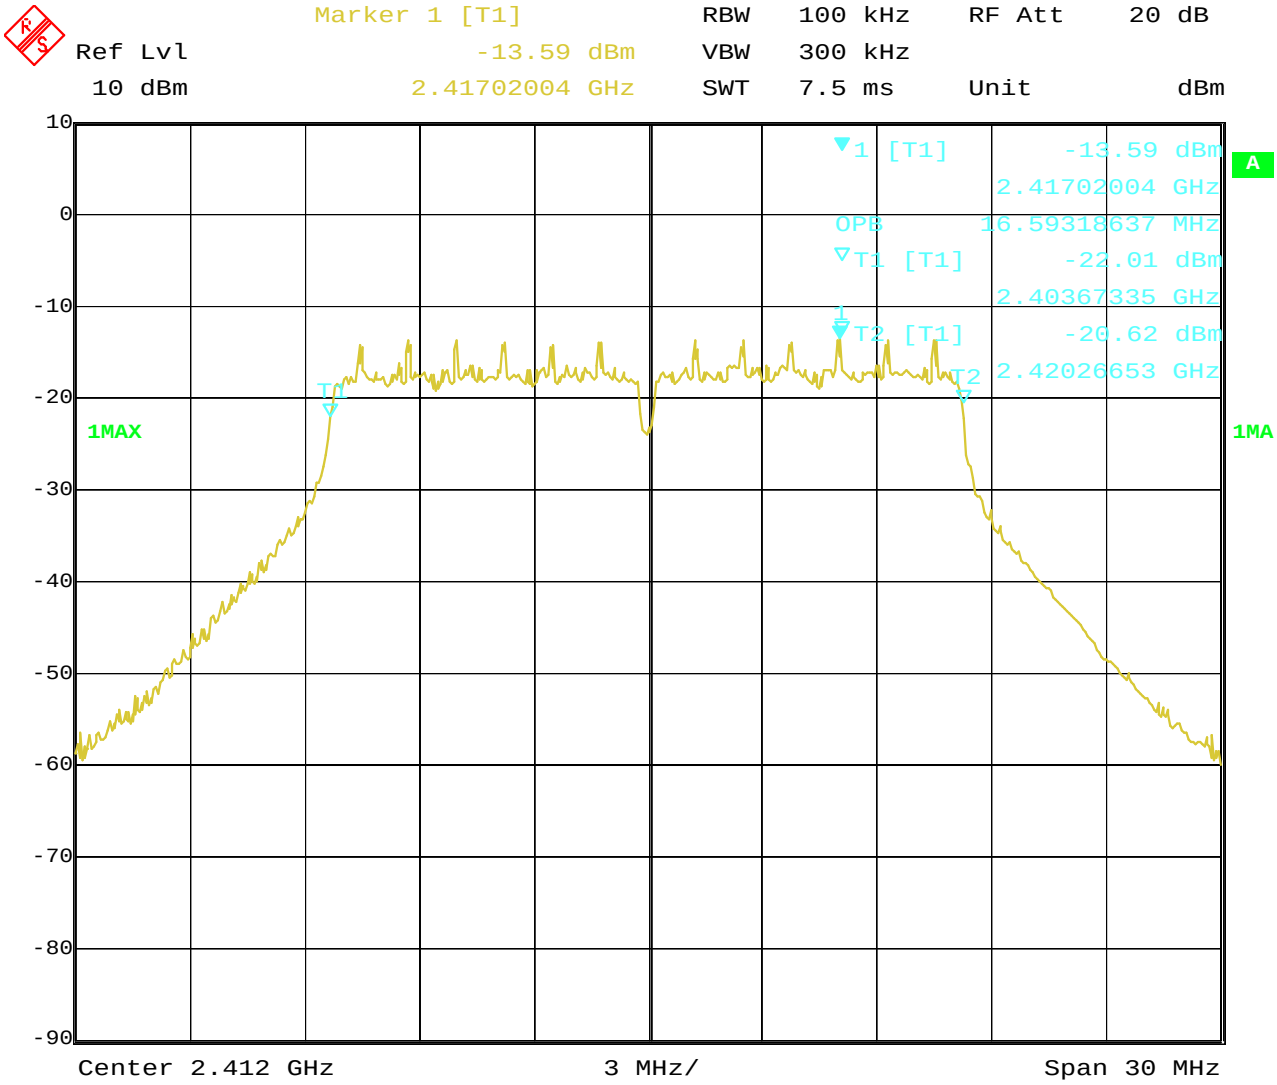

2. 802.11g at 54Mbps of CH06

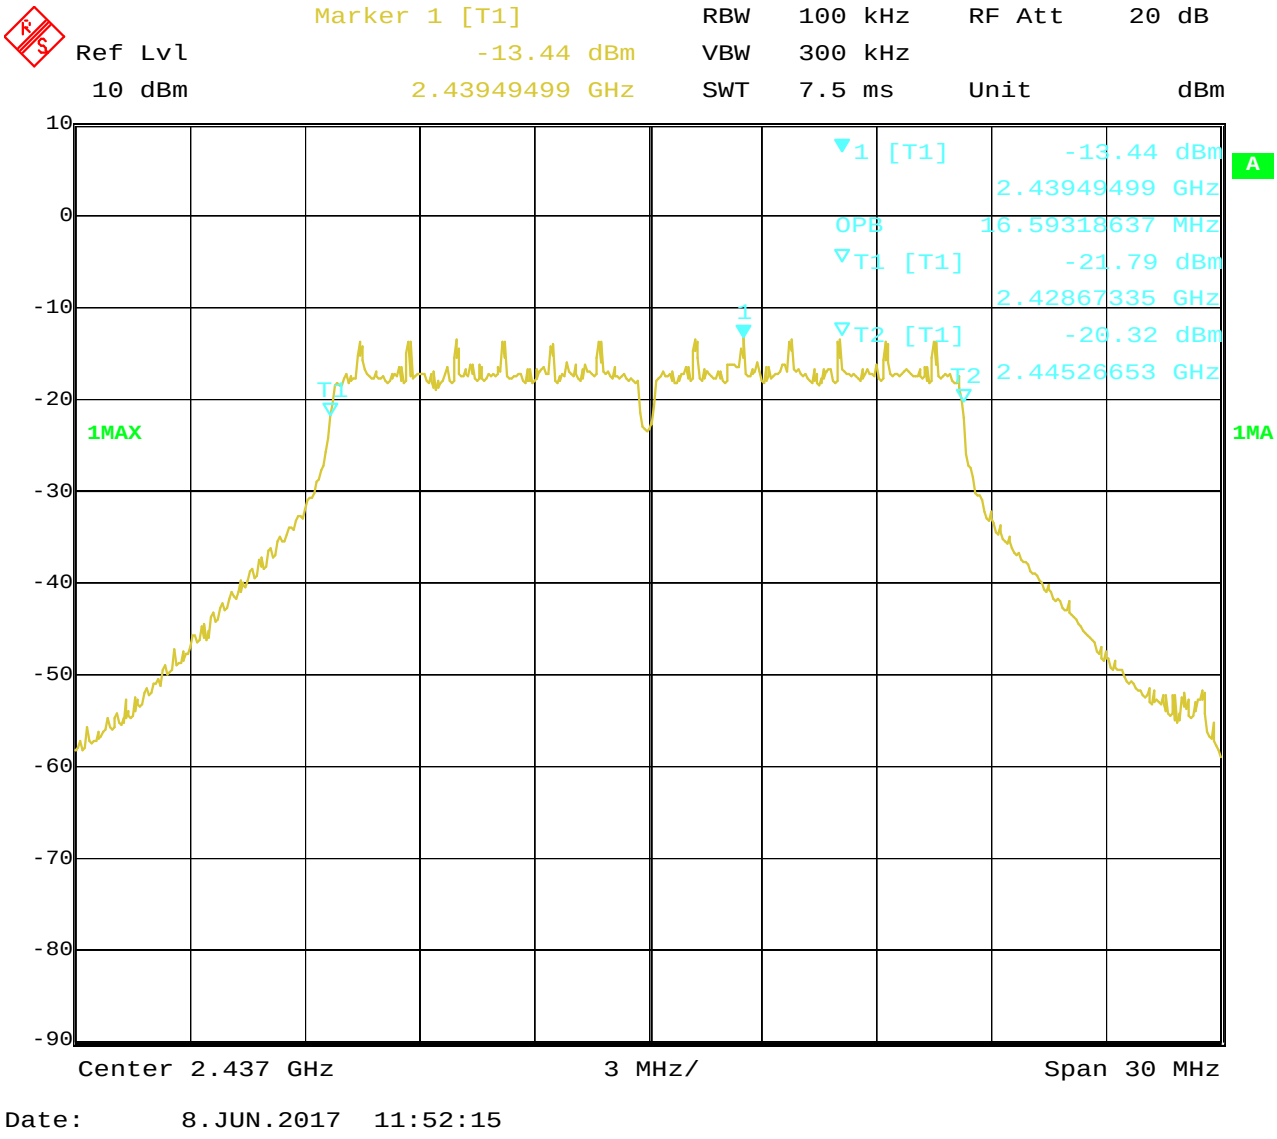

3. 802.11g at 54Mbps of CH11

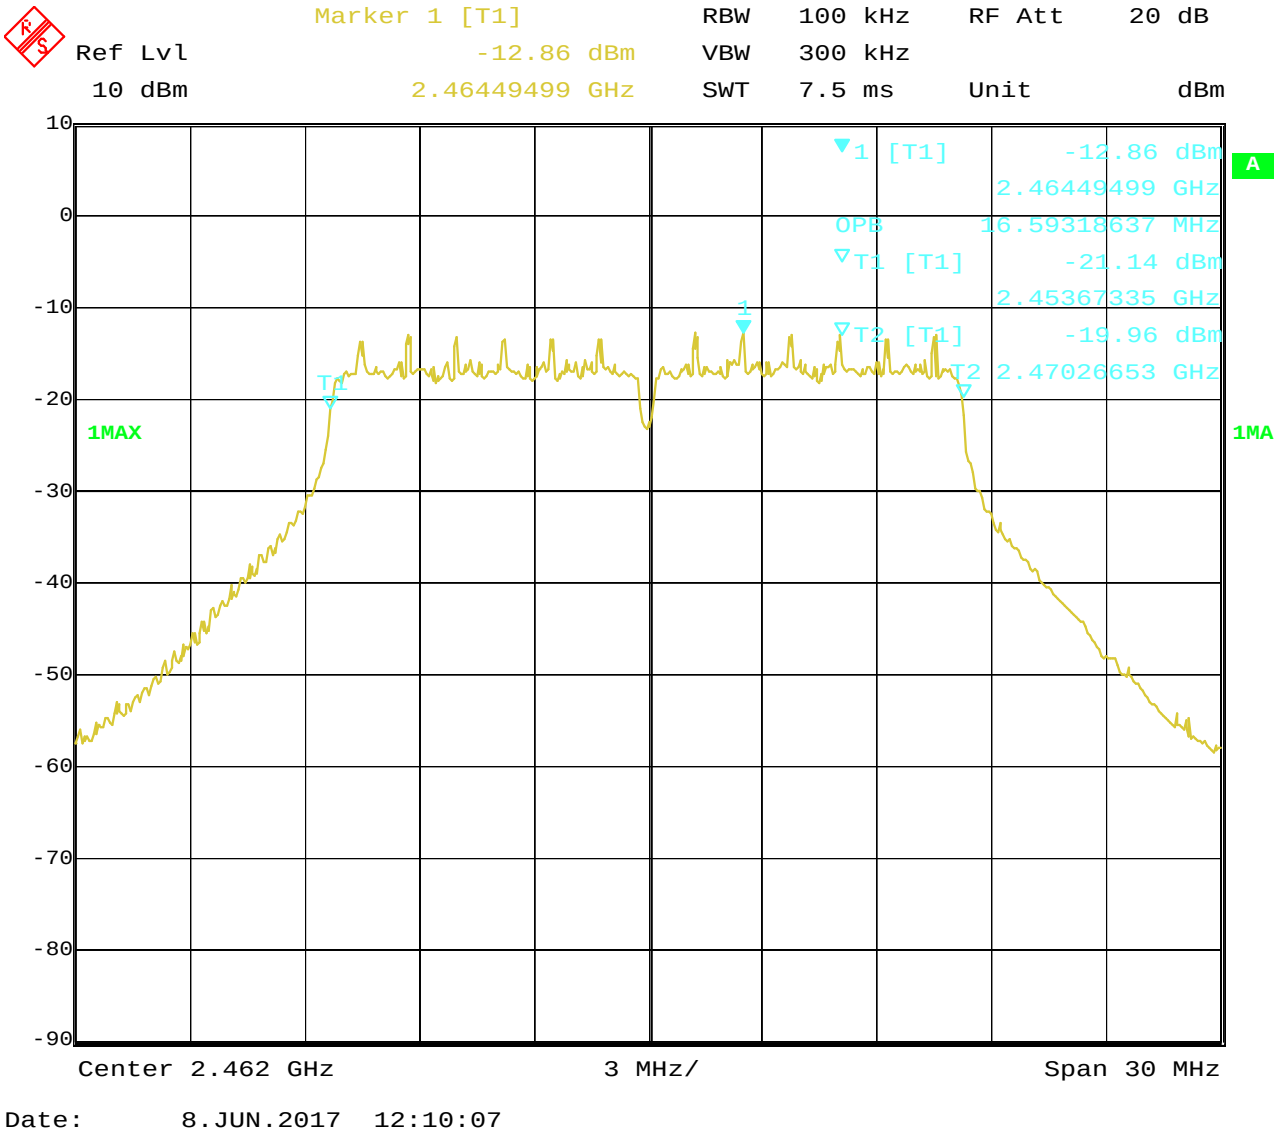

99% Occupied Bandwidth

EUT	Action camera	Model	CGX3
Mode	802.11n HT20	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	99% Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2412	6.5M	17.68	0.5	Pass
6	2437	6.5M	17.74	0.5	Pass
11	2462	6.5M	17.68	0.5	Pass

Test Plots:

1. 802.11n at HT20 of CH01

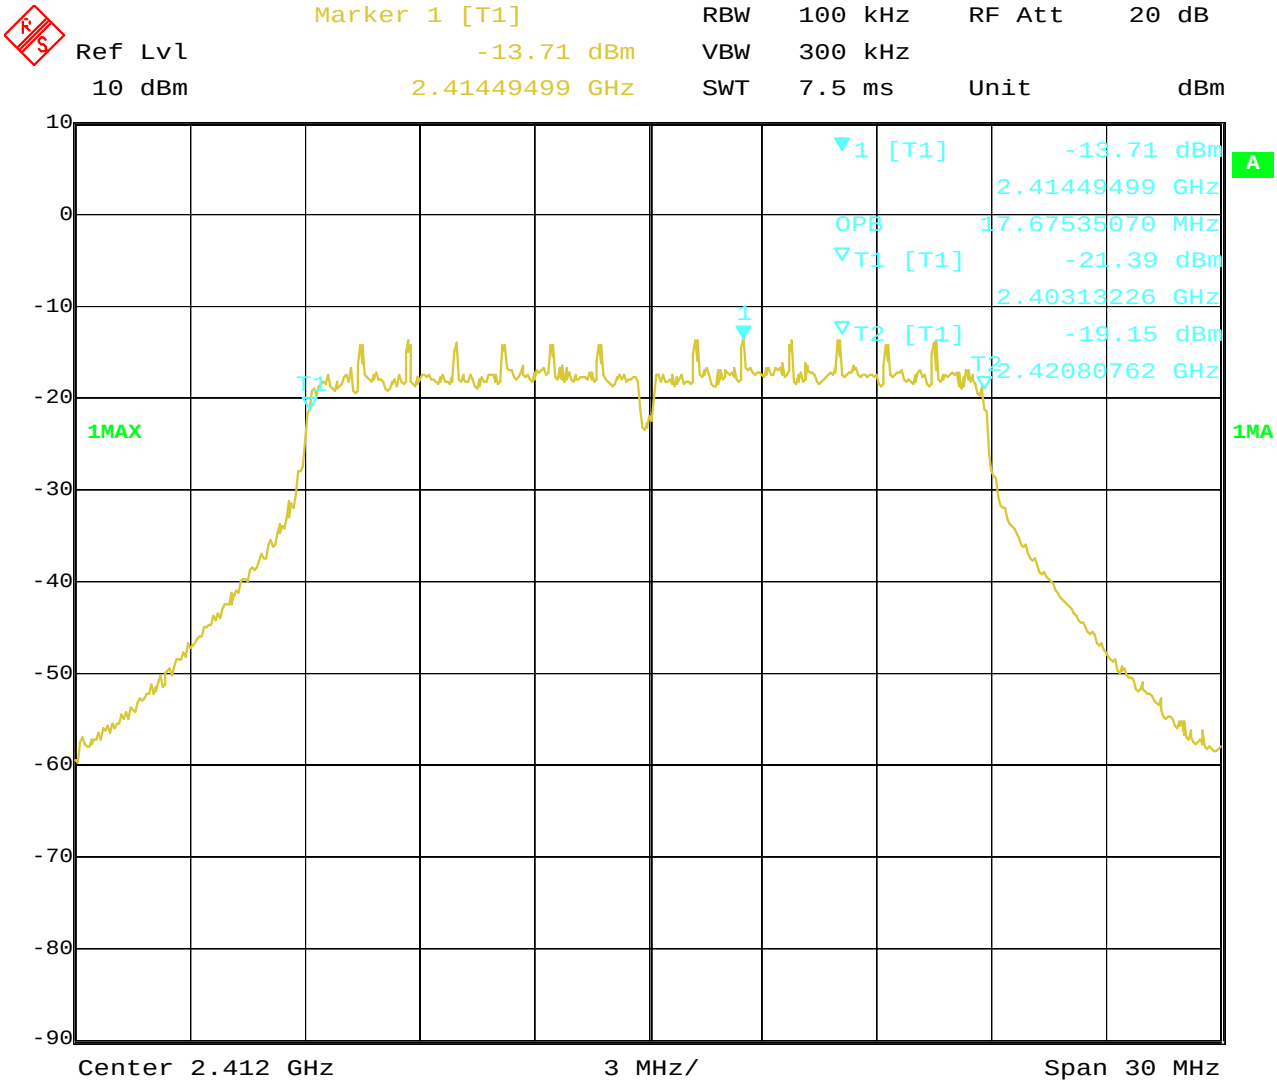

2. 802.11n at HT20 of CH06

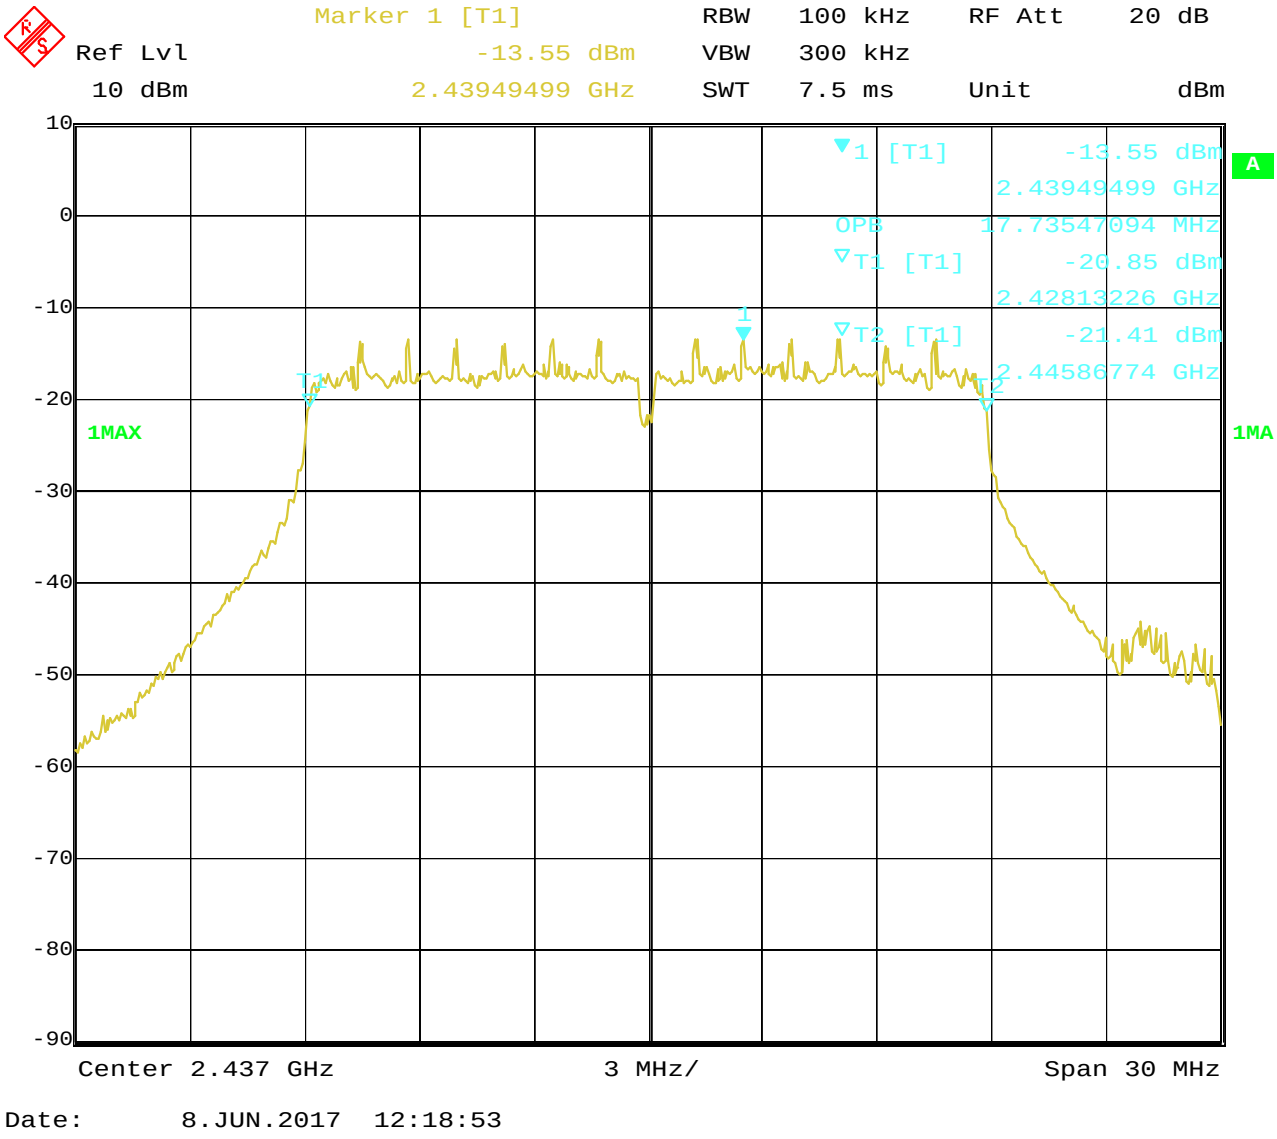

3. 802.11n at HT20 of CH11

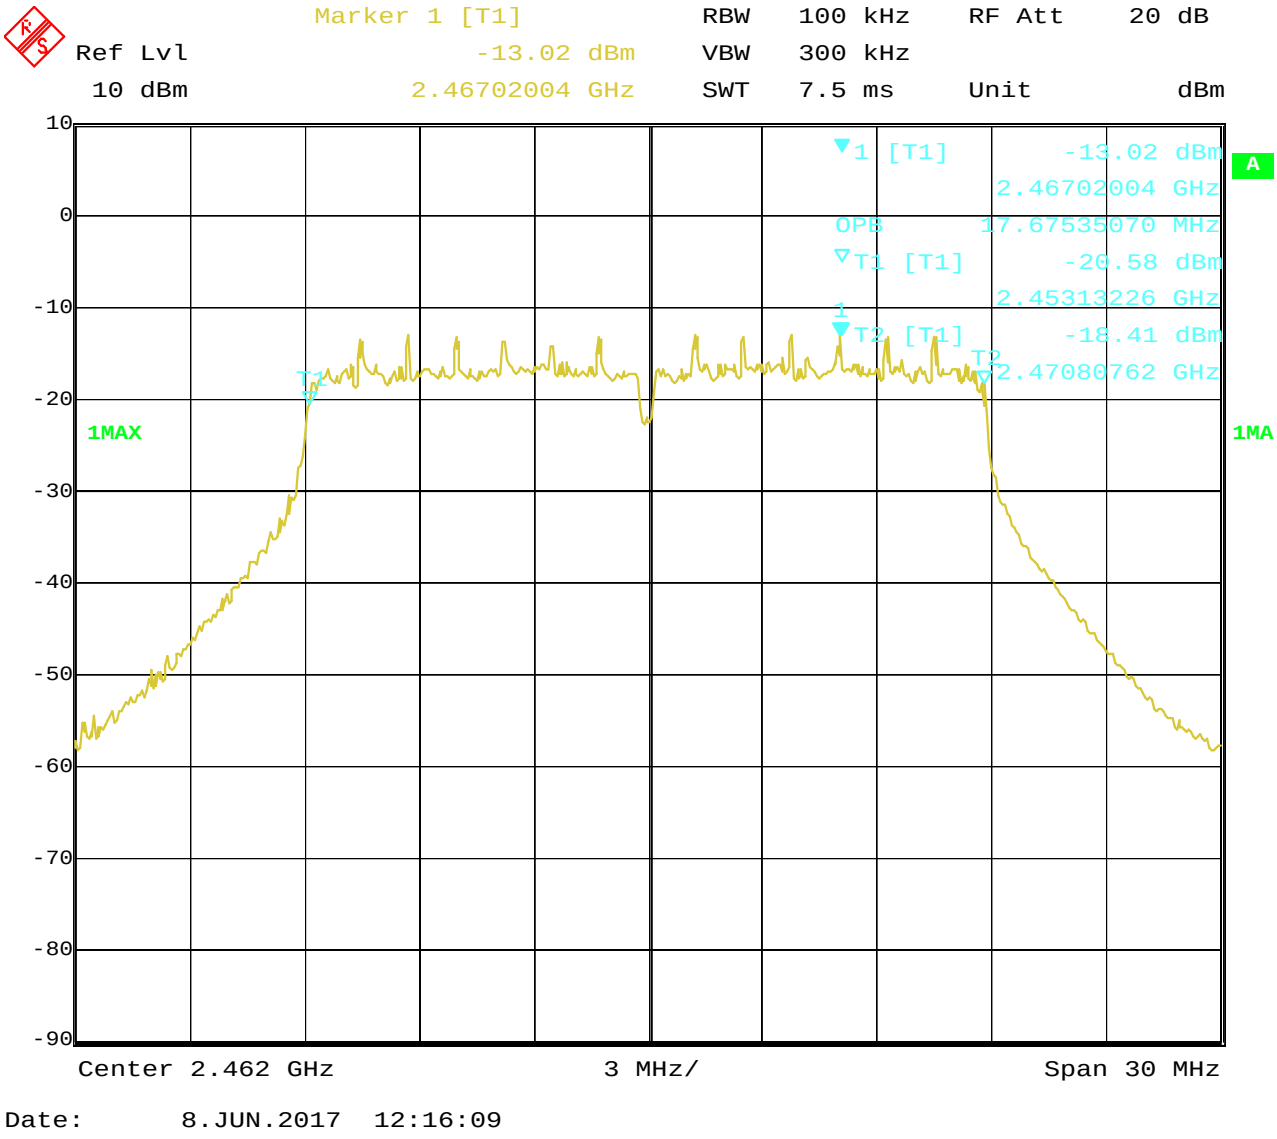

99% Occupied Bandwidth

EUT	Action camera	Model	CGX3
Mode	802.11n HT40	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/ Fail
1	2422	6.5M	35.97	0.5	Pass
4	2437	6.5M	35.97	0.5	Pass
7	2452	6.5M	35.87	0.5	Pass

Test Plots:

1. 802.11n at HT40 of CH01

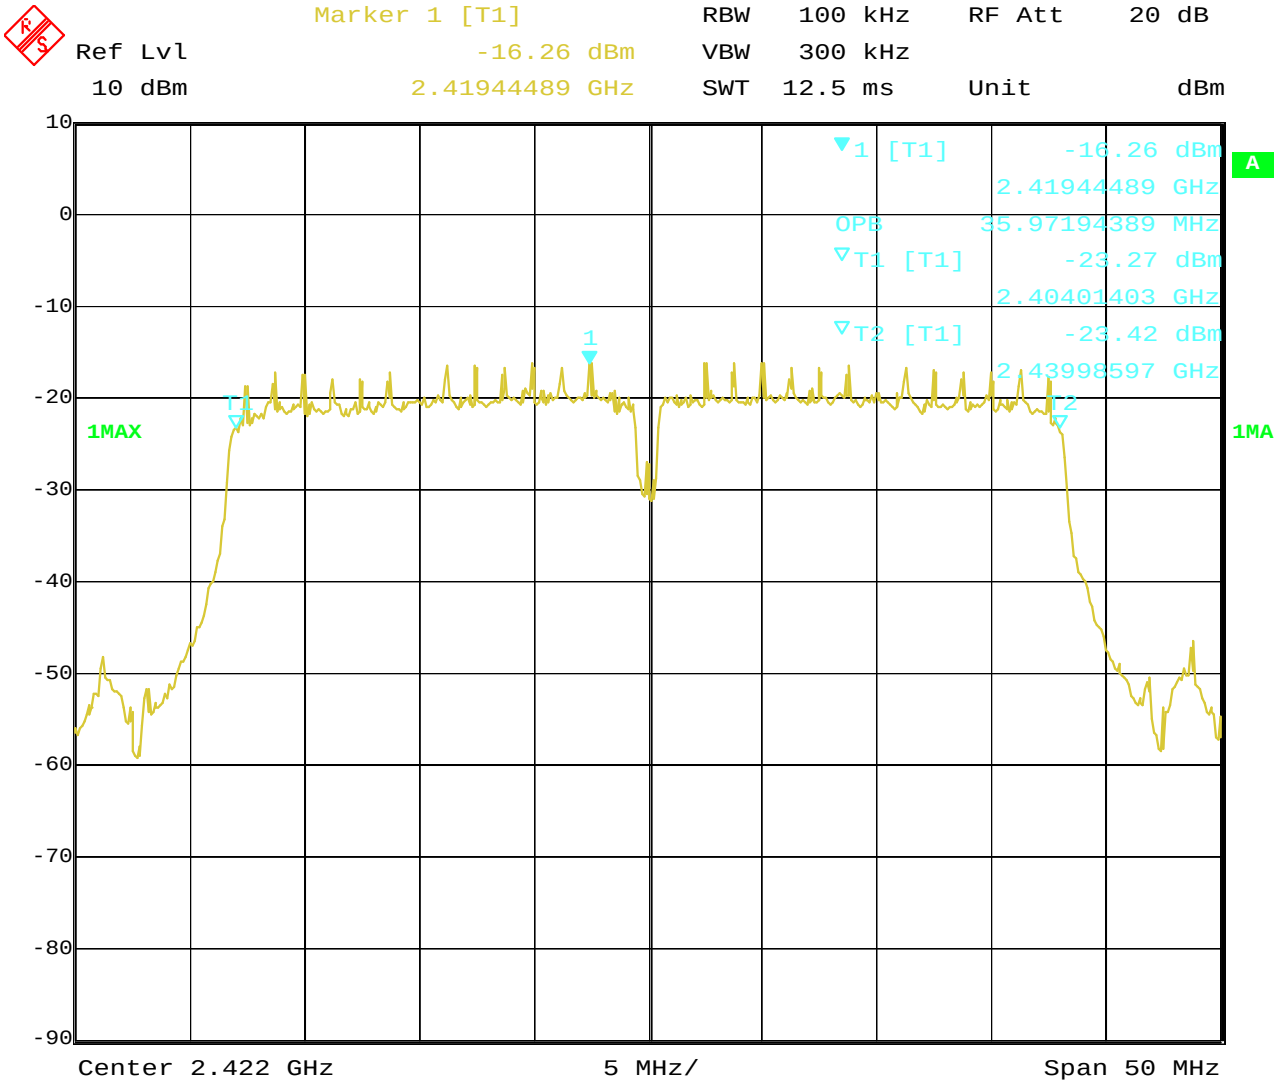

2. 802.11n at HT40 of CH04

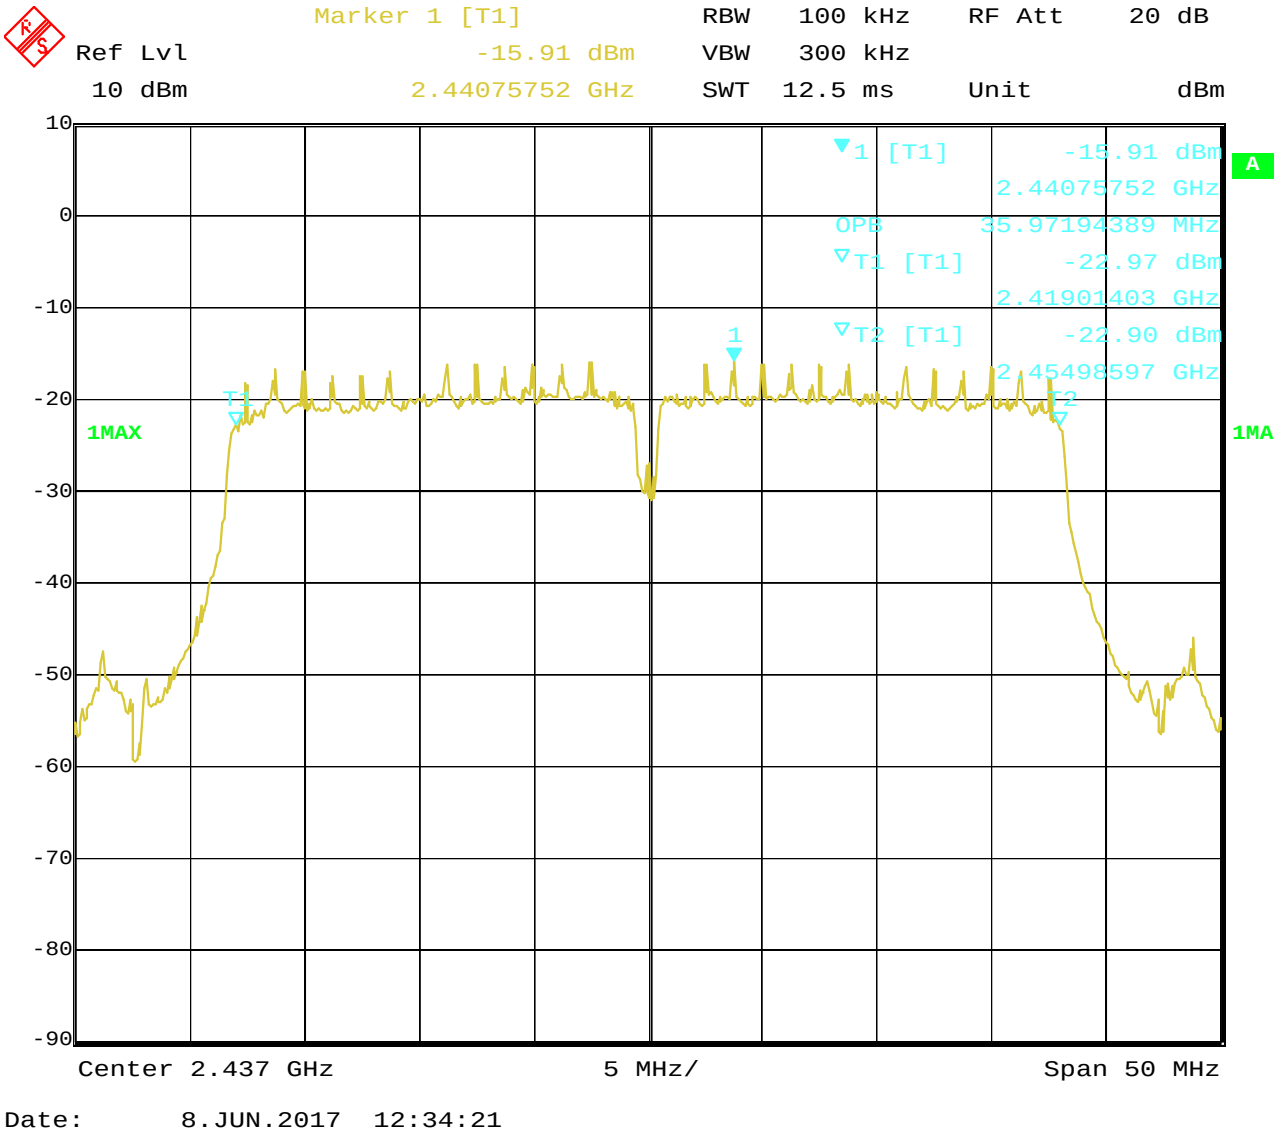

3. 802.11n at HT40 of CH07

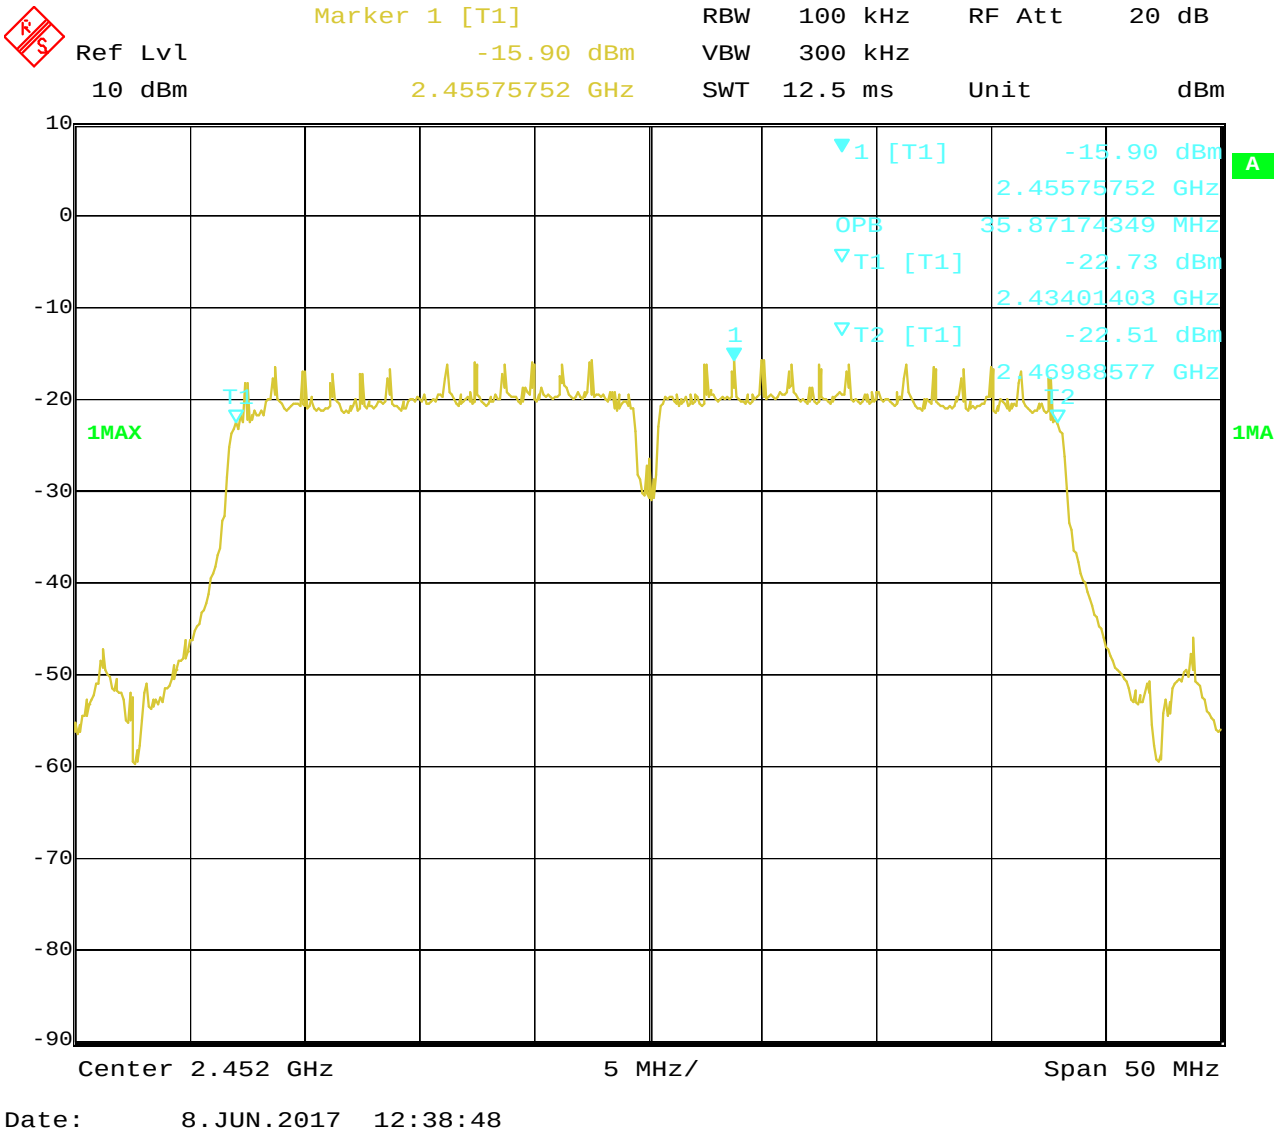

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power was measured

8.4Test Results

EUT	Action camera	Model	CGX3
Mode	802.11b	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Power Limit (dBm)	Pass/ Fail
		Peak		
1	2412	3.72	30	Pass
6	2437	5.12	30	Pass
11	2462	5.25	30	Pass

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	Action camera	Model	CGX3
Mode	802.11g	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Power Limit (dBm)	Pass/ Fail
		Peak		
1	2412	2.60	30	Pass
6	2437	2.82	30	Pass
11	2462	3.05	30	Pass

Note: 1. At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	Action camera	Model	CGX3
Mode	802.11n (HT20)	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Power Limit (dBm)	Pass/ Fail
		Peak		
1	2412	2.60	30	Pass
6	2437	3.06	30	Pass
11	2462	3.29	30	Pass

Note: 1. At finial test to get the worst-case emission at 6.5Mbps of 11n HT20 for CH01, CH06 and CH11
2. The result basic equation calculation as follow:
Max. Power Output = Power Reading + Cable loss + Attenuator
3. The worse case was recorded

EUT	Action camera	Model	CGX3
Mode	802.11n (HT40)	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Power Limit (dBm)	Pass/ Fail
		Peak		
1	2422	2.79	30	Pass
4	2437	3.03	30	Pass
7	2452	3.17	30	Pass

Note: 1. At finial test to get the worst-case emission at 6.5Mbps of 11n HT20 for CH01, CH06 and CH11
2. The result basic equation calculation as follow:
Max. Power Output = Power Reading + Cable loss + Attenuator
3. The worse case was recorded

9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 10 kHz.
3. Set the VBW ≥ 30 kHz.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be ≤ 8 dBm.

9.4Test Result

EUT	Action camera	Model	CGX3
Mode	802.11b 11Mbps	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Final RF Power Level (dBm)	Maximum Limit (dBm)	Pass/ Fail
11Mbps				
1	2412	-15.53	8	Pass
6	2437	-15.24	8	Pass
11	2462	-15.02	8	Pass

EUT	Action camera	Model	CGX3
Mode	802.11b 1Mbps	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Final RF Power Level in (dBm)	Maximum Limit (dBm)	Pass/ Fail
1Mbps				
1	2412	-16.43	8	Pass
6	2437	-15.92	8	Pass
11	2462	-16.04	8	Pass

EUT	Action camera	Model	CGX3
Mode	802.11g 54Mbps	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Final RF Power Level in (dBm)	Maximum Limit (dBm)	Pass/ Fail
6Mbps				
1	2412	-24.16	8	Pass
6	2437	-23.72	8	Pass
11	2462	-23.60	8	Pass

EUT	Action camera	Model	CGX3
Mode	802.11n HT20 6.5Mbps	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Final RF Power Level (dBm)	Maximum Limit (dBm)	Pass/ Fail
HT20				
1	2412	-23.13	8	Pass
6	2437	-21.69	8	Pass
11	2462	-22.14	8	Pass

EUT	Action camera	Model	CGX3
Mode	802.11n HT40 6.5Mbps	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH

Channel	Channel Frequency (MHz)	Final RF Power Level (dBm)	Maximum Limit (dBm)	Pass/ Fail
HT40				
1	2422	-25.57	8	Pass
4	2437	-25.56	8	Pass
7	2452	-25.18	8	Pass

9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

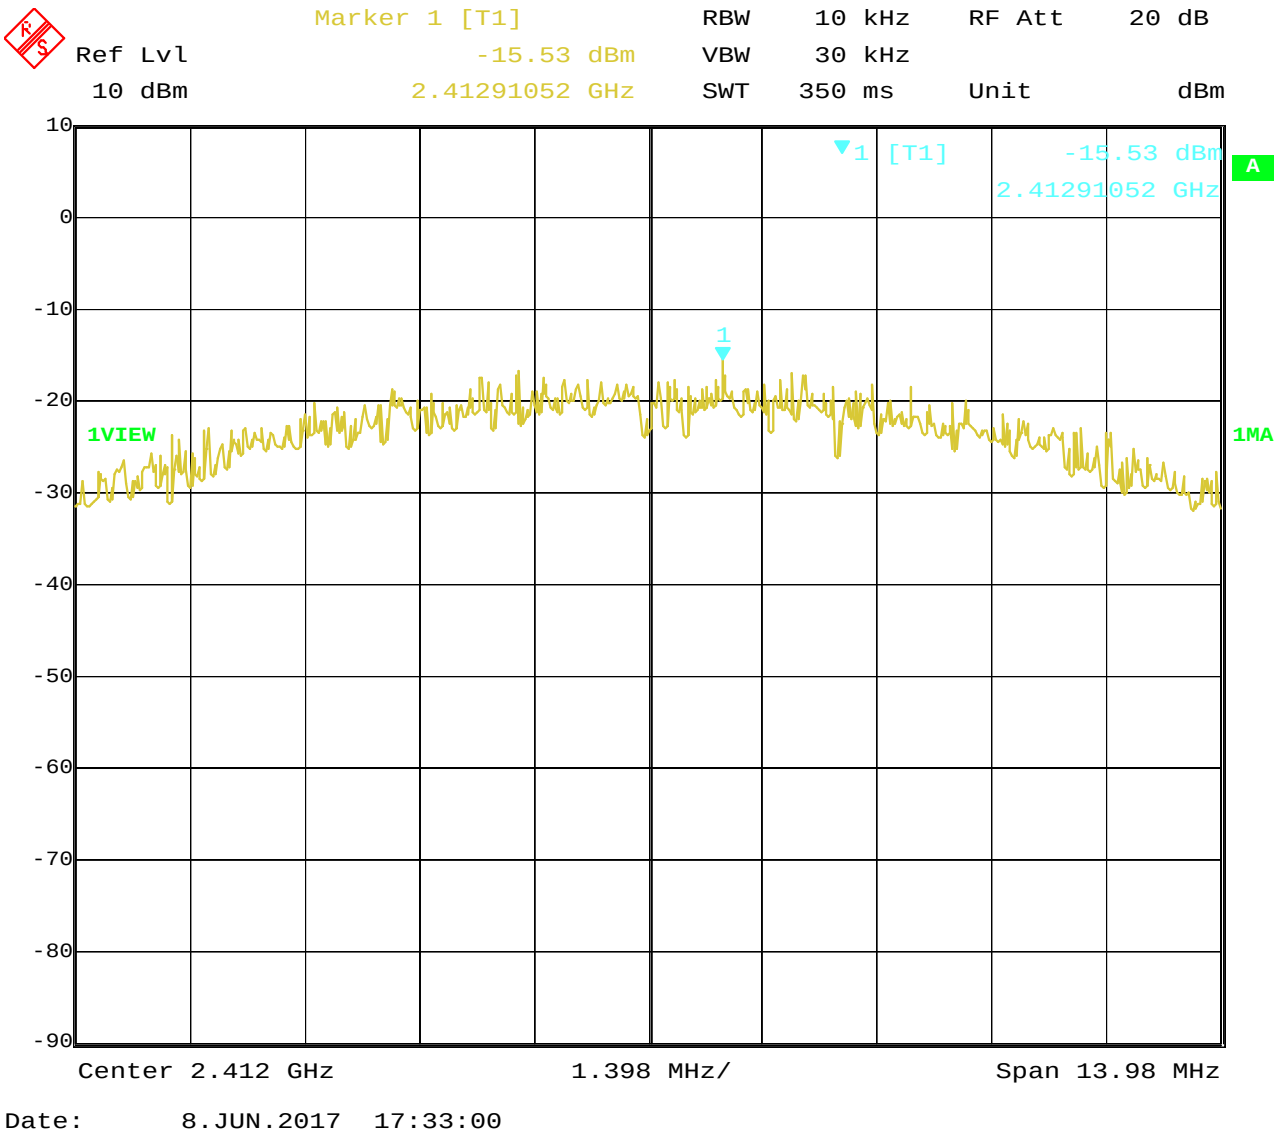

2. 802.11b at 11Mbps at CH06

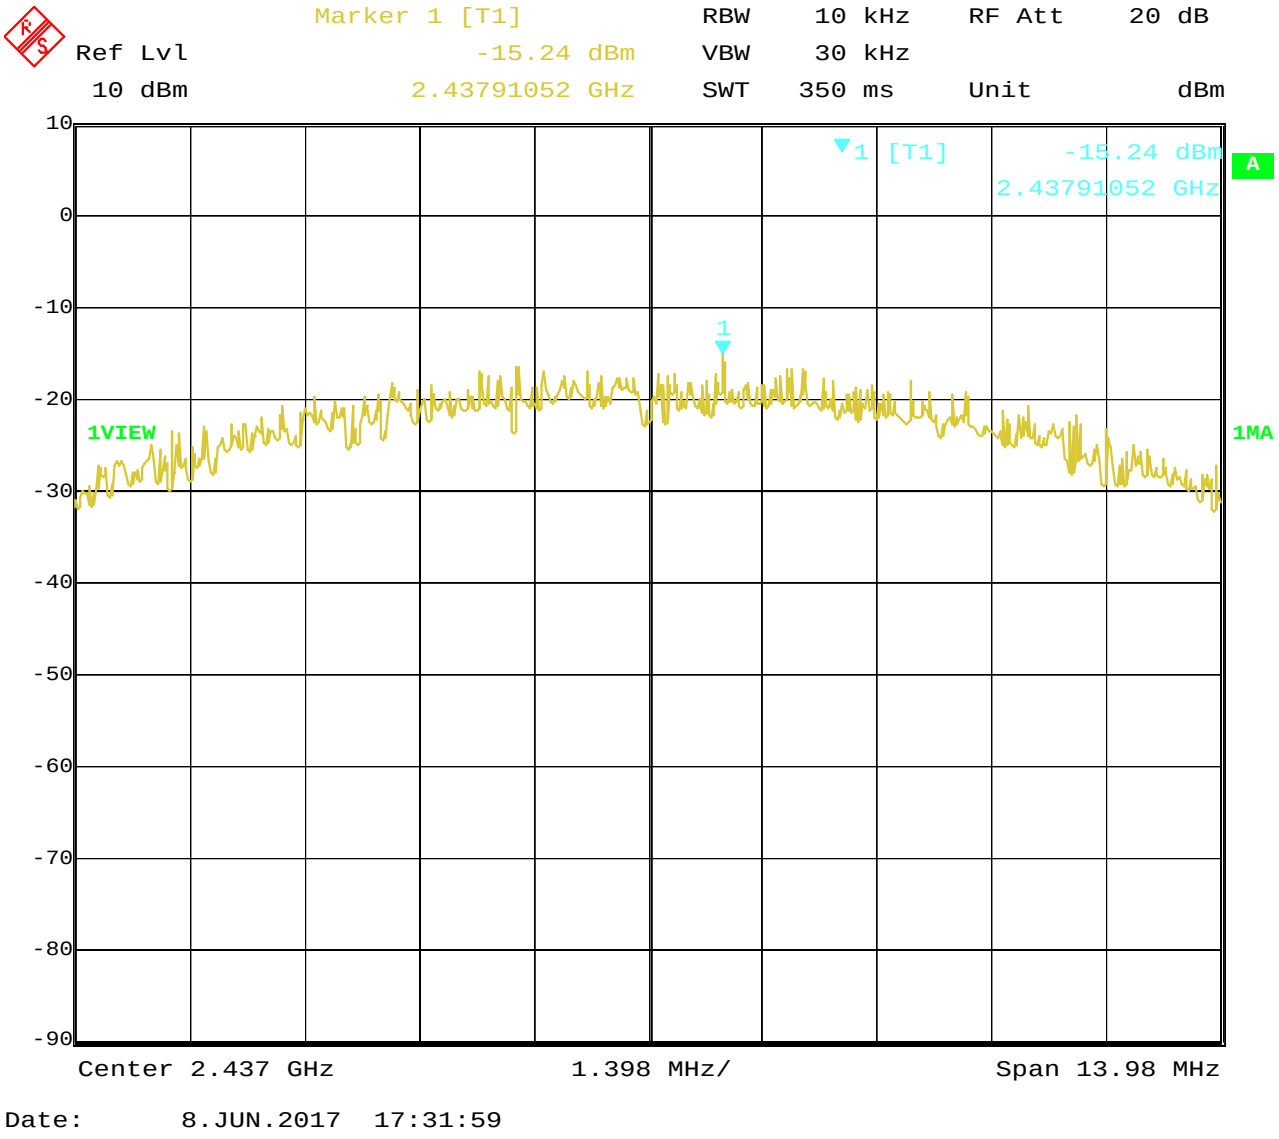

3. 802.11b at 11Mbps of CH11

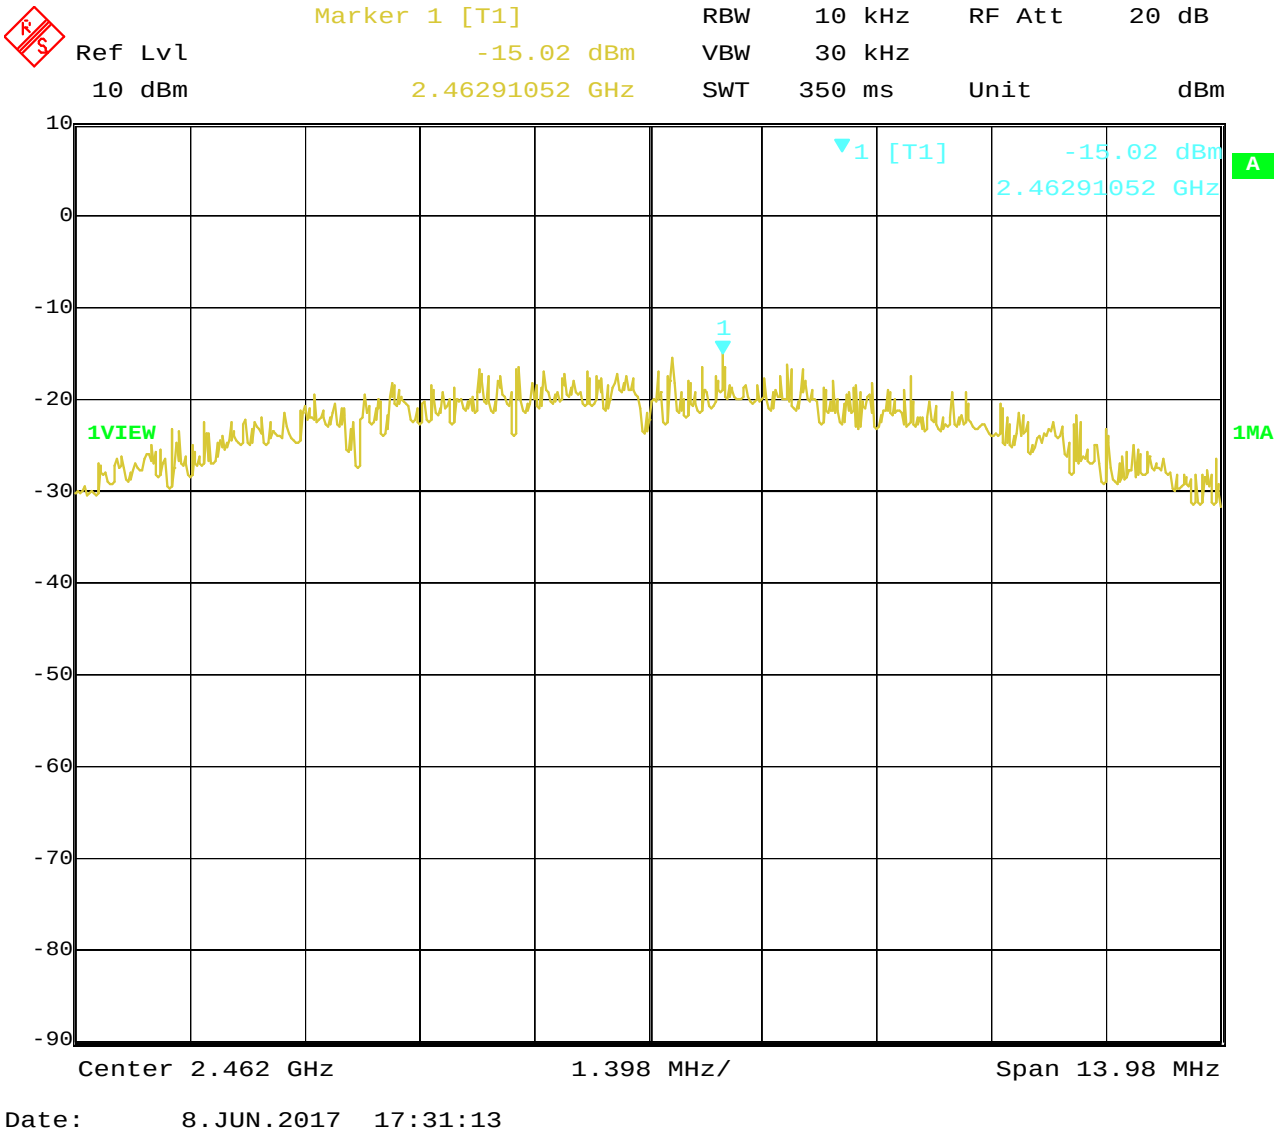

4. 802.11b at 1Mbps of CH1

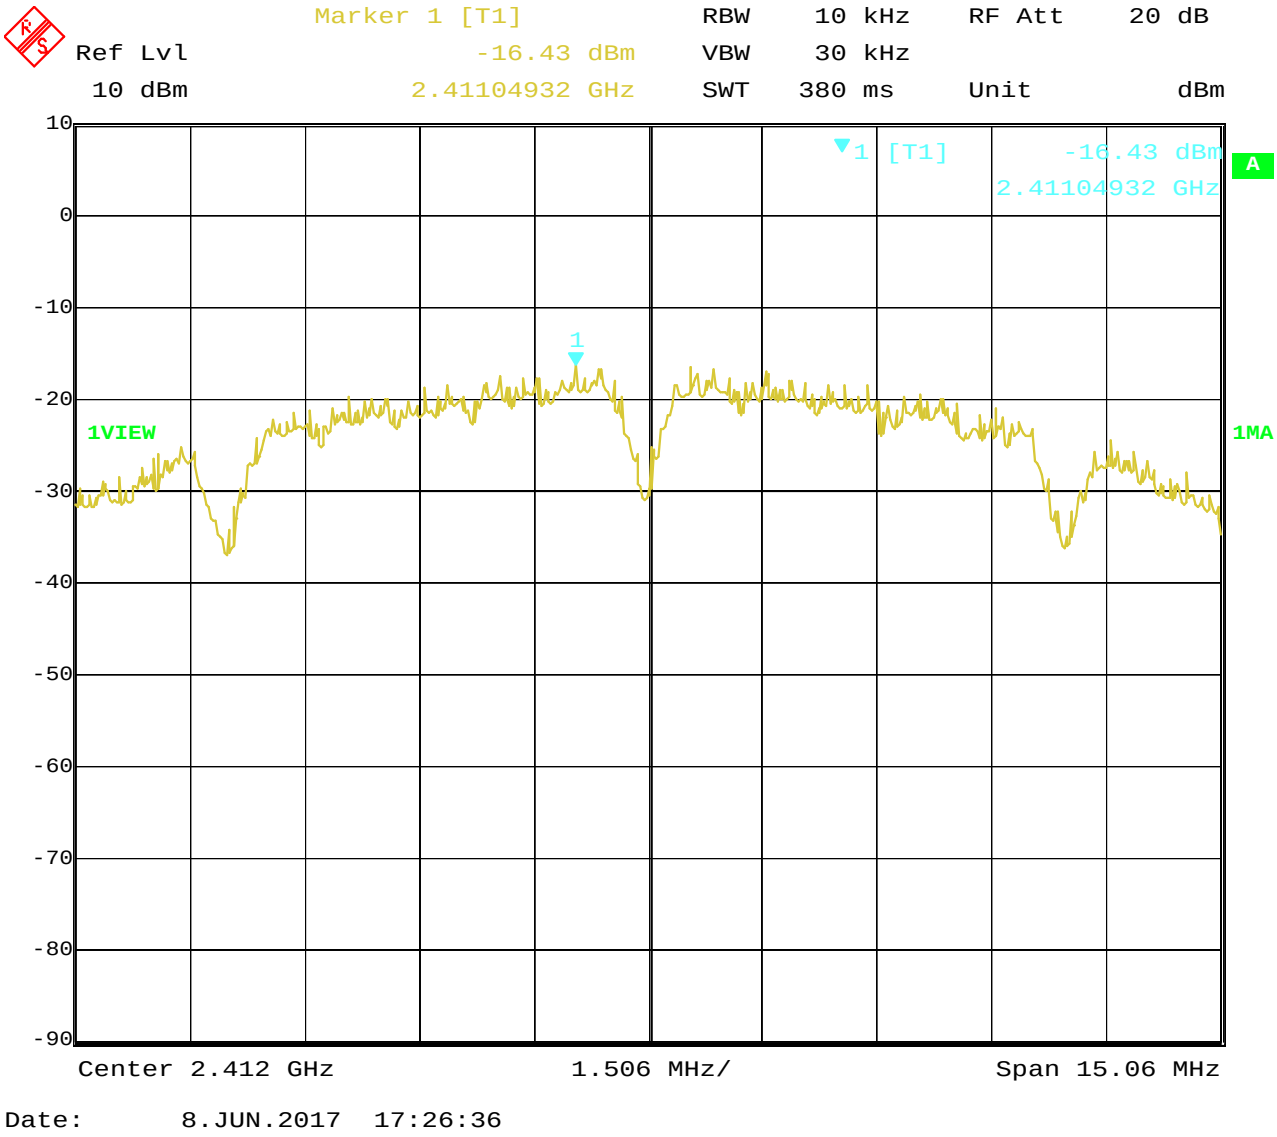

5. 802.11b at 1Mbps of CH6

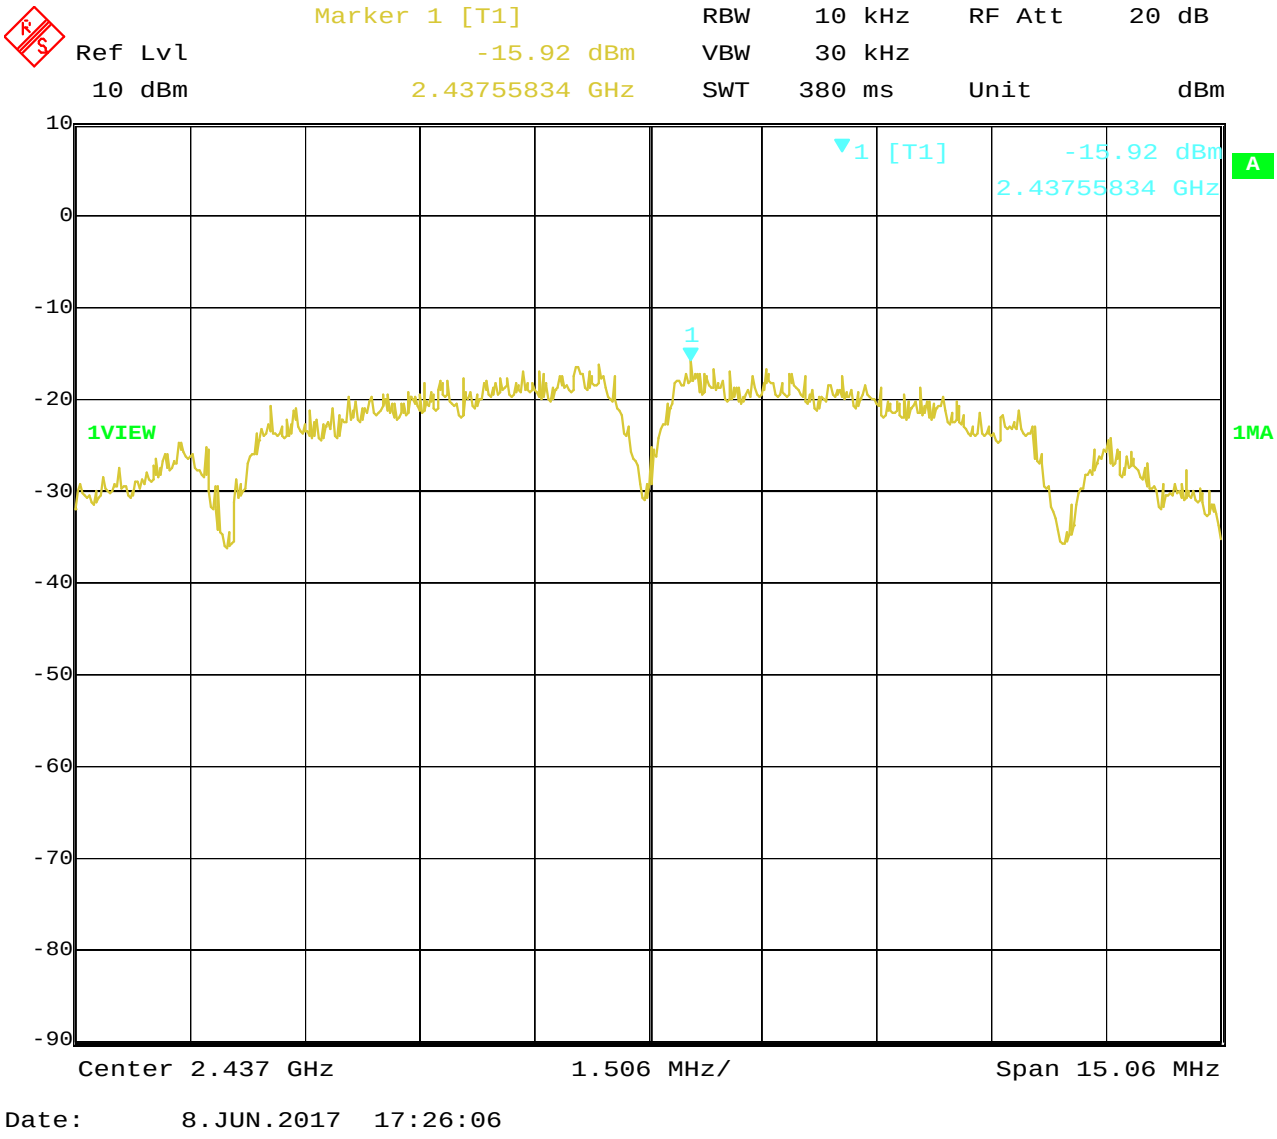

6. 802.11b at 1Mbps of CH11

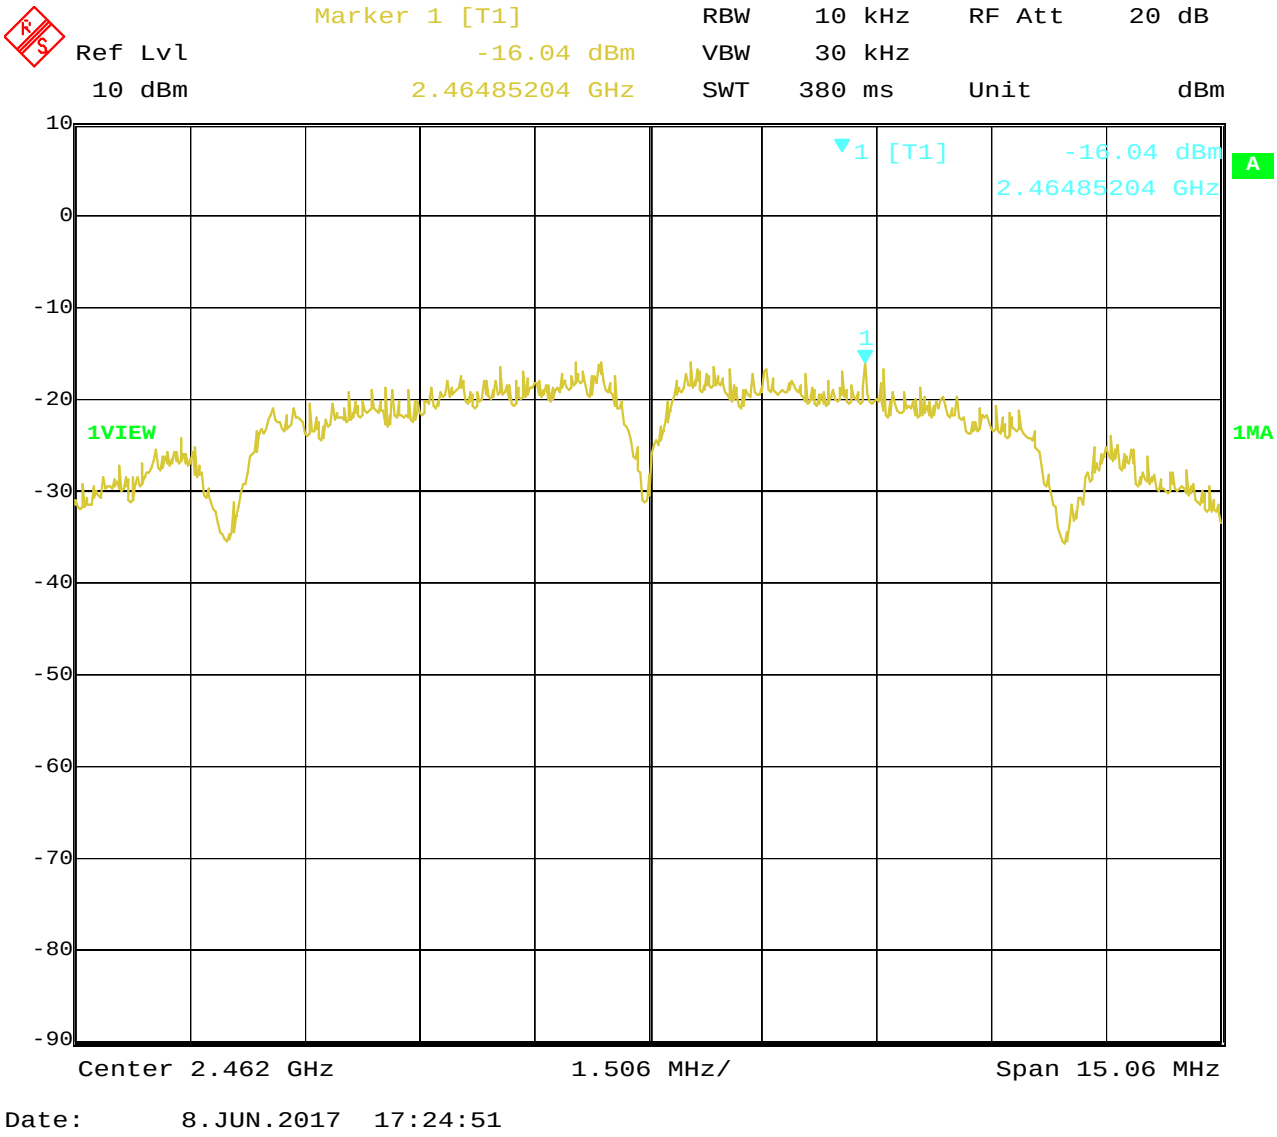

7. 802.11g at 54Mbps of CH1

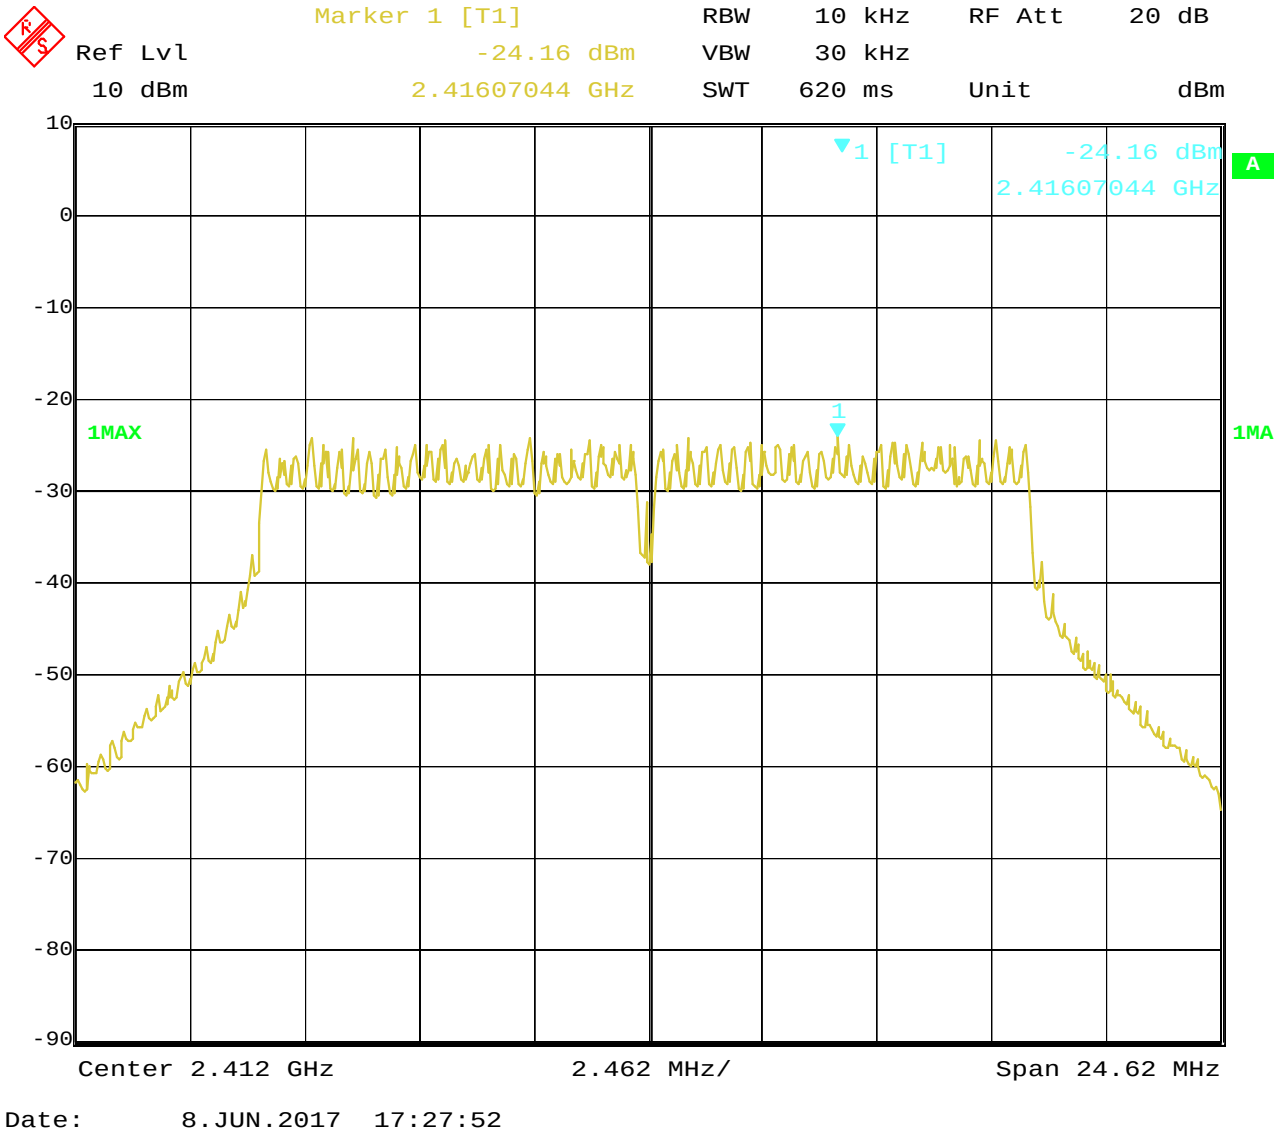

8. 802.11g at 54Mbps of CH6

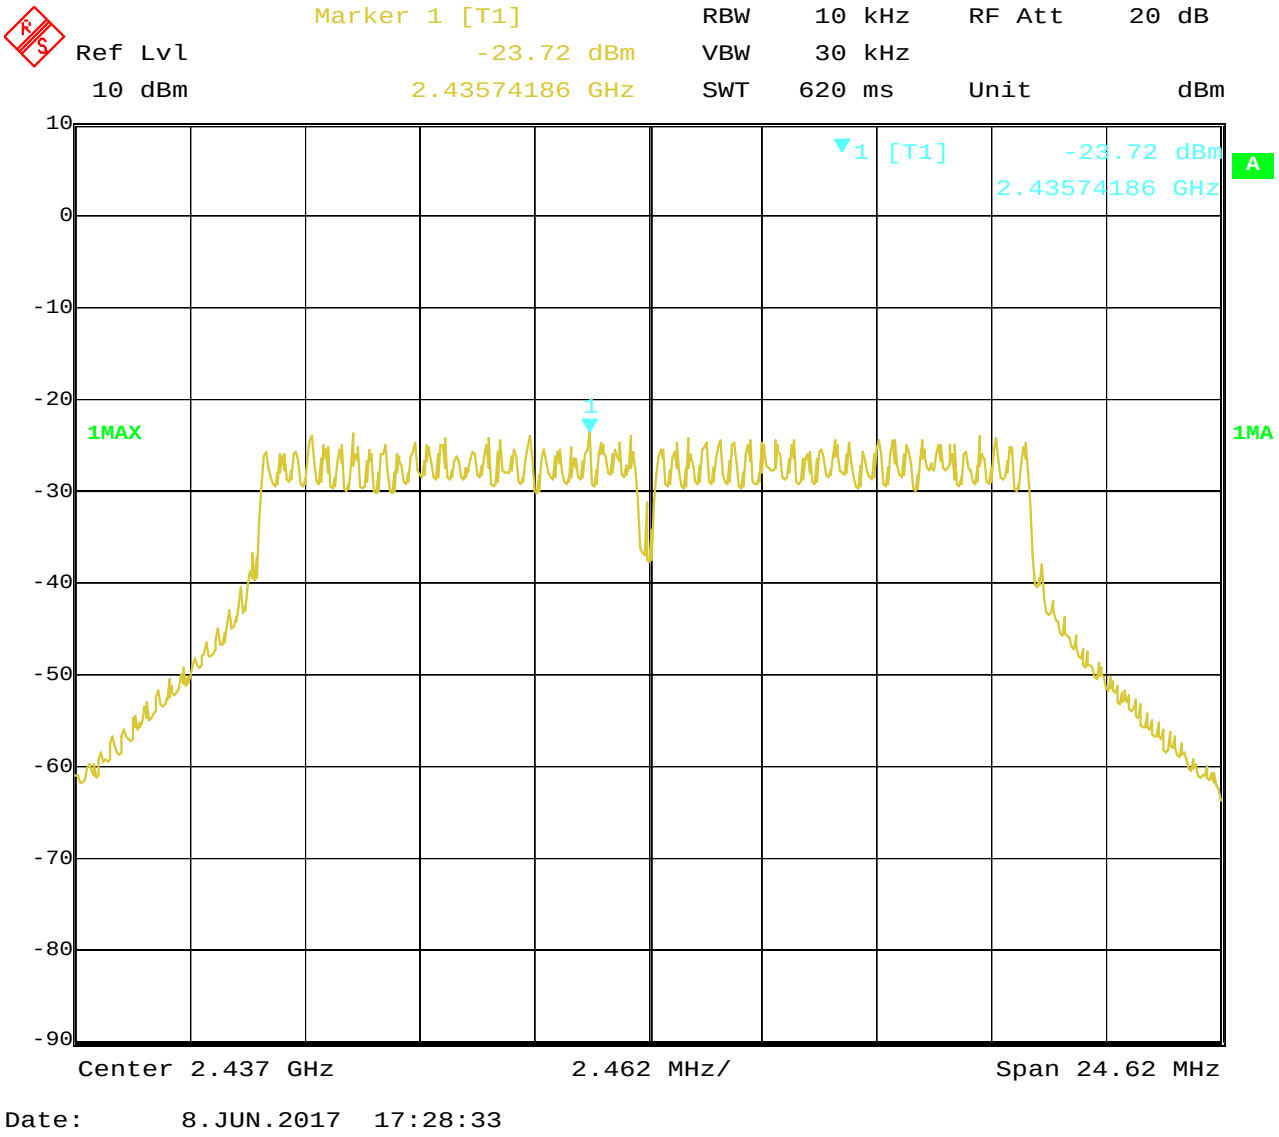

9. 802.11g at 54Mbps of CH11

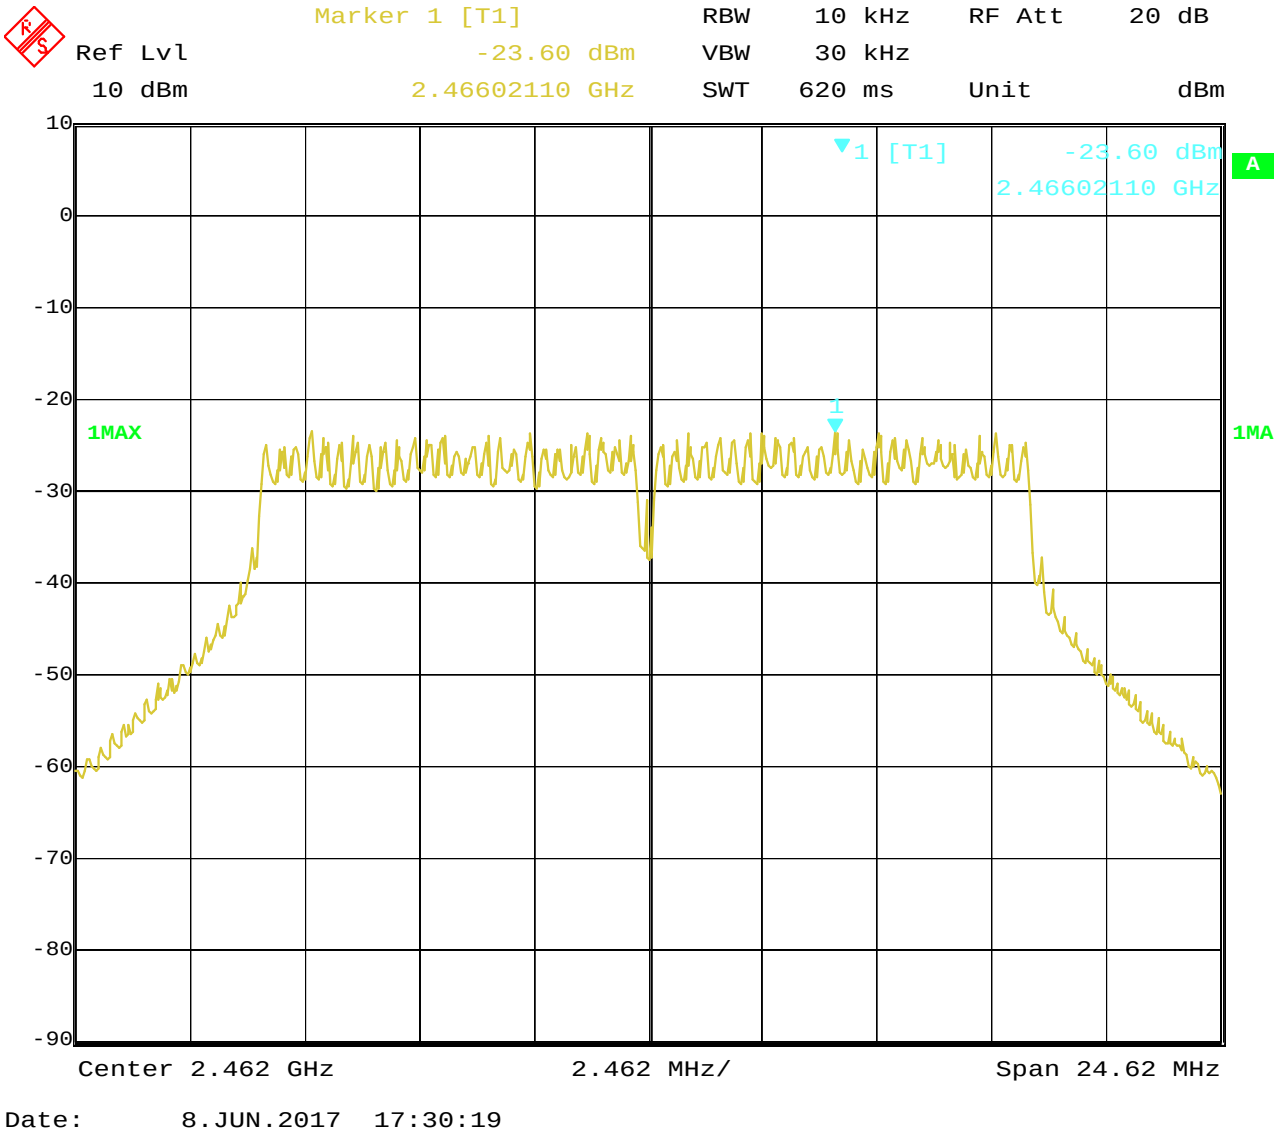

10. 802.11n at HT20 of CH01

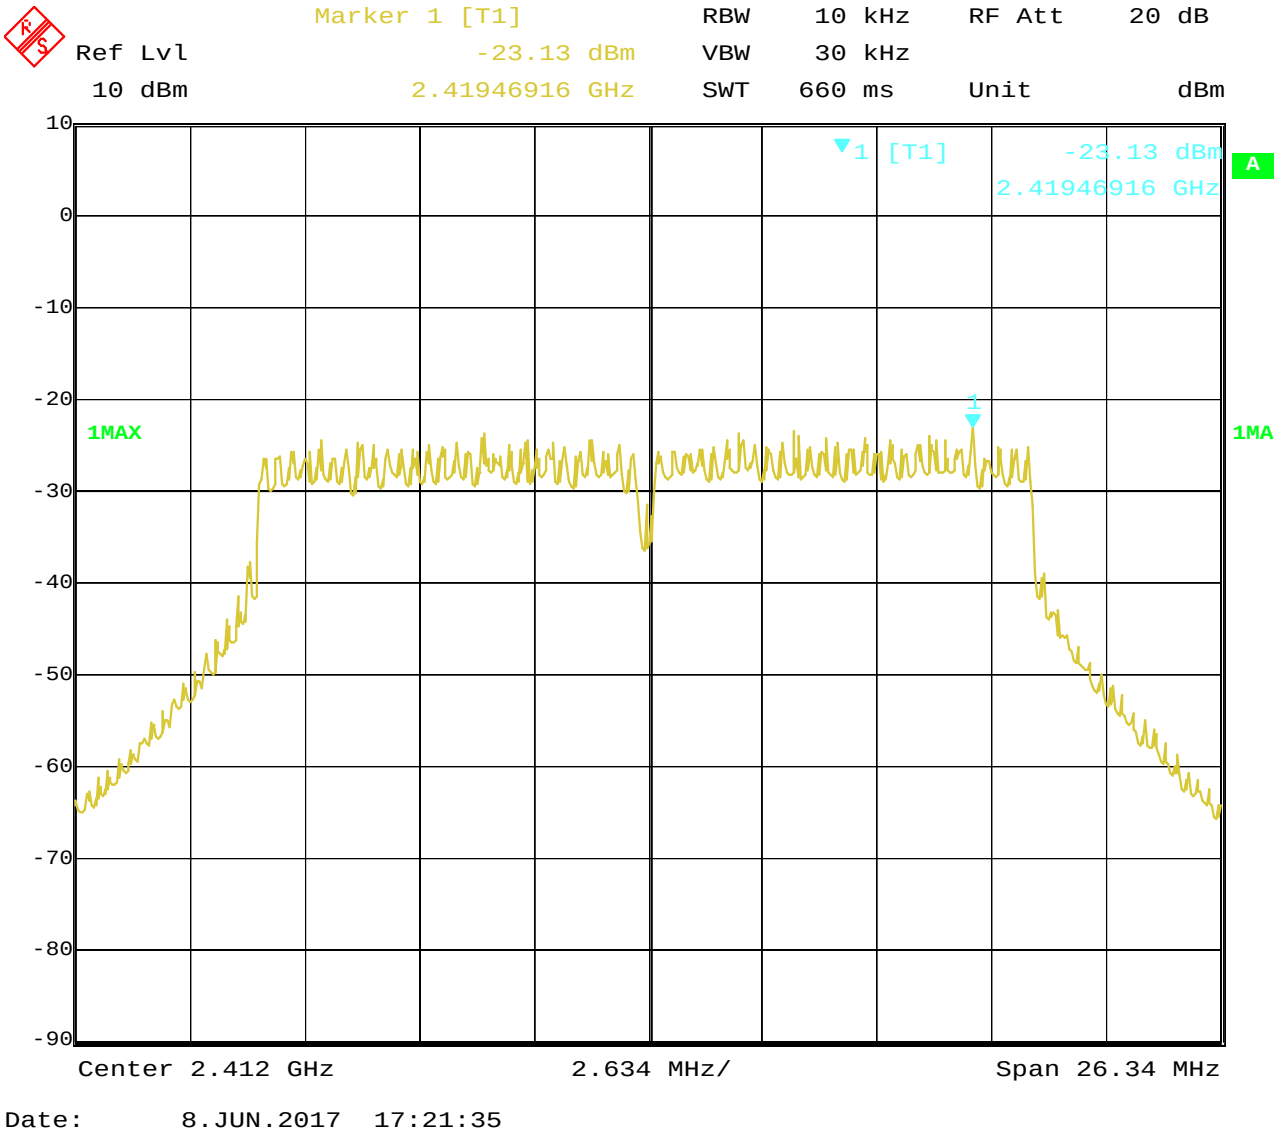

11. 802.11n at HT20 of CH06

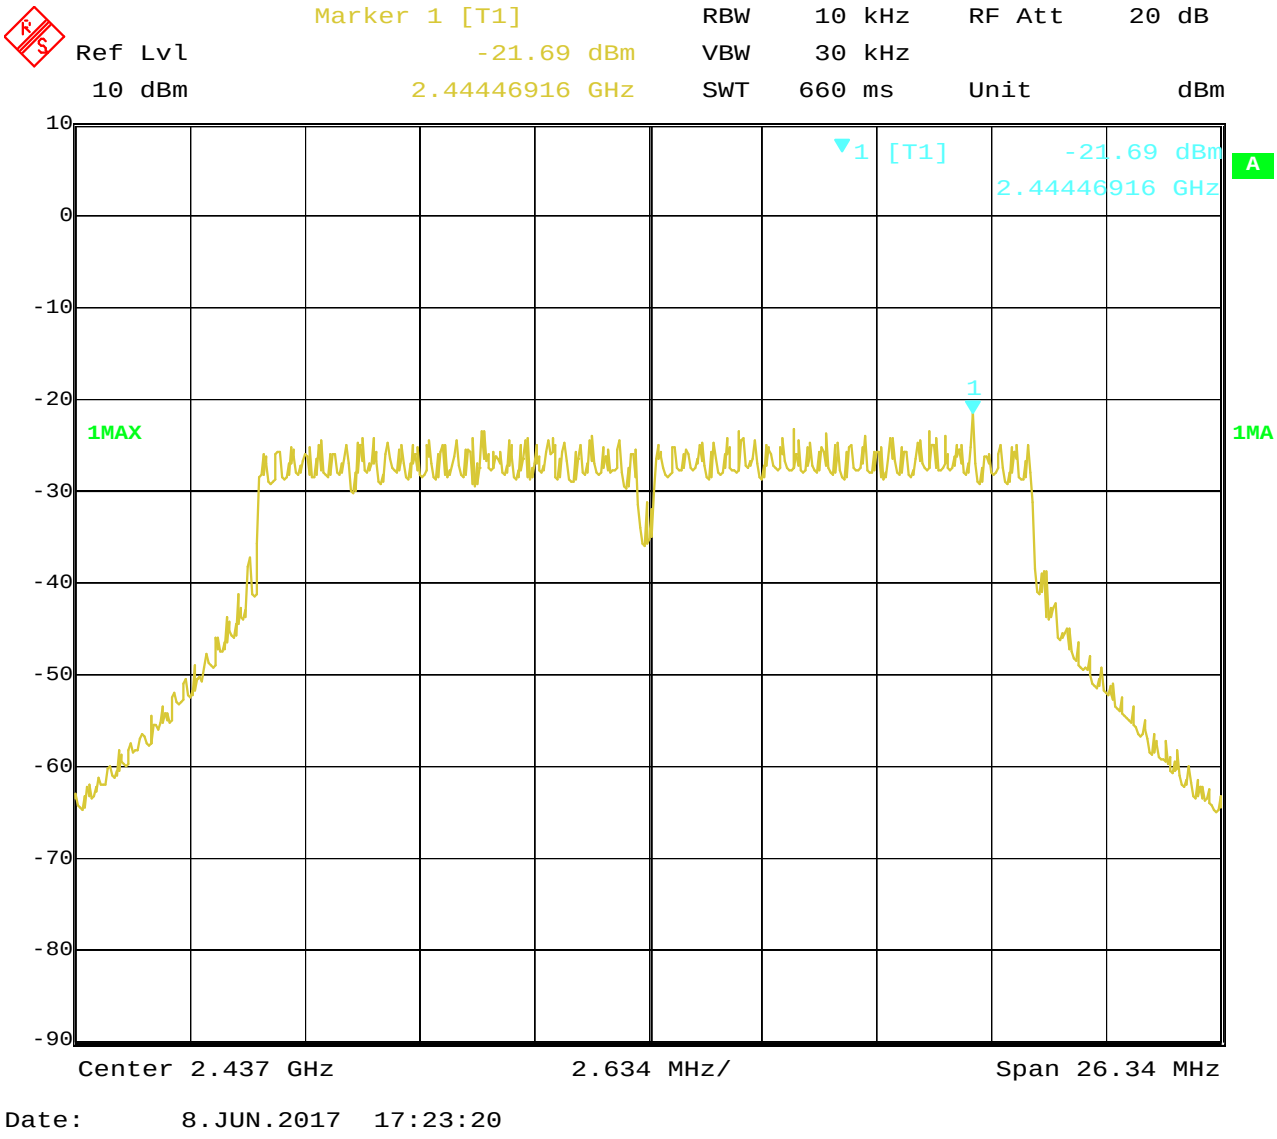

12. 802.11n at HT20 of CH11

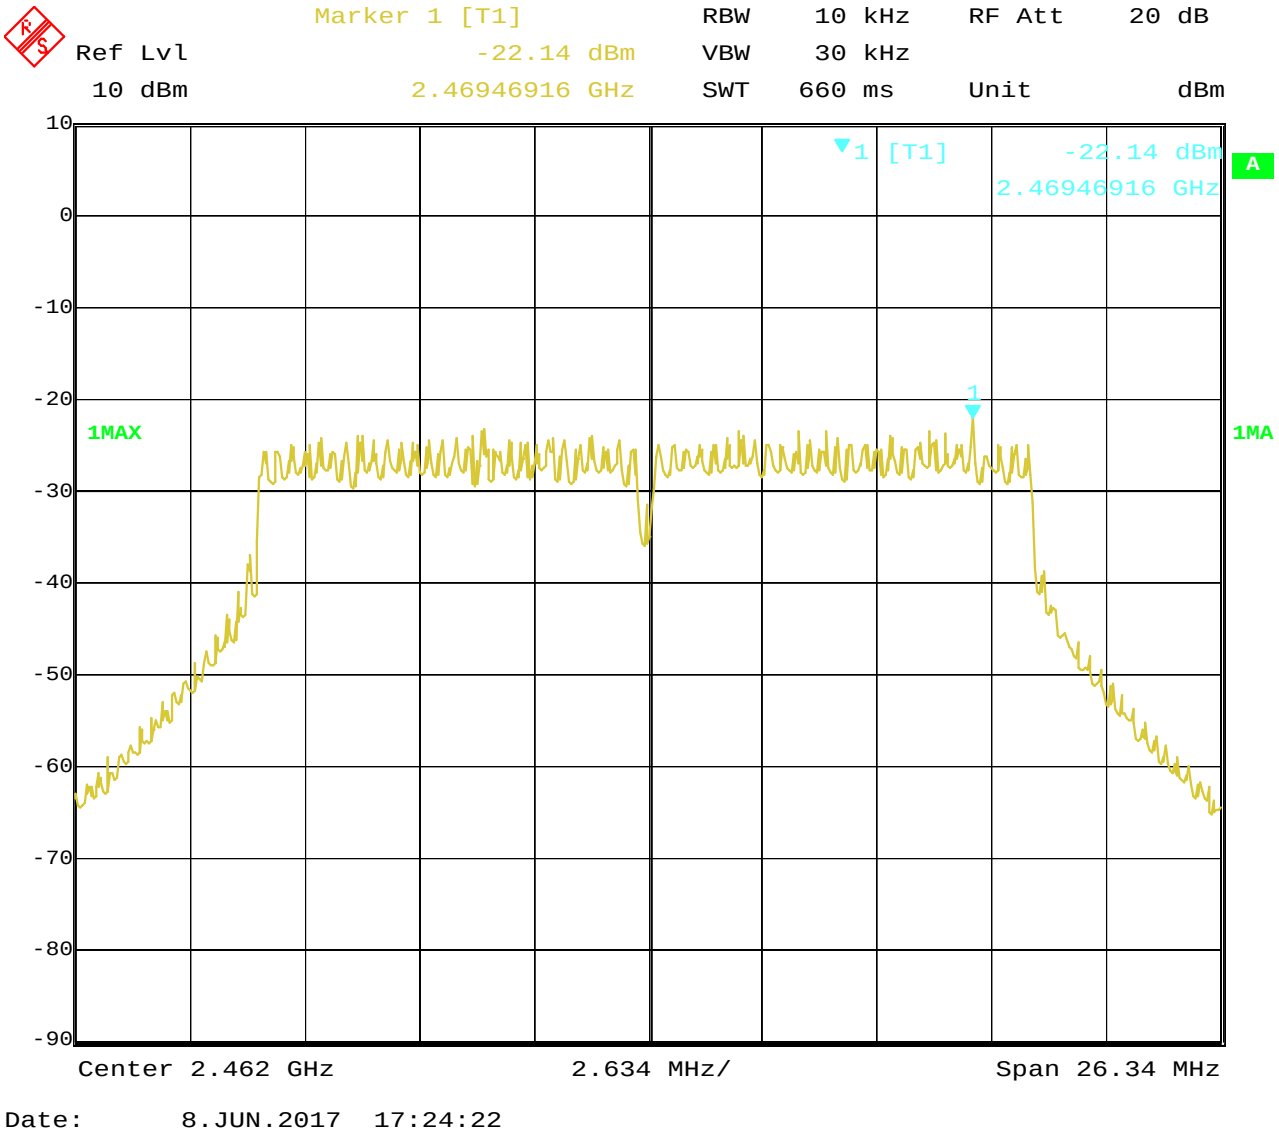

13. 802.11n at HT40 of CH01

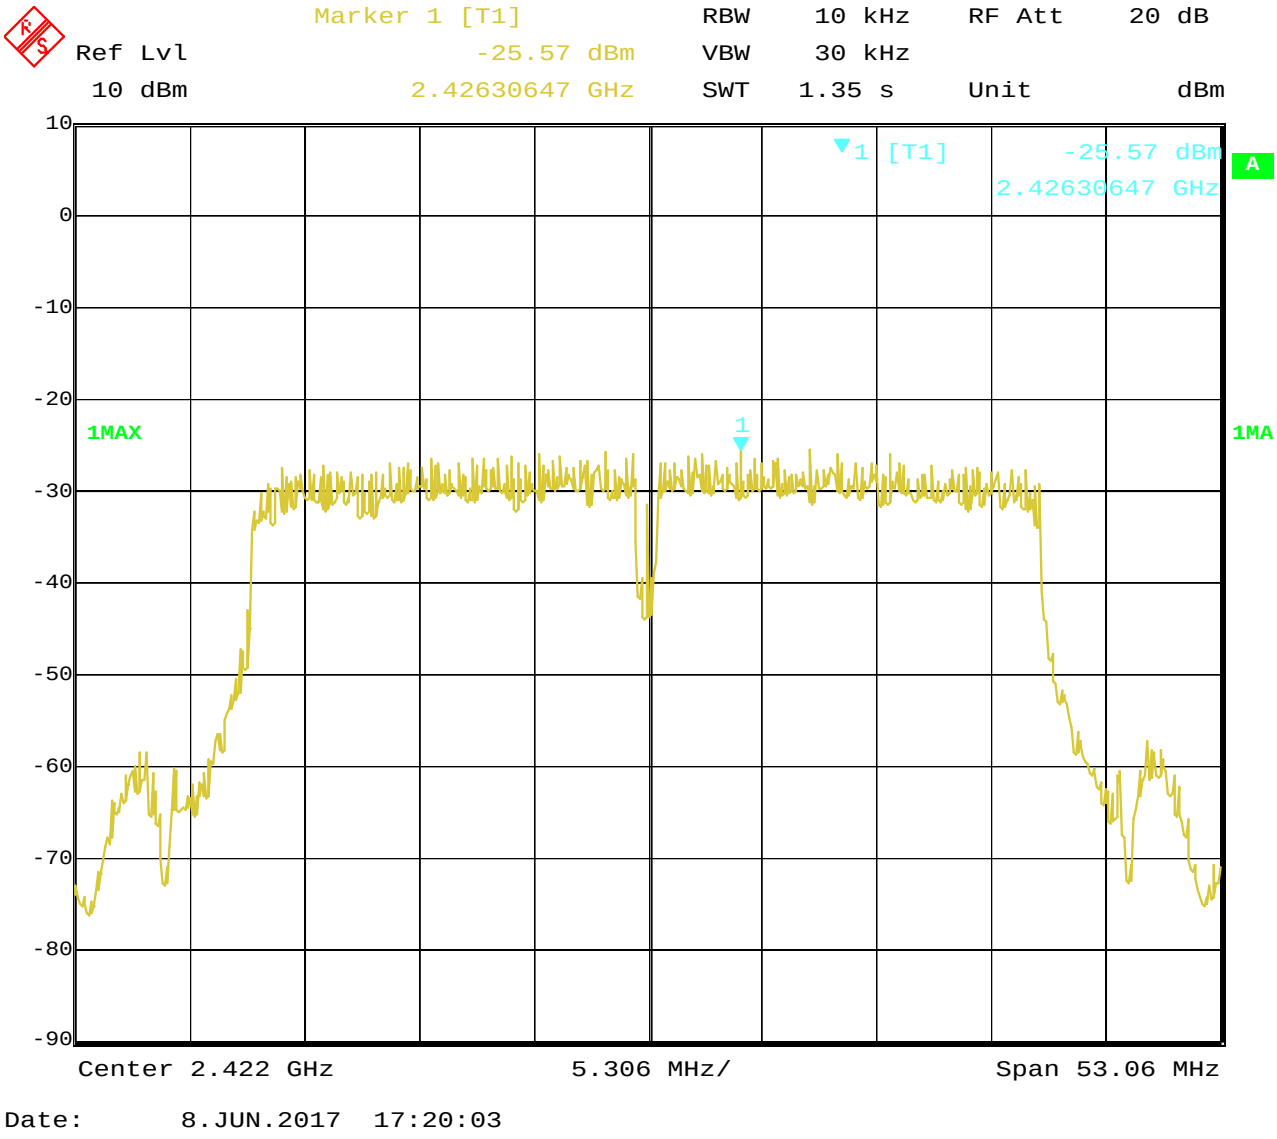

14. 802.11n at HT40 of CH04

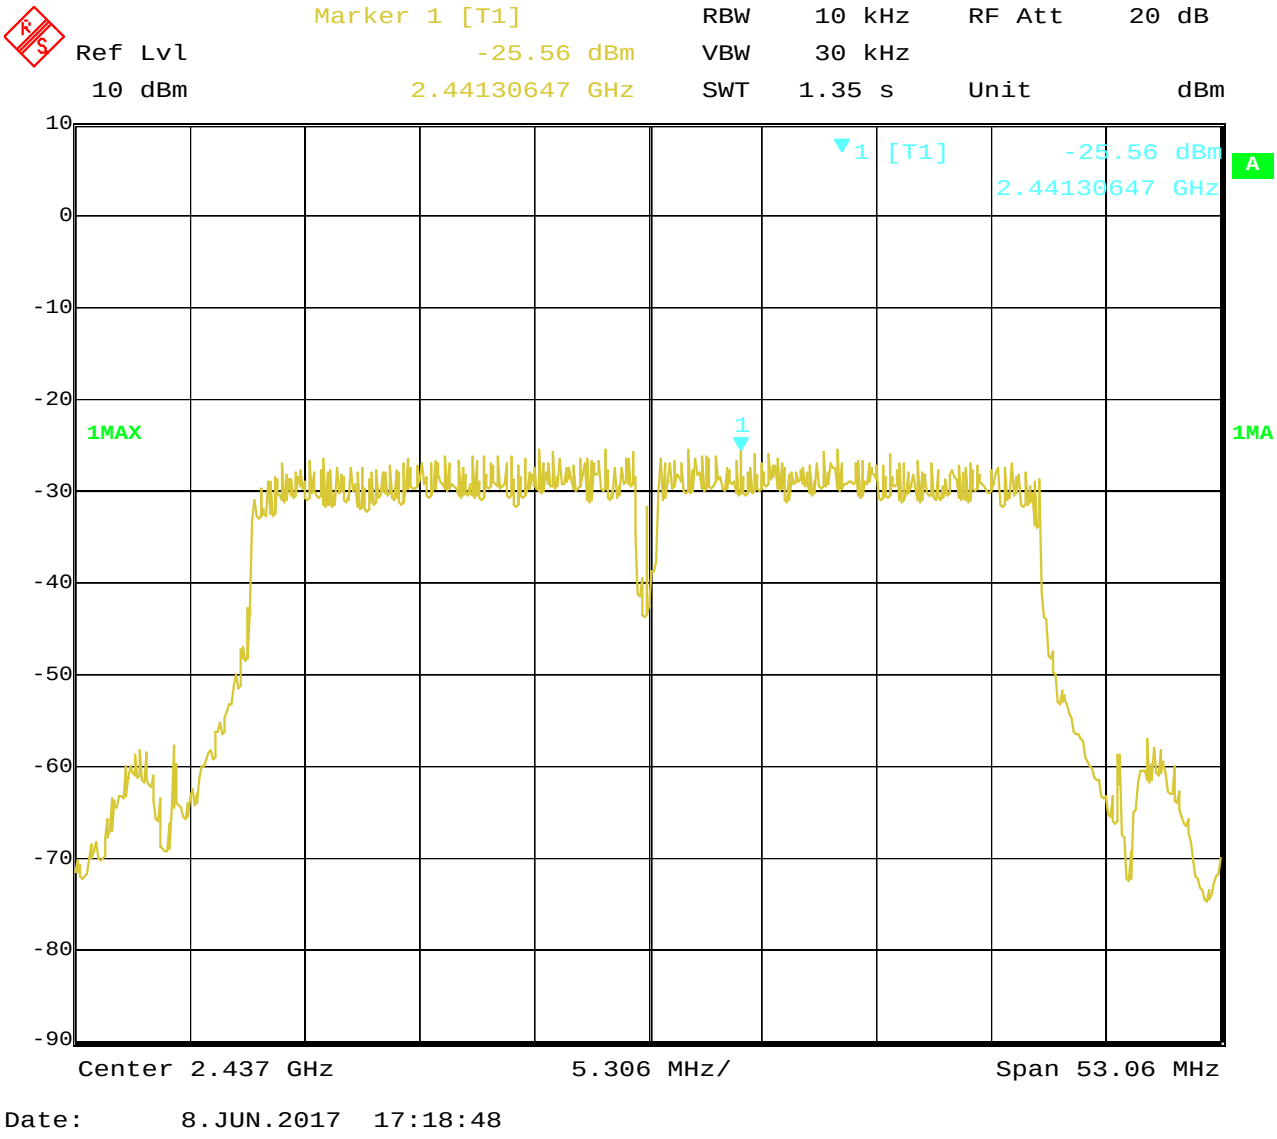

15. 802.11n at HT40 of CH07

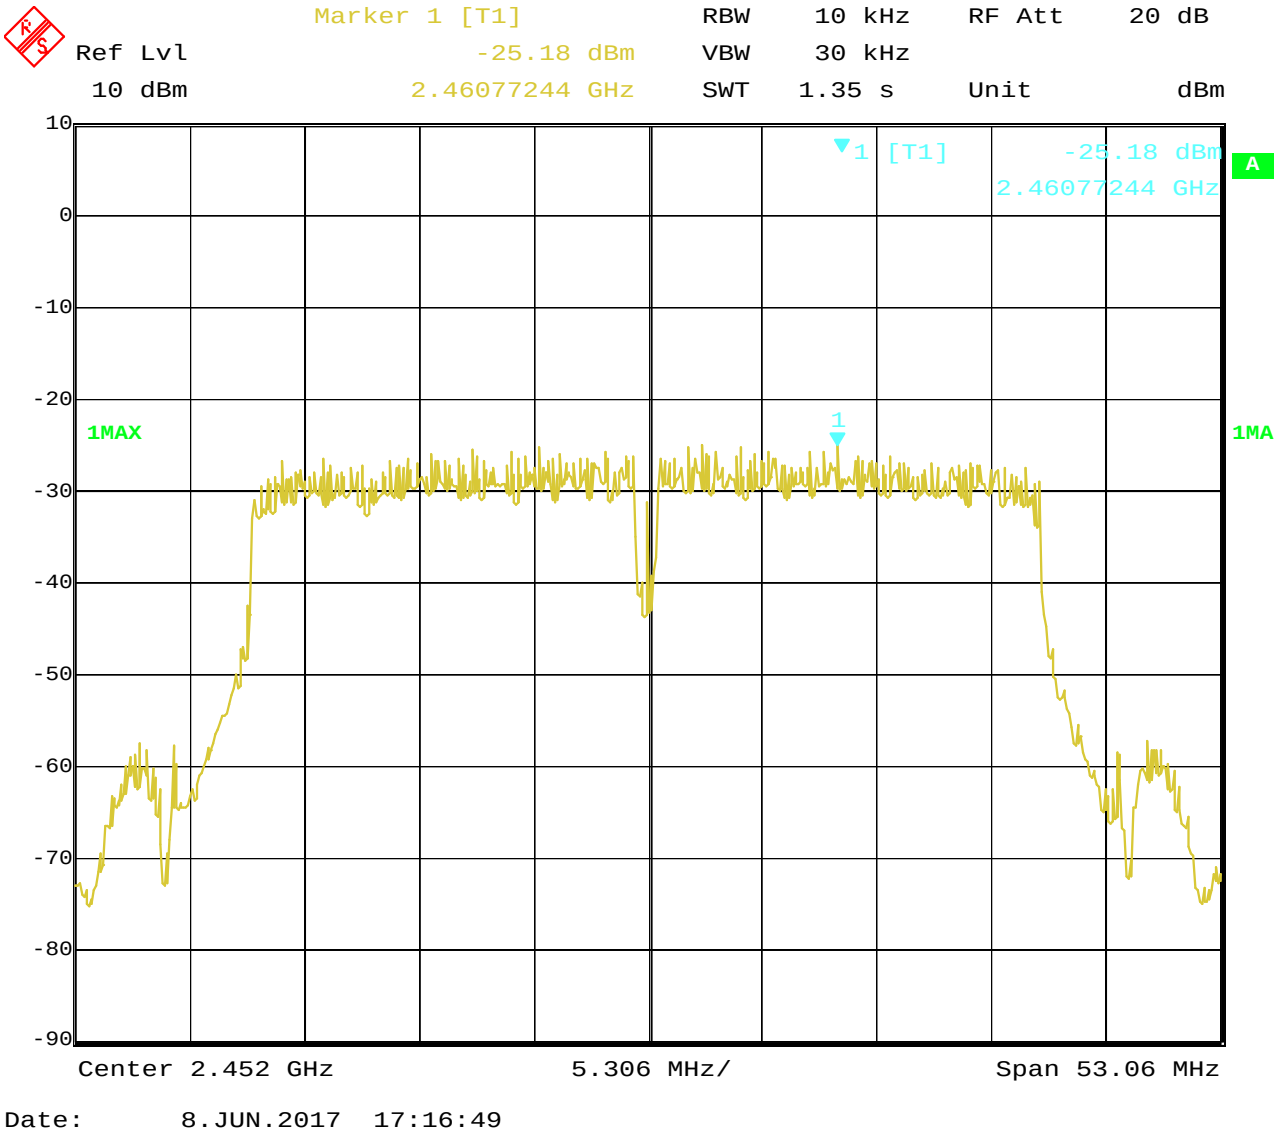

10 Out of Band Measurement

10.1 Test Setup for band edge

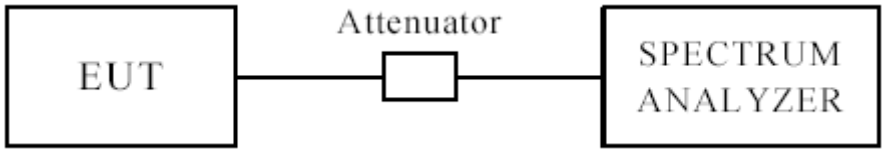

The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz Peak detector . A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. the worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Action camera		Model	CGX3
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBμV/m)	59.5	Limit	74(dBμV/m)
	AV (dBμV/m)	40.2		54(dBμV/m)
2390	PK (dBμV/m)	43.4	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

Test Figure:

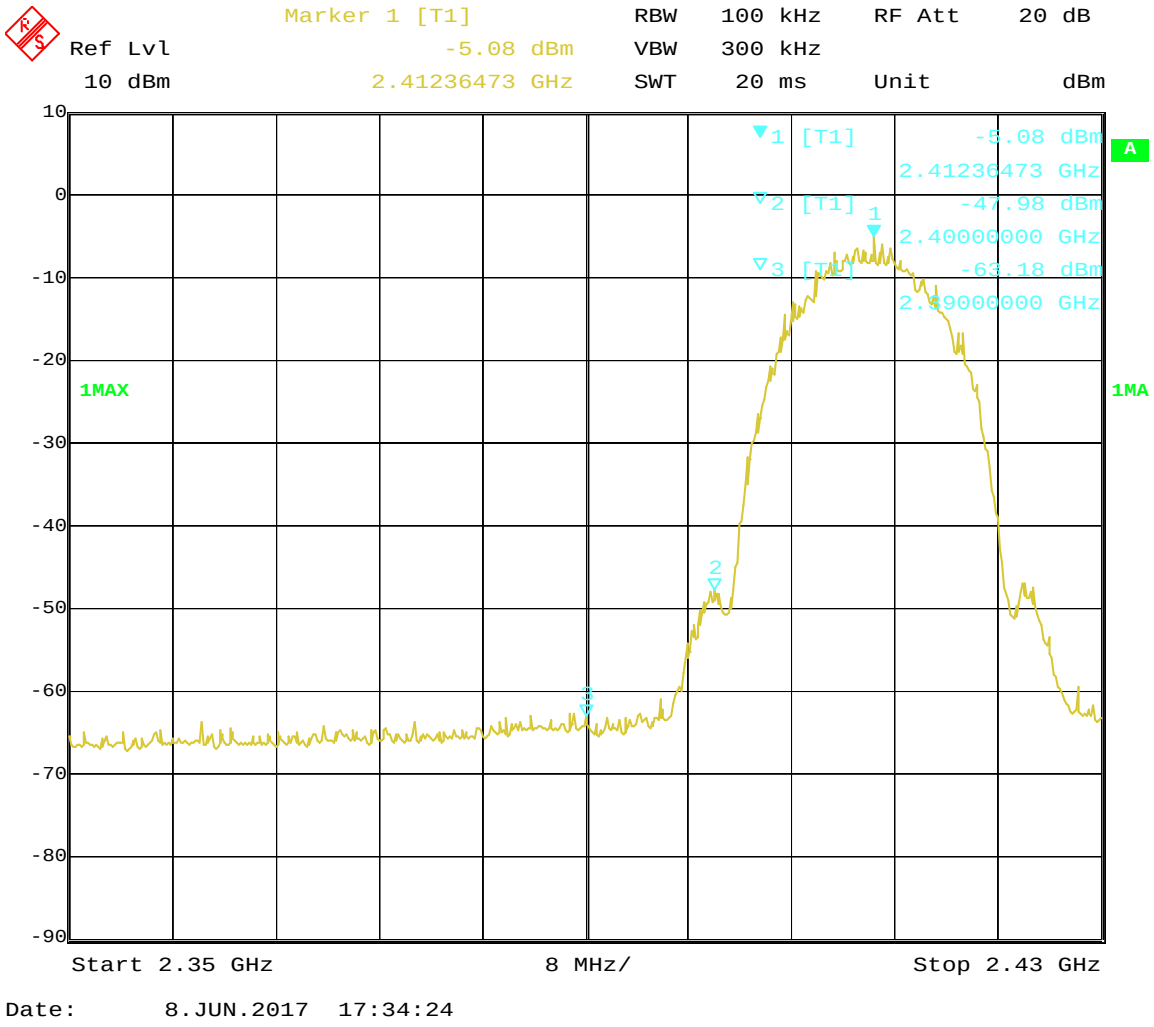

Note: The Max. FS in Restrict Band are measured in conventional method.

CH11 at 11Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Action camera		Model	CGX3
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	46.3	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

Test Figure:

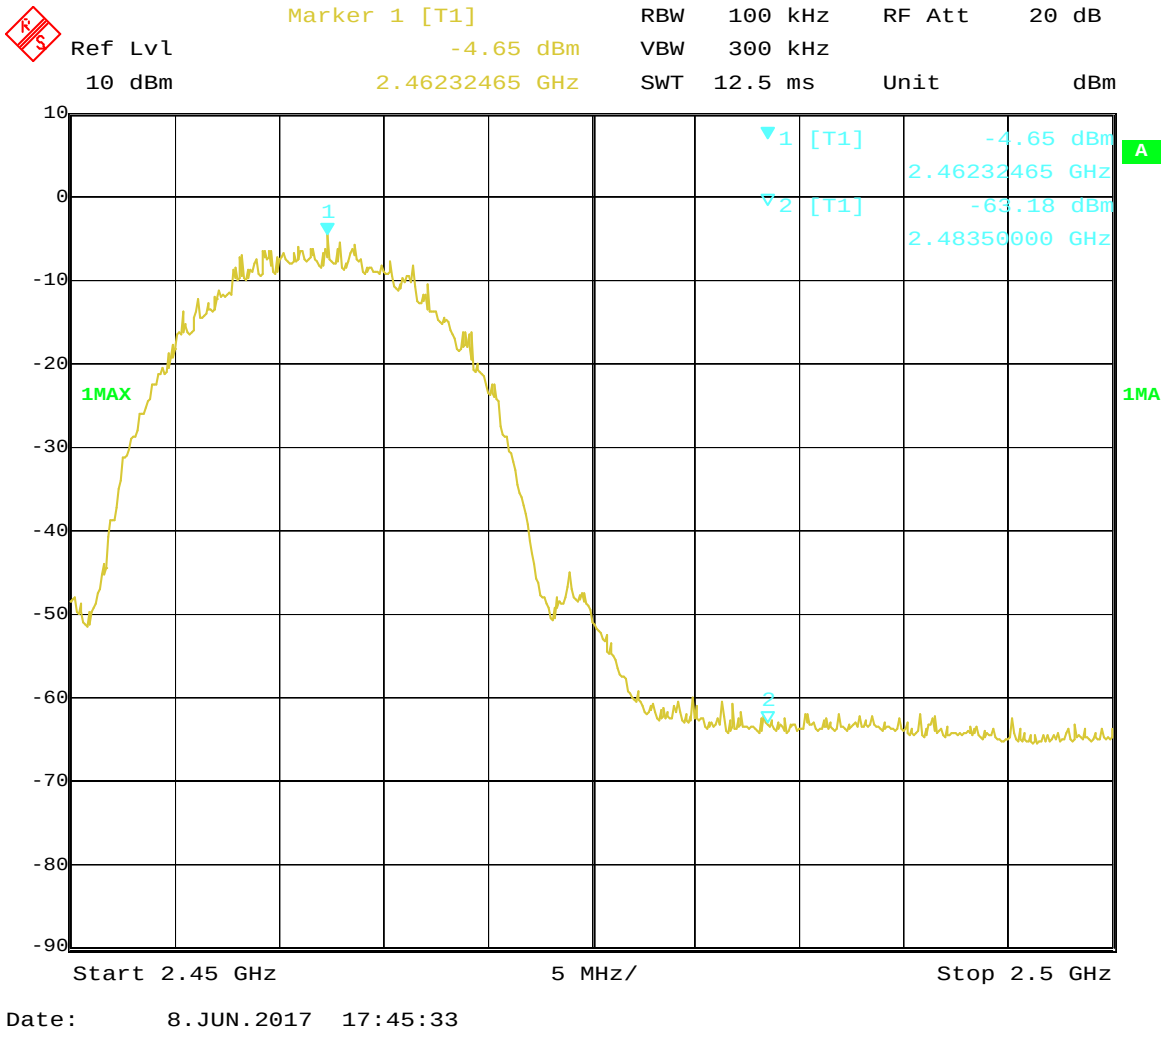

Note: The Max. FS in Restrict Band are measured in conventional method.

For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Action camera		Model	CGX3
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBμV/m)	58.6	Limit	74(dBμV/m)
	AV (dBμV/m)	39.3		54(dBμV/m)
2390	PK (dBμV/m)	42.1	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

Test Figure:

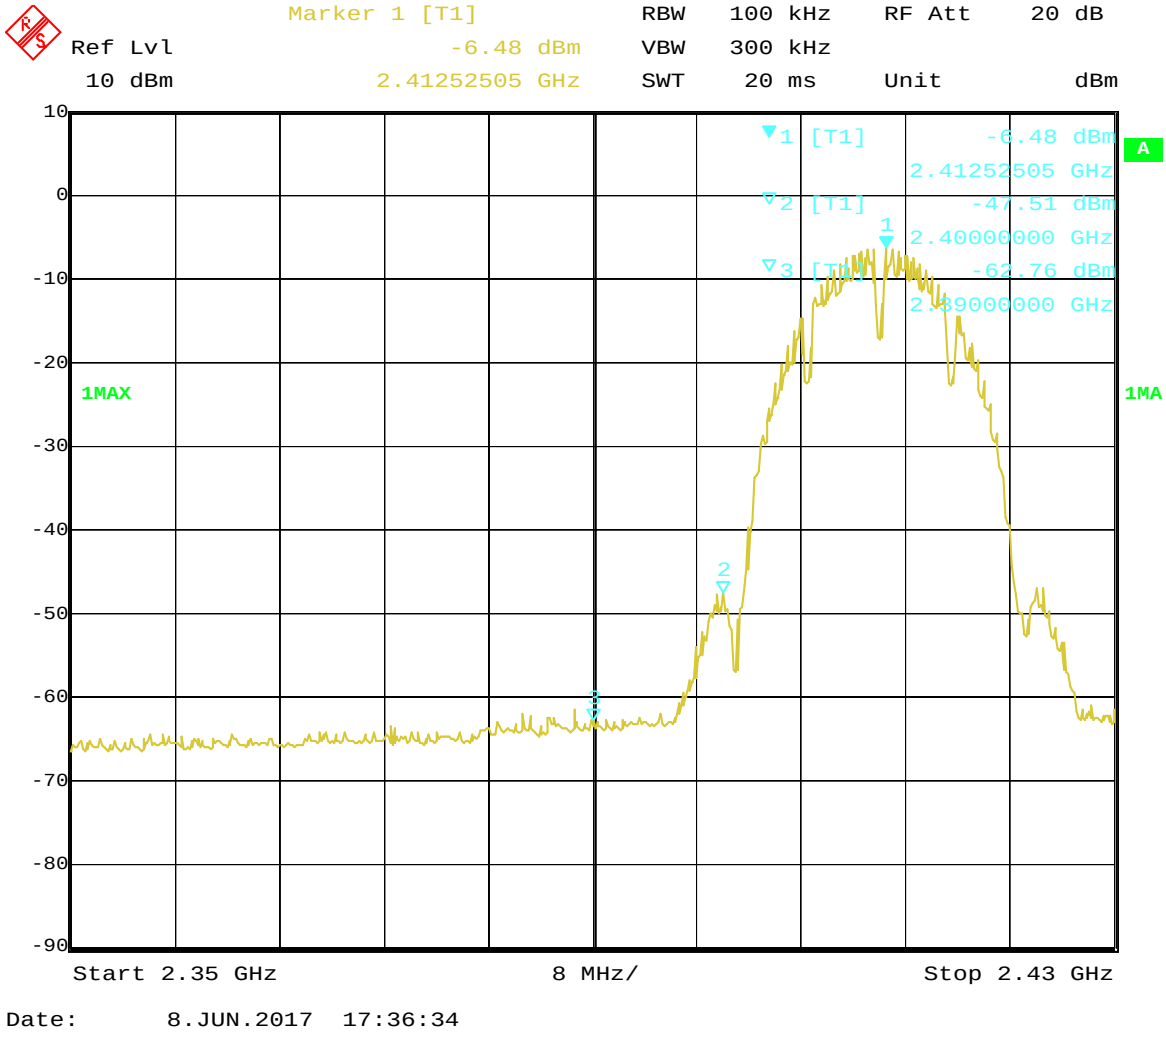

Note: The Max. FS in Restrict Band are measured in conventional method.

CH11 at 1Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Action camera		Model	CGX3
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	45.6	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

Test Figure:

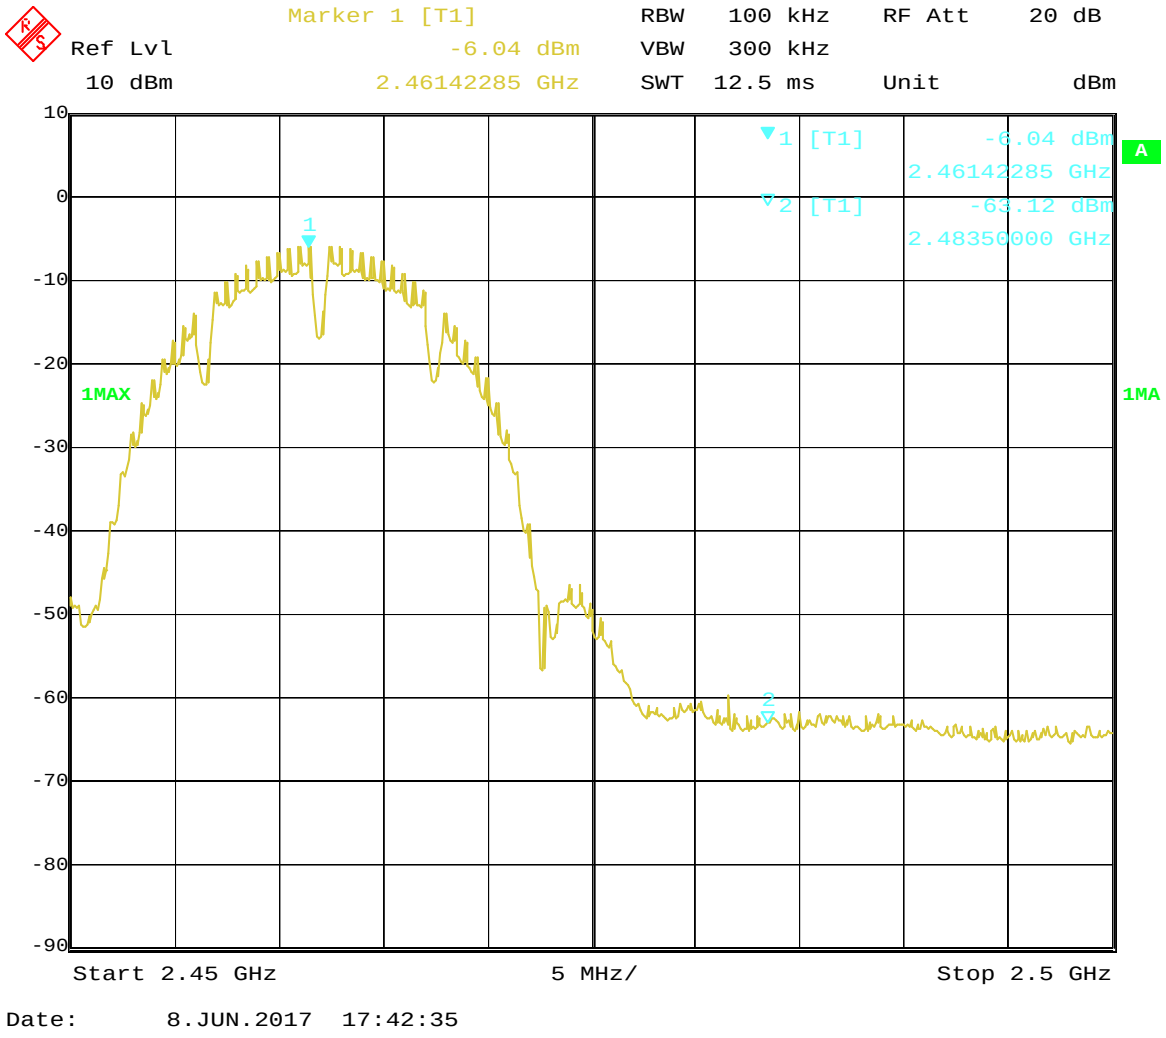

Note: The Max. FS in Restrict Band are measured in conventional method.

For 802.11g mode

CH01 at 54Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Action camera		Model	CGX3
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBμV/m)	62.2	Limit	74(dBμV/m)
	AV (dBμV/m)	41.4		54(dBμV/m)
2390	PK (dBμV/m)	46.8	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

Test Figure:

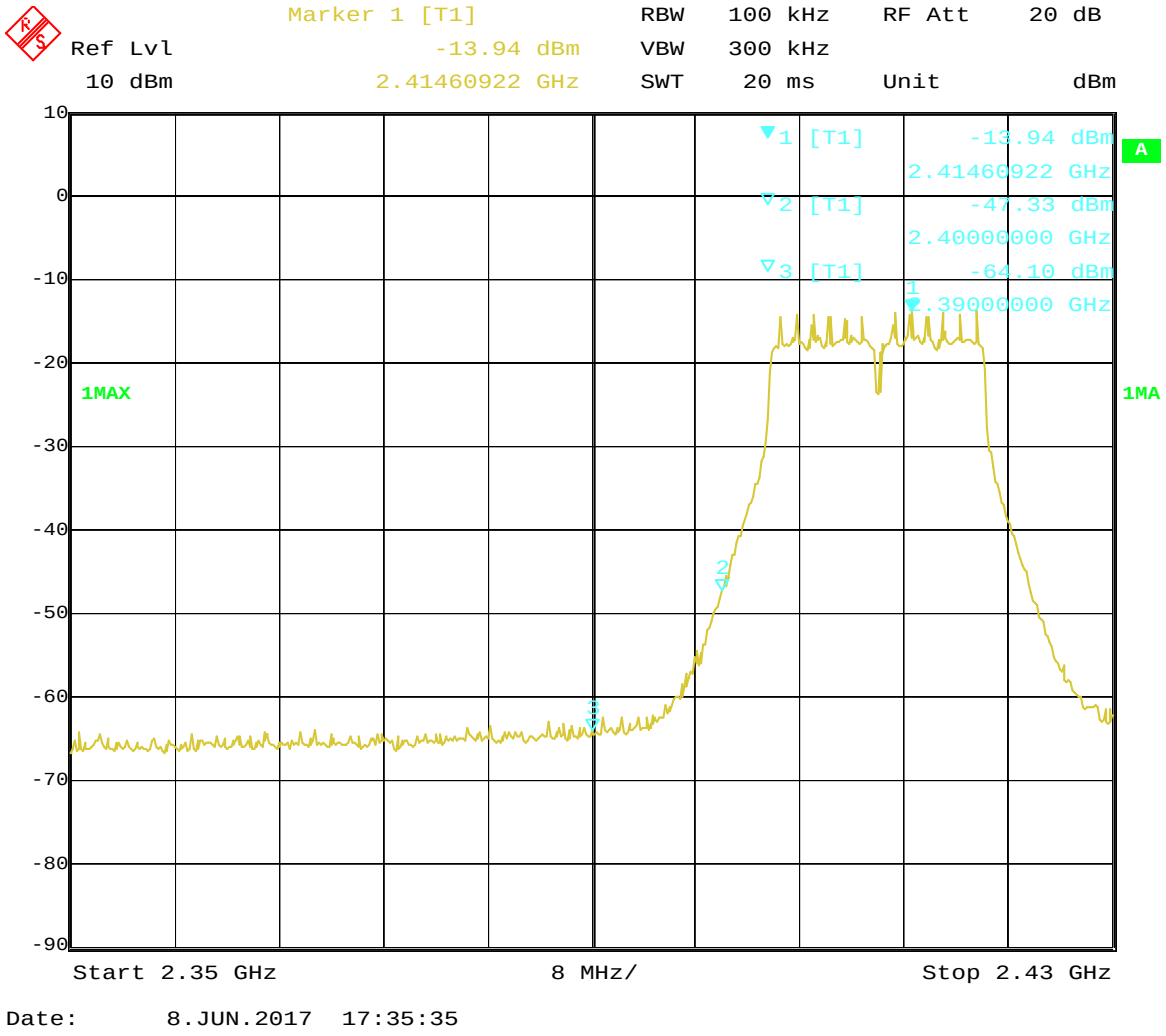

Note: The Max. FS in Restrict Band are measured in conventional method.

CH11 at 54Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Action camera		Model	CGX3
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	48.2	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

Test Figure:

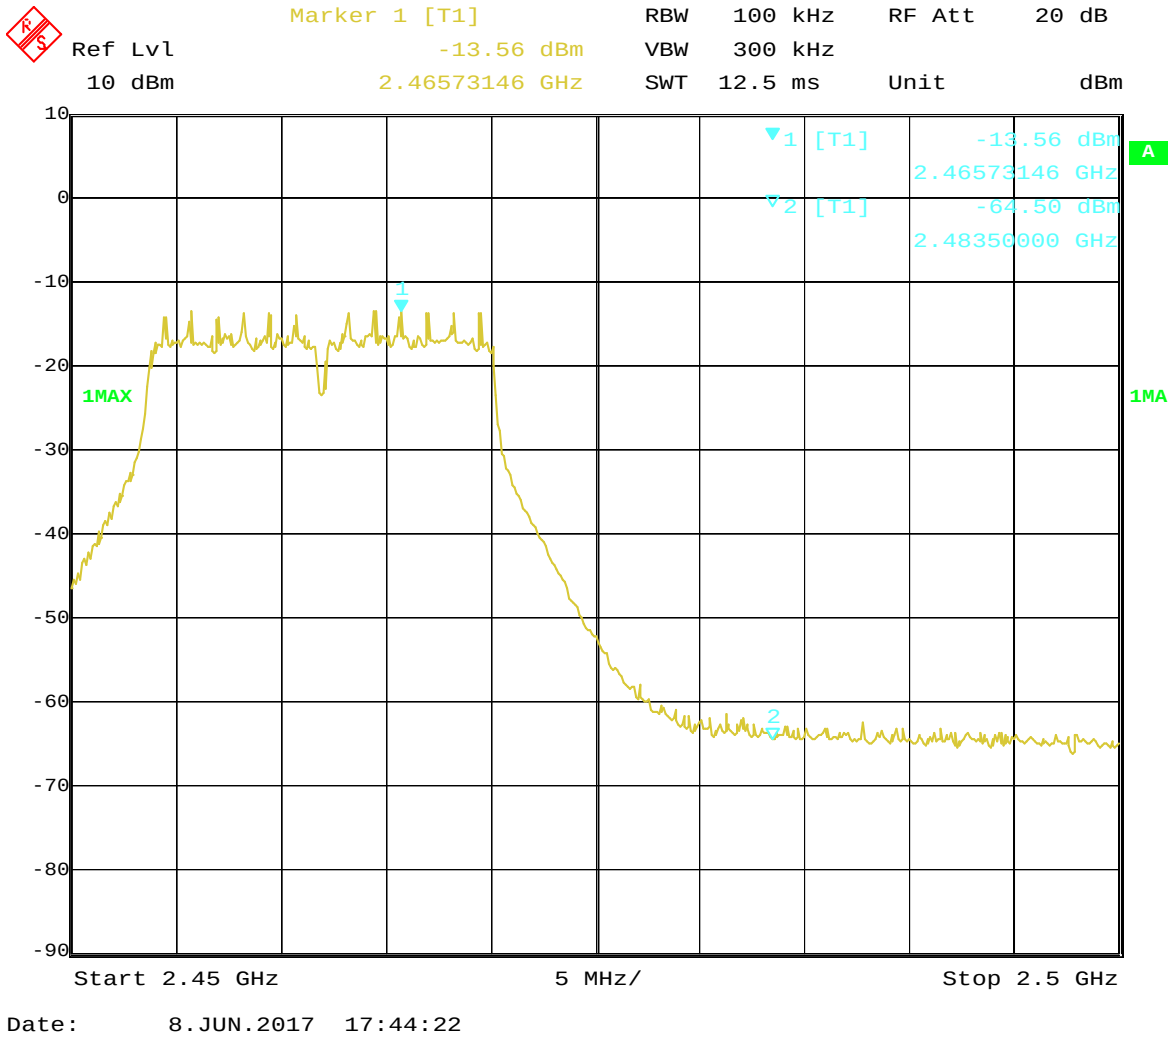

Note: The Max. FS in Restrict Band are measured in conventional method.

For 802.11n (HT20) mode

CH01 at 6.5Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Action camera		Model	CGX3
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBμV/m)	63.5	Limit	74(dBμV/m)
	AV (dBμV/m)	44.9		54(dBμV/m)
2390	PK (dBμV/m)	47.1	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

Test Figure:

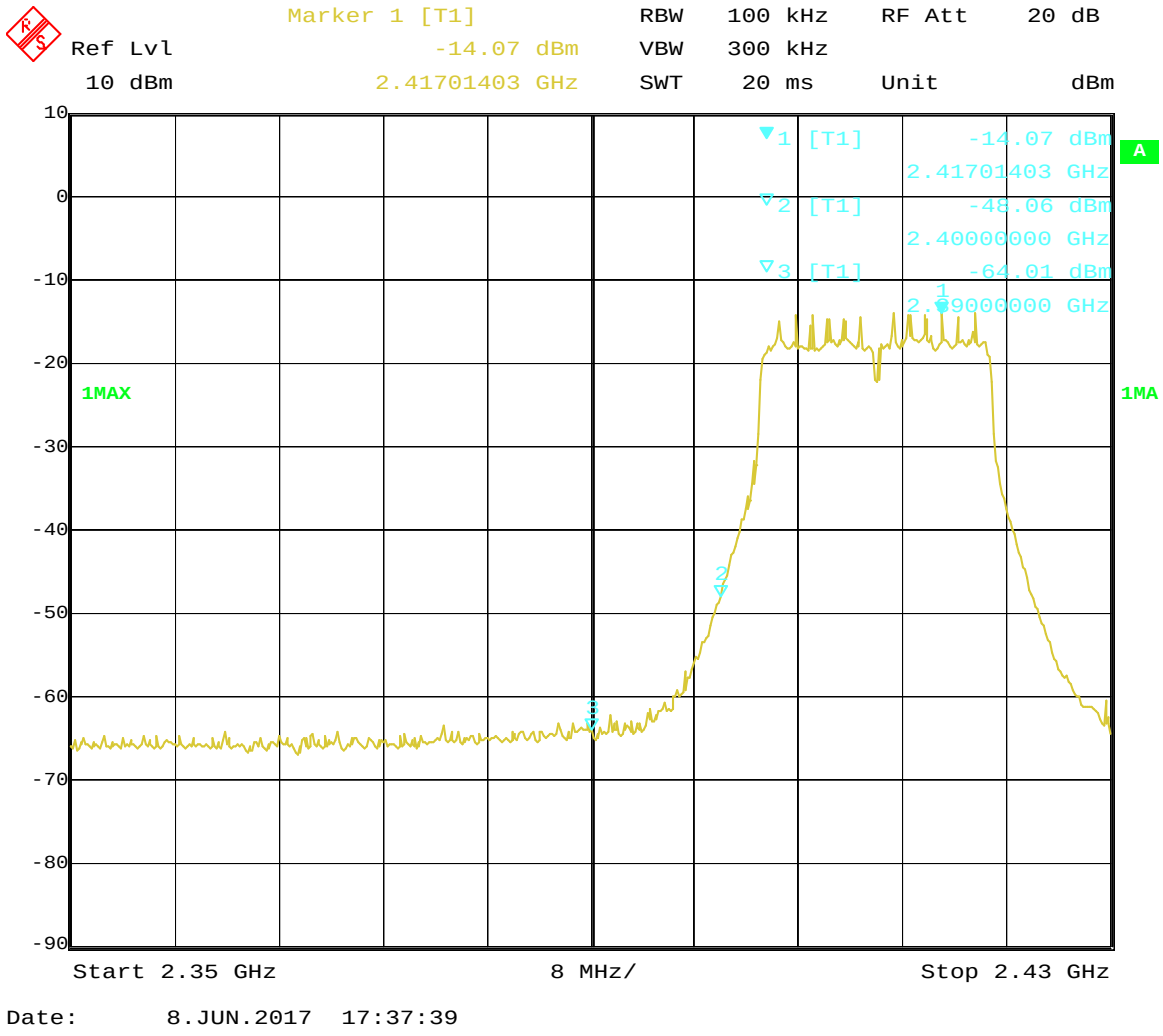

Note: The Max. FS in Restrict Band are measured in conventional method.

CH11 at 6.5Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Action camera		Model	CGX3
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	49.5	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

Test Figure:

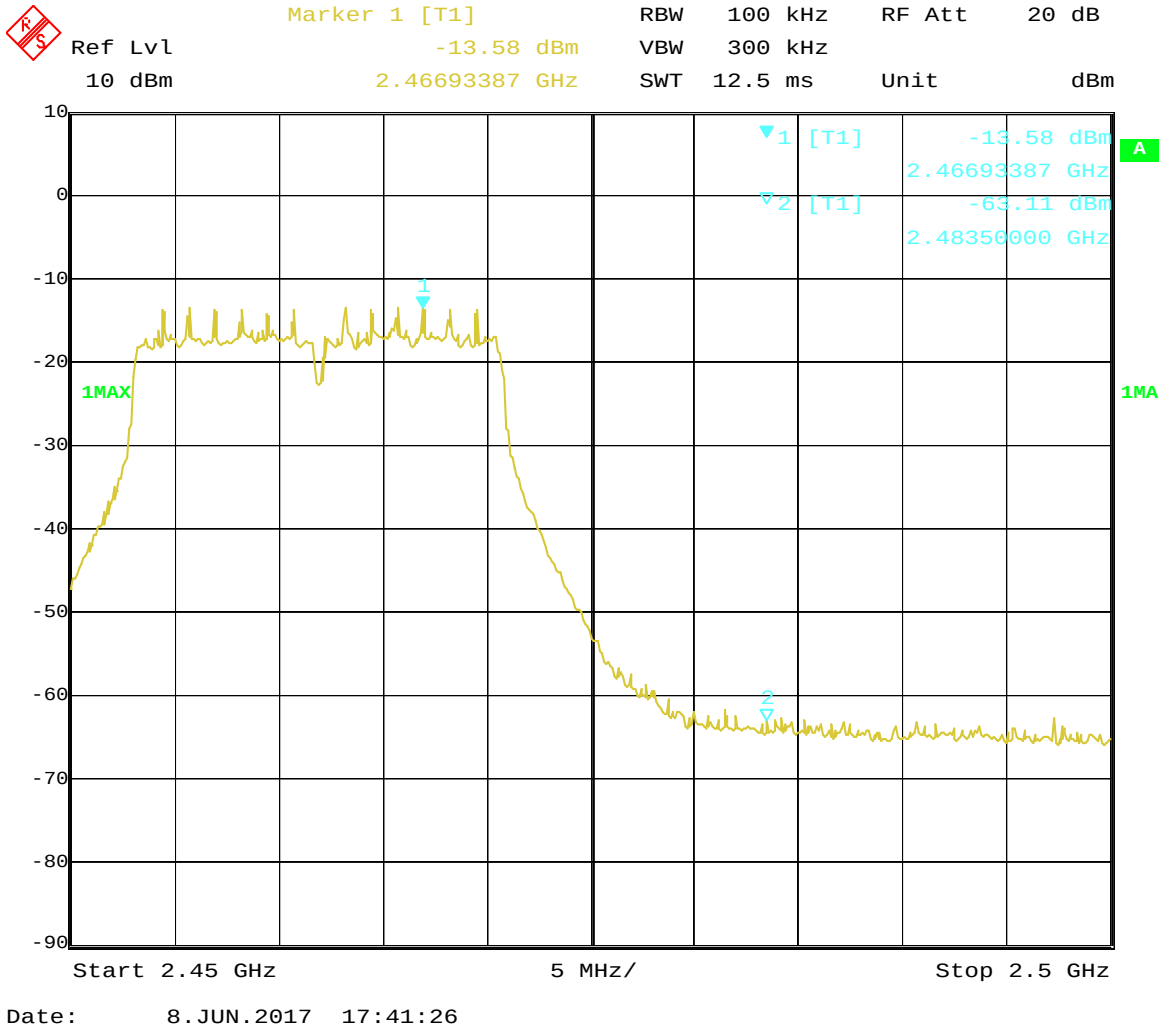

Note: The Max. FS in Restrict Band are measured in conventional method.

For 802.11n (HT40) mode

CH01 at 6.5Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Action camera		Model	CGX3
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBμV/m)	61.3	Limit	74(dBμV/m)
	AV (dBμV/m)	42.3		54(dBμV/m)
2390	PK (dBμV/m)	48.6	Limit	74(dBμV/m)
	AV (dBμV/m)	--		54(dBμV/m)

Test Figure:

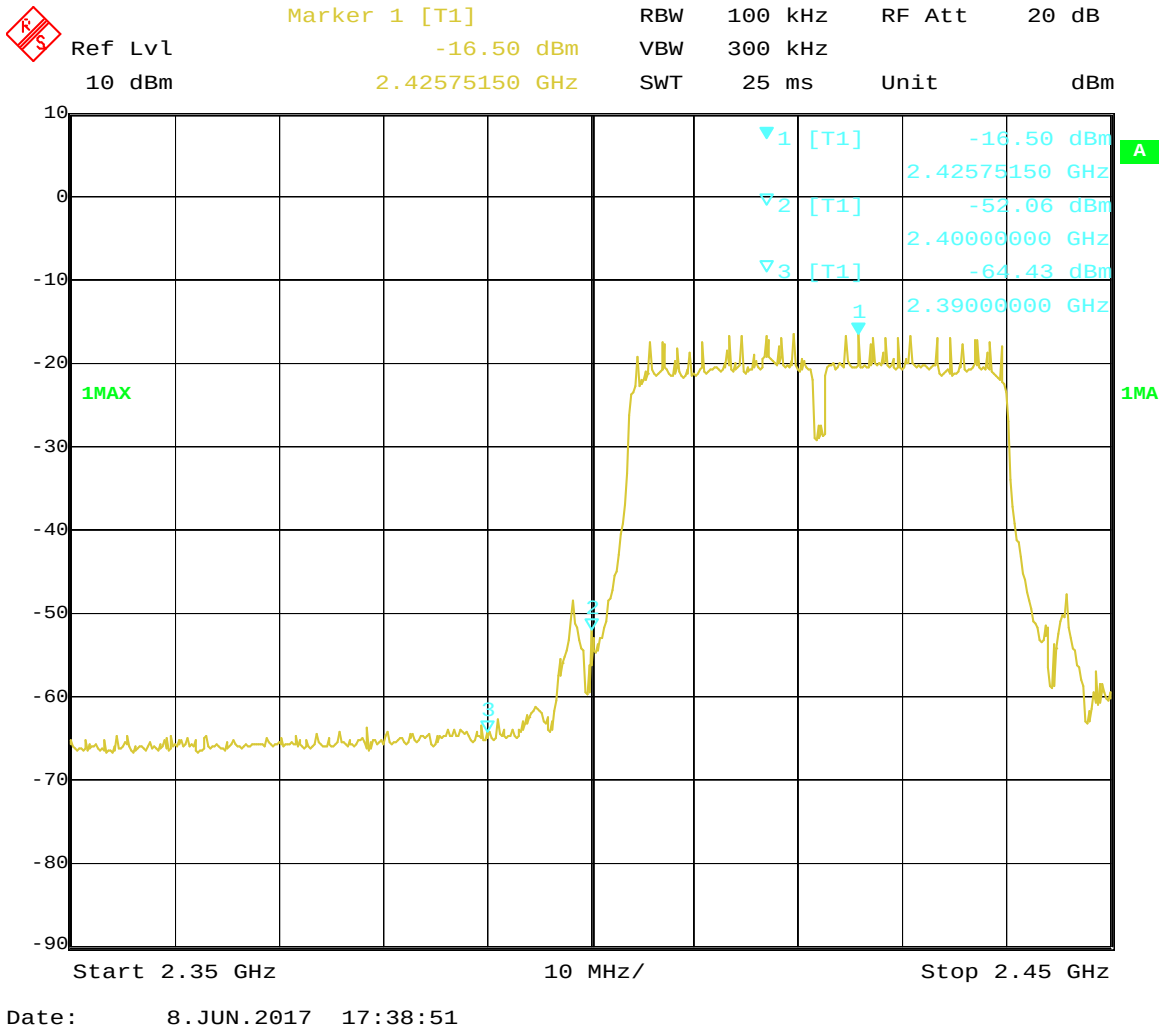

Note: The Max. FS in Restrict Band are measured in conventional method.

CH07 at 6.5Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Action camera		Model	CGX3
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	52.8	Limit	74(dBμV/m)
	AV (dBμV/m)	33.1		54(dBμV/m)

Test Figure:

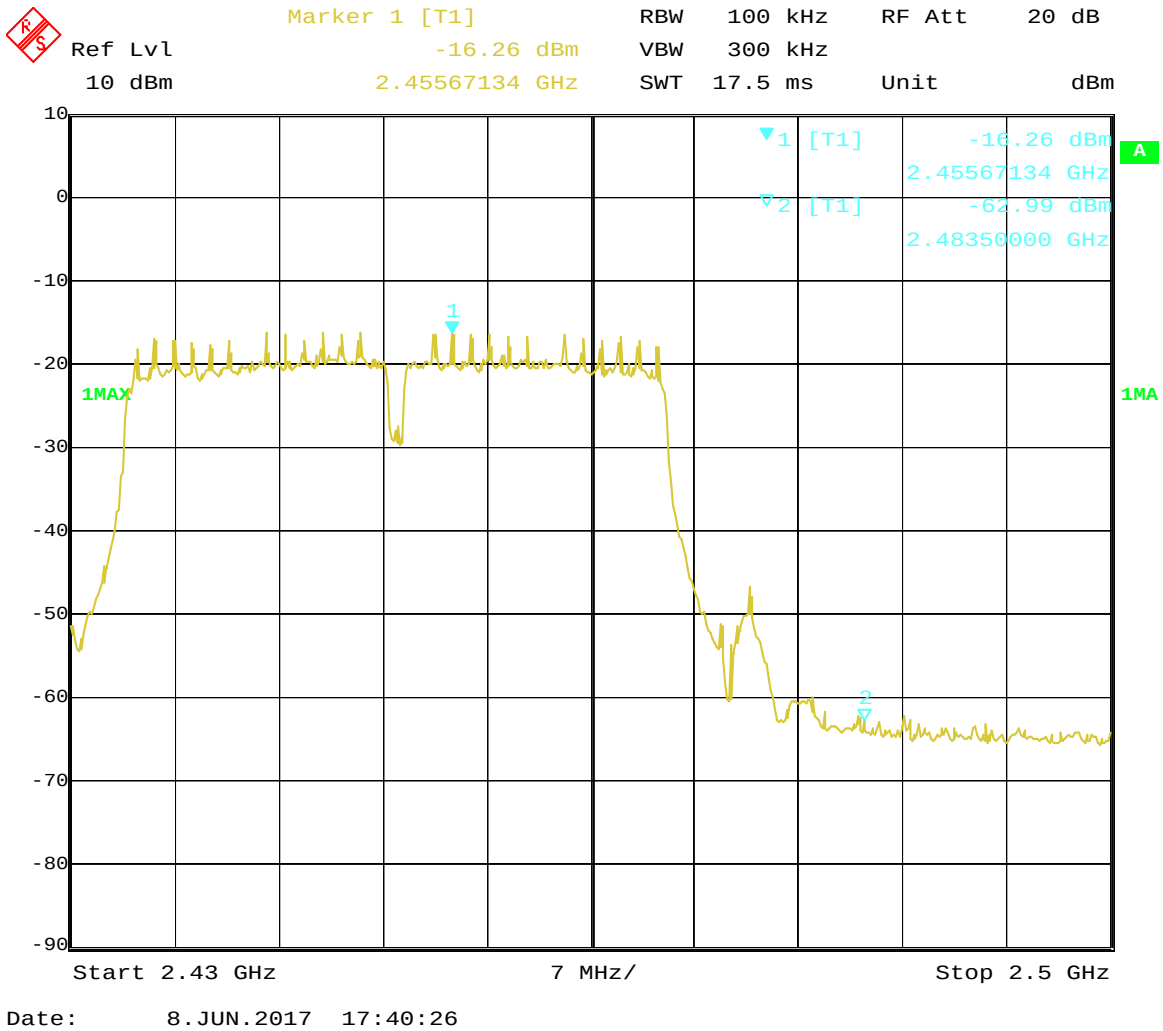

Note: The Max. FS in Restrict Band are measured in conventional method.

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The maximum Gain of the antennas is 0dBi.

12.0 FCC ID Label

FCC ID:2AI5C-CYCLOPSGEAR

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

13.0 Photo of testing

Conducted Emission Test Setup:

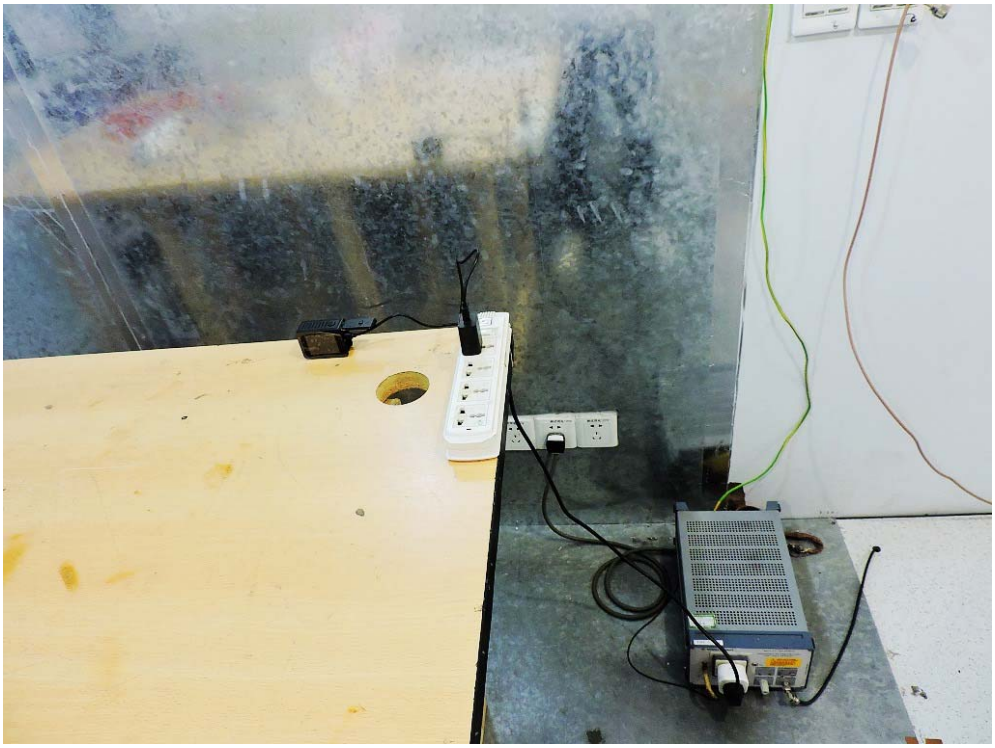

Radiated Emission Test Setup:

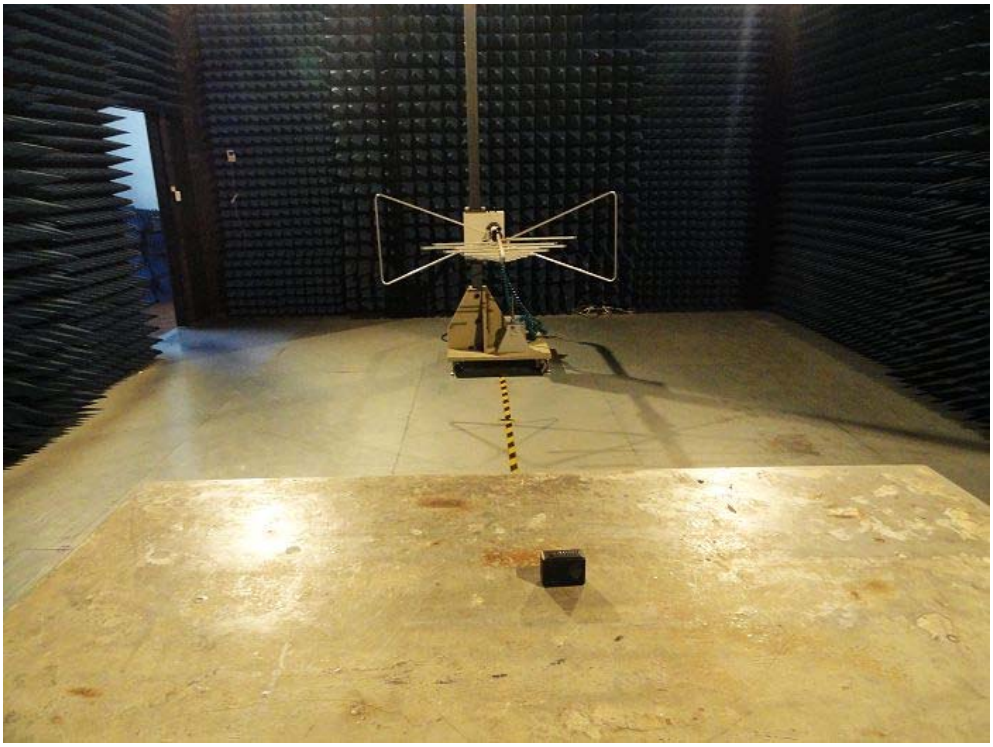

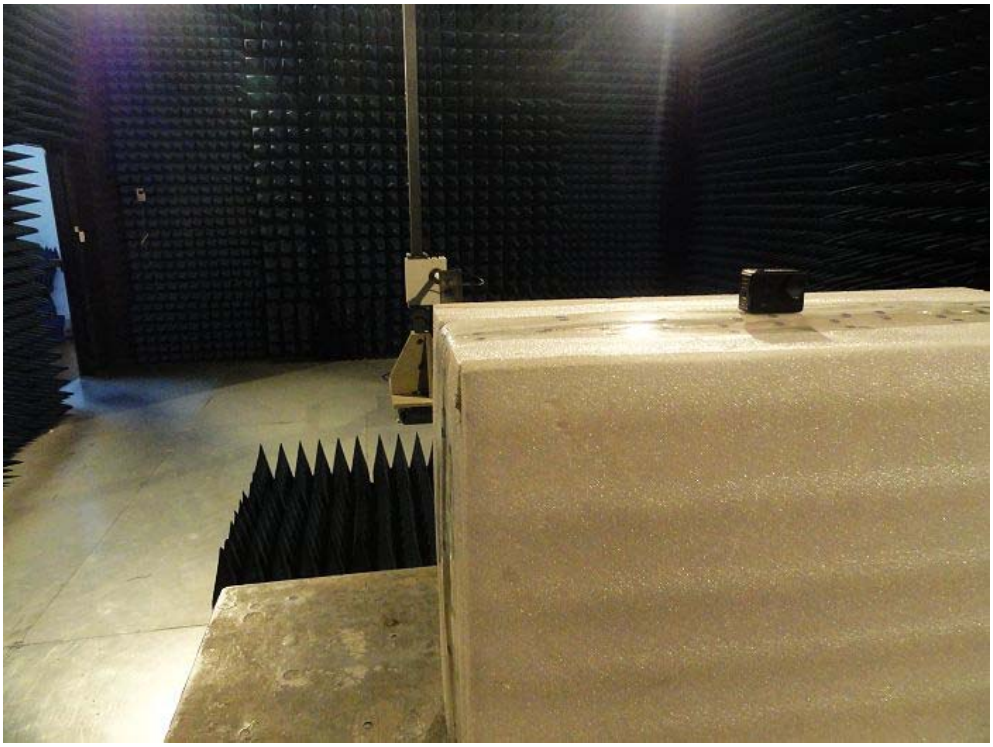

Photographs – EUT

Outside view

Outside view

Outside view

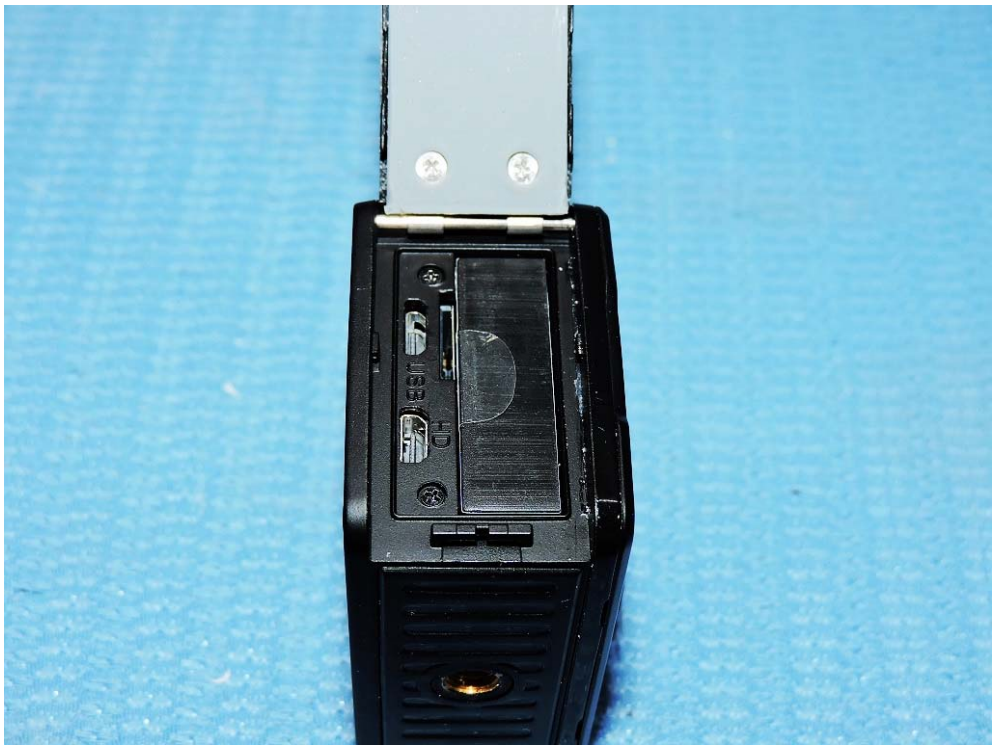

Inside view

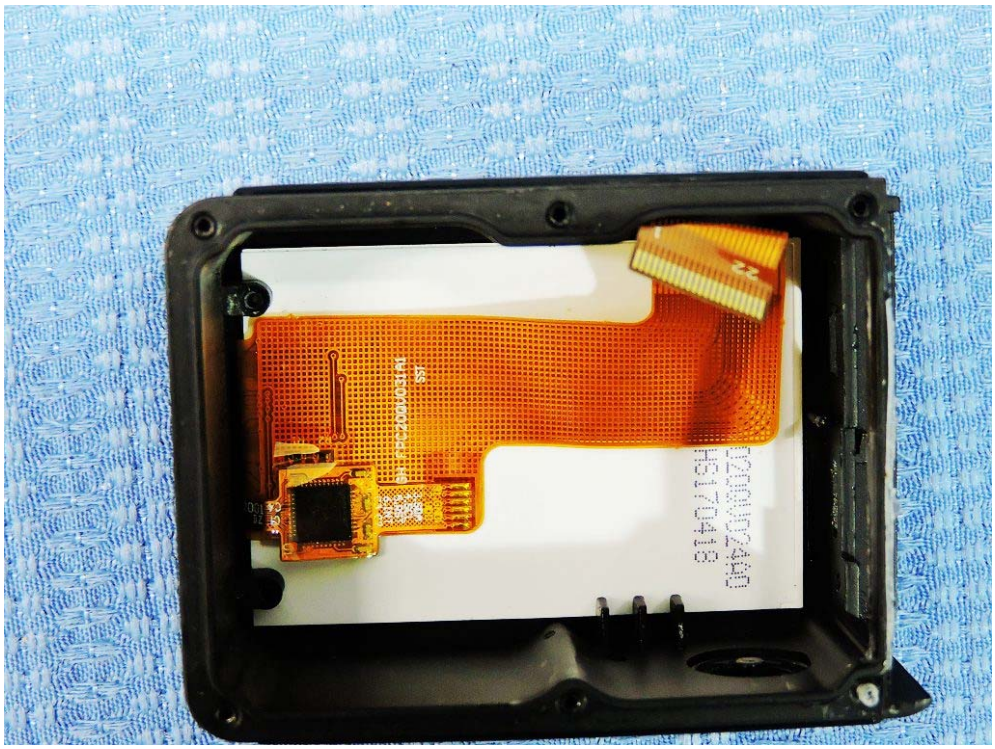

Inside view

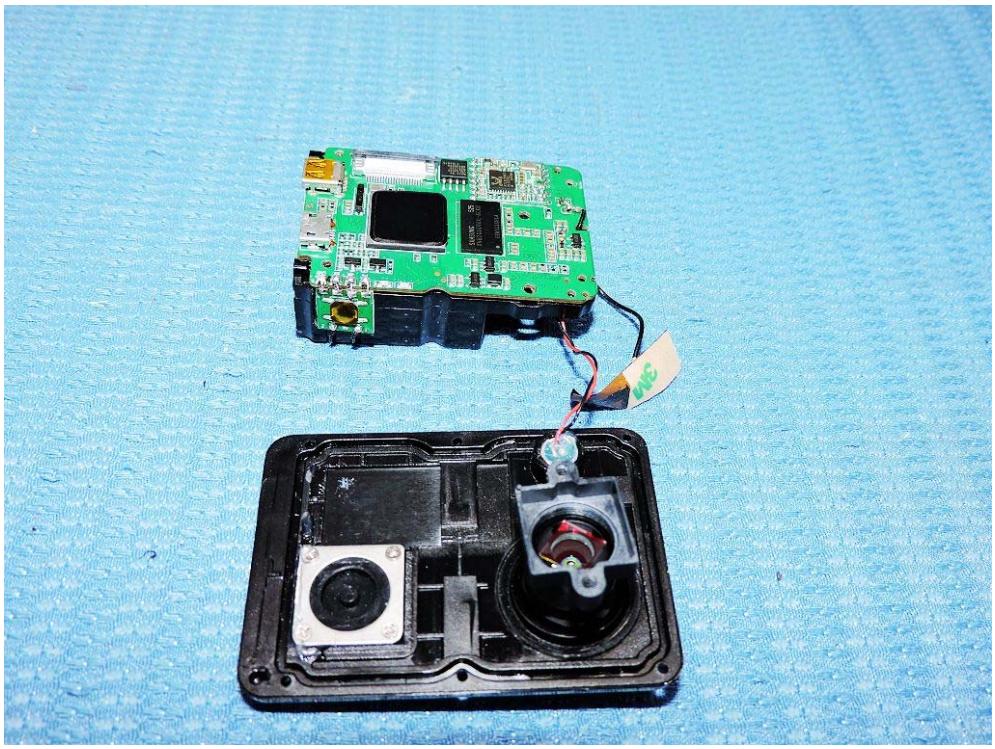

Inside view

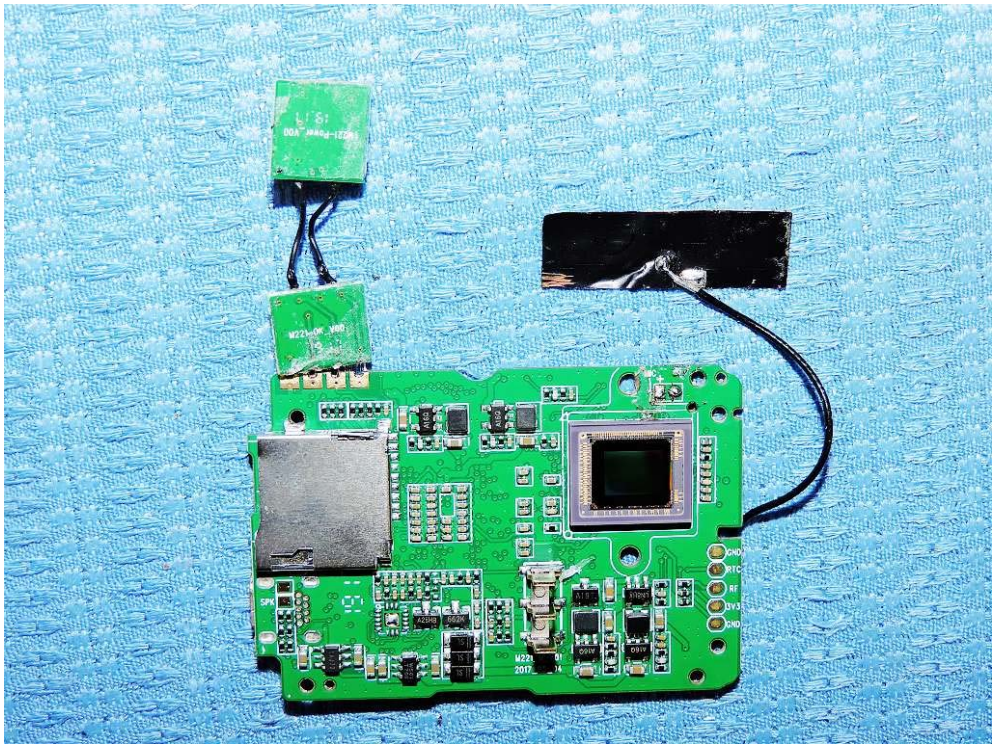

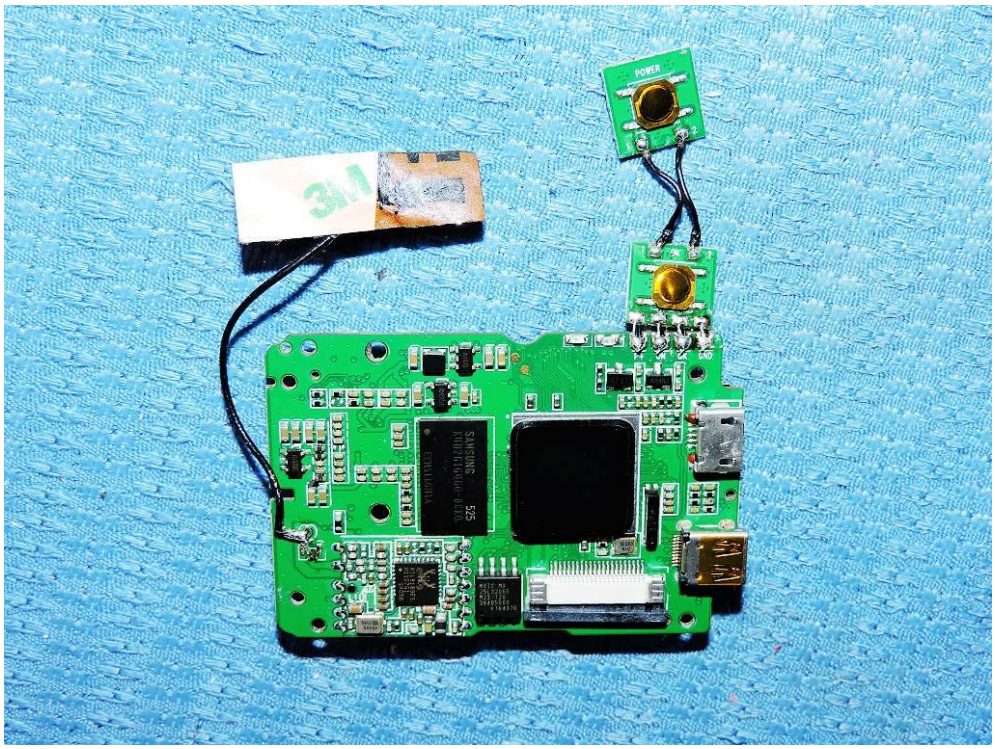

Inside view

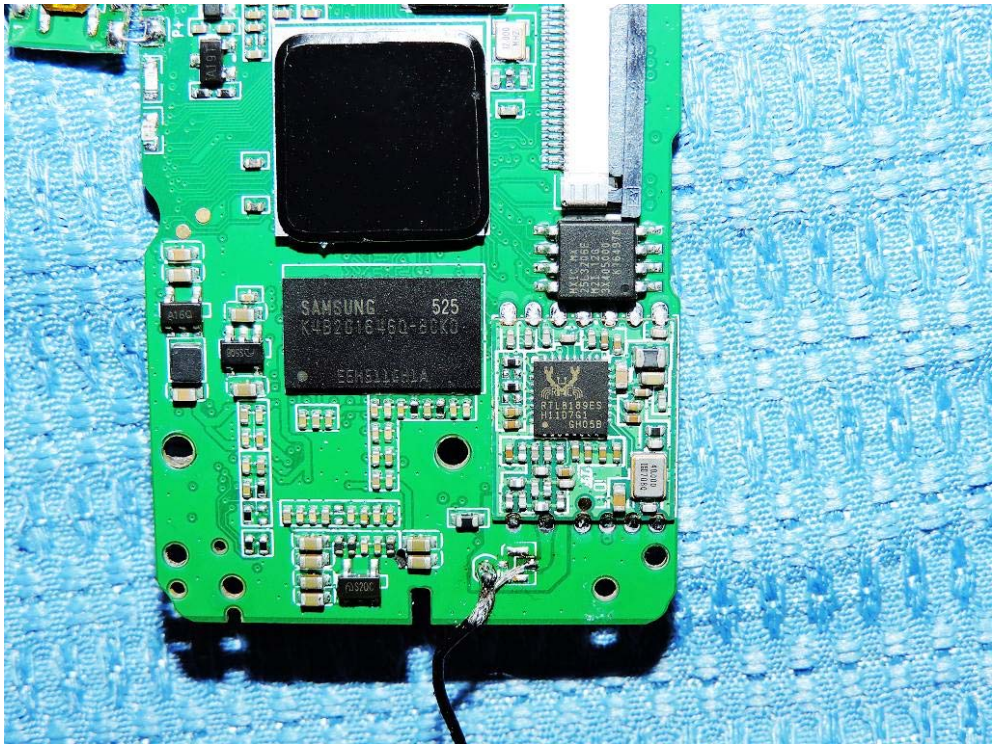

End of the report