

Date : 2017-05-09 Page 1 of 61 No. : DM127374

Applicant : Radiance Instruments Ltd.

Flat 2002, 20/F, CEO Tower, 77 Wing Hong Street Lai Chi Kok,

Kowloon, Hong Kong, China

Supplier / Manufacturer : Radiance Instruments Ltd.

Da Jing Village, Si Jiao Lou, Luo Yang Town, Hui Zhou City, China

Description of Sample(s) : Submitted sample(s) said to be

Product: SMOKE GATEWAY

Brand Name: N/A

Model No.: TMW017G

FCC ID: 2AI67-TMW017G

Date Samples Received : 2017-04-27

Date Tested : 2017-05-03 to 2017-05-08

Investigation Requested : Perform ElectroMagnetic Interference measurement in accordance

with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 and

ANSI C63.10:2013 for FCC Certification.

Conclusions: The submitted product <u>COMPLIED</u> with the requirements of Federal

Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described

above and on Section 2.2 in this Test Report.

Remarks : WIFI (802.11b, 802.11g, 802.11n20)





Date: 2017-05-09 Page 2 of 61 No. : DM127374 **CONTENT:** Cover Page 1 of 61 Content Page 2 of 61 <u>1.0</u> **General Details** 1.1 Page 3 of 61 **Test Laboratory** 1.2 Equipment Under Test [EUT] Page 3 of 61 Description of EUT operation 1.3 Date of Order Page 3 of 61 Page 3 of 61 1.4 Submitted Sample(s) Page 3 of 61 1.5 **Test Duration** 1.6 Country of Origin Page 3 of 61 **Technical Details** 2.0 2.1 Investigations Requested Page 4 of 61 2.2 Test Standards and Results Summary Page 4 of 61 <u>3.0</u> **Test Results** 3.1 Emission Page 5-56 of 61 Appendix A Page 57 of 61 List of Measurement Equipment Appendix B Page 58-61 of 61 Photograph(s) of Product



Date : 2017-05-09 Page 3 of 61

No. : DM127374

1.0 General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited

EMC Laboratory

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China

Telephone: (86 769) 81119888 Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT]

Description of Sample(s)

Product: SMOKE GATEWAY
Manufacturer: Radiance Instruments Ltd.

Da Jing Village, Si Jiao Lou, Luo Yang Town, Hui Zhou City,

China

Brand Name: N/A
Model Number: TMW017G

Rating: Input: 100-240Va.c. 50/60Hz 0.3A;

Output: 5Vd.c. 500mA.

The AC/DC adaptor was provided by the applicant with following details:

Brand name: N/A; Model no.: XS-0500500U

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is an SMOKE GATEWAY. The transmission signal is digital modulated with channel frequency range 2412-2462MHz.

1.3 Date of Order

2017-04-27

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2017-05-03 to 2017-05-08

1.6 Country of Origin

China



Date : 2017-05-09 Page 4 of 61 No. : DM127374

<u>2.0</u> Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10:2013 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary										
Test Condition	Test Requirement	Test Method	Class /	Т	est Result					
			Severity	Pass	Failed	N/A				
Output Power of Fundamental Emissions	FCC 47CFR 15.247(b)(3)	ANSI C63.10:2013	N/A							
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.10:2013	N/A	\boxtimes						
Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10:2013	N/A	\boxtimes						
Power Spectral Density	FCC 47CFR 15.247(e)	N/A	N/A	\boxtimes						
6dB Bandwidth	FCC 47CFR 15.247(a)(2)	N/A	N/A	\boxtimes						
Band Edge Emissions	FCC 47CFR 15.247(d)	N/A	N/A	\boxtimes						
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	\boxtimes						

Note: N/A - Not Applicable



Date : 2017-05-09 Page 5 of 61

No. : DM127374

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Output Power

Test Requirement: FCC 47CFR 15.247(b)(3)


Test Method: N/A

Test Date: 2017-05-03 Mode of Operation: Wifi mode

Test Method:

The RF output of the EUT was connected to the peak power meter. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in mW.

Test Setup:

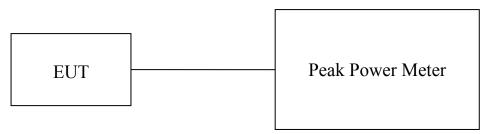

Note: a temporary antenna connector was soldered to the RF output.



Date : 2017-05-09 Page 6 of 61 No. : DM127374

Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt (30dBm)

Results of WiFi mode 802.11 b, (2412MHz to 2462MHz) : Pass (TX Unit) Maximum conducted output power						
Channel Frequency(MHz) Output Power(War						
Low	2412	0.03048				
Middle 2437 0.03631						
High	2462	0.03013				

Results of WiFi mode 802.11 g, (2412MHz to 2462MHz) : Pass (TX Unit) Maximum conducted output power								
Channel Frequency(MHz) Output Power(W								
Low	2412	0.03784						
Middle	Middle 2437 0.04808							
High	2462	0.03483						

Results of WiFi mode 802.11 n20, (2412MHz to 2462MHz) : Pass (TX Unit) Maximum conducted output power						
Channel	Output Power(Watt)					
Low	2412	0.03508				
Middle	2437	0.04688				
High	2462	0.03518				

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB 1GHz to 26GHz 1.7dB



Date : 2017-05-09 Page 7 of 61 No. : DM127374

3.1.2 Radiated Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.10:2013

Test Date: 2017-04-28

Mode of Operation: Tx mode / Wifi mode

Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the G/F of "STC (Dongguan) Company Limited" with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.



Date: 2017-05-09 Page 8 of 61 No. : DM127374

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

RBW: 120kHz 30MHz - 1GHz (QP)

> VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Max. hold Trace:

RBW: 1MHz Above 1GHz (Pk)

> VBW: 1MHz Auto Sweep:

Span: Fully capture the emissions being measured

Trace: Max. hold


RBW: Above 1GHz (Av) 1MHz

VBW: 10Hz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Test Setup:

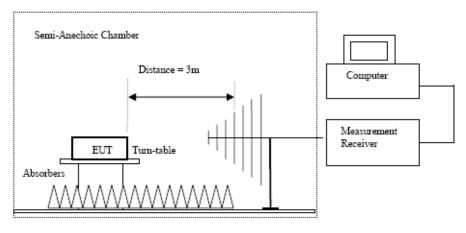

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
 Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz hom antennas are used, 9kHz to 30MHz loop antennas are used.

STC (Dongguan) Company Limited



Date : 2017-05-09 Page 9 of 61 No. : DM127374

Limits for Radiated Emissions FCC 47 CFR 15.247]:

Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2412.0 MHz) (802.11b) (9kHz - 30MHz): Pass

Result of 14 mode (2-12:0 Mills) (002:115) (7Mils 50Mils). 1 dss							
Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
	Emissions detected are more than 20 dB below the FCC Limits						

Result of Wifi mode (2412.0 MHz) (802.11b) (1GHz-25GHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	$dB\mu V$	dB/m	dBμV/m	dBμV/m	dB				
4824.0	15.0	41.5	56.5	74.0	17.5	Vertical			
4824.0	13.1	42.4	55.5	74.0	18.5	Horizontal			
7236.0	10.7	45.1	55.8	74.0	18.2	Vertical			
7236.0	8.9	46.2	55.1	74.0	18.9	Horizontal			
9648.0	7.8	48	55.8	74.0	18.2	Vertical			
9648.0	5.8	48.8	54.6	74.0	19.4	Horizontal			
12060.0	3.9	51.5	55.4	74.0	18.6	Vertical			
12060.0	2.9	52.4	55.3	74.0	18.7	Horizontal			



Date : 2017-05-09 Page 10 of 61 No. : DM127374

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4824.0	1.0	41.5	42.5	54.0	11.5	Vertical			
4824.0	-0.2	42.4	42.2	54.0	11.8	Horizontal			
7236.0	-2.7	45.1	42.4	54.0	11.6	Vertical			
7236.0	-5.2	46.2	41.0	54.0	13.0	Horizontal			
9648.0	-6.7	48	41.3	54.0	12.7	Vertical			
9648.0	-7.3	48.8	41.5	54.0	12.5	Horizontal			
12060.0	-9.9	51.5	41.6	54.0	12.4	Vertical			
12060.0	-10.2	52.4	42.2	54.0	11.8	Horizontal			

Result of Wifi mode (2437.0 MHz) (802.11b) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
Emissions detected are more than 20 dB below the FCC Limits							

Result of Wifi mode (2437.0 MHz) (802.11b) (1GHz-25GHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB				
4874.0	15.6	41.6	57.2	74.0	16.8	Vertical			
4874.0	14.0	42.5	56.5	74.0	17.5	Horizontal			
7311.0	10.2	45.2	55.4	74.0	18.6	Vertical			
7311.0	8.8	46.3	55.1	74.0	18.9	Horizontal			
9748.0	7.1	48.1	55.2	74.0	18.8	Vertical			
9748.0	7.0	48.9	55.9	74.0	18.1	Horizontal			
12185.0	3.9	51.6	55.5	74.0	18.5	Vertical			
12185.0	2.9	52.5	55.4	74.0	18.6	Horizontal			



Date : 2017-05-09 Page 11 of 61 No. : DM127374

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4874.0	1.5	41.6	43.1	54.0	10.9	Vertical			
4874.0	0.4	42.5	42.9	54.0	11.1	Horizontal			
7311.0	-3.3	45.2	41.9	54.0	12.1	Vertical			
7311.0	-4.2	46.3	42.1	54.0	11.9	Horizontal			
9748.0	-6.3	48.1	41.8	54.0	12.2	Vertical			
9748.0	-6.6	48.9	42.3	54.0	11.7	Horizontal			
12185.0	-10.2	51.6	41.4	54.0	12.6	Vertical			
12185.0	-10.4	52.5	42.1	54.0	11.9	Horizontal			

Result of Wifi mode (2462.0 MHz) (802.11b) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
Emissions detected are more than 20 dB below the FCC Limits							

Result of Wifi mode (2462.0 MHz) (802.11b) (1GHz-25GHz): Pass

Result of Will mode (2402.0 MHz) (602.11b) (1GHz-25GHz): Pass									
	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	dB				
4924.0	15.3	41.4	56.7	74.0	17.3	Vertical			
4924.0	13.1	42.7	55.8	74.0	18.2	Horizontal			
7386.0	9.9	45.6	55.5	74.0	18.5	Vertical			
7386.0	8.4	46.5	54.9	74.0	19.1	Horizontal			
9848.0	7.3	48.6	55.9	74.0	18.1	Vertical			
9848.0	5.2	49.7	54.9	74.0	19.1	Horizontal			
12310.0	3.5	51.7	55.2	74.0	18.8	Vertical			
12310.0	2.8	52.7	55.5	74.0	18.5	Horizontal			



Date : 2017-05-09 Page 12 of 61 No. : DM127374

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4924.0	0.9	41.4	42.3	54.0	11.7	Vertical			
4924.0	-0.2	42.7	42.5	54.0	11.5	Horizontal			
7386.0	-4.3	45.6	41.3	54.0	12.7	Vertical			
7386.0	-5.3	46.5	41.2	54.0	12.8	Horizontal			
9848.0	-6.3	48.6	42.3	54.0	11.7	Vertical			
9848.0	-8.2	49.7	41.5	54.0	12.5	Horizontal			
12310.0	-9.9	51.7	41.8	54.0	12.2	Vertical			
12310.0	-10.8	52.7	41.9	54.0	12.1	Horizontal			

Result of Wifi mode (2412.0 MHz) (802.11g) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Average Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m		
Emissions detected are more than 20 dB below the FCC Limits							

Result of Wifi mode (2412.0 MHz) (802.11g) (1CHz-25CHz): Pass

esuit of Will	sult of Wifi mode (2412.0 MHz) (802.11g) (1GHz-25GHz): Pass								
	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	$dB\mu V$	dB/m	dBμV/m	$dB\mu V/m$	dB				
4824.0	15.0	41.5	56.5	74.0	17.5	Vertical			
4824.0	13.4	42.4	55.8	74.0	18.2	Horizontal			
7236.0	10.7	45.1	55.8	74.0	18.2	Vertical			
7236.0	8.5	46.2	54.7	74.0	19.3	Horizontal			
9648.0	7.9	48	55.9	74.0	18.1	Vertical			
9648.0	5.6	48.8	54.4	74.0	19.6	Horizontal			
12060.0	3.9	51.5	55.4	74.0	18.6	Vertical			
12060.0	3.2	52.4	55.6	74.0	18.4	Horizontal			



Date : 2017-05-09 Page 13 of 61 No. : DM127374

Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4824.0	1.8	41.5	43.3	54.0	10.7	Vertical			
4824.0	-0.9	42.4	41.5	54.0	12.5	Horizontal			
7236.0	-3.0	45.1	42.1	54.0	11.9	Vertical			
7236.0	-4.3	46.2	41.9	54.0	12.1	Horizontal			
9648.0	-6.9	48	41.1	54.0	12.9	Vertical			
9648.0	-7.2	48.8	41.6	54.0	12.4	Horizontal			
12060.0	-9.5	51.5	42.0	54.0	12.0	Vertical			
12060.0	-9.9	52.4	42.5	54.0	11.5	Horizontal			

Result of Wifi mode (2437.0 MHz) (802.11g) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Average Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	$dB\mu V$	dB/m	dBμV/m	$dB\mu V/m$	$dB\mu V/m$			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Wifi mode (2437.0 MHz) (802.11g) (1GHz-25GHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4874.0	15.5	41.6	57.1	74.0	16.9	Vertical			
4874.0	13.4	42.5	55.9	74.0	18.1	Horizontal			
7311.0	10.5	45.2	55.7	74.0	18.3	Vertical			
7311.0	9.1	46.3	55.4	74.0	18.6	Horizontal			
9748.0	7.6	48.1	55.7	74.0	18.3	Vertical			
9748.0	6.3	48.9	55.2	74.0	18.8	Horizontal			
12185.0	4.0	51.6	55.6	74.0	18.4	Vertical			
12185.0	3.5	52.5	56.0	74.0	18.0	Horizontal			



Date : 2017-05-09 Page 14 of 61 No. : DM127374

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4874.0	2.1	41.6	43.7	54.0	10.3	Vertical				
4874.0	0.6	42.5	43.1	54.0	10.9	Horizontal				
7311.0	-3.3	45.2	41.9	54.0	12.1	Vertical				
7311.0	-4.6	46.3	41.7	54.0	12.3	Horizontal				
9748.0	-6.5	48.1	41.6	54.0	12.4	Vertical				
9748.0	-6.4	48.9	42.5	54.0	11.5	Horizontal				
12185.0	-10.2	51.6	41.4	54.0	12.6	Vertical				
12185.0	-10.4	52.5	42.1	54.0	11.9	Horizontal				

Result of Wifi mode (2462.0 MHz) (802.11g) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Average Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	$dB\mu V$	dB/m	dBμV/m	$dB\mu V/m$	$dB\mu V/m$			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Wifi mode (2462.0 MHz) (802.11g) (1GHz-25GHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB				
4924.0	15.5	41.4	56.9	74.0	17.1	Vertical			
4924.0	12.9	42.7	55.6	74.0	18.4	Horizontal			
7386.0	9.5	45.6	55.1	74.0	18.9	Vertical			
7386.0	8.0	46.5	54.5	74.0	19.5	Horizontal			
9848.0	7.2	48.6	55.8	74.0	18.2	Vertical			
9848.0	5.6	49.7	55.3	74.0	18.7	Horizontal			
12310.0	3.7	51.7	55.4	74.0	18.6	Vertical			
12310.0	2.2	52.7	54.9	74.0	19.1	Horizontal			



Date : 2017-05-09 Page 15 of 61 No. : DM127374

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4924.0	1.2	41.4	42.6	54.0	11.4	Vertical				
4924.0	-0.8	42.7	41.9	54.0	12.1	Horizontal				
7386.0	-4.3	45.6	41.3	54.0	12.7	Vertical				
7386.0	-5.3	46.5	41.2	54.0	12.8	Horizontal				
9848.0	-6.2	48.6	42.4	54.0	11.6	Vertical				
9848.0	-8.2	49.7	41.5	54.0	12.5	Horizontal				
12310.0	-9.8	51.7	41.9	54.0	12.1	Vertical				
12310.0	-11.5	52.7	41.2	54.0	12.8	Horizontal				

Result of Wifi mode (2412.0 MHz) (802.11n20) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions								
Average Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dBμV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Wifi mode (2412.0 MHz) (802.11n20) (1GHz-25GHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	$dB\mu V$	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB				
4824.0	14.9	41.5	56.4	74.0	17.6	Vertical			
4824.0	13.3	42.4	55.7	74.0	18.3	Horizontal			
7236.0	10.3	45.1	55.4	74.0	18.6	Vertical			
7236.0	9.0	46.2	55.2	74.0	18.8	Horizontal			
9648.0	7.9	48	55.9	74.0	18.1	Vertical			
9648.0	5.7	48.8	54.5	74.0	19.5	Horizontal			
12060.0	4.6	51.5	56.1	74.0	17.9	Vertical			
12060.0	3.0	52.4	55.4	74.0	18.6	Horizontal			



Date : 2017-05-09 Page 16 of 61 No. : DM127374

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4824.0	2.2	41.5	43.7	54.0	10.3	Vertical			
4824.0	-0.3	42.4	42.1	54.0	11.9	Horizontal			
7236.0	-2.6	45.1	42.5	54.0	11.5	Vertical			
7236.0	-4.5	46.2	41.7	54.0	12.3	Horizontal			
9648.0	-6.3	48	41.7	54.0	12.3	Vertical			
9648.0	-7.8	48.8	41.0	54.0	13.0	Horizontal			
12060.0	-9.5	51.5	42.0	54.0	12.0	Vertical			
12060.0	-10.1	52.4	42.3	54.0	11.7	Horizontal			

Result of Wifi mode (2437.0 MHz) (802.11n20) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Average Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	$dB\mu V/m$			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Wifi mode (2437.0 MHz) (802.11n20) (1GHz-25GHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dB				
4874.0	15.6	41.6	57.2	74.0	16.8	Vertical			
4874.0	13.8	42.5	56.3	74.0	17.7	Horizontal			
7311.0	10.6	45.2	55.8	74.0	18.2	Vertical			
7311.0	9.1	46.3	55.4	74.0	18.6	Horizontal			
9748.0	7.8	48.1	55.9	74.0	18.1	Vertical			
9748.0	7.2	48.9	56.1	74.0	17.9	Horizontal			
12185.0	3.7	51.6	55.3	74.0	18.7	Vertical			
12185.0	3.8	52.5	56.3	74.0	17.7	Horizontal			



Date : 2017-05-09 Page 17 of 61 No. : DM127374

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4874.0	2.1	41.6	43.7	54.0	10.3	Vertical			
4874.0	0.4	42.5	42.9	54.0	11.1	Horizontal			
7311.0	-3.6	45.2	41.6	54.0	12.4	Vertical			
7311.0	-4.2	46.3	42.1	54.0	11.9	Horizontal			
9748.0	-6.1	48.1	42.0	54.0	12.0	Vertical			
9748.0	-6.5	48.9	42.4	54.0	11.6	Horizontal			
12185.0	-10.0	51.6	41.6	54.0	12.4	Vertical			
12185.0	-10.8	52.5	41.7	54.0	12.3	Horizontal			

Result of Wifi mode (2462.0 MHz) (802.11n20) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Average Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Wifi mode (2462.0 MHz) (802.11n20) (1GHz-25GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions					
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB				
4924.0	14.9	41.4	56.3	74.0	17.7	Vertical			
4924.0	12.9	42.7	55.6	74.0	18.4	Horizontal			
7386.0	9.1	45.6	54.7	74.0	19.3	Vertical			
7386.0	8.6	46.5	55.1	74.0	18.9	Horizontal			
9848.0	7.2	48.6	55.8	74.0	18.2	Vertical			
9848.0	5.1	49.7	54.8	74.0	19.2	Horizontal			
12310.0	3.5	51.7	55.2	74.0	18.8	Vertical			
12310.0	2.7	52.7	55.4	74.0	18.6	Horizontal			



Date : 2017-05-09 Page 18 of 61 No. : DM127374

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4924.0	1.8	41.4	43.2	54.0	10.8	Vertical				
4924.0	-0.3	42.7	42.4	54.0	11.6	Horizontal				
7386.0	-4.3	45.6	41.3	54.0	12.7	Vertical				
7386.0	-5.6	46.5	40.9	54.0	13.1	Horizontal				
9848.0	-6.7	48.6	41.9	54.0	12.1	Vertical				
9848.0	-8.6	49.7	41.1	54.0	12.9	Horizontal				
12310.0	-10.3	51.7	41.4	54.0	12.6	Vertical				
12310.0	-11.0	52.7	41.7	54.0	12.3	Horizontal				

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement (9kHz-30MHz): 3.3dB uncertainty (30MHz -1GHz): 4.6dB (1GHz -26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date : 2017-05-09 Page 19 of 61

No. : DM127374

Radiated Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: Band-edge Compliance of RF Radiated Emissions (Lowest)-802.11b

	Field Strength of Band-edge Compliance							
Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB			
2390.0	19.0	36.8	55.8	74.0	18.2	Vertical		

	Field Strength of Band-edge Compliance							
Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB			
2390.0	3.7	36.8	40.5	54.0	13.5	Vertical		

Result: Band-edge Compliance of RF Radiated Emissions (Highest) -802.11b

tresuit. Dana tage compliante of the framework Emissions (inglies) to 2011.								
Field Strength of Band-edge Compliance								
Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB			
2483.5	22.0	36.4	58.4	74.0	15.6	Horizontal		

Field Strength of Band-edge Compliance							
Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB		
2483.5	5.7	36.4	42.1	54.0	11.9	Horizontal	



Date : 2017-05-09 Page 20 of 61 No. : DM127374

Result: Band-edge Compliance of RF Radiated Emissions (Lowest)-802.11g

Result: Band-	Result: Band-edge Compliance of RF Radiated Emissions (Lowest)-802.11g											
	Field Strength of Band-edge Compliance											
	Peak Value											
Frequency	Measured	Correction	Field	Limit	Margin	E-Field						
	Level @3m	Factor	Strength	@3m		Polarity						
MHz $dB\mu V$ dB/m $dB\mu V/m$ $dB\mu V/m$ dB												
2390.0	26.5	36.8	63.3	74.0	10.7	Vertical						

Field Strength of Band-edge Compliance									
Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB				
2390.0	7.9	36.8	44.7	54.0	9.3	Vertical			

Result: Band-edge Compliance of RF Radiated Emissions (Highest) -802.11g

	Field Strength of Band-edge Compliance									
Peak Value										
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	dB					
2483.5	29.4	36.4	65.8	74.0	8.2	Horizontal				

	Field Strength of Band-edge Compliance										
	Average Value										
Frequency	Measured	Correction	Field	Limit	Margin	E-Field					
	Level @3m	Factor	Strength	@3m		Polarity					
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	dB						
2483.5	12.0	36.4	48.4	54.0	5.6	Horizontal					



Date : 2017-05-09 Page 21 of 61 No. : DM127374

Result: Band-edge Compliance of RF Radiated Emissions (Lowest)-802.11n20

Result: Dalid-6	tesuit: Band-edge Comphanice of KF Radiated Emissions (Lowest)-802.11n20											
	Field Strength of Band-edge Compliance											
Peak Value												
Frequency	Measured	Correction	Field	Limit	Margin	E-Field						
						Polarity						
MHz $dB\mu V$ dB/m $dB\mu V/m$ $dB\mu V/m$ dB												
2390.0	26.6	36.8	63.4	74.0	10.6	Vertical						

	Field Strength of Band-edge Compliance									
Average Value										
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB					
2390.0	9.6	36.8	46.4	54.0	7.6	Vertical				

Result: Band-edge Compliance of RF Radiated Emissions (Highest) -802.11n20

- 5	tesuit. Dana eage compliance of it. Italiance Emissions (Ingliese) outiling										
	Field Strength of Band-edge Compliance										
L	Peak Value										
Ī	Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
		Level @3m	Factor	Strength	@3m		Polarity				
	MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB					
	2483.5	29.7	36.4	66.1	74.0	7.9	Horizontal				

	Field Strength of Band-edge Compliance										
	Average Value										
Frequency	Measured	Correction	Field	Limit	Margin	E-Field					
	Level @3m	Factor	Strength	@3m		Polarity					
MHz	dΒμV	dB/m	dBμV/m	$dB\mu V/m$	dB						
2483.5	10.0	36.4	46.4	54.0	7.6	Horizontal					



Date : 2017-05-09 Page 22 of 61 No. : DM127374


Limits for Radiated Emissions FCC 47 CFR 15.247]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of WiFi mode (2412MHz, 802.11b) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

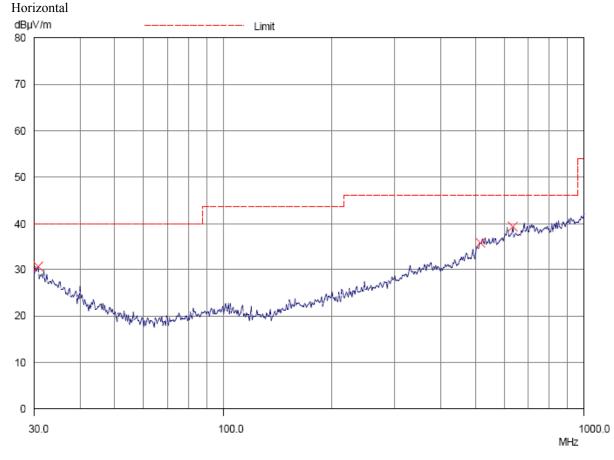



Date : 2017-05-09 Page 23 of 61 No. : DM127374

Result of WiFi mode (2412MHz, 802.11b) (30MHz – 1GHz): Pass

	Radiated Emissions									
	Quasi-Peak									
Emission	E-Field	Level	Limit	Level	Limit					
Frequency	Polarity	@3m	@3m	@3m	@3m					
MHz		dΒμV/m	dBμV/m	μV/m	μV/m					
30.7	Horizontal	30.7	40.0	34.3	100					
514.9	Horizontal	35.8	46.0	61.7	200					
631.9	Horizontal	38.2	46.0	81.3	200					



Date : 2017-05-09 Page 24 of 61 No. : DM127374


Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of WiFi mode (2412MHz, 802.11b) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

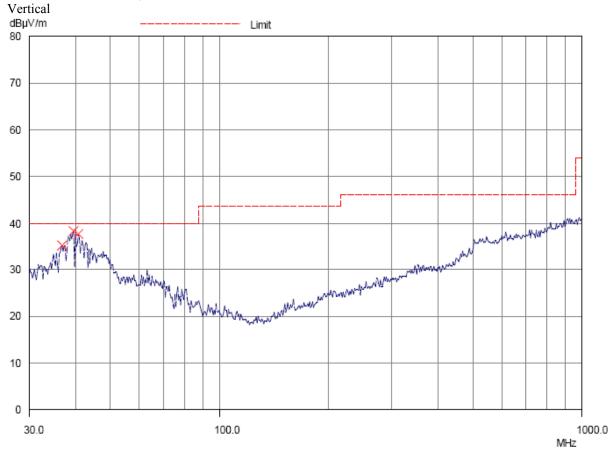



Date : 2017-05-09 Page 25 of 61 No. : DM127374

Result of WiFi mode (2412MHz, 802.11b) (30MHz – 1GHz): Pass

	Radiated Emissions									
	Quasi-Peak									
Emission	E-Field	Level	Limit	Level	Limit					
Frequency	Polarity	@3m	@3m	@3m	@3m					
MHz		dBµV/m	dBμV/m	μV/m	μV/m					
36.7	Vertical	34.2	40.0	51.3	100					
39.5	Vertical	35.5	40.0	59.6	100					
40.8	Vertical	35.0	40.0	56.2	100					

Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date : 2017-05-09 Page 26 of 61

No. : DM127374

3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)


Test Requirement: FCC 47CFR 15.207 Test Method: ANSI C63.10:2013

Test Date: 2017-05-04
Mode of Operation: Wifi mode
Test Voltage: 120Va.c. 60Hz

Test Method:

The test was performed in accordance with ANSI ANSI C63.10:2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

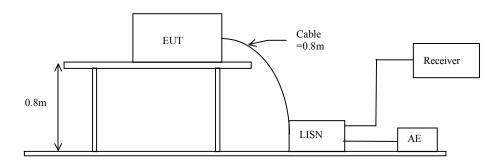



Date : 2017-05-09 Page 27 of 61 No. : DM127374

Limits for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Wifi mode (L): PASS

Please refer to the following diagram for individual results.

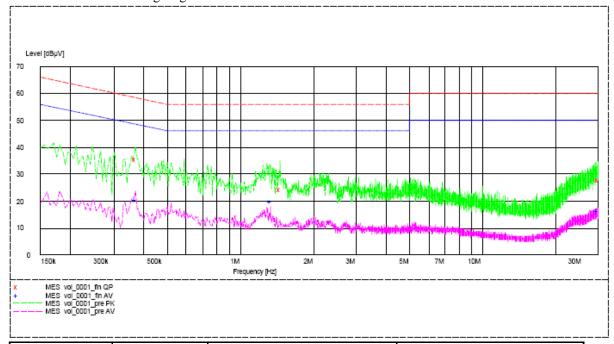

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Live	0.370	35.7	59.0	_*_	_*_
Live	1.465	24.3	56.0	_*_	_*_
Live	29.995	27.9	60.0	_*_	_*_
Live	0.370	_*_	_*_	20.6	49.0
Live	1.335	_*_	_*_	19.8	46.0
Live	29.690	_*_	_*_	16.4	50.0



Date : 2017-05-09 Page 28 of 61 No. : DM127374


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Wifi mode (N): PASS

Please refer to the following diagram for individual results.

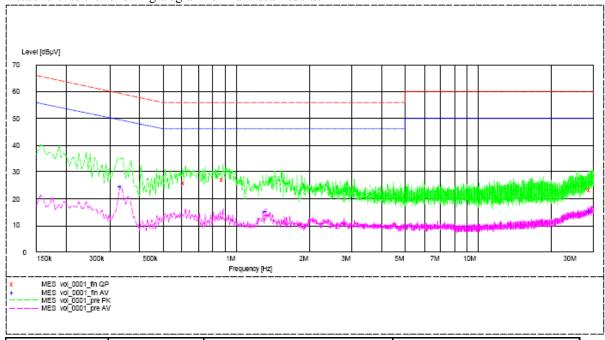

		Quasi-peak		Ave	rage
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Neutral	0.615	25.9	56.0	_*_	_*_
Neutral	0.885	27.2	56.0	_*_	_*_
Neutral	29.275	23.4	60.0	_*_	_*_
Neutral	0.335	_*_	_*_	24.7	49.0
Neutral	1.335	_*_	_*_	15.4	46.0
Neutral	29.360	_*_	_*_	15.3	50.0

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

^{-*-} Emission(s) that is far below the corresponding limit line.



Date : 2017-05-09 Page 29 of 61

No. : DM127374

3.1.4 Power Spectral Density

Test Requirement: FCC 47CFR 15.247(e)
Test Method: ANSI C63.10:2013

Test Date: 2017-05-06 Mode of Operation: Wifi mode

Test Method:

The RF output of the EUT was connected to the spectrum analyzer. Set the fundamental frequency as the center frequency of the spectral analyzer. Use RBW=3kHz, VBW=10KHz, Set the span to 1.5 times the DTS channel bandwidth. Detector = peak, Sweep time = auto couple , Trace mode = max hold. Measure the Power Spectral Density (PSD) and record the results in dBm.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Test Limit:

The maximum power spectral density (PSD) shall not exceeded 8dBm in any 3kHz band.

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF=10log (3 kHz/100 kHz=-15.2dB)

Results of WiFi Mode 802.11 b (Tx:2412MHz to 2462MHz): Pass (TX Unit) Maximum power spectral density

Transmitter Frequency	Maximum Power spectral density	Maximum Power spectral density /
(MHz)	level / 3kHz band	3kHz band limit
	(dBm)	
2412.0	-14.22	8dBm
2437.0	-13.07	8dBm
2462.0	-13.72	8dBm



Date : 2017-05-09 Page 30 of 61 No. : DM127374

Results of WiFi Mode 802.11 g (Tx:2412MHz to 2462MHz) : Pass (TX Unit) Maximum power spectral density

Transmitter Frequency (MHz)	Maximum Power spectral density level / 3kHz band	Maximum Power spectral density / 3kHz band limit
	(dBm)	
2412.0	-21.86	8dBm
2437.0	-19.51	8dBm
2462.0	-21.84	8dBm

Results of WiFi Mode 802.11 n20 (Tx:2412MHz to 2462MHz) : Pass (TX Unit) Maximum power spectral density


Transmitter Frequency	Maximum Power spectral density	Maximum Power spectral density /
(MHz)	level / 3kHz band	3kHz band limit
	(dBm)	
2412.0	-20.83	8dBm
2437.0	-18.22	8dBm
2462.0	-21.19	8dBm




Date : 2017-05-09 Page 31 of 61 No. : DM127374

WiFi mode 802.11 b, (Tx: 2412MHz to 2462MHz)

CH 1 (2412.0 MHz)

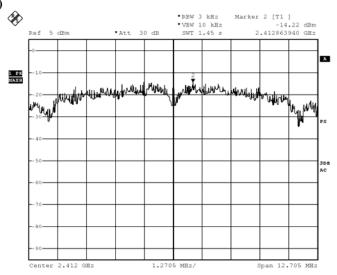


CH 6 (2437.0 MHz)

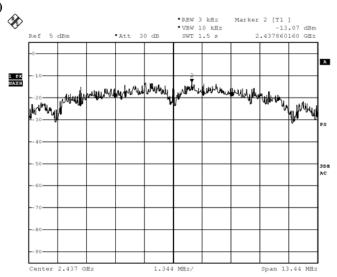




Date : 2017-05-09 Page 32 of 61 No. : DM127374

CH 11 (2462.0 MHz)

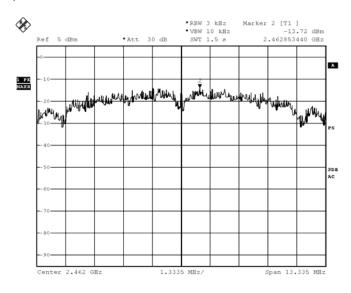


WiFi mode 802.11 g, (Tx:2412MHz to 2462MHz) Ch 1 (2412.0 MHz)

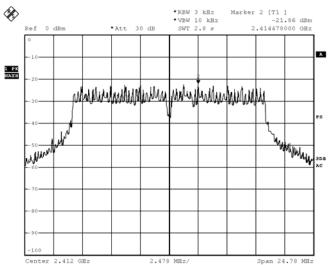




Date : 2017-05-09 Page 33 of 61 No. : DM127374

CH 6 (2437.0 MHz)

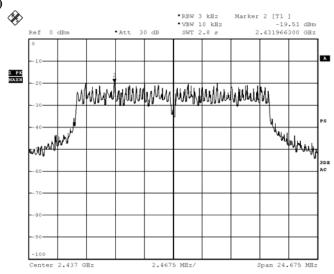

CH 11 (2462.0 MHz)

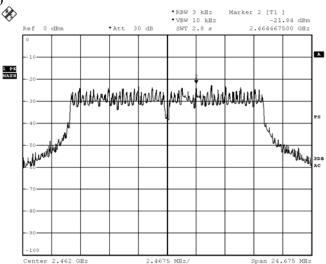





Date : 2017-05-09 Page 34 of 61 No. : DM127374

WiFi mode 802.11 n20, (Tx: 2412MHz to 2462MHz)

CH 1 (2412.0 MHz)

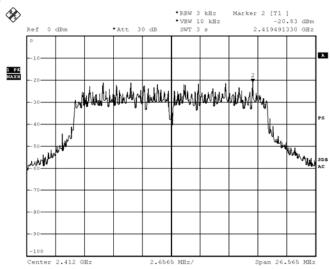


CH 6 (2437.0 MHz)

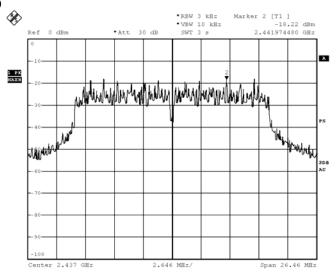



Date : 2017-05-09 Page 35 of 61 No. : DM127374

Ch 11 (2462.0 MHz)

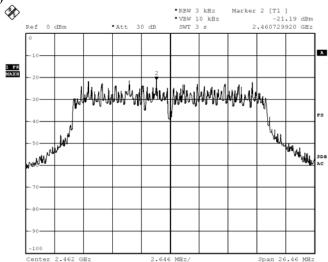



Date : 2017-05-09 Page 36 of 61

No. : DM127374

3.1.5 6dB Spectrum Bandwidth Measurement

Test Requirement: FCC 47CFR 15.247(a)(2)
Test Method: ANSI C63.10:2013

Test Date: 2017-05-04

Mode of Operation: WiFi

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Spectrum Analyzer Setting:

RBW = 100kHz, VBW $\geq 3*\text{RBW}$, Sweep = Auto couple Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.



Date : 2017-05-09 Page 37 of 61 No. : DM127374

Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2412.0	8.47	> 500

6dB Bandwidth of Fundamental Emission on 802.11 b (2412MHz) *RBW 100 kHz Delta 1 [T1] *VBW 300 kHz Ref 5 dBm *Att 35 dB SWT 5 ms 4.340000000 MHz Marker 1 [T1 A 407380 000 GHz 1 PK Maxh 0.46 dB 470000 000 MHz PS 3DB Center 2.412 GHz 3.5 MHz/ Span 35 MHz




Date : 2017-05-09 Page 38 of 61 No. : DM127374

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2437.0	8.96	> 500

6dB Bandwidth of Fundamental Emission on 802.11 b (2437MHz)

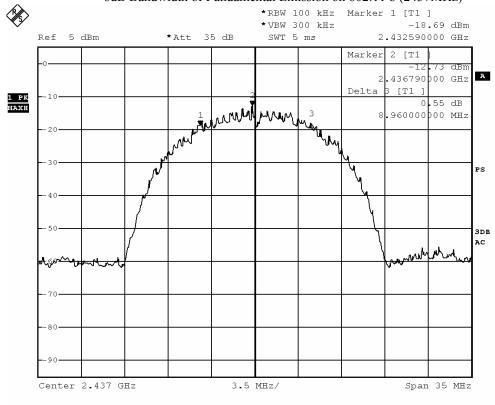




Date : 2017-05-09 Page 39 of 61 No. : DM127374

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2462.0	8.89	> 500

6dB Bandwidth of Fundamental Emission on 802.11 b (2462MHz)

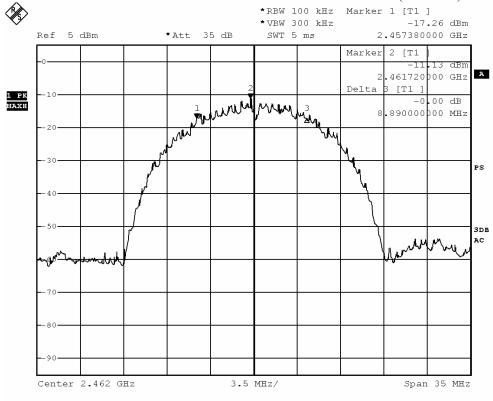



Date : 2017-05-09 Page 40 of 61 No. : DM127374

Limits for 6dB Spectrum Bandwidth Measurement:

Center 2.412 GHz

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2412.0	16.52	> 500

6dB Bandwidth of Fundamental Emission on 802.11 g (2412MHz) *RBW 100 kHz Marker 1 [T1] *VBW 300 kHz -26.73 dBm Ref -1 dBm *Att 35 dB SWT 5 ms 2.403740000 GHz 2 [T1 85 dBm A Delta [T1] 1 PK MAXH 89 dB 16.520000000 MHz Fully harden harden for the should PS 3DB AC whathwhite -80 -90

3.5 MHz/

Span 35 MHz




Date : 2017-05-09 Page 41 of 61 No. : DM127374

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2437.0	16.45	> 500

6dB Bandwidth of Fundamental Emission on 802.11 g (2437MHz)

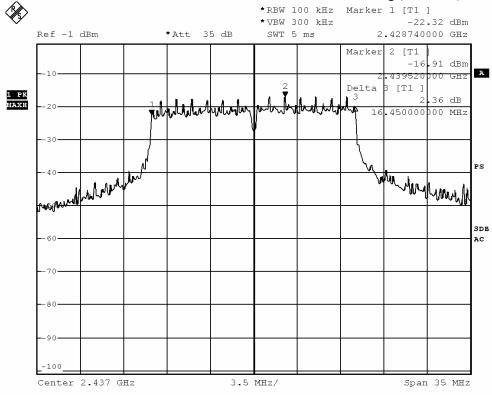




Date : 2017-05-09 Page 42 of 61 No. : DM127374

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2462.0	16.45	> 500

6dB Bandwidth of Fundamental Emission on 802.11 g (2462MHz)

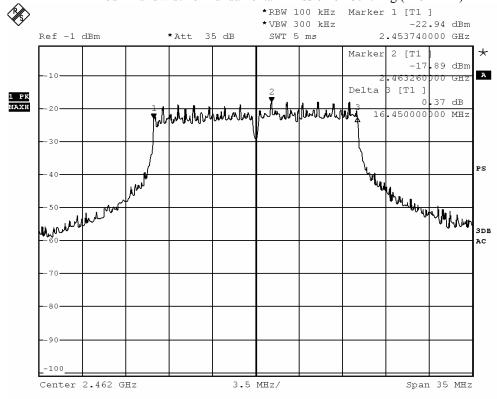




Date : 2017-05-09 Page 43 of 61 No. : DM127374

Limits for 6dB Spectrum Bandwidth Measurement:

Center Frequency	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2412.0	17.71	> 500

6dB Bandwidth of Fundamental Emission on 802.11 n20 (2412MHz)

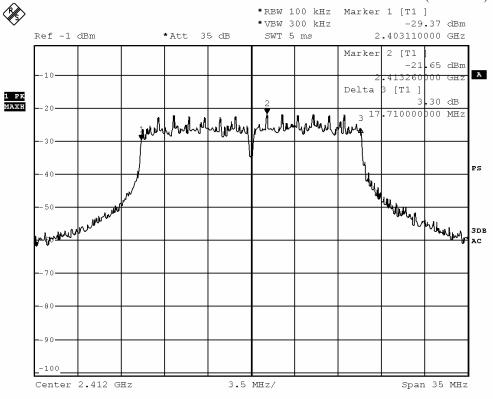




Date : 2017-05-09 Page 44 of 61 No. : DM127374

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2437.0	17.71	> 500

6dB Bandwidth of Fundamental Emission on 802.11 n20 (2437MHz)

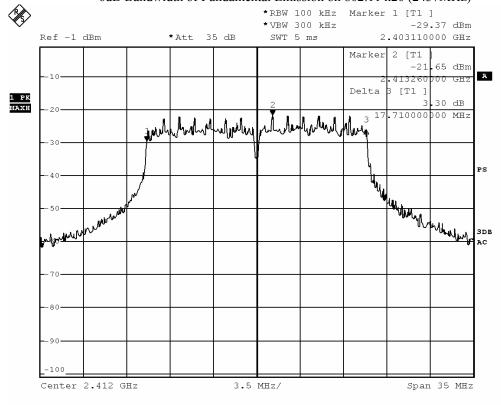




Date : 2017-05-09 Page 45 of 61 No. : DM127374

Limits for 6dB Spectrum Bandwidth Measurement:

Frequency Range	6dB Bandwidth	FCC Limits
[MHz]	[MHz]	[kHz]
2462.0	17.64	> 500

6dB Bandwidth of Fundamental Emission on 802.11 n20 (2462MHz)

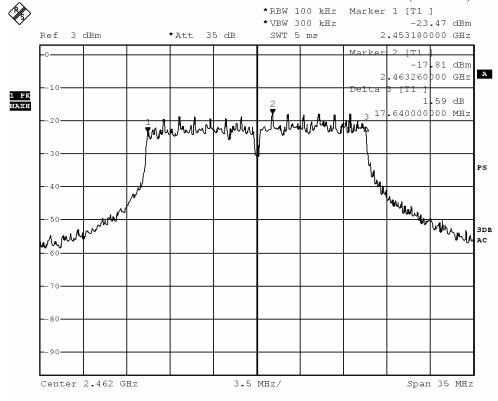



Date : 2017-05-09 Page 46 of 61

No. : DM127374

3.1.6 Band Edges Measurement

Test Requirement: FCC 47CFR 15.247
Test Method: ANSI C63.10:2013

Test Date: 2017-05-05 Mode of Operation: Wifi mode

Test Method:

The band edge is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. The RBW are set to 100kHz and VBW are set to 300kHz for this measurement.

Test Setup:

As Test Setup of clause 3.1.2 in this test report.



Date : 2017-05-09 Page 47 of 61 No. : DM127374

Band-edge Compliance of RF Conducted Emissions Measurement:


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

Frequency Range	Conducted Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	48.84

Band-edge Compliance of RF Emissions – Lowest (802.11b)

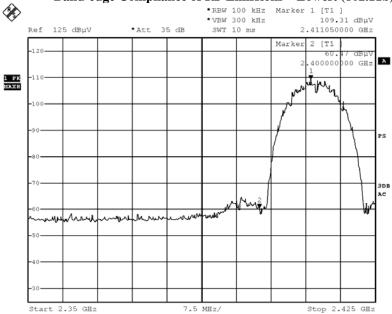




Date : 2017-05-09 Page 48 of 61 No. : DM127374

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Conducted Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	52.88

Band-edge Compliance of RF Emissions – Highest (802.11b)

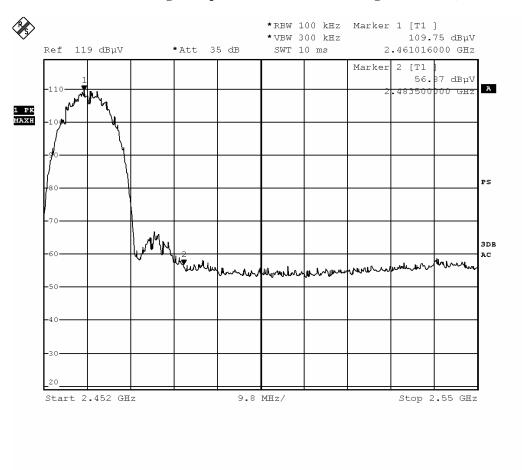




Date : 2017-05-09 Page 49 of 61 No. : DM127374

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Conducted Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 - Lowest Fundamental (2402)	30.85

Band-edge Compliance of RF Emissions – Lowest (802.11g)

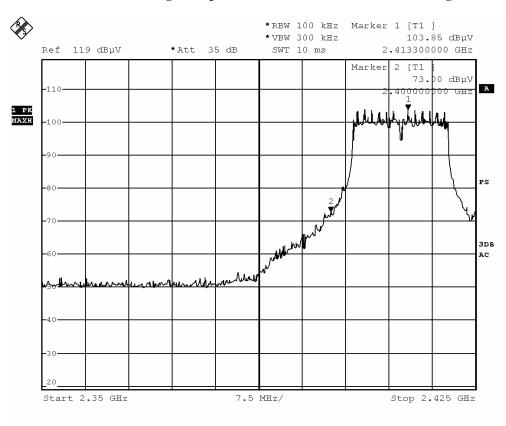




Date : 2017-05-09 Page 50 of 61 No. : DM127374

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Conducted Emission Attenuated below the			
	Fundamental			
[MHz]	[dB]			
2483.5 - Highest Fundamental (2480)	44.98			

Band-edge Compliance of RF Emissions – Highest (802.11g)

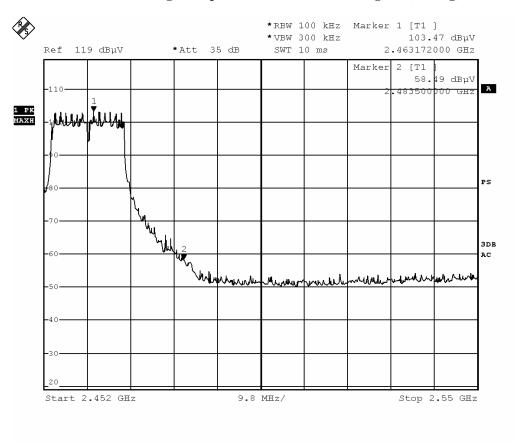




Date : 2017-05-09 Page 51 of 61 No. : DM127374

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Conducted Emission Attenuated below the	
	Fundamental	
[MHz]	[dB]	
2400 - Lowest Fundamental (2402)	31.26	

Band-edge Compliance of RF Emissions – Lowest (802.11n20)

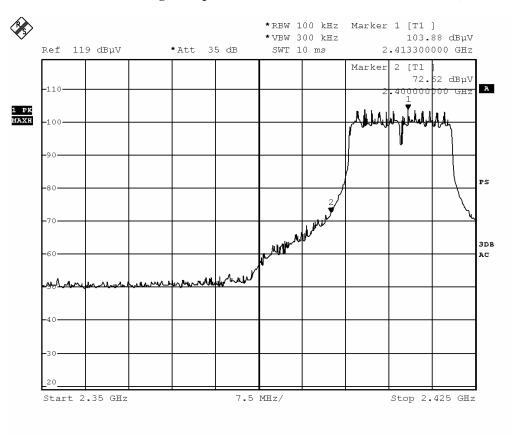




Date : 2017-05-09 Page 52 of 61 No. : DM127374

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Conducted Emission Attenuated below the		
	Fundamental		
[MHz]	[dB]		
2483.5 - Highest Fundamental (2480)	41.95		

Band-edge Compliance of RF Emissions – Highest (802.11n20)

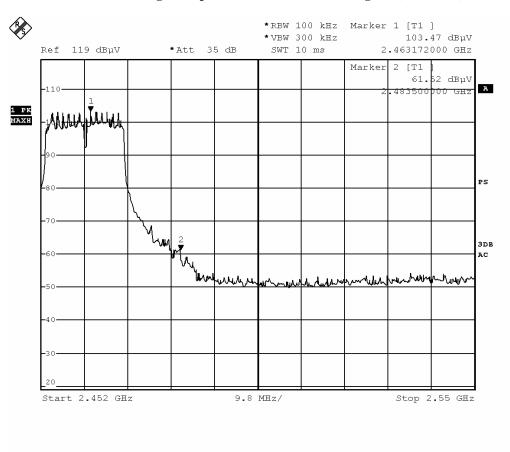




Date : 2017-05-09 Page 53 of 61 No. : DM127374

Out of Band emissions of RF Conducted Emissions Measurement:

Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

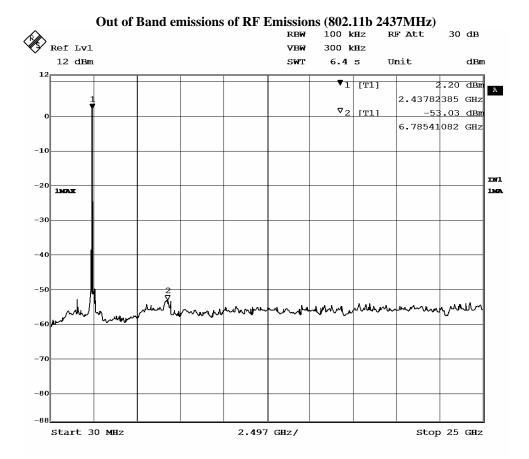




Date : 2017-05-09 Page 54 of 61 No. : DM127374

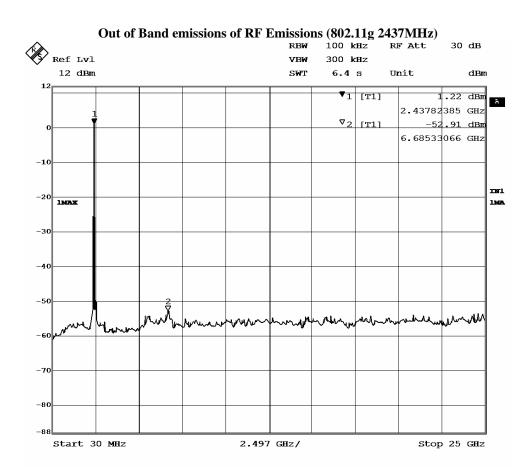



Date : 2017-05-09 Page 55 of 61 No. : DM127374

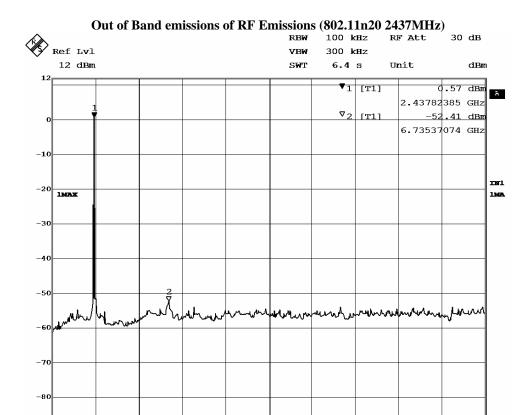

2.497 GHz/

Stop 25 GHz

Start 30 MHz



Date : 2017-05-09 Page 56 of 61 No. : DM127374

3.1.7 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is multilayer antenna. There is no external antenna, the antenna gain = 1.9dBi. User is unable to remove or changed the Antenna.



Date : 2017-05-09 Page 57 of 61 No. : DM127374

Appendix A

List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2017.04.14	2018.04.14
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2017.04.15	2018.04.15
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2017.04.14	2018.04.14
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2017.04.15	2018.04.15
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2017.04.14	2018.04.14
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2016.12.30	2018.12.30
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2017.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2017.04.14	2018.04.14
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2017.04.14	2018.04.14
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2017.04.14	2018.04.14
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2017.05.23	2018.05.23
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO lnc.	JXTXLB-42- 15-C-KF	J2021100721001	2015.06.27	2017.06.27
RE01	RF cable	N/A	N/A	N/A	2016-9-28	2018-9-27
RE02	RF cable	N/A	N/A	N/A	2016-9-28	2018-9-27

Remarks:-

N/A Not Applicable or Not Available



Date : 2017-05-09 Page 58 of 61 No. : DM127374

Appendix B

Photographs of EUT

Front View of the product



Inside View of the product



Inner Circuit Top View




Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View

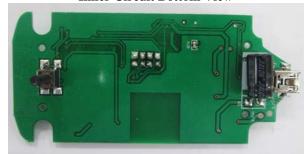



Date : 2017-05-09 Page 59 of 61 No. : DM127374

Photographs of EUT

Inner Circuit Top View



Inner Circuit Bottom View






Date: 2017-05-09 Page 60 of 61 No. : DM127374

Photographs of EUT

Measurement of Radiated Emission Test Set Up (9kHz - 30MHz)



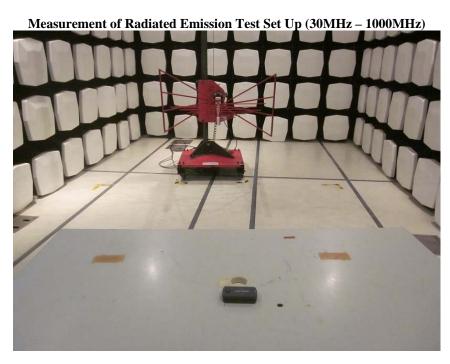

STC (Dongguan) Company Limited



Date : 2017-05-09 Page 61 of 61 No. : DM127374

Photographs of EUT

Measurement of Radiated Emission Test Set Up (above 1000MHz)



Measurement of Conducted Emission Test Set Up



***** End of Test Report *****

STC (Dongguan) Company Limited

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by The STC (Dongguan) Company Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders
- 4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
- 5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
- 10. Issuance records of the Report are available on the internet at dgstc@dgstc.org. Further enquiry of validity or verification of the Reports should be addressed to the Company.