

### 5.8.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	61.43	-4.26	57.17	74	-16.83	PK	H
4824.000	42.41	-4.26	38.15	54	-15.85	AV	H
7236.000	60.73	1.18	61.91	74	-12.09	PK	H
7236.000	38.71	1.18	39.89	54	-14.11	AV	H
4824.000	59.52	-4.26	55.26	74	-18.74	PK	V
4824.000	40.17	-4.26	35.91	54	-18.09	AV	V
7236.000	60.53	1.18	61.71	74	-12.29	PK	V
7236.000	39.64	1.18	40.82	54	-13.18	AV	V

Test mode:		802.11b(1Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	59.82	-4.12	55.70	74	-18.30	PK	H
4874.000	41.28	-4.12	37.16	54	-16.84	AV	H
7311.000	60.87	1.46	62.33	74	-11.67	PK	H
7311.000	39.82	1.46	41.28	54	-12.72	AV	H
4874.000	59.18	-4.12	55.06	74	-18.94	PK	V
4874.000	41.42	-4.12	37.30	54	-16.70	AV	V
7311.000	62.78	1.46	64.24	74	-9.76	PK	V
7311.000	40.11	1.46	41.57	54	-12.43	AV	V

Test mode:		802.11b(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	61.41	-4.03	57.38	74	-16.62	PK	H
4924.000	42.04	-4.03	38.01	54	-15.99	AV	H
7386.000	60.51	1.66	62.17	74	-11.83	PK	H
7386.000	39.65	1.66	41.31	54	-12.69	AV	H
4924.000	59.36	-4.03	55.33	74	-18.67	PK	V
4924.000	41.21	-4.03	37.18	54	-16.82	AV	V
7386.000	61.10	1.66	62.76	74	-11.24	PK	V
7386.000	38.93	1.66	40.59	54	-13.41	AV	V

Test mode:		802.11g(6Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	58.56	-4.26	54.30	74	-19.70	PK	H
4824.000	40.32	-4.26	36.06	54	-17.94	AV	H
7236.000	60.08	1.18	61.26	74	-12.74	PK	H
7236.000	38.18	1.18	39.36	54	-14.64	AV	H
4824.000	60.24	-4.26	55.98	74	-18.02	PK	V
4824.000	42.29	-4.26	38.03	54	-15.97	AV	V
7236.000	60.36	1.18	61.54	74	-12.46	PK	V
7236.000	39.41	1.18	40.59	54	-13.41	AV	V

Test mode:		802.11g(6Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	59.12	-4.12	55.00	74	-19.00	PK	H
4874.000	42.24	-4.12	38.12	54	-15.88	AV	H
7311.000	62.49	1.46	63.95	74	-10.05	PK	H
7311.000	39.44	1.46	40.90	54	-13.10	AV	H
4874.000	59.06	-4.12	54.94	74	-19.06	PK	V
4874.000	41.93	-4.12	37.81	54	-16.19	AV	V
7311.000	61.43	1.46	62.89	74	-11.11	PK	V
7311.000	39.97	1.46	41.43	54	-12.57	AV	V

Test mode:		802.11g(6Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	60.12	-4.03	56.09	74	-17.91	PK	H
4924.000	41.54	-4.03	37.51	54	-16.49	AV	H
7386.000	62.67	1.66	64.33	74	-9.67	PK	H
7386.000	40.57	1.66	42.23	54	-11.77	AV	H
4924.000	60.39	-4.03	56.36	74	-17.64	PK	V
4924.000	40.61	-4.03	36.58	54	-17.42	AV	V
7386.000	62.17	1.66	63.83	74	-10.17	PK	V
7386.000	38.91	1.66	40.57	54	-13.43	AV	V

Test mode:		802.11n(6.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	59.99	-4.26	55.73	74	-18.27	PK	H
4824.000	40.93	-4.26	36.67	54	-17.33	AV	H
7236.000	60.02	1.18	61.20	74	-12.80	PK	H
7236.000	38.08	1.18	39.26	54	-14.74	AV	H
4824.000	58.90	-4.26	54.64	74	-19.36	PK	V
4824.000	42.02	-4.26	37.76	54	-16.24	AV	V
7236.000	61.55	1.18	62.73	74	-11.27	PK	V
7236.000	38.15	1.18	39.33	54	-14.67	AV	V

Test mode:		802.11n(6.5Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	60.40	-4.12	56.28	74	-17.72	PK	H
4874.000	40.70	-4.12	36.58	54	-17.42	AV	H
7311.000	62.03	1.46	63.49	74	-10.51	PK	H
7311.000	38.61	1.46	40.07	54	-13.93	AV	H
4874.000	61.30	-4.12	57.18	74	-16.82	PK	V
4874.000	41.70	-4.12	37.58	54	-16.42	AV	V
7311.000	62.22	1.46	63.68	74	-10.32	PK	V
7311.000	38.15	1.46	39.61	54	-14.39	AV	V

Test mode:		802.11n(6.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	59.86	-4.03	55.83	74	-18.17	PK	H
4924.000	40.91	-4.03	36.88	54	-17.12	AV	H
7386.000	62.10	1.66	63.76	74	-10.24	PK	H
7386.000	40.91	1.66	42.57	54	-11.43	AV	H
4924.000	58.59	-4.03	54.56	74	-19.44	PK	V
4924.000	40.67	-4.03	36.64	54	-17.36	AV	V
7386.000	62.26	1.66	63.92	74	-10.08	PK	V
7386.000	39.91	1.66	41.57	54	-12.43	AV	V

Test mode:		802.11n40(13.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4844.000	59.97	-4.2	55.77	74	-18.23	PK	H
4844.000	42.84	-4.2	38.64	54	-15.36	AV	H
7266.000	61.32	1.18	62.50	74	-11.50	PK	H
7266.000	40.07	1.18	41.25	54	-12.75	AV	H
4844.000	59.23	-4.2	55.03	74	-18.97	PK	V
4844.000	42.51	-4.2	38.31	54	-15.69	AV	V
7266.000	62.58	1.18	63.76	74	-10.24	PK	V
7266.000	38.48	1.18	39.66	54	-14.34	AV	V

Test mode:		802.11n40(13.5Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	58.51	-4.12	54.39	74	-19.61	PK	H
4874.000	40.34	-4.12	36.22	54	-17.78	AV	H
7311.000	60.53	1.46	61.99	74	-12.01	PK	H
7311.000	39.51	1.46	40.97	54	-13.03	AV	H
4874.000	59.85	-4.12	55.73	74	-18.27	PK	V
4874.000	40.61	-4.12	36.49	54	-17.51	AV	V
7311.000	61.50	1.46	62.96	74	-11.04	PK	V
7311.000	38.72	1.46	40.18	54	-13.82	AV	V

Test mode:		802.11n40(13.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4904.000	59.57	-4.03	55.54	74	-18.46	PK	H
4904.000	42.02	-4.03	37.99	54	-16.01	AV	H
7356.000	60.80	1.66	62.46	74	-11.54	PK	H
7356.000	39.93	1.66	41.59	54	-12.41	AV	H
4904.000	60.07	-4.03	56.04	74	-17.96	PK	V
4904.000	41.68	-4.03	37.65	54	-16.35	AV	V
7356.000	60.07	1.66	61.73	74	-12.27	PK	V
7356.000	40.30	1.66	41.96	54	-12.04	AV	V

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

### 5.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

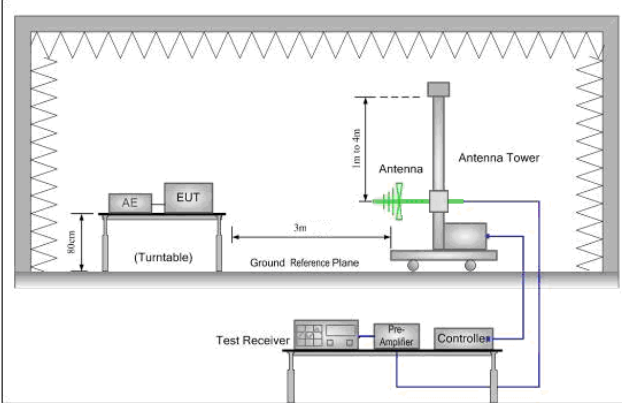


Figure 1. 30MHz to 1GHz

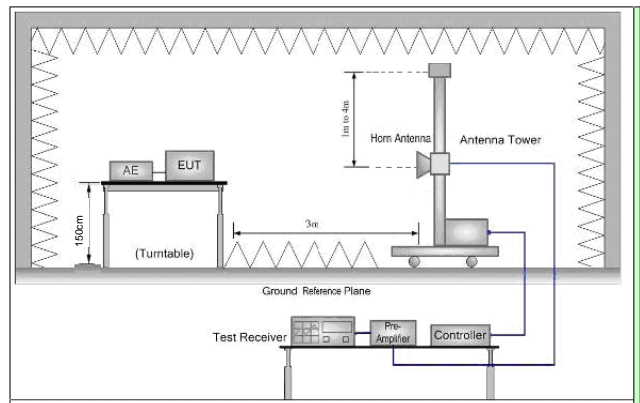


Figure 2. Above 1 GHz

Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz:</p> <p>Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and</p>
-----------------	--

	<p>then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</p> <p>g. Test the EUT in the lowest channel , the Highest channel</p> <p>h. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	<p>Transmitting with all kind of modulations, data rates.</p> <p>Transmitting mode.</p>
Final Test Mode:	<p>1Mbps of rate is the worst case of 802.11b;</p> <p>6Mbps of rate is the worst case of 802.11g ;</p> <p>6.5Mbps of rate is the worst case of 802.11n(HT20) ;</p> <p>13.5Mbps of rate is the worst case of 802.11n(HT40)</p> <p>Only the worst case is recorded in the report.</p>
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2390.000	66.46	-9.2	57.26	74	-16.74	PK	H
2390.000	42.26	-9.2	33.06	54	-20.94	AV	H
2400.000	63.85	-9.39	54.46	74	-19.54	PK	H
2400.000	40.75	-9.39	31.36	54	-22.64	AV	H
2390.000	65.46	-9.2	56.26	74	-17.74	PK	V
2390.000	40.17	-9.2	30.97	54	-23.03	AV	V
2400.000	65.62	-9.39	56.23	74	-17.77	PK	V
2400.000	41.76	-9.39	32.37	54	-21.63	AV	V

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2483.500	65.47	-9.29	56.18	74	-17.82	PK	H
2483.500	41.05	-9.29	31.76	54	-22.24	AV	H
2483.500	65.60	-9.29	56.31	74	-17.69	PK	V
2483.500	40.29	-9.29	31.00	54	-23.00	AV	V



Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2390.000	65.92	-9.2	56.72	74	-17.28	PK	H
2390.000	40.22	-9.2	31.02	54	-22.98	AV	H
2400.000	64.54	-9.39	55.15	74	-18.85	PK	H
2400.000	40.68	-9.39	31.29	54	-22.71	AV	H
2390.000	64.13	-9.2	54.93	74	-19.07	PK	V
2390.000	41.04	-9.2	31.84	54	-22.16	AV	V
2400.000	65.21	-9.39	55.82	74	-18.18	PK	V
2400.000	40.62	-9.39	31.23	54	-22.77	AV	V

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2483.500	66.01	-9.29	56.72	74	-17.28	PK	H
2483.500	41.85	-9.29	32.56	54	-21.44	AV	H
2483.500	65.35	-9.29	56.06	74	-17.94	PK	V
2483.500	42.89	-9.29	33.60	54	-20.40	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	66.16	-9.2	56.96	74	-17.04	PK	H
2390.000	40.20	-9.2	31.00	54	-23.00	AV	H
2400.000	63.78	-9.39	54.39	74	-19.61	PK	H
2400.000	40.73	-9.39	31.34	54	-22.66	AV	H
2390.000	63.78	-9.2	54.58	74	-19.42	PK	V
2390.000	40.52	-9.2	31.32	54	-22.68	AV	V
2400.000	65.36	-9.39	55.97	74	-18.03	PK	V
2400.000	41.03	-9.39	31.64	54	-22.36	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	64.85	-9.29	55.56	74	-18.44	PK	H
2483.500	42.45	-9.29	33.16	54	-20.84	AV	H
2483.500	64.33	-9.29	55.04	74	-18.96	PK	V
2483.500	41.97	-9.29	32.68	54	-21.32	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	66.28	-9.2	57.08	74	-16.92	PK	H
2390.000	41.02	-9.2	31.82	54	-22.18	AV	H
2400.000	65.11	-9.39	55.72	74	-18.28	PK	H
2400.000	41.71	-9.39	32.32	54	-21.68	AV	H
2390.000	64.06	-9.2	54.86	74	-19.14	PK	V
2390.000	40.84	-9.2	31.64	54	-22.36	AV	V
2400.000	64.65	-9.39	55.26	74	-18.74	PK	V
2400.000	42.24	-9.39	32.85	54	-21.15	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	66.24	-9.29	56.95	74	-17.05	PK	H
2483.500	40.70	-9.29	31.41	54	-22.59	AV	H
2483.500	64.09	-9.29	54.80	74	-19.20	PK	V
2483.500	42.87	-9.29	33.58	54	-20.42	AV	V

**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

## 6 Photographs - EUT Test Setup

Please refer to test setup file

30MHz~1GHz




Above 1GHz



Below 30MHz




Conducted emission Test Setup

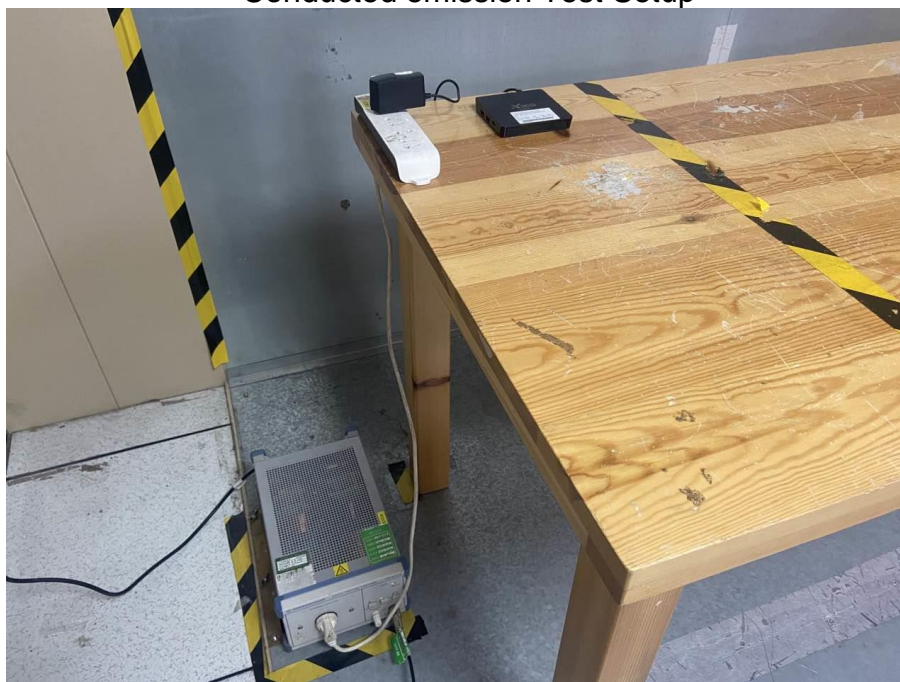


## 7 Photographs - EUT Constructional Details

### External Photos

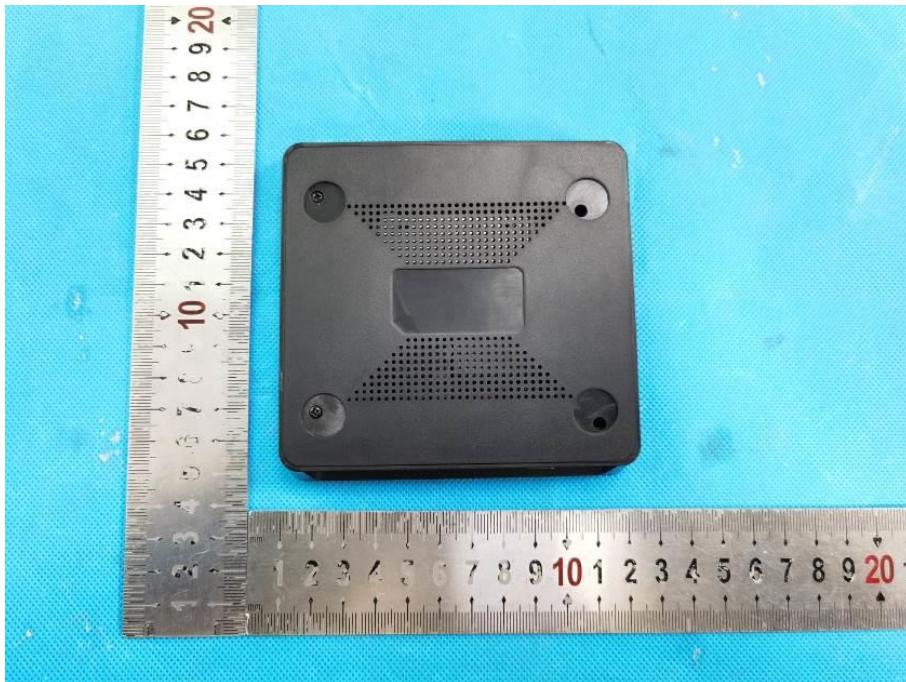






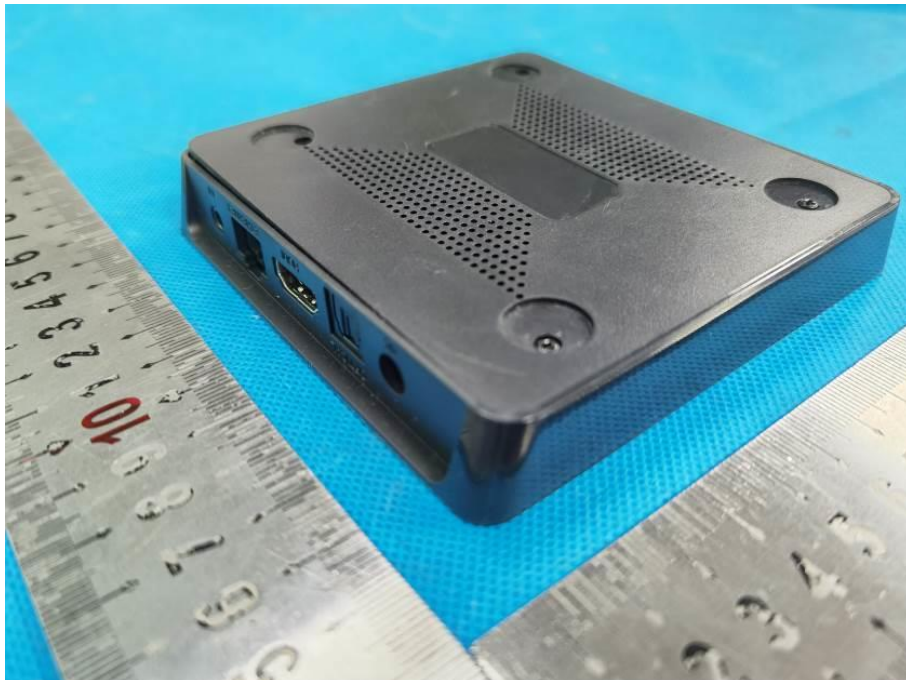



**Internal Photos**

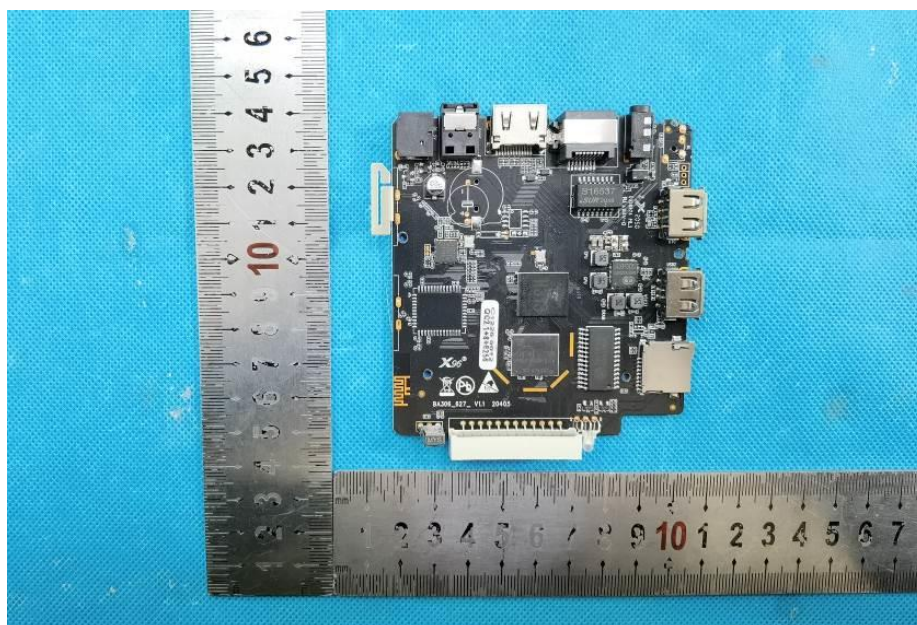

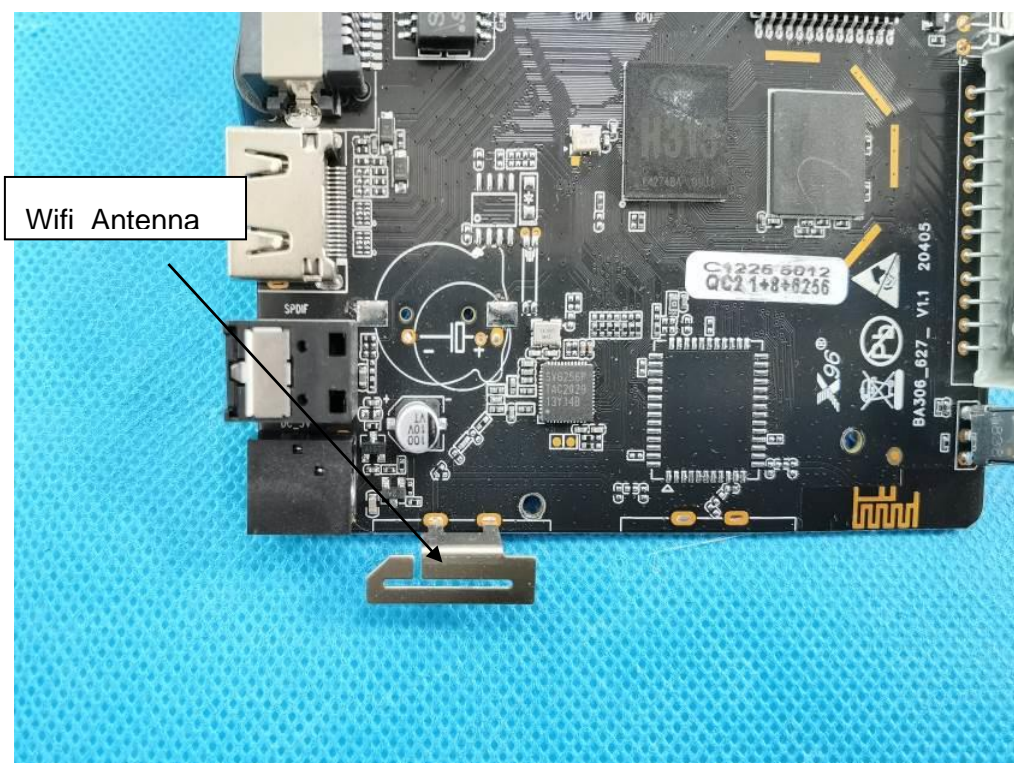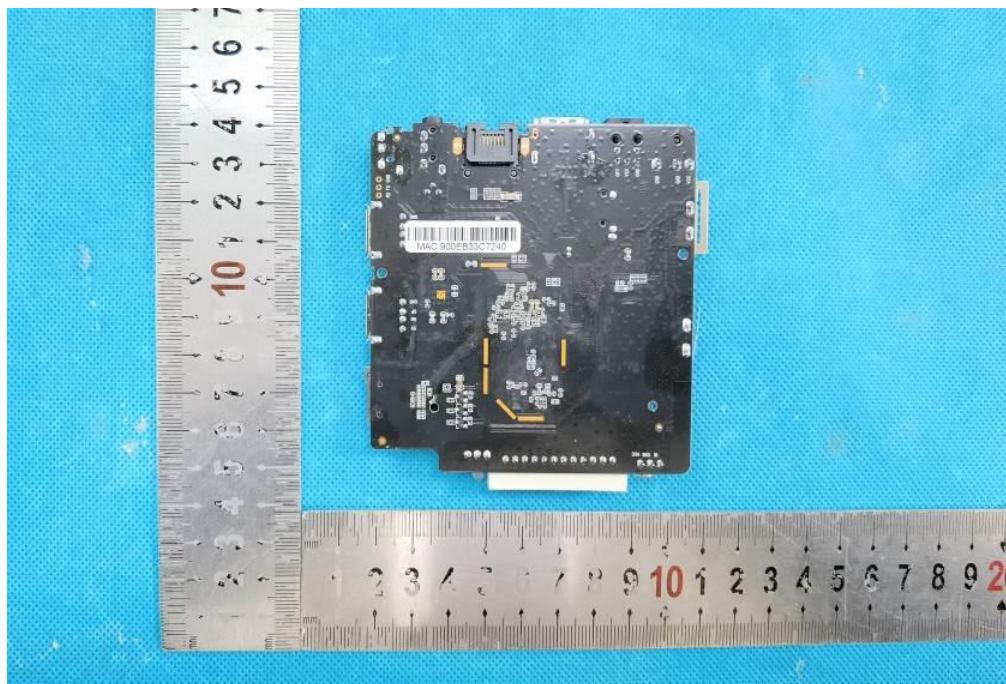

**THE END**