

# FCC TEST REPORT

For

Guangzhou Havit Technology Co.,LTD

Charging box for true wireless sports headphones

Model No.: G1W

Prepared For : Guangzhou Havit Technology Co.,LTD  
Address : ROOM 1307,13F,PHASE 2 B,C BUILDING OF POLY WORLD TRADE  
CENTER,NO.1000,XINGANG EAST ROAD,HAIZHU  
CITY,GUANGDONG PROVINCE, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited  
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei  
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,  
China.518102  
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW180319001-01  
Date of Test : Mar. 23~Apr. 20, 2018  
Date of Report : Apr. 20, 2018

# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	7
1.7. Measurement Uncertainty.....	8
1.8. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	16
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	18
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	19
APPENDIX III -- INTERNAL PHOTOGRAPH.....	23

# TEST REPORT

Applicant : Guangzhou Havit Technology Co.,LTD  
Manufacturer : Guangzhou Havit Technology Co.,LTD  
Product Name : Charging box for true wireless sports headphones  
Model No. : G1W  
Trade Mark : HAVIT  
Rating(s) : Input: DC 5V, 1A (with DC 3.7V, 720 mAh Battery inside)

**Test Standard(s) : FCC Part 18 Subpart C 2017  
Test procedures: FCC MP5-5:1986**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 18 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Mar. 23~Apr. 20, 2018

Prepared by :



*Winkey Wang*

(Tested Engineer / Winkey Wang)

Reviewer :

*Tangcy. T.*

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

*Tom Chen*

(Manager / Tom Chen)



# 1. General Information

## 1.1. Client Information

Applicant	:	Guangzhou Havit Technology Co.,LTD
Address	:	ROOM 1307,13F,PHASE 2 B,C BUILDING OF POLY WORLD TRADE CENTER,NO.1000,XINGANG EAST ROAD,HAIZHU CITY,GUANGDONG PROVINCE, China
Manufacturer	:	Guangzhou Havit Technology Co.,LTD
Address	:	ROOM 1307,13F,PHASE 2 B,C BUILDING OF POLY WORLD TRADE CENTER,NO.1000,XINGANG EAST ROAD,HAIZHU CITY,GUANGDONG PROVINCE, China

## 1.2. Description of Device (EUT)

Product Name	:	Charging box for true wireless sports headphones	
Model No.	:	G1W	
Trade Mark	:	HAVIT	
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter	
Product Description	:	Operation Frequency:	110-220KHz
	:	Modulation Type:	MSK
	:	Antenna Type:	Loop Antenna
	:	Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

## 1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: ZTE M/N: STC-A2050I1000USBA-C S/N: 201202102100876 Input: 100-240V~50/60Hz 0.3A Output: DC 5V, 1000mA
---------	---	---

### 1.4. Description of Test Modes



To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging mode
Mode 2	Wireless Charge Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	Charging mode
Mode 2	Wireless Charge Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Charging mode
Mode 2	Wireless Charge Mode

### 1.5. Description Of Test Setup

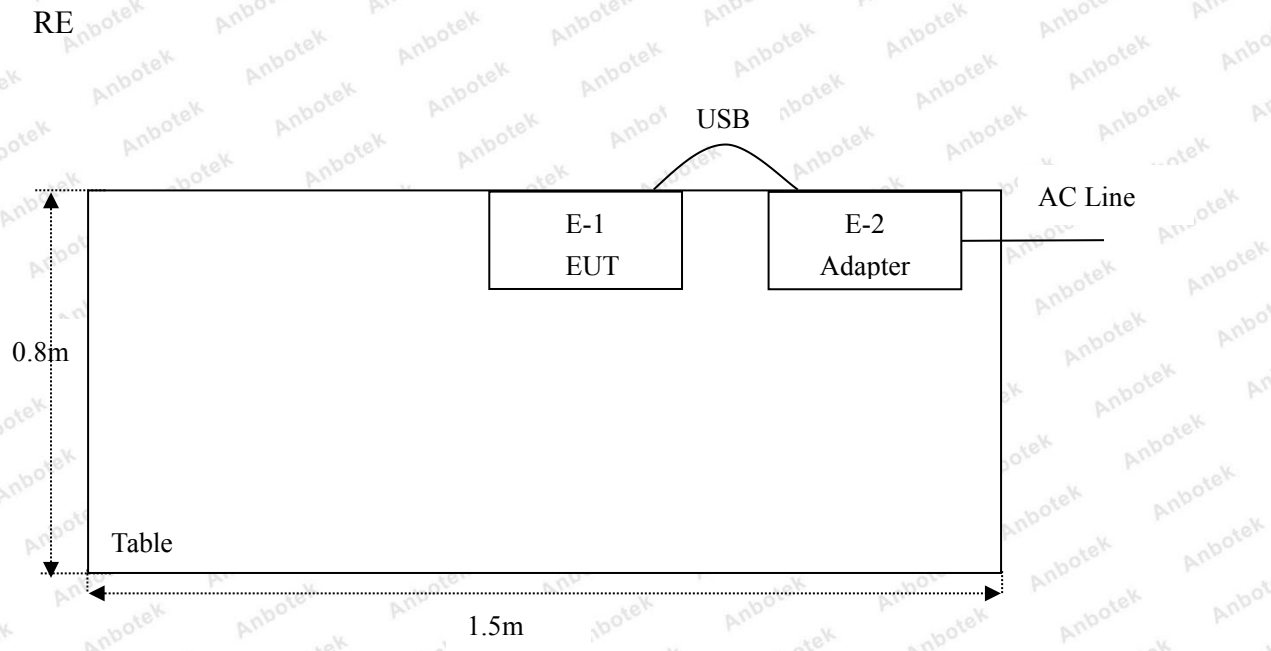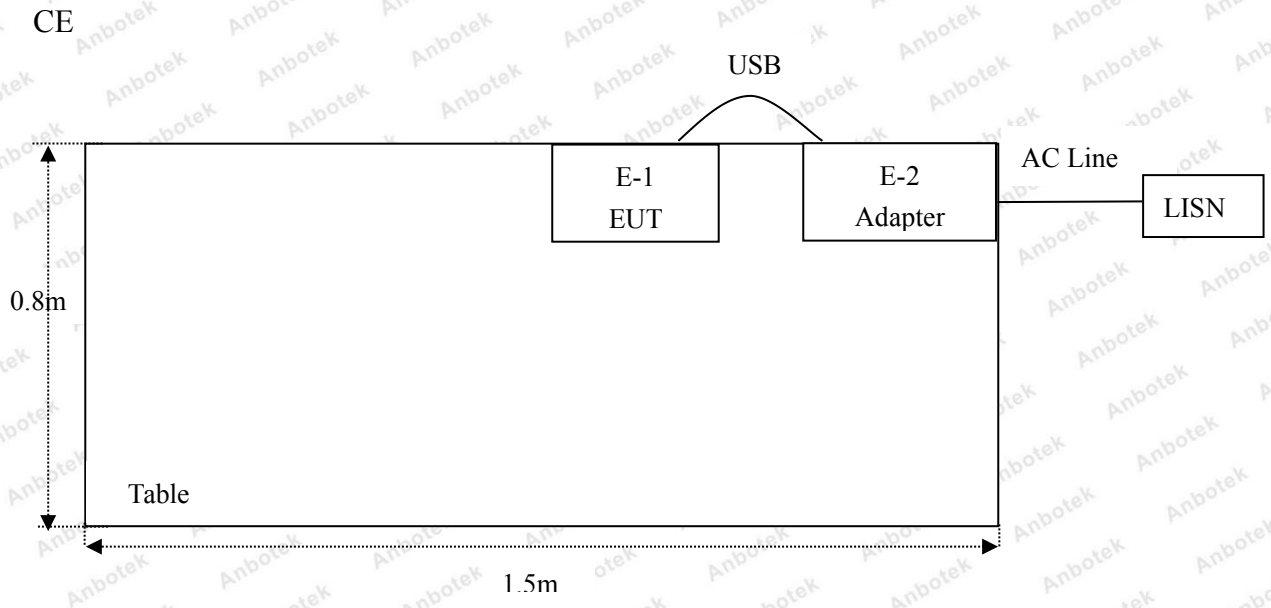



### 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 17, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 17, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 17, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	Nov. 17, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 17, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Nov. 17, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 20, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Nov. 17, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	Nov. 17, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Nov. 17, 2017	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 18, 2017	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 17, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 17, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 18, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 18, 2017	1 Year
20.	DC Power Supply	LW	TPR-6410D	349315	Nov. 01, 2017	1 Year
21.	Constant Temperature Humidity Chamber	Sertep	ZJ-HWHS80 B	ZJ-17042804	Nov. 01, 2017	1 Year

### 1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

### 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

#### ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

#### Test Location

All Emissions tests were performed at Shenzhen Anbotek Compliance Laboratory Limited. at 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 18, Paragraph 18.307(b)	Conducted Emission Test	PASS
FCC Part 18, Paragraph 18.305(b)	Spurious Emission	PASS


### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part18 Section 18.307		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
(2) The lower limit shall apply at the transition frequency.

#### 3.2. Test Setup

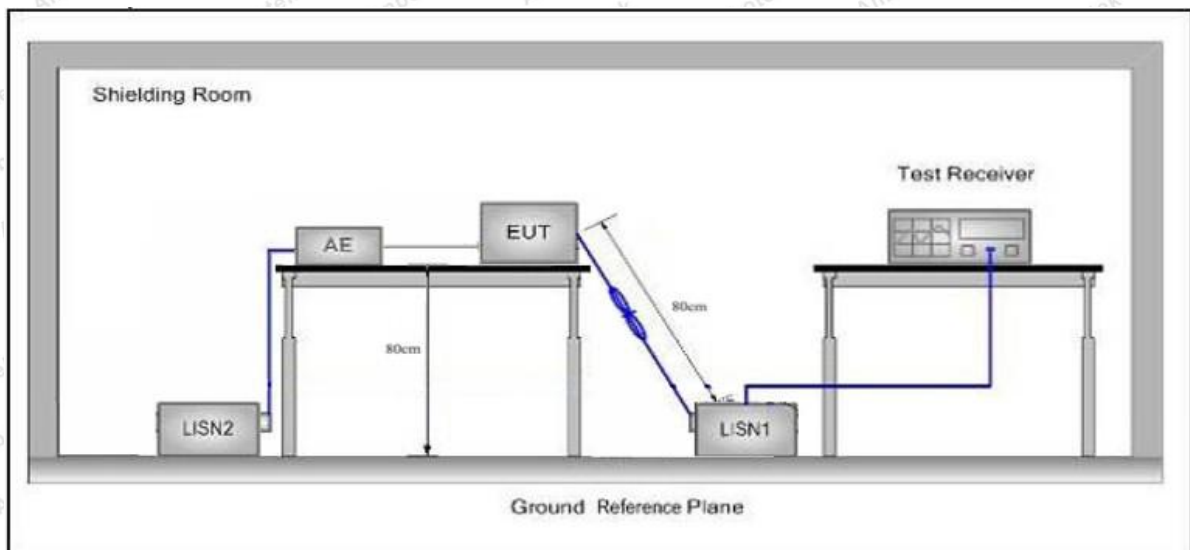

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed on Conducted Emission Measurement.


The bandwidth of test receiver (ESCI) set at 9kHz.  
The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

Please to see the following pages

**Conducted Emission Test Data**

Test Site: I# Shielded Room  
 Operating Condition: Charge Mode  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.:22.3°C Hum.:57%

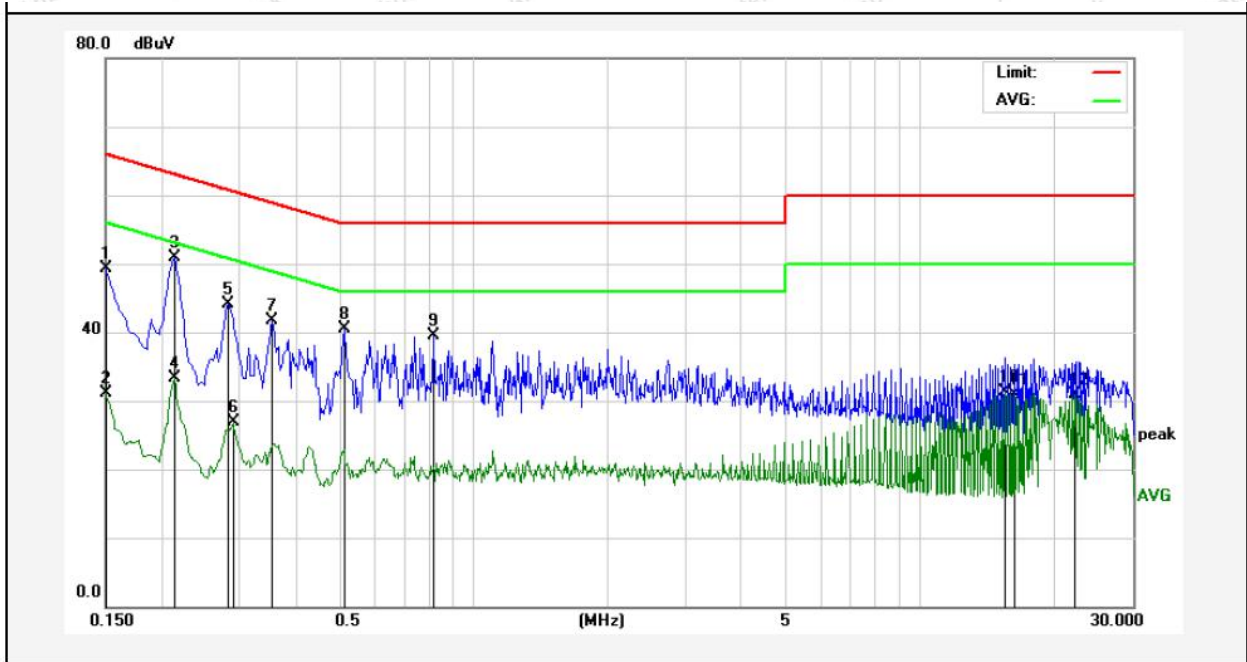


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	29.37	19.90	49.27	65.99	-16.72	QP	
2	0.1500	11.26	19.90	31.16	55.99	-24.83	AVG	
3	0.2140	31.04	19.90	50.94	63.04	-12.10	QP	
4	0.2140	13.33	19.90	33.23	53.04	-19.81	AVG	
5	0.2819	24.29	19.89	44.18	60.76	-16.58	QP	
6	0.2900	6.99	19.89	26.88	50.52	-23.64	AVG	
7	0.3540	21.75	19.91	41.66	58.87	-17.21	QP	
8	0.5140	20.61	19.98	40.59	56.00	-15.41	QP	
9	0.8139	19.49	20.07	39.56	56.00	-16.44	QP	
10	15.5260	10.94	20.27	31.21	50.00	-18.79	AVG	
11	16.2500	10.57	20.28	30.85	50.00	-19.15	AVG	
12	22.1980	10.50	20.31	30.81	50.00	-19.19	AVG	



**Conducted Emission Test Data**


Test Site: 1# Shielded Room  
 Operating Condition: Charge Mode  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.:22.3°C Hum.:57%

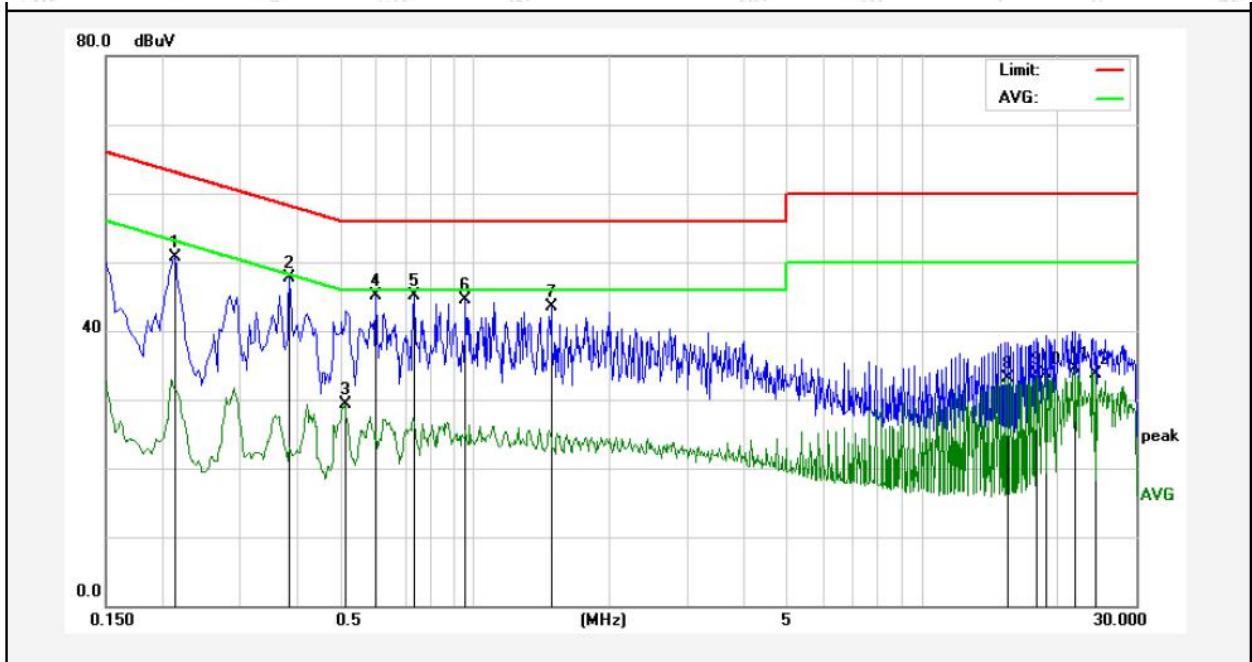

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2140	30.86	19.90	50.76	63.04	-12.28	QP	
2	0.3860	27.72	19.93	47.65	58.15	-10.50	QP	
3	0.5140	9.28	19.98	29.26	46.00	-16.74	AVG	
4	0.6020	25.15	20.01	45.16	56.00	-10.84	QP	
5	0.7340	25.13	20.05	45.18	56.00	-10.82	QP	
6	0.9580	24.30	20.11	44.41	56.00	-11.59	QP	
7	1.4819	23.31	20.13	43.44	56.00	-12.56	QP	
8	15.5180	12.86	20.27	33.13	50.00	-16.87	AVG	
9	17.9660	13.38	20.31	33.69	50.00	-16.31	AVG	
10	18.9380	13.35	20.32	33.67	50.00	-16.33	AVG	
11	21.9500	14.17	20.32	34.49	50.00	-15.51	AVG	
12	24.3700	13.43	20.29	33.72	50.00	-16.28	AVG	

**Conducted Emission Test Data**

Test Site: I# Shielded Room  
 Operating Condition: Charge Mode  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.:22.3°C Hum.:57%

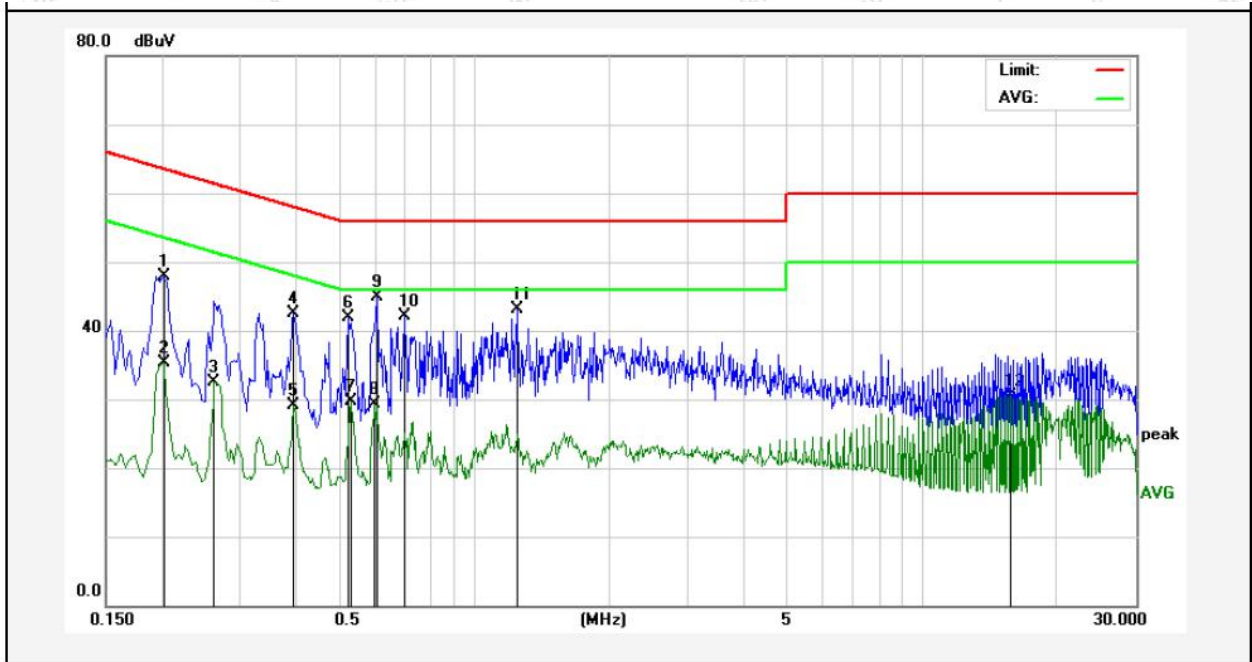


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2020	28.01	19.90	47.91	63.52	-15.61	QP	
2	0.2020	15.48	19.90	35.38	53.52	-18.14	AVG	
3	0.2620	12.60	19.89	32.49	51.36	-18.87	AVG	
4	0.3940	22.50	19.93	42.43	57.98	-15.55	QP	
5	0.3940	9.21	19.93	29.14	47.98	-18.84	AVG	
6	0.5220	21.99	19.99	41.98	56.00	-14.02	QP	
7	0.5299	9.73	19.99	29.72	46.00	-16.28	AVG	
8	0.5980	9.34	20.01	29.35	46.00	-16.65	AVG	
9	0.6060	24.81	20.01	44.82	56.00	-11.18	QP	
10	0.6980	21.98	20.04	42.02	56.00	-13.98	QP	
11	1.2460	22.89	20.12	43.01	56.00	-12.99	QP	
12	15.7740	10.28	20.27	30.55	50.00	-19.45	AVG	



**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: Charge Mode  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.:22.3°C Hum.:57%

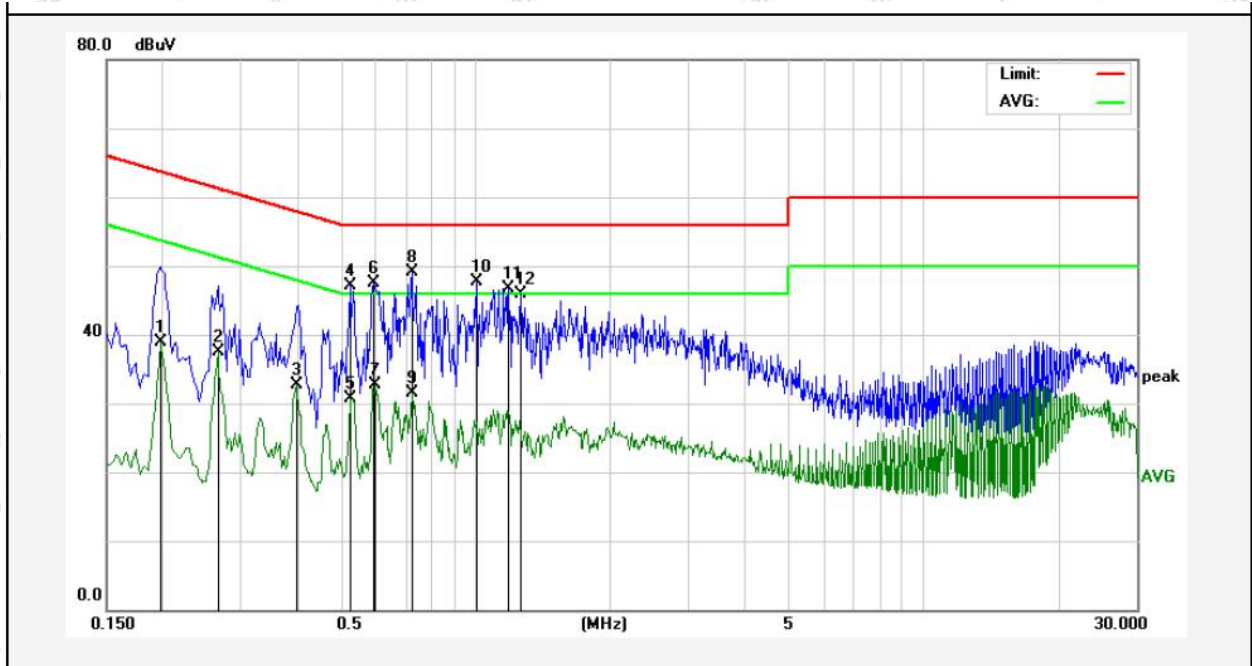

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1980	18.92	19.90	38.82	53.69	-14.87	AVG	
2	0.2660	17.54	19.89	37.43	51.24	-13.81	AVG	
3	0.3980	12.83	19.93	32.76	47.89	-15.13	AVG	
4	0.5260	27.08	19.99	47.07	56.00	-8.93	QP	
5	0.5299	10.64	19.99	30.63	46.00	-15.37	AVG	
6	0.5940	27.51	20.01	47.52	56.00	-8.48	QP	
7	0.5980	12.69	20.01	32.70	46.00	-13.30	AVG	
8	0.7220	28.96	20.05	49.01	56.00	-6.99	QP	
9	0.7260	11.52	20.05	31.57	46.00	-14.43	AVG	
10	1.0100	27.57	20.12	47.69	56.00	-8.31	QP	
11	1.1860	26.56	20.12	46.68	56.00	-9.32	QP	
12	1.2660	25.74	20.13	45.87	56.00	-10.13	QP	



## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part18 B Section 18.305			
Test Limit	Frequency (MHz)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~30MHz	63.5	Quasi-peak	3
	30MHz~88MHz	40.0	Quasi-peak	3
	88MHz~216MHz	43.5	Quasi-peak	3
	216MHz~1000MHz	46.0	Quasi-peak	3

**Remark:**

- (1)The lower limit shall apply at the transition frequency.
- (2) According to the article 18.305(b), The operating frequency is non-ISM frequency;the RF Power generated by equipment is below 500(watts).

### 4.2. Test Setup

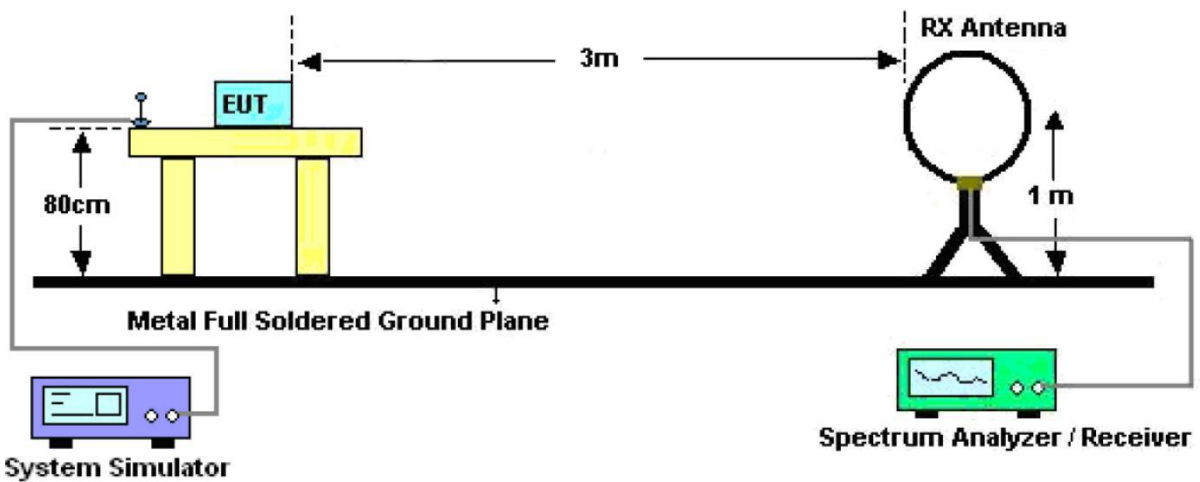


Figure 1. Below 30MHz

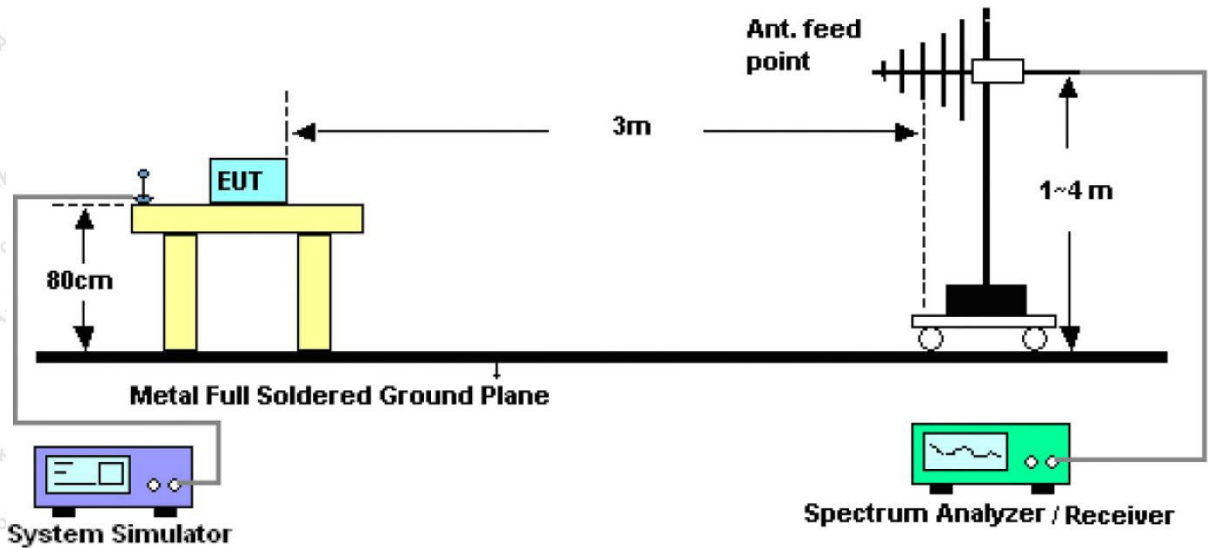


Figure 2. 30MHz to 1GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW  $\geq$  RBW, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW  $\geq$  RBW, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:


RBW = 100kHz, VBW  $\geq$  RBW, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

### 4.4. Test Data

**PASS**

(Between 0.009MHz -30MHz)

<b>Job No.:</b>	<b>SZAWW180319001-01</b>	<b>Polarization:</b>	
<b>Standard:</b>	<b>FCC PART18 C _3m</b>	<b>Power Source:</b>	<b>AC 120V, 60Hz for adapter</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>24.4(C)/50%RH</b>
<b>Test Mode:</b>	<b>Mode 2</b>	<b>Distance:</b>	<b>3m</b>

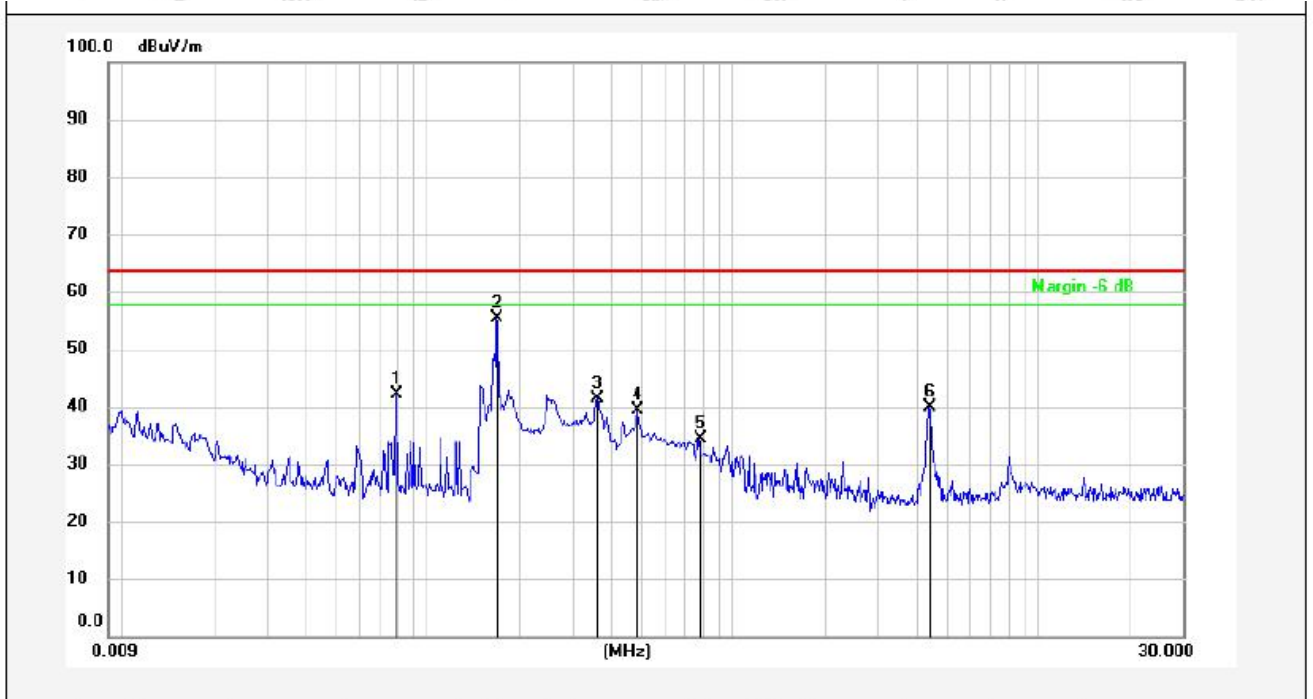

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0791	21.85	20.33	42.18	63.52	-21.34	QP			
2	0.1683	35.03	20.28	55.31	63.52	-8.21	QP			
3	0.3607	21.28	20.21	41.49	63.52	-22.03	QP			
4	0.4900	19.07	20.20	39.27	63.52	-24.25	QP			
5	0.7799	14.24	20.17	34.41	63.52	-29.11	QP			
6	4.4100	19.74	20.20	39.94	63.52	-23.58	QP			



## APPENDIX I-- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test






## APPENDIX II -- EXTERNAL PHOTOGRAPH










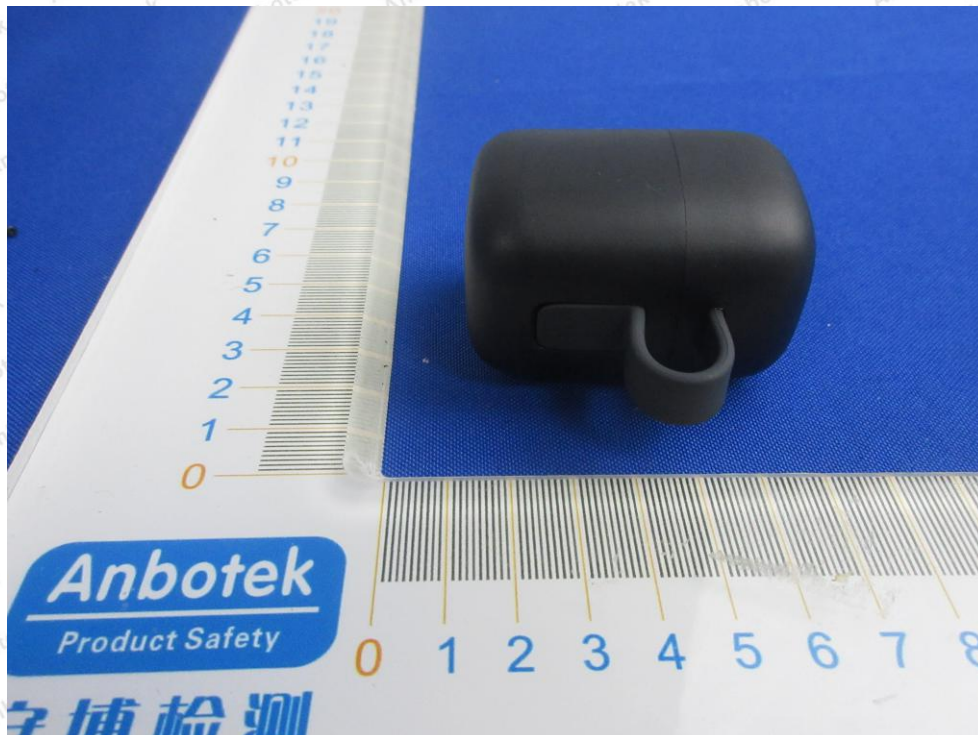







### APPENDIX III -- INTERNAL PHOTOGRAPH

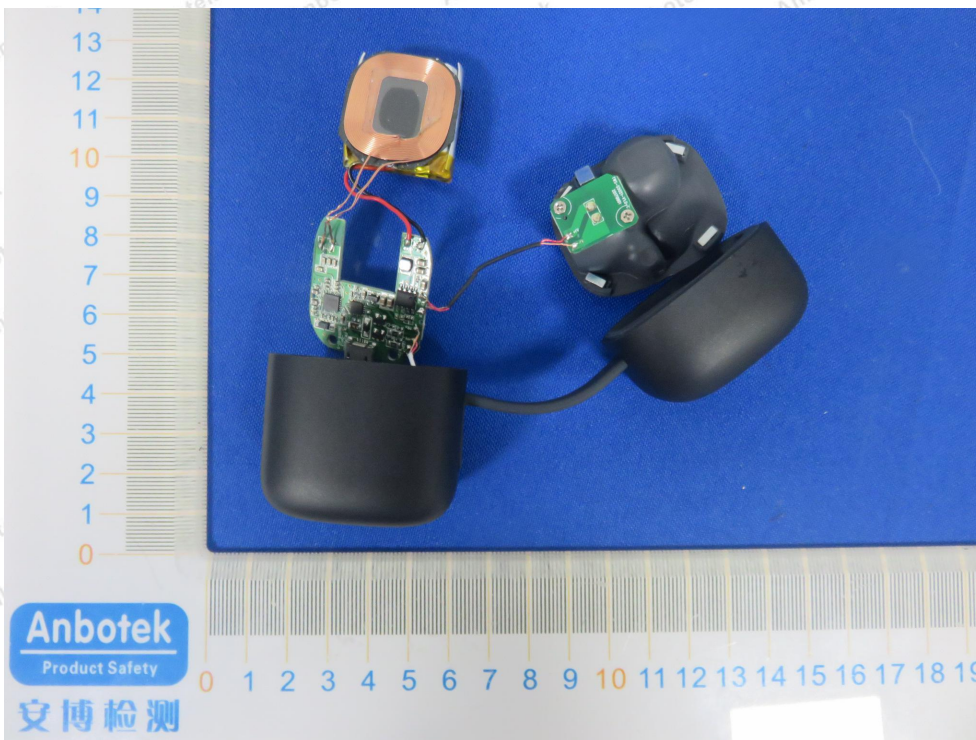





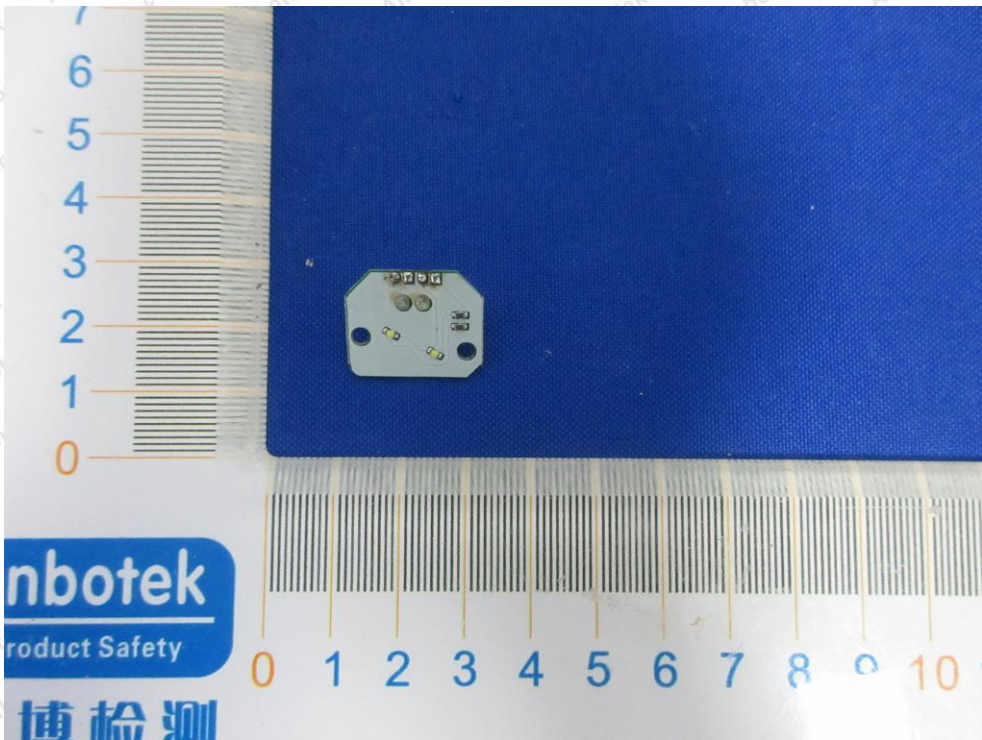





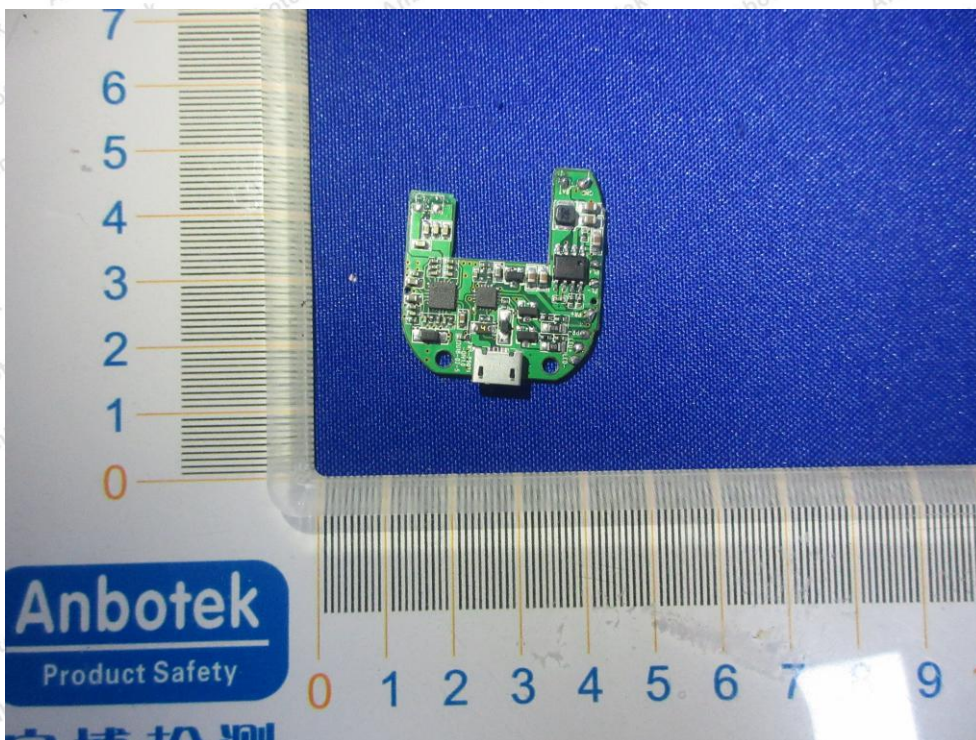





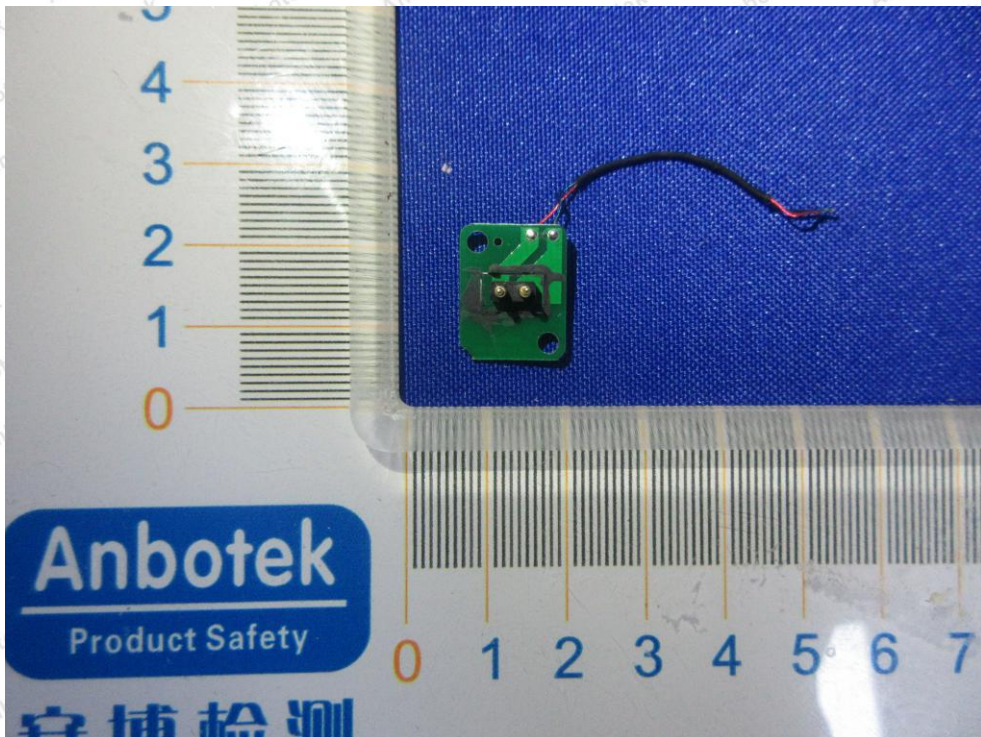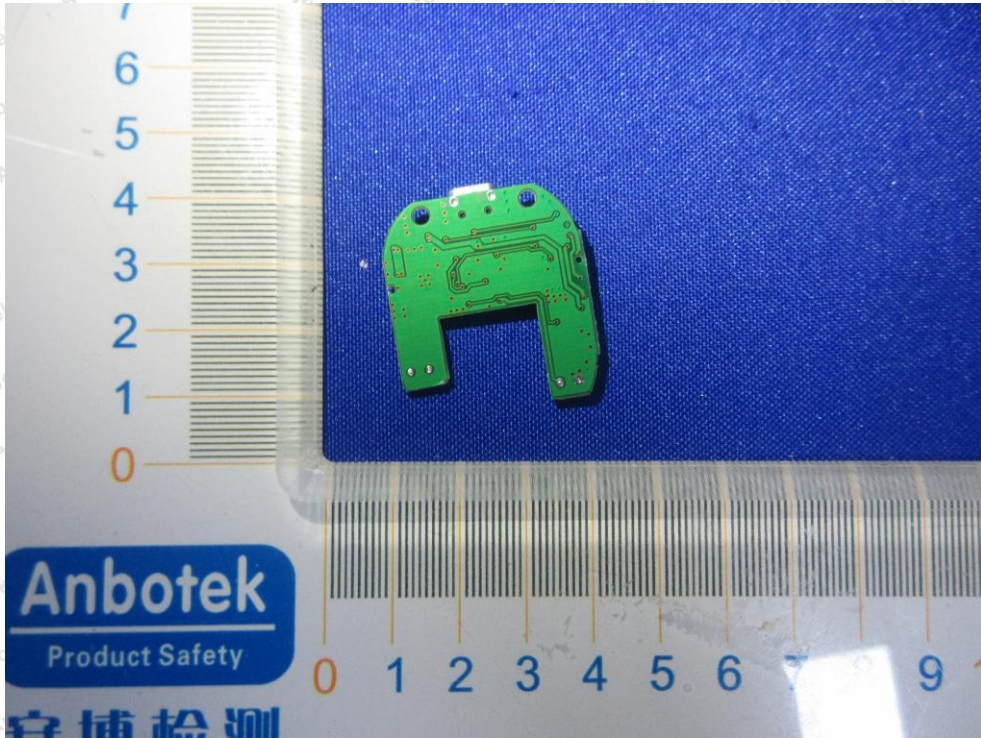




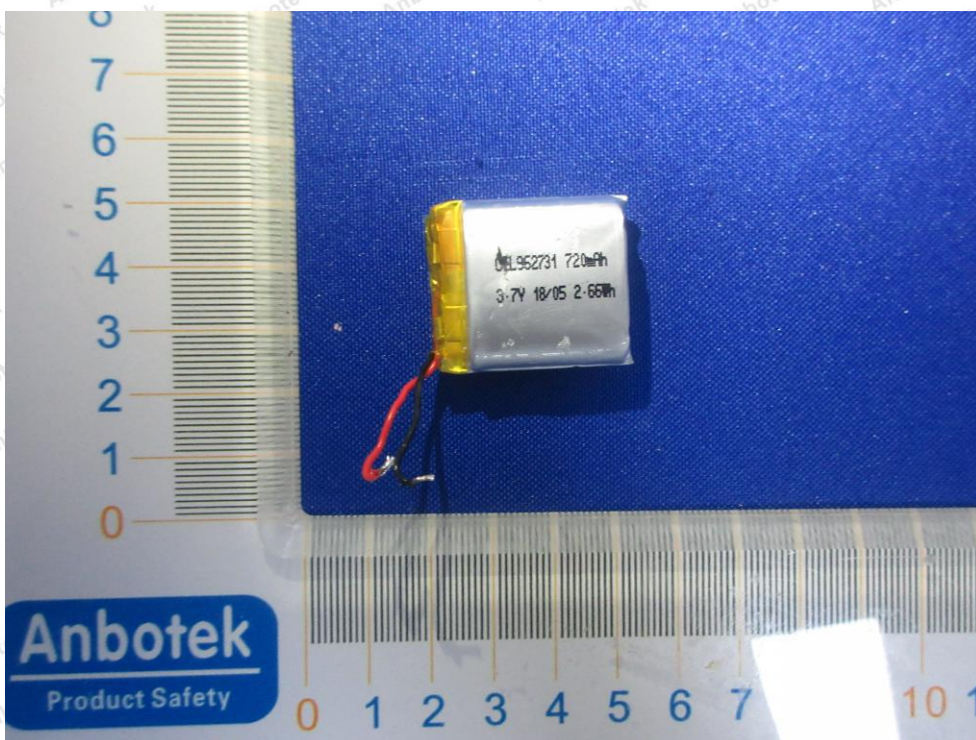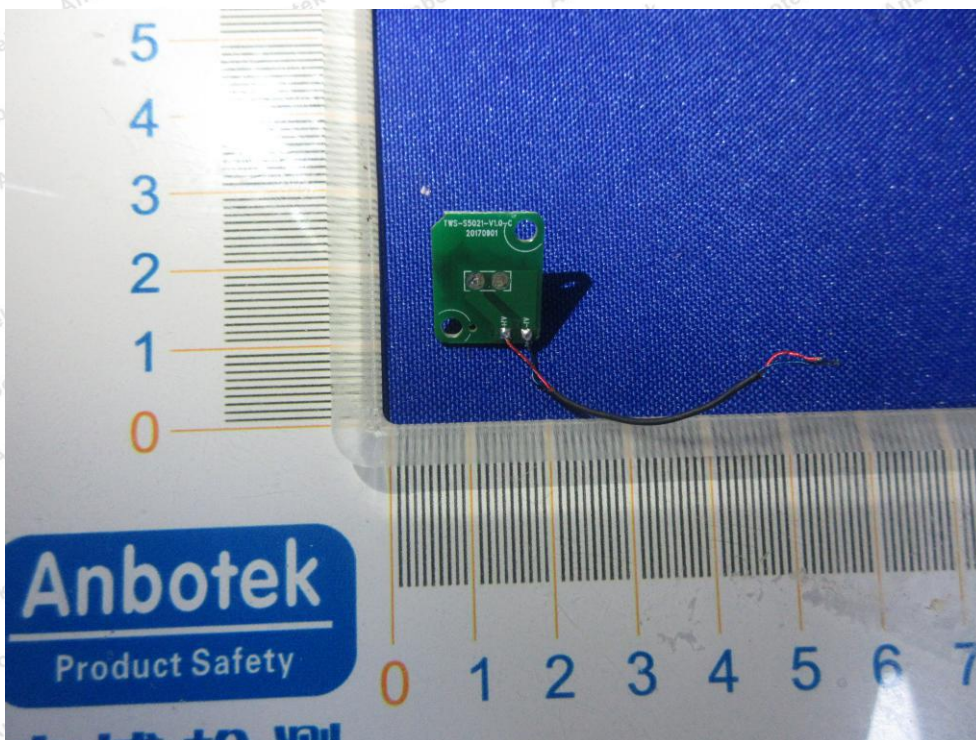



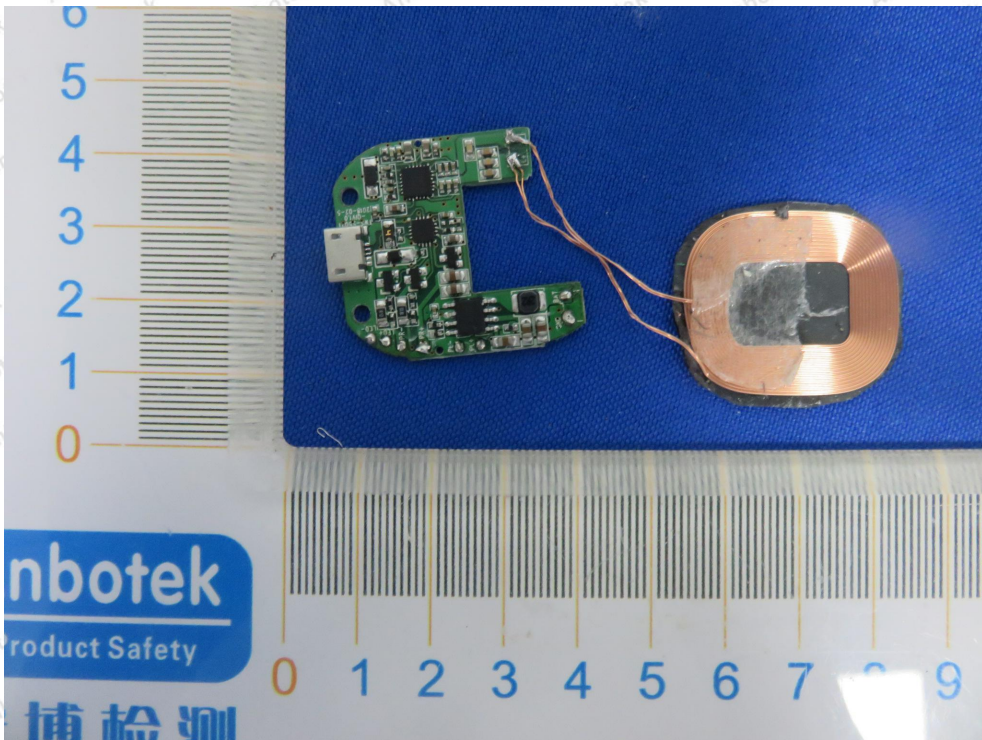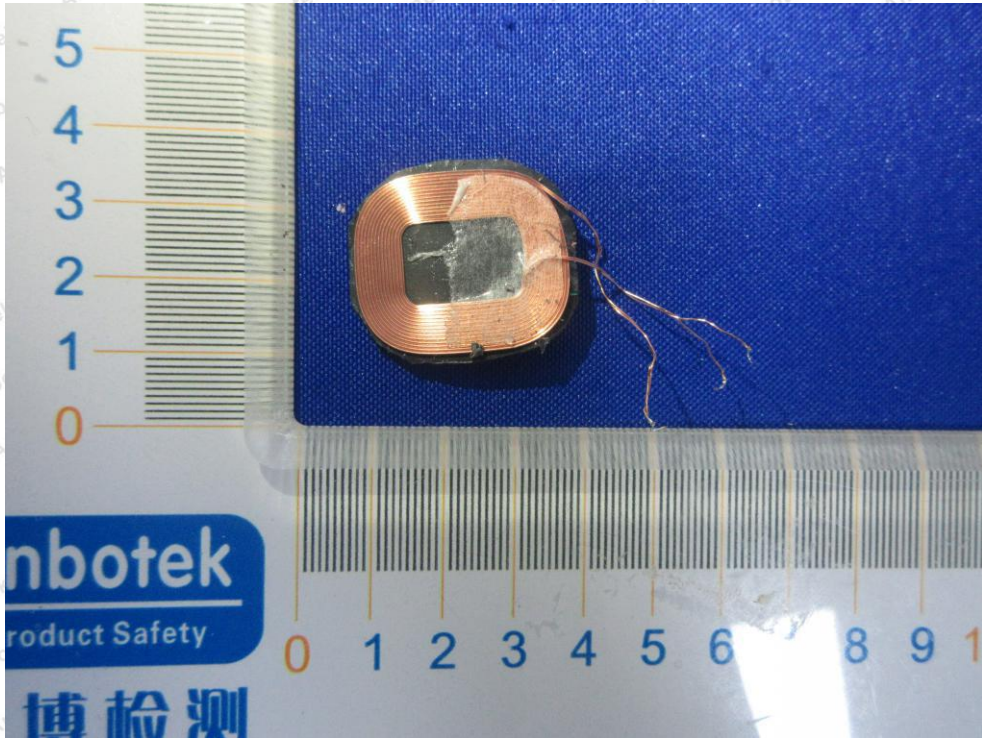



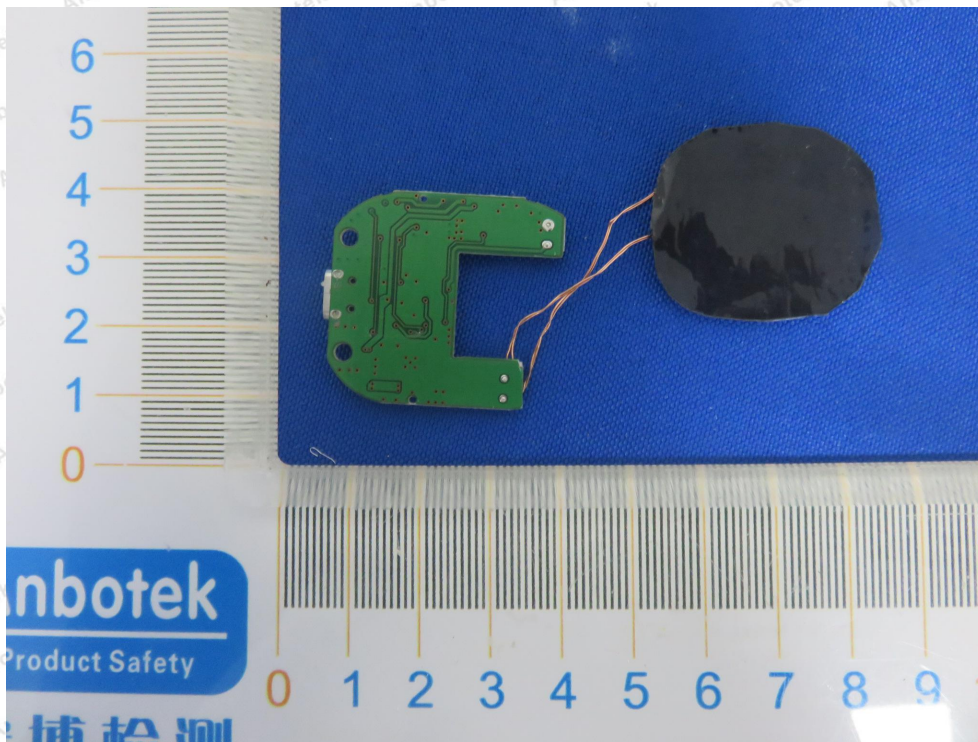

End of Report