

FCC TEST REPORT

For

Guangzhou Havit Technology Co., LTD

Wireless Vertical Ergonomic Mouse

Model No.: HV-MS55GT

Prepared For : Guangzhou Havit Technology Co., LTD
ROOM 1307, 13F, PHASE 2 B, C BUILDING OF POLY WORLD
Address : TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU,
GUANGDONG, 510000 China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217090071W
Date of Test : Sept. 23~29, 2017
Date of Report : Sept. 29, 2017

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	5
1.6. Description of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	7
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiated Emission and Band Edge.....	11
4.1. Test Standard and Limit.....	11
4.2. Test Setup.....	12
4.3. Test Procedure.....	13
4.4. Test Data.....	13
5. 20dB Bandwidth Test.....	23
5.1. Test Standard and Limit.....	23
5.2. Test Setup.....	23
5.3. Test Procedure.....	23
5.4. Test Data.....	23
6. Antenna Requirement.....	26
6.1. Test Standard and Requirement.....	26
6.2. Antenna Connected Construction.....	26
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	27
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	29
APPENDIX III -- INTERNAL PHOTOGRAPH.....	32

TEST REPORT

Applicant : Guangzhou Havit Technology Co., LTD
Manufacturer : Guangzhou Havit Technology Co., LTD
Product Name : Wireless Vertical Ergonomic Mouse
Model No. : HV-MS55GT
Trade Mark : HAVIT
Rating(s) : DC 3V, 10mA with "AAA"*2 Battery inside

Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Sept. 23~29, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Tangcy. T.

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Guangzhou Havit Technology Co., LTD
Address	:	ROOM 1307, 13F, PHASE 2 B, C BUILDING OF POLY WORLD TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU, GUANGDONG, 510000 China
Manufacturer	:	Guangzhou Havit Technology Co., LTD
Address	:	ROOM 1307, 13F, PHASE 2 B, C BUILDING OF POLY WORLD TRADE CENTER, NO.1000, XINGANG EAST ROAD, HAIZHU, GUANGDONG, 510000 China

1.2. Description of Device (EUT)

Product Name	:	Wireless Vertical Ergonomic Mouse	
Model No.	:	HV-MS55GT	
Trade Mark	:	HAVIT	
Test Power Supply	:	DC 3V By Battery	
Product Description	:	Operation Frequency:	2408-2474MHz
		Number of Channel:	34 Channels
		Modulation Type:	FSK
		Antenna Type:	PCB Antenna
		Antenna Gain(Peak):	-2.3 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

--	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Mode
Mode 2	CH01
Mode 3	CH18
Mode 4	CH34

For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Mode


For Radiated Emission	
Final Test Mode	Description
Mode 2	CH01
Mode 3	CH18
Mode 4	CH34

1.5. List of Channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2408	10	2426	19	2444	28	2462
2	2410	11	2428	20	2446	29	2464
3	2412	12	2430	21	2448	30	2466
4	2414	13	2432	22	2450	31	2468
5	2416	14	2434	23	2452	32	2470
6	2418	15	2436	24	2454	33	2472
7	2420	16	2438	25	2456	34	2474
8	2422	17	2440	26	2458	/	/
9	2424	18	2442	27	2460	/	/

1.6. Description of Test Setup

RE

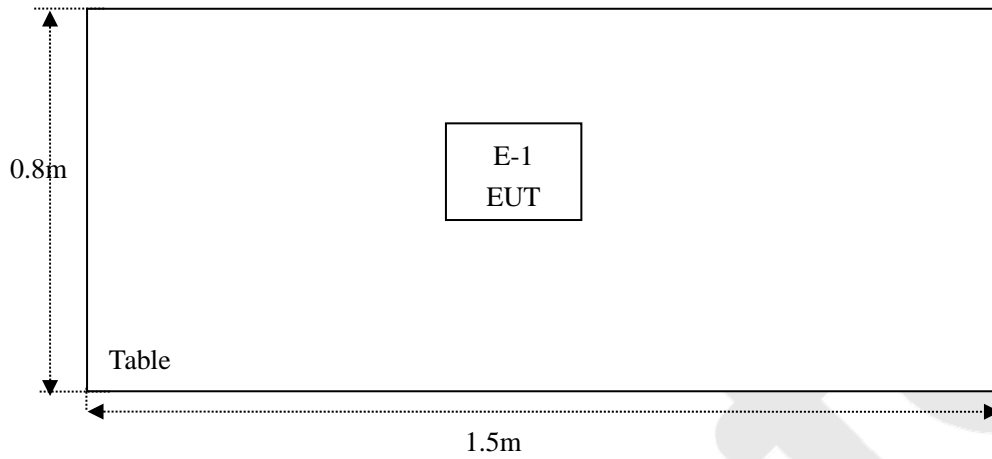

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	May 27, 2017	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	Power Sensor	DAER	RPR3006W	15I00041SN045	May 27, 2017	1 Year
13.	Power Sensor	DAER	RPR3006W	15I00041SN046	May 27, 2017	1 Year
14.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
17.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
18.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80 B	ZJ-17042804	Mar. 03, 2017	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Designation No.: CN5023

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation CN5023, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited.

at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

All Emissions tests (Above 18GHz) were performed at

MRT Technology (Suzhou) Co., Ltd.

D8 Building, Youxin Industrial Park, No. 2 Tina'ed Wuzhong Economic Development Zone, Suzhou, Jiangsu, China

Designation Number: CN1166

Test Firm Registration Number: 893164

2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	N/A
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS

Remark: "N/A" is an abbreviation for Not Applicable.


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

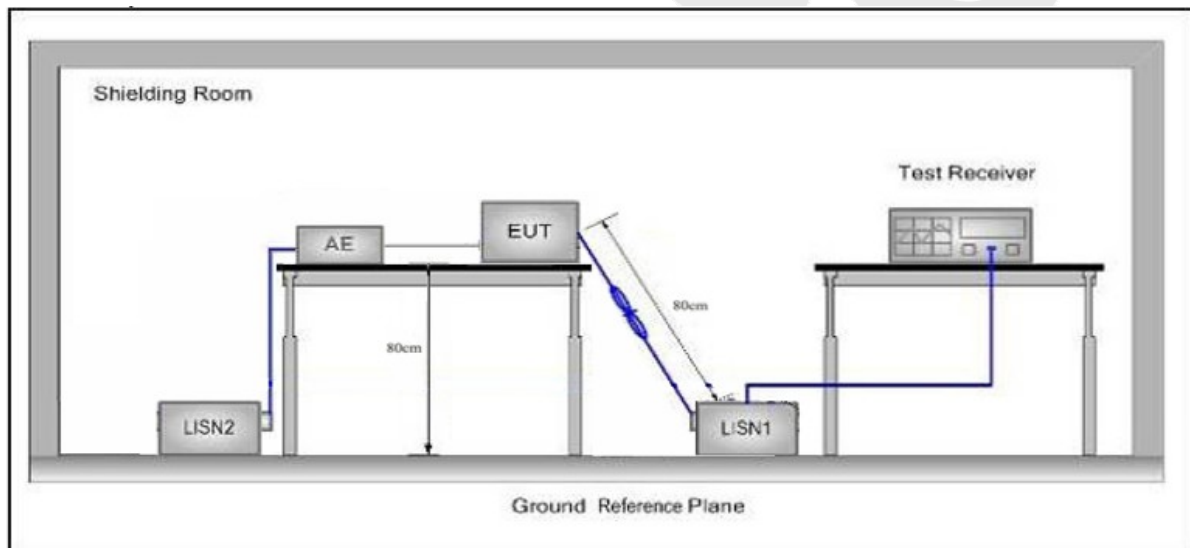

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

The EUT is powered by DC 3V battery inside, so there is no need to conduct this test.

4. Radiated Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

Remark:

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

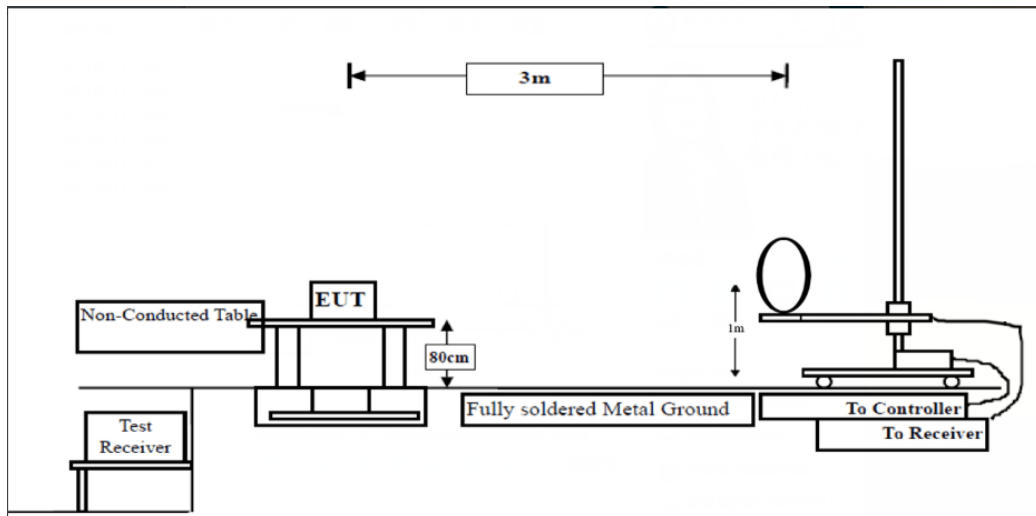


Figure 1. Below 30MHz

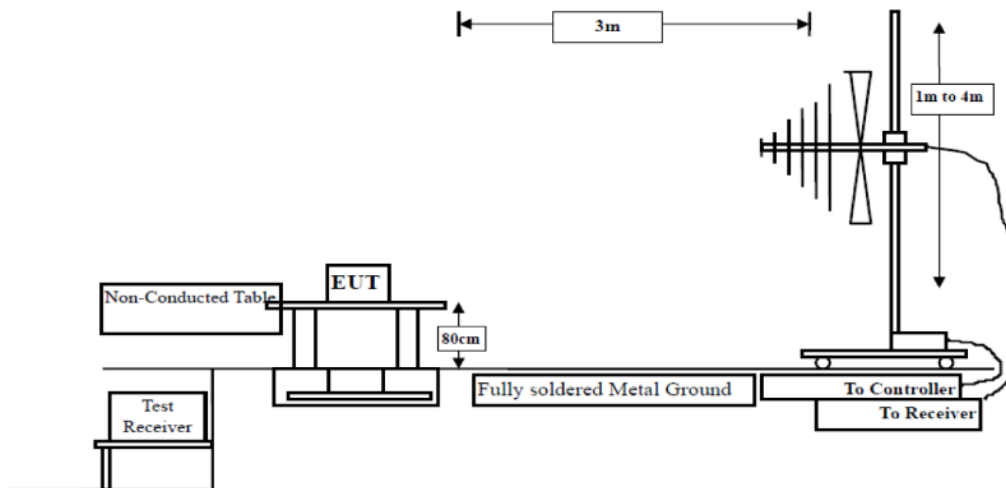


Figure 2. 30MHz to 1GHz

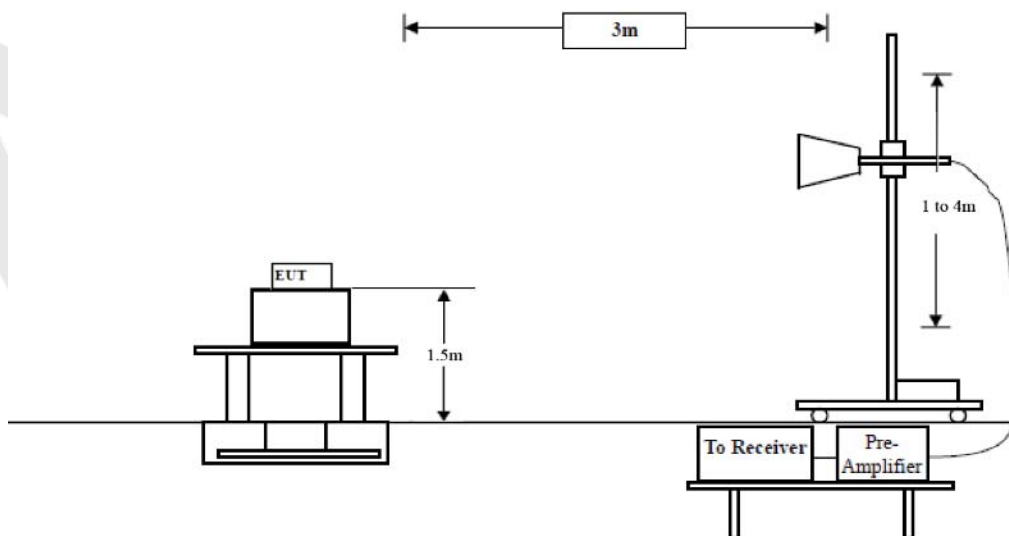


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)

Job No.: 0217090071W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
 Standard: FCC PART 15C Power Source: DC 3V
 Test Mode: TX Mode Polarization: Horizontal

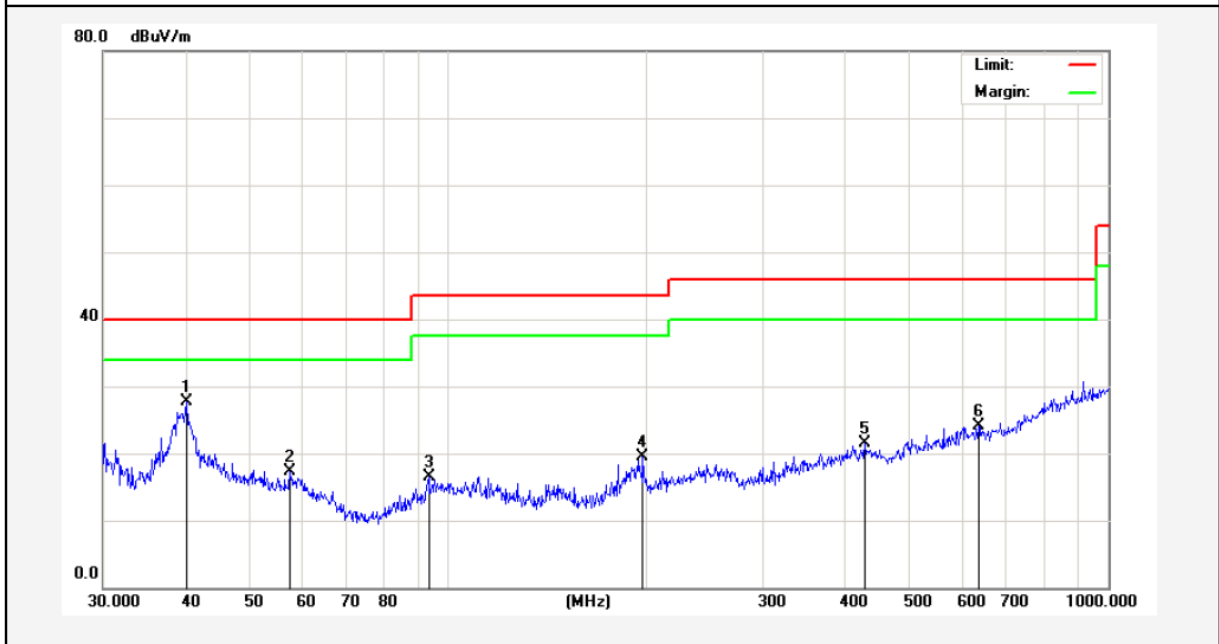


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.1347	38.65	-10.92	27.73	40.00	-12.27	QP	300	13	
2	57.5939	32.43	-15.17	17.26	40.00	-22.74	QP	300	42	
3	93.4402	38.06	-21.60	16.46	43.50	-27.04	QP	300	101	
4	197.2001	40.44	-20.89	19.55	43.50	-23.95	QP	300	147	
5	428.0193	33.90	-12.31	21.59	46.00	-24.41	QP	300	234	
6	636.1340	34.33	-10.24	24.09	46.00	-21.91	QP	300	296	



Test Results (30~1000MHz)

Job No.: 0217090071W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
 Standard: FCC PART 15C Power Source: DC 3V
 Test Mode: TX Mode Polarization: Vertical

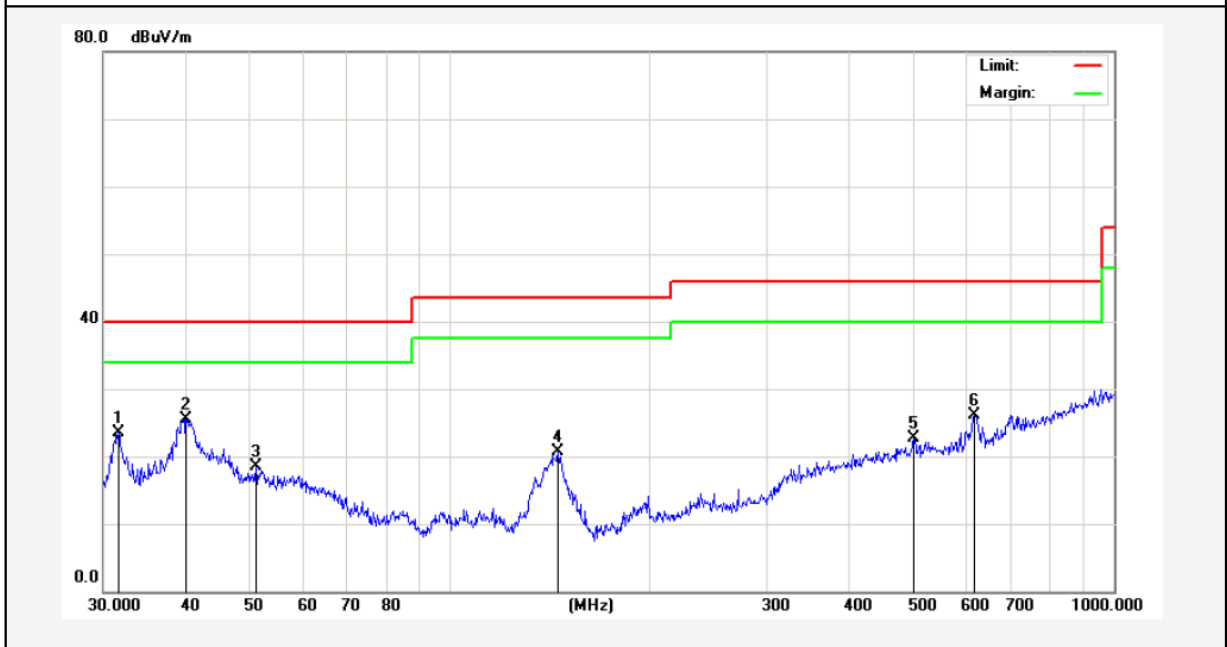

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.6202	39.76	-16.17	23.59	40.00	-16.41	QP	300	14	
2	39.9942	36.42	-10.87	25.55	40.00	-14.45	QP	300	52	
3	50.9420	33.17	-14.63	18.54	40.00	-21.46	QP	300	141	
4	145.3506	39.14	-18.41	20.73	43.50	-22.77	QP	300	196	
5	499.4247	33.68	-10.96	22.72	46.00	-23.28	QP	300	211	
6	616.3718	35.18	-9.11	26.07	46.00	-19.93	QP	300	274	



Test Results (Above 1000MHz)

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2408.0000	90.17	31.21	2.17	35.30	88.25	114.00	-25.75	V	Peak
2408.0000	81.74	31.21	2.17	35.30	79.82	94.00	-14.18	V	AVG
4816.0000	51.44	34.01	2.56	34.71	53.30	74.00	-20.70	V	Peak
4816.0000	43.55	34.01	2.56	34.71	45.41	54.00	-8.59	V	AVG
7224.0000	42.89	36.16	2.98	35.15	46.88	74.00	-27.12	V	Peak
7224.0000	35.66	36.16	2.98	35.15	39.65	54.00	-14.35	V	AVG
9632.0000	*								
12040.0000	*								
14448.0000	*								
16856.0000	*								
2408.0000	89.92	31.21	2.17	35.30	88.00	114.00	-26.00	H	Peak
2408.0000	80.37	31.21	2.17	35.30	78.45	94.00	-15.55	H	AVG
4816.0000	47.55	34.01	2.56	34.71	49.41	74.00	-24.59	H	Peak
4816.0000	43.20	34.01	2.56	34.71	45.06	54.00	-8.94	H	AVG
7224.0000	39.78	36.16	2.98	35.15	43.77	74.00	-30.23	H	Peak
7224.0000	33.69	36.16	2.98	35.15	37.68	54.00	-16.32	H	AVG
9632.0000	*								
12040.0000	*								
14448.0000	*								
16856.0000	*								

Test Mode: CH18 (Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2442.0000	92.66	31.10	2.11	34.43	91.44	114.00	-22.56	V	Peak
2442.0000	80.74	31.10	2.11	34.43	79.52	94.00	-14.48	V	AVG
4884.0000	44.39	34.87	2.47	34.11	47.62	74.00	-26.38	V	Peak
4884.0000	40.55	34.87	2.47	34.11	43.78	54.00	-10.22	V	AVG
7326.0000	41.36	35.81	3.01	34.54	45.64	74.00	-28.36	V	Peak
7326.0000	35.74	35.81	3.01	34.54	40.02	54.00	-13.98	V	AVG
9768.0000	*								
12210.0000	*								
14652.0000	*								
17094.0000	*								
2442.0000	90.68	31.10	2.11	34.43	89.46	114.00	-24.54	H	Peak
2442.0000	73.65	31.10	2.11	34.43	72.43	94.00	-21.57	H	AVG
4884.0000	45.02	34.87	2.47	34.11	48.25	74.00	-25.75	H	Peak
4884.0000	40.36	34.87	2.47	34.11	43.59	54.00	-10.41	H	AVG
7326.0000	42.41	35.81	3.01	34.54	46.69	74.00	-27.31	H	Peak
7326.0000	36.57	35.81	3.01	34.54	40.85	54.00	-13.15	H	AVG
9768.0000	*								
12210.0000	*								
14652.0000	*								
17094.0000	*								

Test Mode: CH34 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2474.0000	93.26	31.64	2.18	35.89	91.19	114.00	-22.81	V	Peak
2474.0000	85.02	31.64	2.18	35.89	82.95	94.00	-11.05	V	AVG
4948.0000	54.36	35.10	2.52	34.87	57.11	74.00	-16.89	V	Peak
4948.0000	42.33	35.10	2.52	34.87	45.08	54.00	-8.92	V	AVG
7422.0000	41.55	36.18	3.18	34.96	45.95	74.00	-28.05	V	Peak
7422.0000	34.78	36.18	3.18	34.96	39.18	54.00	-14.82	V	AVG
9896.0000	*								
12370.0000	*								
14844.0000	*								
17318.0000	*								
2470.0000	92.65	31.64	2.18	35.89	90.58	114.00	-23.42	H	Peak
2470.0000	78.54	31.64	2.18	35.89	76.47	94.00	-17.53	H	AVG
4940.0000	47.36	35.10	2.52	34.87	50.11	74.00	-23.89	H	Peak
4940.0000	40.51	35.10	2.52	34.87	43.26	54.00	-10.74	H	AVG
7410.0000	44.39	36.18	3.18	34.96	48.79	74.00	-25.21	H	Peak
7410.0000	35.82	36.18	3.18	34.96	40.22	54.00	-13.78	H	AVG
9880.0000	*								
12350.0000	*								
14820.0000	*								
17290.0000	*								

The Project in above 18000MHz was tested in MRT Technology (Suzhou) Co., Ltd.

Radiated Band Edge:

Test Mode:					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.66	29.15	3.41	34.01	49.21	74.00	-24.79	V
2400.00	60.74	29.16	3.43	34.01	59.32	74.00	-14.68	V
2390.00	52.85	29.15	3.41	34.01	51.40	74.00	-22.60	H
2400.00	62.79	29.16	3.43	34.01	61.37	74.00	-12.63	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	40.83	29.15	3.41	34.01	39.38	54.00	-14.62	V
2400.00	46.12	29.16	3.43	34.01	44.70	54.00	-9.30	V
2390.00	41.25	29.15	3.41	34.01	39.80	54.00	-14.20	H
2400.00	40.26	29.16	3.43	34.01	38.84	54.00	-15.16	H


Test Mode:					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.48	29.28	3.53	34.03	49.26	74.00	-24.74	V
2500.00	47.23	29.30	3.56	34.03	46.06	74.00	-27.94	V
2483.50	56.29	29.28	3.53	34.03	55.07	74.00	-18.93	H
2500.00	52.17	29.30	3.56	34.03	51.00	74.00	-23.00	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	40.48	29.28	3.53	34.03	39.26	54.00	-14.74	V
2500.00	36.58	29.30	3.56	34.03	35.41	54.00	-18.59	V
2483.50	42.44	29.28	3.53	34.03	41.22	54.00	-12.78	H
2500.00	36.07	29.30	3.56	34.03	34.90	54.00	-19.10	H

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

Conducted band edge

Frequency Band (MHz)	Delta Peak toBand Emission (dBc)	Limit (dBc)	Results
2408	55.402	>20	PASS
2474	67.756	>20	PASS

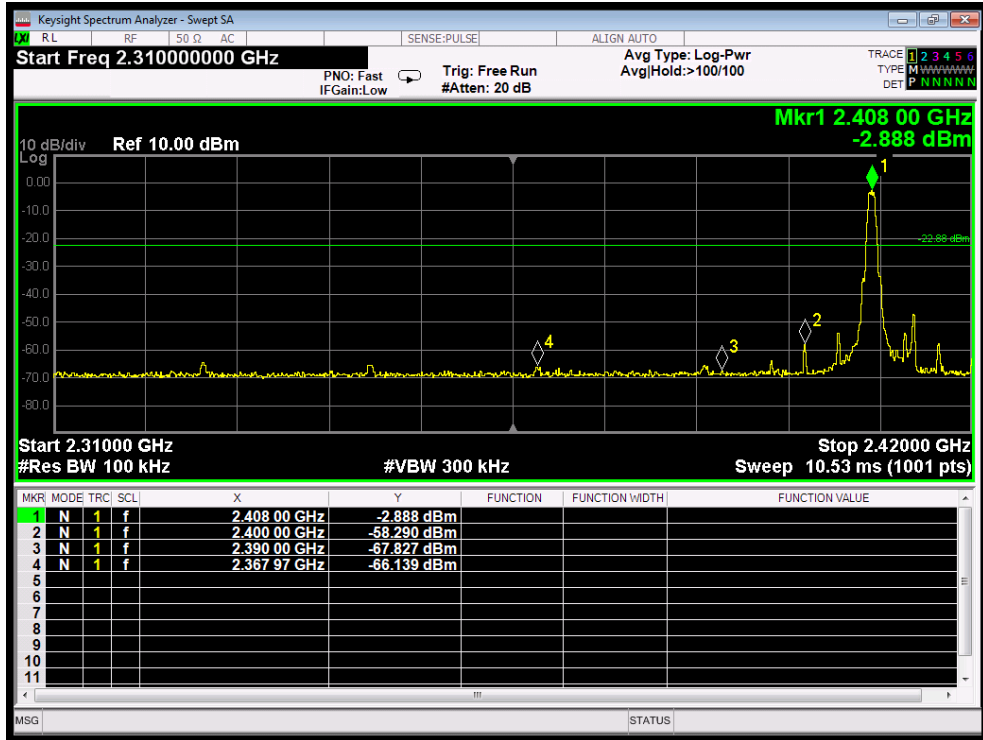


Lowest

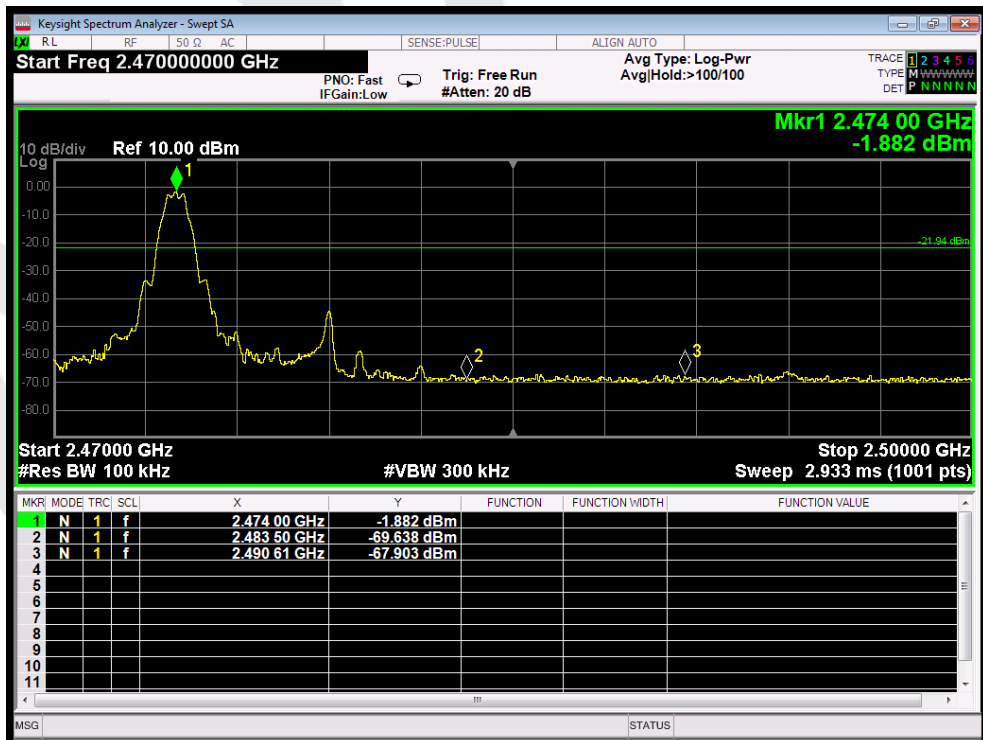


Highest


Conducted Emission Method

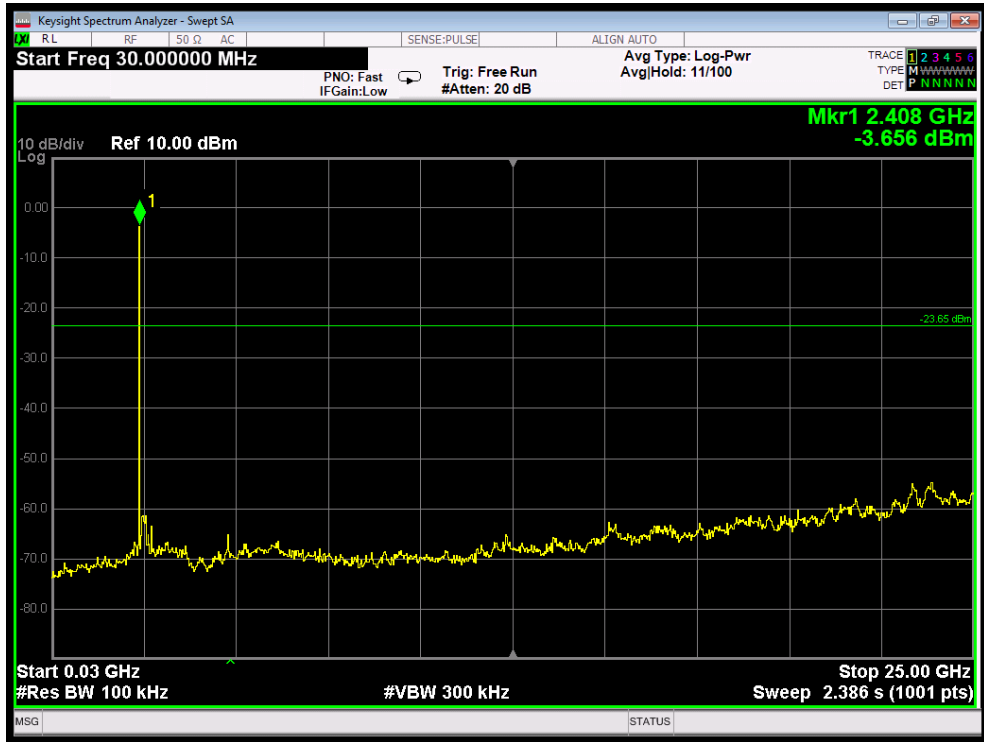

CH: Low

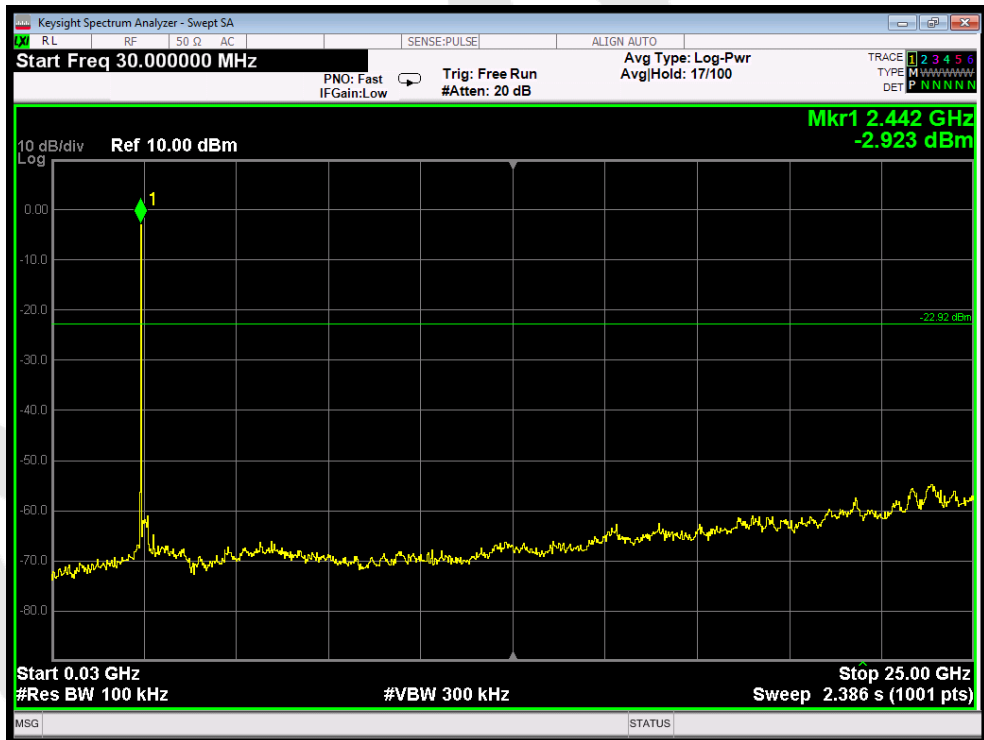

CH: Middle

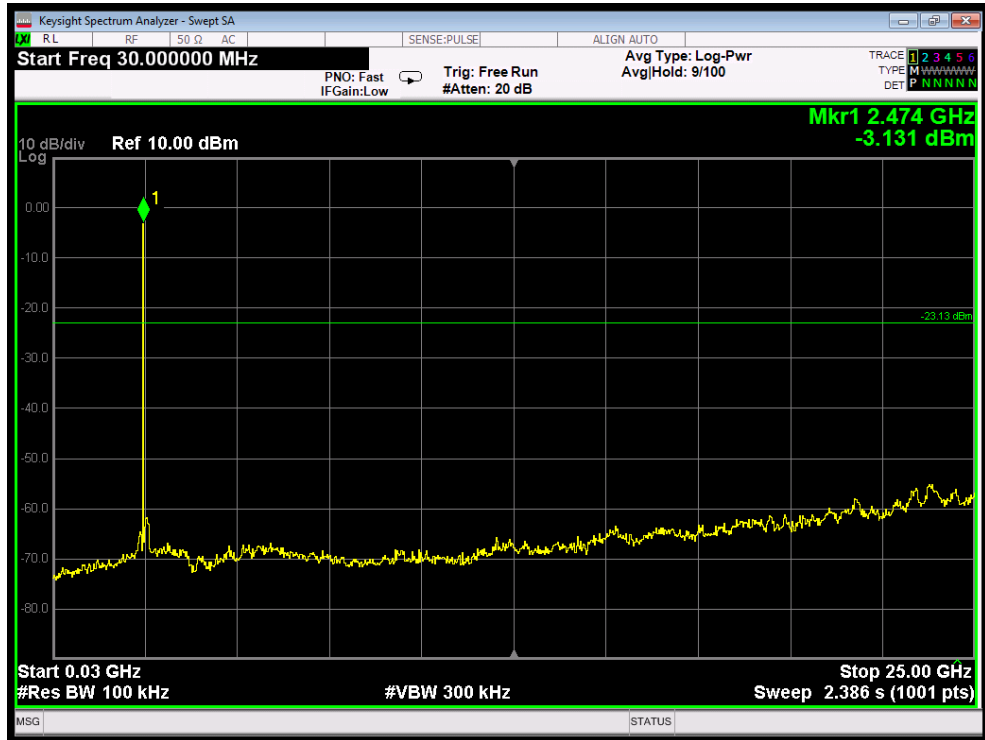


CH: High

5. 20dB Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

5.2. Test Setup




5.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
 RBW = 100kHz, VBW \geq 3*RBW = 300kHz,
 Detector= Peak
 Trace mode= Max hold.
 Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


5.4. Test Data

Test Item	: 20dB Bandwidth	Test Mode	: TX Mode
Test Voltage	: DC 3V	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Frequency (MHz)	Bandwidth (kHz)	Result
2408MHZ	1111.0	PASS
2442MHZ	1110.0	PASS
2474MHZ	1116.0	PASS

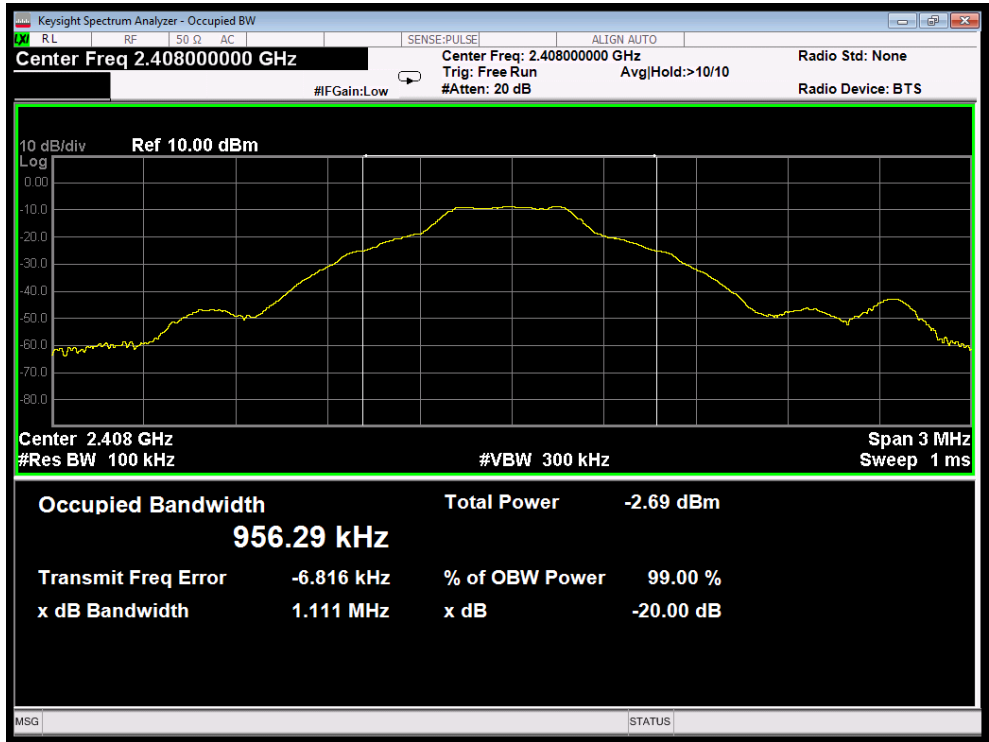

Test Mode: Low

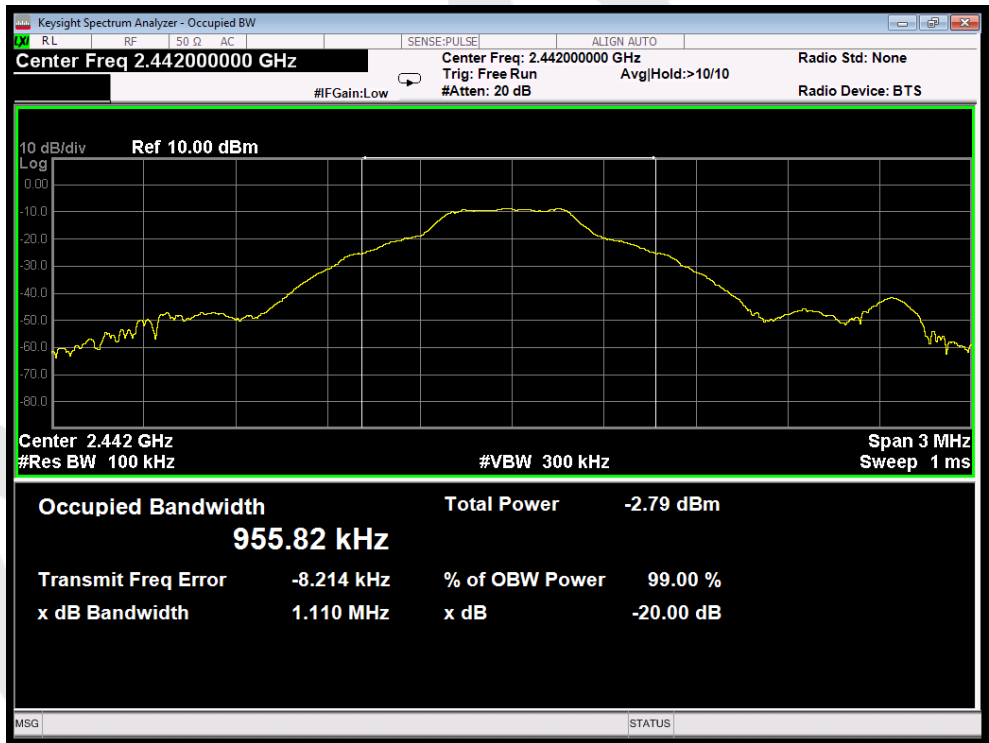

Test Mode: Middle

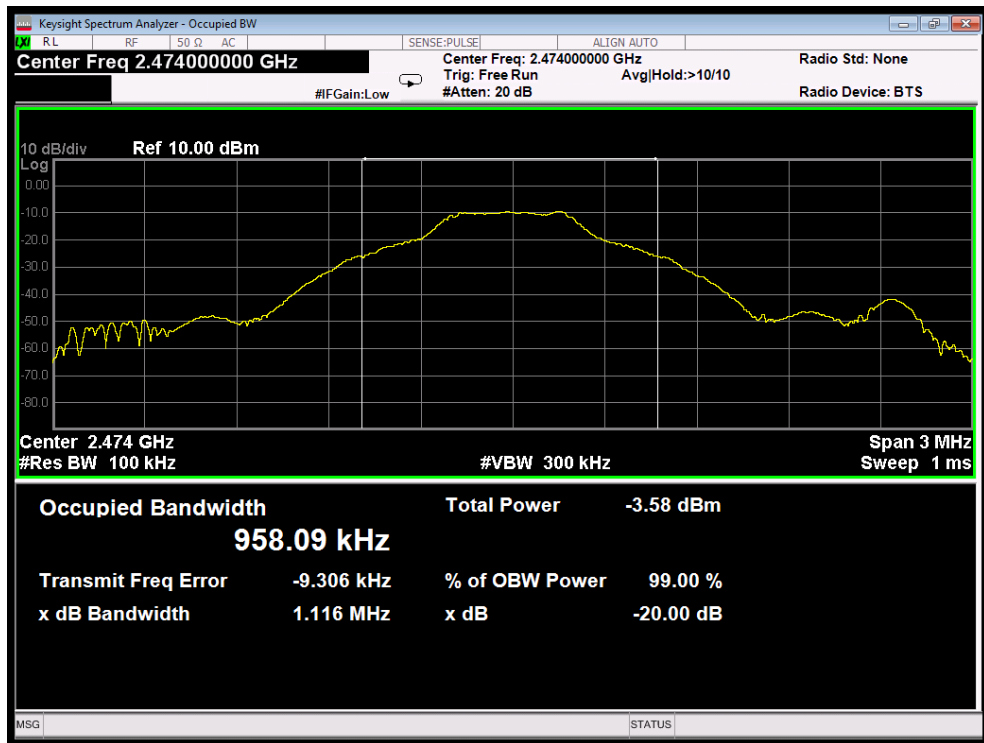

Test Mode: High


6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.



6.2. Antenna Connected Construction


The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is -2.3 dBi. It complies with the standard requirement.

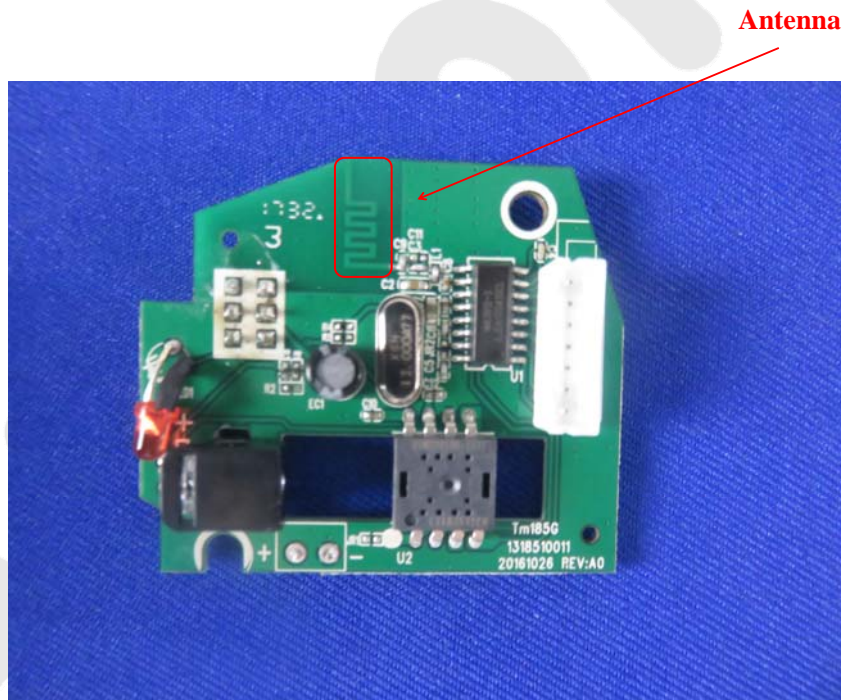

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test

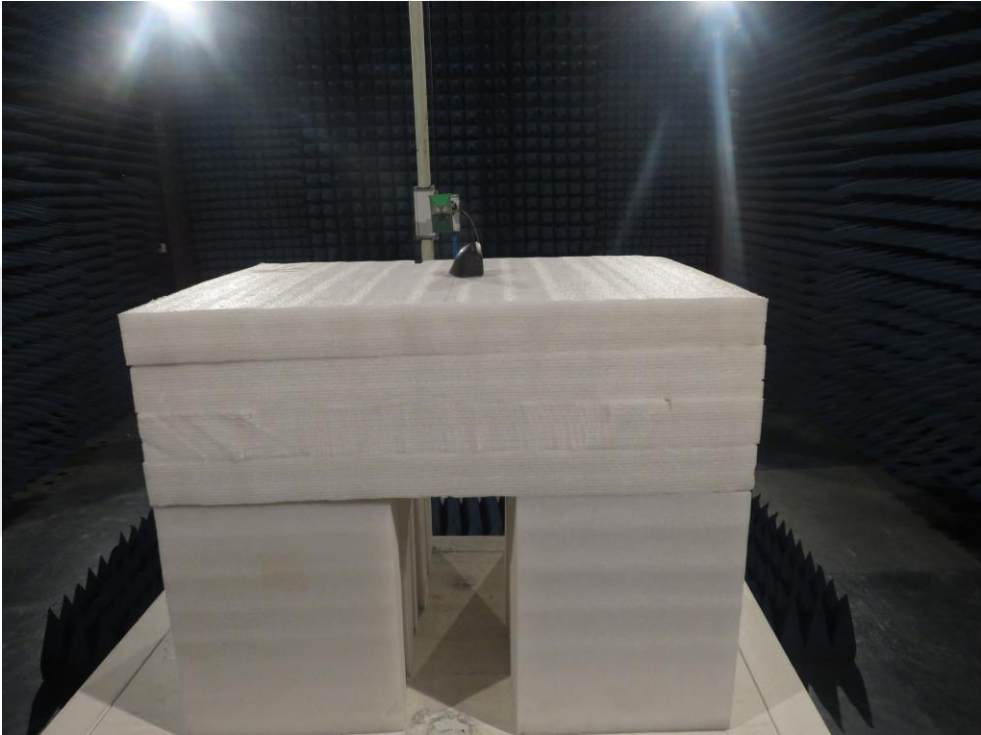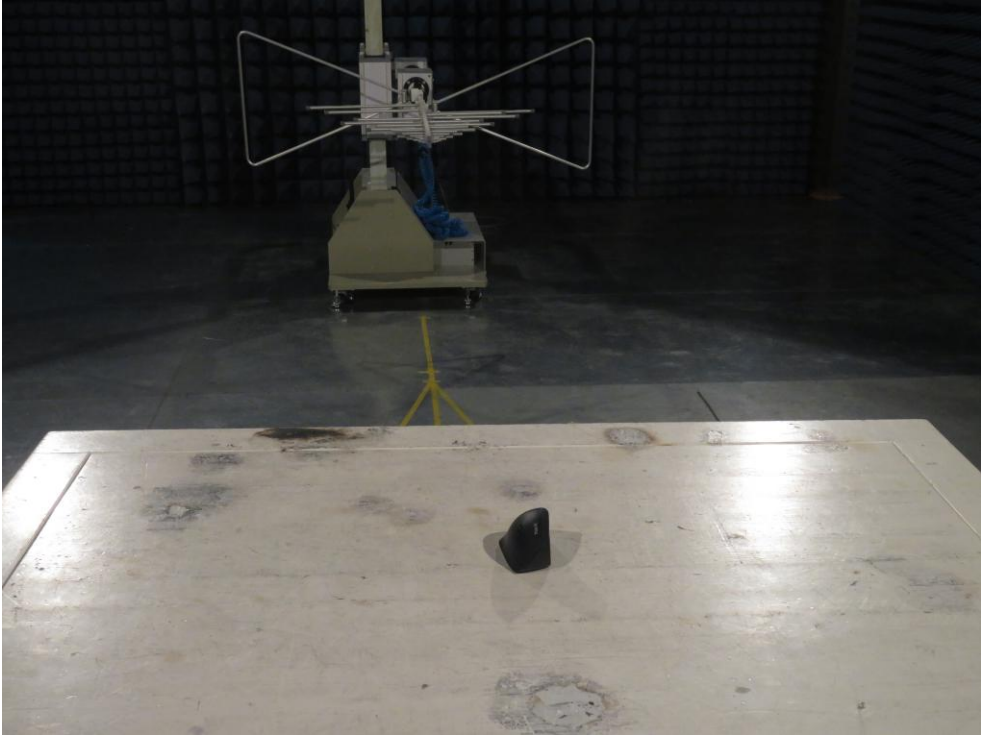

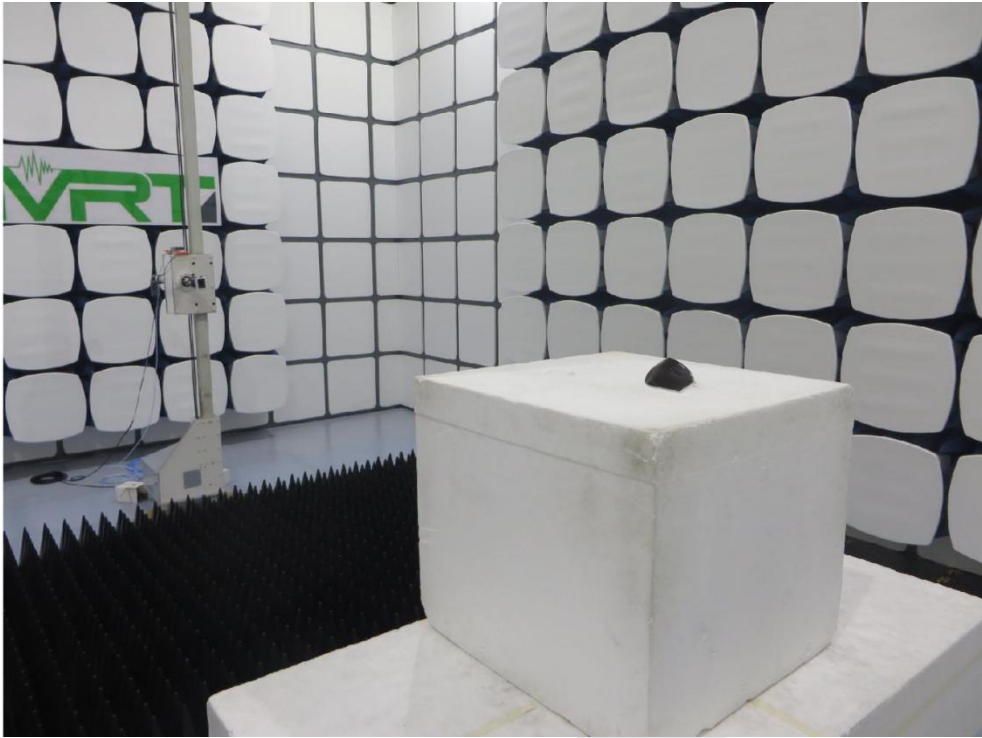

Anbotek

APPENDIX II -- EXTERNAL PHOTOGRAPH







APPENDIX III -- INTERNAL PHOTOGRAPH

