


### Test Setup Diagram

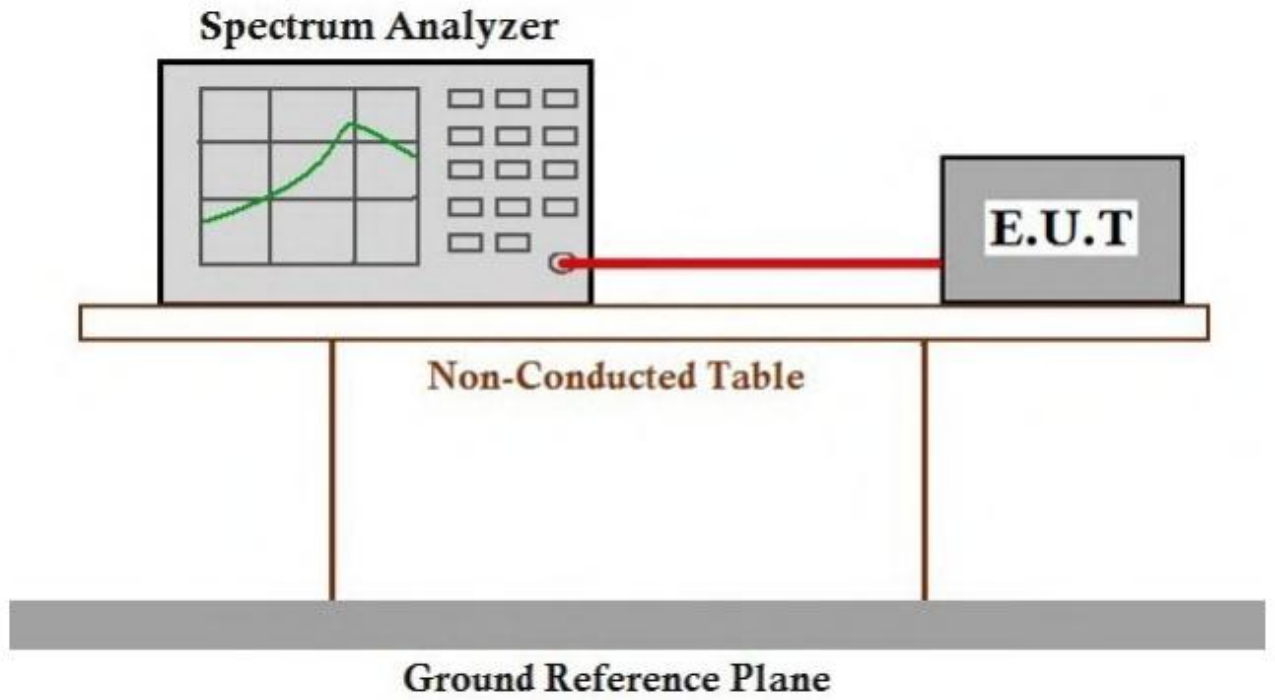

**Test Result:**

**7.1.1 Test Result B1**


TestMode	ChName	Freq(MHz)	Result[dBm]	Limit[dBm]	Verdict
11A	Low	5180	-35.03	≤-27	PASS
	High	5240	-38.79	≤-27	PASS
11N20SISO	Low	5180	-33.59	≤-27	PASS
	High	5240	-38.52	≤-27	PASS
11N40SISO	Low	5190	-34.85	≤-27	PASS
	High	5230	-38.02	≤-27	PASS
11AC20SISO	Low	5180	-35.04	≤-27	PASS
	High	5240	-39.16	≤-27	PASS
11AC40SISO	Low	5190	-36.84	≤-27	PASS
	High	5230	-38.36	≤-27	PASS

**7.1.2 Test Result B4**


TestMode	ChName	Freq(MHz)	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Low	5745	5650~5700	-38.27	≤4.45	PASS
			5700~5720	-37.06	≤14.62	PASS
			5720~5725	-38.01	≤20.16	PASS
			5760~5650	-37.86	≤-27	PASS
	High	5825	5850~5855	-36.64	≤22.93	PASS
			5855~5875	-36.92	≤10.93	PASS
			5875~5925	-37.21	≤-18.36	PASS
			5925~5935	-36.89	≤-27	PASS
11N20SISO	Low	5745	5650~5700	-36.97	≤4.20	PASS
			5700~5720	-37.39	≤11.40	PASS
			5720~5725	-38.13	≤24.34	PASS
			5760~5650	-38.92	≤-27	PASS
	High	5825	5850~5855	-37.8	≤18.92	PASS
			5855~5875	-36.81	≤10.71	PASS
			5875~5925	-36.5	≤3.79	PASS
			5925~5935	-37.75	≤-27	PASS
11N40SISO	Low	5755	5650~5700	-37.94	≤-8.69	PASS
			5700~5720	-37.69	≤12.13	PASS

	High	5795	5720~5725	-37.25	$\leq 25.26$	PASS
			5780~5650	-38.39	$\leq -27$	PASS
			5850~5855	-37.93	$\leq 19.67$	PASS
			5855~5875	-37.24	$\leq 10.04$	PASS
			5875~5925	-36.96	$\leq -12.15$	PASS
			5925~5935	-36.67	$\leq -27$	PASS
11AC20SIS O	Low	5745	5650~5700	-38.1	$\leq -5.42$	PASS
			5700~5720	-37.68	$\leq 14.48$	PASS
			5720~5725	-37.9	$\leq 26.24$	PASS
			5760~5650	-38.51	$\leq -27$	PASS
	High	5825	5850~5855	-37.68	$\leq 20.70$	PASS
			5855~5875	-36.48	$\leq 13.77$	PASS
			5875~5925	-37.02	$\leq -2.00$	PASS
			5925~5935	-36.75	$\leq -27$	PASS
11AC40SIS O	Low	5755	5650~5700	-37.75	$\leq -6.81$	PASS
			5700~5720	-37.62	$\leq 12.13$	PASS
			5720~5725	-37.23	$\leq 23.48$	PASS
			5780~5650	-38.24	$\leq -27$	PASS
	High	5795	5850~5855	-37.78	$\leq 16.94$	PASS
			5855~5875	-37.19	$\leq 13.12$	PASS
			5875~5925	-36.64	$\leq -11.27$	PASS
			5925~5935	-36.99	$\leq -27$	PASS

7.1.3 Test Graphs B1

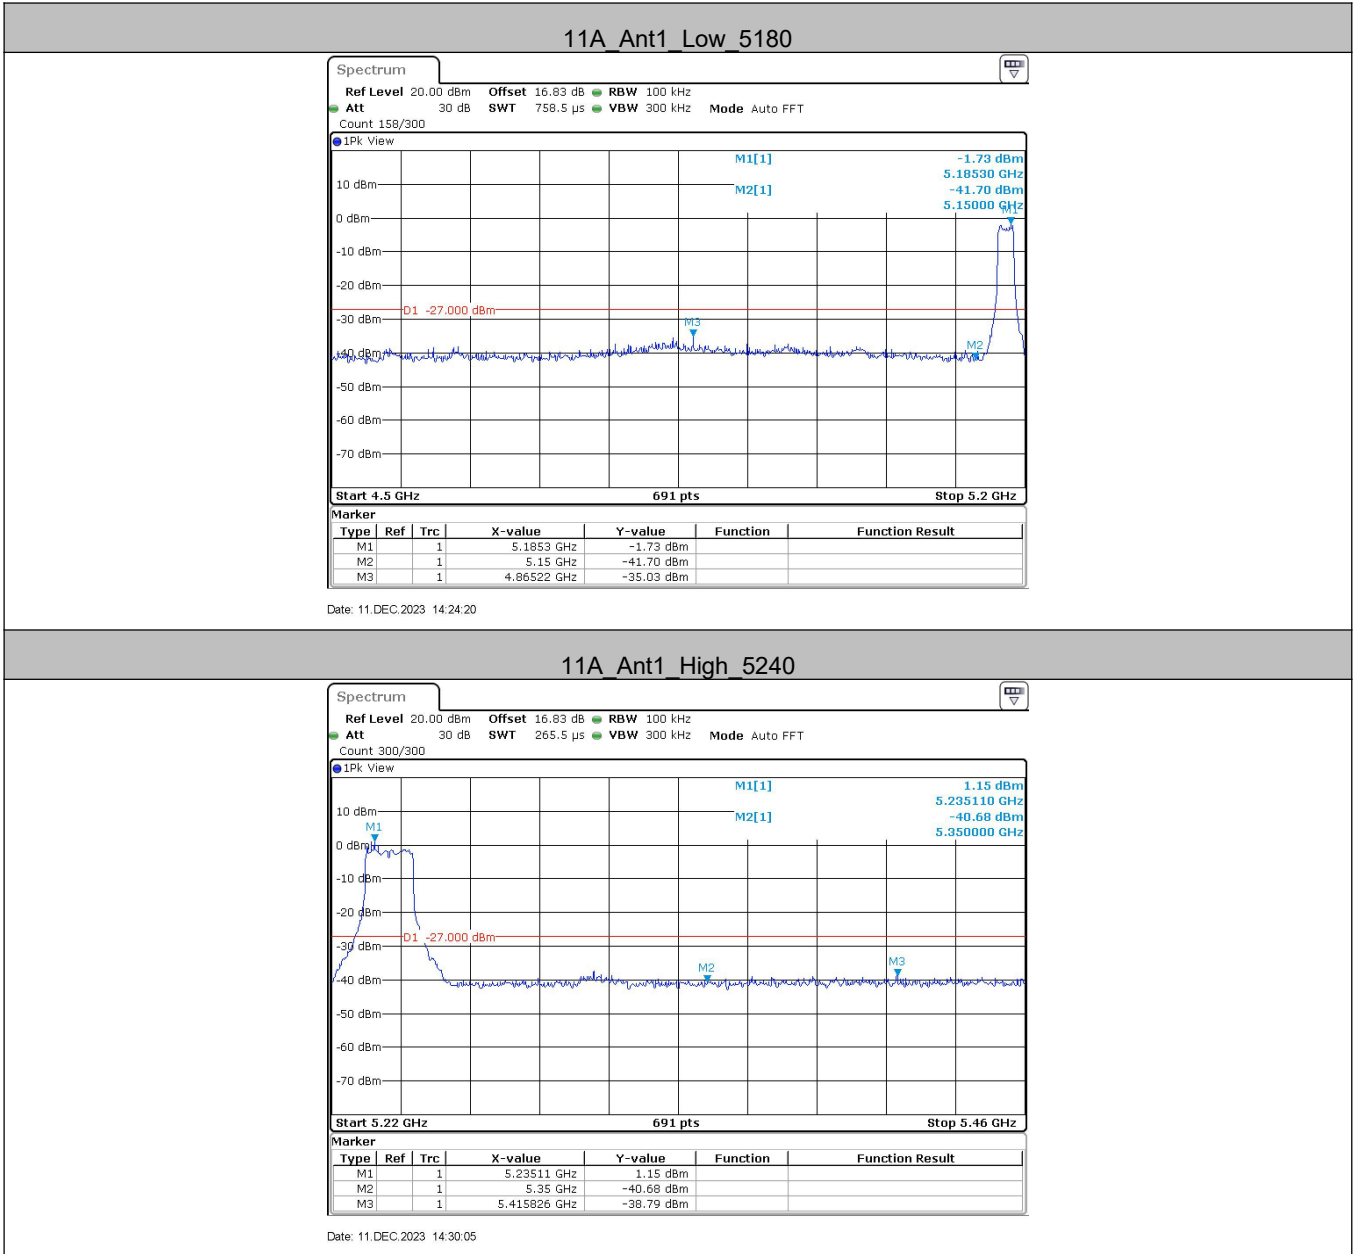


11N20SISO\_Ant1\_Low\_5180

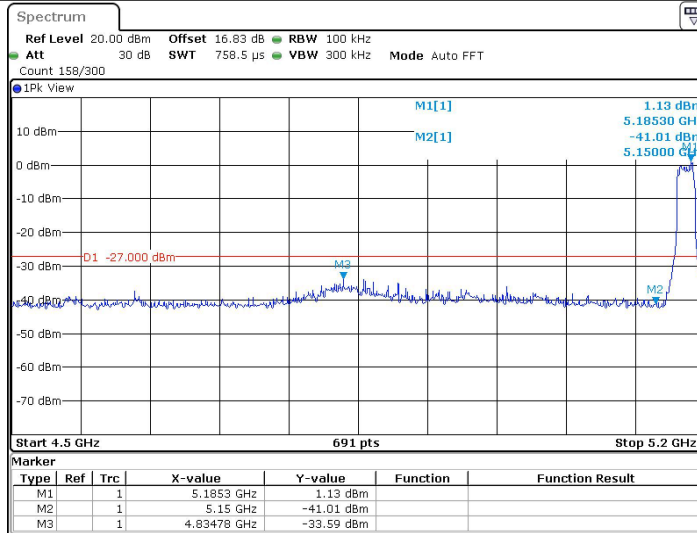


Date: 11 DEC. 2023 14:45:23

11N20SISO\_Ant1\_High\_5240

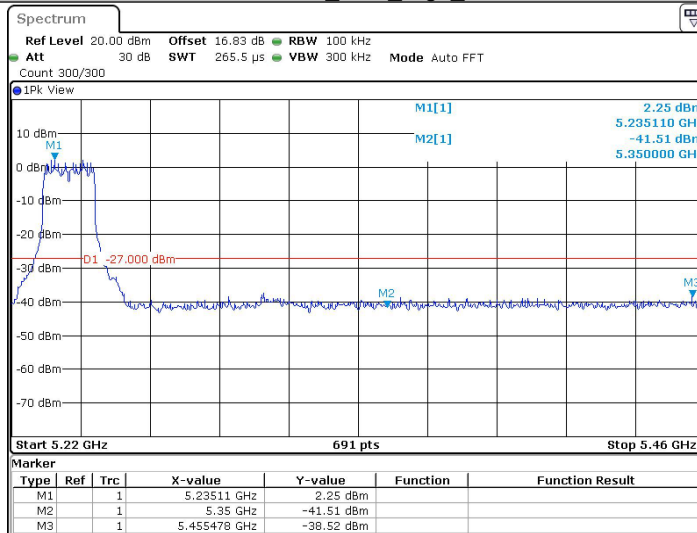


Date: 11 DEC. 2023 14:50:50

11N40SISO\_Ant1\_Low\_5190

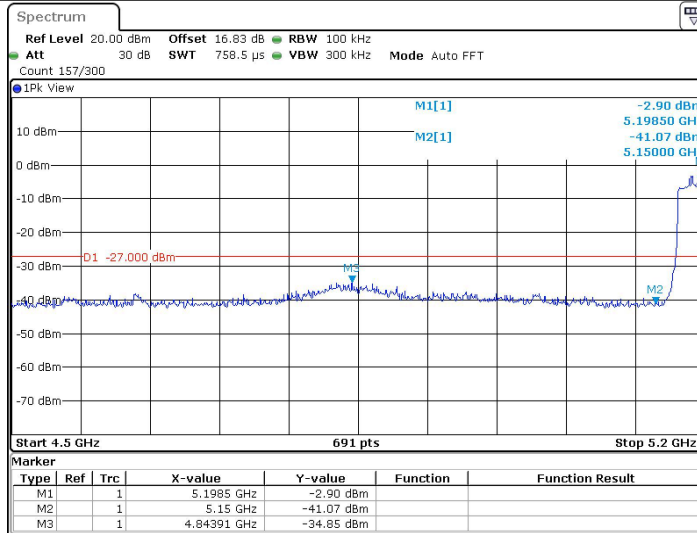


Date: 11 DEC. 2023 15:22:43

11N40SISO\_Ant1\_High\_5230

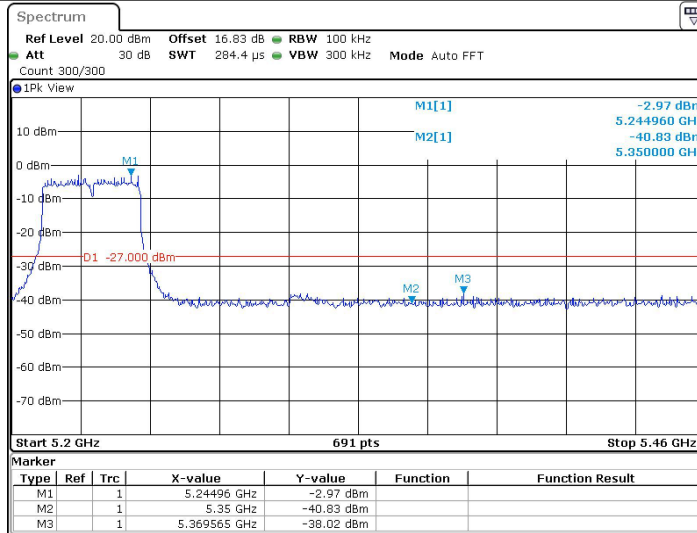


Date: 11 DEC. 2023 15:25:37

11AC20SISO\_Ant1\_Low\_5180

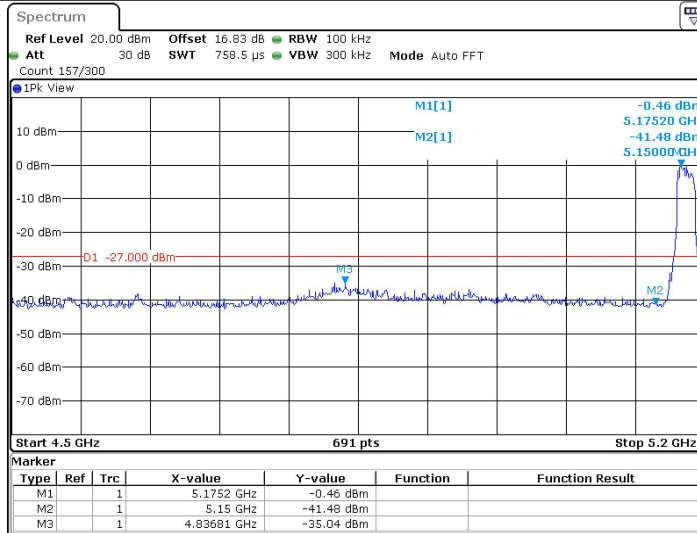


Date: 11 DEC. 2023 18:28:15

11AC20SISO\_Ant1\_High\_5240

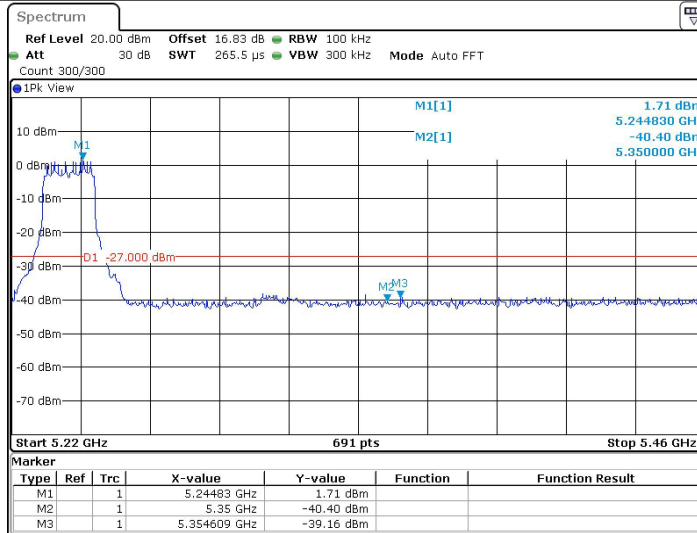


Date: 11 DEC. 2023 15:43:39

11AC40SISO\_Ant1\_Low\_5190

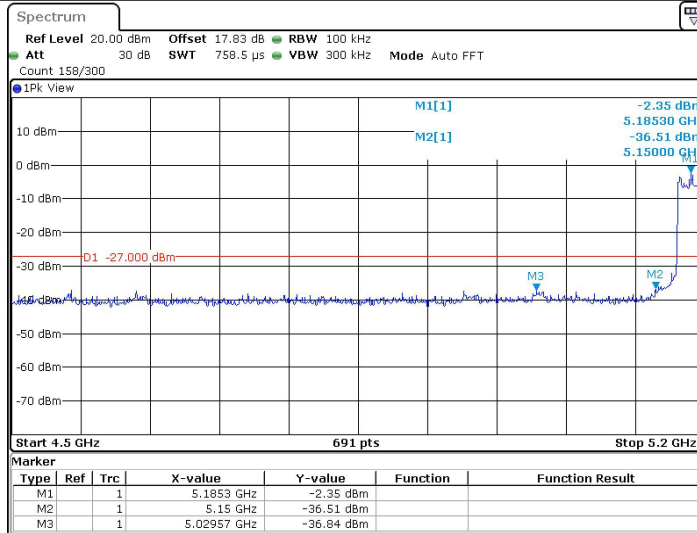

Date: 15 DEC. 2023 11:00:14


11AC40SISO\_Ant1\_High\_5230

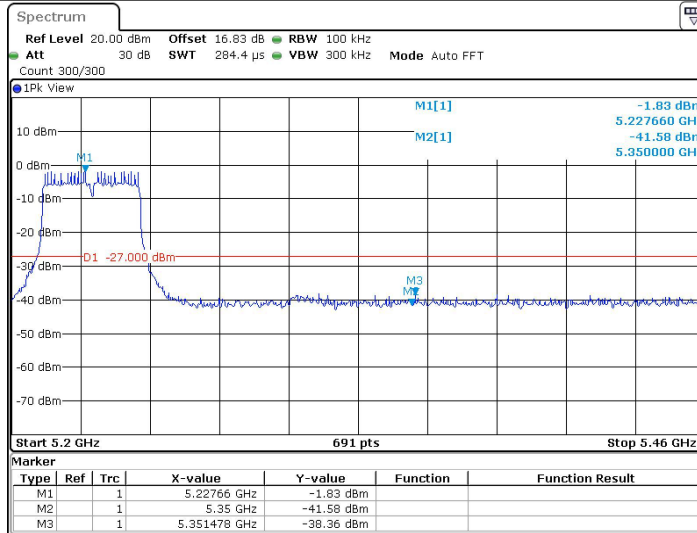


Date: 11 DEC. 2023 16:15:54



7.1.4 Test Graphs B4

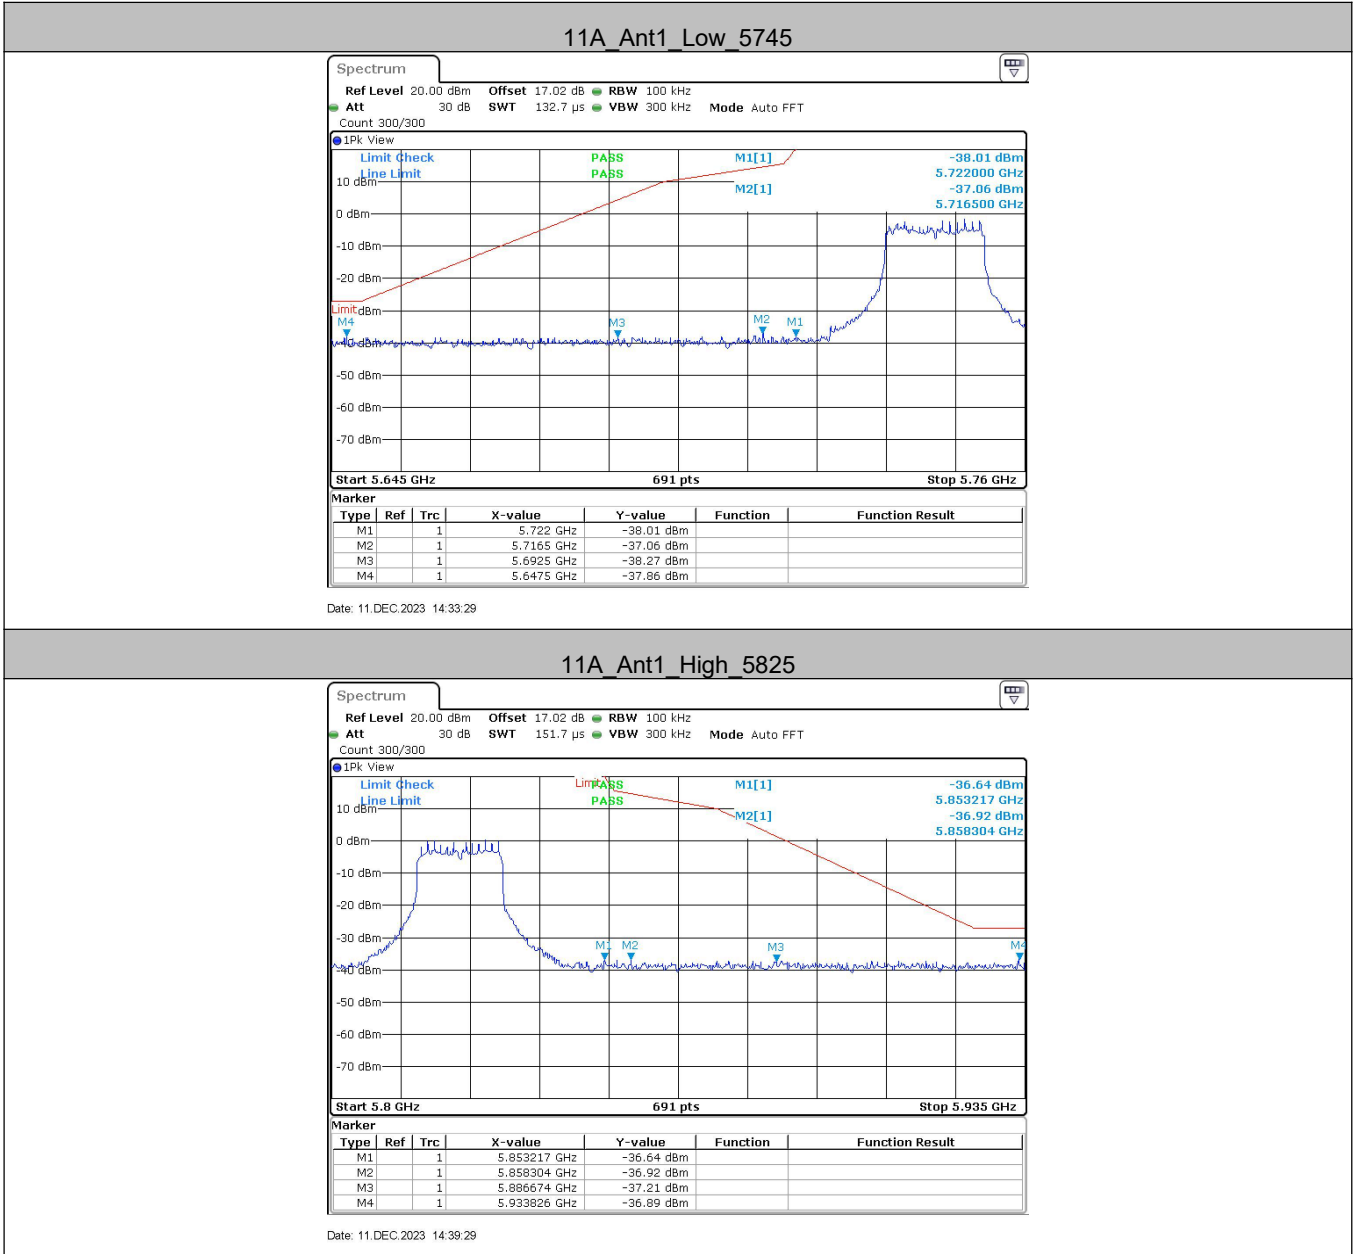


11N20SISO\_Ant1\_Low\_5745

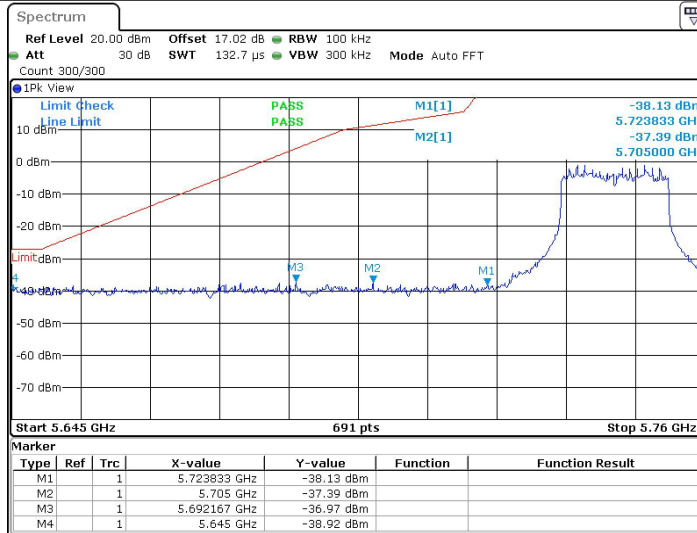


Date: 11 DEC. 2023 15:10:58

11N20SISO\_Ant1\_High\_5825

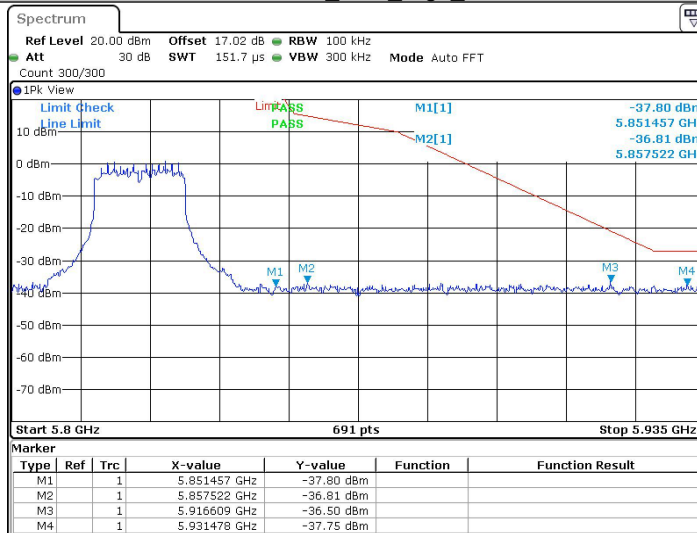


Date: 11 DEC. 2023 15:19:39

11N40SISO\_Ant1\_Low\_5755

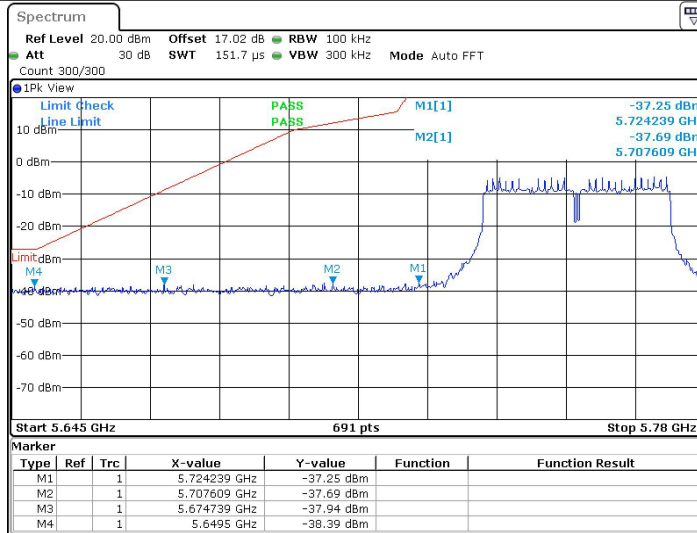


Date: 11 DEC. 2023 15:28:50

11N40SISO\_Ant1\_High\_5795

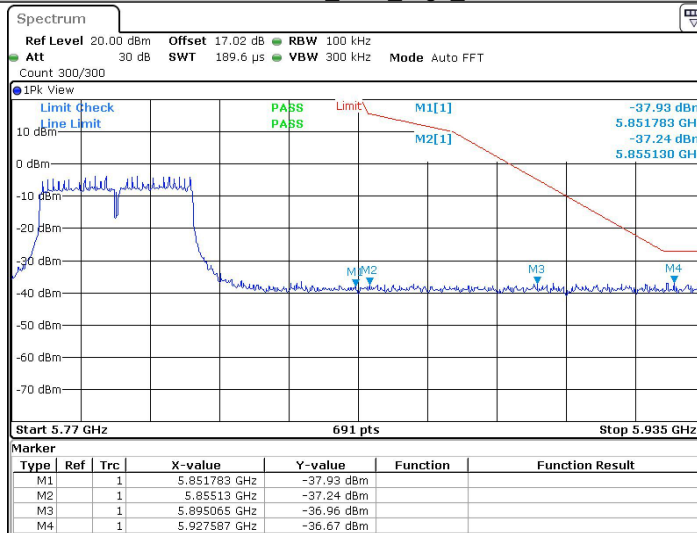


Date: 11 DEC. 2023 15:32:06

11AC20SISO\_Ant1\_Low\_5745

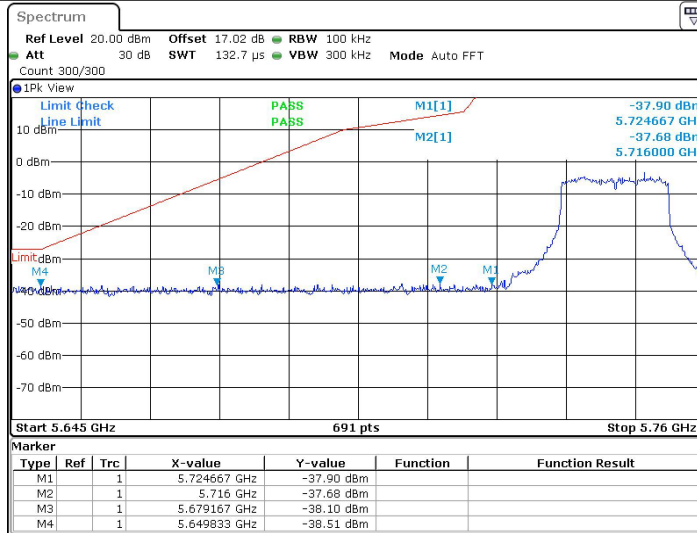


Date: 11 DEC. 2023 15:48:27

11AC20SISO\_Ant1\_High\_5825

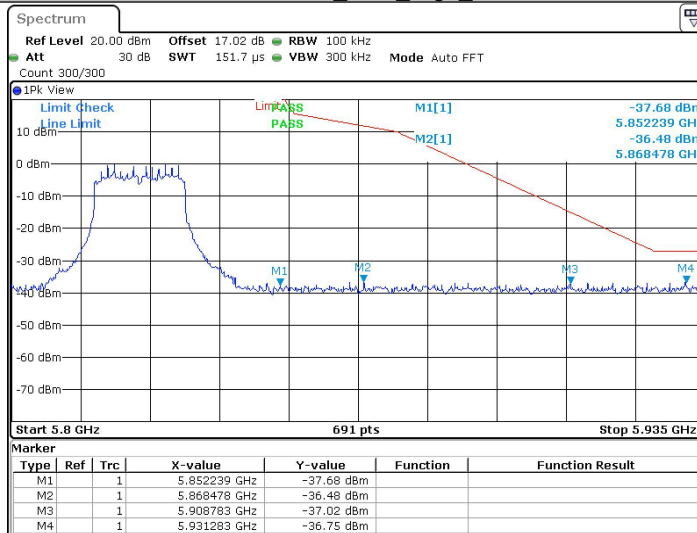


Date: 11 DEC. 2023 15:50:36

11AC40SISO\_Ant1\_Low\_5755

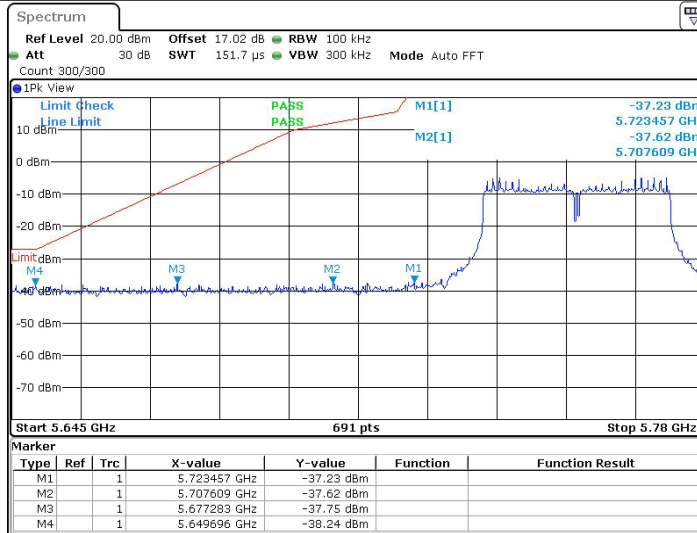

Date: 11 DEC. 2023 16:18:44

11AC40SISO\_Ant1\_High\_5795

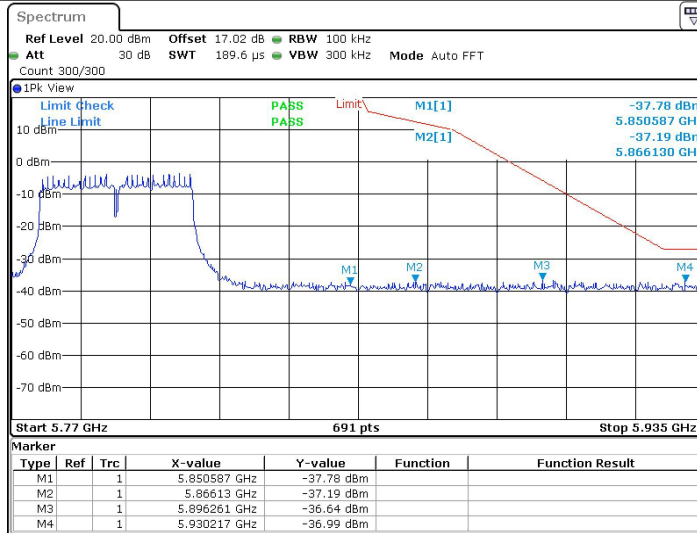

Date: 11 DEC. 2023 16:21:22


## Appendix E): Frequency Stability

Test Requirement 47 CFR Part 15, Subpart C 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

Limit: The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

### Test Setup Diagram

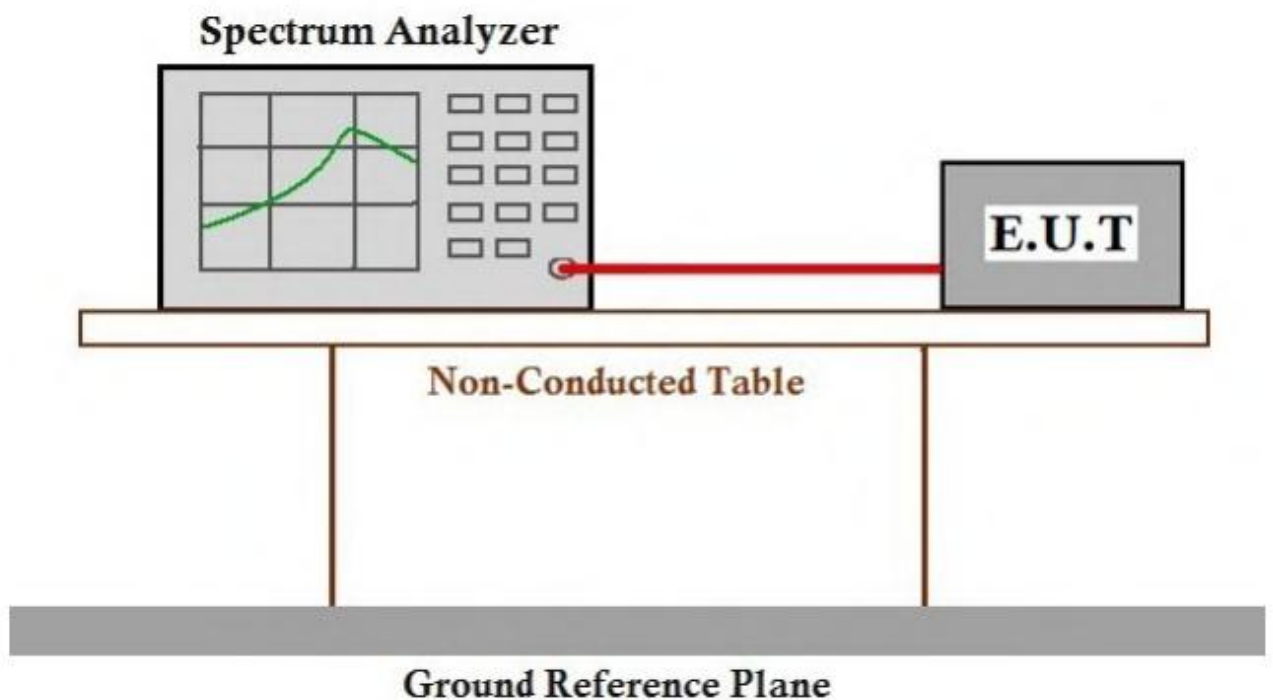

Measurement Data

Frequency Stability Versus Temp.			
Operating Frequency: 5240 MHz			
Temp (°C)	Volta ge	Deviation (Hz)	Frequency Drift (ppm)
50	VN	-16000.00	-3.053435
40		-16000.00	-3.053435
30		-16000.00	-3.053435
20		-16000.00	-3.053435
10		-16000.00	-3.053435
0		-16000.00	-3.053435
-10		-16000.00	-3.053435
-20		-16000.00	-3.053435

Frequency Stability Versus Temp.			
Operating Frequency: 5200 MHz			
Temp.	Volta ge	Deviation (Hz)	Frequency Drift (ppm)
TN	VL	-16000.00	-3.076923
	VN	-16000.00	-3.076923
	VH	-16000.00	-3.076923

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.

## Appendix F): Antenna Requirement


### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.407(a)(1) (2) requirement:

The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

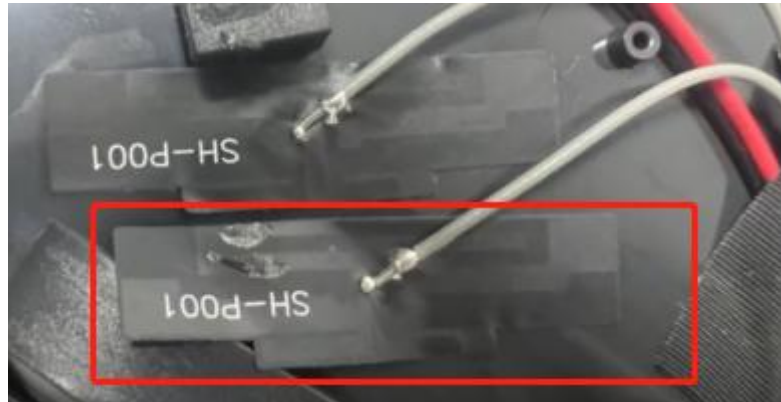

The antenna is FPC antenna with ipex connector. The best case gain of the 5G WiFi antenna is 4.63dBi@5GHz: Wi-Fi: U-NII-1, 4.63dBi@5GHz: Wi-Fi: U-NII-3.



---

---

## Appendix G): Operation in the absence of information to the transmit

### 15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

### Operation in the absence of information to the transmit

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare )

## Appendix H): AC Power Line Conducted Emission


<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> <li>1)The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</li> </ol>														
<p>Limit:</p>	<table border="1" data-bbox="497 1037 1366 1256"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

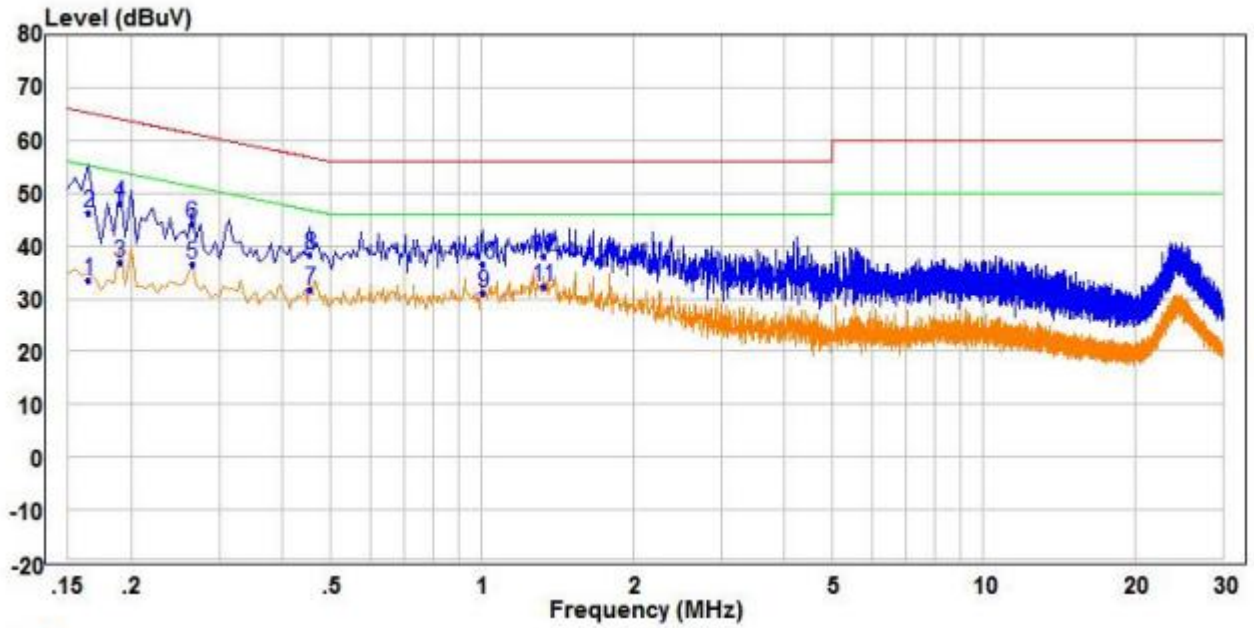

	Read			Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase		
MHz	dBuV	dB	dBuV	dBuV	dB				
1	0.165	22.83	10.67	33.50	55.21	-21.71	Average	Line	
2	0.165	35.70	10.67	46.37	65.21	-18.84	QP	Line	
3	0.190	26.10	10.63	36.73	54.04	-17.31	Average	Line	
4	QP	0.190	37.43	10.63	48.06	64.04	-15.98	QP	Line
5	0.265	26.07	10.53	36.60	51.27	-14.67	Average	Line	
6	0.265	33.53	10.53	44.06	61.27	-17.21	QP	Line	
7	0.455	21.05	10.66	31.71	46.78	-15.07	Average	Line	
8	0.455	27.69	10.66	38.35	56.78	-18.43	QP	Line	
9	1.005	20.29	10.71	31.00	46.00	-15.00	Average	Line	
10	1.005	25.80	10.71	36.51	56.00	-19.49	QP	Line	
11	PP	1.325	20.67	11.49	32.16	46.00	-13.84	Average	Line
12	1.325	26.51	11.49	38.00	56.00	-18.00	QP	Line	

Neutral line:

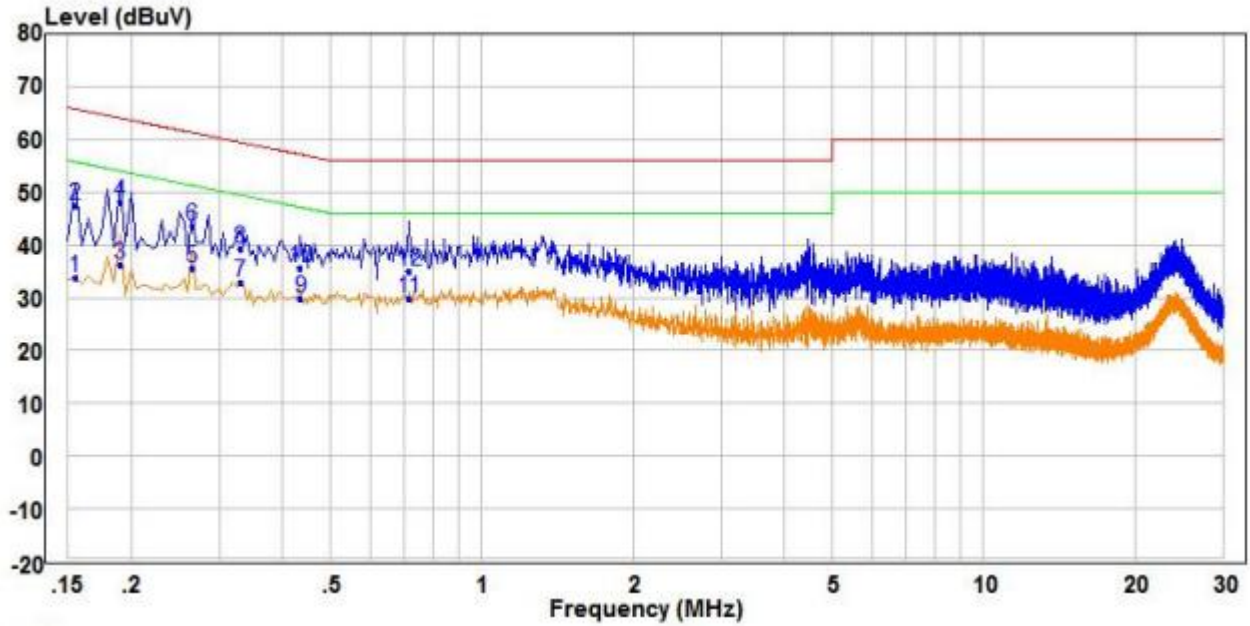

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.155	23.07	10.69	33.76	55.73	-21.97	Average	Neutral
2	0.155	36.72	10.69	47.41	65.73	-18.32	QP	Neutral
3	0.190	25.67	10.62	36.29	54.04	-17.75	Average	Neutral
4	0.190	37.45	10.62	48.07	64.04	-15.97	QP	Neutral
5	0.265	25.12	10.52	35.64	51.27	-15.63	Average	Neutral
6	0.265	33.12	10.52	43.64	61.27	-17.63	QP	Neutral
7	0.330	22.33	10.52	32.85	49.45	-16.60	Average	Neutral
8	0.330	28.65	10.52	39.17	59.45	-20.28	QP	Neutral
9	0.435	19.36	10.64	30.00	47.16	-17.16	Average	Neutral
10	0.435	25.11	10.64	35.75	57.16	-21.41	QP	Neutral
11	0.715	19.06	10.89	29.95	46.00	-16.05	Average	Neutral
12	0.715	24.19	10.89	35.08	56.00	-20.92	QP	Neutral

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. The 6Mbps of rate of 802.11A\_5240 is the worst case, only the worst data recorded in the report.

## Appendix I): Restricted bands around fundamental frequency (Radiated Emission)

Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).</li> <li>Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dB<math>\mu</math>V/m @3cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dB $\mu$ V/m @3cm)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB $\mu$ V/m @3cm)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			

## Test plot as follows:

Worse case mode:		802.11a(6Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150.00	54.04	-3.63	50.41	74	-23.59	peak	H
5150.00	37.26	-3.63	33.63	54	-20.37	AVG	H
5150.00	51.34	-3.63	47.71	74	-26.29	peak	V
5150.00	37.63	-3.63	34.00	54	-20.00	AVG	V

Worse case mode:		802.11a(6Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	55.42	-3.59	51.83	74	-22.17	peak	H
5350.00	38.82	-3.59	35.23	54	-18.77	AVG	H
5350.00	51.91	-3.59	48.32	74	-25.68	peak	V
5350.00	36.48	-3.59	32.89	54	-21.11	AVG	V

Worse case mode:		802.11a(6Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	53.07	-3.44	49.63	74	-24.37	peak	H
5725	36.72	-3.44	33.28	54	-20.72	AV	H
5725	50.18	-3.44	46.74	74	-27.26	peak	V
5725	36.72	-3.44	33.28	54	-20.72	AV	V

Worse case mode:		802.11a(6Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	52.54	-3.42	49.12	74	-24.88	peak	H
5850	36.28	-3.42	32.86	54	-21.14	AV	H
5850	48.43	-3.42	45.01	74	-28.99	peak	V
5850	35.02	-3.42	31.60	54	-22.40	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150.00	52.85	-3.63	49.22	74	-24.78	peak	H
5150.00	37.29	-3.63	33.66	54	-20.34	AVG	H
5150.00	51.02	-3.63	47.39	74	-26.61	peak	V
5150.00	37.24	-3.63	33.61	54	-20.39	AVG	V



Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	54.96	-3.59	51.37	74	-22.63	peak	H
5350.00	38.12	-3.59	34.53	54	-19.47	AVG	H
5350.00	51.48	-3.59	47.89	74	-26.11	peak	V
5350.00	36.04	-3.59	32.45	54	-21.55	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	52.99	-3.44	49.55	74	-24.45	peak	H
5725	36.97	-3.44	33.53	54	-20.47	AV	H
5725	50.15	-3.44	46.71	74	-27.29	peak	V
5725	35.86	-3.44	32.42	54	-21.58	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	54.11	-3.42	50.69	74	-23.31	peak	H
5850	35.98	-3.42	32.56	54	-21.44	AV	H
5850	48.88	-3.42	45.46	74	-28.54	peak	V
5850	36.88	-3.42	33.46	54	-20.54	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	53.33	-3.63	49.70	74	-24.30	peak	H
5150	37.93	-3.63	34.30	54	-19.70	AVG	H
5150	52.11	-3.63	48.48	74	-25.52	peak	V
5150	37.17	-3.63	33.54	54	-20.46	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	55.95	-3.59	52.36	74	-21.64	peak	H
5350.00	39.08	-3.59	35.49	54	-18.51	AVG	H
5350.00	51.57	-3.59	47.98	74	-26.02	peak	V
5350.00	35.00	-3.59	31.41	54	-22.59	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	51.51	-3.44	48.07	74	-25.93	peak	H
5725	37.81	-3.44	34.37	54	-19.63	AV	H
5725	48.55	-3.44	45.11	74	-28.89	peak	V
5725	36.65	-3.44	33.21	54	-20.79	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	54.20	-3.42	50.78	74	-23.22	peak	H
5850	37.57	-3.42	34.15	54	-19.85	AV	H
5850	49.35	-3.42	45.93	74	-28.07	peak	V
5850	36.49	-3.42	33.07	54	-20.93	AV	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150.00	52.54	-3.63	48.91	74	-25.09	peak	H
5150.00	36.74	-3.63	33.11	54	-20.89	AVG	H
5150.00	51.38	-3.63	47.75	74	-26.25	peak	V
5150.00	37.21	-3.63	33.58	54	-20.42	AVG	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	56.19	-3.59	52.60	74	-21.40	peak	H
5350.00	39.77	-3.59	36.18	54	-17.82	AVG	H
5350.00	51.35	-3.59	47.76	74	-26.24	peak	V
5350.00	36.00	-3.59	32.41	54	-21.59	AVG	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	53.03	-3.44	49.59	74	-24.41	peak	H
5725	37.13	-3.44	33.69	54	-20.31	AV	H
5725	48.98	-3.44	45.54	74	-28.46	peak	V
5725	35.86	-3.44	32.42	54	-21.58	AV	V



Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	53.83	-3.42	50.41	74	-23.59	peak	H
5850	36.98	-3.42	33.56	54	-20.44	AV	H
5850	49.89	-3.42	46.47	74	-27.53	peak	V
5850	36.46	-3.42	33.04	54	-20.96	AV	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150.00	53.77	-3.63	50.14	74	-23.86	peak	H
5150.00	37.03	-3.63	33.40	54	-20.60	AVG	H
5150.00	51.31	-3.63	47.68	74	-26.32	peak	V
5150.00	37.91	-3.63	34.28	54	-19.72	AVG	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350.00	54.67	-3.59	51.08	74	-22.92	peak	H
5350.00	38.32	-3.59	34.73	54	-19.27	AVG	H
5350.00	52.02	-3.59	48.43	74	-25.57	peak	V
5350.00	36.14	-3.59	32.55	54	-21.45	AVG	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	52.93	-3.44	49.49	74	-24.51	peak	H
5725	37.62	-3.44	34.18	54	-19.82	AV	H
5725	48.60	-3.44	45.16	74	-28.84	peak	V
5725	36.66	-3.44	33.22	54	-20.78	AV	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	54.13	-3.42	50.71	74	-23.29	peak	H
5850	37.98	-3.42	34.56	54	-19.44	AV	H
5850	48.89	-3.42	45.47	74	-28.53	peak	V
5850	36.36	-3.42	32.94	54	-21.06	AV	V

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

## Appendix J): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average	
<b>Test Procedure:</b>					
<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre)</li> <li>Test the EUT in the lowest channel ,the middle channel ,the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/cm)	Remark	Measurement distance (cm)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Test result:	PASS				


**Test Data:**  
**Radiated Emission below 1GHz**

<b>30MHz~1GHz</b>		
Test mode:	Transmitting (802.11a 36CH)	Vertical

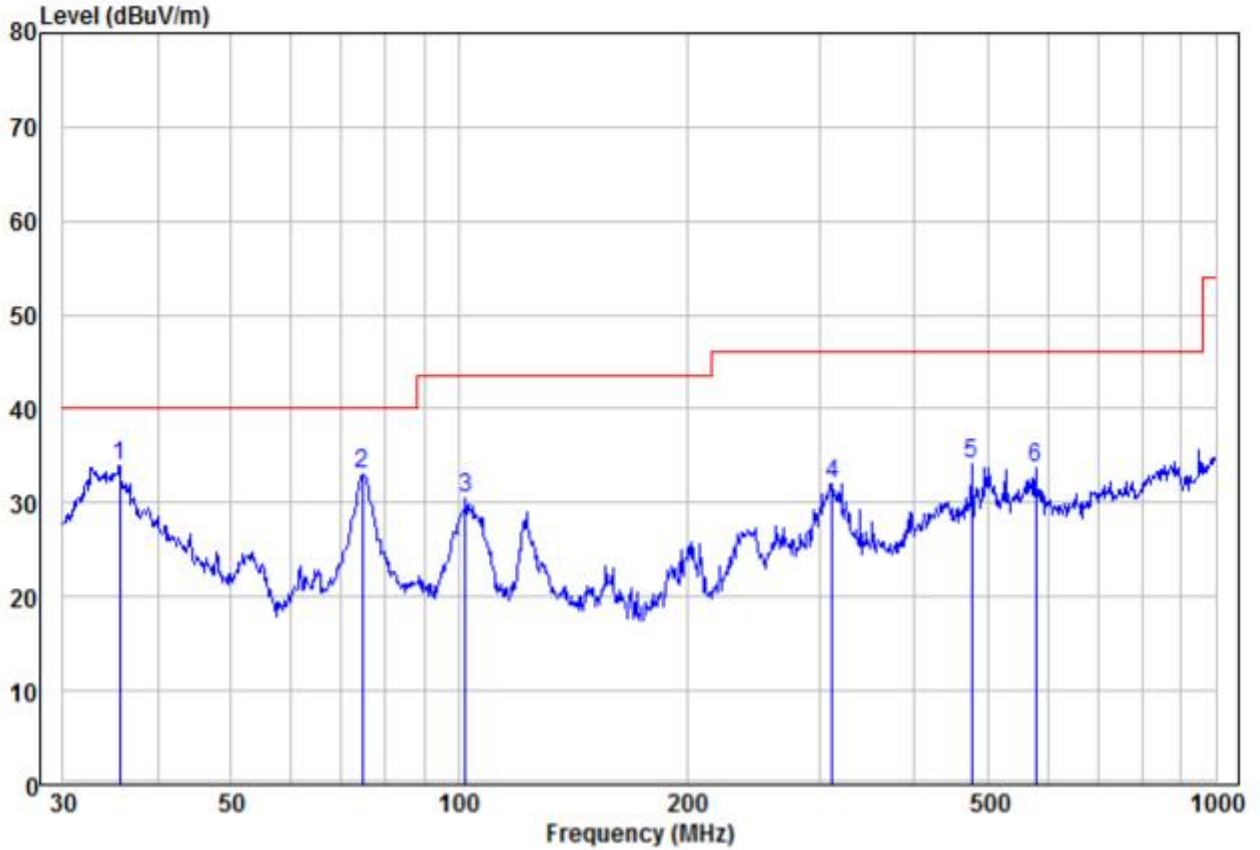


	Read Freq	Read Level	Factor	Limit Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	pp	35.62	19.57	14.38	33.95	40.00	-6.05 Peak	VERTICAL
2		74.66	24.14	8.92	33.06	40.00	-6.94 Peak	VERTICAL
3		102.00	19.98	10.55	30.53	43.50	-12.97 Peak	VERTICAL
4		311.09	18.07	14.00	32.07	46.00	-13.93 Peak	VERTICAL
5		475.50	16.57	17.52	34.09	46.00	-11.91 Peak	VERTICAL
6		578.67	15.06	18.72	33.78	46.00	-12.22 Peak	VERTICAL

Test mode:	Transmitting (802.11a 36CH)	Horizontal
------------	-----------------------------	------------

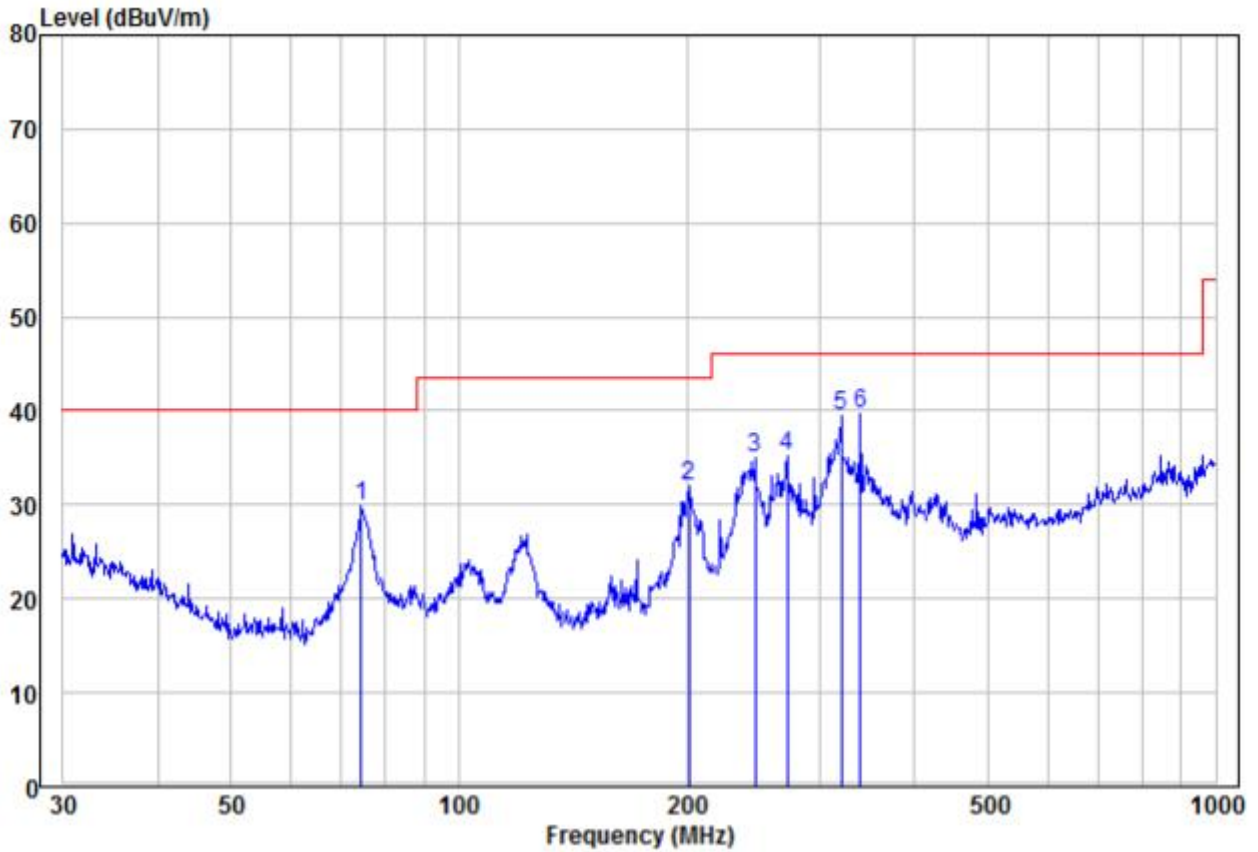

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	74.40	20.94	8.87	29.81	40.00	-10.19	Peak	HORIZONTAL
2	201.39	23.40	8.53	31.93	43.50	-11.57	Peak	HORIZONTAL
3	245.95	23.07	11.95	35.02	46.00	-10.98	Peak	HORIZONTAL
4	271.32	22.34	12.78	35.12	46.00	-10.88	Peak	HORIZONTAL
5	319.94	25.14	14.22	39.36	46.00	-6.64	Peak	HORIZONTAL
6 pp	339.59	25.08	14.70	39.78	46.00	-6.22	Peak	HORIZONTAL


30MHz~1GHz		
Test mode:	Transmitting (802.11a 149CH)	Vertical

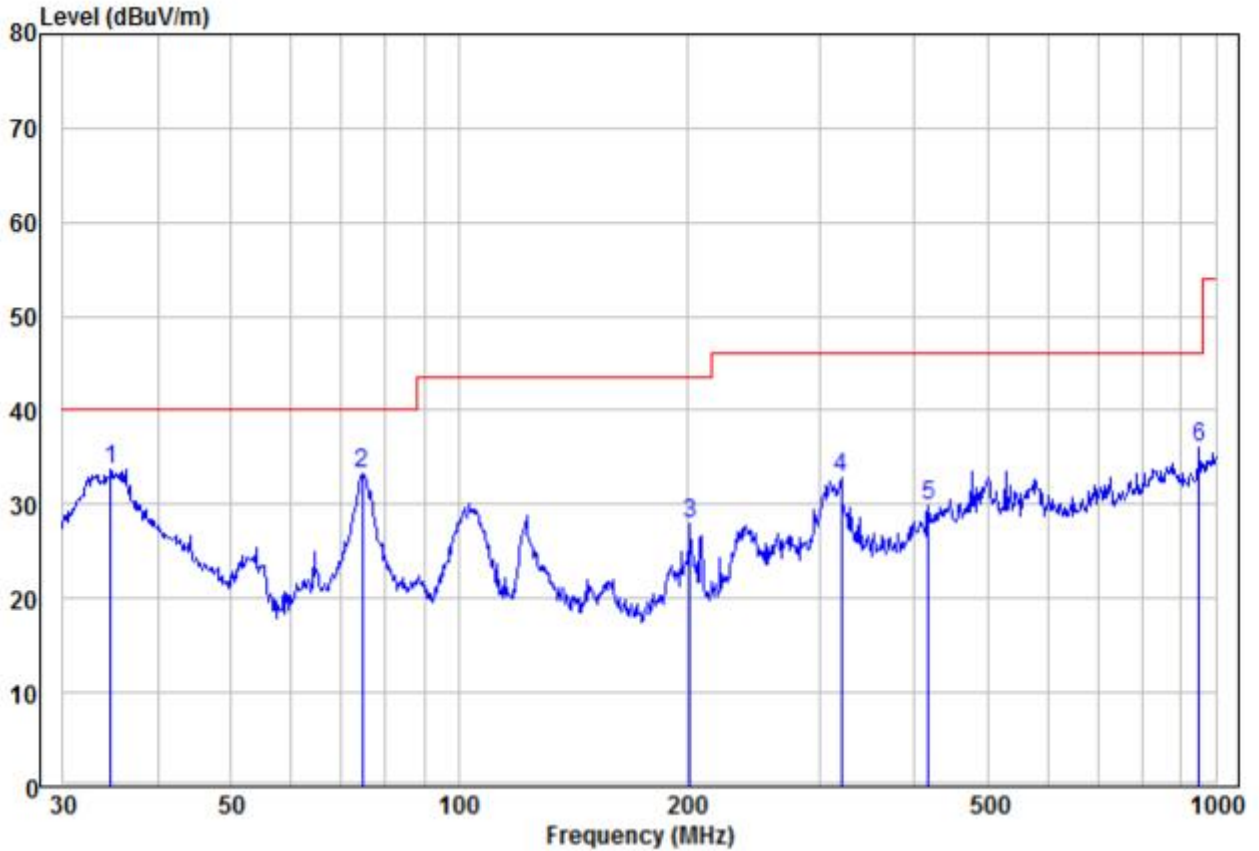

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	34.64	18.99	14.70	33.69	40.00	-6.31	Peak	VERTICAL
2	74.66	24.36	8.92	33.28	40.00	-6.72	Peak	VERTICAL
3	202.10	19.35	8.56	27.91	43.50	-15.59	Peak	VERTICAL
4	319.94	18.56	14.22	32.78	46.00	-13.22	Peak	VERTICAL
5	417.64	14.24	15.71	29.95	46.00	-16.05	Peak	VERTICAL
6	952.09	12.18	23.80	35.98	46.00	-10.02	Peak	VERTICAL



Test mode:	Transmitting (802.11a 149CH)	Horizontal
------------	------------------------------	------------

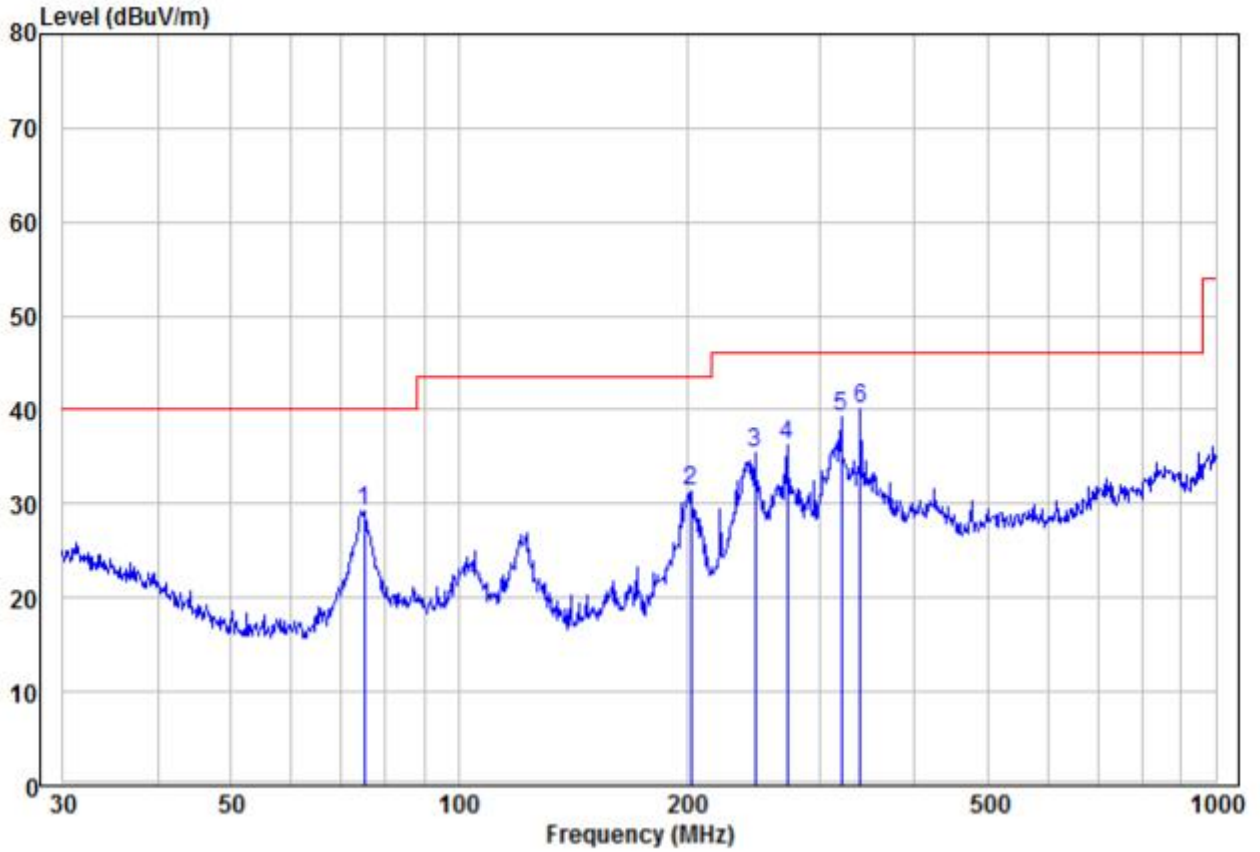

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	74.92	20.27	8.96	29.23	40.00	-10.77	Peak	HORIZONTAL
2	202.81	22.71	8.58	31.29	43.50	-12.21	Peak	HORIZONTAL
3	245.95	23.48	11.95	35.43	46.00	-10.57	Peak	HORIZONTAL
4	271.32	23.47	12.78	36.25	46.00	-9.75	Peak	HORIZONTAL
5	319.94	24.94	14.22	39.16	46.00	-6.84	Peak	HORIZONTAL
6 pp	339.59	25.35	14.70	40.05	46.00	-5.95	Peak	HORIZONTAL

**Transmitter Emission above 1GHz**

Test mode:		802.11a(6Mbps)		Test channel:		36 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10360	54.15	2.26	56.41	74	-17.59	peak	H
10360	36.71	2.26	38.97	54	-15.03	AVG	H
15540	50.85	3.75	54.60	74	-19.40	peak	H
15540	37.68	3.75	41.43	54	-12.57	AVG	H
10360	55.61	2.26	57.87	74	-16.13	peak	V
10360	38.33	2.26	40.59	54	-13.41	AVG	V
15540	51.01	3.75	54.76	74	-19.24	peak	V
15540	35.64	3.75	39.39	54	-14.61	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		48 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10480	51.93	2.31	54.24	74	-19.76	peak	H
10480	36.76	2.31	39.07	54	-14.93	AVG	H
15720	48.35	3.79	52.14	74	-21.86	peak	H
15720	36.63	3.79	40.42	54	-13.58	AVG	H
10480	52.97	2.31	55.28	74	-18.72	peak	V
10480	36.95	2.31	39.26	54	-14.74	AVG	V
15720	48.35	3.79	52.14	74	-21.86	peak	V
15720	36.87	3.79	40.66	54	-13.34	AVG	V



Test mode:		802.11a(6Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
11490	52.25	2.54	54.79	74	-19.21	peak	H
11490	38.11	2.54	40.65	54	-13.35	AVG	H
17235	50.49	3.94	54.43	74	-19.57	peak	H
17235	37.66	3.94	41.60	54	-12.40	AVG	H
11490	53.57	2.54	56.11	74	-17.89	peak	V
11490	38.87	2.54	41.41	54	-12.59	AVG	V
17235	50.21	3.94	54.15	74	-19.85	peak	V
17235	37.20	3.94	41.14	54	-12.86	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
11650	52.53	2.58	55.11	74	-18.89	peak	H
11650	38.40	2.58	40.98	54	-13.02	AVG	H
17475	49.34	4.02	53.36	74	-20.64	peak	H
17475	36.61	4.02	40.63	54	-13.37	AVG	H
11650	53.89	2.58	56.47	74	-17.53	peak	V
11650	38.95	2.58	41.53	54	-12.47	AVG	V
17475	50.80	4.02	54.82	74	-19.18	peak	V
17475	37.63	4.02	41.65	54	-12.35	AVG	V


Remark:

- 1) The 802.11a 6Mbps of rate is the worst case, only the worst data recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 40GHz, The disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## 8 Photographs - EUT Test Setup

### 8.1 Radiated Spurious Emission

9kHz~30MHz:

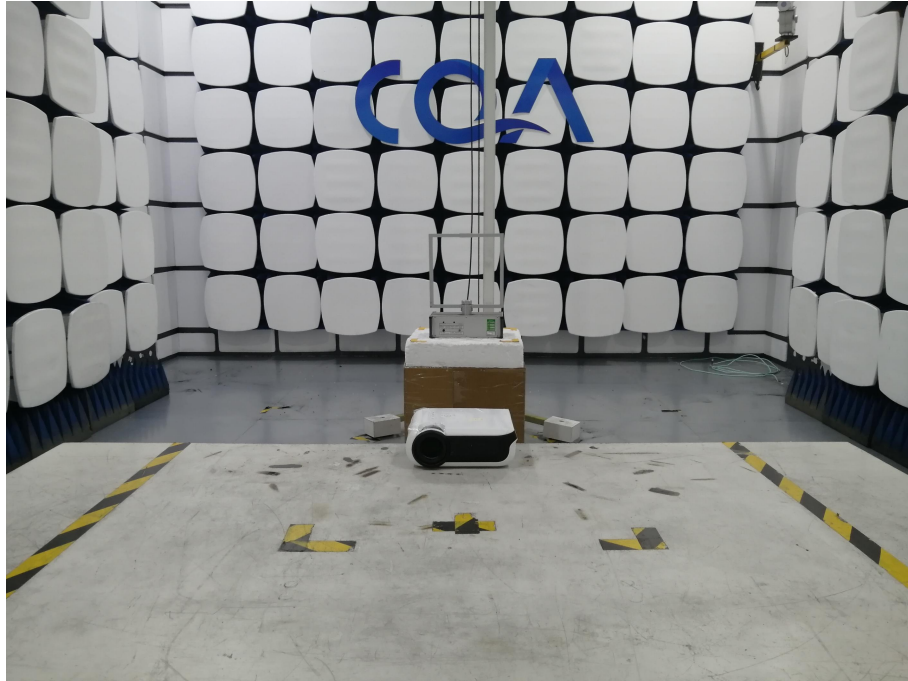


30MHz~1GHz:



Above 1GHz:



## 8.2 Conducted Emission

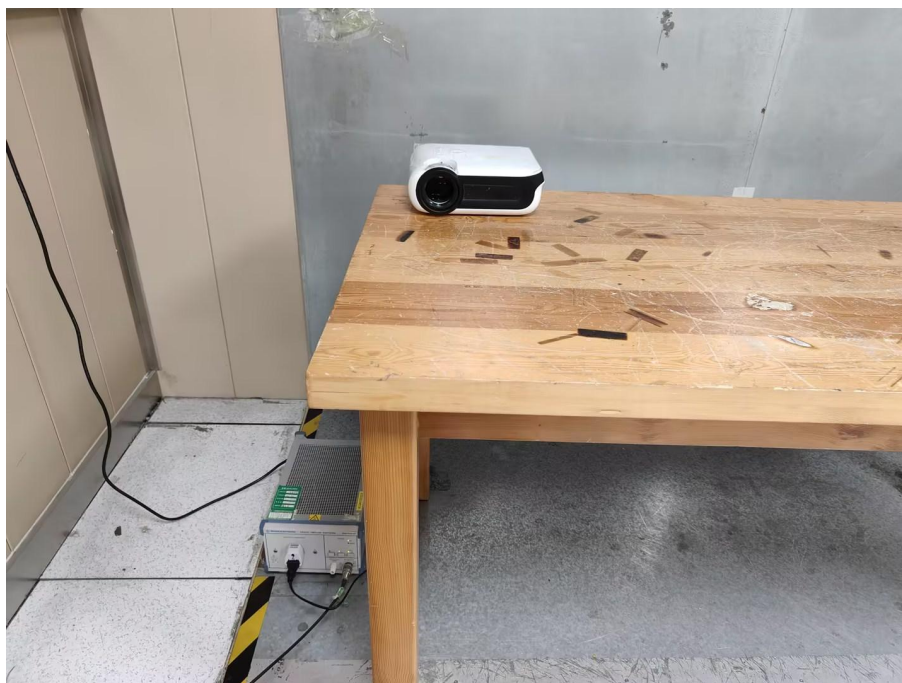

## 9 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20231102142E-01.

\*\*\* END OF REPORT \*\*\*