


Prüfbericht-Nr.: <i>Test Report No.:</i>	50055364 003	Auftrags-Nr.: <i>Order No.:</i>	164069058	Seite 1 von 313 <i>Page 1 of 313</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	14.07.2016	
Auftraggeber: <i>Client:</i>	ContextMedia LLC 330 N. Wabash Ave STE 2500, Chicago, Illinois United States			
Prüfgegenstand: <i>Test item:</i>	Wallboard 32" Tablet			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	P-WAL-106-YIT-01, P-WAL-106-YIT-02, P-WAL-106-YIT-03 (ContextMedia Health)			
Auftrags-Inhalt: <i>Order content:</i>	FCC/IC Certification			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.407 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-247 Issue 1 May 2015 RSS-Gen Issue 4 November 2014 KDB 789033 D02 v01			
Wareneingangsdatum: <i>Date of receipt:</i>	25.07.2016			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000395273-001, A000395273-002, A000395273-003			
Prüfzeitraum: <i>Testing period:</i>	27.07.2016 - 13.09.2016			
Ort der Prüfung: <i>Place of testing:</i>	Shenzhen EMTEK Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
				
18.09.2016	Andy Yan/Project Manager	18.09.2016	Owen Tian/Technical Certifier	
Datum	Name / Stellung	Datum	Name / Stellung	Unterschrift
Date	Name / Position	Date	Name / Position	Signature
Sonstiges / Other:		FCC ID: 2AI6X-PWALYIT IC: 21722-PWALYIT		
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:		1 = sehr gut		
P(ass) = entspricht o.g. Prüfgrundlage(n)		2 = gut		
Legend:		3 = befriedigend		
1 = very good		F(ail) = entspricht nicht o.g. Prüfgrundlage(n)		
2 = good		4 = ausreichend		
P(ass) = passed a.m. test specification(s)		N/A = nicht anwendbar		
3 = satisfactory		5 = mangelhaft		
F(ail) = failed a.m. test specification(s)		N/T = nicht getestet		
4 = sufficient				
N/A = not applicable				
5 = poor				
N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 PEAK OUTPUT POWER

RESULT: Pass

5.1.3 26dB BANDWIDTH

RESULT: Pass

5.1.4 99% BANDWIDTH

RESULT: Pass

5.1.5 6dB BANDWIDTH

RESULT: Pass

5.1.6 POWER SPECTRAL DENSITY

RESULT: Pass

5.1.7 SPURIOUS EMISSION

RESULT: Pass

5.1.8 CONDUCTED EMISSIONS

RESULT: Pass

CONTENTS

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS	10
4.	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE	11
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Peak Output Power</i>	<i>15</i>
5.1.3	<i>26dB Bandwidth</i>	<i>17</i>
5.1.4	<i>99% Bandwidth</i>	<i>19</i>
5.1.5	<i>6dB Bandwidth</i>	<i>21</i>
5.1.6	<i>Power spectral density</i>	<i>23</i>
5.1.7	<i>Spurious Emission</i>	<i>25</i>
5.1.8	<i>Conducted emissions.....</i>	<i>308</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP	311
7.	LIST OF TABLES	313
8.	LIST OF PHOTOGRAPHS	313

Prüfbericht - Nr.: 50055364 003
*Test Report No.***Seite 4 von 313**
Page 4 of 313

1. General Remarks

1.1 Complementary Materials

None.

2. Test Sites

2.1 Test Facilities

Shenzhen EMTEK Co., Ltd.

(FCC Registration No.: 709623)

(Test site Industry Canada No.: 4480A-2)

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, P.R. China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Transmitter spurious emissions				
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	2017-05-16
Loop Antenna	Schwarzbeck	FMZB 1519	1519-012	2017-05-16
Cable	H+B	3M SF104-26.5	295838/4	2017-05-28
Cable	H+B	6M SF104-26.5	295840/4	2017-05-28
Pre-Amplifier	HP	8447F	2944A07999	2017-05-16
Bilog Antenna	Schwarzbeck	VULB9163	142	2017-05-28
Cable	Schwarzbeck	AK9513	ACRX1	2017-05-16
Cable	Rosenberger	N/A	FP2RX2	2017-05-16
Cable	Schwarzbeck	AK9513	CRPX1	2017-05-28
Cable	Schwarzbeck	AK9513	CRRX2	2017-05-28
Pre-Amplifier	A.H.	PAM-0126	1415261	2017-05-16
Horn Antenna	Schwarzbeck	BBHA 9120	707	2017-05-28
Pre-Amplifier	A.H.	PAM-0126	1415261	2017-05-16
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91703 99	2017-05-16
EMI Test Receiver	Rohde & Schwarz	FSV40	132.1- 3008K39- 100967-AP	2017-05-16
Pre-Amplifier	Lunar EM	LNA26G40-40	J101313102 8001	2017-05-16
Horn Antenna	AHS/USA	SAS-573	184	2017-05-16
Cable	H+B	0.5M SF104- 26.5	289147/4	2017-05-16
Cable	H+B	3M SF104-26.5	295838/4	2017-05-16
Cable	H+B	6M SF104-26.5	295840/4	2017-05-16
Radio Spectrum Test				
EMI Test Receiver	Rohde & Schwarz	ESCI	101045	2017-05-16
Vector Signal Generator	Agilent	N5182B	My53050553	2017-05-28
Analog Signal Generator	Agilent	N5171B	My53050878	2017-05-28
Signal Analyzer	Agilent	N9010A	My53470879	2017-05-28
Power Meter	Agilent	PS-X10-100	N/A	2017-05-28
Temp. / Humidity Chamber	Kingson	THS-M1	242	2017-05-28
Conducted Emission				
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	2017-05-16
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	2017-05-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	2017-05-16
Voltage Probe	Rohde & Schwarz	TK9416	N/A	2017-05-16
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	2017-05-16
50Ω Coaxial Switch	Anritsu	MP59B	M20531	2017-05-16

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

Prüfbericht - Nr.: 50055364 003*Test Report No.***Seite 7 von 313***Page 7 of 313*

2.7 Status of Facility Used for Testing

Shenzhen EMTEK Co., Ltd. test facility located at Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUTs are wallboard 32" tablet with Wi-Fi, Bluetooth function.
 All models are identical except the model name.
 For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

Technical Specification	Value
Kind of Equipment	Wallboard 32" Tablet
Type Designation	P-WAL-106-YIT-01, P-WAL-106-YIT-02, P-WAL-106-YIT-03
FCC ID	2A16X-PWALYIT
IC	21722-PWALYIT
Operating Frequency band	5180 – 5240MHz, 5745 – 5825MHz
Extreme Temperature Range	0~+40°C
Operation Voltage	DC 12V (via AC/DC adapter)
Antenna Gain	1.98dBi

Table 4: Technical Specification of 5GHz, 802.11a/n

Operating mode(s) / Wi-Fi:	IEEE 802.11a	IEEE 802.11n HT20	IEEE 802.11n HT40
Test modulation	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
Transmit Frequency Range (MHz):	5180 - 5240, 5745 - 5825	5180 - 5240, 5745 - 5825	5190 - 5230, 5755 - 5795
Channel Number	9	9	4
Data Rate (Mbps)	6, 9, 12, 18, 24, 36, 48, 54	MCS0 ~ MCS7	MCS0 ~ MCS7
Maximum tune-up average output power (dBm):	16	16	15

Table 5: Technical Specification of 5GHz, 802.11ac

Operating mode(s) / WiFi:	IEEE 802.11ac VHT20	IEEE 802.11ac VHT40	IEEE 802.11ac VHT80
Test modulation	OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)
Transmit Frequency Range (MHz):	5180 - 5240, 5745 - 5825	5190 - 5230, 5755 - 5795	5210, 5775
Channel Number	9	4	2
Data Rate (Mbps)	MCS0 ~ MCS8	MCS0 ~ MCS9	MCS0 ~ MCS9
Maximum tune-up average output power (dBm):	16	15	14

Table 6: List of WLAN Channel of 5GHz 802.11a/n

802.11a		802.11n HT20		802.11n HT40	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	36	5180	38	5190
40	5200	40	5200	46	5230
44	5220	44	5220	151	5755
48	5240	48	5240	159	5795
149	5745	149	5745		
153	5765	153	5765		
157	5785	157	5785		
161	5805	161	5805		
165	5825	165	5825		

Table 7: List of WLAN Channel of 5GHz 802.11ac

802.11ac VHT20		802.11ac VHT40		802.11ac VHT80	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	155	5775
44	5220	151	5755		
48	5240	159	5795		
149	5745				
153	5765				
157	5785				
161	5805				
165	5825				

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi mode
 - 1. Transmitting
 - a. 802.11a
 - b. 802.11n HT20
 - c. 802.11n HT40
 - d. 802.11ac VHT20
 - e. 802.11ac VHT40
 - f. 802.11ac VHT80
 - 2. Receiving
- B. Standby
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Bill of Material
- Constructional Drawing
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

Description	Manufacturer	Part No.	Rating
AC/DC Adapter	FUJIA	FJ-SW1205000	Input: AC 100-240V, 50/60Hz, 1.5A Output: DC 12.0V, 5.0A

The EUT was tested with following cables:

Interface(s)/Port(s):	Max. cable length, shielding	Cable classification
AC Mains of adapter	2 cores, non-shielded port, 3m	AC Power Input
DC input port	2 cores, non-shielded port, 1m	DC Power Input

4.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF). No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test of below 1GHz

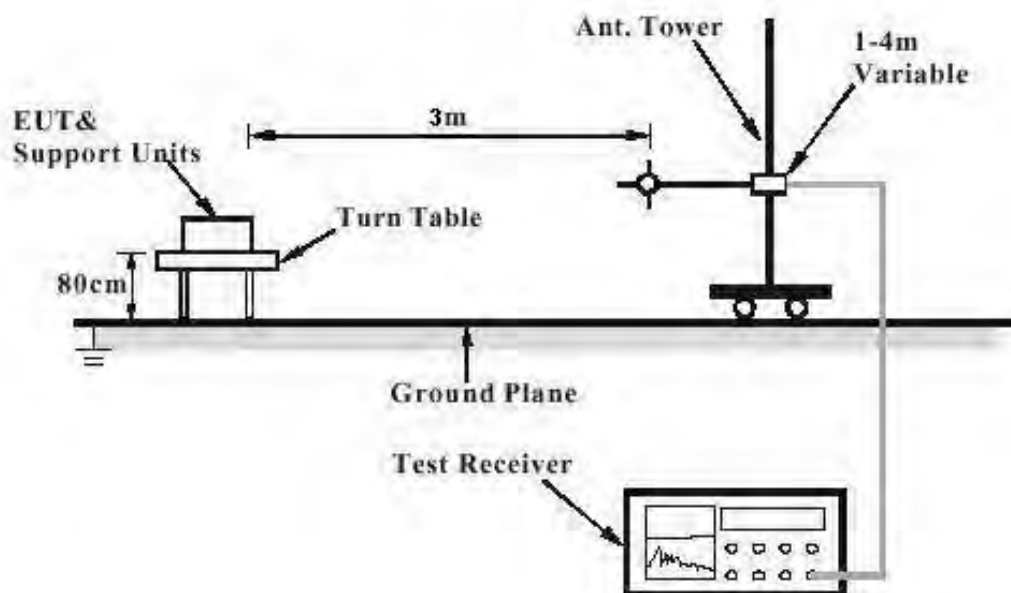


Diagram of Measurement Configuration for Radiation Test of above 1GHz

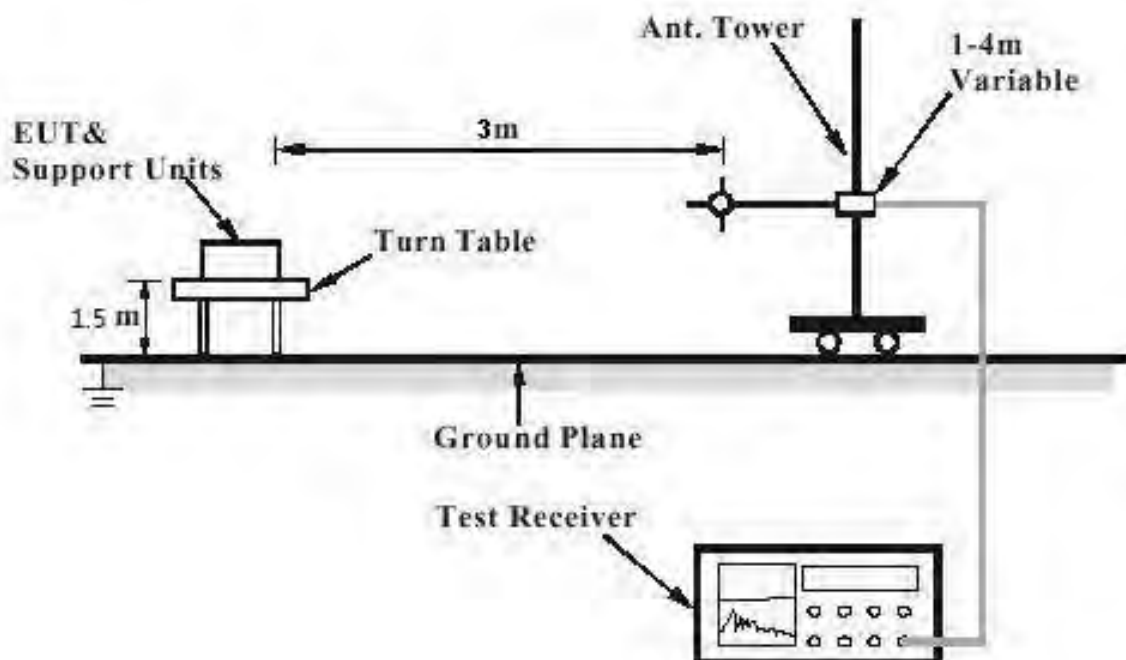


Diagram of Measurement Equipment Configuration for Conduction Measurement

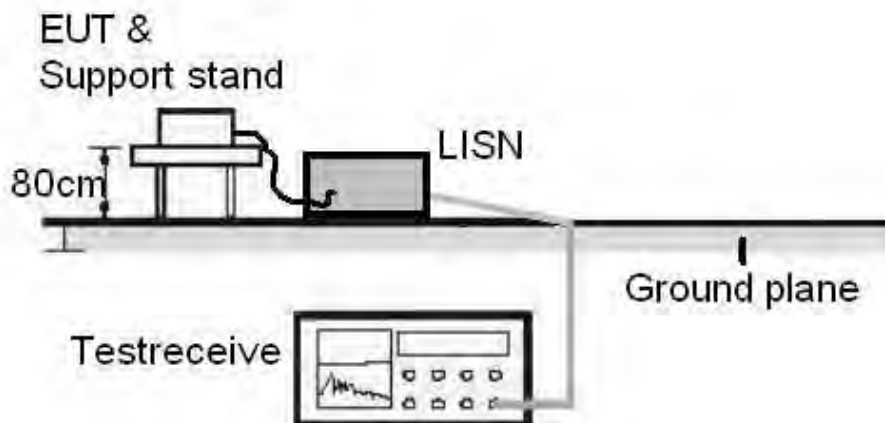
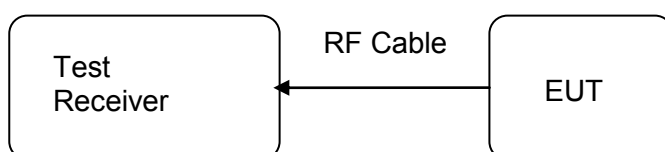


Diagram of Measurement Equipment Configuration for Transmitter Measurement



5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass**

Test standard	:	FCC Part 15.203 RSS-Gen Clause 8.3
Limit		The use of antennas with directional gains that do not exceed 6dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 1.98dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

5.1.2 Peak Output Power

RESULT:
Pass

Test date : 2016-08-09
 Test standard : FCC Part 15.407(a)(1)(iv)
 FCC Part 15.407(a)(3)
 RSS-247 clause 6.2.1(1)
 RSS-247 clause 6.2.4(1)
 Basic standard : ANSI C63.10: 2013
 Limit : 24dBm for FCC, 23dBm for IC (Band U-NII-1)
 30dBm (Band U-NII-3)
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A.1
 Ambient temperature : 25°C
 Relative humidity : 50%
 Atmospheric pressure : 101kPa

Table 8: Test result of Peak Output Power of Band U-NII-1

Mode	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
802.11a	5180	16.27	23
	5200	16.33	23
	5240	16.51	23
802.11n HT20	5180	15.62	23
	5200	16.28	23
	5240	16.41	23
802.11n HT40	5190	12.51	23
	5230	14.07	23
802.11ac VHT20	5180	15.58	23
	5200	16.18	23
	5240	16.36	23
802.11ac VHT40	5190	12.86	23
	5230	14.02	23
802.11ac VHT80	5210	12.42	23

Table 9: Test result of Peak Output Power of Band U-NII-3

Mode	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
802.11a	5745	16.43	30
	5785	16.09	30
	5825	16.06	30
802.11n HT20	5745	16.55	30
	5785	16.13	30
	5825	16.10	30
802.11n HT40	5755	14.12	30
	5795	13.47	30
802.11ac VHT20	5745	16.50	30
	5785	15.99	30
	5825	15.98	30
802.11ac VHT40	5755	14.17	30
	5795	13.60	30
802.11ac VHT80	5775	13.51	30

5.1.3 26dB Bandwidth

RESULT:
Pass

Date of testing : 2016-07-27
 Test standard : FCC Part 15.407(a)(5)
 Basic standard : ANSI C63.10: 2013
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A.1
 Ambient temperature : 25°C
 Relative humidity : 50%
 Atmospheric pressure : 101kPa

Table 10: Test result of 26dB Bandwidth Band U-NII-1

Mode	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a	5180	21.71	N/A
	5200	21.50	N/A
	5240	21.47	N/A
802.11n HT20	5180	25.81	N/A
	5200	27.79	N/A
	5240	29.62	N/A
802.11n HT40	5190	64.14	N/A
	5230	59.86	N/A
802.11ac VHT20	5180	25.90	N/A
	5200	28.56	N/A
	5240	26.33	N/A
802.11ac VHT40	5190	56.07	N/A
	5230	55.17	N/A
802.11ac VHT80	5210	95.65	N/A

Table 11: Test result of 26dB Bandwidth of Band U-NII-3

Mode	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a	5745	25.29	N/A
	5785	22.46	N/A
	5825	23.33	N/A
802.11n HT20	5745	28.15	N/A
	5785	28.82	N/A
	5825	28.59	N/A
802.11n HT40	5755	76.92	N/A
	5795	71.66	N/A
802.11ac VHT20	5745	28.17	N/A
	5785	29.10	N/A
	5825	24.09	N/A
802.11ac VHT40	5755	75.34	N/A
	5795	71.09	N/A
802.11ac VHT80	5775	144.00	N/A

5.1.4 99% Bandwidth

RESULT:
Pass

Date of testing : 2016-07-27
 Test standard : RSS-Gen clause 6.6
 Basic standard : ANSI C63.10: 2013
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A.1
 Ambient temperature : 25°C
 Relative humidity : 50%
 Atmospheric pressure : 101kPa

Table 12: Test result of 99% Bandwidth Band U-NII-1

Mode	Channel Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	5180	16.812	N/A
	5200	16.810	N/A
	5240	16.784	N/A
802.11n HT20	5180	18.005	N/A
	5200	18.012	N/A
	5240	18.002	N/A
802.11n HT40	5190	36.506	N/A
	5230	36.483	N/A
802.11ac VHT20	5180	17.976	N/A
	5200	18.035	N/A
	5240	18.006	N/A
802.11ac VHT40	5190	36.574	N/A
	5230	36.541	N/A
802.11ac VHT80	5210	76.011	N/A

Table 13: Test result of 99% Bandwidth of Band U-NII-3

Mode	Channel Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	5745	16.958	N/A
	5785	16.883	N/A
	5825	16.860	N/A
802.11n HT20	5745	18.083	N/A
	5785	18.024	N/A
	5825	18.060	N/A
802.11n HT40	5755	36.904	N/A
	5795	36.728	N/A
802.11ac VHT20	5745	18.095	N/A
	5785	18.086	N/A
	5825	18.046	N/A
802.11ac VHT40	5755	37.058	N/A
	5795	36.794	N/A
802.11ac VHT80	5775	76.421	N/A

Mode	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5180	16.39	≥0.5
	5200	16.38	≥0.5
	5240	16.39	≥0.5
802.11n HT20	5180	17.65	≥0.5
	5200	17.65	≥0.5
	5240	17.63	≥0.5
802.11n HT40	5190	36.43	≥0.5
	5230	36.35	≥0.5
802.11ac VHT20	5180	17.65	≥0.5
	5200	17.60	≥0.5
	5240	17.63	≥0.5
802.11ac VHT40	5190	36.41	≥0.5
	5230	36.31	≥0.5
802.11ac VHT80	5210	75.65	≥0.5

Table 15: Test result of 6dB Bandwidth of Band U-NII-3

Mode	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5745	16.39	≥0.5
	5785	16.37	≥0.5
	5825	16.39	≥0.5
802.11n HT20	5745	17.64	≥0.5
	5785	17.62	≥0.5
	5825	17.63	≥0.5
802.11n HT40	5755	36.40	≥0.5
	5795	36.39	≥0.5
802.11ac VHT20	5745	17.64	≥0.5
	5785	17.65	≥0.5
	5825	17.67	≥0.5
802.11ac VHT40	5755	36.38	≥0.5
	5795	36.38	≥0.5
802.11ac VHT80	5775	75.88	≥0.5

Mode	Channel Frequency (MHz)	Result (dBm/MHz)	Limit (dBm/MHz)
802.11a	5180	8.635	10
	5200	8.933	10
	5240	9.674	10
802.11n HT20	5180	8.708	10
	5200	9.348	10
	5240	9.817	10
802.11n HT40	5190	6.318	10
	5230	8.113	10
802.11ac VHT20	5180	8.553	10
	5200	8.658	10
	5240	9.744	10
802.11ac VHT40	5190	6.836	10
	5230	8.075	10
802.11ac VHT80	5210	4.407	10

Table 17: Test result of power spectral density of Band U-NII-3

Mode	Channel Frequency (MHz)	Result (dBm/500kHz)	Limit (dBm/500kHz)
802.11a	5745	9.241	30
	5785	8.350	30
	5825	8.539	30
802.11n HT20	5745	9.918	30
	5785	9.141	30
	5825	9.221	30
802.11n HT40	5755	4.805	30
	5795	3.707	30
802.11ac VHT20	5745	9.242	30
	5785	8.982	30
	5825	9.011	30
802.11ac VHT40	5755	4.905	30
	5795	4.032	30
802.11ac VHT80	5775	2.091	30

5.1.7 Spurious Emission

RESULT:**Pass**

Date of testing	:	2016-08-20 to 2016-09-06
Test standard	:	FCC part 15.407(b) RSS-247 clause 6.2.1(2) RSS-247 clause 6.2.4(2) KDB789033 D02 v01
Basic standard	:	ANSI C63.10: 2013
Limits	:	FCC part 15.209(a)
Kind of test site	:	3m Semi-Anechoic Chamber & Anechoic Chamber

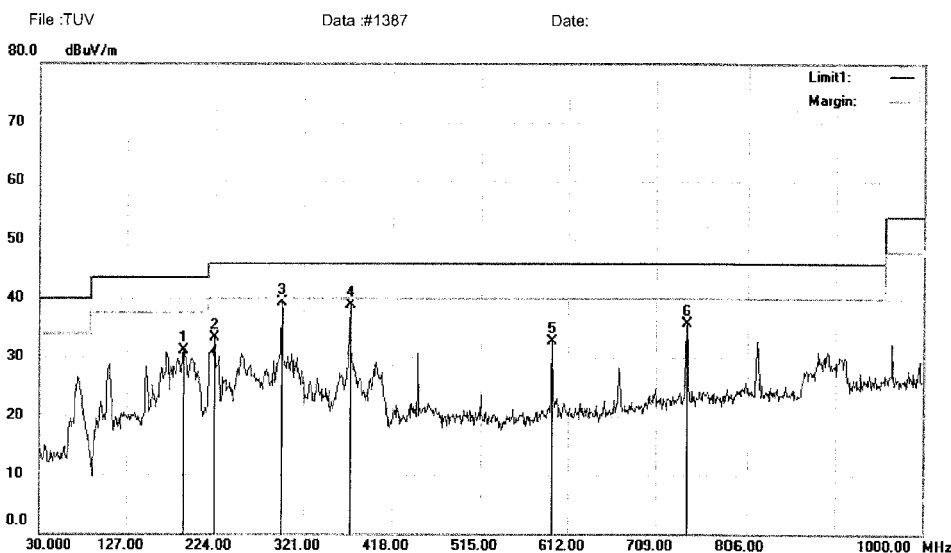
Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A.1
Ambient temperature	:	24°C
Relative humidity	:	53%
Atmospheric pressure	:	101kPa

The frequency range of testing is 30MHz to 40GHz, and no any emissions were found from 26.5GHz to 40GHz, hence the radiated emission from 26.5GHz to 40GHz were not recorded.

For details refer to following test plot.

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		190.0500	47.91	-16.79	31.12	43.50	-12.38	QP		
2		223.0300	47.75	-14.41	33.34	46.00	-12.66	QP		
3	*	296.7500	51.02	-11.73	39.29	46.00	-6.71	QP		
4		371.4400	49.26	-10.36	38.90	46.00	-7.10	QP		
5		594.5400	38.61	-5.95	32.66	46.00	-13.34	QP		
6		742.9500	39.24	-3.63	35.61	46.00	-10.39	QP		

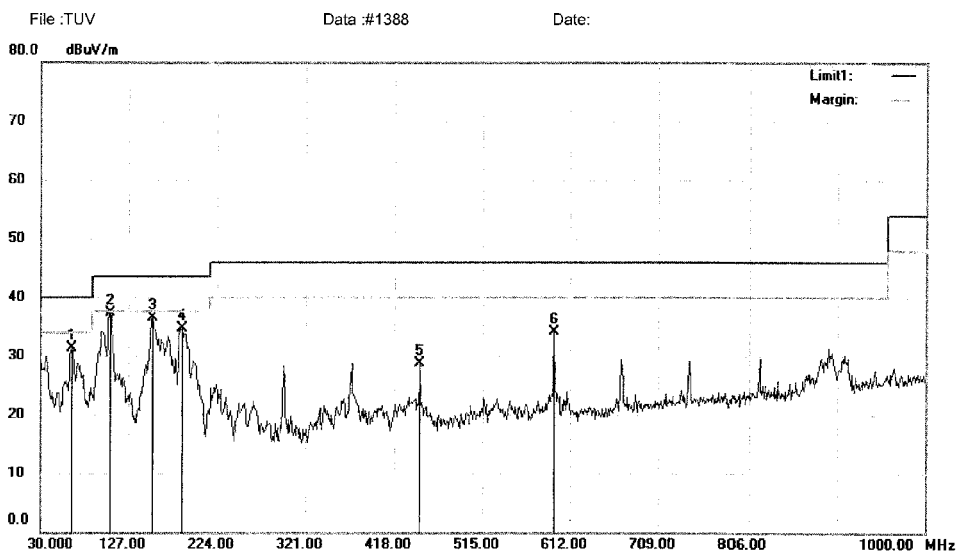
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1387

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11a 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		63.9500	47.51	-16.30	31.21	40.00	-8.79	QP		
2	*	106.6300	52.63	-15.34	37.29	43.50	-6.21	QP		
3		153.1900	55.11	-18.70	36.41	43.50	-7.09	QP		
4		185.2000	51.75	-16.97	34.78	43.50	-8.72	QP		
5		446.1300	37.46	-8.73	28.73	46.00	-17.27	QP		
6		594.5400	40.14	-5.95	34.19	46.00	-11.81	QP		

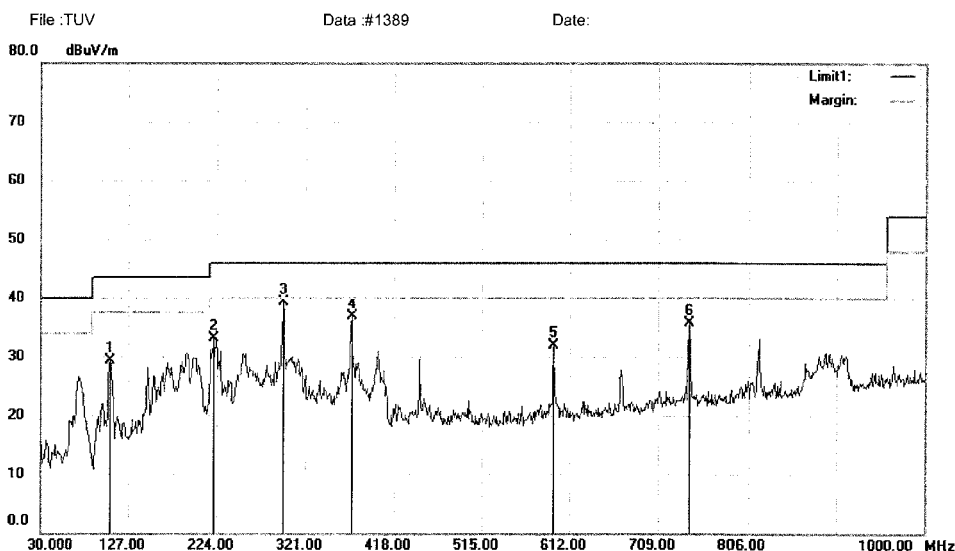
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV\Data : #1388

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11a 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		106.6300	44.56	-15.34	29.22	43.50	-14.28	QP		
2		221.0900	47.48	-14.47	33.01	46.00	-12.99	QP		
3	*	296.7500	50.95	-11.73	39.22	46.00	-6.78	QP		
4		371.4400	47.34	-10.36	36.98	46.00	-9.02	QP		
5		594.5400	37.93	-5.95	31.98	46.00	-14.02	QP		
6		742.9500	39.39	-3.63	35.76	46.00	-10.24	QP		

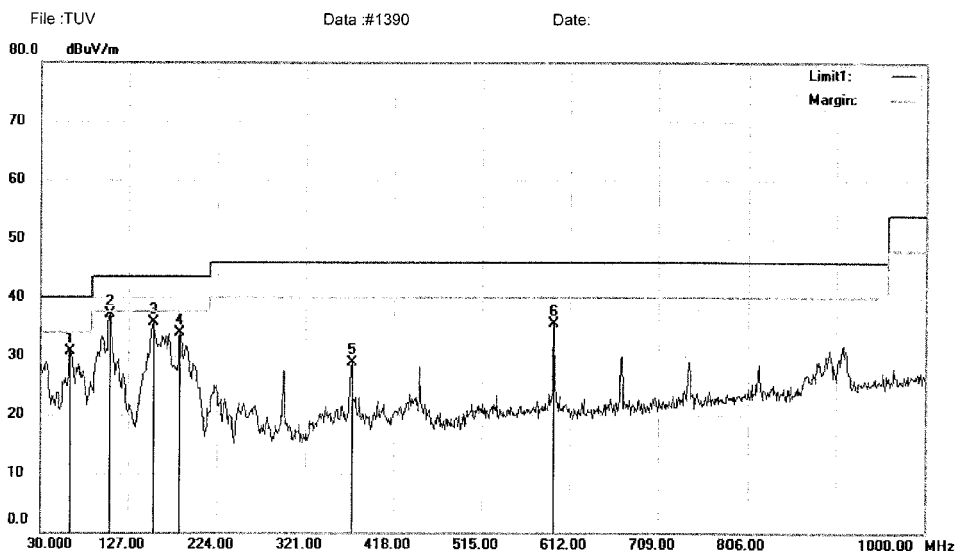
*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUV\Data #1389

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11a 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		62.9800	46.93	-16.16	30.77	40.00	-9.23	QP		
2	*	106.6300	52.46	-15.34	37.12	43.50	-6.38	QP		
3		154.1600	54.42	-18.65	35.77	43.50	-7.73	QP		
4		183.2600	50.90	-17.05	33.85	43.50	-9.65	QP		
5		371.4400	39.30	-10.36	28.94	46.00	-17.06	QP		
6		594.5400	41.54	-5.95	35.59	46.00	-10.41	QP		

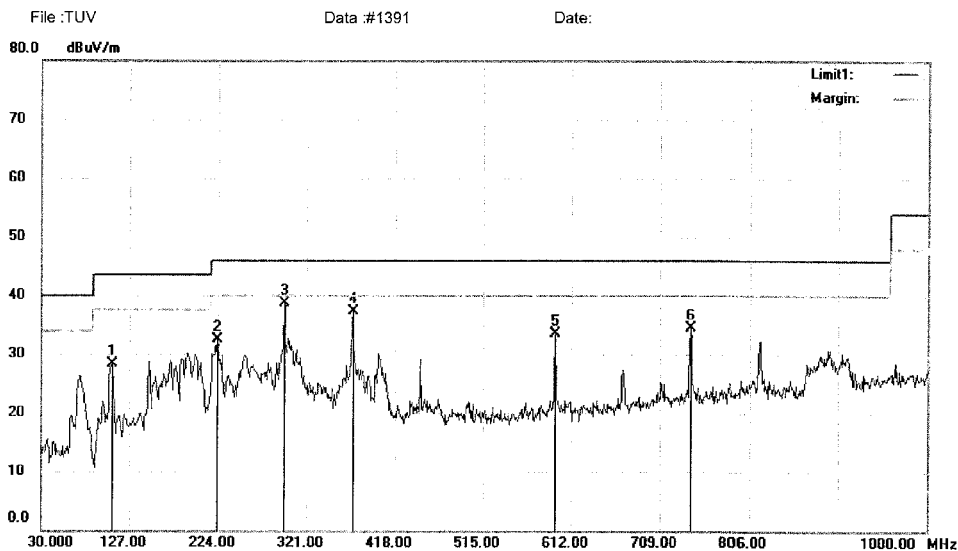
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data #1390

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		107.6000	43.67	-15.35	28.32	43.50	-15.18	QP		
2		223.0300	46.82	-14.41	32.41	46.00	-13.59	QP		
3	*	296.7500	50.52	-11.73	38.79	46.00	-7.21	QP		
4		371.4400	47.76	-10.36	37.40	46.00	-8.60	QP		
5		594.5400	39.46	-5.95	33.51	46.00	-12.49	QP		
6		742.9500	38.17	-3.63	34.54	46.00	-11.46	QP		

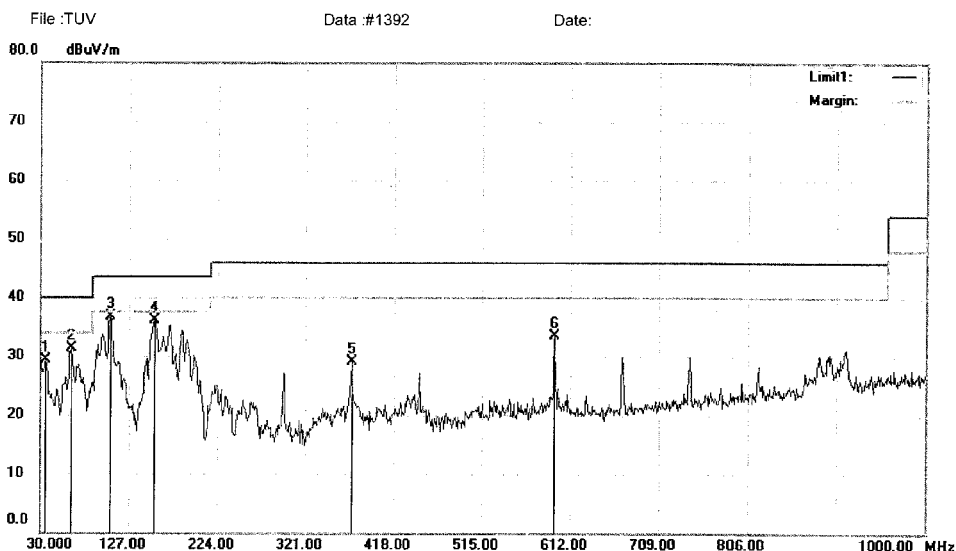
*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUV\Data :#1391

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11a 5240

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		35.8200	46.15	-16.79	29.36	40.00	-10.64	QP		
2		63.9500	47.59	-16.30	31.29	40.00	-8.71	QP		
3	*	106.6300	51.97	-15.34	36.63	43.50	-6.87	QP		
4		154.1600	54.66	-18.65	36.01	43.50	-7.49	QP		
5		371.4400	39.56	-10.36	29.20	46.00	-16.80	QP		
6		594.5400	39.52	-5.95	33.57	46.00	-12.43	QP		

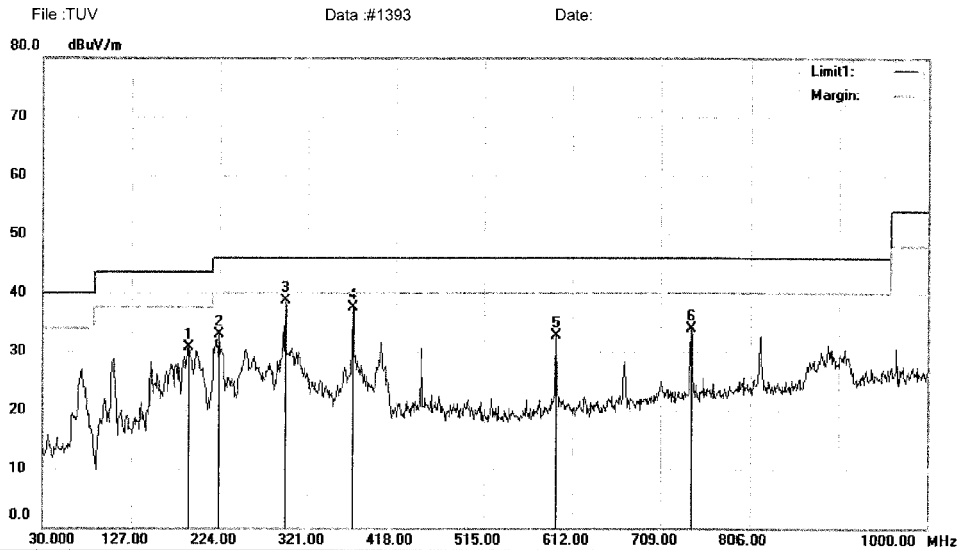
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1392

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		189.0800	47.55	-16.84	30.71	43.50	-12.79	QP		
2		223.0300	47.30	-14.41	32.89	46.00	-13.11	QP		
3	*	296.7500	50.43	-11.73	38.70	46.00	-7.30	QP		
4		370.4700	47.90	-10.39	37.51	46.00	-8.49	QP		
5		594.5400	38.60	-5.95	32.65	46.00	-13.35	QP		
6		742.9500	37.51	-3.63	33.88	46.00	-12.12	QP		

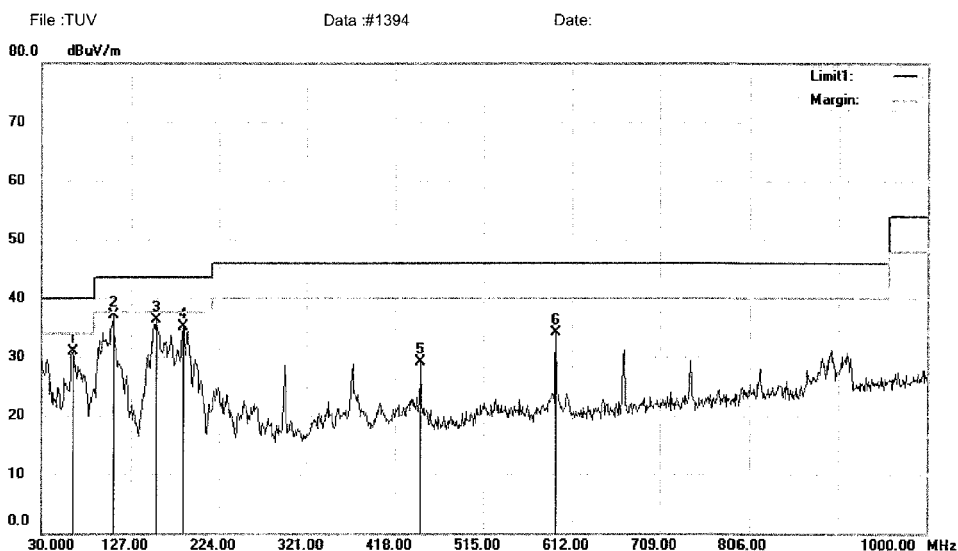
*.Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1393

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		63.9500	47.16	-16.30	30.86	40.00	-9.14	QP		
2	*	107.6000	52.41	-15.35	37.06	43.50	-6.44	QP		
3		155.1300	54.91	-18.60	36.31	43.50	-7.19	QP		
4		184.2300	52.02	-17.01	35.01	43.50	-8.49	QP		
5		446.1300	37.78	-8.73	29.05	46.00	-16.95	QP		
6		594.5400	40.06	-5.95	34.11	46.00	-11.89	QP		

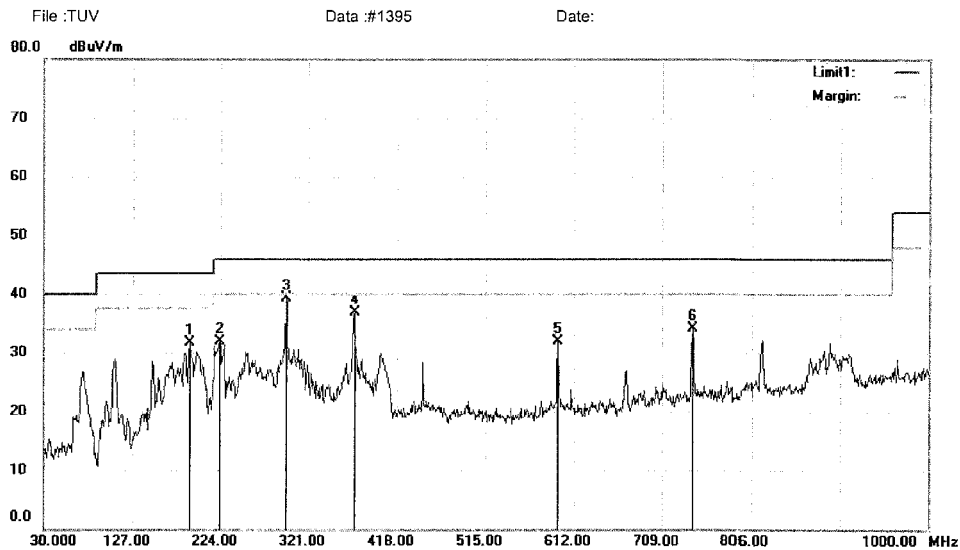
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data #1394

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		189.0800	48.59	-16.84	31.75	43.50	-11.75	QP		
2		223.0300	46.27	-14.41	31.86	46.00	-14.14	QP		
3	*	296.7500	50.96	-11.73	39.23	46.00	-6.77	QP		
4		371.4400	47.24	-10.36	36.88	46.00	-9.12	QP		
5		594.5400	37.87	-5.95	31.92	46.00	-14.08	QP		
6		742.9500	37.73	-3.63	34.10	46.00	-11.90	QP		

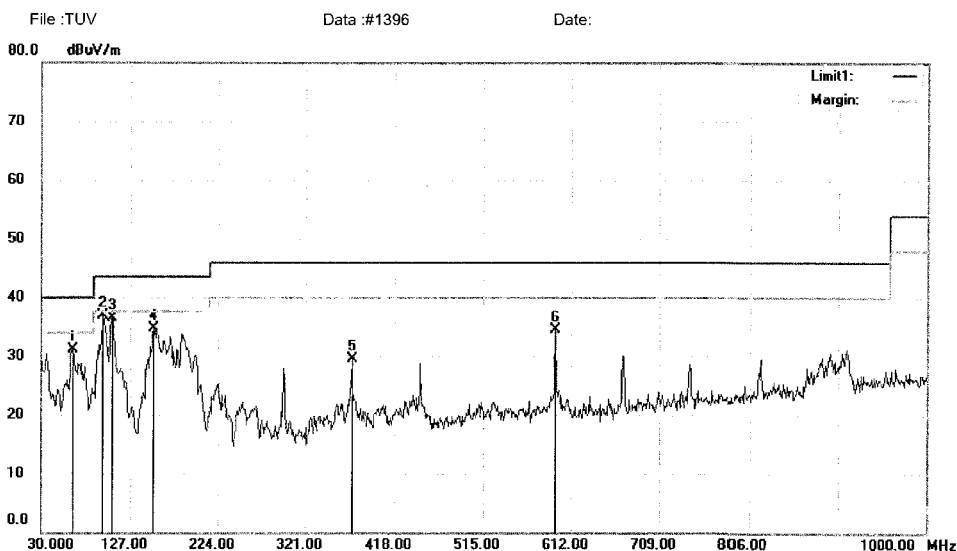
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1395

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		63.9500	47.36	-16.30	31.06	40.00	-8.94	QP		
2	*	96.9300	52.64	-15.82	36.82	43.50	-6.68	QP		
3		106.6300	51.81	-15.34	36.47	43.50	-7.03	QP		
4		152.2200	53.35	-18.74	34.61	43.50	-8.89	QP		
5		371.4400	39.95	-10.36	29.59	46.00	-16.41	QP		
6		594.5400	40.40	-5.95	34.45	46.00	-11.55	QP		

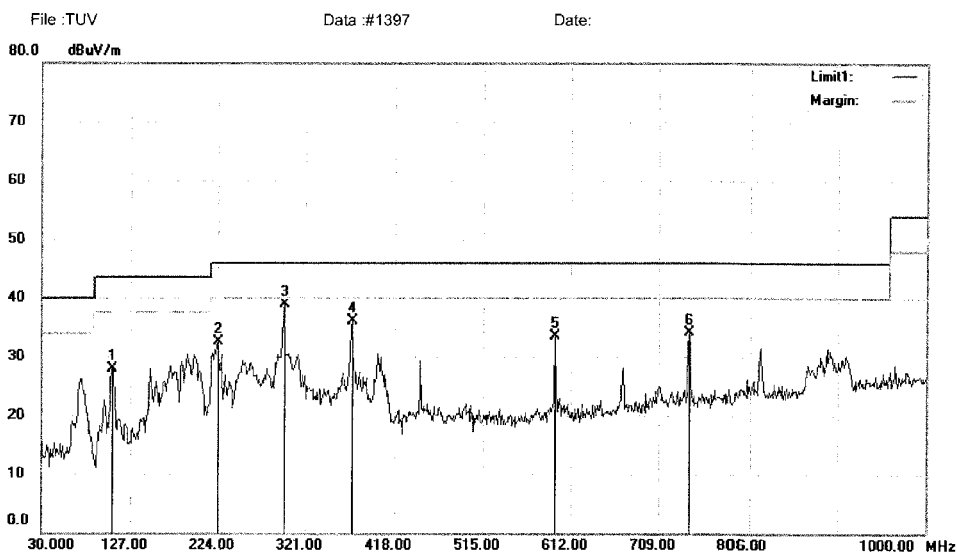
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1396

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11a 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		106.6300	43.34	-15.34	28.00	43.50	-15.50	QP		
2		224.0000	46.98	-14.39	32.59	46.00	-13.41	QP		
3	*	297.7200	50.51	-11.69	38.82	46.00	-7.18	QP		
4		371.4400	46.49	-10.36	36.13	46.00	-9.87	QP		
5		594.5400	39.54	-5.95	33.59	46.00	-12.41	QP		
6		742.9500	37.75	-3.63	34.12	46.00	-11.88	QP		

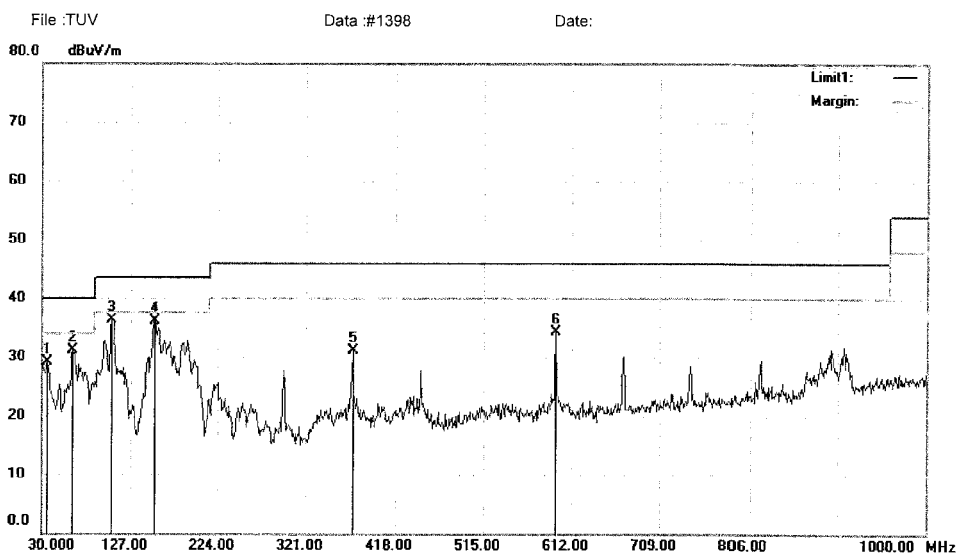
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data #1397

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		35.8200	45.82	-16.79	29.03	40.00	-10.97	QP		
2		62.9800	47.36	-16.16	31.20	40.00	-8.80	QP		
3	*	105.6600	51.61	-15.32	36.29	43.50	-7.21	QP		
4		153.1900	54.85	-18.70	36.15	43.50	-7.35	QP		
5		371.4400	41.39	-10.36	31.03	46.00	-14.97	QP		
6		594.5400	40.17	-5.95	34.22	46.00	-11.78	QP		

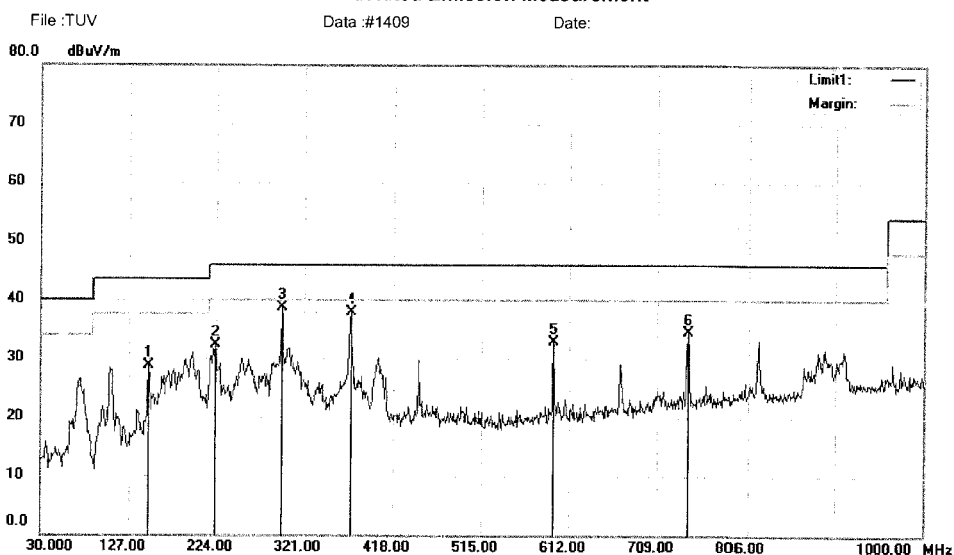
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1398

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		148.3400	47.52	-18.88	28.64	43.50	-14.86	QP		
2		223.0300	46.62	-14.41	32.21	46.00	-13.79	QP		
3	*	296.7500	50.38	-11.73	38.65	46.00	-7.35	QP		
4		371.4400	48.17	-10.36	37.81	46.00	-8.19	QP		
5		594.5400	38.90	-5.95	32.95	46.00	-13.05	QP		
6		742.9500	38.07	-3.63	34.44	46.00	-11.56	QP		

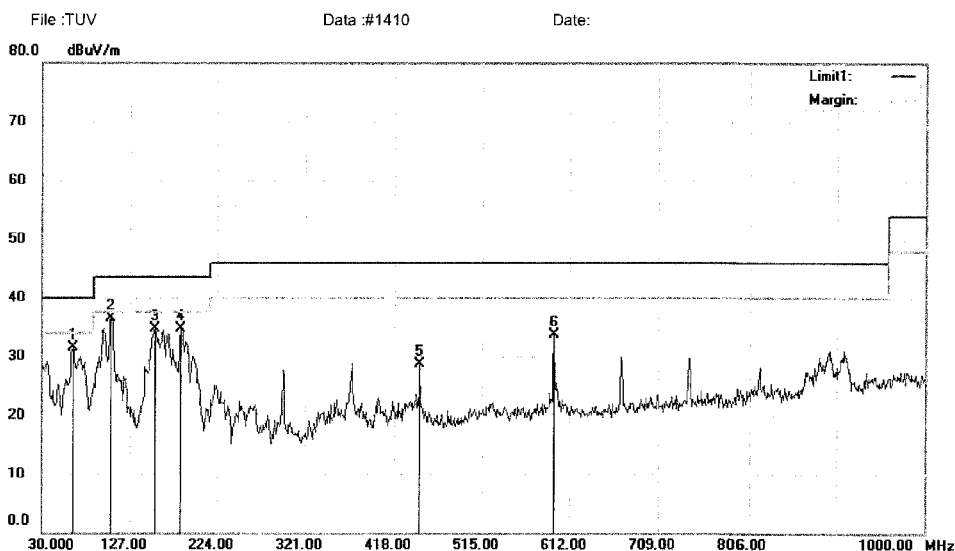
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1409

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm
1		63.9500	47.71	-16.30	31.41	40.00	-8.59	QP	
2	*	105.6600	51.86	-15.32	36.54	43.50	-6.96	QP	
3		154.1600	53.37	-18.65	34.72	43.50	-8.78	QP	
4		183.2600	51.73	-17.05	34.68	43.50	-8.82	QP	
5		446.1300	37.40	-8.73	28.67	46.00	-17.33	QP	
6		594.5400	39.71	-5.95	33.76	46.00	-12.24	QP	

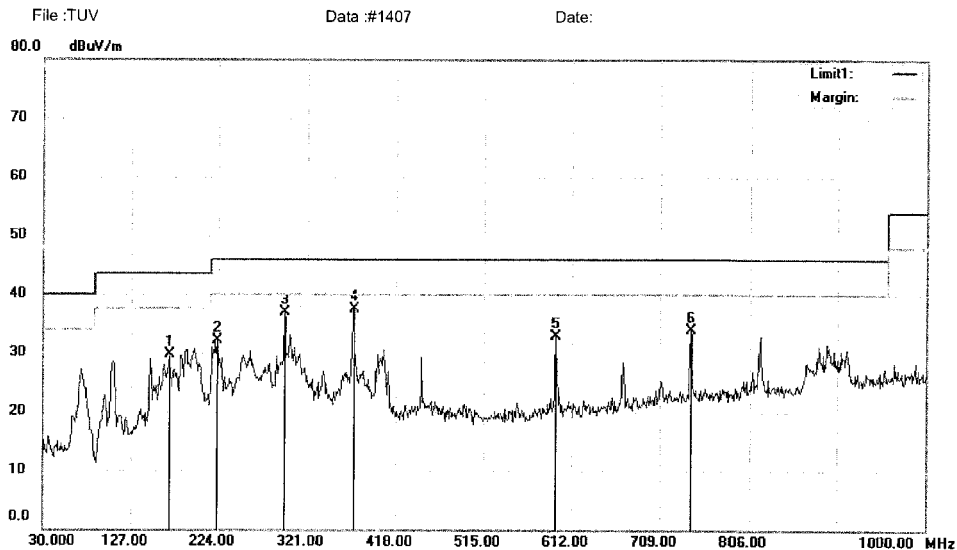
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1410

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		169.6800	46.89	-17.26	29.63	43.50	-13.87	QP		
2		223.0300	46.43	-14.41	32.02	46.00	-13.98	QP		
3		296.7500	48.54	-11.73	36.81	46.00	-9.19	QP		
4	*	371.4400	47.88	-10.36	37.52	46.00	-8.48	QP		
5		594.5400	38.87	-5.95	32.92	46.00	-13.08	QP		
6		742.9500	37.45	-3.63	33.82	46.00	-12.18	QP		

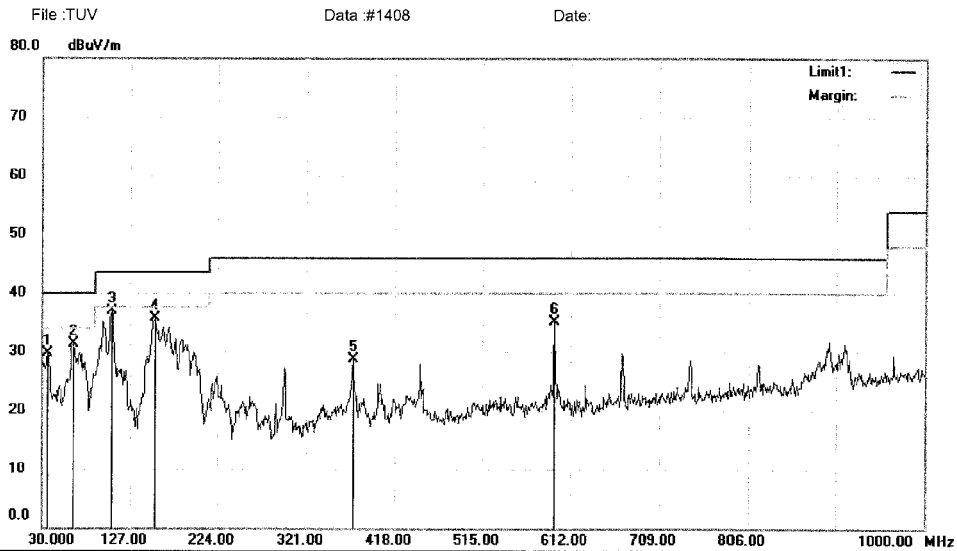
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1407

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		35.8200	46.56	-16.79	29.77	40.00	-10.23	QP		
2		63.9500	47.59	-16.30	31.29	40.00	-8.71	QP		
3	*	106.6300	52.17	-15.34	36.83	43.50	-6.67	QP		
4		155.1300	54.22	-18.60	35.62	43.50	-7.88	QP		
5		371.4400	39.08	-10.36	28.72	46.00	-17.28	QP		
6		594.5400	40.98	-5.95	35.03	46.00	-10.97	QP		

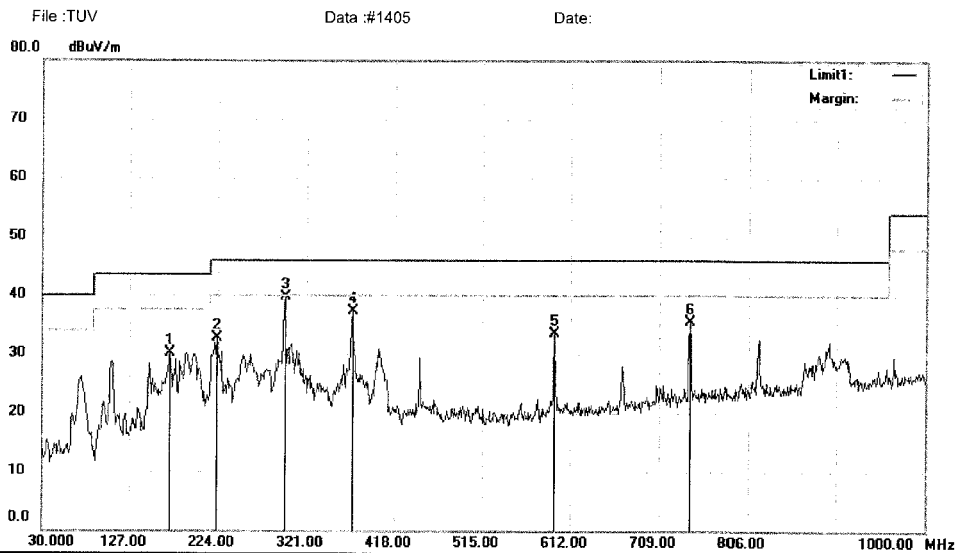
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1408

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		171.6200	47.32	-17.21	30.11	43.50	-13.39	QP		
2		223.0300	47.05	-14.41	32.64	46.00	-13.36	QP		
3	*	297.7200	51.46	-11.69	39.77	46.00	-6.23	QP		
4		371.4400	47.72	-10.36	37.36	46.00	-8.64	QP		
5		594.5400	39.38	-5.95	33.43	46.00	-12.57	QP		
6		742.9500	39.22	-3.63	35.59	46.00	-10.41	QP		

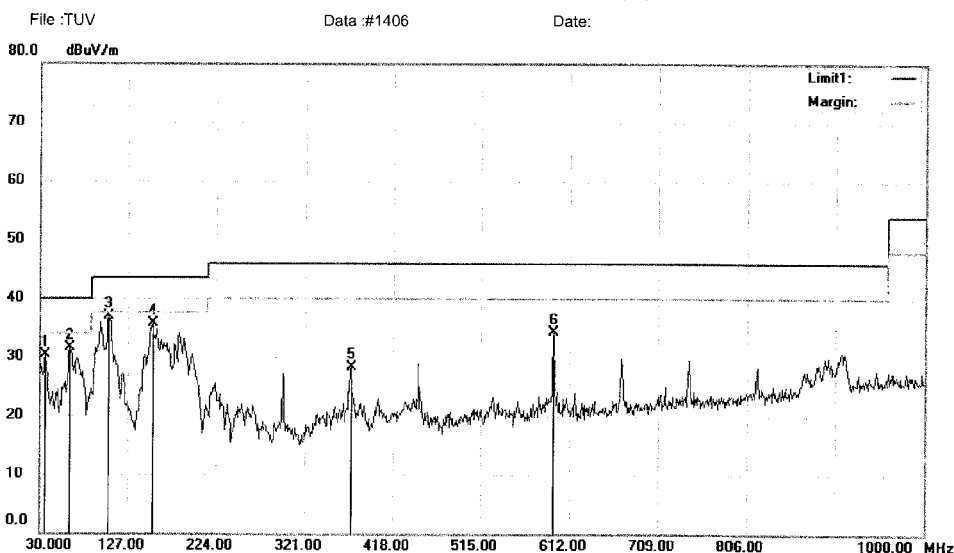
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1405

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11n(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		35.8200	47.11	-16.79	30.32	40.00	-9.68	QP		
2		62.9800	47.60	-16.16	31.44	40.00	-8.56	QP		
3	*	105.6600	52.19	-15.32	36.87	43.50	-6.63	QP		
4		154.1600	54.33	-18.65	35.68	43.50	-7.82	QP		
5		371.4400	38.72	-10.36	28.36	46.00	-17.64	QP		
6		594.5400	40.17	-5.95	34.22	46.00	-11.78	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

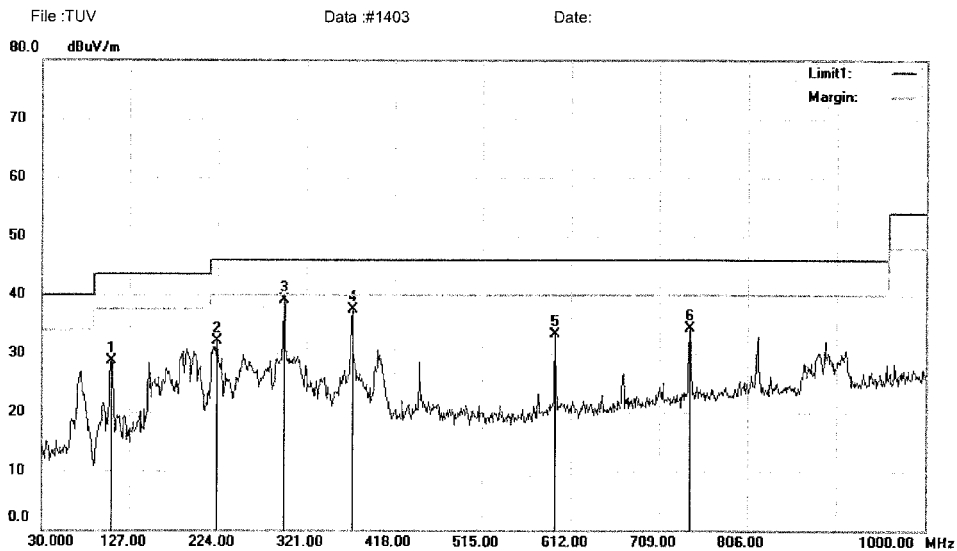
File :TUV\Data :#1406

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11n(20MHz) 5745
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		106.6300	43.98	-15.34	28.64	43.50	-14.86	QP		
2		223.0300	46.57	-14.41	32.16	46.00	-13.84	QP		
3	*	296.7500	50.84	-11.73	39.11	46.00	-6.89	QP		
4		371.4400	47.96	-10.36	37.60	46.00	-8.40	QP		
5		594.5400	39.27	-5.95	33.32	46.00	-12.68	QP		
6		742.9500	38.02	-3.63	34.39	46.00	-11.61	QP		

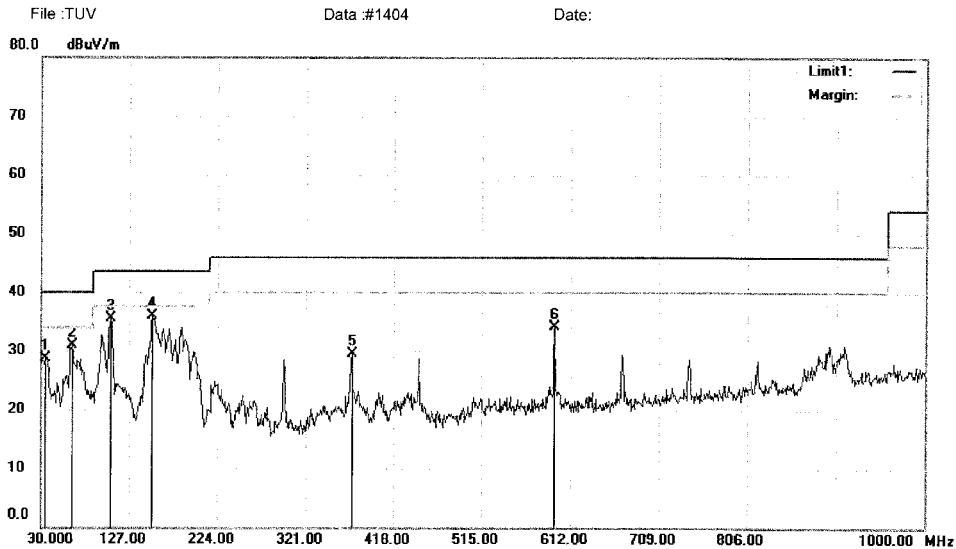
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1403

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		34.8500	45.53	-16.90	28.63	40.00	-11.37	QP		
2		63.9500	47.15	-16.30	30.85	40.00	-9.15	QP		
3		106.6300	50.75	-15.34	35.41	43.50	-8.09	QP		
4	*	152.2200	54.59	-18.74	35.85	43.50	-7.65	QP		
5		371.4400	39.84	-10.36	29.48	46.00	-16.52	QP		
6		594.5400	40.05	-5.95	34.10	46.00	-11.90	QP		

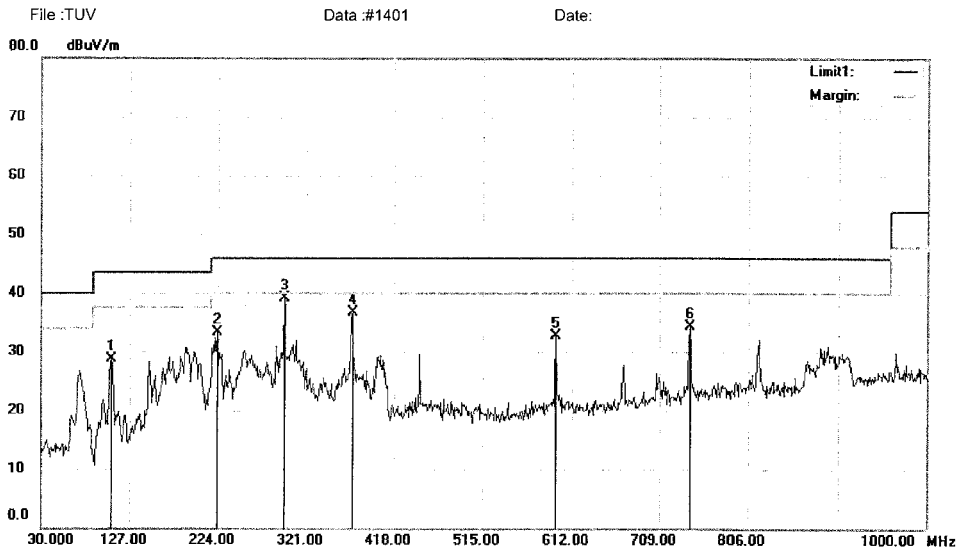
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1404

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		106.6300	44.11	-15.34	28.77	43.50	-14.73	QP		
2		223.0300	47.70	-14.41	33.29	46.00	-12.71	QP		
3	*	296.7500	50.77	-11.73	39.04	46.00	-6.96	QP		
4		371.4400	47.02	-10.36	36.66	46.00	-9.34	QP		
5		594.5400	38.56	-5.95	32.61	46.00	-13.39	QP		
6		742.9500	37.96	-3.63	34.33	46.00	-11.67	QP		

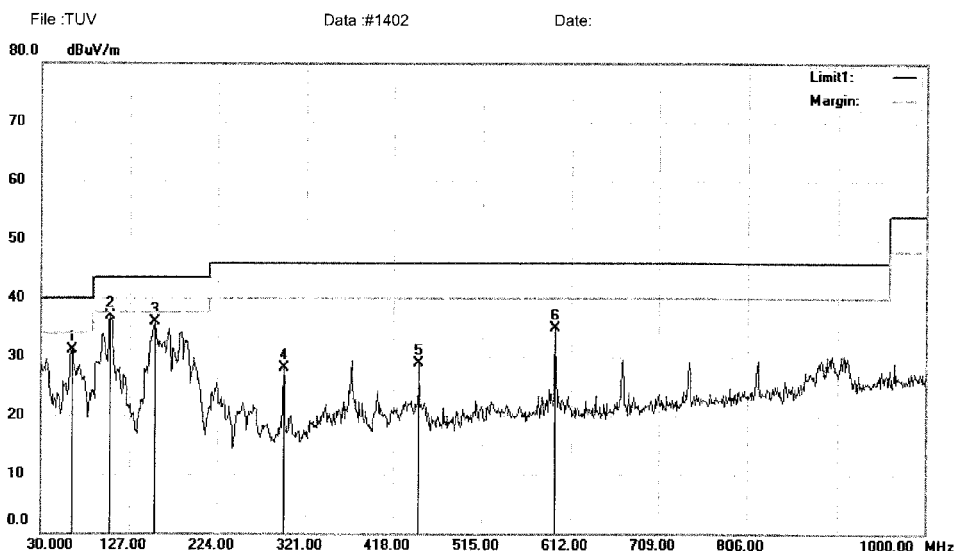
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1401

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		63.9500	47.36	-16.30	31.06	40.00	-8.94	QP		
2	*	105.6600	52.29	-15.32	36.97	43.50	-6.53	QP		
3		155.1300	54.53	-18.60	35.93	43.50	-7.57	QP		
4		296.7500	39.76	-11.73	28.03	46.00	-17.97	QP		
5		446.1300	37.55	-8.73	28.82	46.00	-17.18	QP		
6		594.5400	40.78	-5.95	34.83	46.00	-11.17	QP		

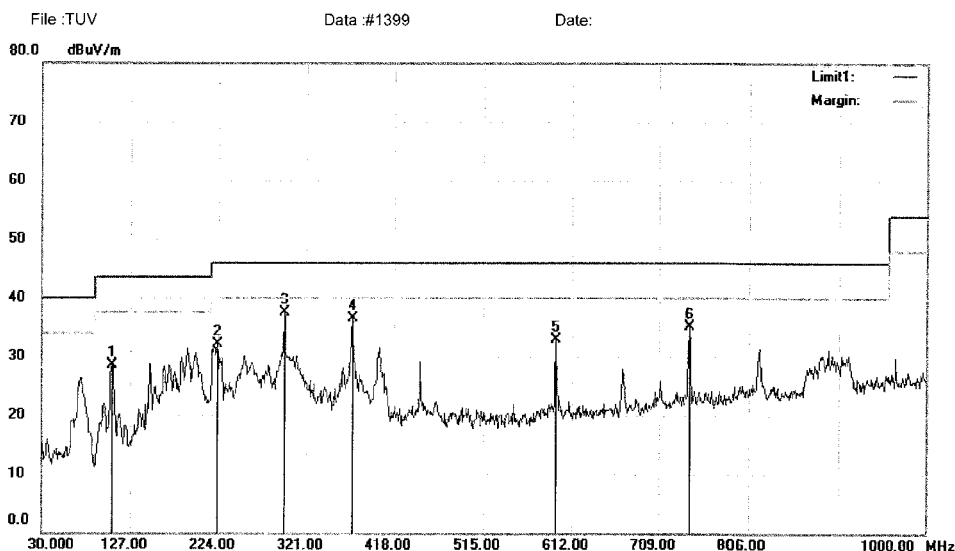
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1402

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		106.6300	43.90	-15.34	28.56	43.50	-14.94	QP		
2		223.0300	46.61	-14.41	32.20	46.00	-13.80	QP		
3	*	296.7500	49.21	-11.73	37.48	46.00	-8.52	QP		
4		371.4400	46.90	-10.36	36.54	46.00	-9.46	QP		
5		594.5400	38.83	-5.95	32.88	46.00	-13.12	QP		
6		742.9500	38.70	-3.63	35.07	46.00	-10.93	QP		

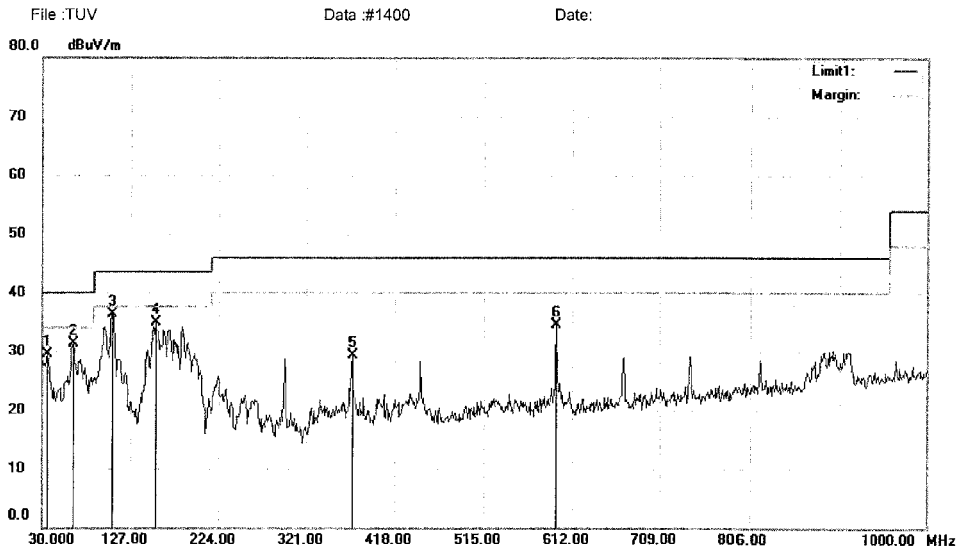
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1399

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		35.8200	46.32	-16.79	29.53	40.00	-10.47	QP		
2		63.9500	47.57	-16.30	31.27	40.00	-8.73	QP		
3	*	106.6300	51.59	-15.34	36.25	43.50	-7.25	QP		
4		154.1600	53.61	-18.65	34.96	43.50	-8.54	QP		
5		371.4400	39.66	-10.36	29.30	46.00	-16.70	QP		
6		594.5400	40.47	-5.95	34.52	46.00	-11.48	QP		

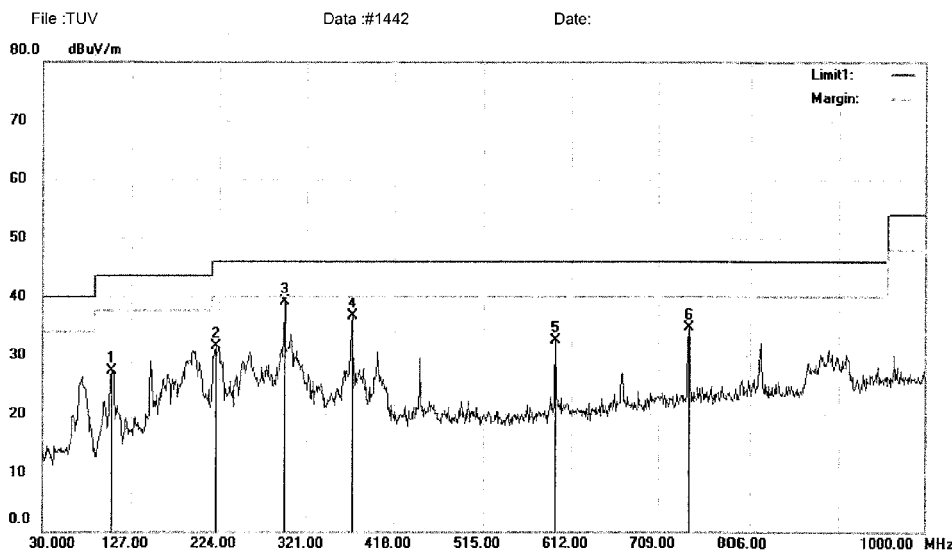
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1400

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		105.6600	42.63	-15.32	27.31	43.50	-16.19	QP		
2		220.1200	46.04	-14.49	31.55	46.00	-14.45	QP		
3	*	296.7500	50.86	-11.73	39.13	46.00	-6.87	QP		
4		371.4400	47.07	-10.36	36.71	46.00	-9.29	QP		
5		594.5400	38.45	-5.95	32.50	46.00	-13.50	QP		
6		742.9500	38.31	-3.63	34.68	46.00	-11.32	QP		

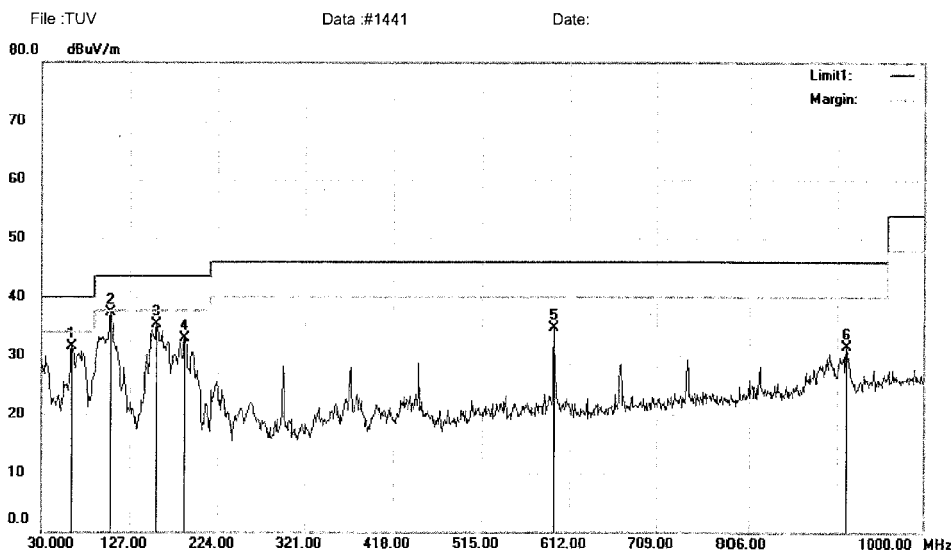
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1442

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		62.9800	47.69	-16.16	31.53	40.00	-8.47	QP		
2	*	105.6600	52.66	-15.32	37.34	43.50	-6.16	QP		
3		156.1000	53.80	-18.56	35.24	43.50	-8.26	QP		
4		187.1400	49.87	-16.91	32.96	43.50	-10.54	QP		
5		594.5400	40.64	-5.95	34.69	46.00	-11.31	QP		
6		913.6700	32.81	-1.35	31.46	46.00	-14.54	QP		

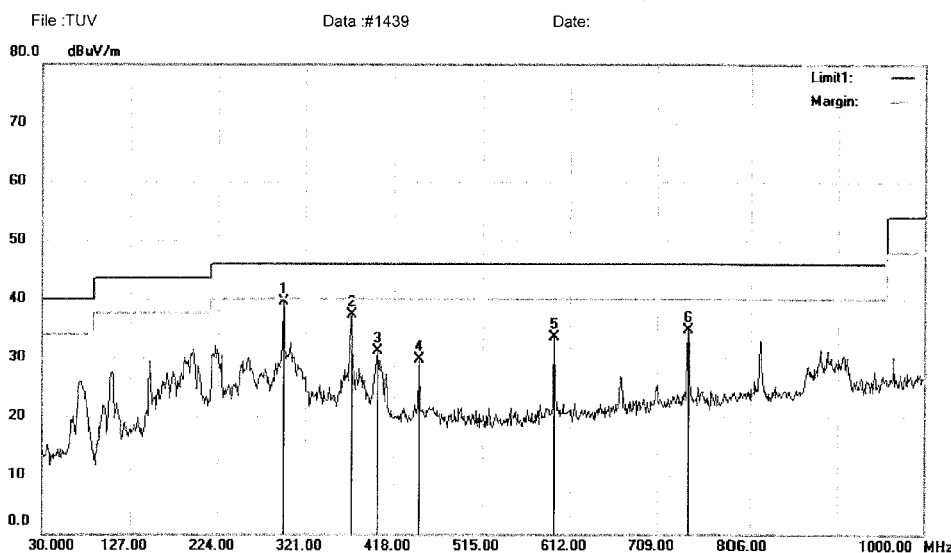
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1441

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	296.7500	51.15	-11.73	39.42	46.00	-6.58	QP		
2		371.4400	47.62	-10.36	37.26	46.00	-8.74	QP		
3		400.5400	40.61	-9.41	31.20	46.00	-14.80	QP		
4		446.1300	38.35	-8.73	29.62	46.00	-16.38	QP		
5		594.5400	39.51	-5.95	33.56	46.00	-12.44	QP		
6		742.9500	38.38	-3.63	34.75	46.00	-11.25	QP		

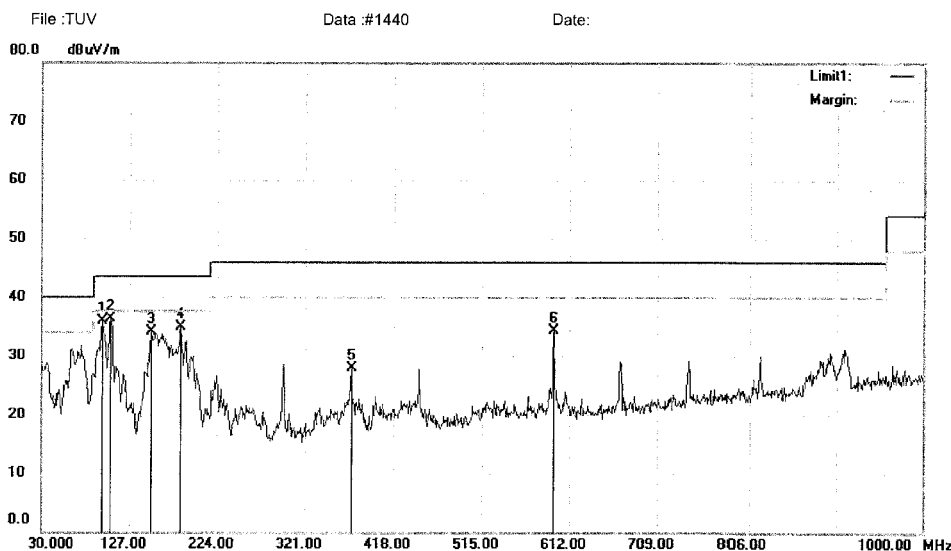
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1439

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		95.9600	52.01	-16.02	35.99	43.50	-7.51	QP		
2	*	105.6600	51.65	-15.32	36.33	43.50	-7.17	QP		
3		151.2500	52.80	-18.79	34.01	43.50	-9.49	QP		
4		183.2600	51.90	-17.05	34.85	43.50	-8.65	QP		
5		371.4400	38.20	-10.36	27.84	46.00	-18.16	QP		
6		594.5400	40.33	-5.95	34.38	46.00	-11.62	QP		

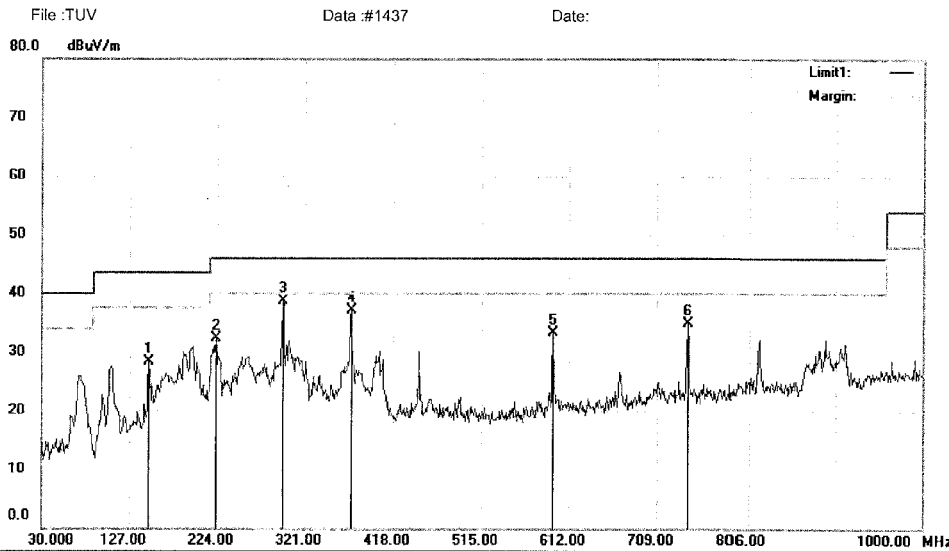
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1440

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		148.3400	47.19	-18.88	28.31	43.50	-15.19	QP		
2		223.0300	46.66	-14.41	32.25	46.00	-13.75	QP		
3	*	296.7500	50.49	-11.73	38.76	46.00	-7.24	QP		
4		371.4400	47.49	-10.36	37.13	46.00	-8.87	QP		
5		594.5400	39.30	-5.95	33.35	46.00	-12.65	QP		
6		742.9500	38.54	-3.63	34.91	46.00	-11.09	QP		

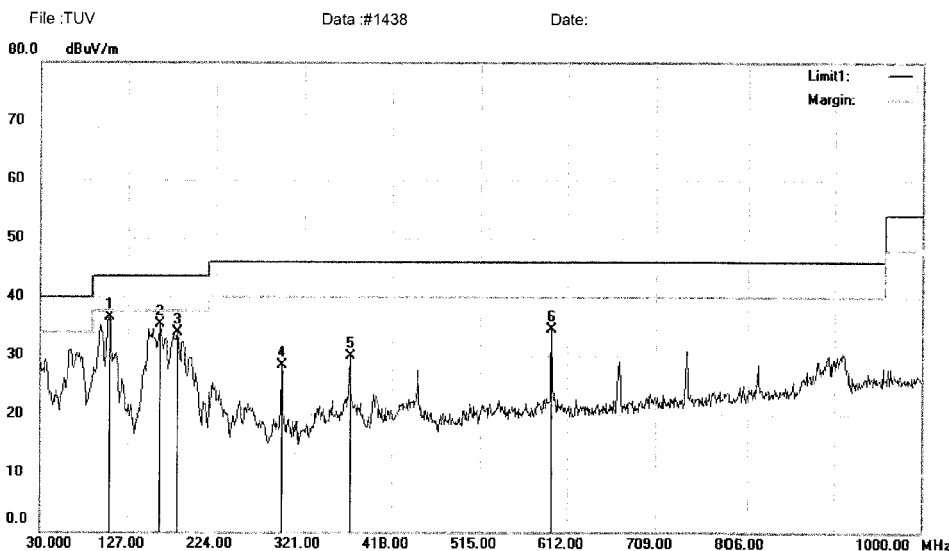
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1437

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5755
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	106.6300	51.79	-15.34	36.45	43.50	-7.05	QP			
2		162.8900	53.27	-18.05	35.22	43.50	-8.28	QP			
3		181.3200	51.07	-17.12	33.95	43.50	-9.55	QP			
4		296.7500	39.96	-11.73	28.23	46.00	-17.77	QP			
5		371.4400	40.33	-10.36	29.97	46.00	-16.03	QP			
6		594.5400	40.40	-5.95	34.45	46.00	-11.55	QP			

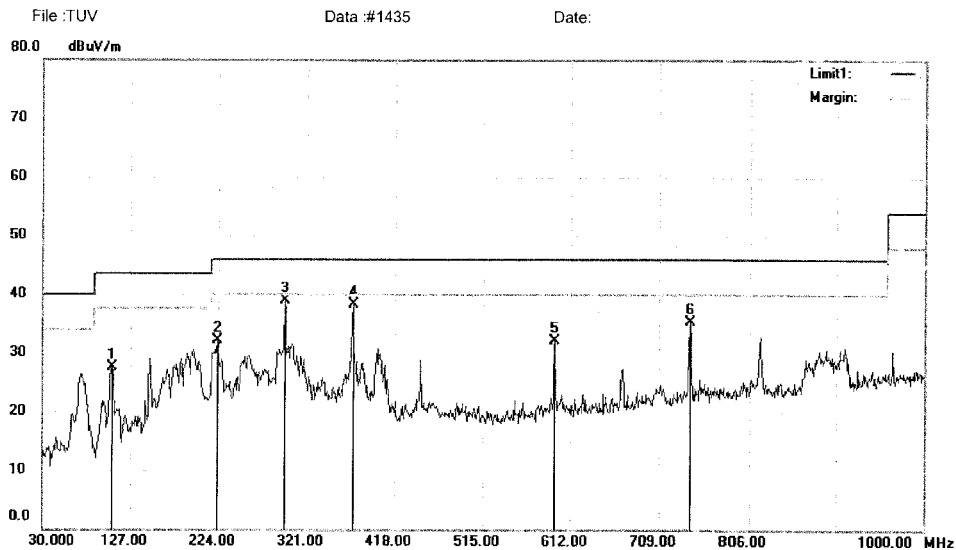
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data :#1438

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		106.6300	42.77	-15.34	27.43	43.50	-16.07	QP		
2		223.0300	46.44	-14.41	32.03	46.00	-13.97	QP		
3	*	296.7500	50.65	-11.73	38.92	46.00	-7.08	QP		
4		371.4400	48.65	-10.36	38.29	46.00	-7.71	QP		
5		594.5400	38.01	-5.95	32.06	46.00	-13.94	QP		
6		742.9500	38.96	-3.63	35.33	46.00	-10.67	QP		

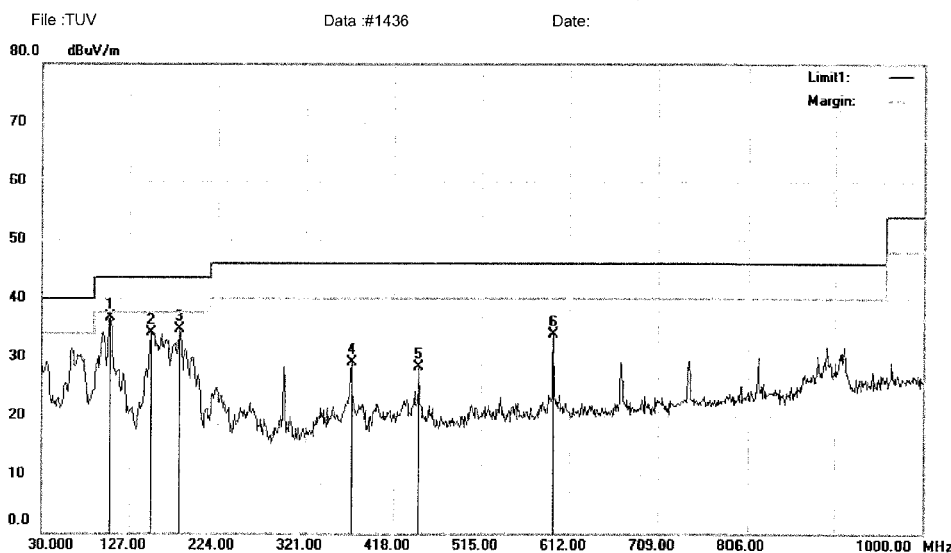
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1435

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	105.6600	52.02	-15.32	36.70	43.50	-6.80	QP		
2		151.2500	52.90	-18.79	34.11	43.50	-9.39	QP		
3		182.2900	51.75	-17.08	34.67	43.50	-8.83	QP		
4		371.4400	39.41	-10.36	29.05	46.00	-16.95	QP		
5		446.1300	36.96	-8.73	28.23	46.00	-17.77	QP		
6		594.5400	39.94	-5.95	33.99	46.00	-12.01	QP		

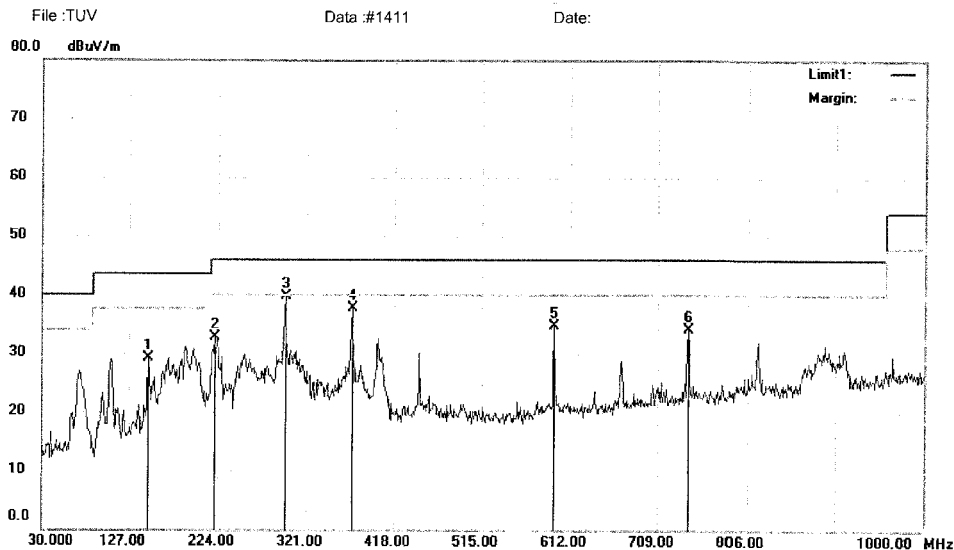
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1436

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		148.3400	48.03	-18.88	29.15	43.50	-14.35	QP		
2		220.1200	47.17	-14.49	32.68	46.00	-13.32	QP		
3	*	297.7200	51.32	-11.69	39.63	46.00	-6.37	QP		
4		371.4400	48.03	-10.36	37.67	46.00	-8.33	QP		
5		594.5400	40.63	-5.95	34.68	46.00	-11.32	QP		
6		742.9500	37.75	-3.63	34.12	46.00	-11.88	QP		

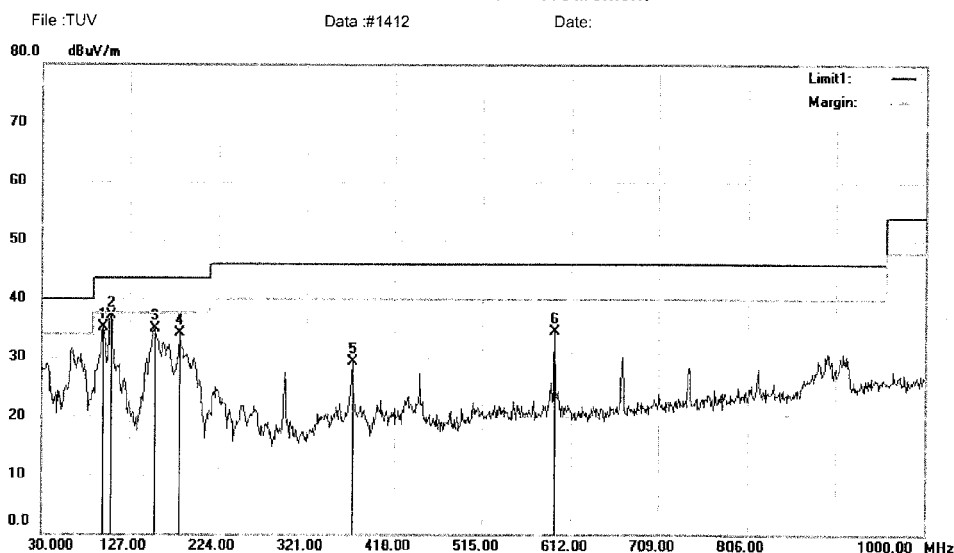
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1411

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		97.9000	50.72	-15.65	35.07	43.50	-8.43	QP		
2	*	106.6300	52.38	-15.34	37.04	43.50	-6.46	QP		
3		154.1600	53.51	-18.65	34.86	43.50	-8.64	QP		
4		182.2900	51.10	-17.08	34.02	43.50	-9.48	QP		
5		371.4400	39.68	-10.36	29.32	46.00	-16.68	QP		
6		594.5400	40.42	-5.95	34.47	46.00	-11.53	QP		

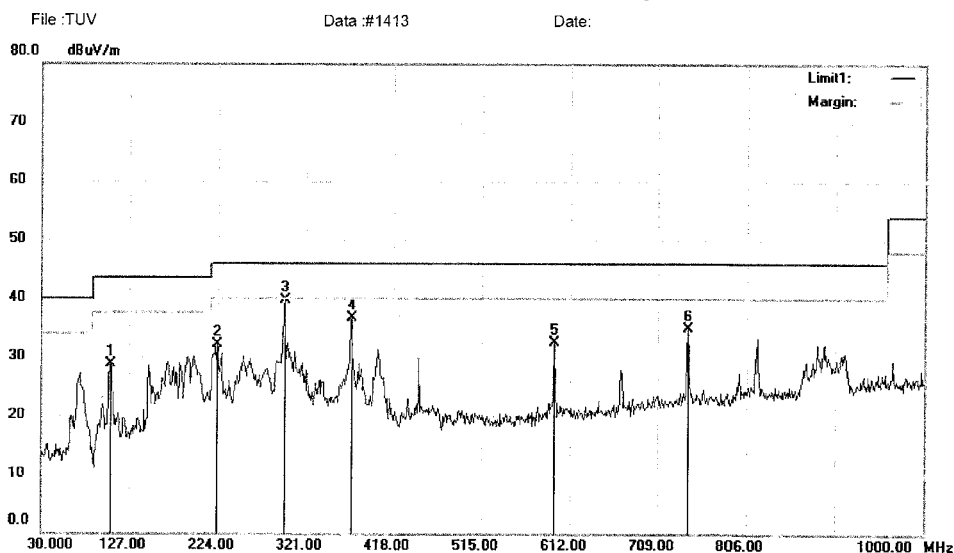
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1412

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(20MHz) 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		106.6300	43.99	-15.34	28.65	43.50	-14.85	QP		
2		223.0300	46.51	-14.41	32.10	46.00	-13.90	QP		
3	*	297.7200	51.32	-11.69	39.63	46.00	-6.37	QP		
4		371.4400	47.07	-10.36	36.71	46.00	-9.29	QP		
5		594.5400	38.36	-5.95	32.41	46.00	-13.59	QP		
6		742.9500	38.54	-3.63	34.91	46.00	-11.09	QP		

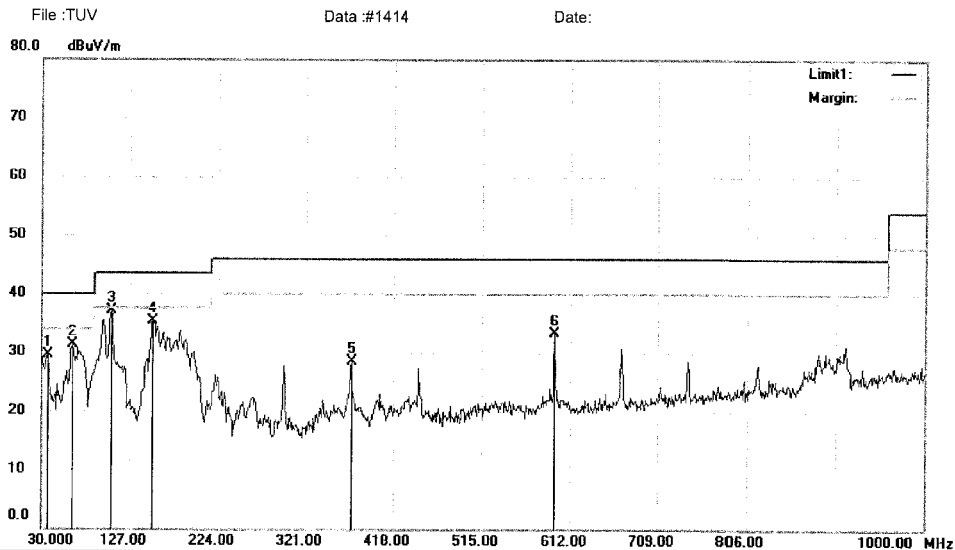
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1413

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(20MHz) 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		36.7900	45.96	-16.51	29.45	40.00	-10.55	QP		
2		63.9500	47.70	-16.30	31.40	40.00	-8.60	QP		
3	*	106.6300	52.44	-15.34	37.10	43.50	-6.40	QP		
4		152.2200	54.02	-18.74	35.28	43.50	-8.22	QP		
5		371.4400	38.89	-10.36	28.53	46.00	-17.47	QP		
6		594.5400	39.33	-5.95	33.38	46.00	-12.62	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1414

Page: 1

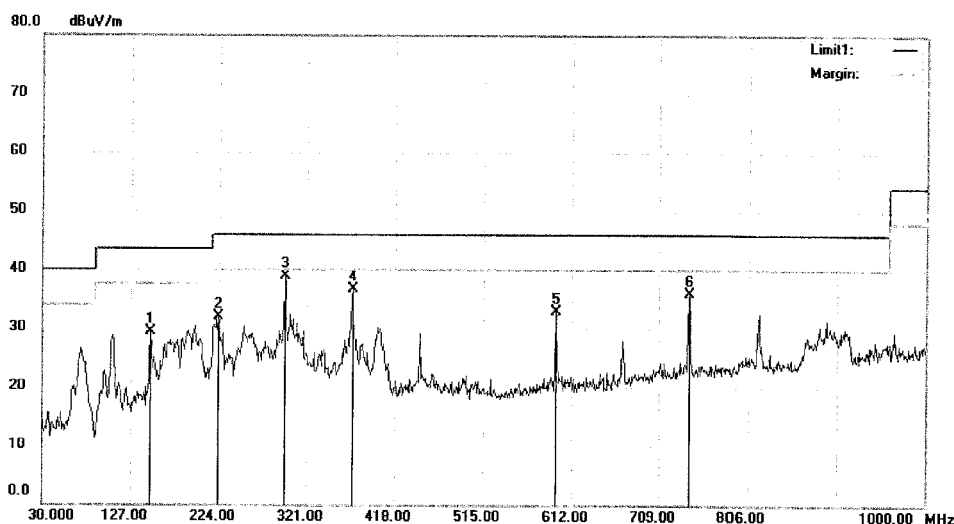
Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1415

Date:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		148.3400	48.14	-18.88	29.26	43.50	-14.24	QP		
2		223.0300	46.39	-14.41	31.98	46.00	-14.02	QP		
3	*	296.7500	50.72	-11.73	38.99	46.00	-7.01	QP		
4		371.4400	47.11	-10.36	36.75	46.00	-9.25	QP		
5		594.5400	38.91	-5.95	32.96	46.00	-13.04	QP		
6		742.9500	39.61	-3.63	35.98	46.00	-10.02	QP		

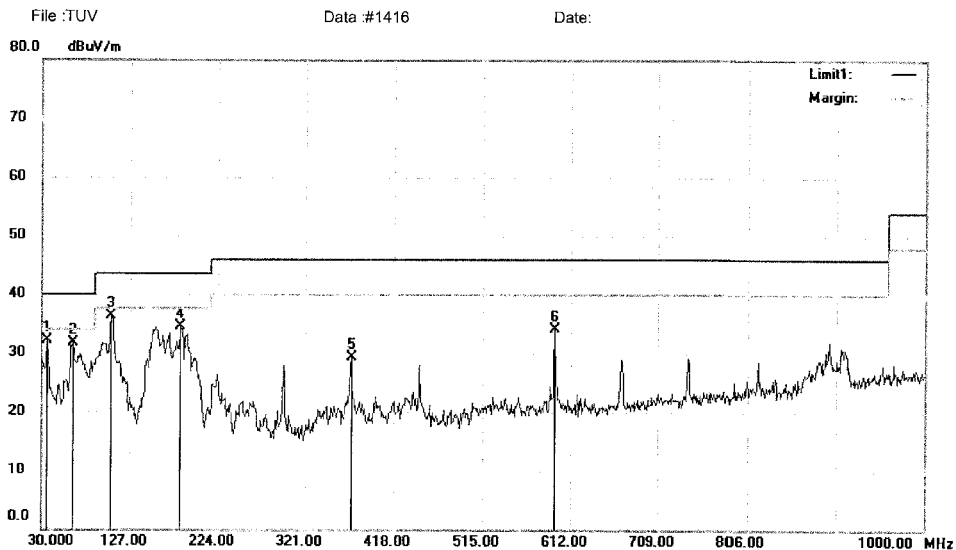
*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUV\Data :#1415

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		35.8200	48.82	-16.79	32.03	40.00	-7.97	QP		
2		63.9500	47.93	-16.30	31.63	40.00	-8.37	QP		
3	*	105.6600	51.57	-15.32	36.25	43.50	-7.25	QP		
4		182.2900	51.55	-17.08	34.47	43.50	-9.03	QP		
5		371.4400	39.66	-10.36	29.30	46.00	-16.70	QP		
6		594.5400	40.09	-5.95	34.14	46.00	-11.86	QP		

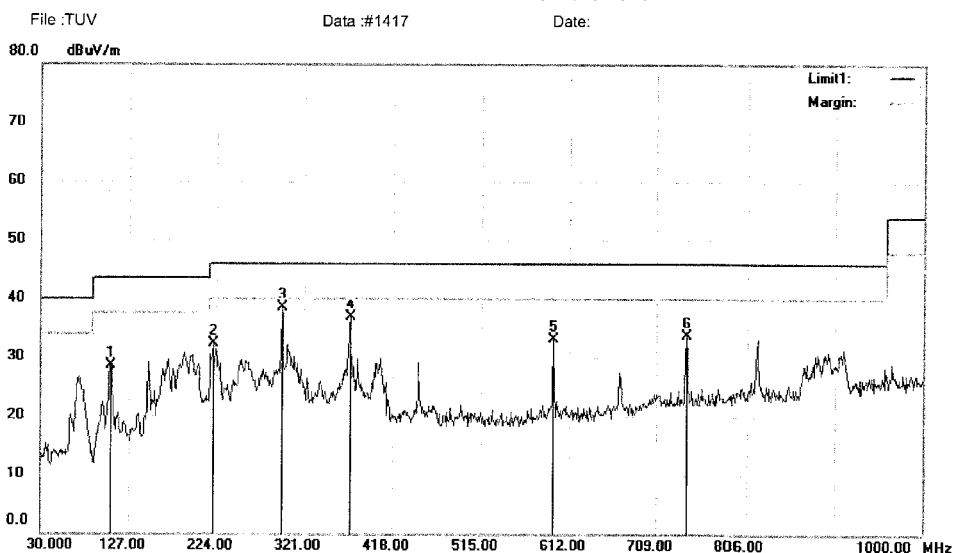
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data #1416

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(20MHz) 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		106.6300	43.93	-15.34	28.59	43.50	-14.91	QP		
2		220.1200	46.80	-14.49	32.31	46.00	-13.69	QP		
3	*	296.7500	50.28	-11.73	38.55	46.00	-7.45	QP		
4		371.4400	47.27	-10.36	36.91	46.00	-9.09	QP		
5		594.5400	39.00	-5.95	33.05	46.00	-12.95	QP		
6		742.9500	37.37	-3.63	33.74	46.00	-12.26	QP		

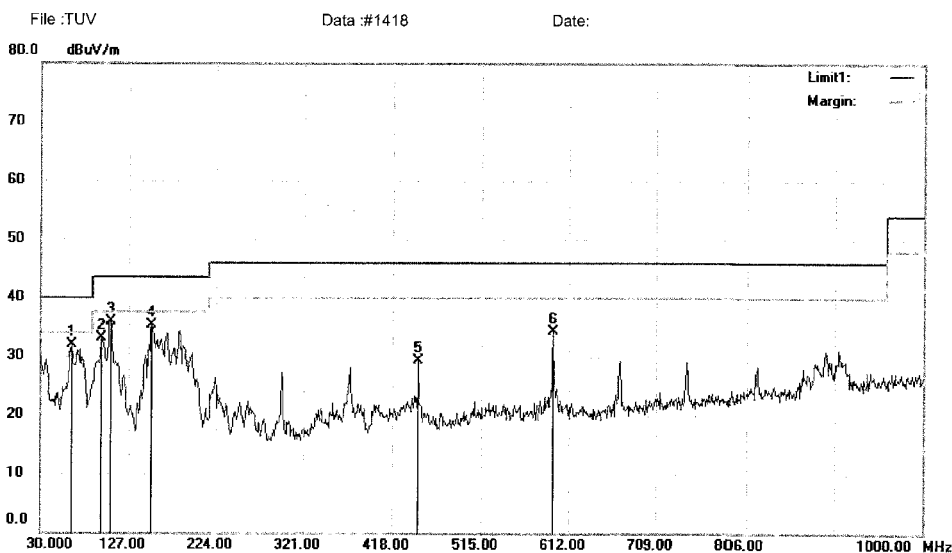
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1417

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		63.9500	48.18	-16.30	31.88	40.00	-8.12	QP		
2		96.9300	48.90	-15.82	33.08	43.50	-10.42	QP		
3	*	106.6300	51.34	-15.34	36.00	43.50	-7.50	QP		
4		152.2200	54.09	-18.74	35.35	43.50	-8.15	QP		
5		446.1300	38.03	-8.73	29.30	46.00	-16.70	QP		
6		594.5400	40.25	-5.95	34.30	46.00	-11.70	QP		

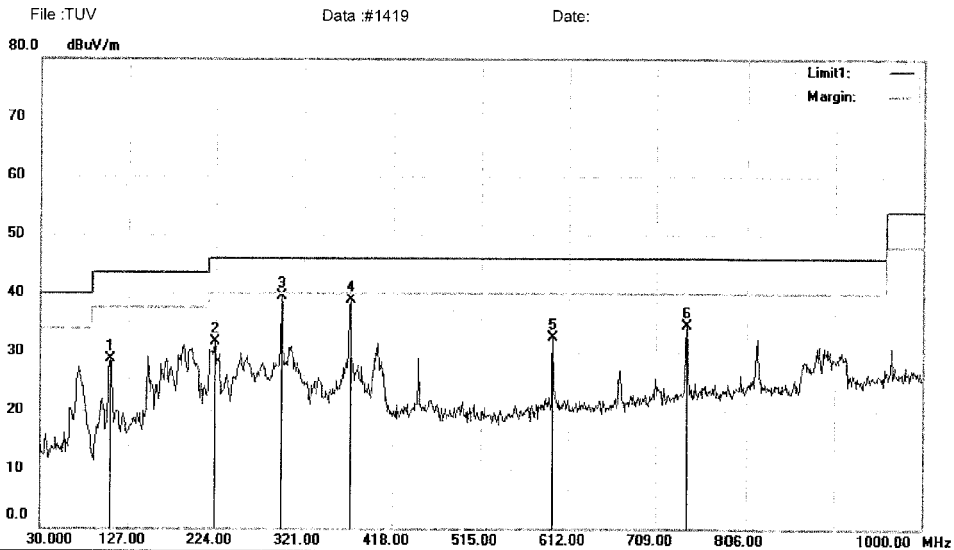
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1418

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		106.6300	43.95	-15.34	28.61	43.50	-14.89	QP		
2		223.0300	46.18	-14.41	31.77	46.00	-14.23	QP		
3	*	296.7500	51.19	-11.73	39.46	46.00	-6.54	QP		
4		371.4400	49.34	-10.36	38.98	46.00	-7.02	QP		
5		594.5400	38.42	-5.95	32.47	46.00	-13.53	QP		
6		742.9500	38.09	-3.63	34.46	46.00	-11.54	QP		

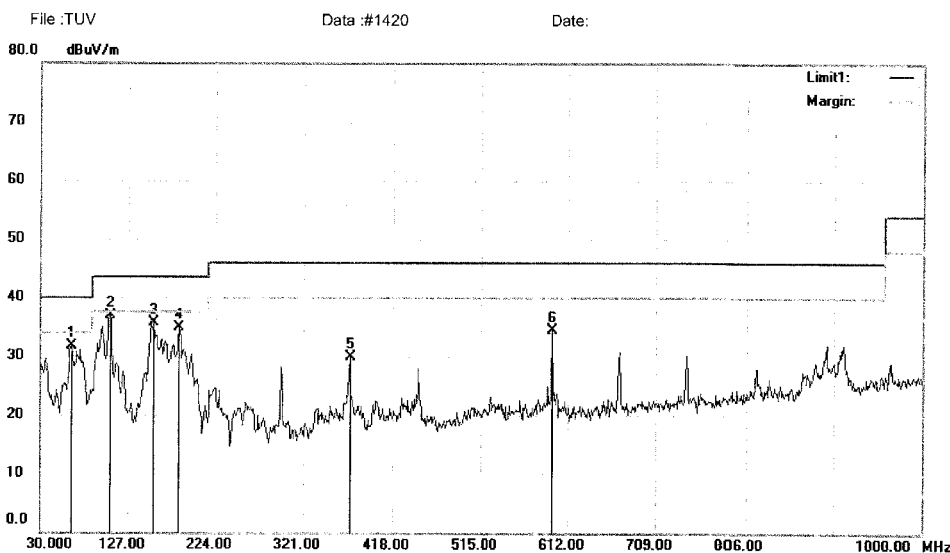
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1419

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		63.9500	47.96	-16.30	31.66	40.00	-8.34	QP		
2	*	106.6300	52.18	-15.34	36.84	43.50	-6.66	QP		
3		155.1300	54.30	-18.60	35.70	43.50	-7.80	QP		
4		183.2600	51.90	-17.05	34.85	43.50	-8.65	QP		
5		371.4400	40.36	-10.36	30.00	46.00	-16.00	QP		
6		594.5400	40.50	-5.95	34.55	46.00	-11.45	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1420

Page: 1

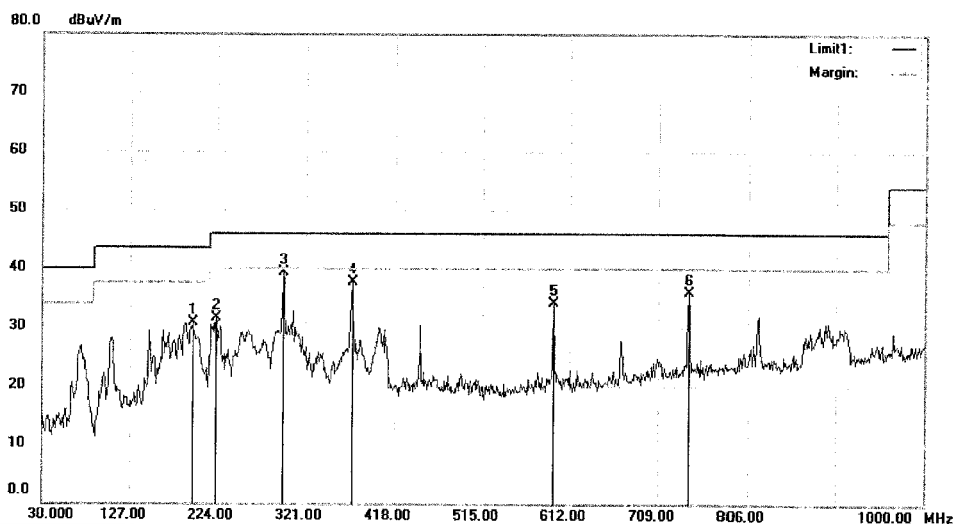
Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1421

Date:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(20MHz) 5825

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		196.8400	46.62	-15.94	30.68	43.50	-12.82	QP		
2		223.0300	45.95	-14.41	31.54	46.00	-14.46	QP		
3	*	296.7500	51.07	-11.73	39.34	46.00	-6.66	QP		
4		371.4400	48.16	-10.36	37.80	46.00	-8.20	QP		
5		594.5400	40.05	-5.95	34.10	46.00	-11.90	QP		
6		742.9500	39.62	-3.63	35.99	46.00	-10.01	QP		

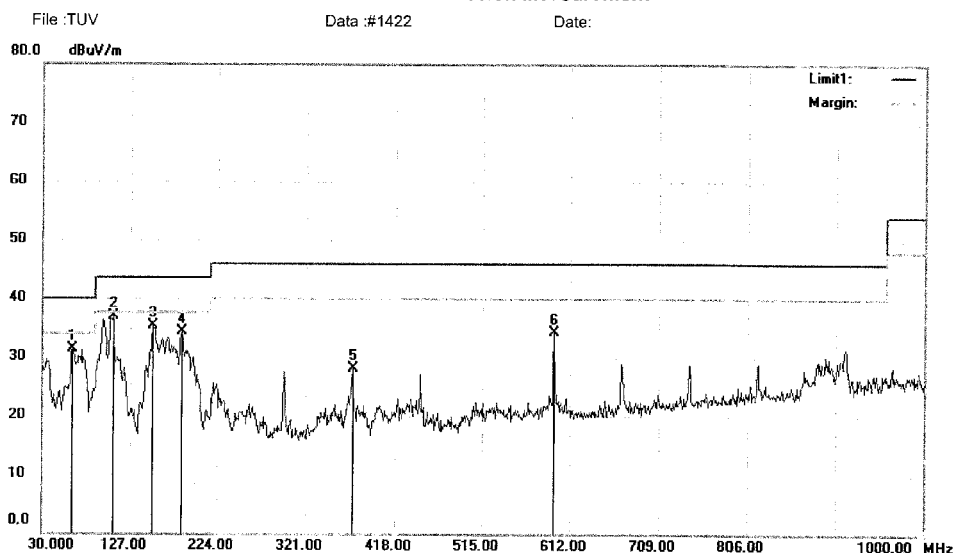
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1421

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11ac(20MHz) 5825

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		62.9800	47.53	-16.16	31.37	40.00	-8.63	QP		
2	*	107.6000	52.30	-15.35	36.95	43.50	-6.55	QP		
3		152.2200	54.11	-18.74	35.37	43.50	-8.13	QP		
4		184.2300	51.31	-17.01	34.30	43.50	-9.20	QP		
5		371.4400	38.48	-10.36	28.12	46.00	-17.88	QP		
6		594.5400	40.16	-5.95	34.21	46.00	-11.79	QP		

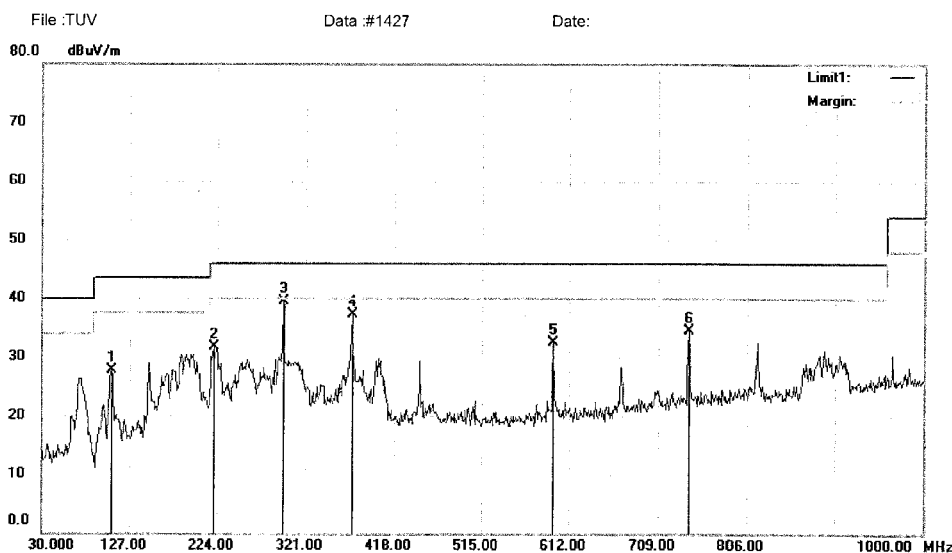
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1422

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		106.6300	43.09	-15.34	27.75	43.50	-15.75	QP		
2		220.1200	46.17	-14.49	31.68	46.00	-14.32	QP		
3	*	296.7500	51.25	-11.73	39.52	46.00	-6.48	QP		
4		371.4400	47.66	-10.36	37.30	46.00	-8.70	QP		
5		594.5400	38.48	-5.95	32.53	46.00	-13.47	QP		
6		742.9500	38.04	-3.63	34.41	46.00	-11.59	QP		

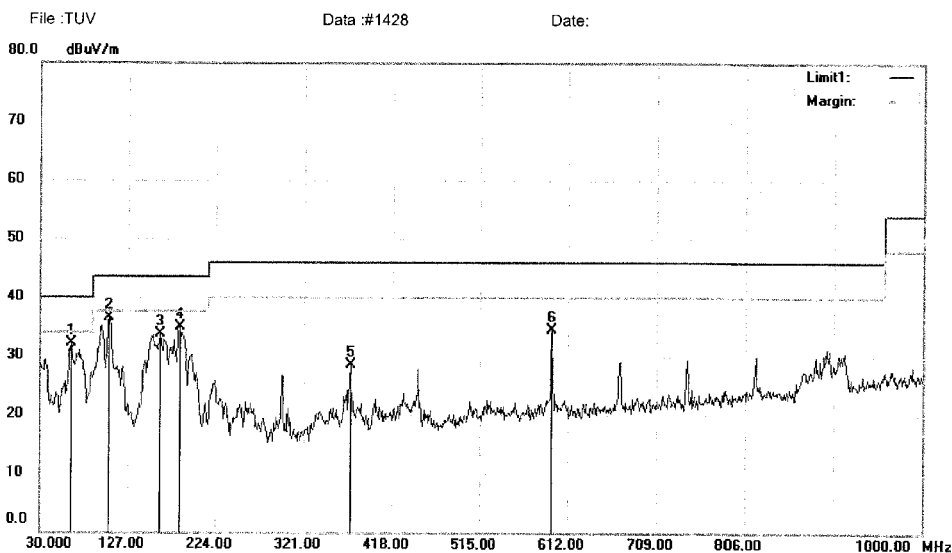
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data #1427

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(40MHz) 5190

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		63.9500	48.36	-16.30	32.06	40.00	-7.94	QP		
2	*	105.6600	51.87	-15.32	36.55	43.50	-6.95	QP		
3		162.8900	51.68	-18.05	33.63	43.50	-9.87	QP		
4		184.2300	51.95	-17.01	34.94	43.50	-8.56	QP		
5		371.4400	38.91	-10.36	28.55	46.00	-17.45	QP		
6		594.5400	40.40	-5.95	34.45	46.00	-11.55	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

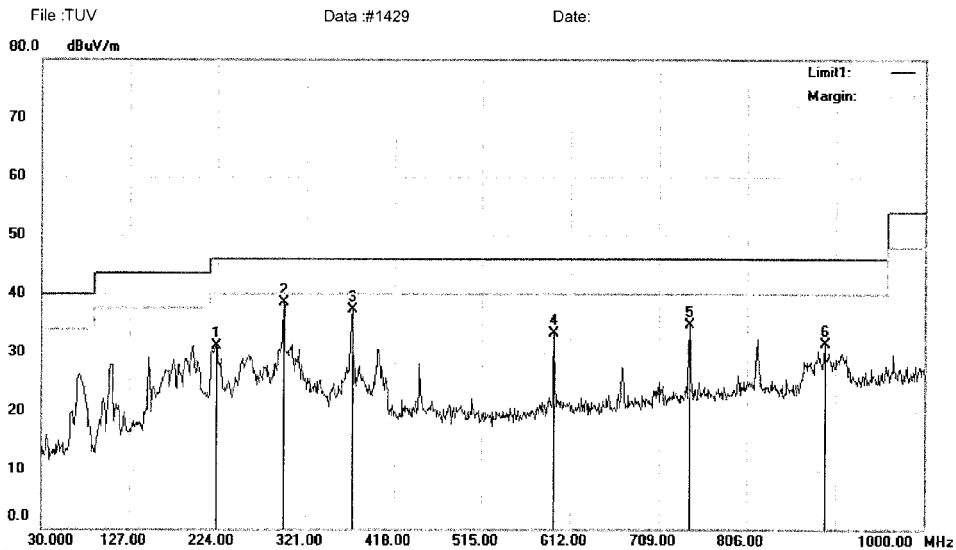
File :TUV\Data :#1428

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11ac(40MHz) 5230
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		223.0300	45.50	-14.41	31.09	46.00	-14.91	QP		
2	*	296.7500	50.22	-11.73	38.49	46.00	-7.51	QP		
3		371.4400	47.74	-10.36	37.38	46.00	-8.62	QP		
4		594.5400	39.24	-5.95	33.29	46.00	-12.71	QP		
5		742.9500	38.38	-3.63	34.75	46.00	-11.25	QP		
6		891.3600	33.20	-1.66	31.54	46.00	-14.46	QP		

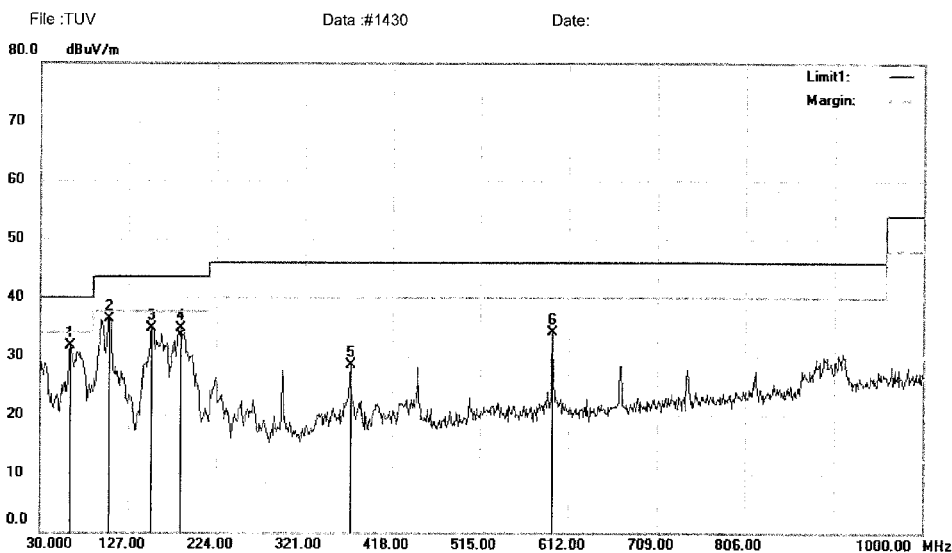
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1429

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11ac(40MHz) 5230

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		62.9800	47.90	-16.16	31.74	40.00	-8.26	QP		
2	*	105.6600	51.68	-15.32	36.36	43.50	-7.14	QP		
3		152.2200	53.39	-18.74	34.65	43.50	-8.85	QP		
4		184.2300	51.66	-17.01	34.65	43.50	-8.85	QP		
5		371.4400	38.79	-10.36	28.43	46.00	-17.57	QP		
6		594.5400	40.06	-5.95	34.11	46.00	-11.89	QP		

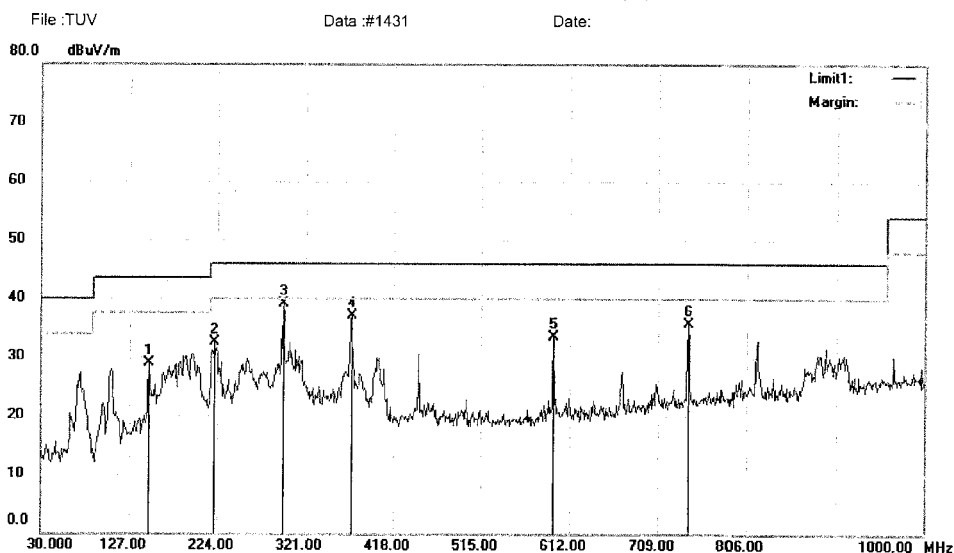
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV\Data : #1430

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		148.3400	47.69	-18.88	28.81	43.50	-14.69	QP		
2		221.0900	46.93	-14.47	32.46	46.00	-13.54	QP		
3	*	296.7500	50.91	-11.73	39.18	46.00	-6.82	QP		
4		371.4400	47.56	-10.36	37.20	46.00	-8.80	QP		
5		594.5400	39.53	-5.95	33.58	46.00	-12.42	QP		
6		742.9500	39.42	-3.63	35.79	46.00	-10.21	QP		

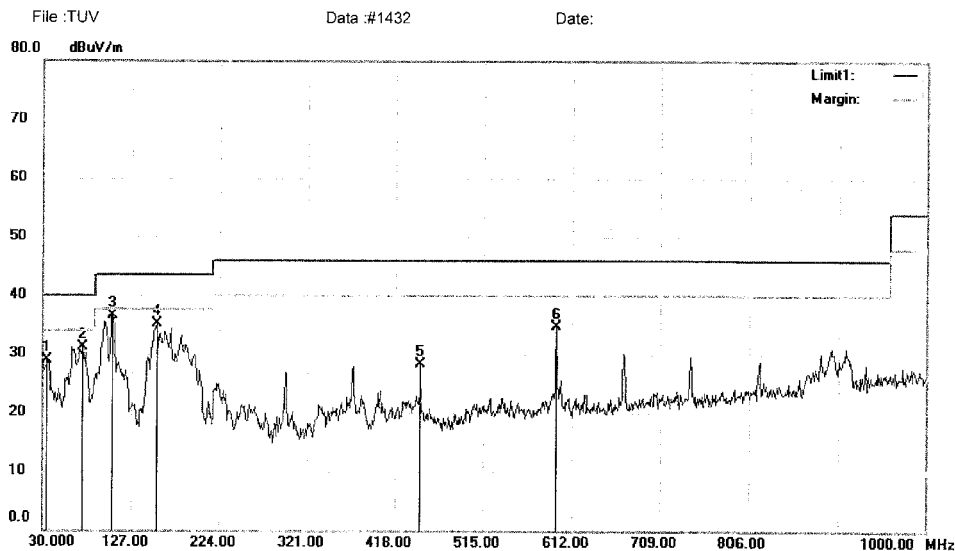
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1431

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11ac(40MHz) 5755

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		34.8500	45.82	-16.90	28.92	40.00	-11.08	QP		
2		73.6500	49.80	-18.62	31.18	40.00	-8.82	QP		
3	*	105.6600	51.89	-15.32	36.57	43.50	-6.93	QP		
4		154.1600	53.76	-18.65	35.11	43.50	-8.39	QP		
5		446.1300	37.01	-8.73	28.28	46.00	-17.72	QP		
6		594.5400	40.62	-5.95	34.67	46.00	-11.33	QP		

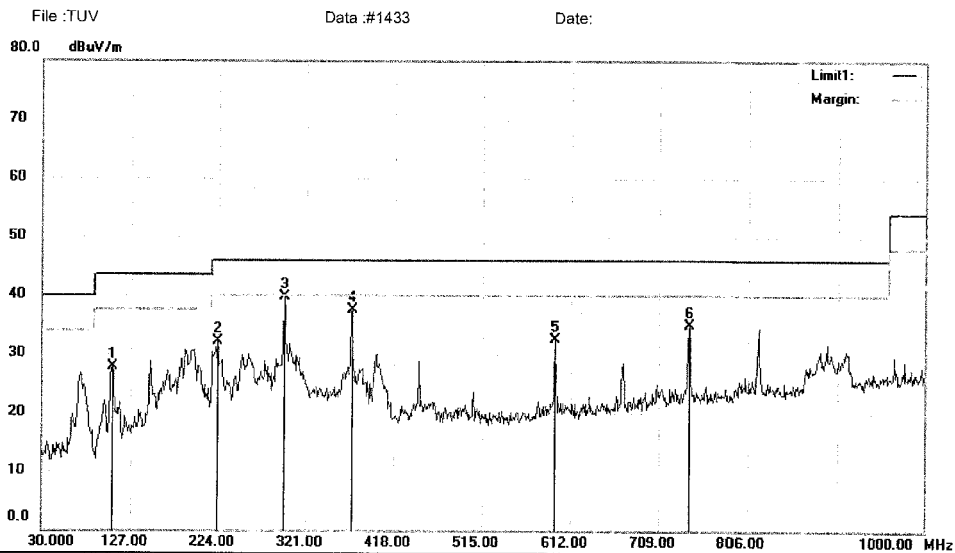
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1432

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(40MHz) 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		106.6300	42.95	-15.34	27.61	43.50	-15.89	QP		
2		223.0300	46.45	-14.41	32.04	46.00	-13.96	QP		
3	*	296.7500	51.36	-11.73	39.63	46.00	-6.37	QP		
4		371.4400	47.96	-10.36	37.60	46.00	-8.40	QP		
5		594.5400	38.37	-5.95	32.42	46.00	-13.58	QP		
6		742.9500	38.61	-3.63	34.98	46.00	-11.02	QP		

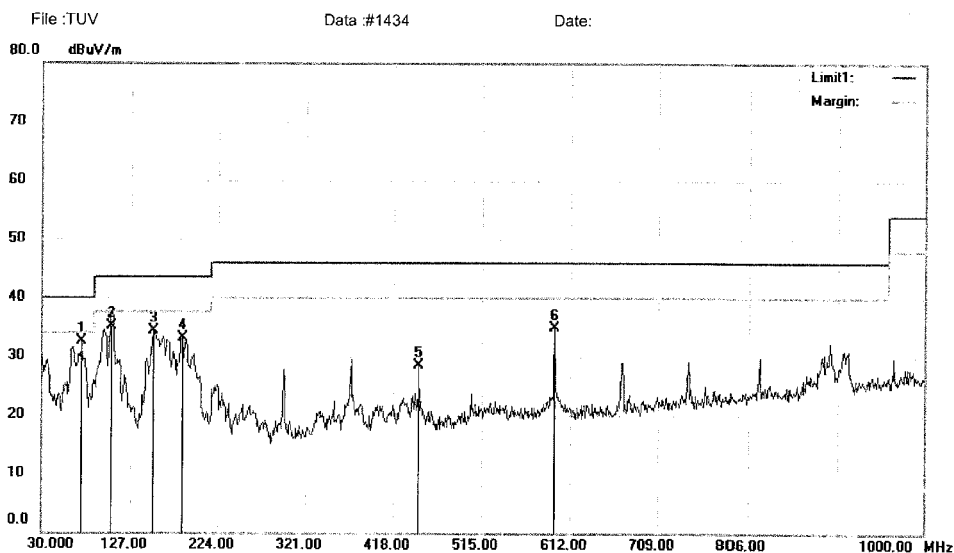
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1433

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(40MHz) 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	73.6500	51.11	-18.62	32.49	40.00	-7.51	QP		
2		105.6600	50.52	-15.32	35.20	43.50	-8.30	QP		
3		152.2200	53.04	-18.74	34.30	43.50	-9.20	QP		
4		184.2300	50.03	-17.01	33.02	43.50	-10.48	QP		
5		446.1300	37.15	-8.73	28.42	46.00	-17.58	QP		
6		594.5400	40.81	-5.95	34.86	46.00	-11.14	QP		

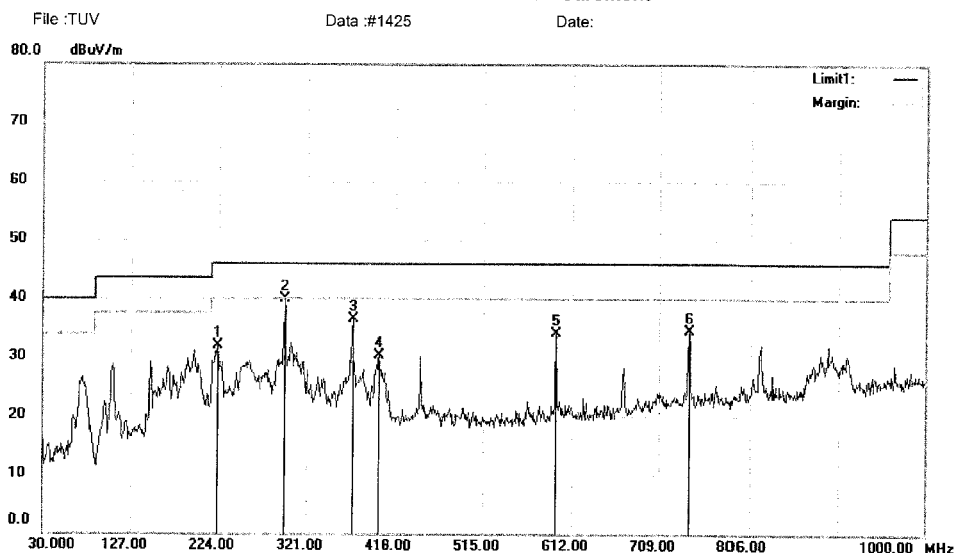
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1434

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11ac(80MHz) 5210

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		223.0300	46.41	-14.41	32.00	46.00	-14.00	QP		
2	*	296.7500	51.60	-11.73	39.87	46.00	-6.13	QP		
3		371.4400	46.79	-10.36	36.43	46.00	-9.57	QP		
4		400.5400	39.74	-9.41	30.33	46.00	-15.67	QP		
5		594.5400	40.04	-5.95	34.09	46.00	-11.91	QP		
6		742.9500	38.21	-3.63	34.58	46.00	-11.42	QP		

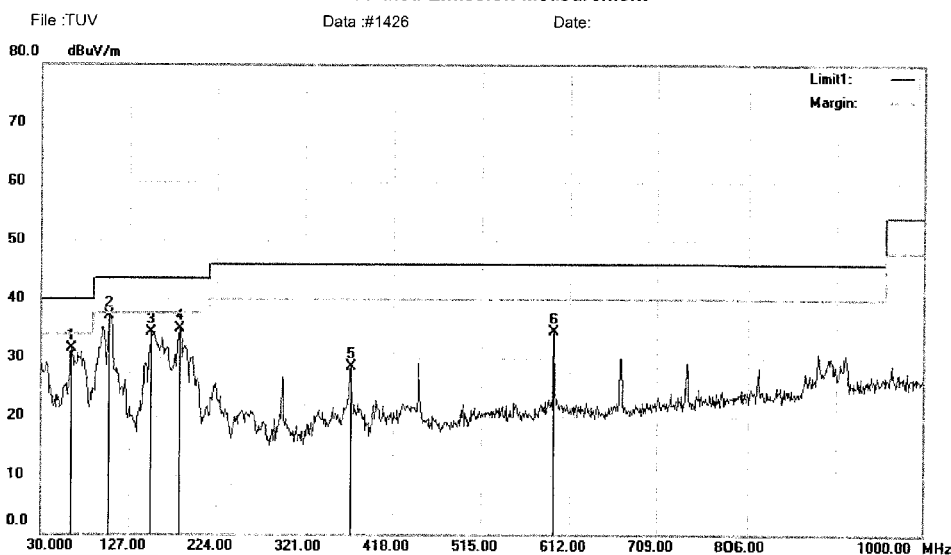
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1425

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		62.9800	47.62	-16.16	31.46	40.00	-8.54	QP		
2	*	104.6900	52.41	-15.32	37.09	43.50	-6.41	QP		
3		151.2500	53.16	-18.79	34.37	43.50	-9.13	QP		
4		183.2600	51.95	-17.05	34.90	43.50	-8.60	QP		
5		371.4400	38.96	-10.36	28.60	46.00	-17.40	QP		
6		594.5400	40.37	-5.95	34.42	46.00	-11.58	QP		

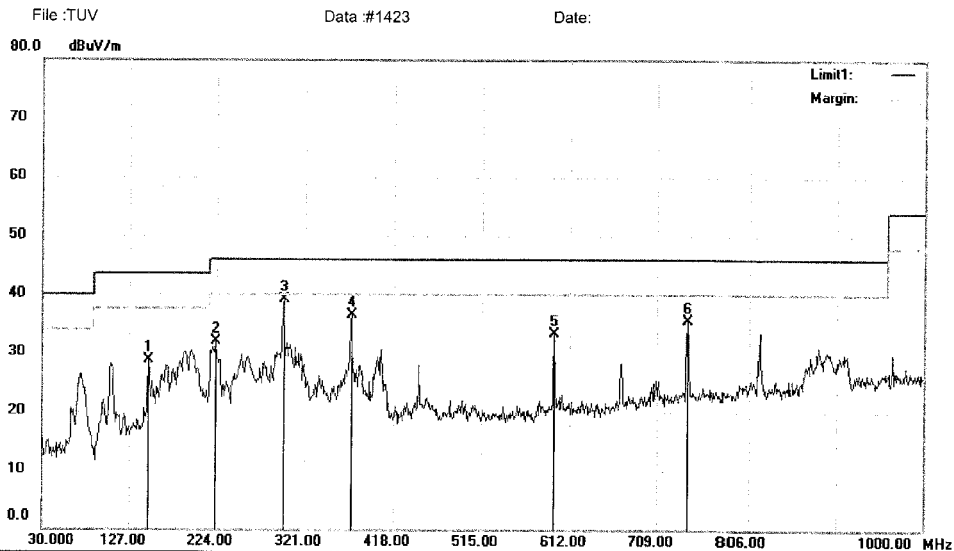
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1426

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11ac(80MHz) 5775

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		148.3400	47.53	-18.88	28.65	43.50	-14.85	QP		
2		223.0300	46.34	-14.41	31.93	46.00	-14.07	QP		
3	*	297.7200	50.83	-11.69	39.14	46.00	-6.86	QP		
4		371.4400	46.91	-10.36	36.55	46.00	-9.45	QP		
5		594.5400	39.21	-5.95	33.26	46.00	-12.74	QP		
6		742.9500	39.22	-3.63	35.59	46.00	-10.41	QP		

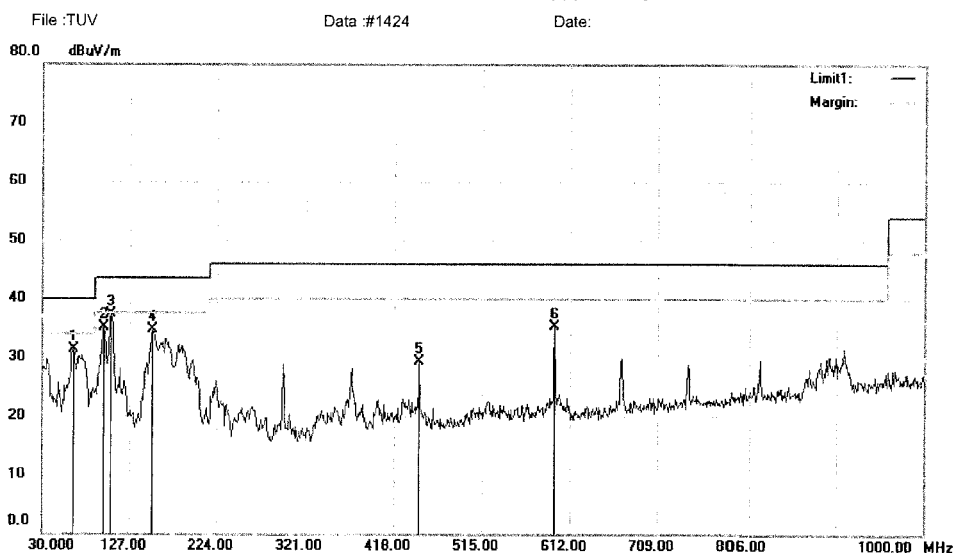
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1423

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(80MHz) 5775

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		63.9500	47.55	-16.30	31.25	40.00	-8.75	QP		
2		97.9000	50.79	-15.65	35.14	43.50	-8.36	QP		
3	*	105.6600	52.53	-15.32	37.21	43.50	-6.29	QP		
4		152.2200	53.36	-18.74	34.62	43.50	-8.88	QP		
5		446.1300	38.03	-8.73	29.30	46.00	-16.70	QP		
6		594.5400	41.17	-5.95	35.22	46.00	-10.78	QP		

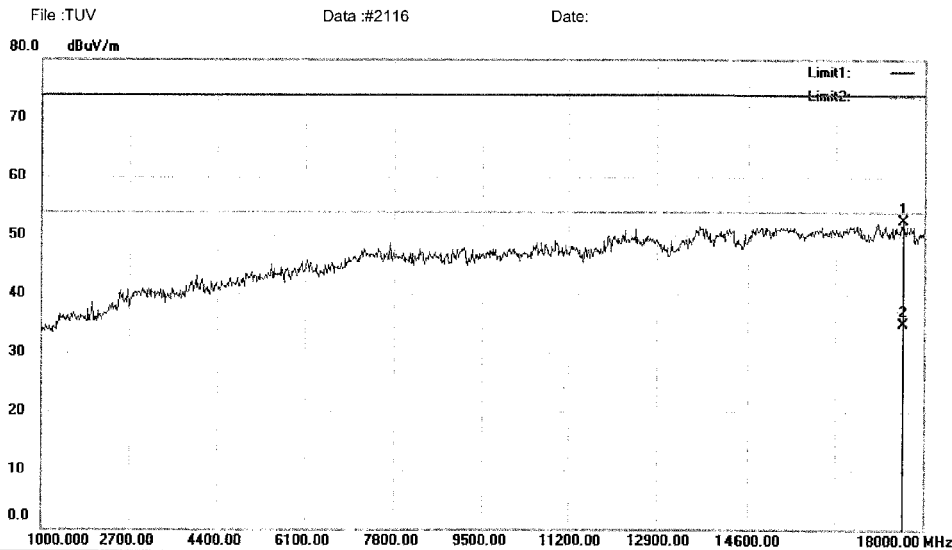
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1424

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		17609.00	42.38	10.08	52.46	74.00	-21.54	peak		
2	*	17609.00	24.92	10.08	35.00	54.00	-19.00	AVG		

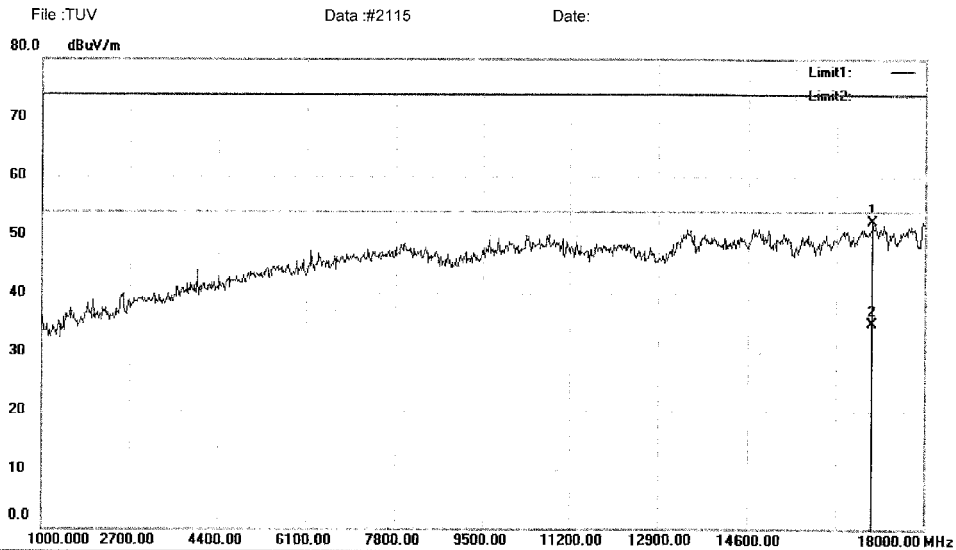
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2116

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		16997.00	50.25	2.06	52.31	74.00	-21.69	peak		
2	*	16997.00	32.84	2.06	34.90	54.00	-19.10	AVG		

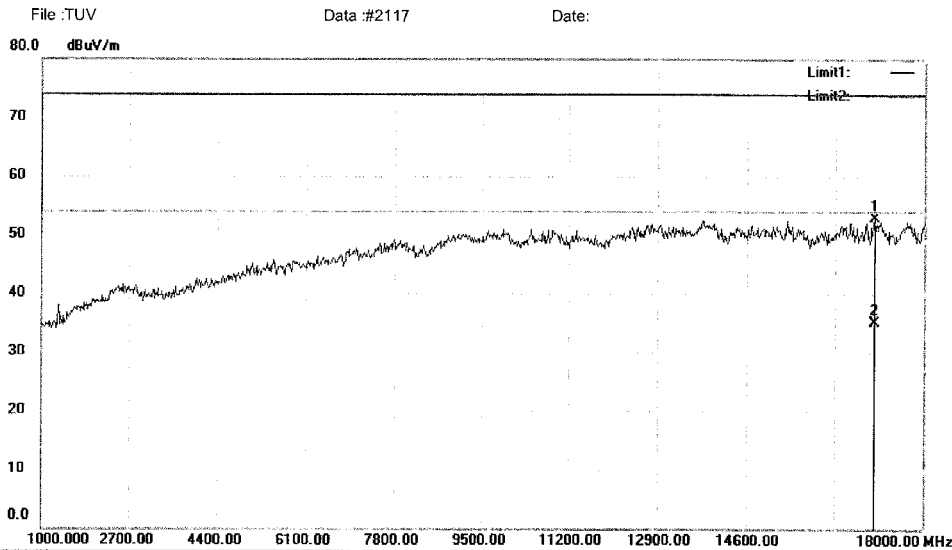
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2115

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		17048.00	50.29	2.70	52.99	74.00	-21.01	peak		
2	*	17048.00	32.50	2.70	35.20	54.00	-18.80	AVG		

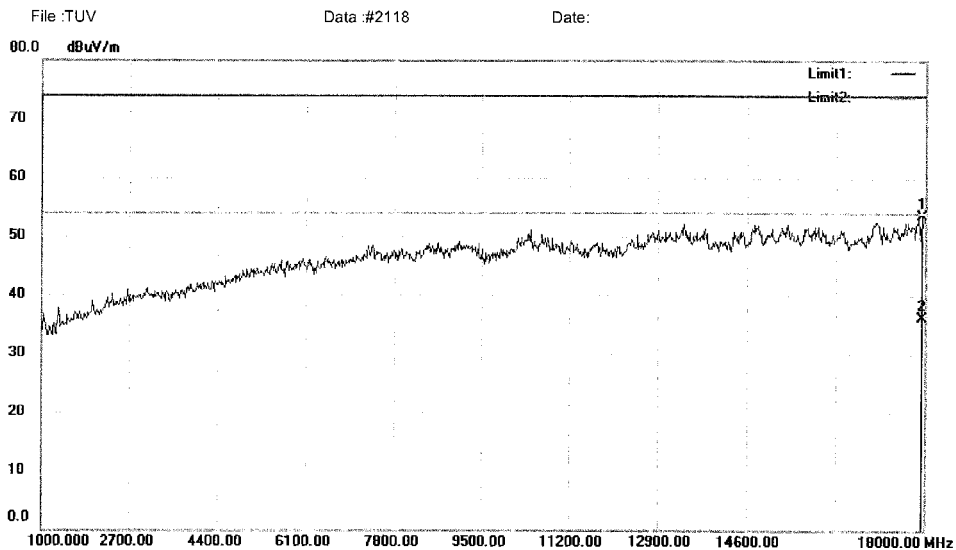
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2117

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17932.00	39.15	14.32	53.47	74.00	-20.53	peak		
2	*	17932.00	21.78	14.32	36.10	54.00	-17.90	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

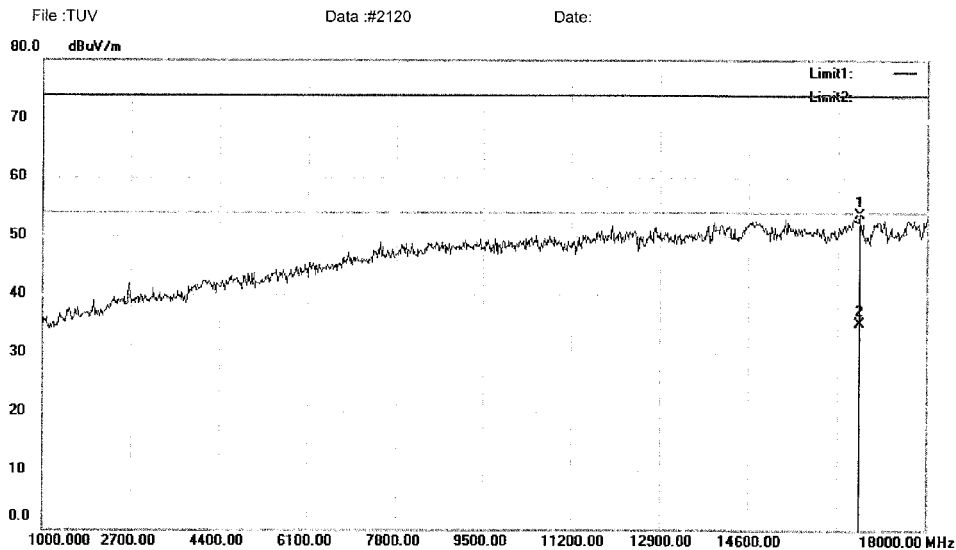
File :TUV\Data :#2118

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11a 5240
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		16708.00	52.91	0.85	53.76	74.00	-20.24	peak		
2	*	16708.00	34.35	0.85	35.20	54.00	-18.80	AVG		

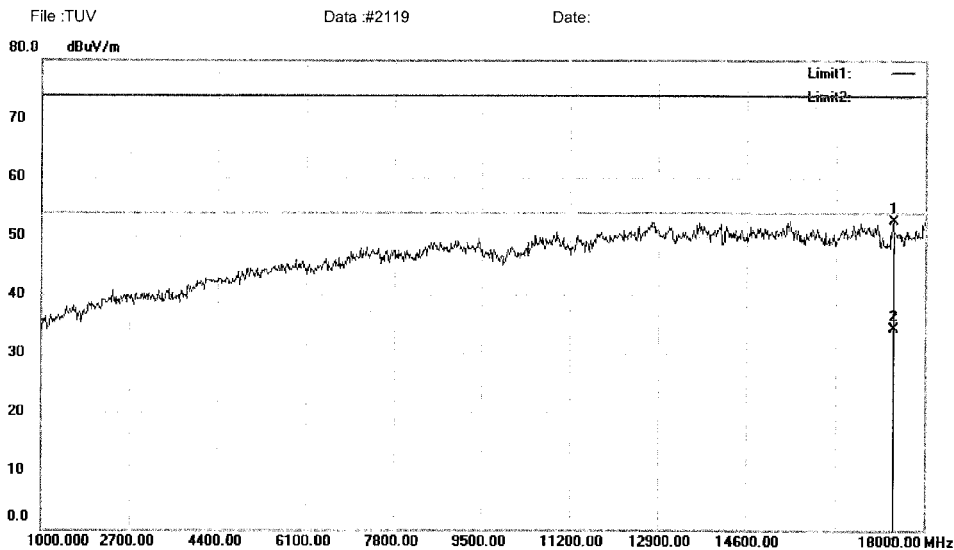
*:Maximum data x:Over limit l:over margin

Operator: KK

File: TUV\Data: #2120

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		17388.00	45.59	7.18	52.77	74.00	-21.23	peak		
2	*	17388.00	27.12	7.18	34.30	54.00	-19.70	AVG		

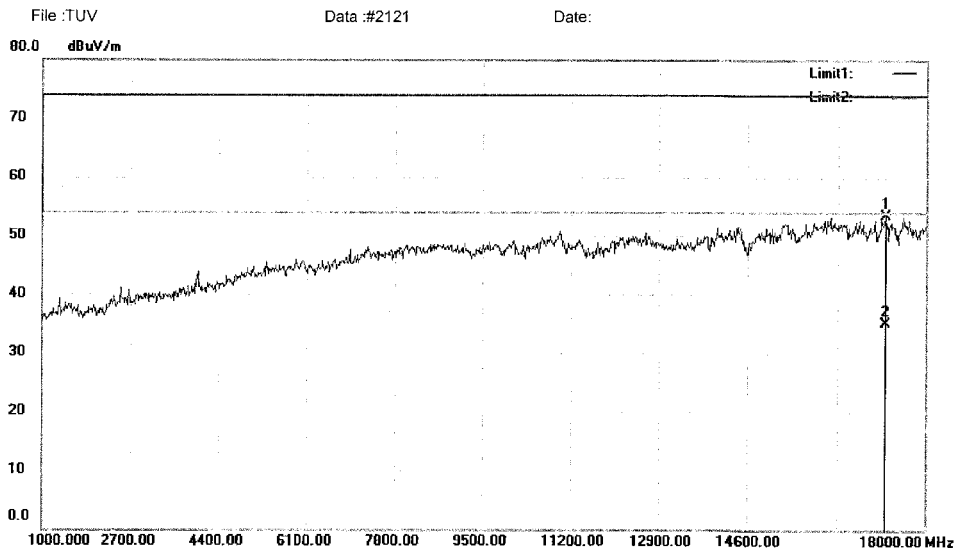
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2119

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		17218.00	48.59	4.93	53.52	74.00	-20.48	peak		
2	*	17218.00	30.27	4.93	35.20	54.00	-18.80	AVG		

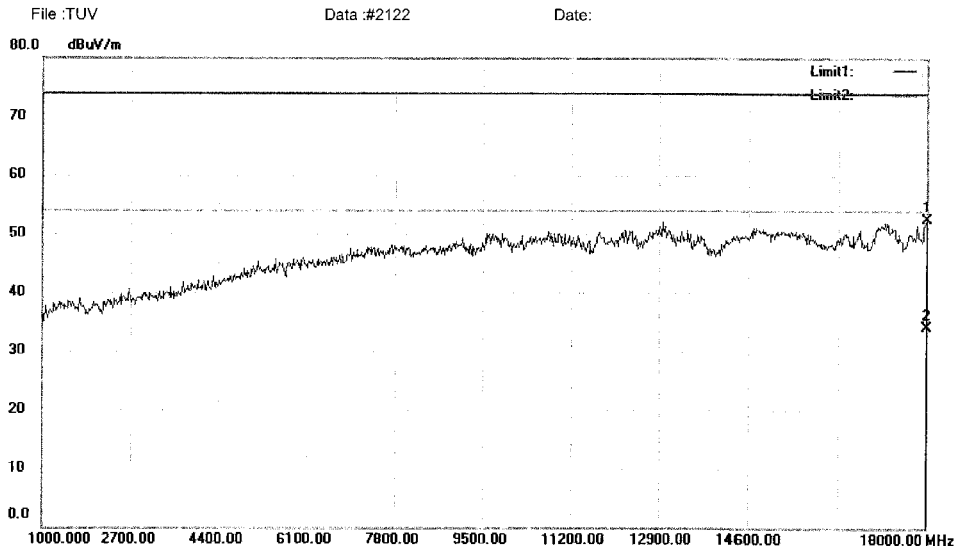
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2121

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		18000.00	37.31	15.22	52.53	74.00	-21.47	peak		
2	*	18000.00	18.98	15.22	34.20	54.00	-19.80	AVG		

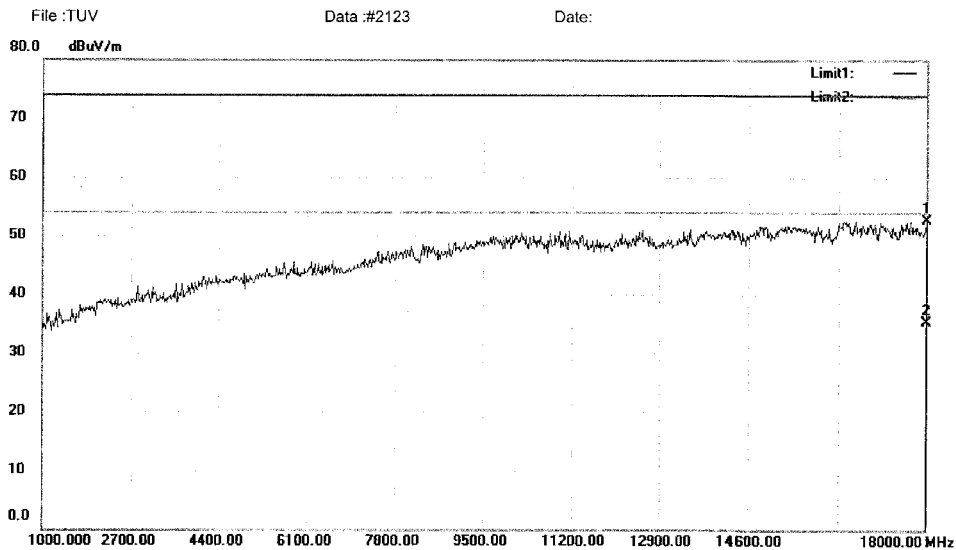
*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUV\Data :#2122

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		18000.00	33.60	19.05	52.65	74.00	-21.35	peak		
2	*	18000.00	16.25	19.05	35.30	54.00	-18.70	AVG		

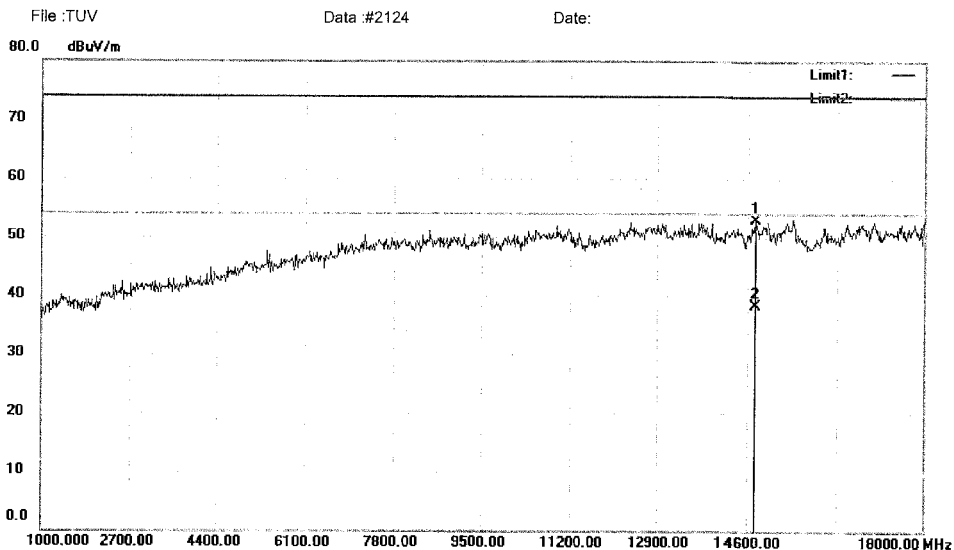
*:Maximum data x:Over limit l:over margin

Operator: KK

File: TUV\Data: #2123

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14753.00	47.55	5.33	52.88	74.00	-21.12	peak		0
2	*	14753.00	32.91	5.33	38.24	54.00	-15.76	AVG		0

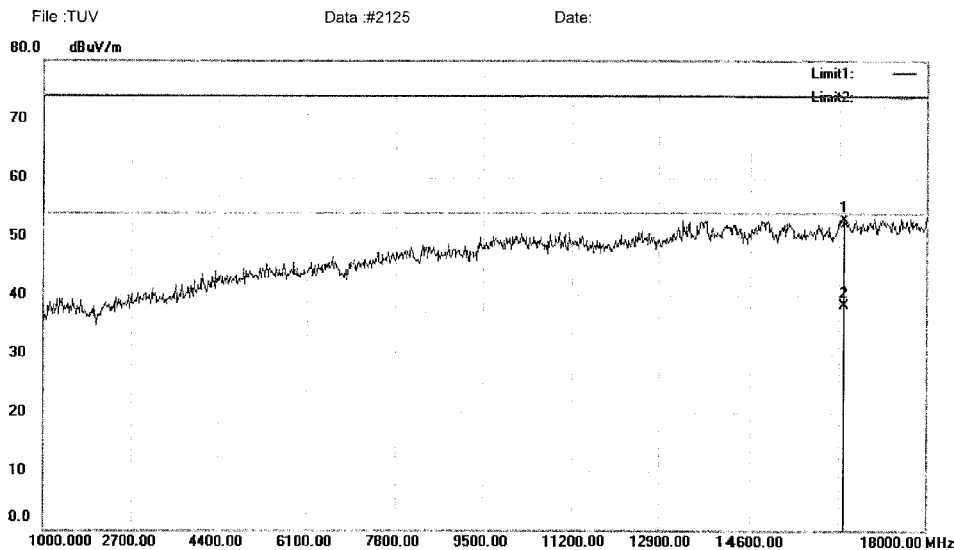
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2124

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		16402.00	49.85	3.10	52.95	74.00	-21.05	peak		0
2	*	16402.00	35.13	3.10	38.23	54.00	-15.77	AVG		0

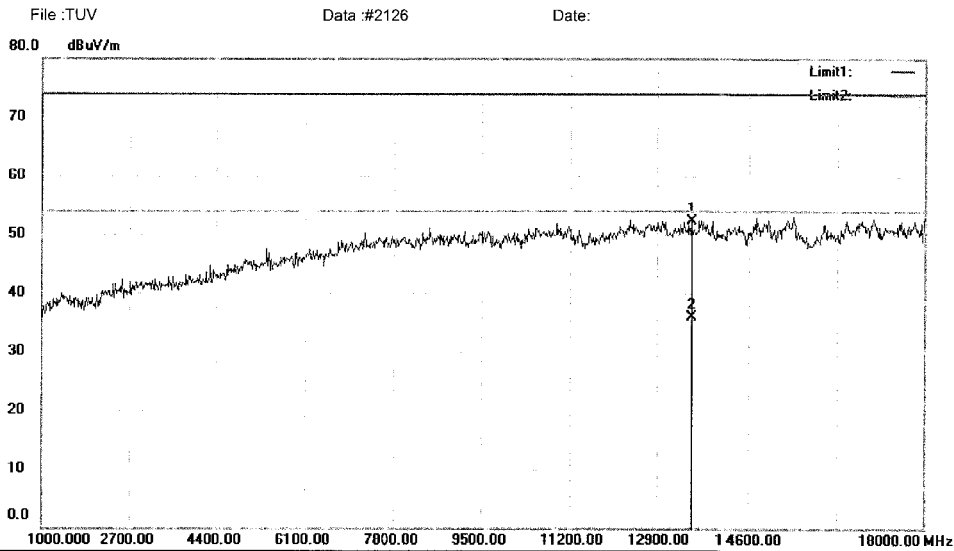
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2125

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13580.00	48.43	3.96	52.39	74.00	-21.61	peak		0
2	*	13580.00	31.98	3.96	35.94	54.00	-18.06	AVG		0

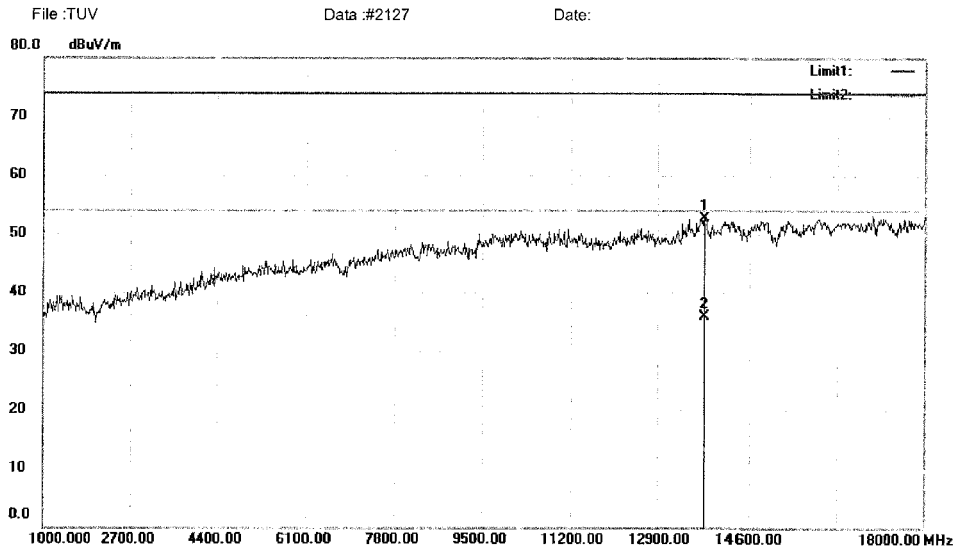
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2126

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		13818.00	47.80	4.93	52.73	74.00	-21.27	peak		0
2	*	13818.00	31.01	4.93	35.94	54.00	-18.06	AVG		0

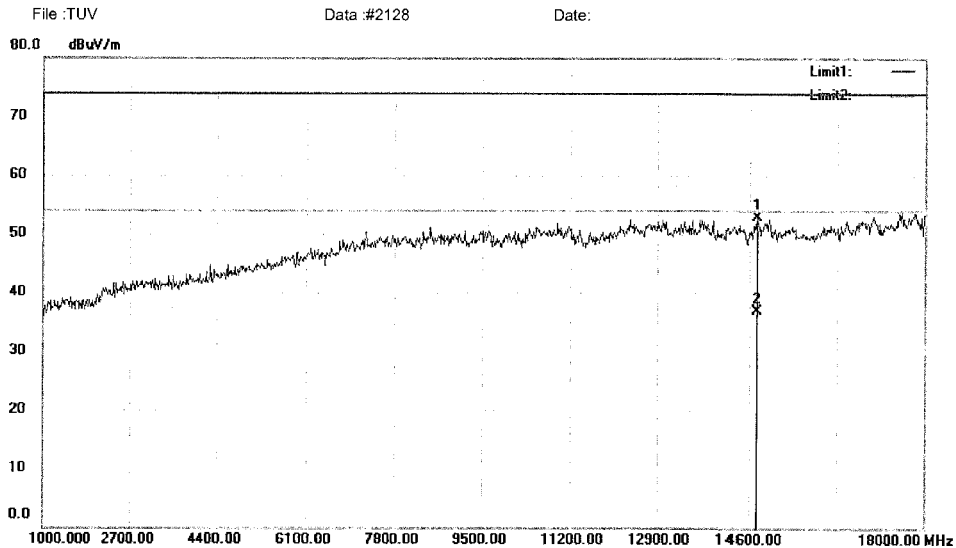
*:Maximum data x:Over limit l:over margin

Operator: KK

File: TUV\Data: #2127

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	degree	Comment
1		14753.00	47.55	5.33	52.88	74.00	-21.12	peak	0	
2	*	14753.00	31.52	5.33	36.85	54.00	-17.15	AVG	0	

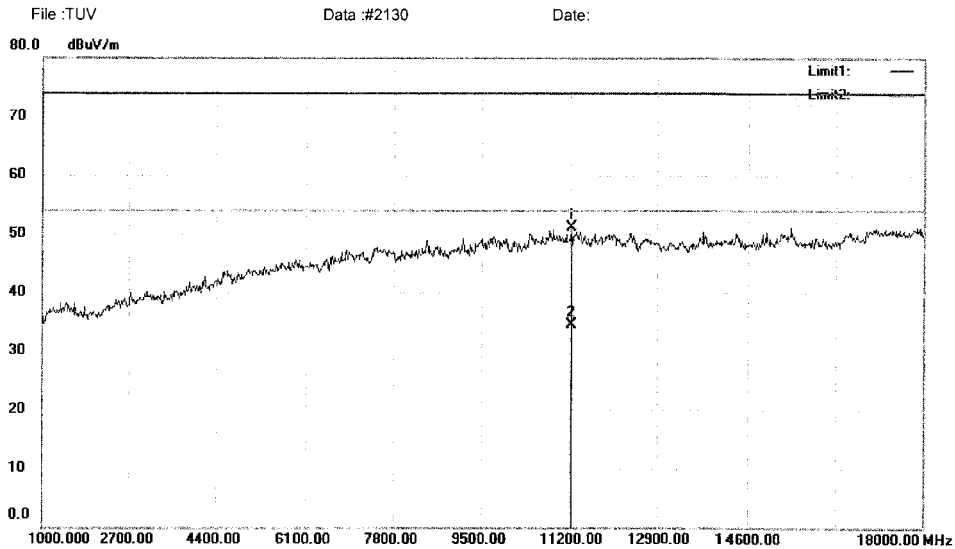
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2128

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		11234.00	55.06	-3.90	51.16	74.00	-22.84	peak		
2	*	11234.00	38.40	-3.90	34.50	54.00	-19.50	AVG		

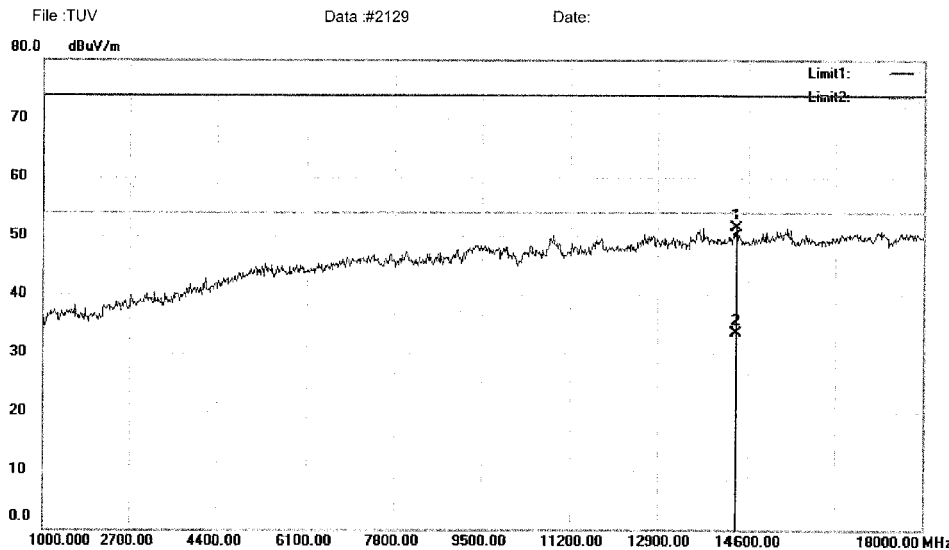
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2130

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		14379.00	48.13	3.33	51.46	74.00	-22.54	peak		
2	*	14379.00	30.27	3.33	33.60	54.00	-20.40	AVG		

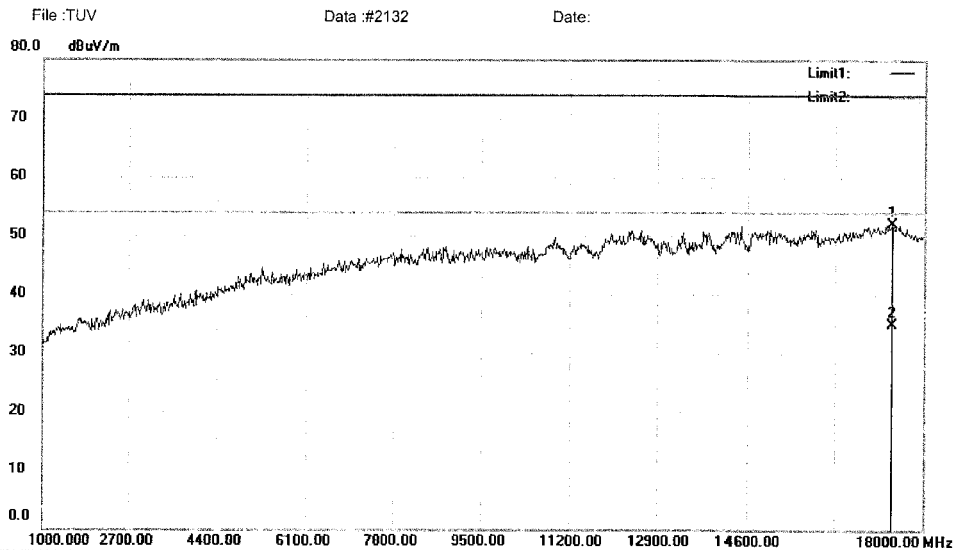
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2129

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		17388.00	44.41	7.61	52.02	74.00	-21.98	peak		
2	*	17388.00	27.29	7.61	34.90	54.00	-19.10	AVG		

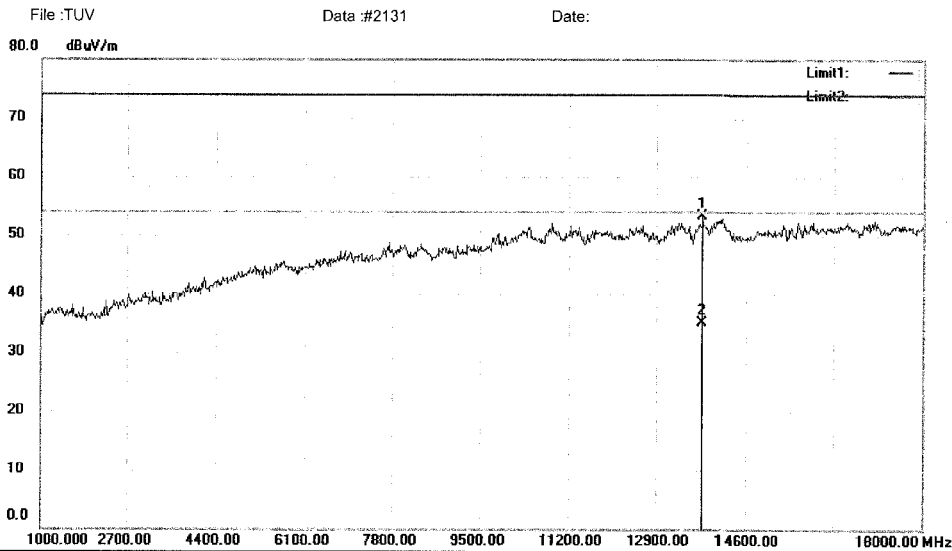
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2132

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13801.00	50.27	2.96	53.23	74.00	-20.77	peak		
2	*	13801.00	32.14	2.96	35.10	54.00	-18.90	AVG		

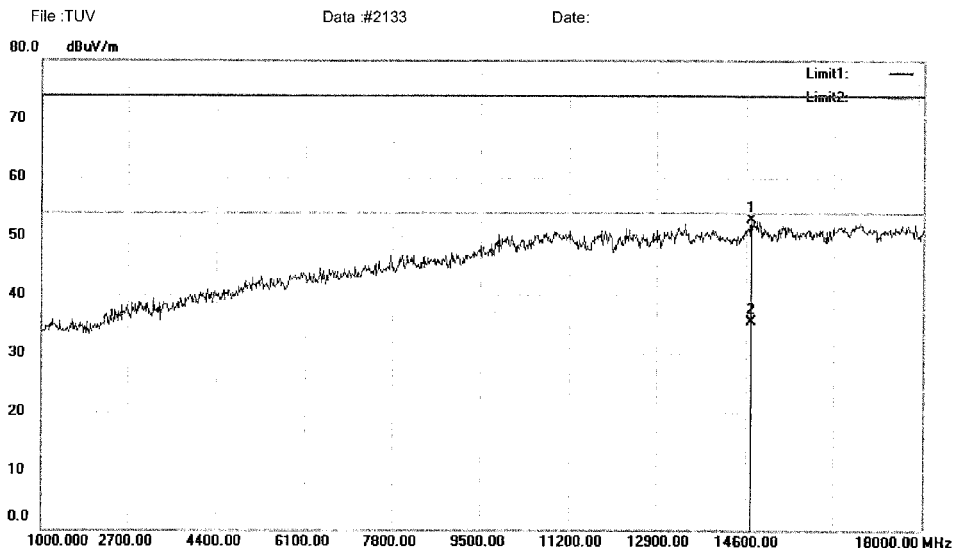
*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUVData :#2131

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		14702.00	50.09	2.88	52.97	74.00	-21.03	peak		
2	*	14702.00	32.72	2.88	35.60	54.00	-18.40	AVG		

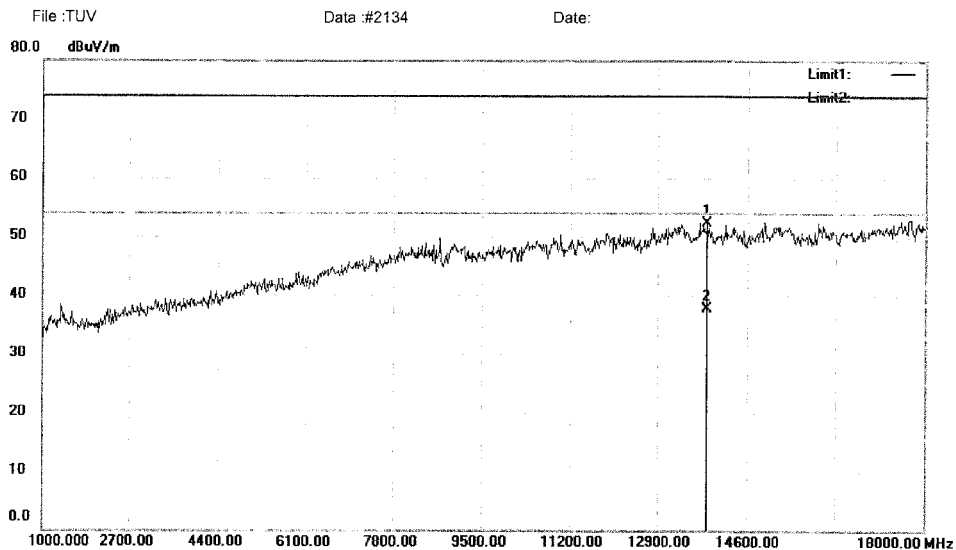
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #2133

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		13869.00	49.09	3.28	52.37	74.00	-21.63	peak		0
2	*	13869.00	34.34	3.28	37.62	54.00	-16.38	AVG		0

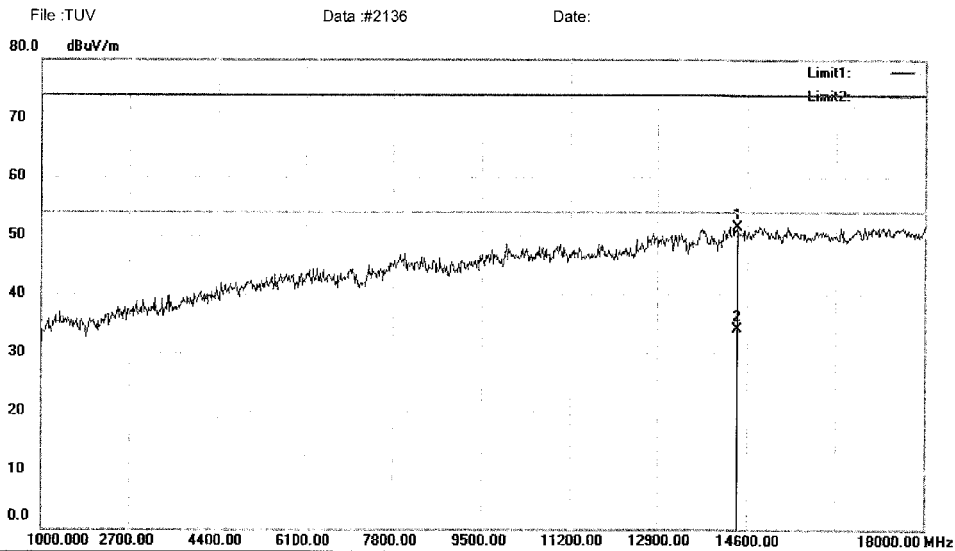
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2134

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		14396.00	48.27	3.31	51.58	74.00	-22.42	peak		
2	*	14396.00	30.79	3.31	34.10	54.00	-19.90	AVG		

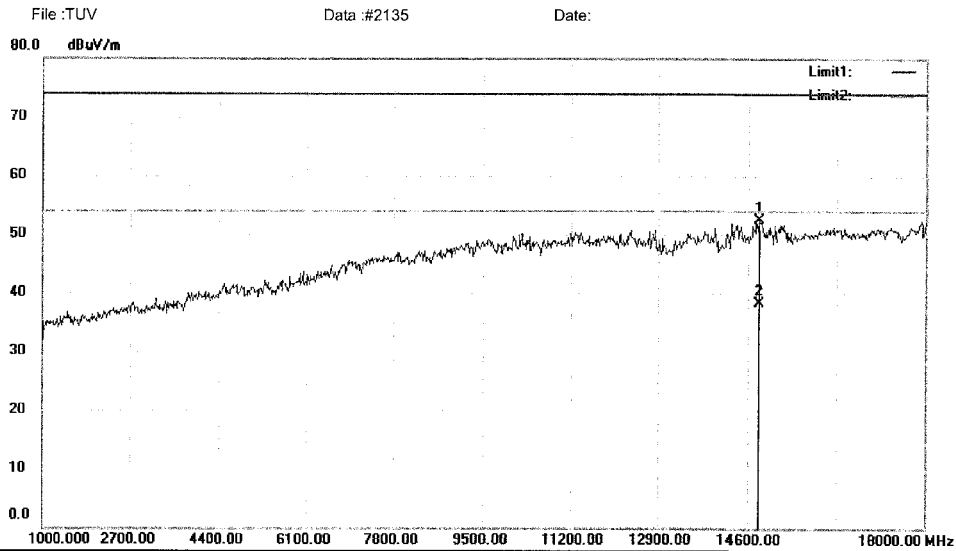
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #2136

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14804.00	49.84	2.72	52.56	74.00	-21.44	peak		0
2	*	14804.00	35.52	2.72	38.24	54.00	-15.76	AVG		0

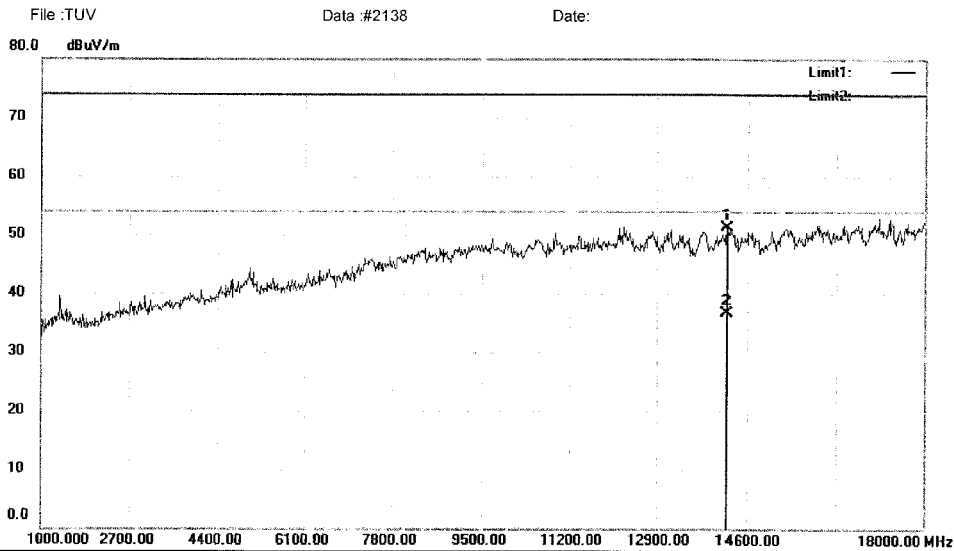
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #2135

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14226.00	47.69	3.55	51.24	74.00	-22.76	peak		0
2	*	14226.00	33.09	3.55	36.64	54.00	-17.36	AVG		0

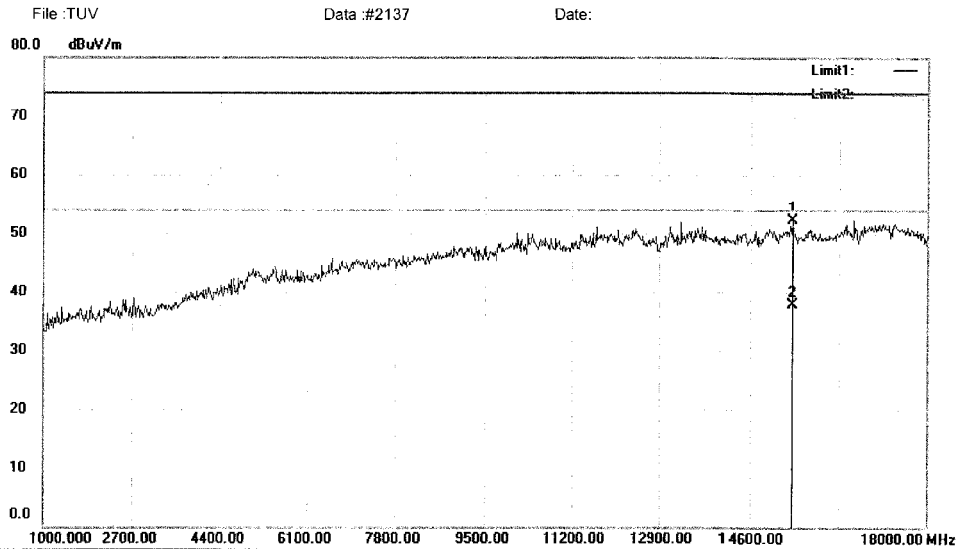
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #2138

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15399.00	51.44	0.95	52.39	74.00	-21.61	peak		0
2	*	15399.00	36.87	0.95	37.82	54.00	-16.18	AVG		0

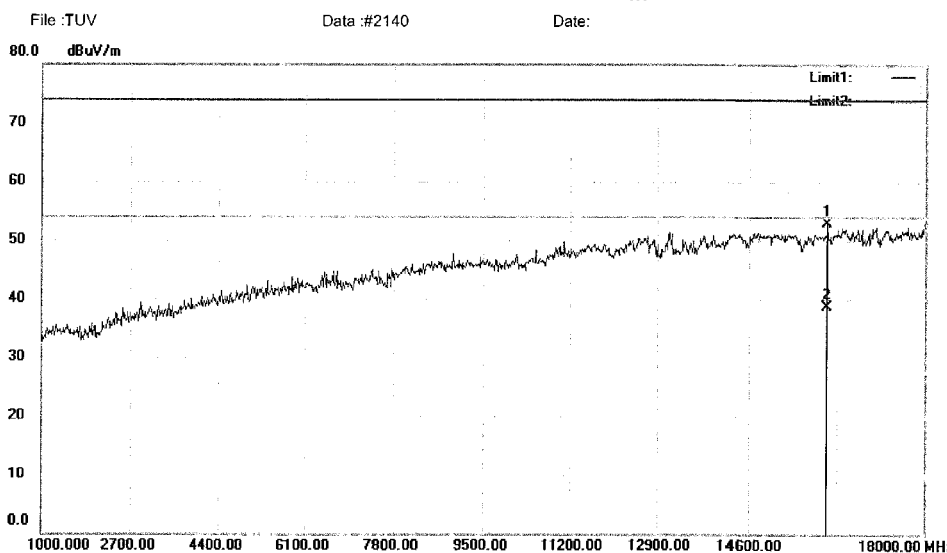
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2137

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		16113.00	53.83	-0.83	53.00	74.00	-21.00	peak		0
2	*	16113.00	39.45	-0.83	38.62	54.00	-15.38	AVG		0

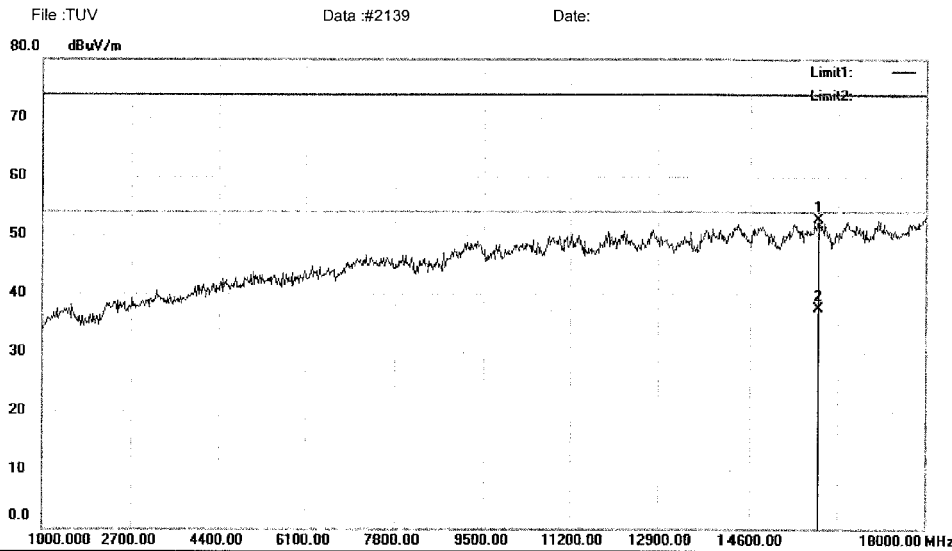
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2140

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15926.00	53.68	-1.03	52.65	74.00	-21.35	peak		0
2	*	15926.00	38.57	-1.03	37.54	54.00	-16.46	AVG		0

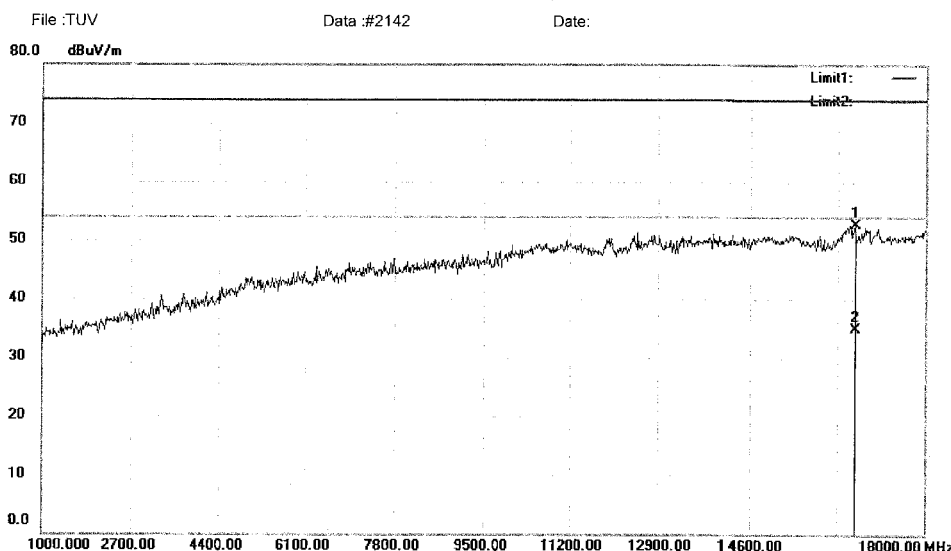
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2139

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		16640.00	51.34	1.36	52.70	74.00	-21.30	peak		
2	*	16640.00	33.54	1.36	34.90	54.00	-19.10	AVG		

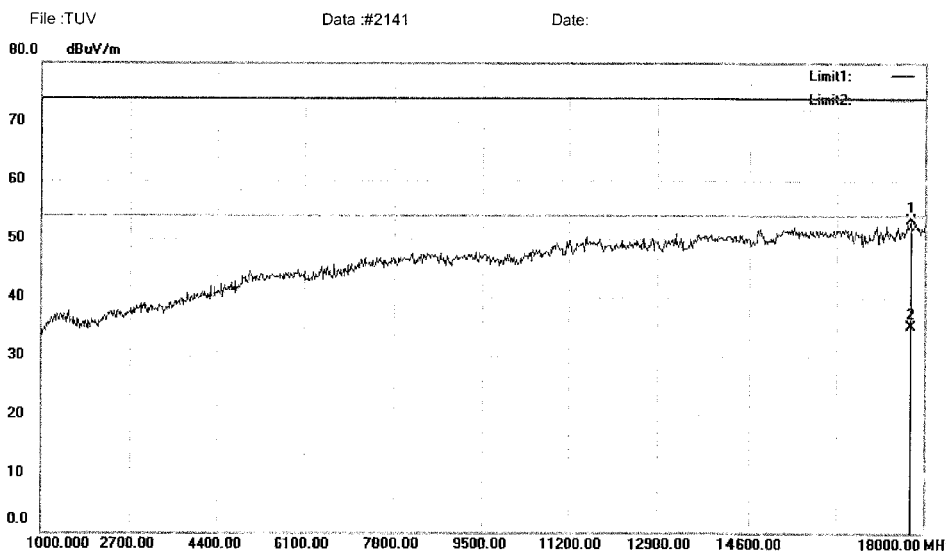
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2142

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		17728.00	41.52	11.78	53.30	74.00	-20.70	peak		
2	*	17728.00	23.42	11.78	35.20	54.00	-18.80	AVG		

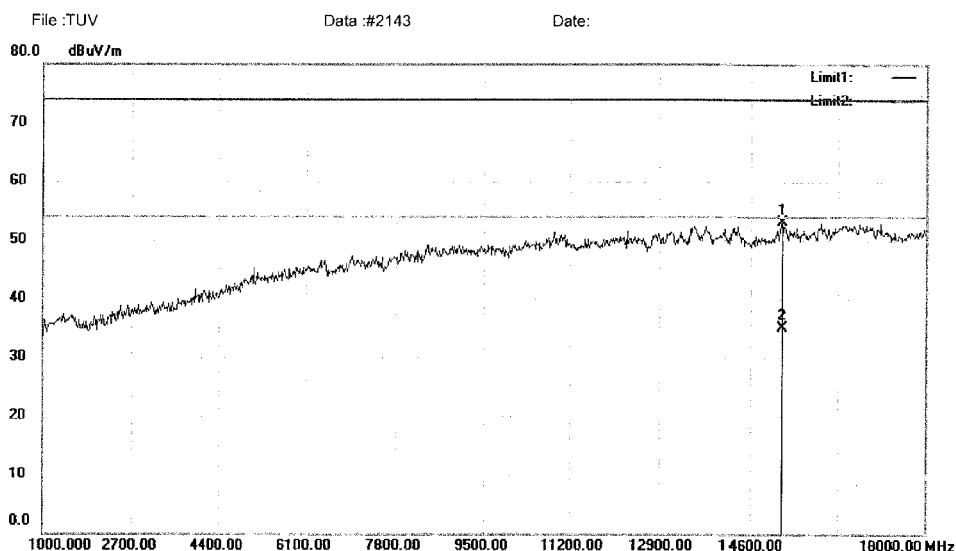
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2141

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		15229.00	51.61	1.59	53.20	74.00	-20.80	peak		
2	*	15229.00	33.61	1.59	35.20	54.00	-18.80	AVG		

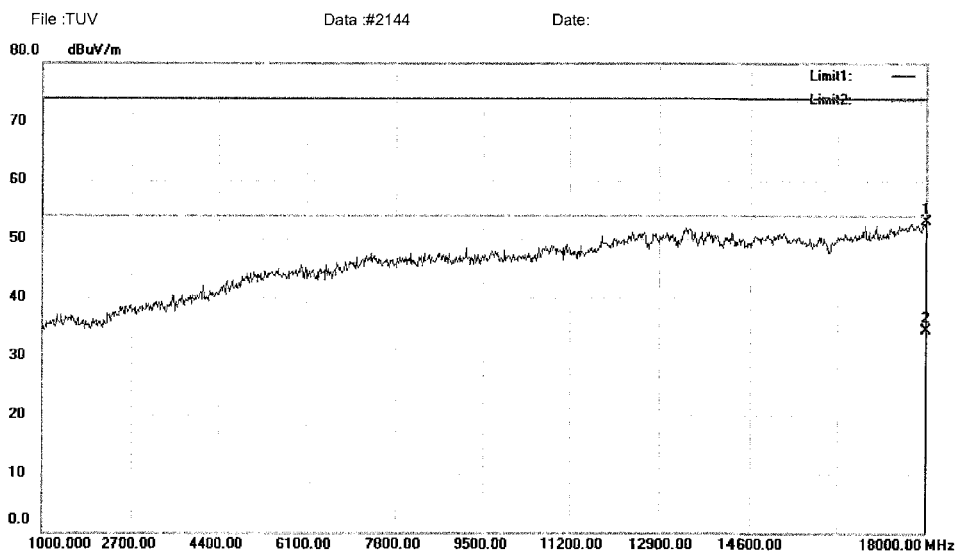
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #2143

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		18000.00	38.06	15.12	53.18	74.00	-20.82	peak		
2	*	18000.00	19.48	15.12	34.60	54.00	-19.40	AVG		

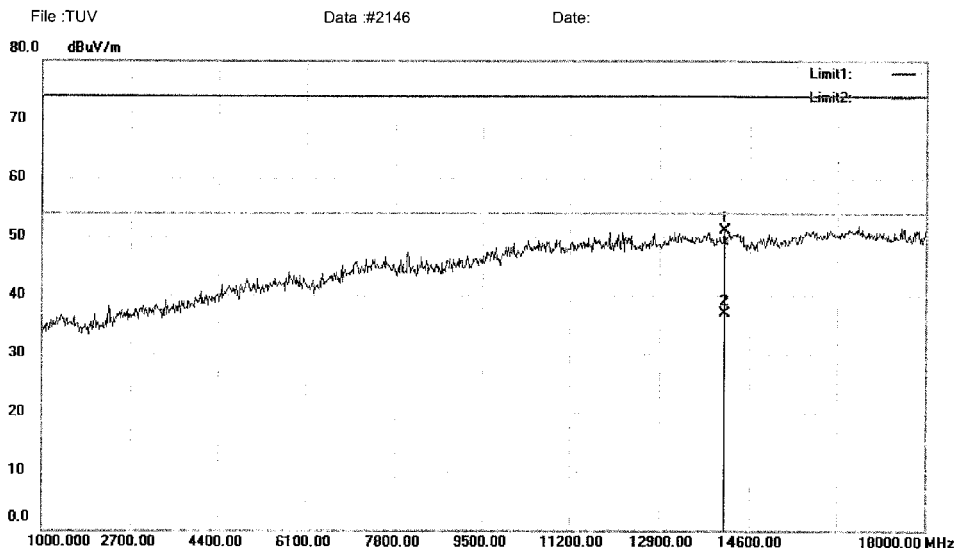
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2144

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5795
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		14158.00	47.37	3.65	51.02	74.00	-22.98	peak	0	
2	*	14158.00	33.19	3.65	36.84	54.00	-17.16	AVG	0	

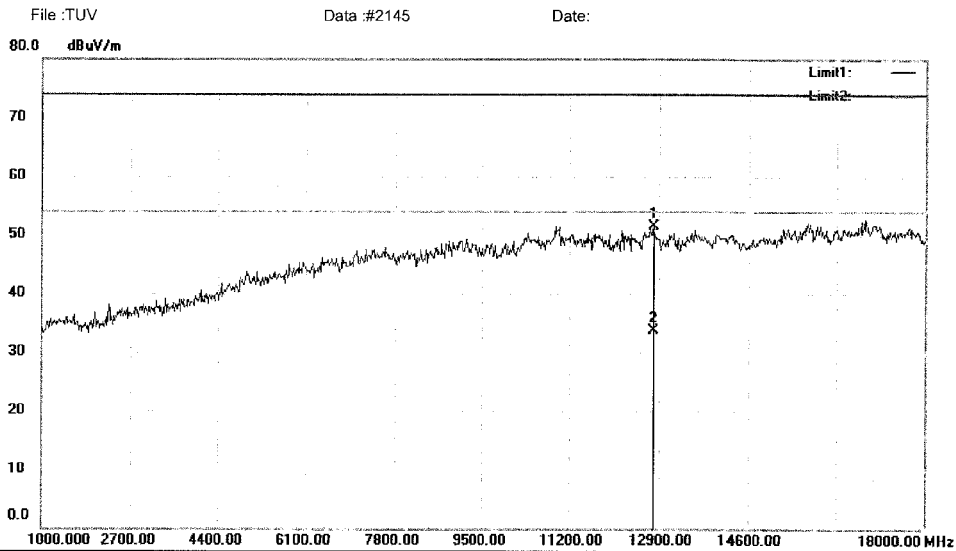
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2146

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		12798.00	52.61	-1.14	51.47	74.00	-22.53	peak		
2	*	12798.00	34.94	-1.14	33.80	54.00	-20.20	AVG		

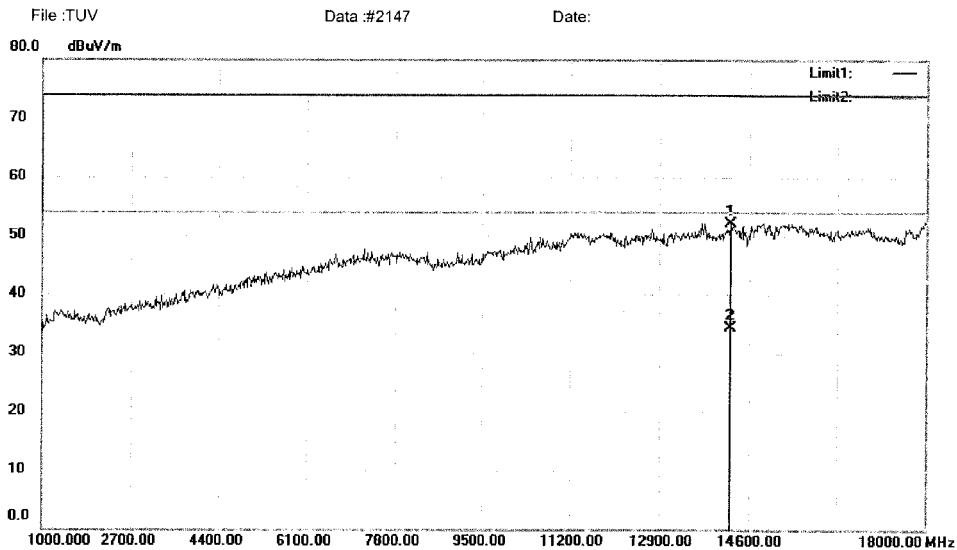
*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUV\Data :#2145

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		14277.00	48.69	3.48	52.17	74.00	-21.83	peak		
2	*	14277.00	30.82	3.48	34.30	54.00	-19.70	AVG		

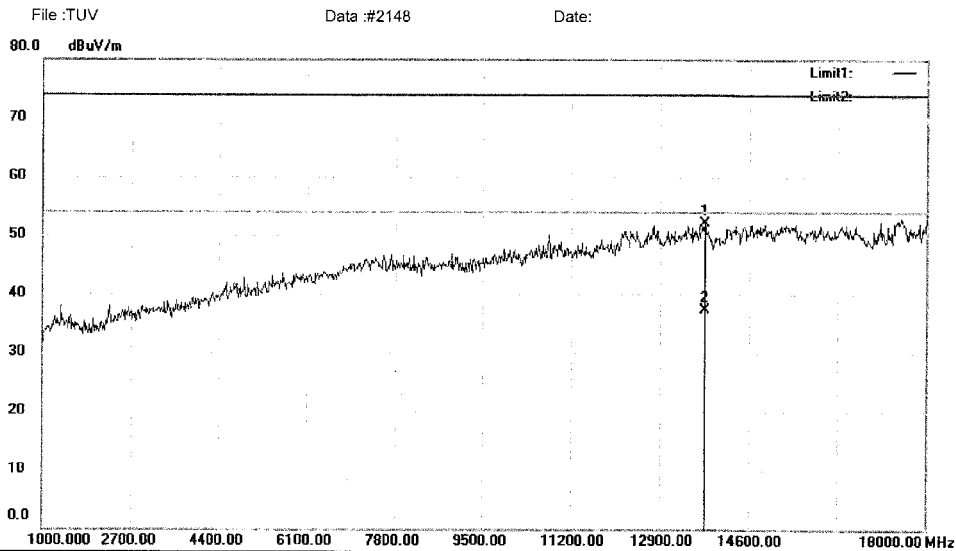
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #2147

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13767.00	49.24	2.80	52.04	74.00	-21.96	peak		0
2	*	13767.00	34.41	2.80	37.21	54.00	-16.79	AVG		0

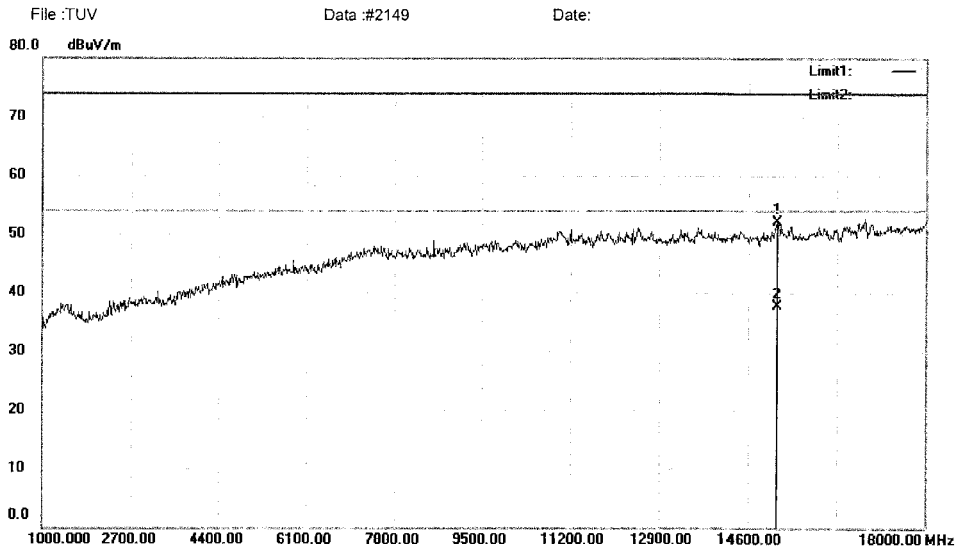
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2148

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11ac(20MHz) 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15161.00	50.28	1.85	52.13	74.00	-21.87	peak		0
2	*	15161.00	35.79	1.85	37.64	54.00	-16.36	AVG		0

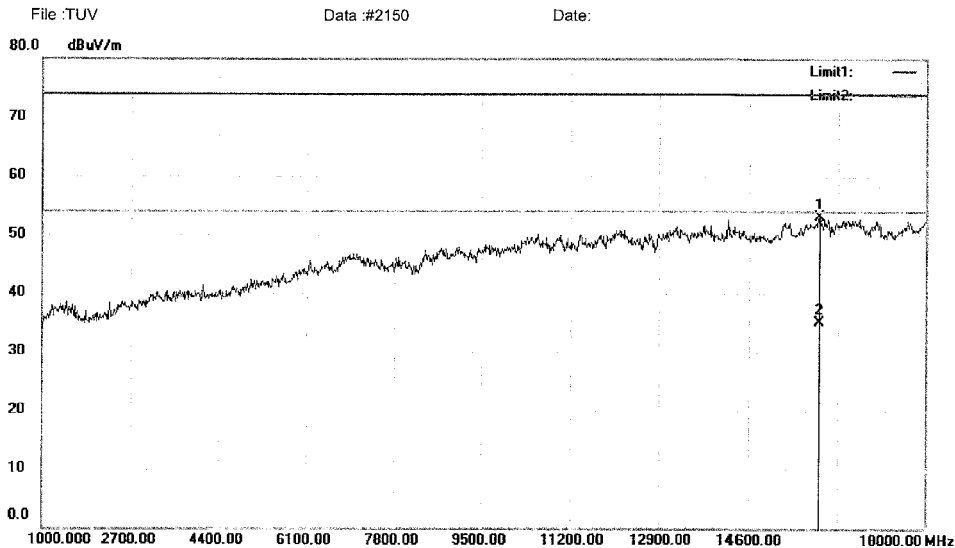
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2149

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15943.00	54.19	-1.09	53.10	74.00	-20.90	peak		
2	*	15943.00	36.29	-1.09	35.20	54.00	-18.80	AVG		

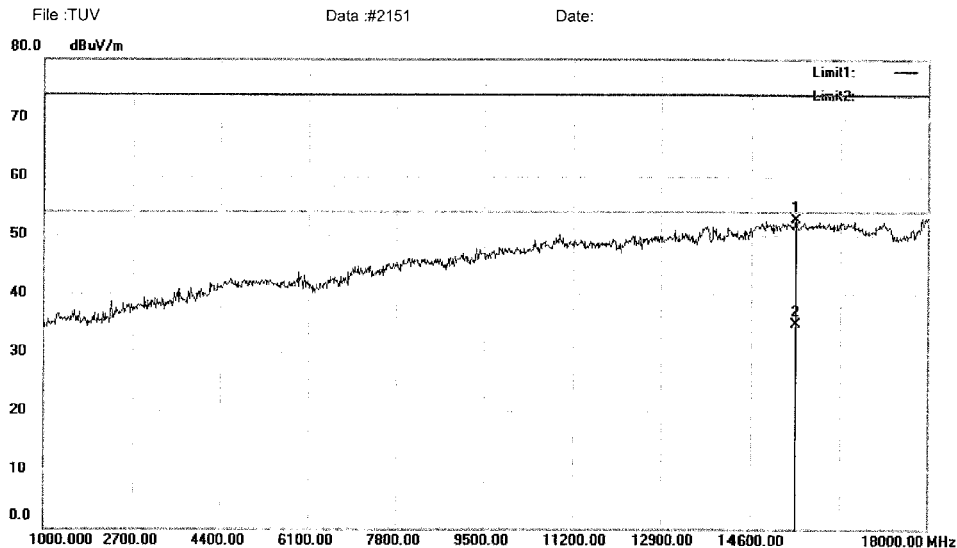
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2150

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		15450.00	51.90	0.75	52.65	74.00	-21.35	peak		
2	*	15450.00	34.15	0.75	34.90	54.00	-19.10	AVG		

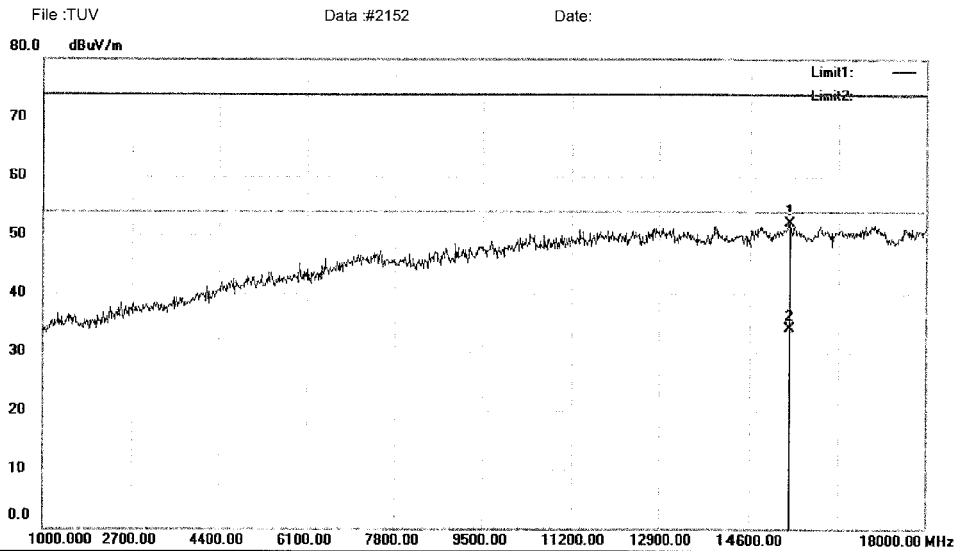
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2151

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		15348.00	51.00	1.14	52.14	74.00	-21.86	peak		
2	*	15348.00	32.96	1.14	34.10	54.00	-19.90	AVG		

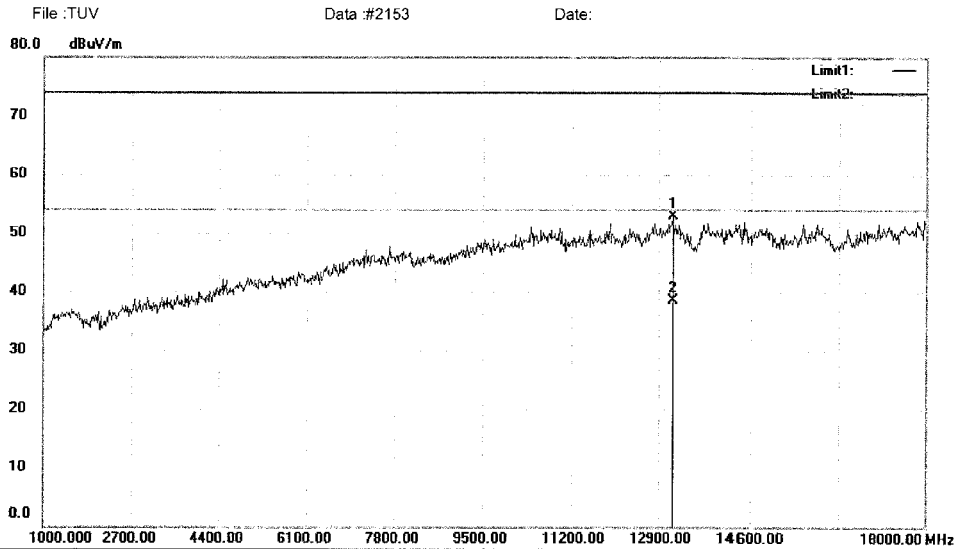
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #2152

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		13172.00	52.72	0.12	52.84	74.00	-21.16	peak		0	
2	*	13172.00	38.29	0.12	38.41	54.00	-15.59	AVG		0	

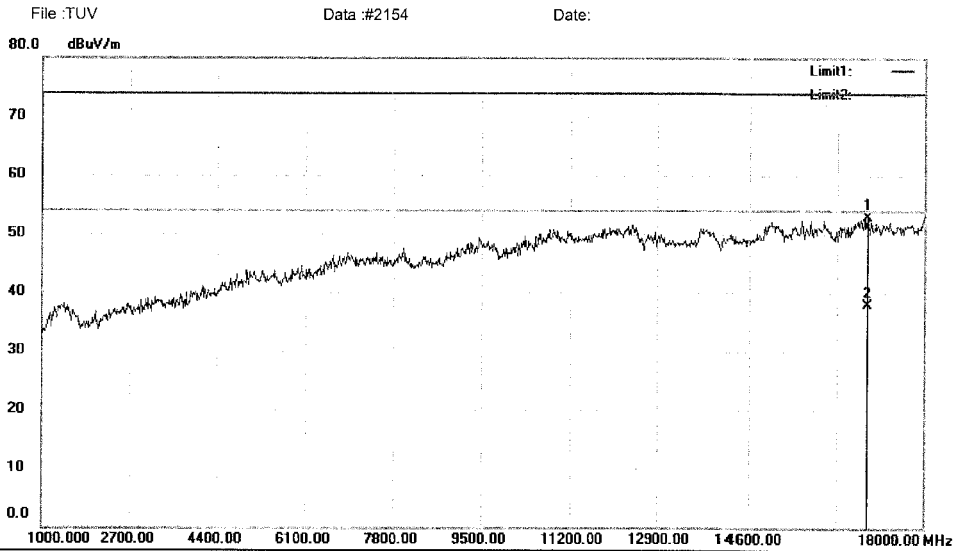
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #2153

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		16895.00	50.57	2.41	52.98	74.00	-21.02	peak		0
2	*	16895.00	35.43	2.41	37.84	54.00	-16.16	AVG		0

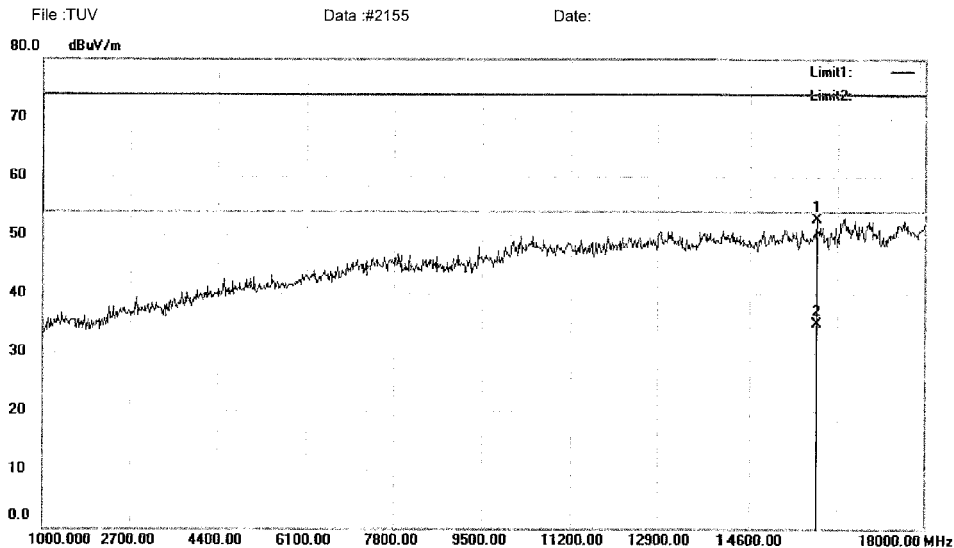
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2154

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Meijialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15892.00	53.69	-0.90	52.79	74.00	-21.21	peak		
2	*	15892.00	35.90	-0.90	35.00	54.00	-19.00	AVG		

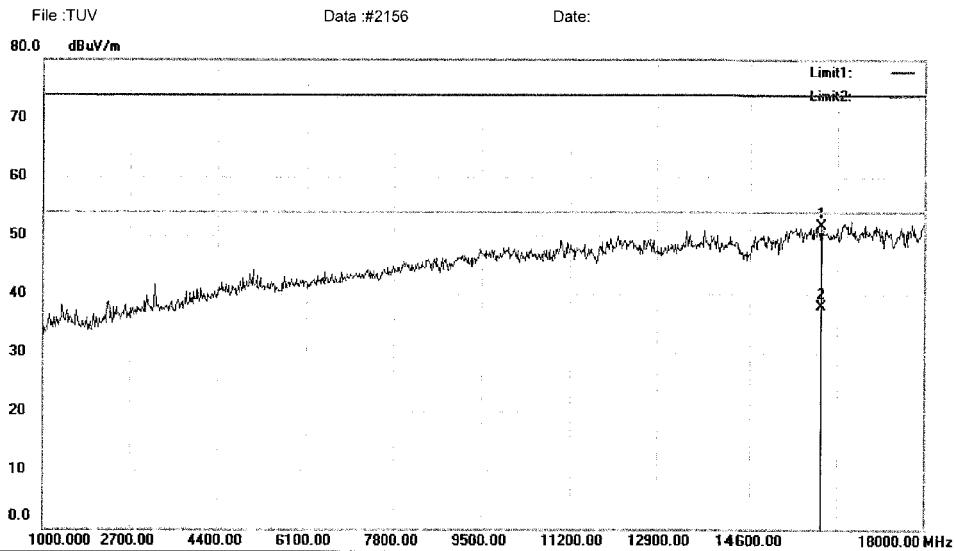
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2155

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15994.00	52.90	-1.28	51.62	74.00	-22.38	peak		0
2	*	15994.00	39.23	-1.28	37.95	54.00	-16.05	AVG		0

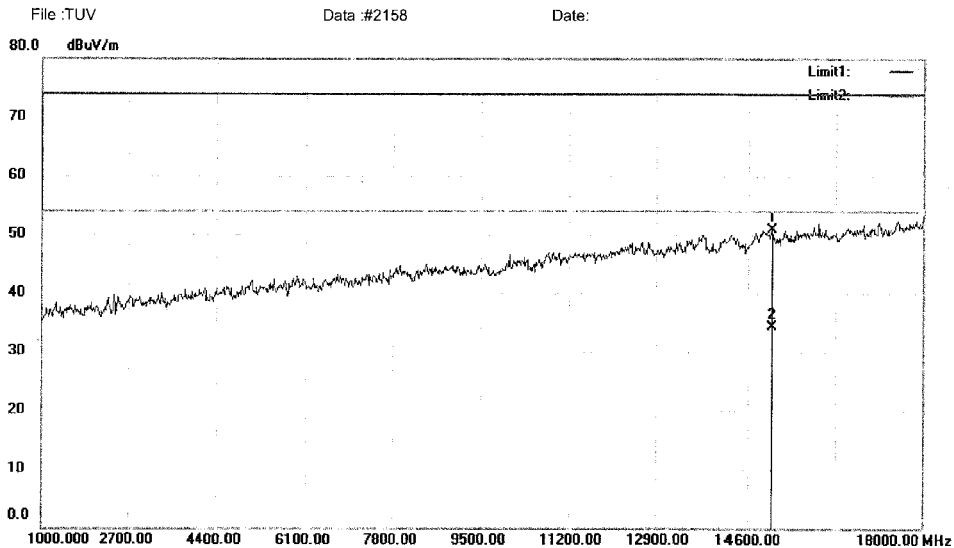
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #2156

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15059.00	47.30	3.57	50.87	74.00	-23.13	peak		0
2	*	15059.00	30.66	3.57	34.23	54.00	-19.77	AVG		0

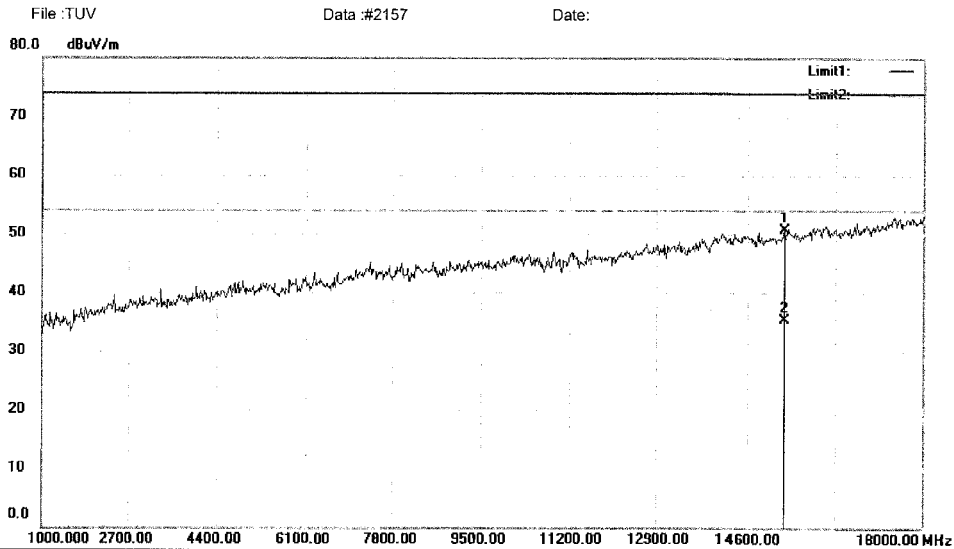
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2158

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15314.00	48.00	2.64	50.64	74.00	-23.36	peak		0
2	*	15314.00	32.59	2.64	35.23	54.00	-18.77	AVG		0

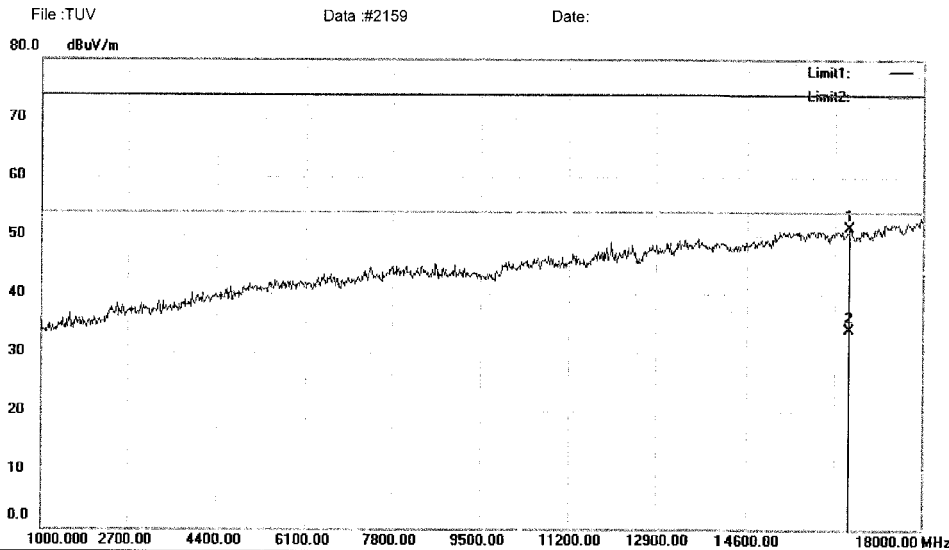
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #2157

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		16589.00	57.32	-6.10	51.22	74.00	-22.78	peak		
2	*	16589.00	40.00	-6.10	33.90	54.00	-20.10	AVG		

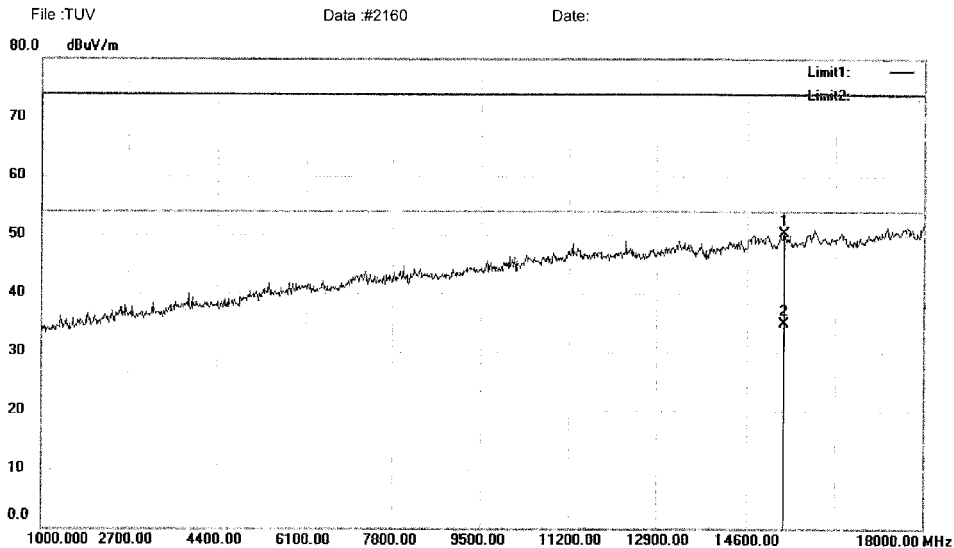
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #2159

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15314.00	57.41	-7.14	50.27	74.00	-23.73	peak		0
2	*	15314.00	41.97	-7.14	34.83	54.00	-19.17	AVG		0

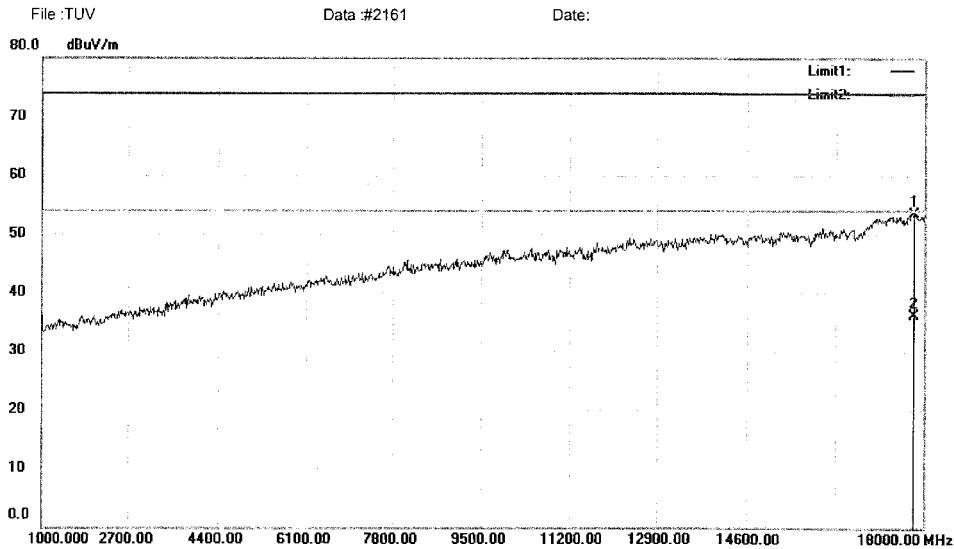
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #2160

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		17813.00	52.10	1.45	53.55	74.00	-20.45	peak		
2	*	17813.00	34.65	1.45	36.10	54.00	-17.90	AVG		

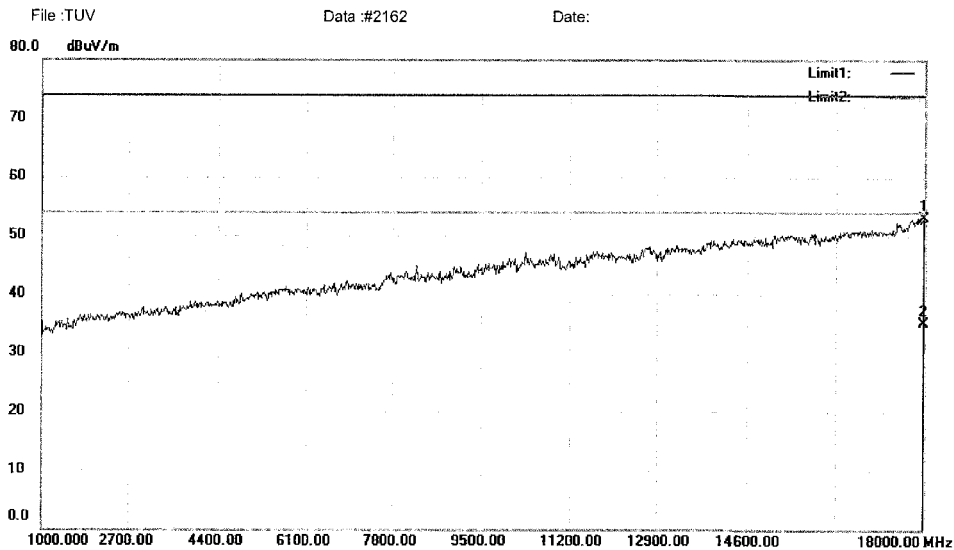
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #2161

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		17983.00	50.32	2.79	53.11	74.00	-20.89	peak		
2	*	17983.00	32.31	2.79	35.10	54.00	-18.90	AVG		

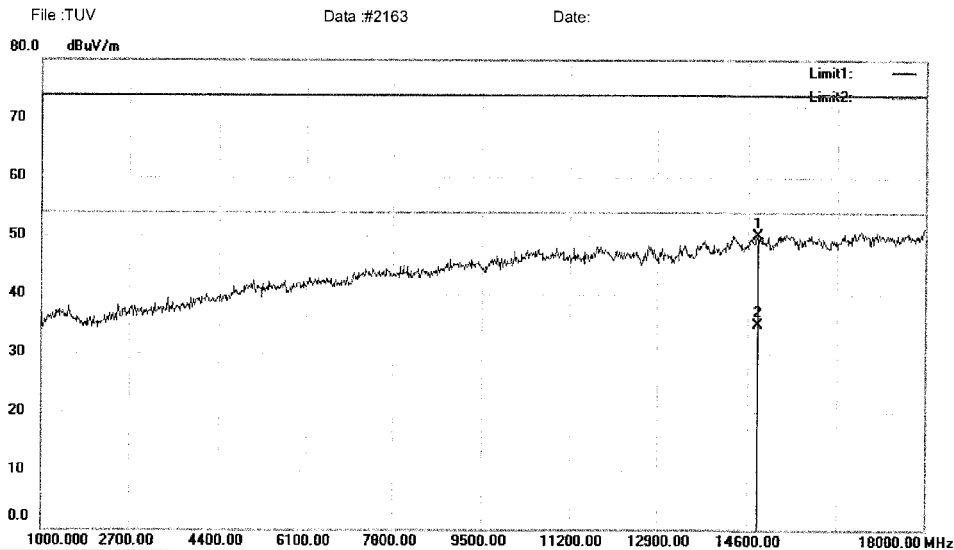
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2162

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14787.00	56.66	-6.52	50.14	74.00	-23.86	peak		0
2	*	14787.00	41.38	-6.52	34.86	54.00	-19.14	AVG		0

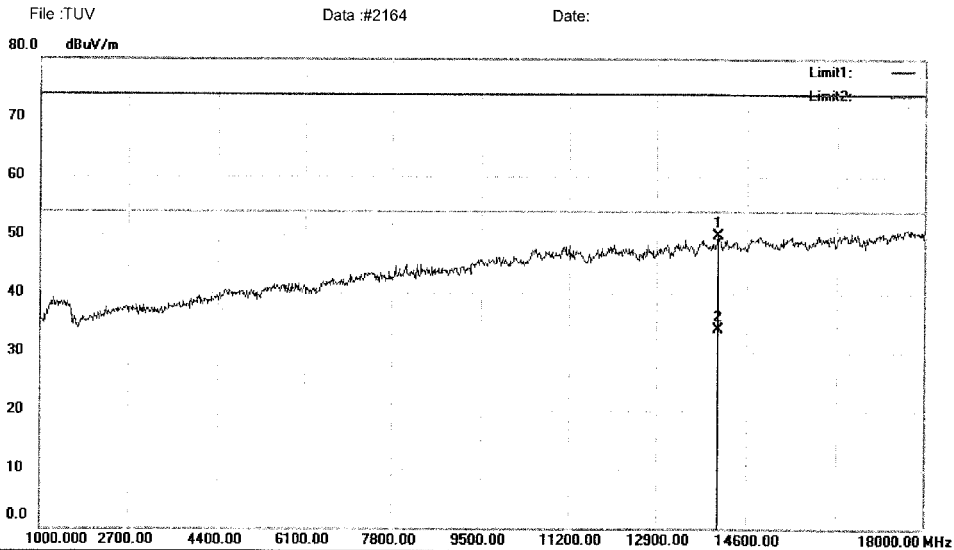
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #2163

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14090.00	55.26	-5.44	49.82	74.00	-24.18	peak		0
2	*	14090.00	39.30	-5.44	33.86	54.00	-20.14	AVG		0

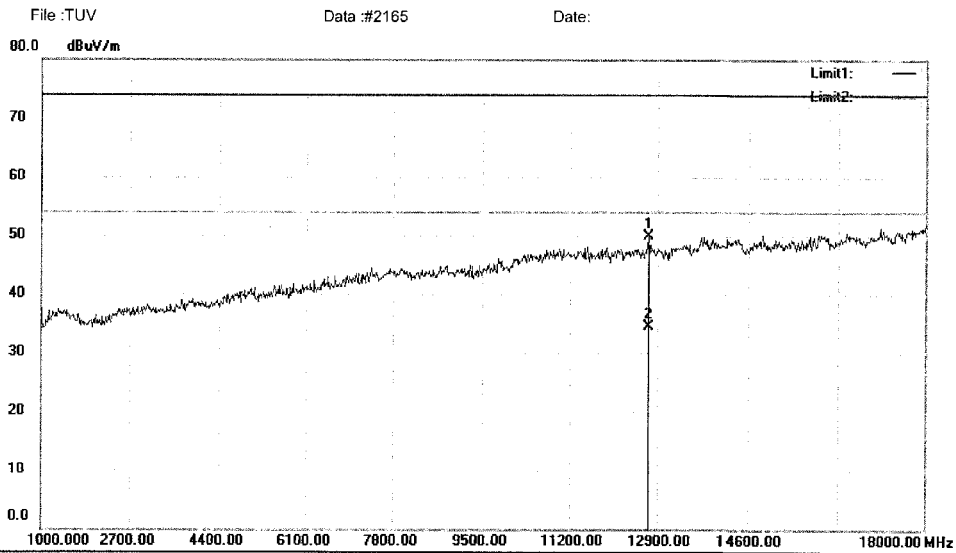
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2164

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		12730.00	59.80	-9.85	49.95	74.00	-24.05	peak		0
2	*	12730.00	44.28	-9.85	34.43	54.00	-19.57	AVG		0

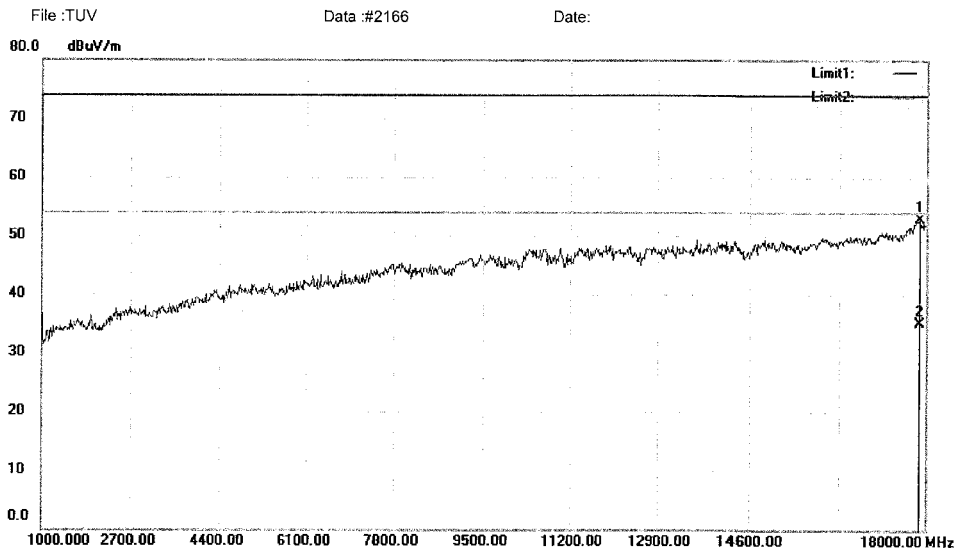
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2165

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		17881.00	50.84	1.98	52.82	74.00	-21.18	peak		
2	*	17881.00	33.12	1.98	35.10	54.00	-18.90	AVG		

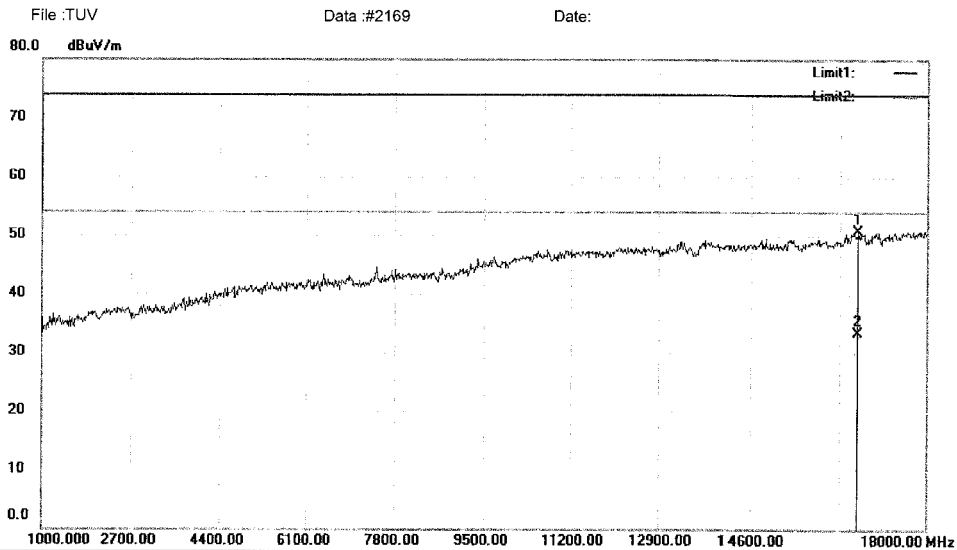
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2166

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		16657.00	56.64	-5.92	50.72	74.00	-23.28	peak		
2	*	16657.00	39.32	-5.92	33.40	54.00	-20.60	AVG		

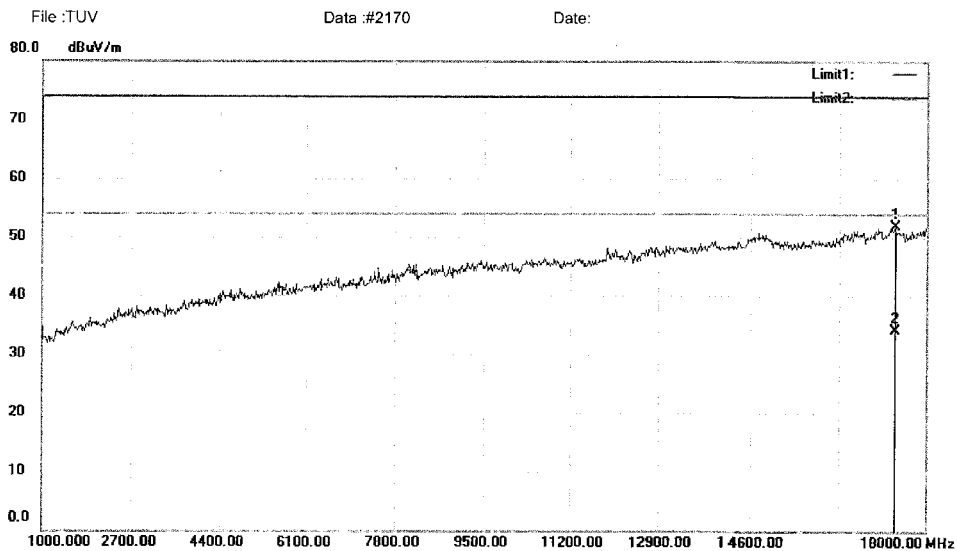
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2169

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3
 Limit: (RE)FCC PART 15 C
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

Polarization: **Vertical** Temperature: 24 C
 Power: AC 120V/60Hz Humidity: 53 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		17388.00	53.83	-1.90	51.93	74.00	-22.07	peak		
2	*	17388.00	36.00	-1.90	34.10	54.00	-19.90	AVG		

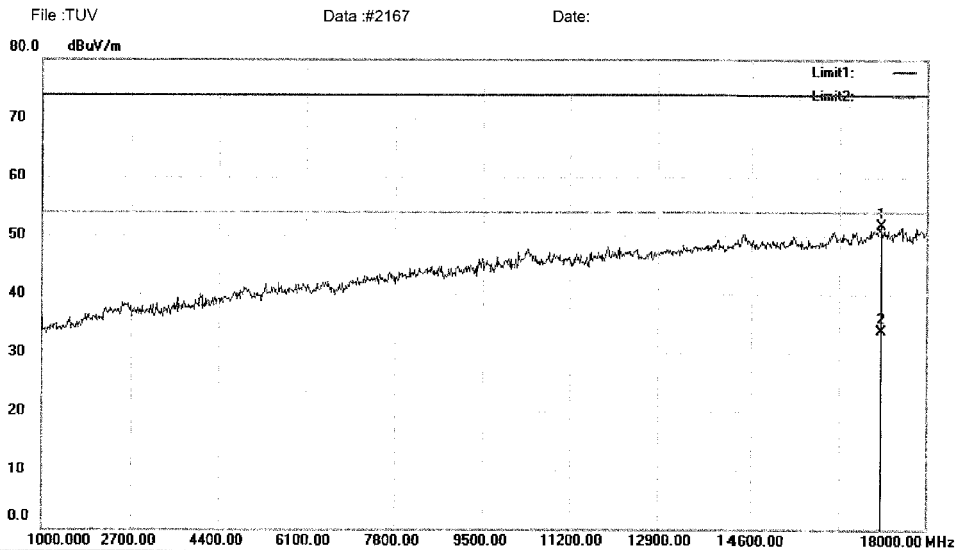
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2170

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		17116.00	55.66	-4.04	51.62	74.00	-22.38	peak		
2	*	17116.00	37.84	-4.04	33.80	54.00	-20.20	AVG		

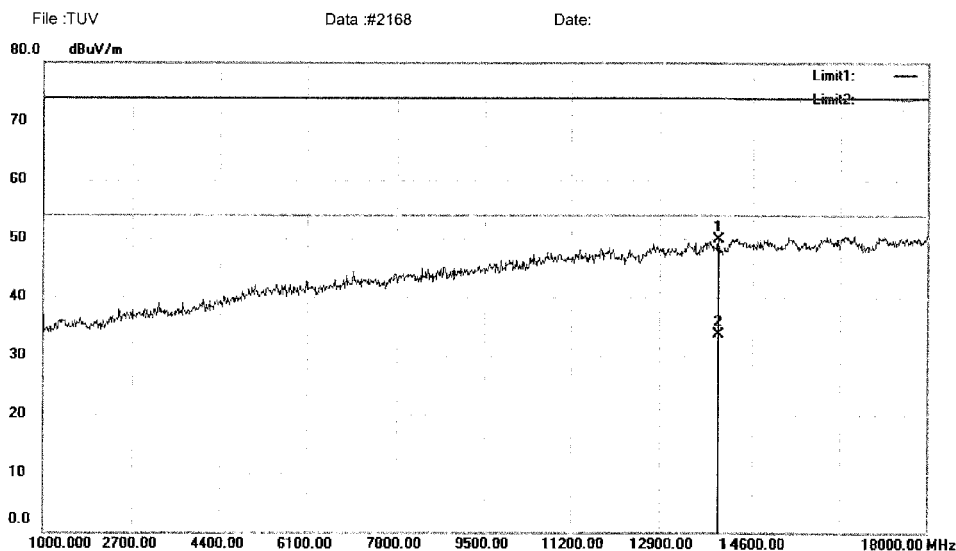
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2167

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14022.00	55.22	-5.34	49.88	74.00	-24.12	peak		0
2	*	14022.00	39.10	-5.34	33.76	54.00	-20.24	AVG		0

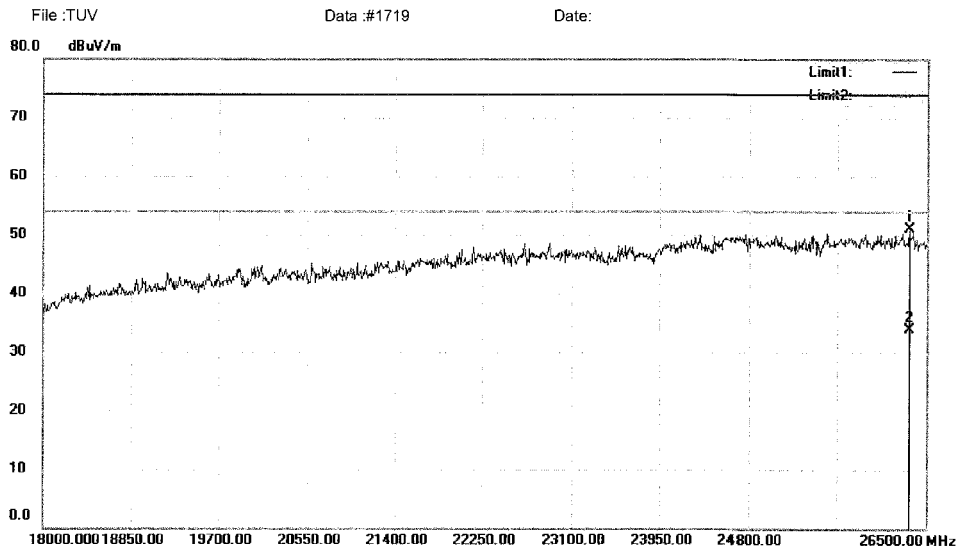
*:Maximum data x:Over limit l:over margin

Operator: KK

File: TUV\Data :#2168

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26330.00	86.54	-35.39	51.15	74.00	-22.85	peak		0
2	*	26330.00	69.29	-35.39	33.90	54.00	-20.10	AVG		0

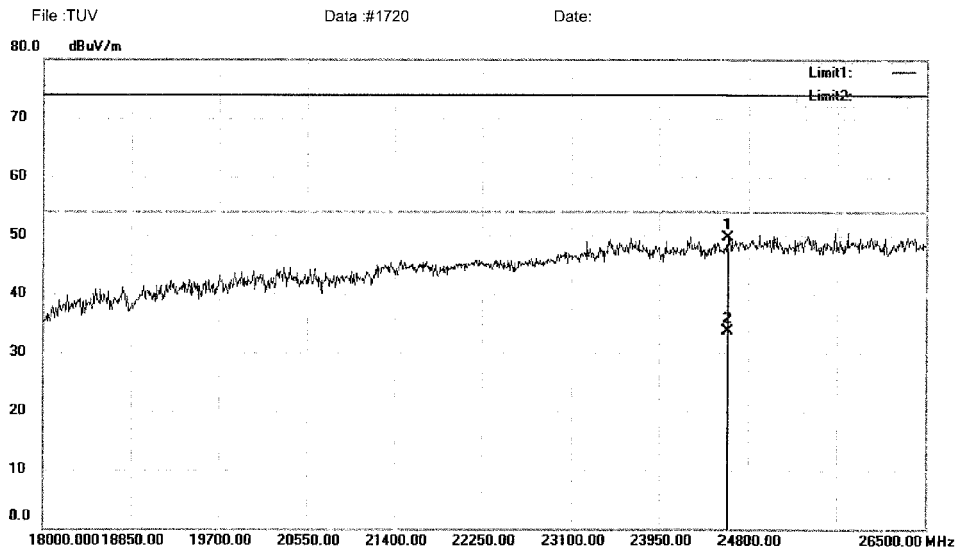
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1719

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		24596.00	86.76	-37.06	49.70	74.00	-24.30	peak	0	
2	*	24596.00	70.72	-37.06	33.66	54.00	-20.34	AVG	0	

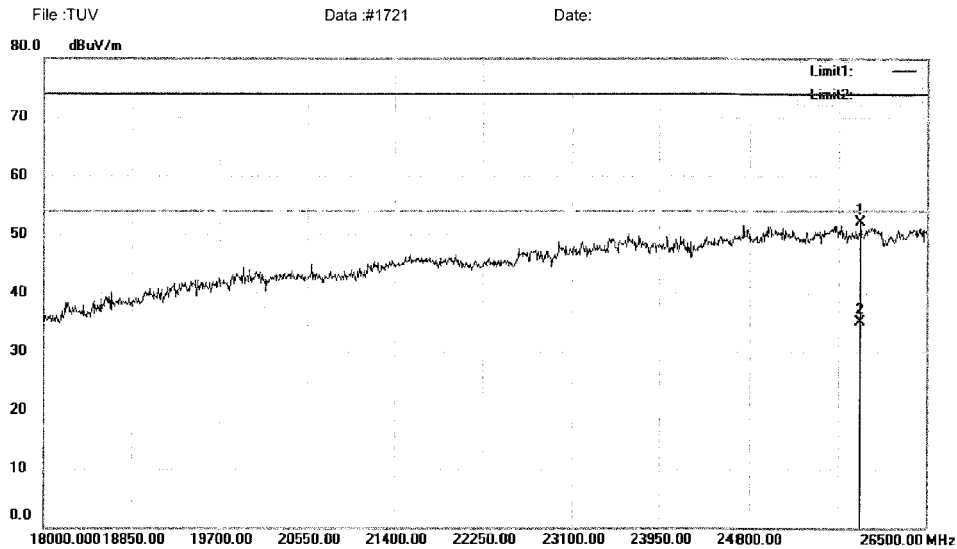
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1720

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25862.50	87.97	-35.96	52.01	74.00	-21.99	peak	0	
2	*	25862.50	71.16	-35.96	35.20	54.00	-18.80	AVG	0	

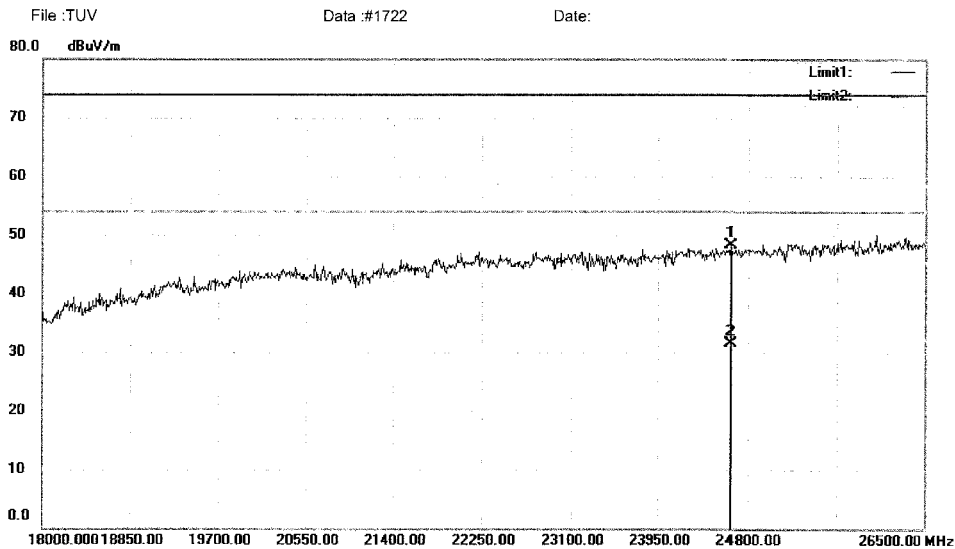
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1721

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24647.00	85.30	-37.05	48.25	74.00	-25.75	peak		0
2	*	24647.00	68.65	-37.05	31.60	54.00	-22.40	AVG		0

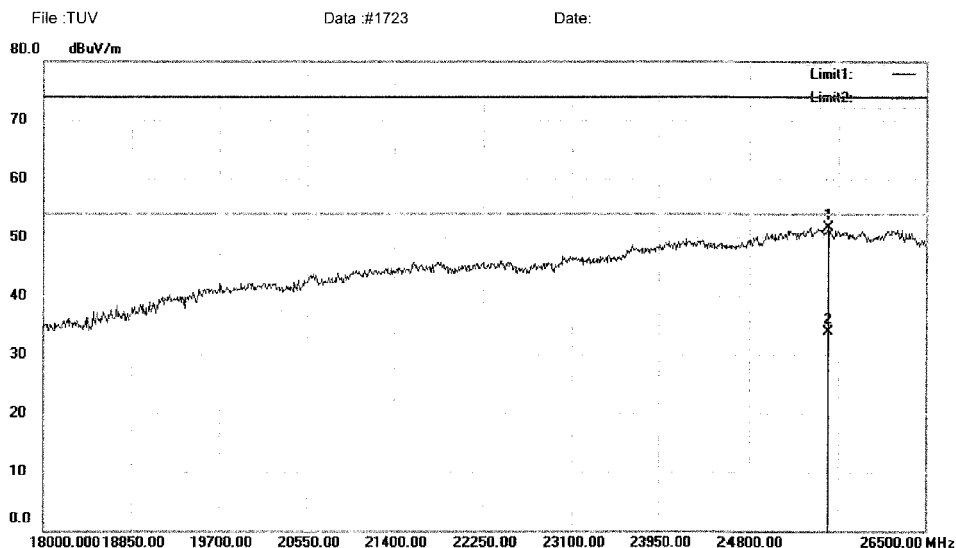
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1722

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25556.50	88.00	-36.33	51.67	74.00	-22.33	peak		0
2	*	25556.50	70.23	-36.33	33.90	54.00	-20.10	AVG		0

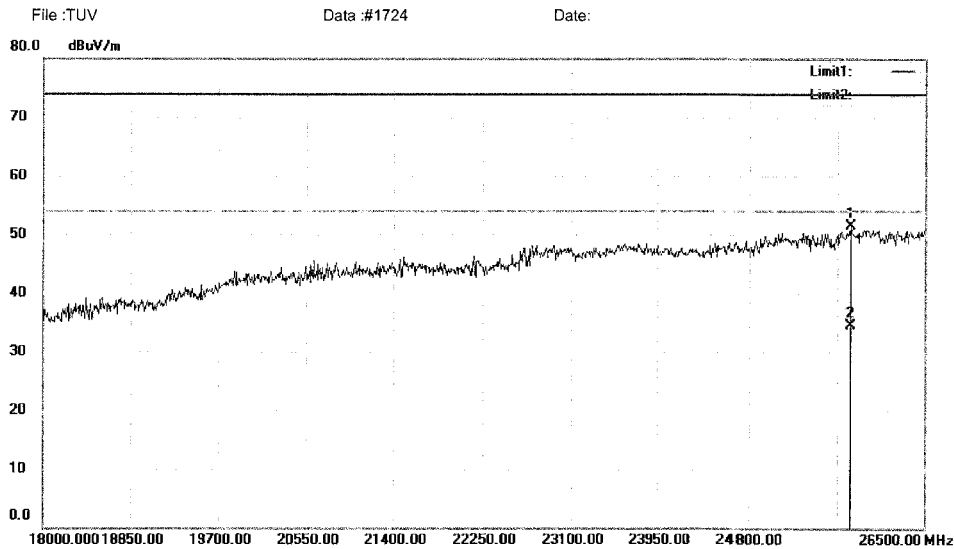
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1723

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25777.50	87.58	-36.06	51.52	74.00	-22.48	peak		0
2	*	25777.50	70.66	-36.06	34.60	54.00	-19.40	AVG		0

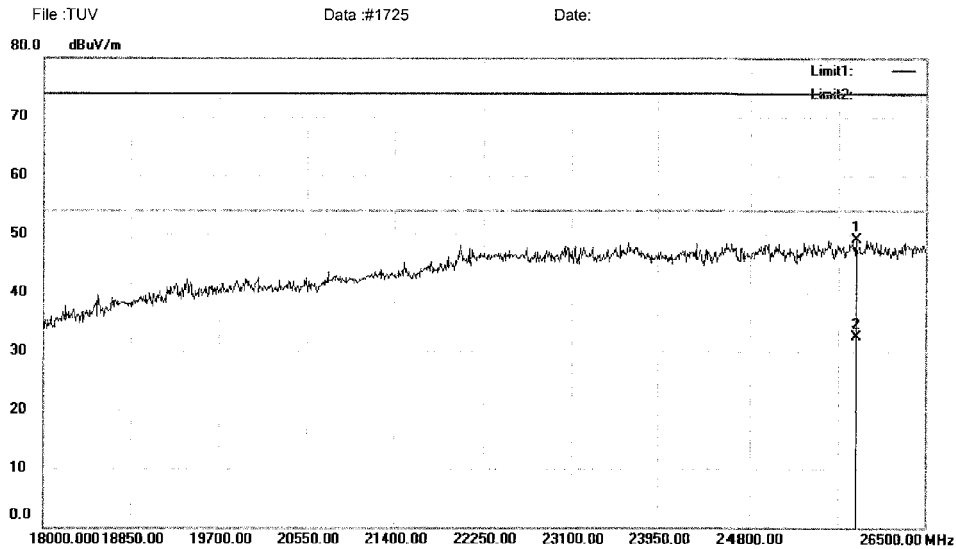
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1724

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25820.00	85.21	-36.01	49.20	74.00	-24.80	peak		0
2	*	25820.00	68.51	-36.01	32.50	54.00	-21.50	AVG		0

*:Maximum data x:Over limit !:over margin

Operator: KK

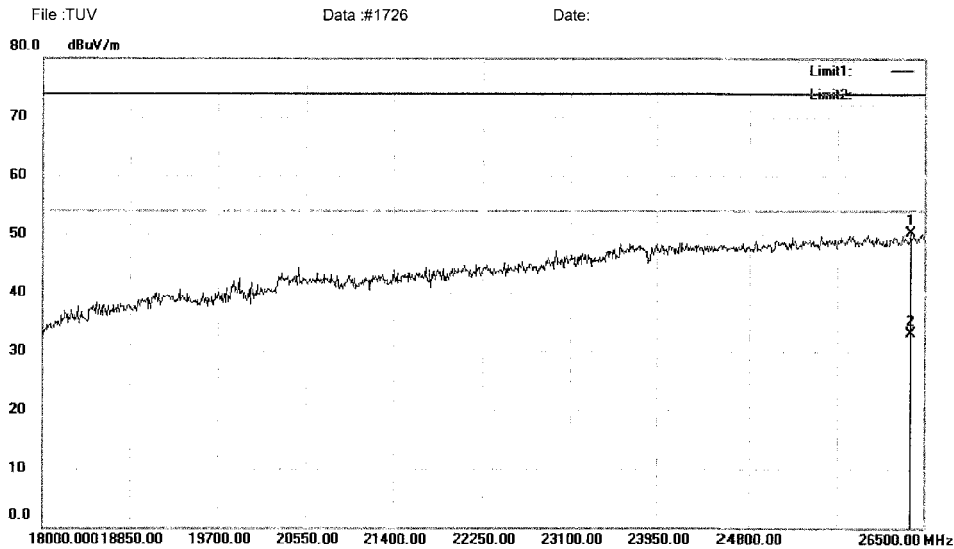
File :TUVData :#1725

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11a 5745
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26364.00	85.57	-35.35	50.22	74.00	-23.78	peak		0
2	*	26364.00	68.45	-35.35	33.10	54.00	-20.90	AVG		0

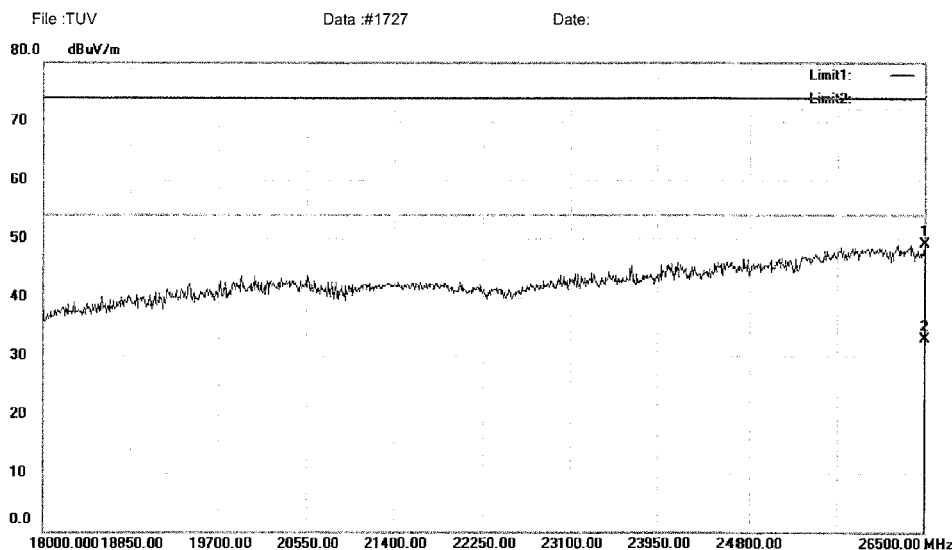
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1726

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26500.00	88.39	-39.34	49.05	74.00	-24.95	peak		0
2	*	26500.00	72.34	-39.34	33.00	54.00	-21.00	AVG		0

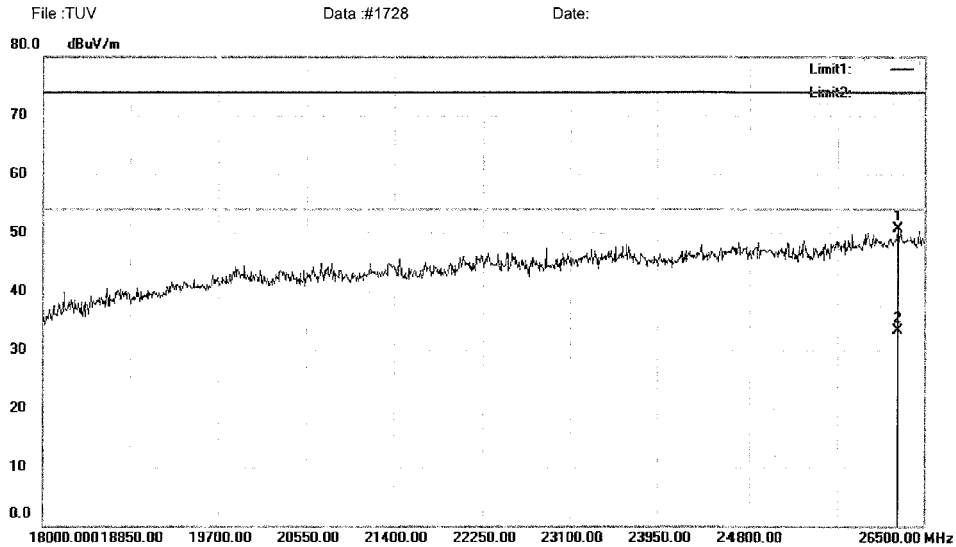
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1727

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26245.00	86.26	-35.49	50.77	74.00	-23.23	peak		0
2	*	26245.00	68.89	-35.49	33.40	54.00	-20.60	AVG		0

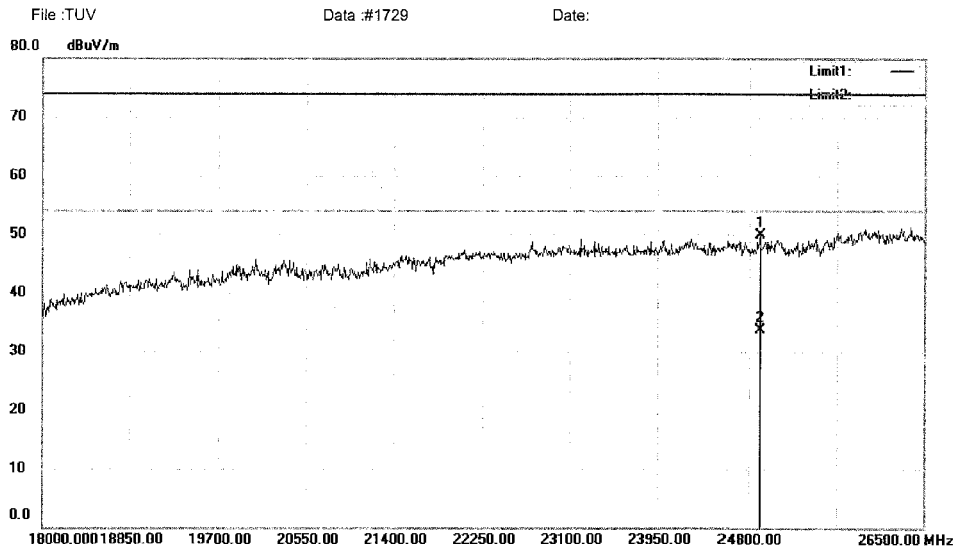
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1728

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24902.00	86.85	-37.02	49.83	74.00	-24.17	peak		0
2	*	24902.00	70.82	-37.02	33.80	54.00	-20.20	AVG		0

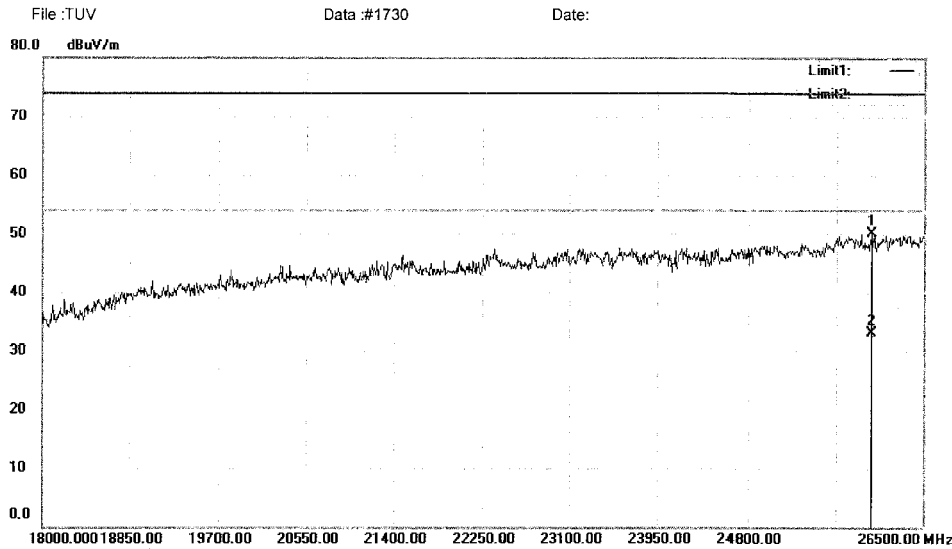
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1729

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25998.50	85.87	-35.79	50.08	74.00	-23.92	peak		0
2	*	25998.50	68.89	-35.79	33.10	54.00	-20.90	AVG		0

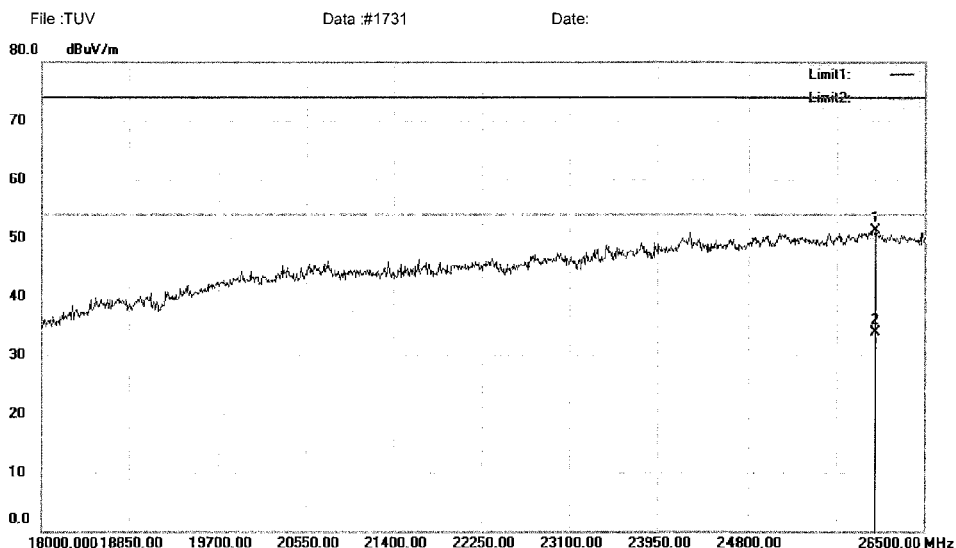
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1730

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26024.00	87.16	-35.76	51.40	74.00	-22.60	peak		0
2	*	26024.00	69.66	-35.76	33.90	54.00	-20.10	AVG		0

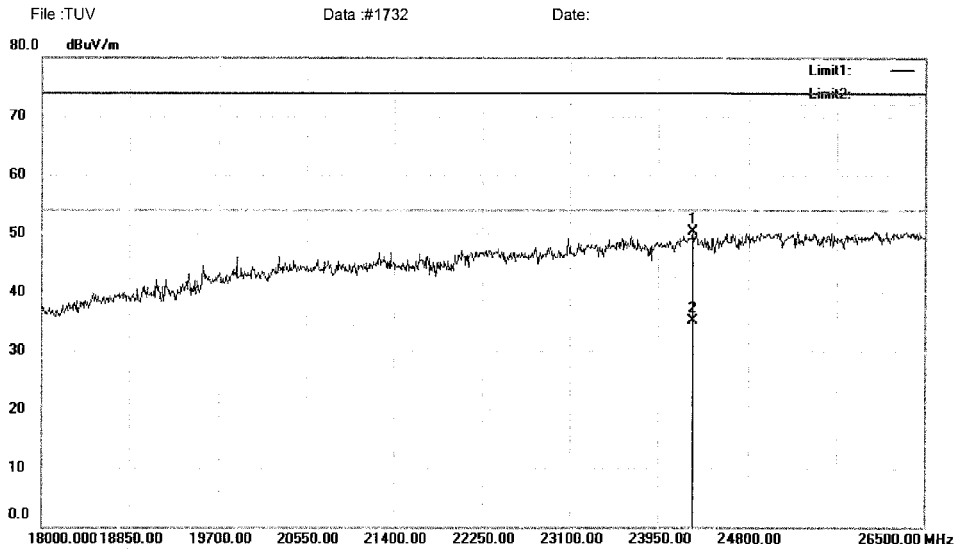
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1731

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24281.50	87.32	-37.10	50.22	74.00	-23.78	peak		0
2	*	24281.50	72.20	-37.10	35.10	54.00	-18.90	AVG		0

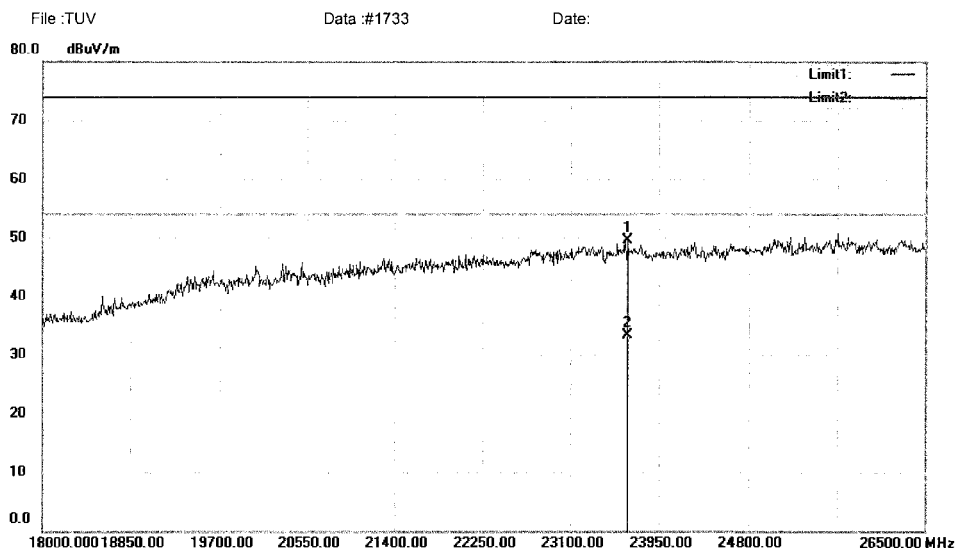
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1732

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23652.50	87.07	-37.49	49.58	74.00	-24.42	peak		0
2	*	23652.50	70.89	-37.49	33.40	54.00	-20.60	AVG		0

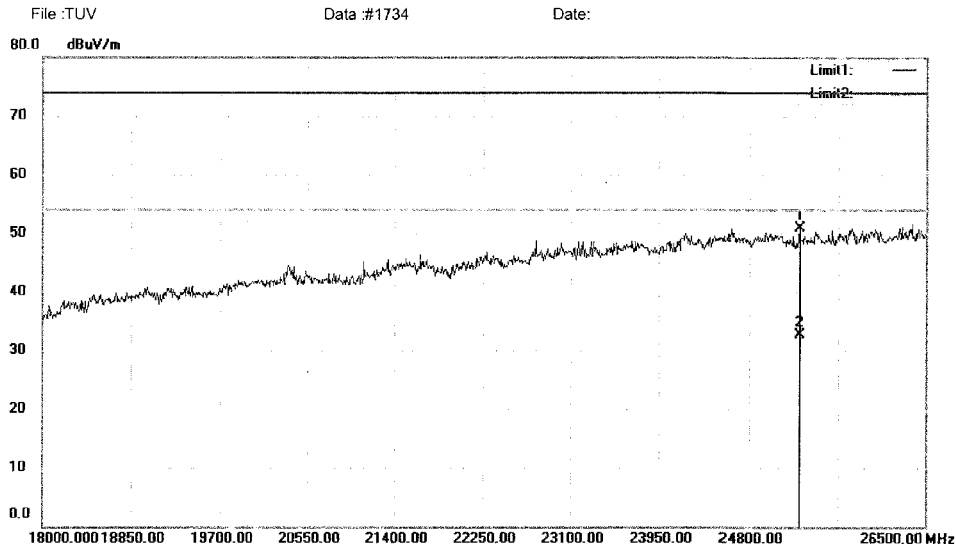
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1733

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25276.00	87.58	-36.67	50.91	74.00	-23.09	peak		0
2	*	25276.00	69.37	-36.67	32.70	54.00	-21.30	AVG		0

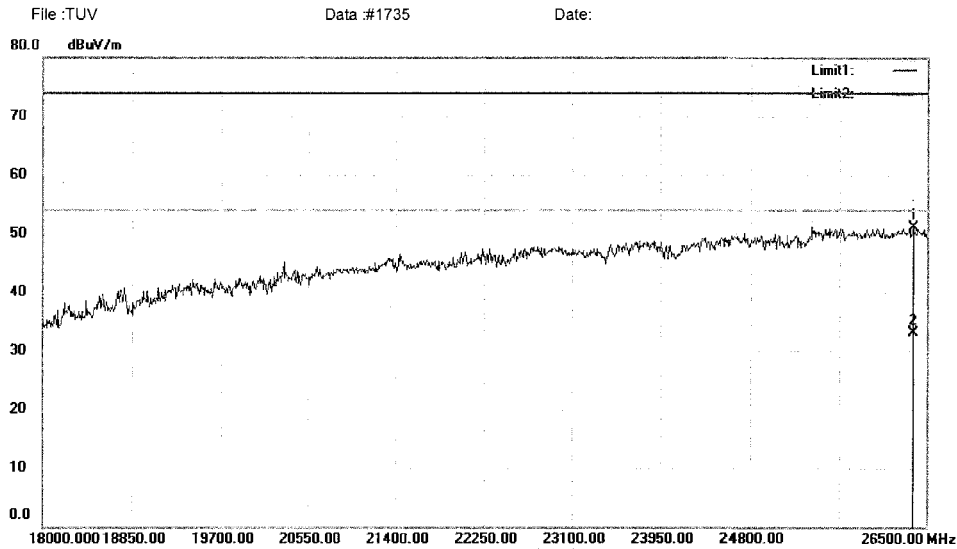
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1734

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26364.00	86.43	-35.35	51.08	74.00	-22.92	peak		0
2	*	26364.00	68.55	-35.35	33.20	54.00	-20.80	AVG		0

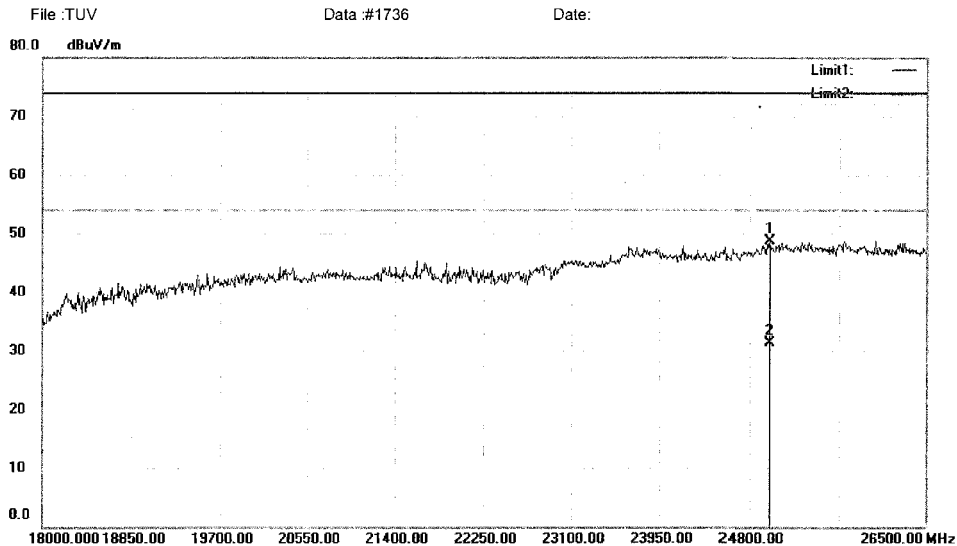
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1735

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24987.00	85.79	-37.01	48.78	74.00	-25.22	peak		0
2	*	24987.00	68.31	-37.01	31.30	54.00	-22.70	AVG		0

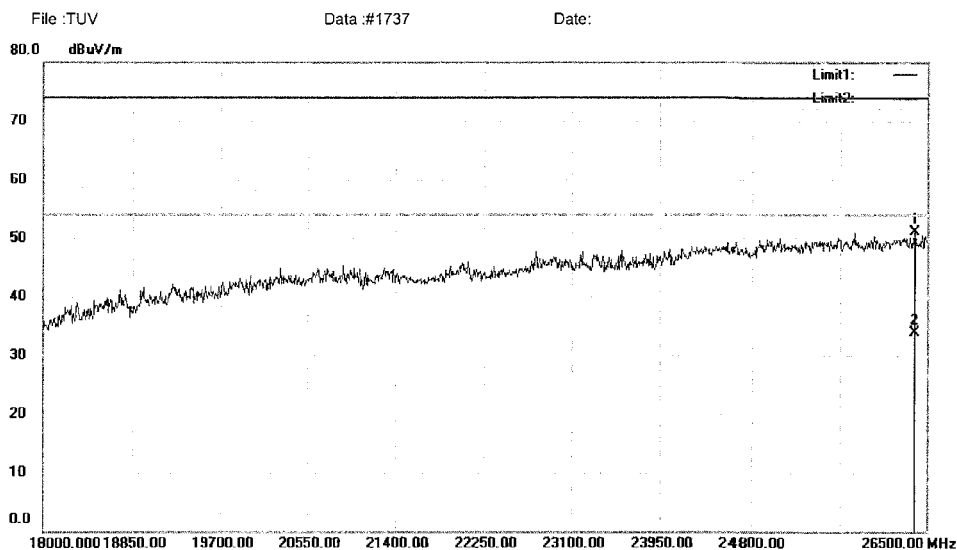
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1736

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26381.00	86.44	-35.33	51.11	74.00	-22.89	peak		0
2	*	26381.00	69.23	-35.33	33.90	54.00	-20.10	AVG		0

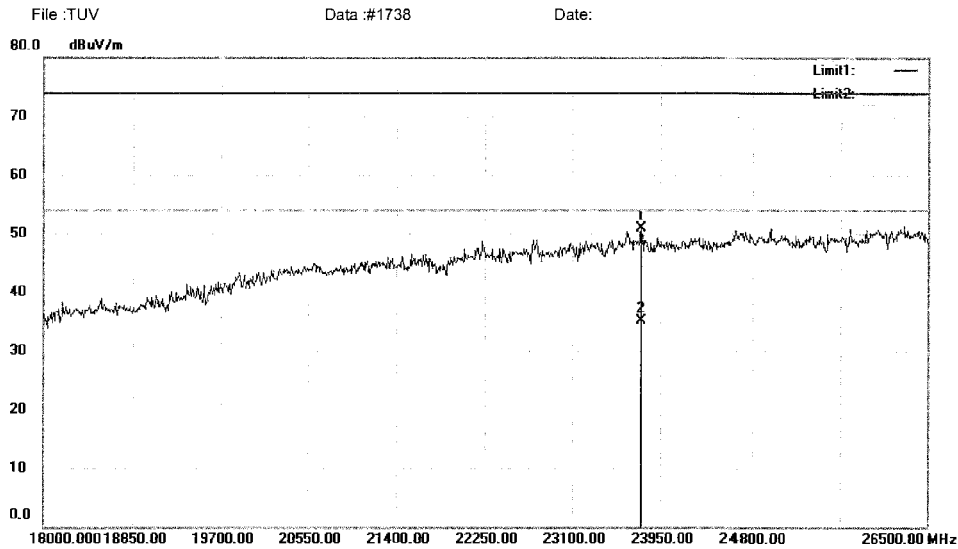
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1737

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23763.00	88.29	-37.38	50.91	74.00	-23.09	peak		0
2	*	23763.00	72.58	-37.38	35.20	54.00	-18.80	AVG		0

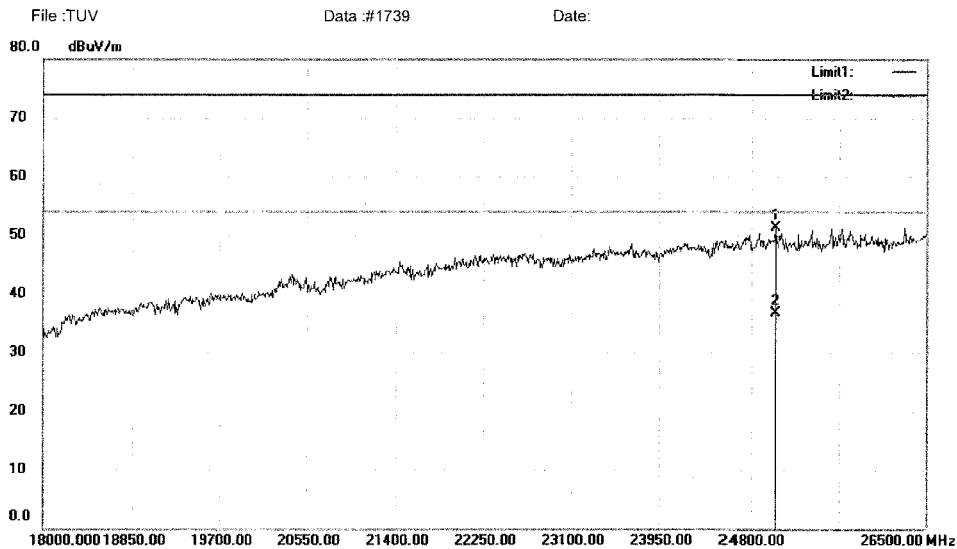
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1738

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5785
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25029.50	88.20	-36.97	51.23	74.00	-22.77	peak	0	
2	*	25029.50	73.67	-36.97	36.70	54.00	-17.30	AVG	0	

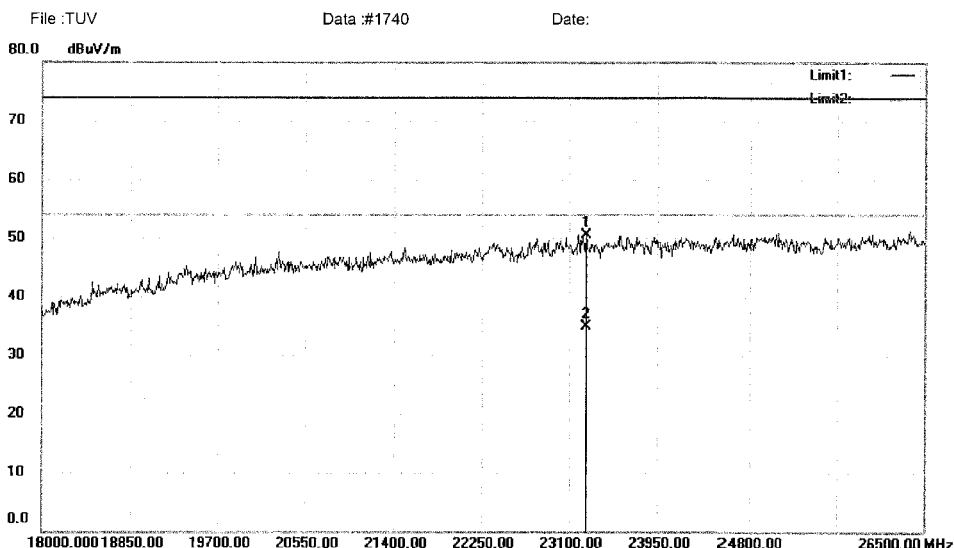
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1739

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23261.50	88.51	-37.91	50.60	74.00	-23.40	peak		0
2	*	23261.50	72.81	-37.91	34.90	54.00	-19.10	AVG		0

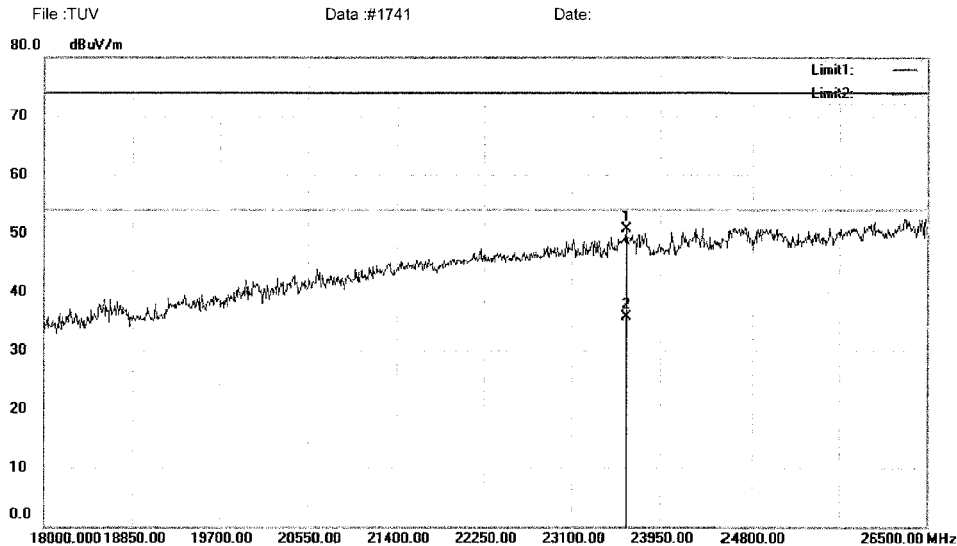
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1740

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		23627.00	88.19	-37.52	50.67	74.00	-23.33	peak	0
2	*	23627.00	73.32	-37.52	35.80	54.00	-18.20	AVG	0

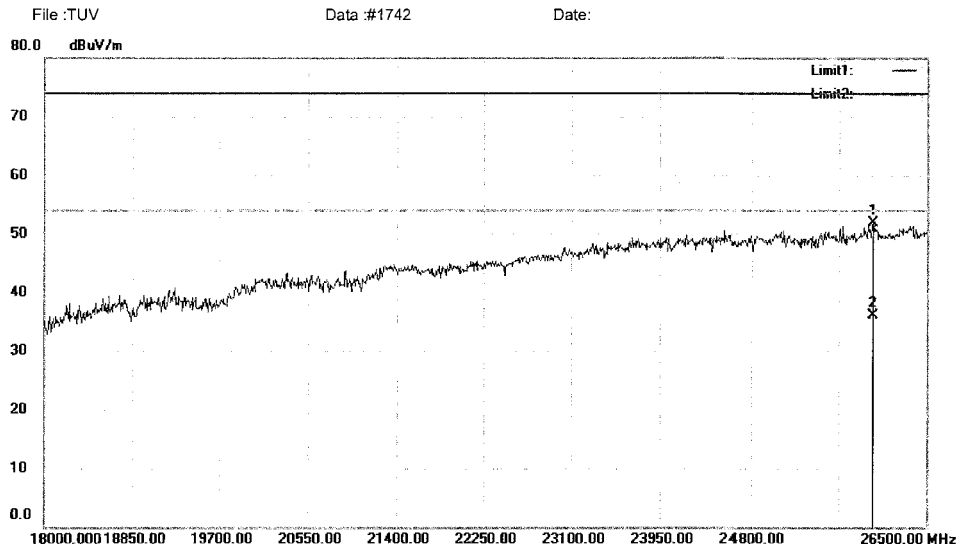
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1741

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25981.50	87.68	-35.81	51.87	74.00	-22.13	peak		0
2	*	25981.50	71.91	-35.81	36.10	54.00	-17.90	AVG		0

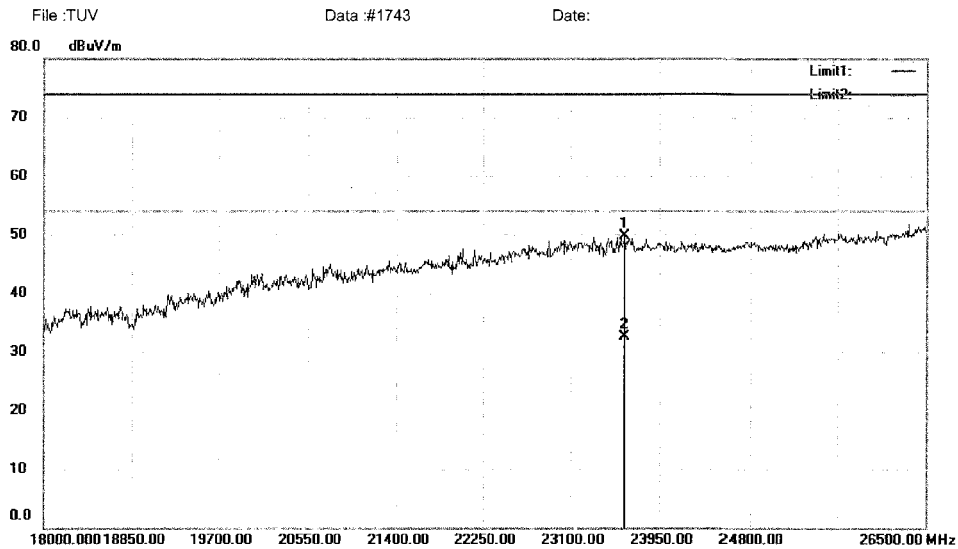
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1742

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23618.50	87.14	-37.53	49.61	74.00	-24.39	peak		0
2	*	23618.50	70.03	-37.53	32.50	54.00	-21.50	AVG		0

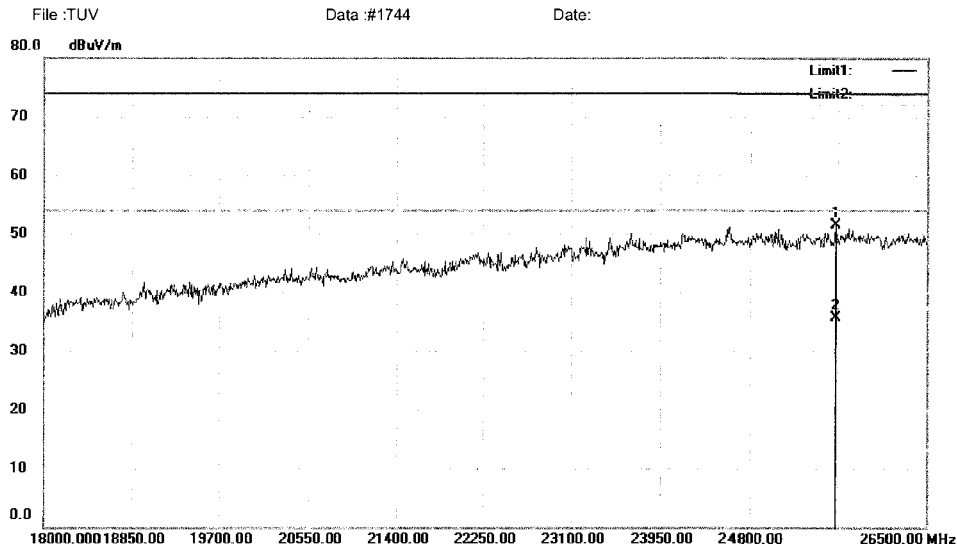
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1743

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25633.00	87.82	-36.24	51.58	74.00	-22.42	peak		0
2	*	25633.00	72.04	-36.24	35.80	54.00	-18.20	AVG		0

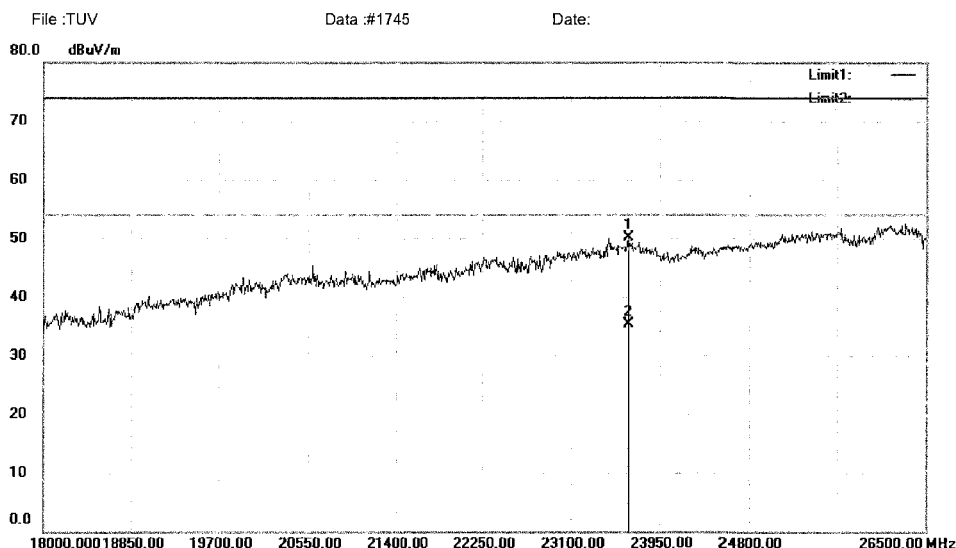
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1744

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23644.00	87.54	-37.50	50.04	74.00	-23.96	peak		0
2	*	23644.00	72.90	-37.50	35.40	54.00	-18.60	AVG		0

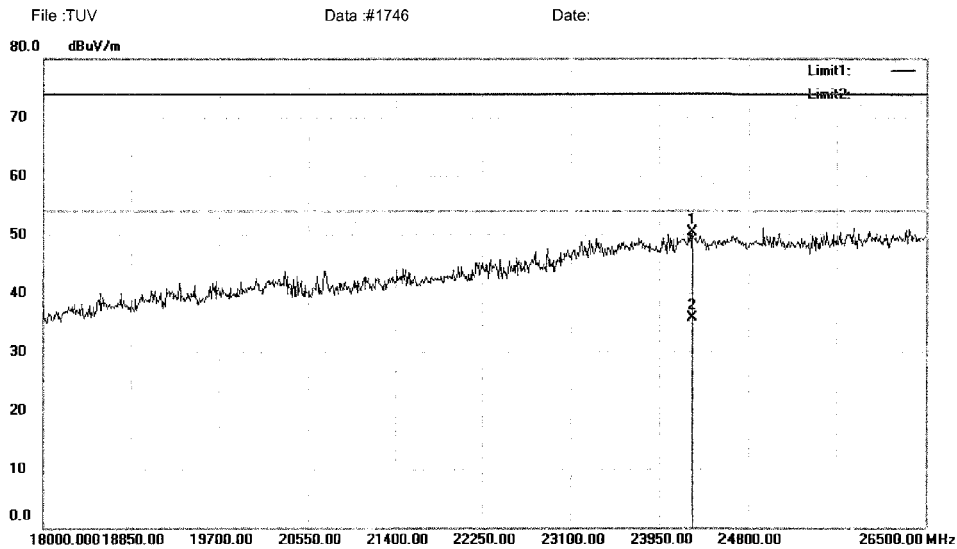
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1745

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24273.00	87.46	-37.10	50.36	74.00	-23.64	peak		0
2	*	24273.00	72.90	-37.10	35.80	54.00	-18.20	AVG		0

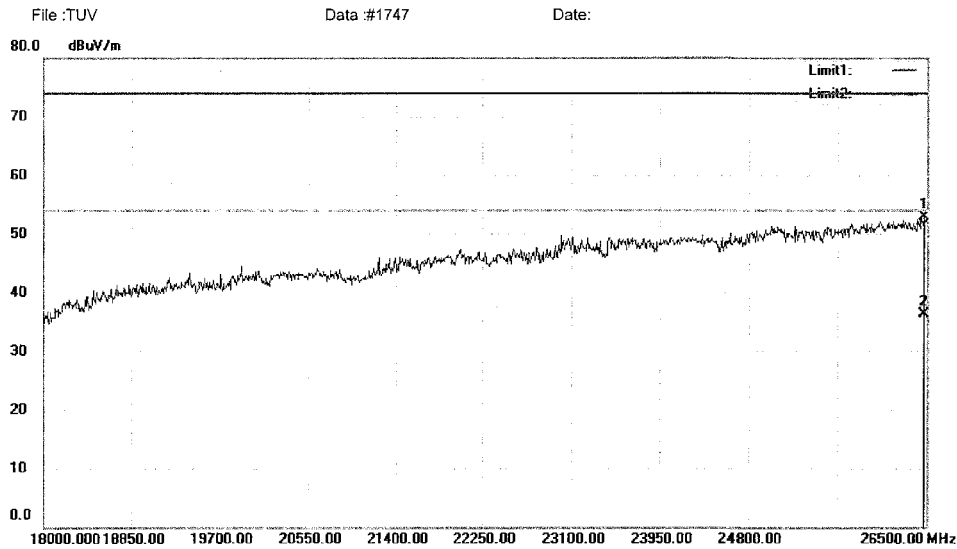
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1746

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26474.50	88.16	-35.21	52.95	74.00	-21.05	peak		0
2	*	26474.50	71.61	-35.21	36.40	54.00	-17.60	AVG		0

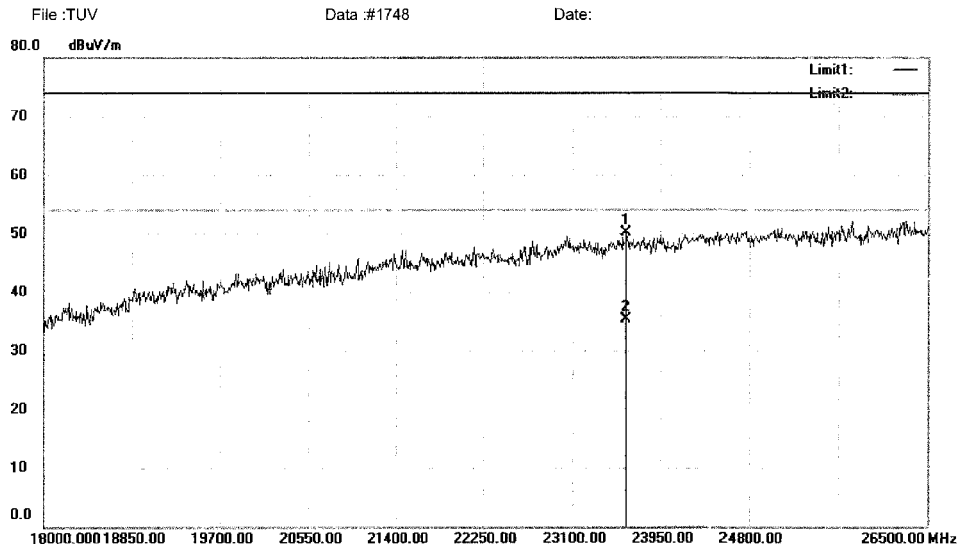
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1747

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23618.50	87.71	-37.53	50.18	74.00	-23.82	peak		0
2	*	23618.50	72.93	-37.53	35.40	54.00	-18.60	AVG		0

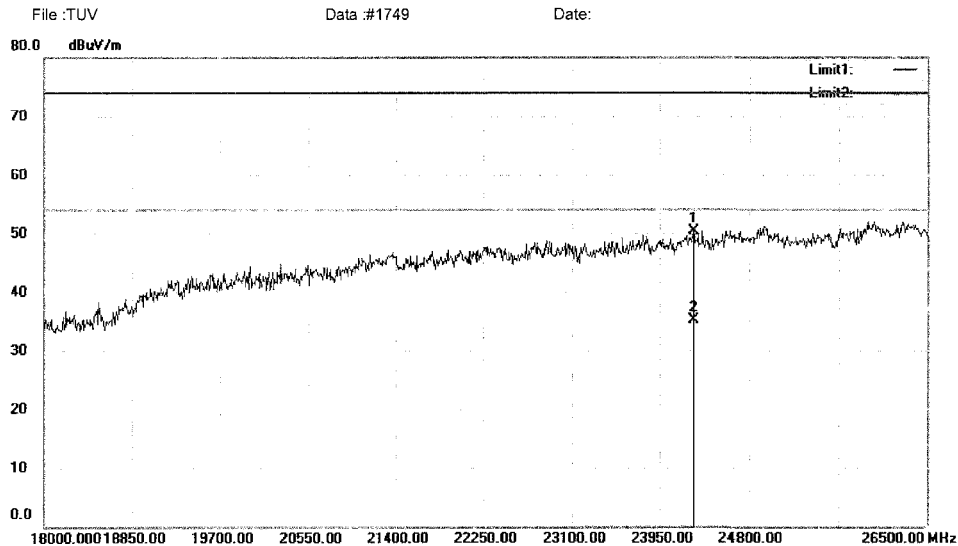
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1748

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24281.50	87.43	-37.10	50.33	74.00	-23.67	peak		0
2	*	24281.50	72.30	-37.10	35.20	54.00	-18.80	AVG		0

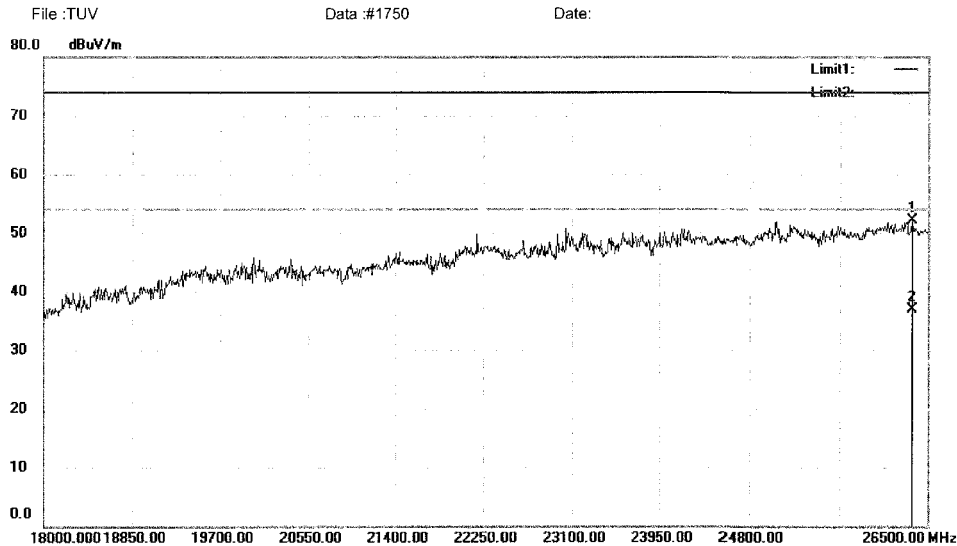
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1749

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26347.00	87.46	-35.37	52.09	74.00	-21.91	peak		0
2	*	26347.00	72.27	-35.37	36.90	54.00	-17.10	AVG		0

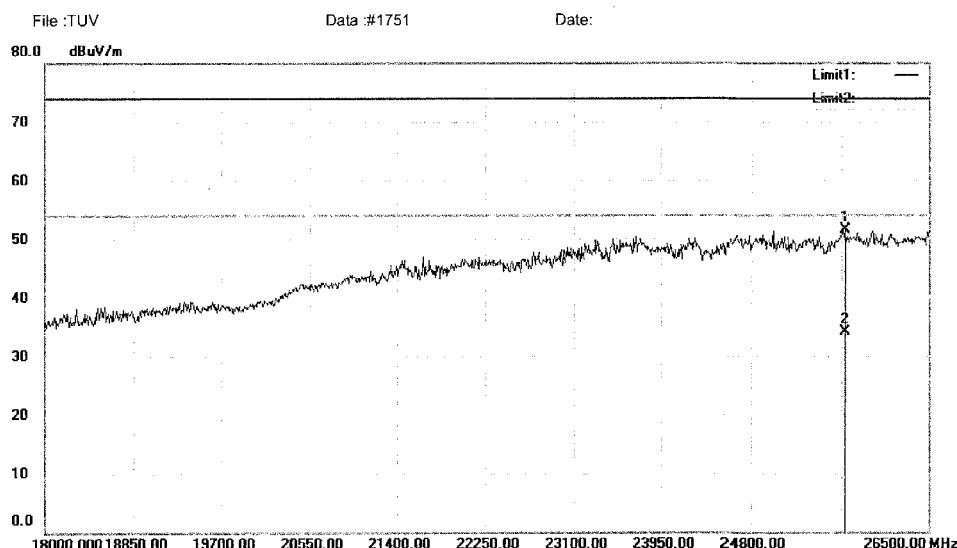
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1750

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5180
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		25684.00	87.76	-36.18	51.58	74.00	-22.42	peak	0	
2	*	25684.00	70.38	-36.18	34.20	54.00	-19.80	AVG	0	

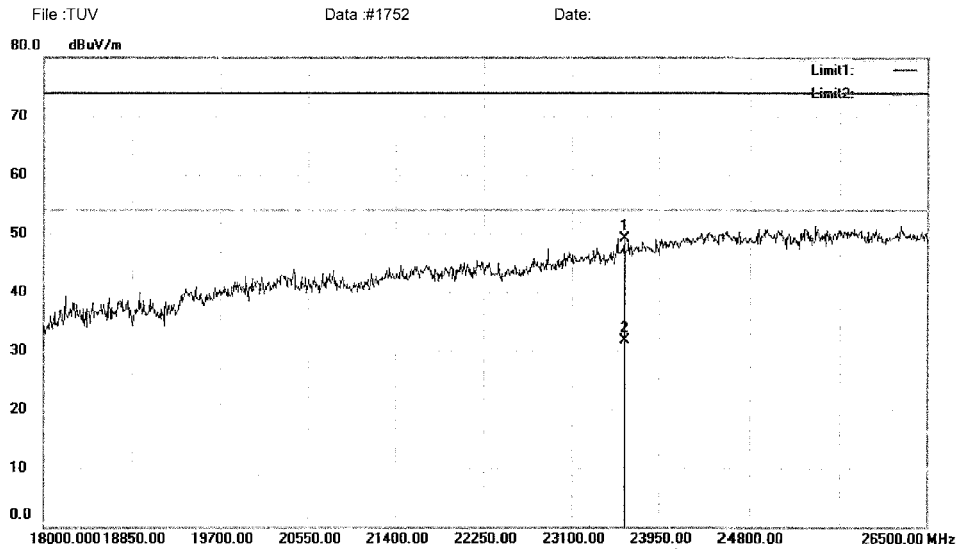
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1751

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		23610.00	86.60	-37.54	49.06	74.00	-24.94	peak		0	
2	*	23610.00	69.34	-37.54	31.80	54.00	-22.20	AVG		0	

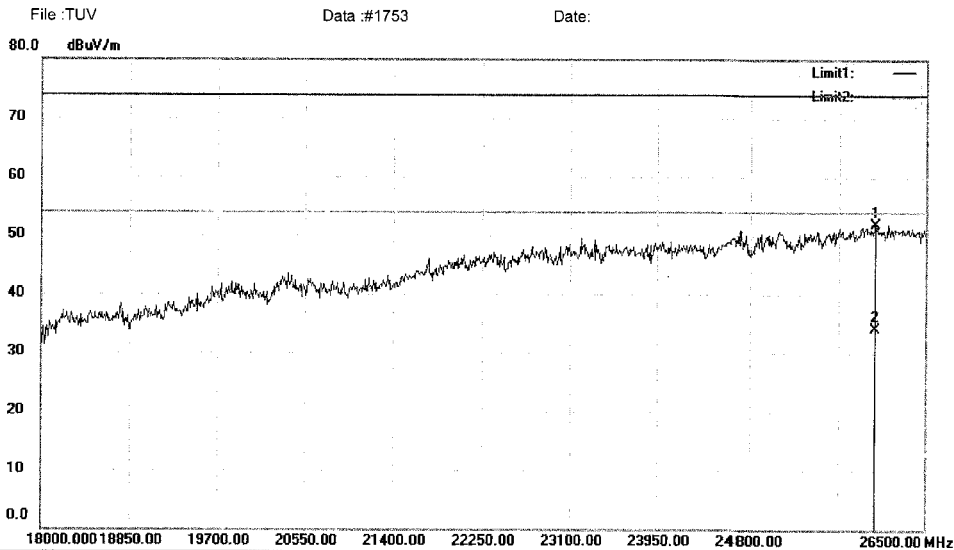
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1752

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26007.00	87.78	-35.78	52.00	74.00	-22.00	peak		0
2	*	26007.00	69.98	-35.78	34.20	54.00	-19.80	AVG		0

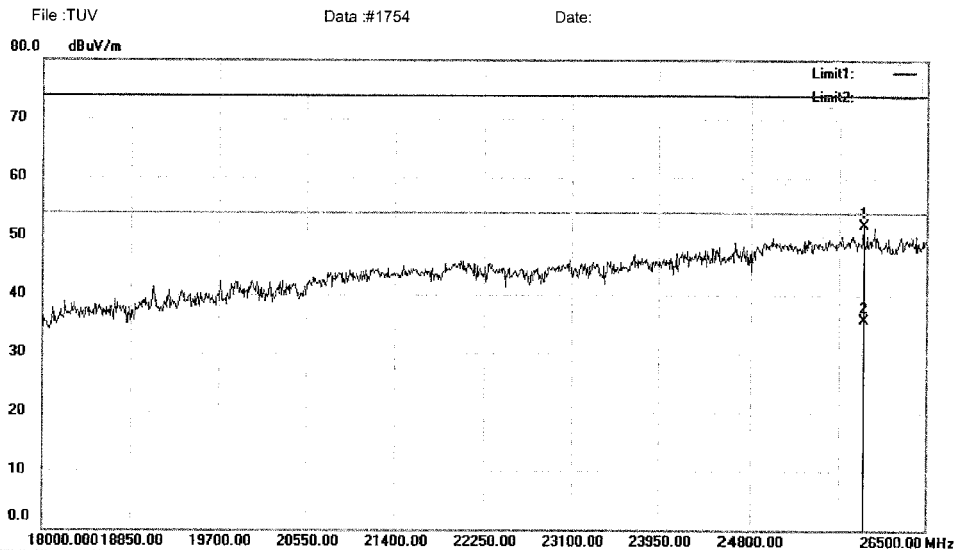
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1753

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25888.00	87.92	-35.93	51.99	74.00	-22.01	peak		0
2	*	25888.00	71.73	-35.93	35.80	54.00	-18.20	AVG		0

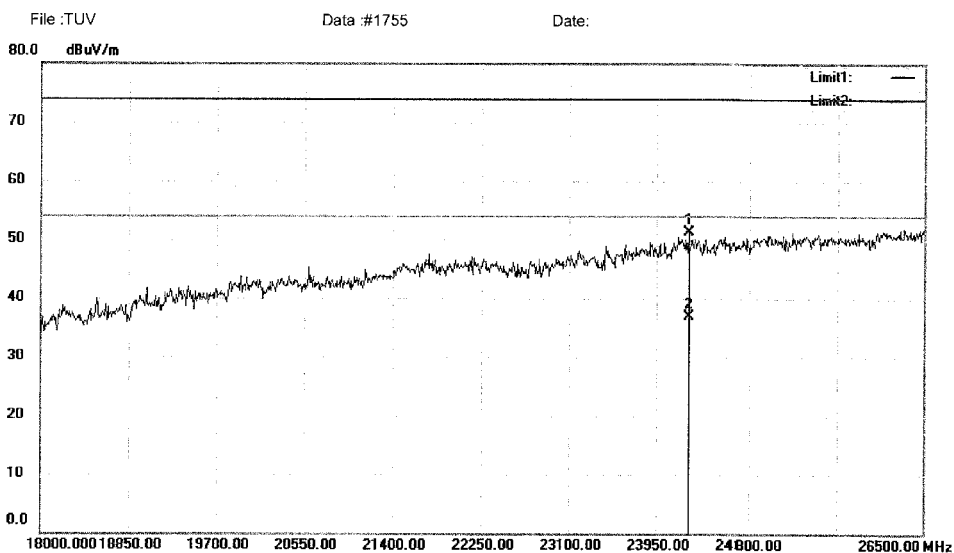
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1754

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		24256.00	88.37	-37.10	51.27	74.00	-22.73	peak		0
2	*	24256.00	74.00	-37.10	36.90	54.00	-17.10	AVG		0

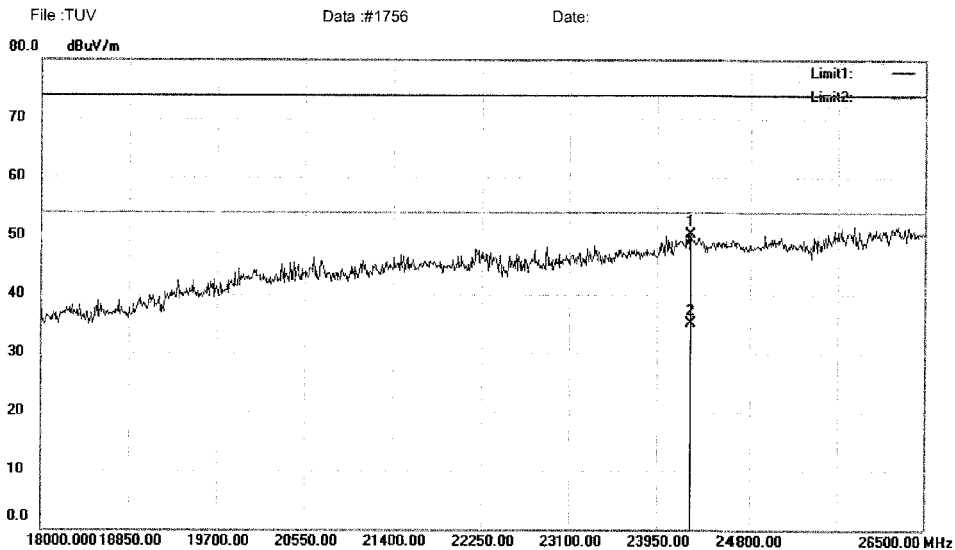
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1755

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24273.00	87.46	-37.10	50.36	74.00	-23.64	peak		0
2	*	24273.00	72.30	-37.10	35.20	54.00	-18.80	AVG		0

*:Maximum data x:Over limit l:over margin

Operator: KK

File: TUV\Data: #1756

Page: 1

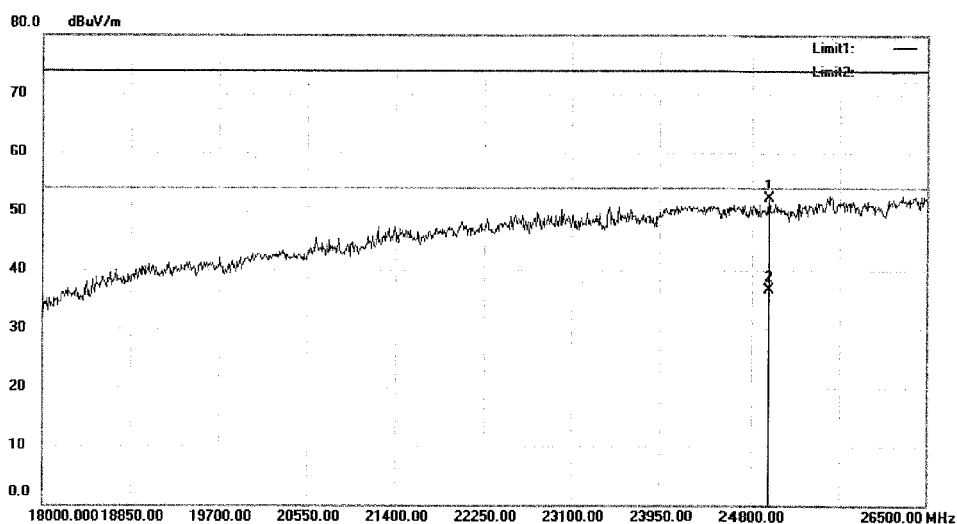
Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File :TUV

Data :#1757

Date:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(20MHz) 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24961.50	89.24	-37.01	52.23	74.00	-21.77	peak		0
2	*	24961.50	73.71	-37.01	36.70	54.00	-17.30	AVG		0

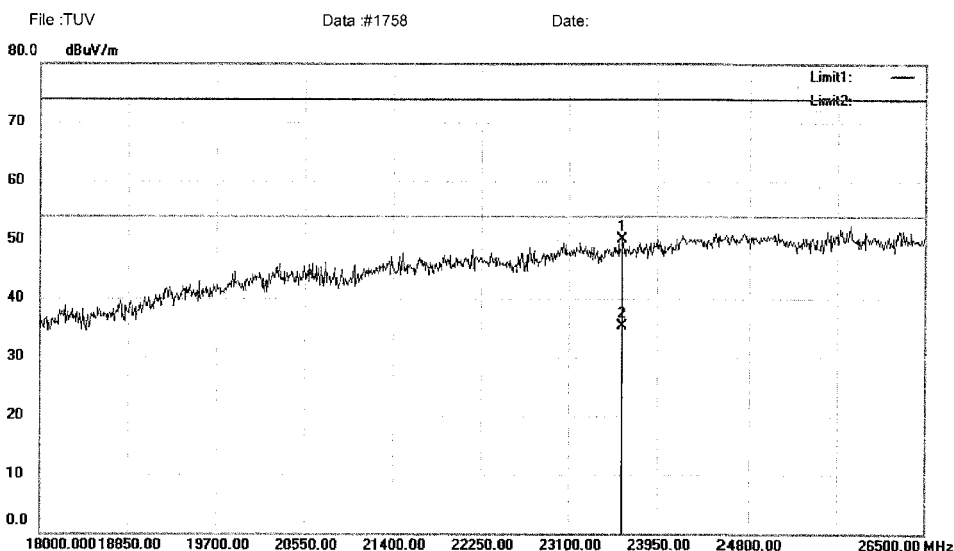
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1757

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23618.50	87.71	-37.53	50.18	74.00	-23.82	peak		0
2	*	23618.50	72.93	-37.53	35.40	54.00	-18.60	AVG		0

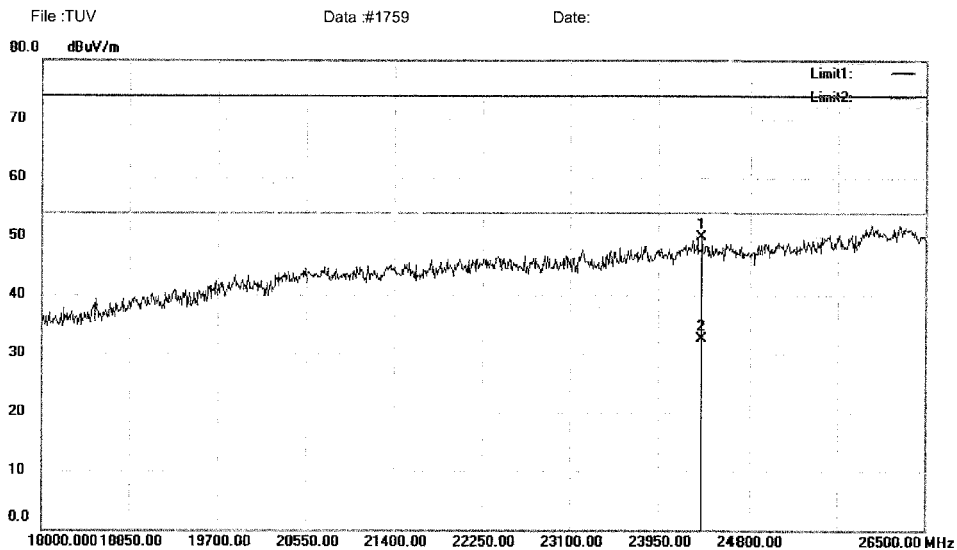
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data #1758

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5785
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		24366.50	86.90	-37.09	49.81	74.00	-24.19	peak	0	
2	*	24366.50	69.59	-37.09	32.50	54.00	-21.50	AVG	0	

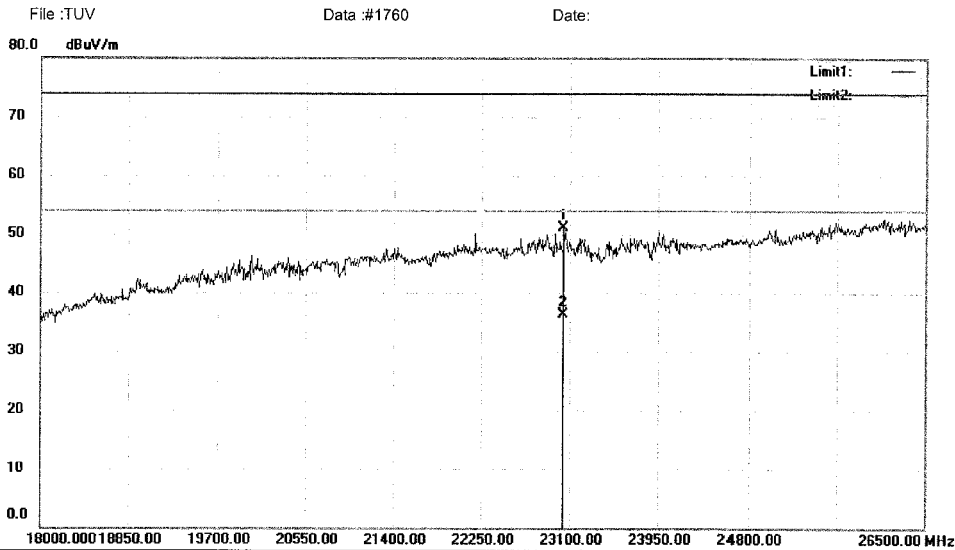
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1759

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23040.50	89.25	-38.14	51.11	74.00	-22.89	peak		0
2	*	23040.50	74.54	-38.14	36.40	54.00	-17.60	AVG		0

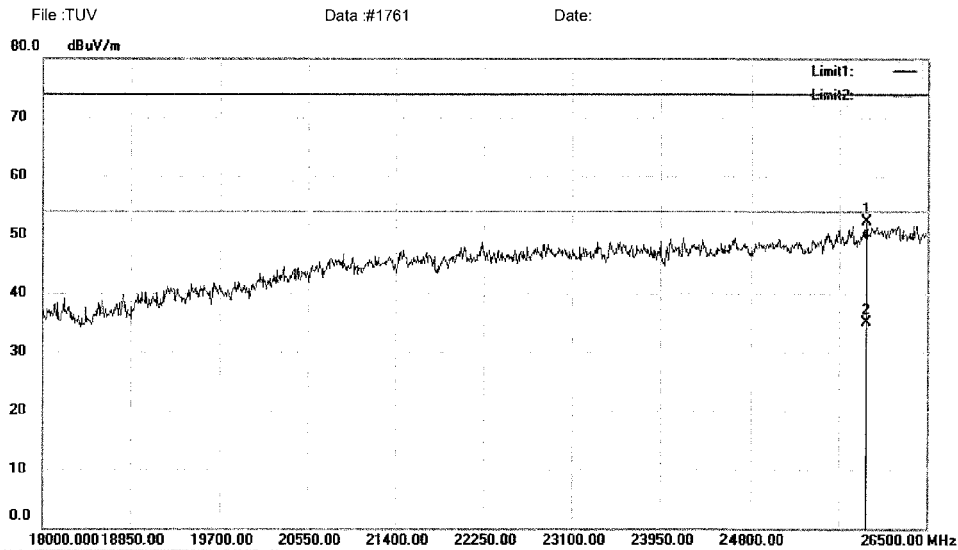
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1760

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25913.50	88.19	-35.90	52.29	74.00	-21.71	peak		0
2	*	25913.50	71.10	-35.90	35.20	54.00	-18.80	AVG		0

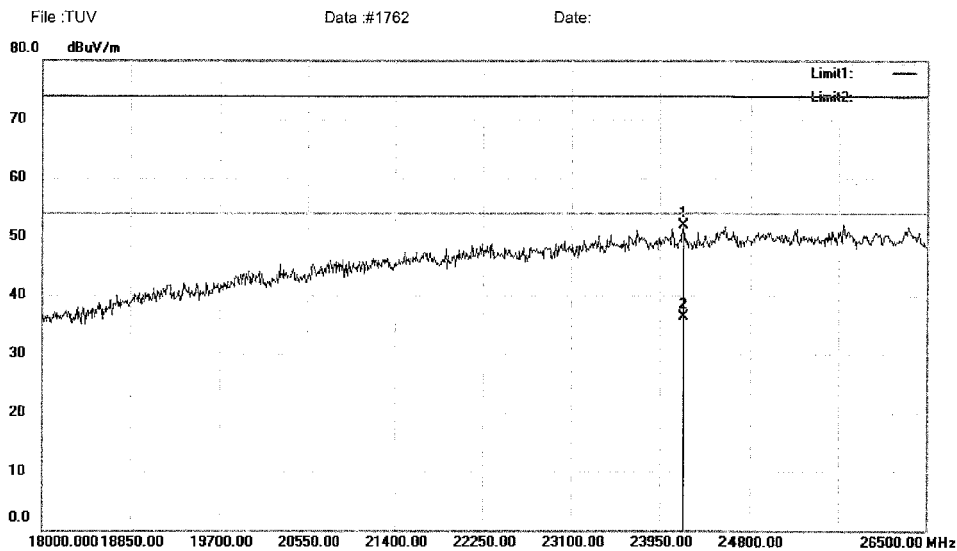
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData #1761

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		24179.50	88.96	-37.11	51.85	74.00	-22.15	peak	0	
2	*	24179.50	73.51	-37.11	36.40	54.00	-17.60	AVG	0	

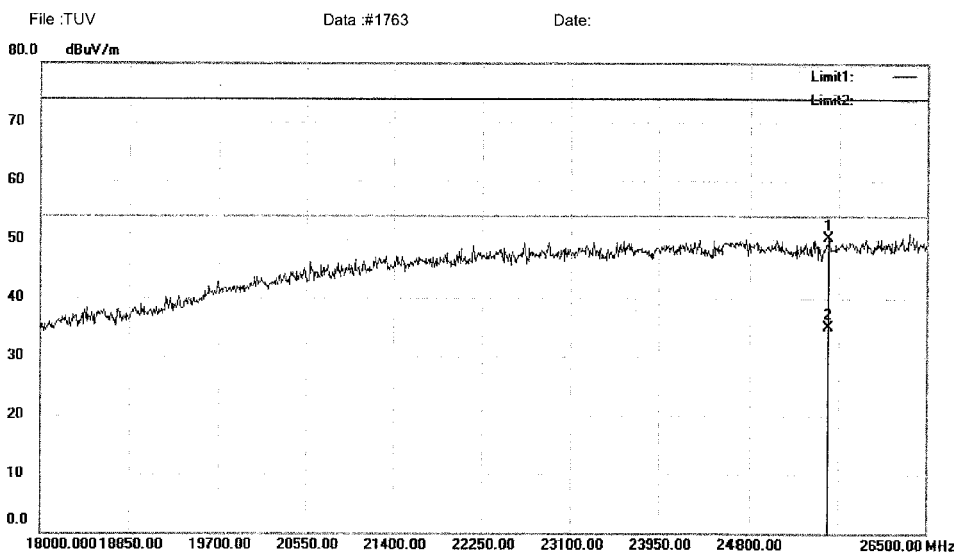
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1762

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25556.50	86.65	-36.33	50.32	74.00	-23.68	peak		0
2	*	25556.50	71.53	-36.33	35.20	54.00	-18.80	AVG		0

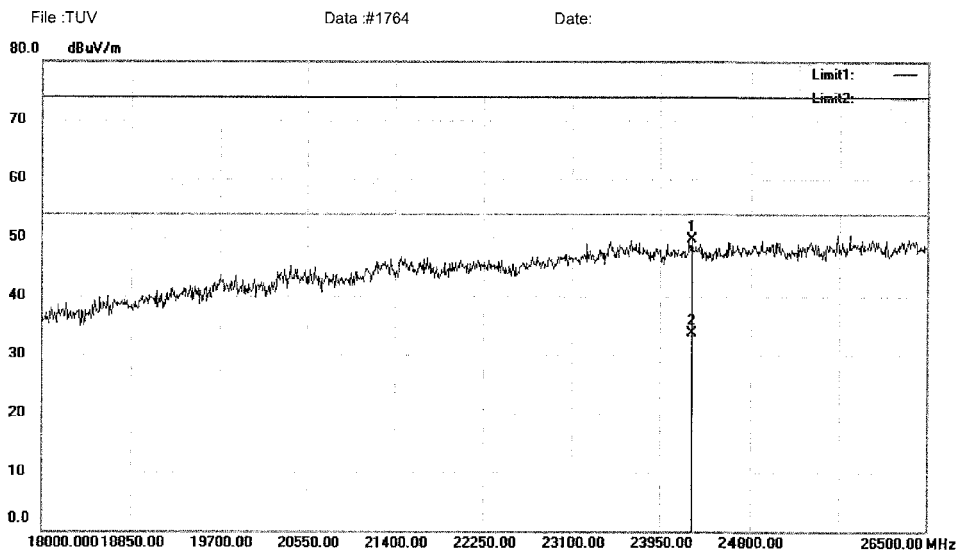
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1763

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24264.50	86.76	-37.10	49.66	74.00	-24.34	peak		0
2	*	24264.50	70.80	-37.10	33.70	54.00	-20.30	AVG		0

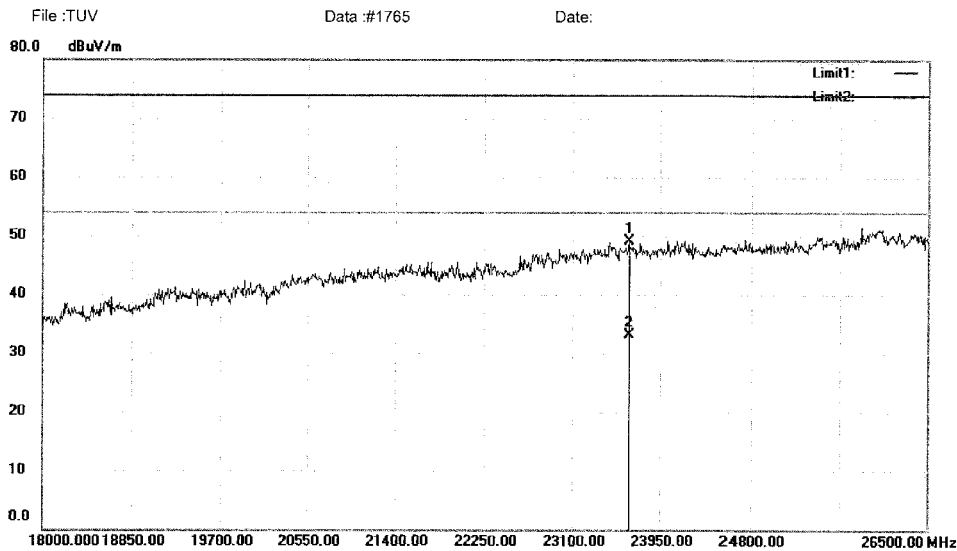
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1764

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		23644.00	86.54	-37.50	49.04	74.00	-24.96	peak	0	
2	*	23644.00	70.70	-37.50	33.20	54.00	-20.80	AVG	0	

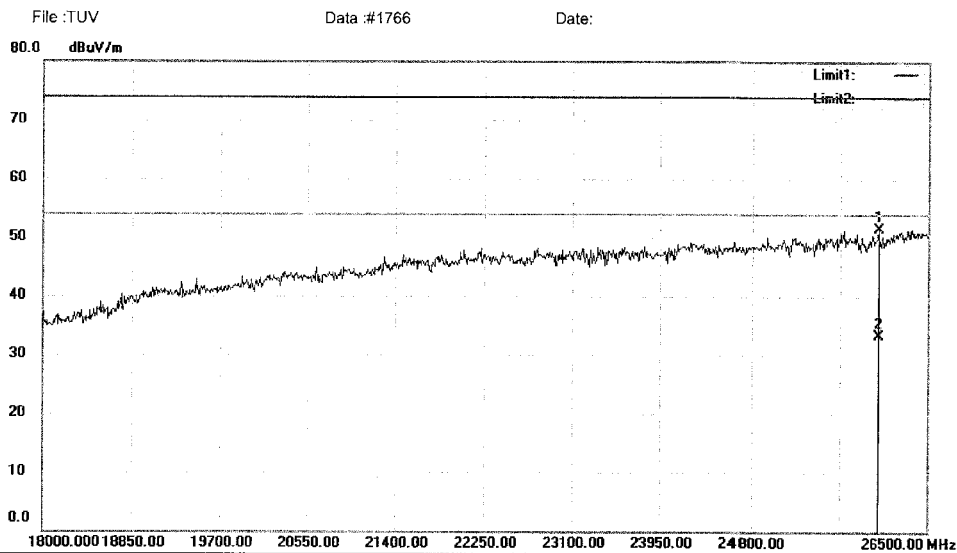
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1765

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		26024.00	87.28	-35.76	51.52	74.00	-22.48	peak		0
2	*	26024.00	69.16	-35.76	33.40	54.00	-20.60	AVG		0

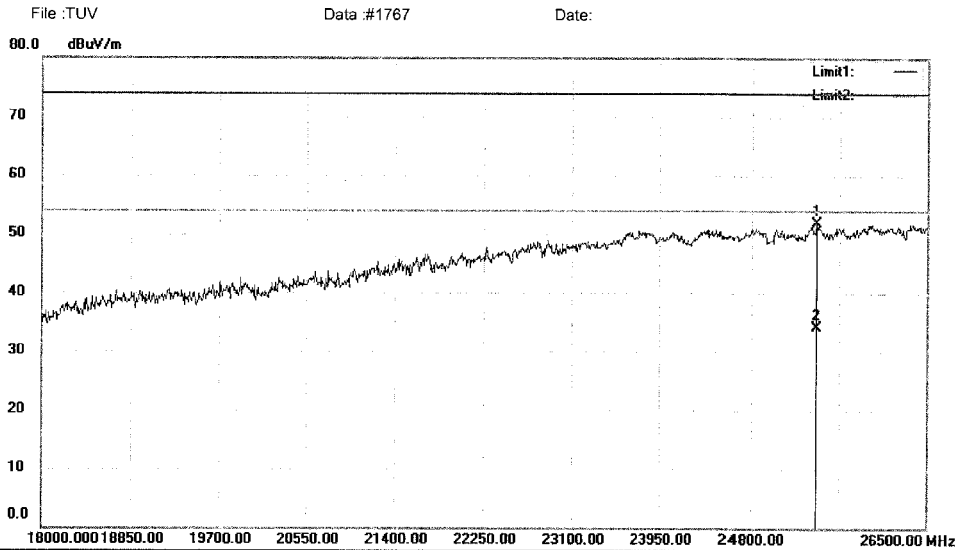
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1766

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5755
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25429.00	88.40	-36.49	51.91	74.00	-22.09	peak	0	
2	*	25429.00	70.69	-36.49	34.20	54.00	-19.80	AVG	0	

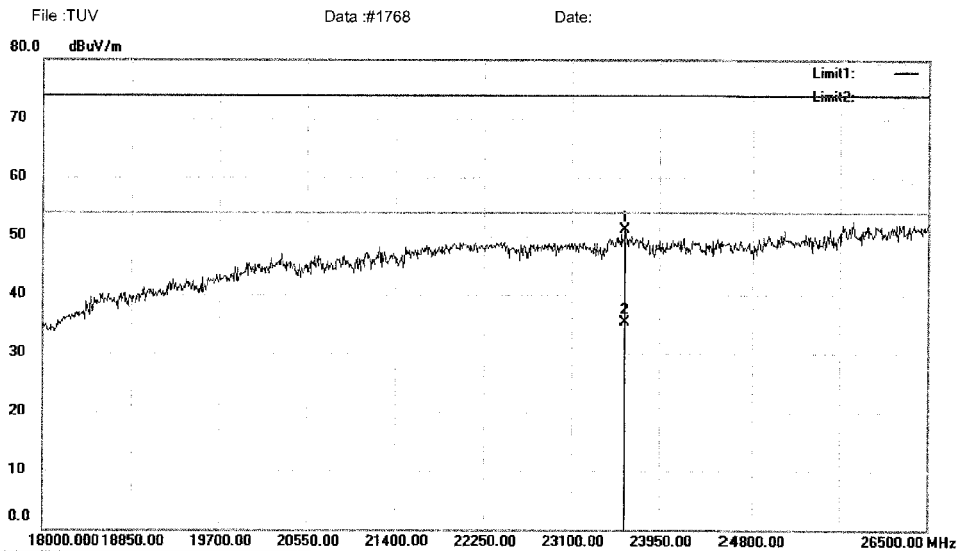
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1767

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5755
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		23618.50	88.71	-37.53	51.18	74.00	-22.82	peak	0	
2	*	23618.50	72.93	-37.53	35.40	54.00	-18.60	AVG	0	

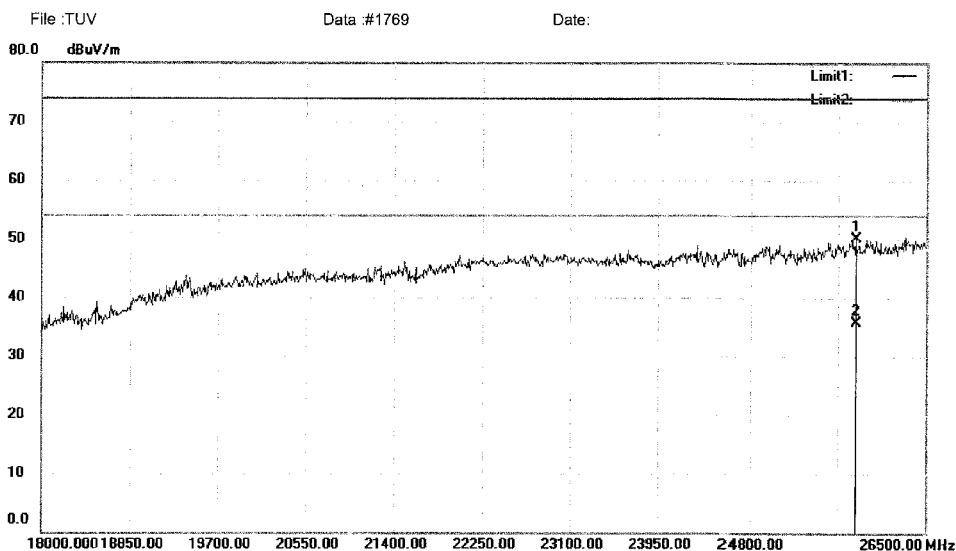
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1768

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25820.00	86.21	-36.01	50.20	74.00	-23.80	peak		0
2	*	25820.00	71.71	-36.01	35.70	54.00	-18.30	AVG		0

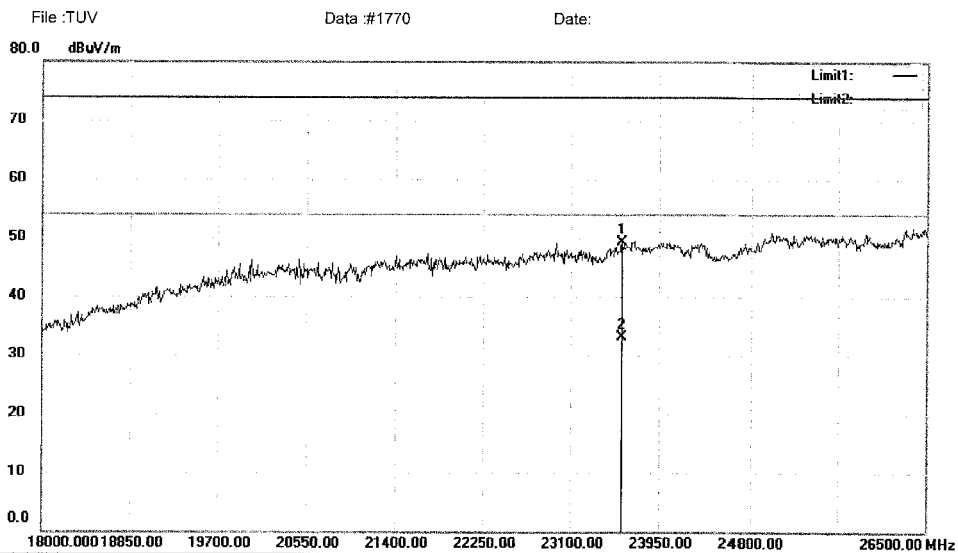
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1769

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23593.00	86.92	-37.56	49.36	74.00	-24.64	peak		0
2	*	23593.00	70.76	-37.56	33.20	54.00	-20.80	AVG		0

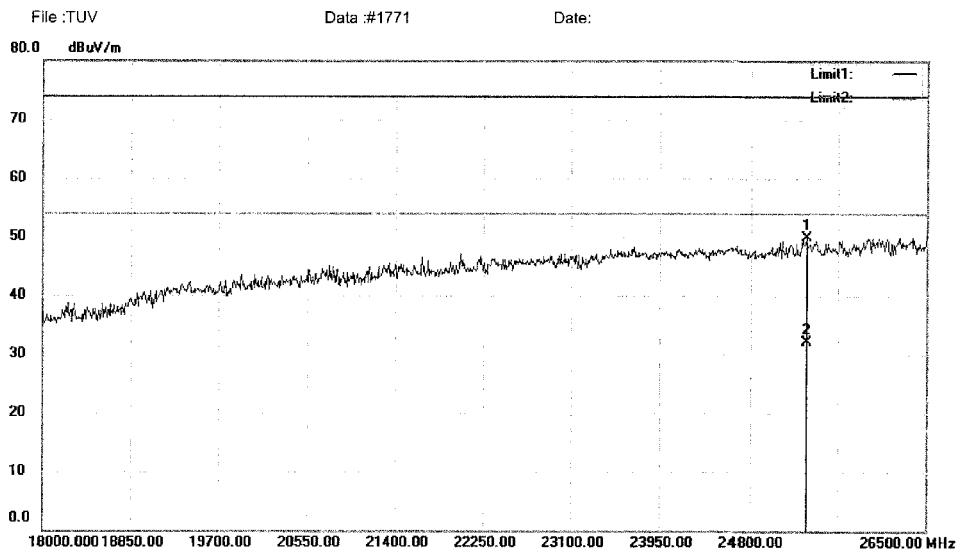
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data #1770

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		25344.00	86.54	-36.59	49.95	74.00	-24.05	peak	0	
2	*	25344.00	68.69	-36.59	32.10	54.00	-21.90	AVG	0	

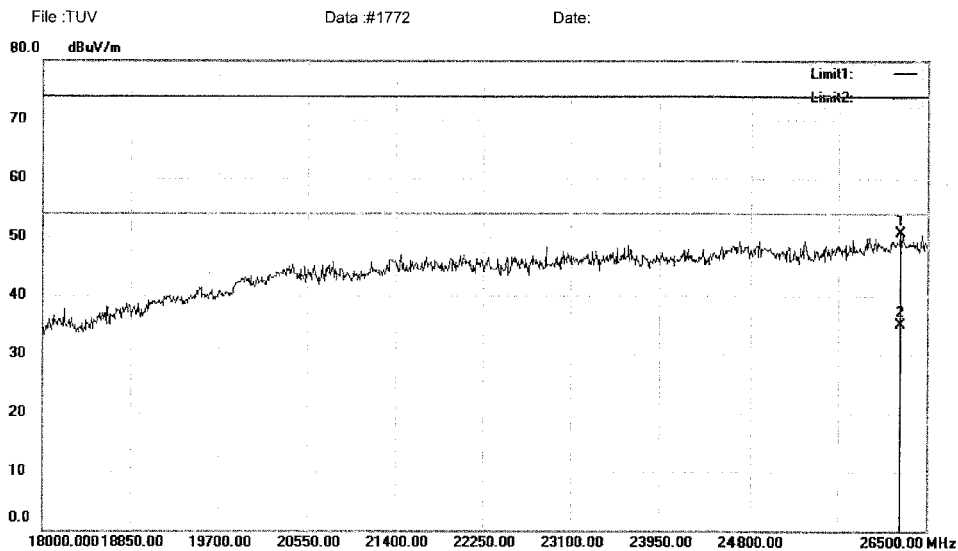
*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUV\Data :#1771

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		26245.00	86.26	-35.49	50.77	74.00	-23.23	peak	0	
2	*	26245.00	70.69	-35.49	35.20	54.00	-18.80	AVG	0	

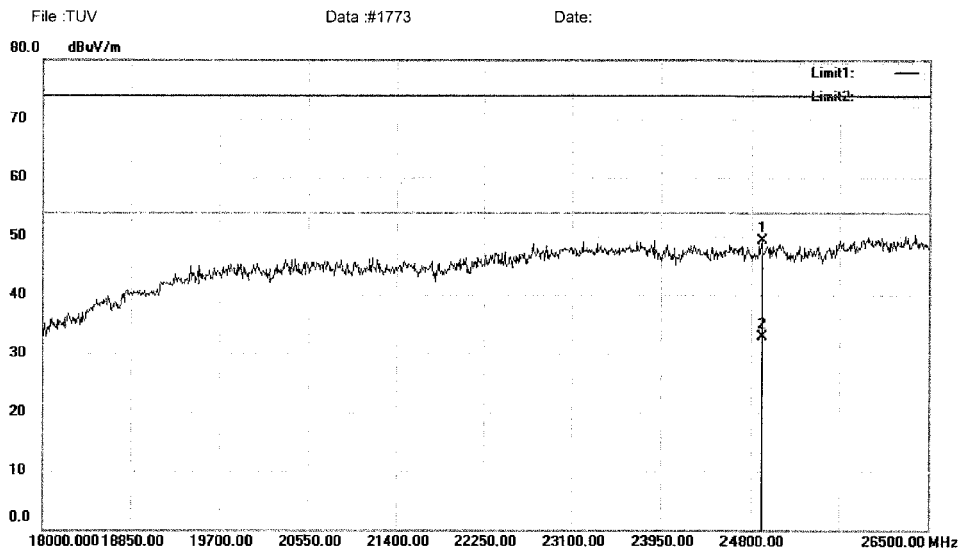
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1772

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24902.00	86.35	-37.02	49.33	74.00	-24.67	peak		0
2	*	24902.00	70.02	-37.02	33.00	54.00	-21.00	AVG		0

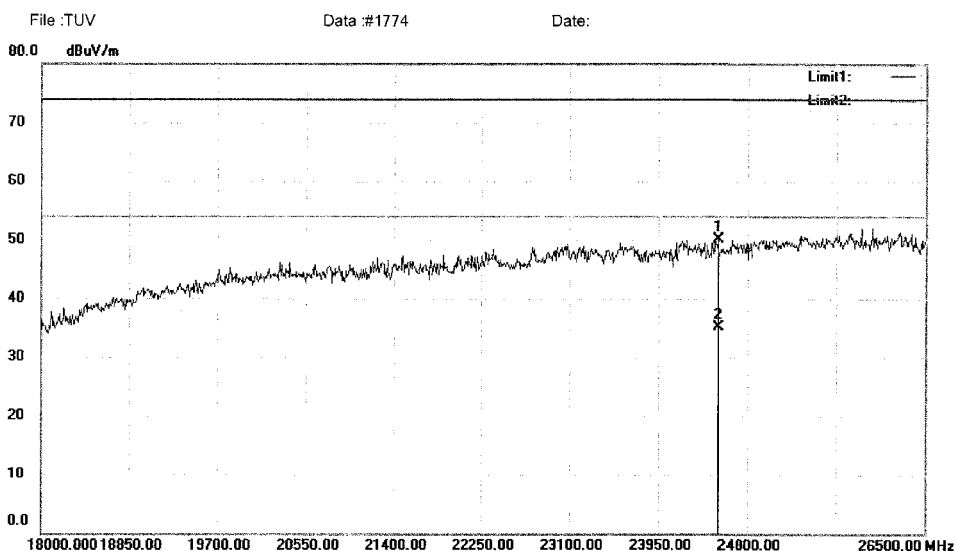
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1773

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24528.00	87.15	-37.07	50.08	74.00	-23.92	peak		0
2	*	24528.00	72.27	-37.07	35.20	54.00	-18.80	AVG		0

*:Maximum data x:Over limit !:over margin

Operator: KK

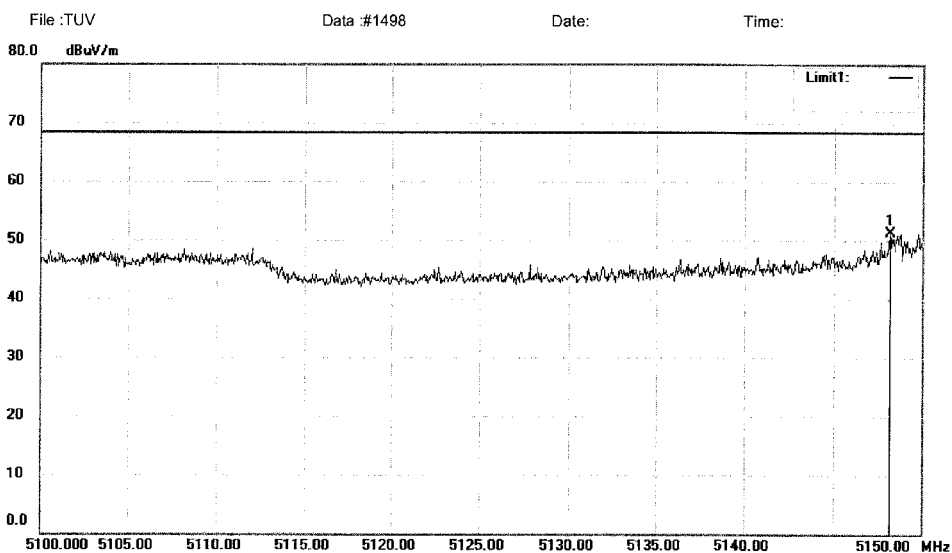
File :TUV\Data #1774

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11a 5180
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5148.150	65.39	-14.11	51.28	68.20	-16.92	peak		

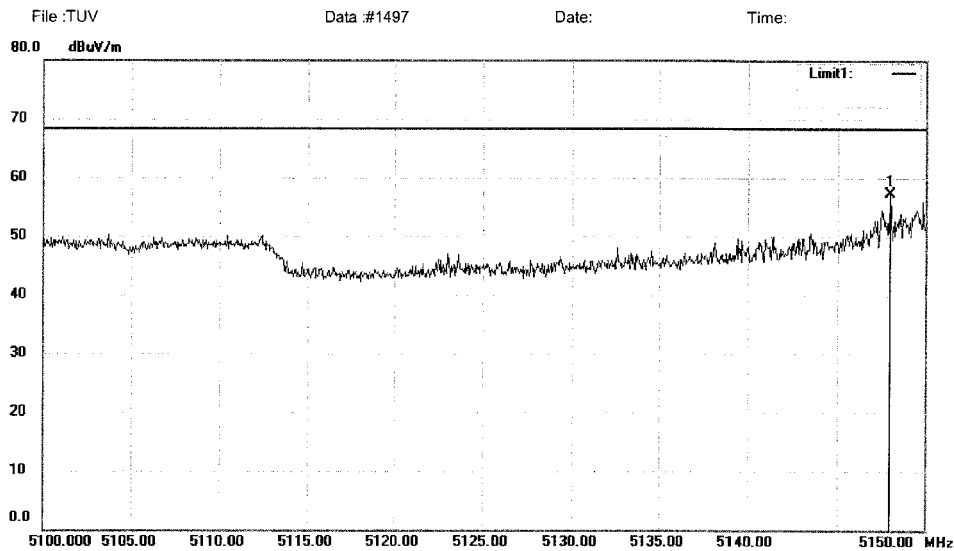
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1498

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5147.950	71.32	-14.11	57.21	68.20	-10.99	peak		

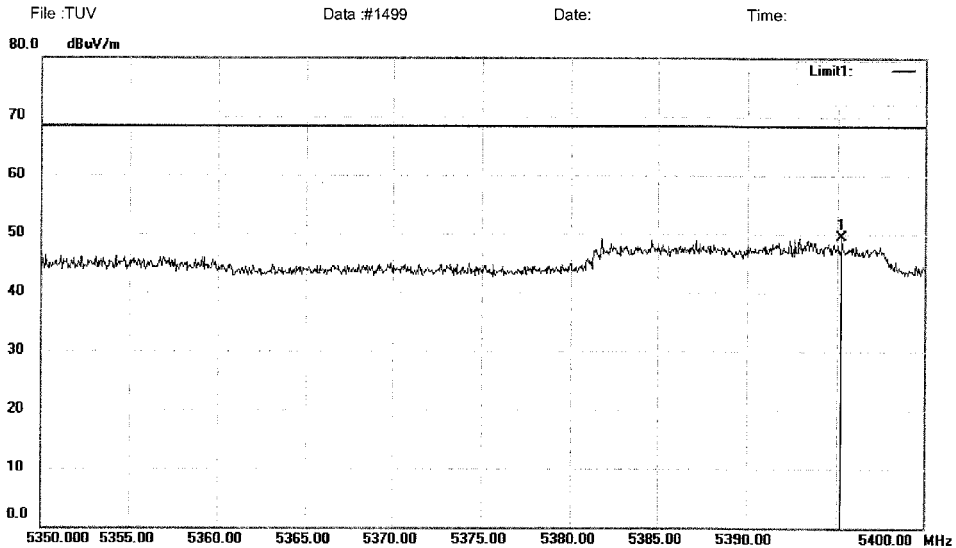
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1497

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5395.250	63.24	-13.66	49.58	68.20	-18.62	peak		

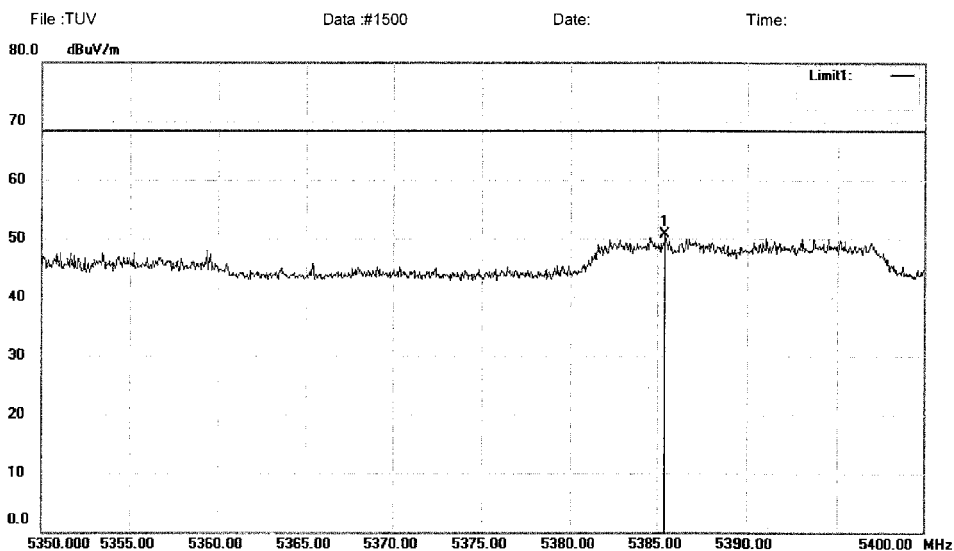
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1499

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)5GWIF(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11a 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5385.450	64.44	-13.68	50.76	68.20	-17.44	peak		

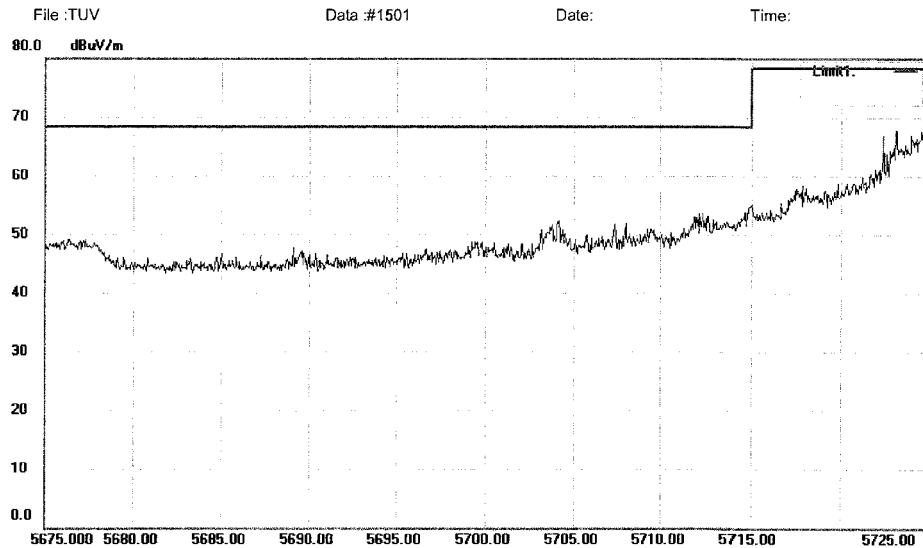
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV\Data : #1500

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5725.000	81.59	-13.06	68.53	78.20	-9.67	peak	

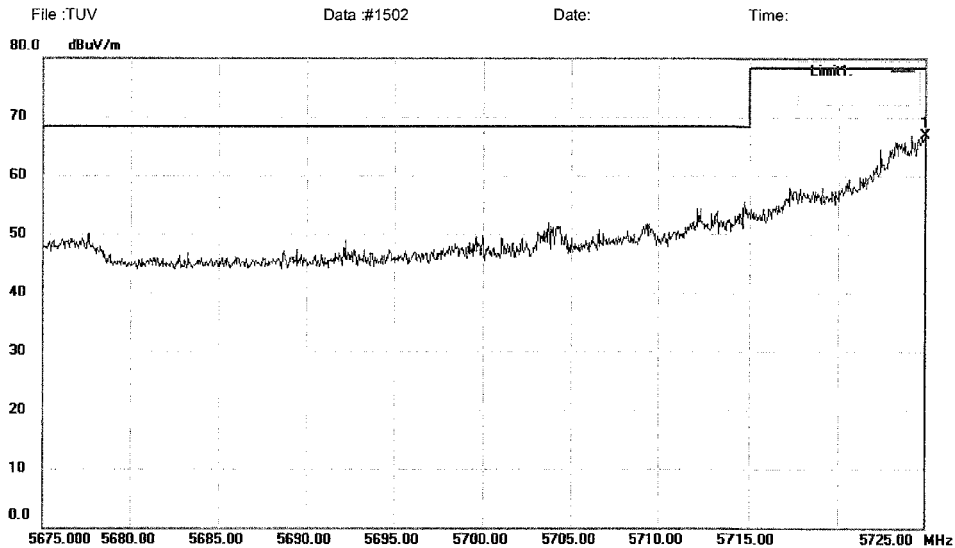
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1501

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5725.000	79.95	-13.06	66.89	78.20	-11.31	peak		

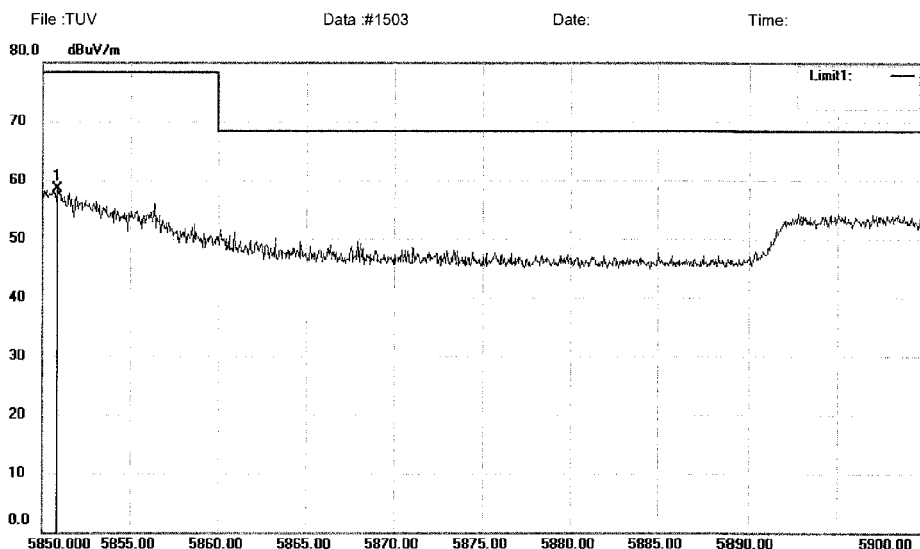
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1502

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5850.800	71.39	-12.84	58.55	78.20	-19.65	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

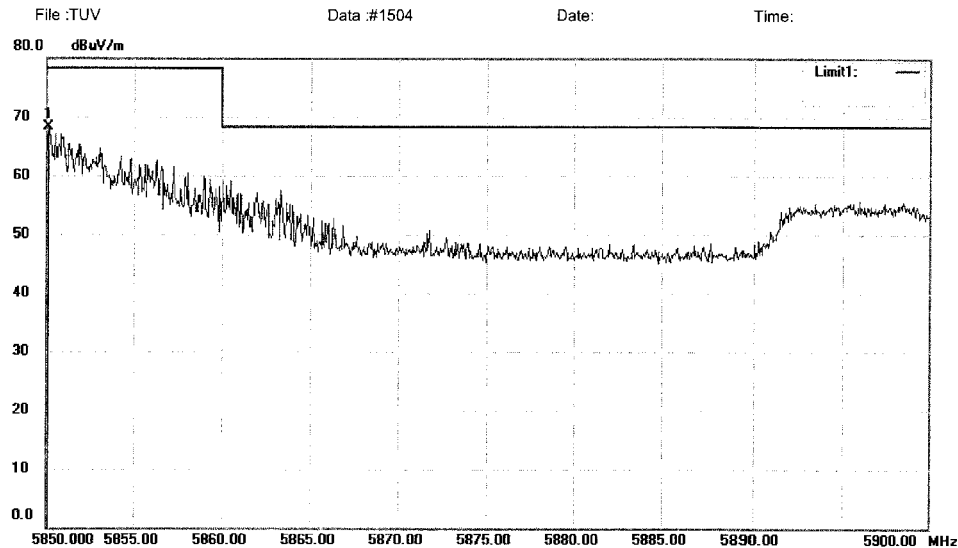
File :TUV\Data :#1503

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11a 5825
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5850.100	81.19	-12.84	68.35	78.20	-9.85	peak		

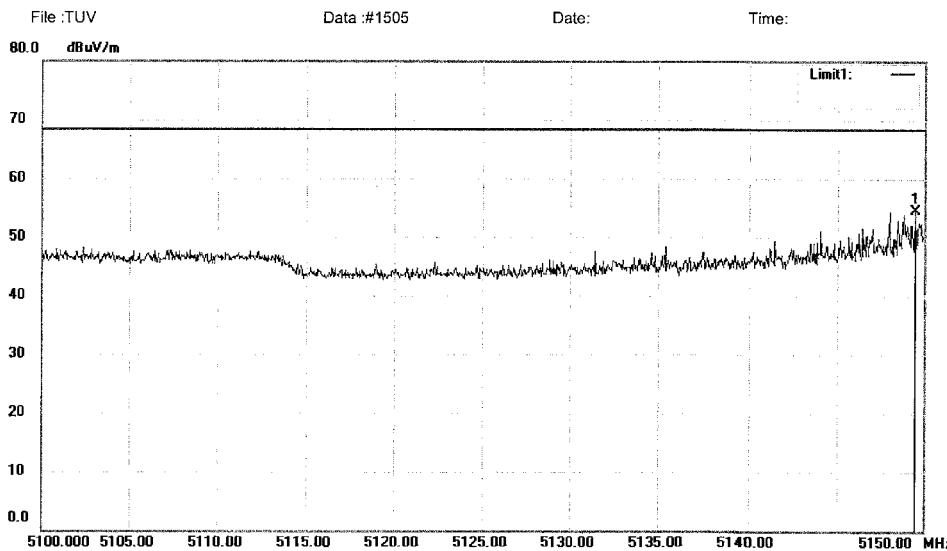
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1504

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5149.500	68.63	-14.11	54.52	68.20	-13.68	peak	

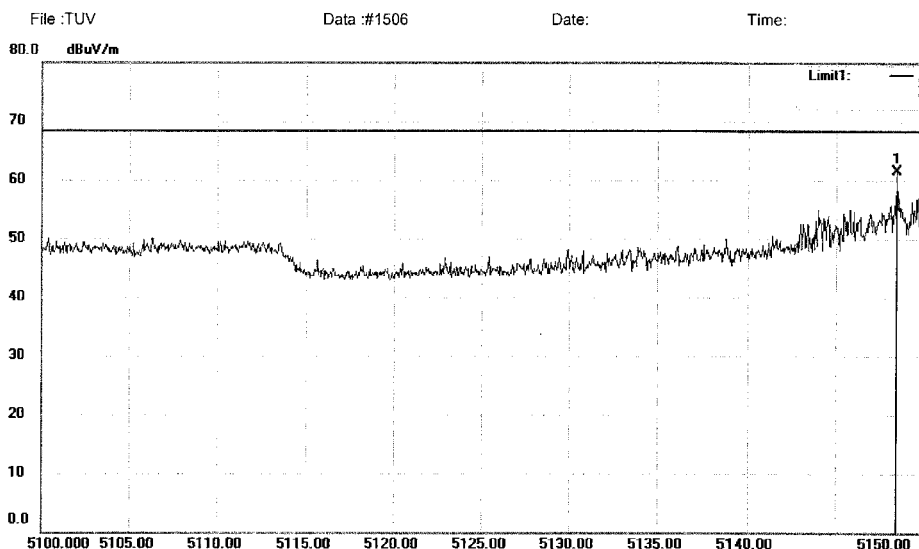
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1505

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5148.500	75.53	-14.11	61.42	68.20	-6.78	peak	

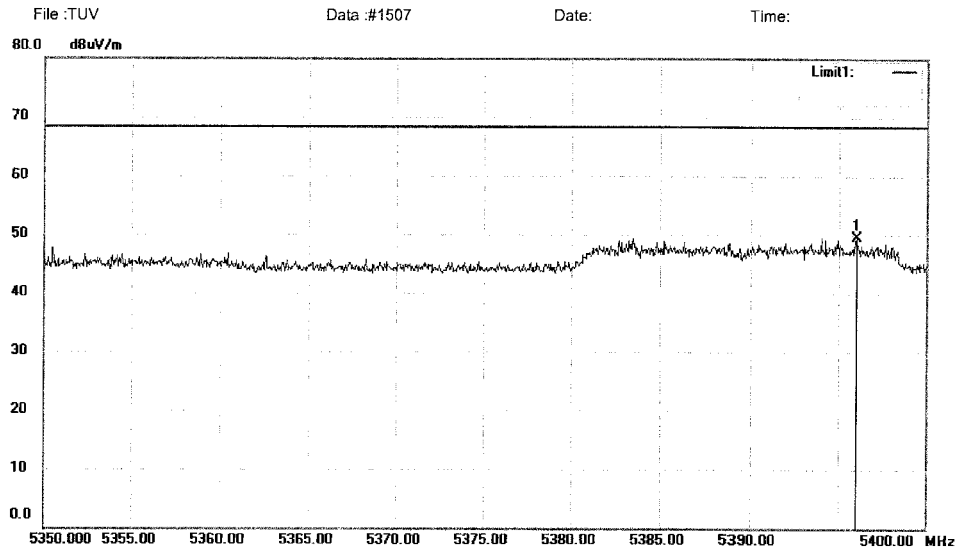
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1506

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5396.000	63.09	-13.66	49.43	68.20	-18.77	peak		

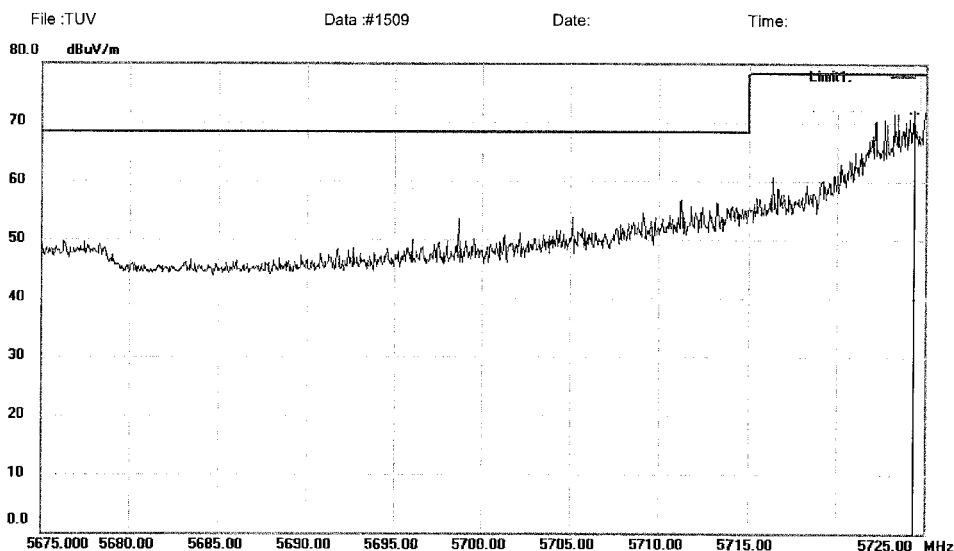
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1507

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5724.350	85.25	-13.06	72.19	78.20	-6.01	peak	

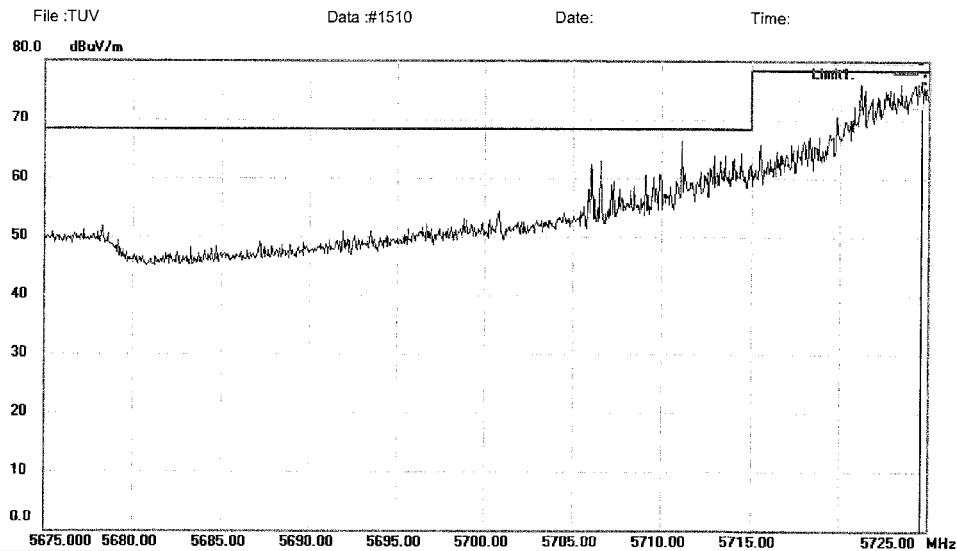
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1509

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5724.650	89.74	-13.06	76.68	78.20	-1.52	peak		

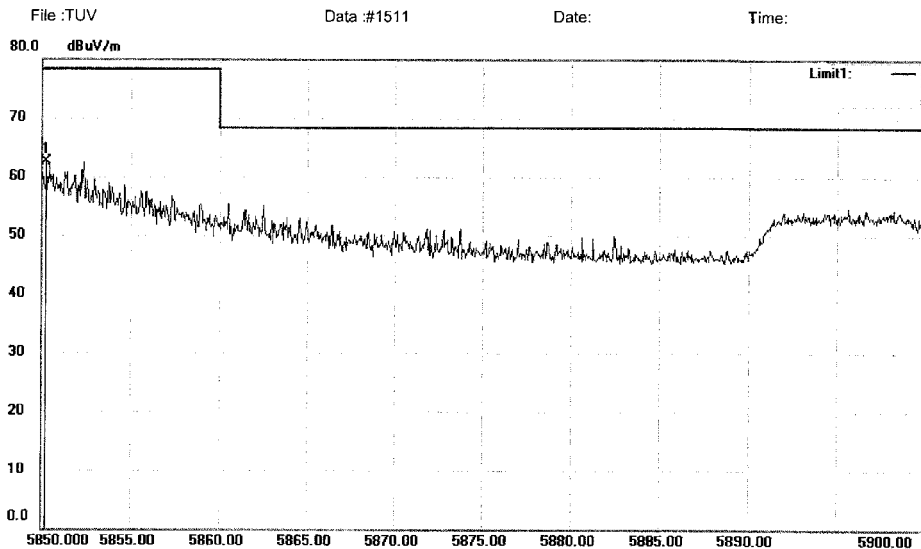
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV\Data : #1510

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5850.250	75.29	-12.84	62.45	78.20	-15.75	peak		

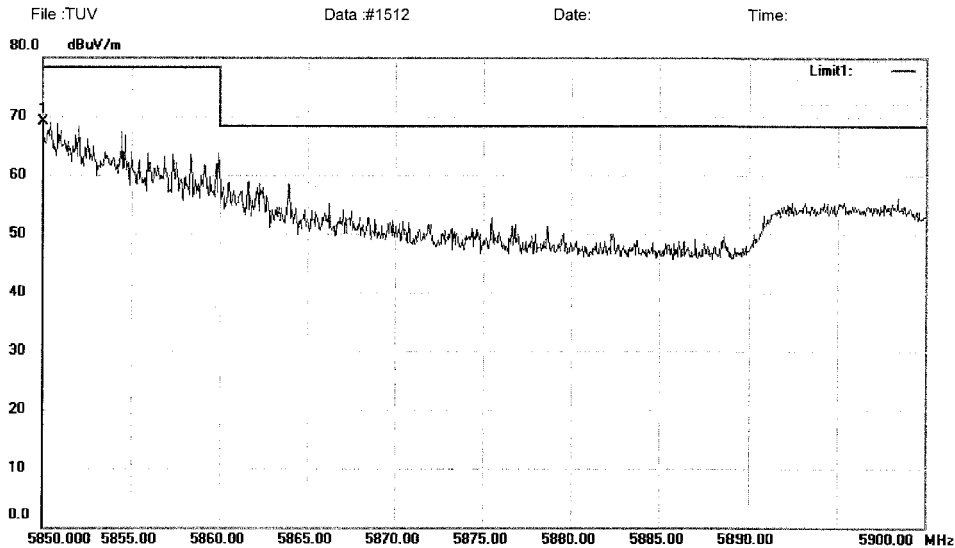
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1511

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5850.000	81.89	-12.84	69.05	78.20	-9.15	peak		

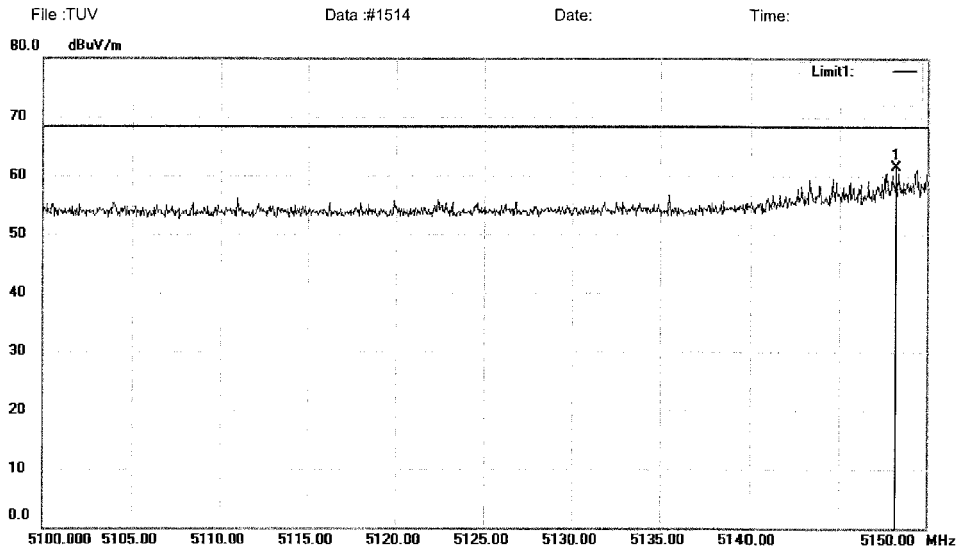
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1512

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5148.250	23.41	38.00	61.41	68.20	-6.79	peak		

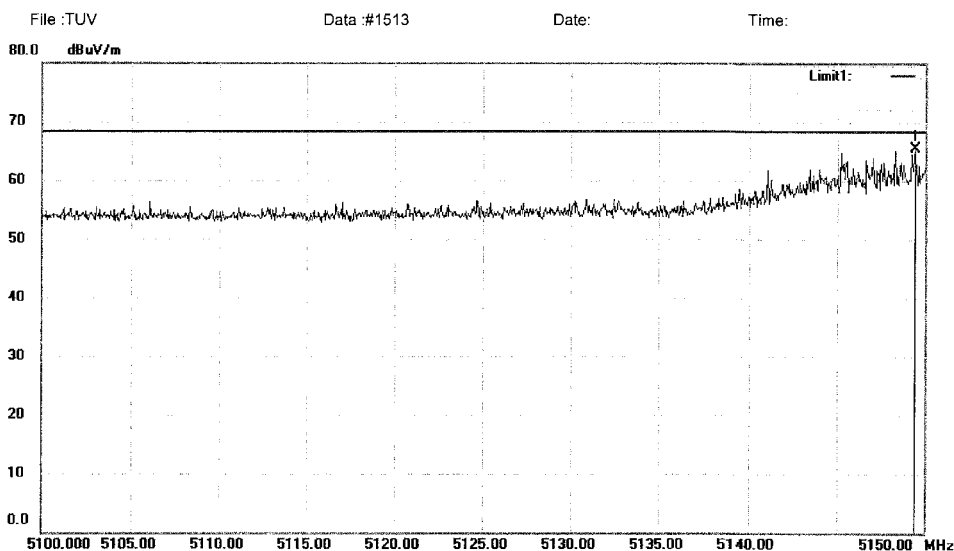
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1514

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5149.400	27.54	38.00	65.54	68.20	-2.66	peak	

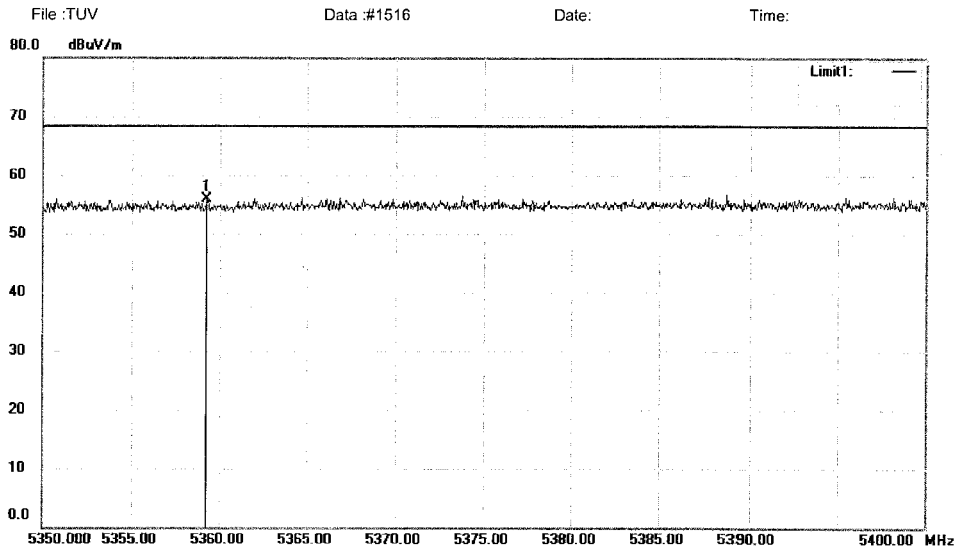
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1513

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5359.250	17.58	38.41	55.99	68.20	-12.21	peak	

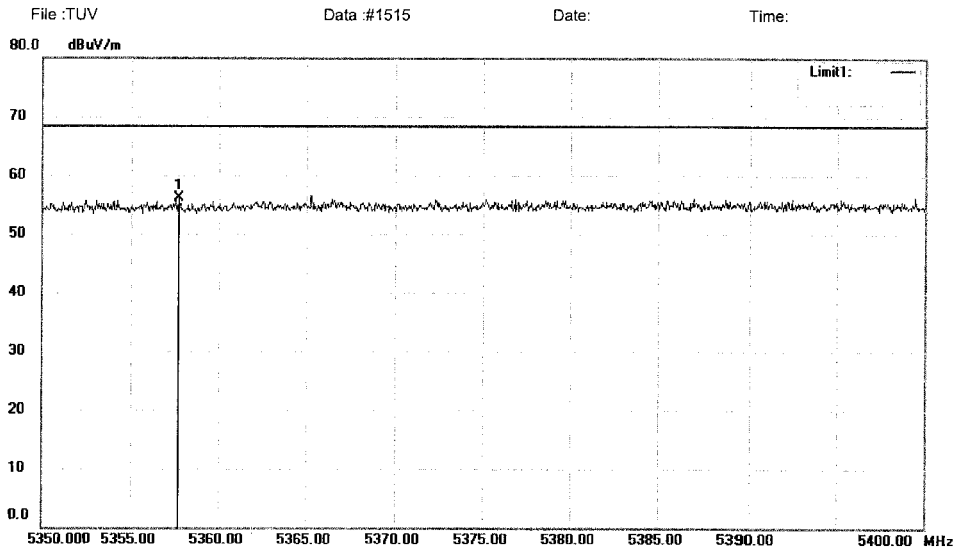
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV\Data : #1516

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5357.700	17.70	38.40	56.10	68.20	-12.10	peak	

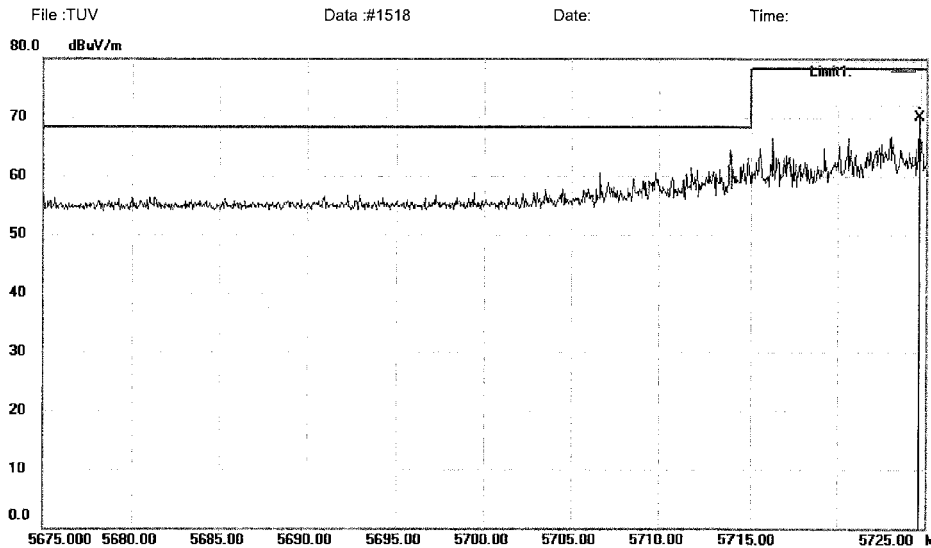
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV\Data : #1515

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5724.650	30.95	39.11	70.06	78.20	-8.14	peak		

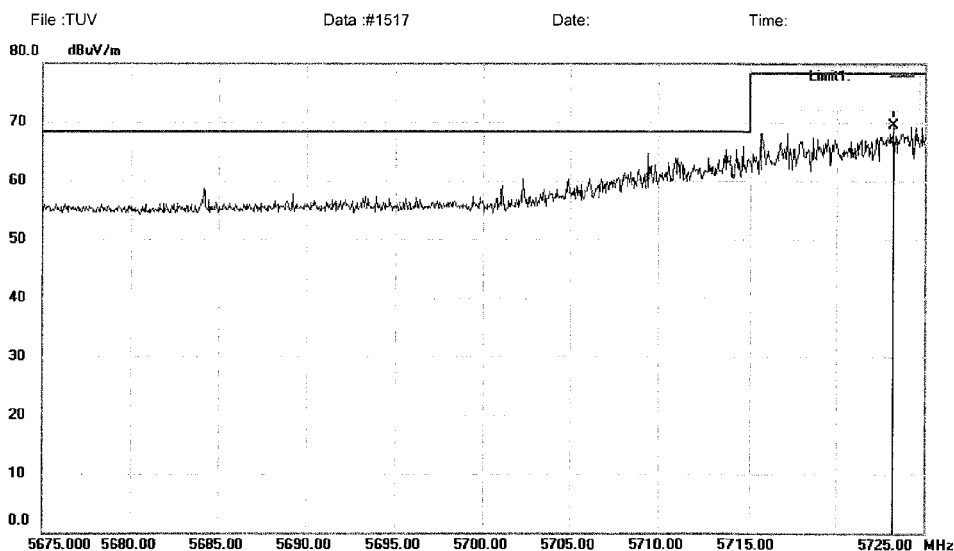
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1518

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5723.200	30.37	39.11	69.48	78.20	-8.72	peak		

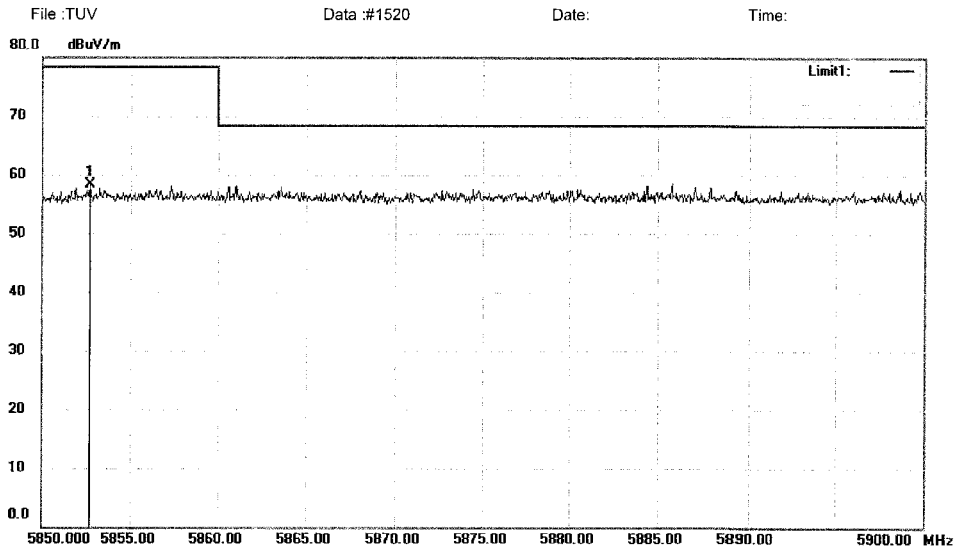
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1517

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5852.700	18.86	39.35	58.21	78.20	-19.99	peak		

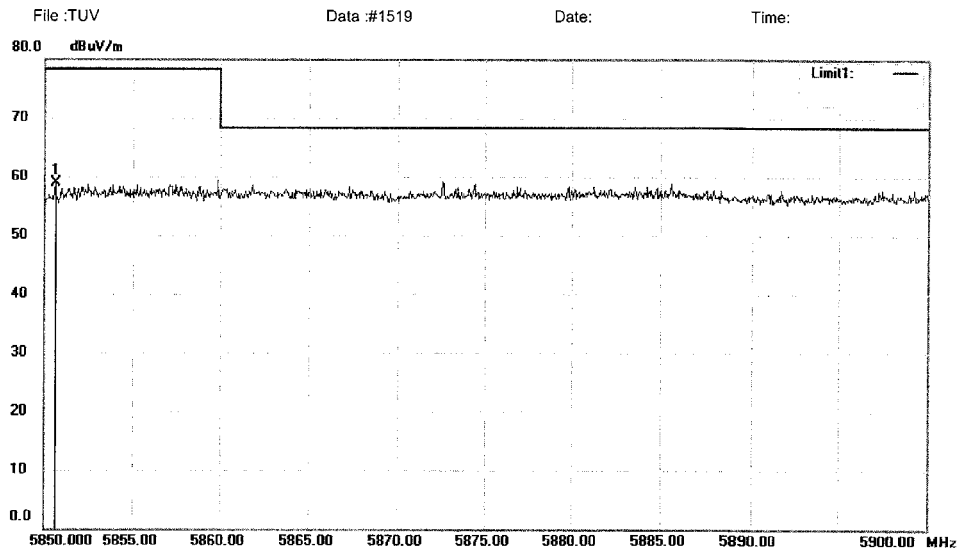
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1520

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5850.600	19.53	39.35	58.88	78.20	-19.32	peak		

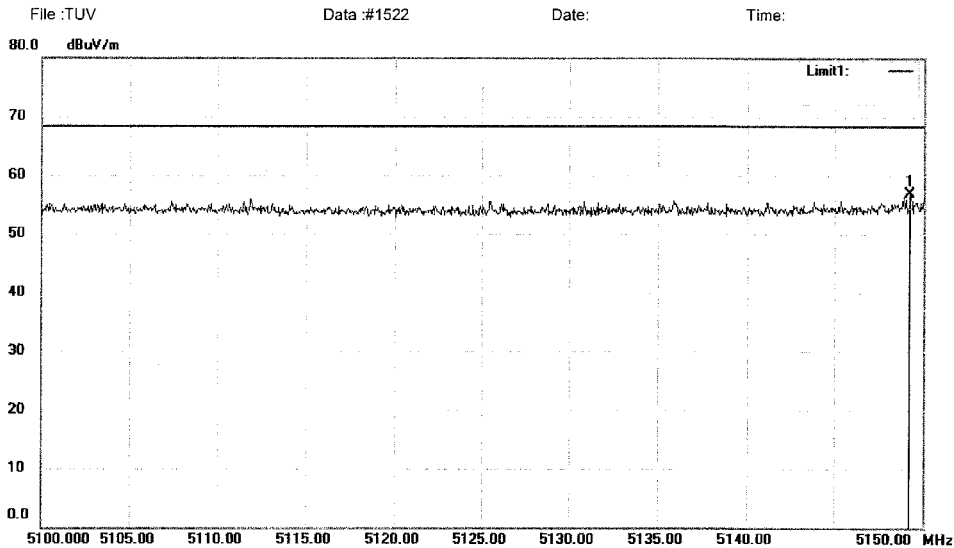
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV\Data : #1519

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIF(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5149.250	18.92	38.00	56.92	68.20	-11.28	peak		

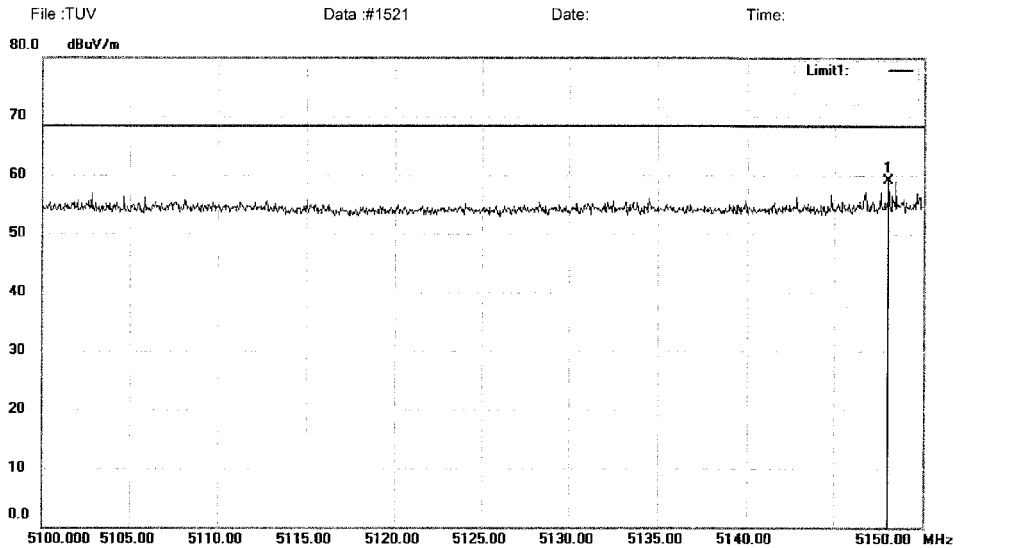
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1522

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5148.050	21.19	38.00	59.19	68.20	-9.01	peak		

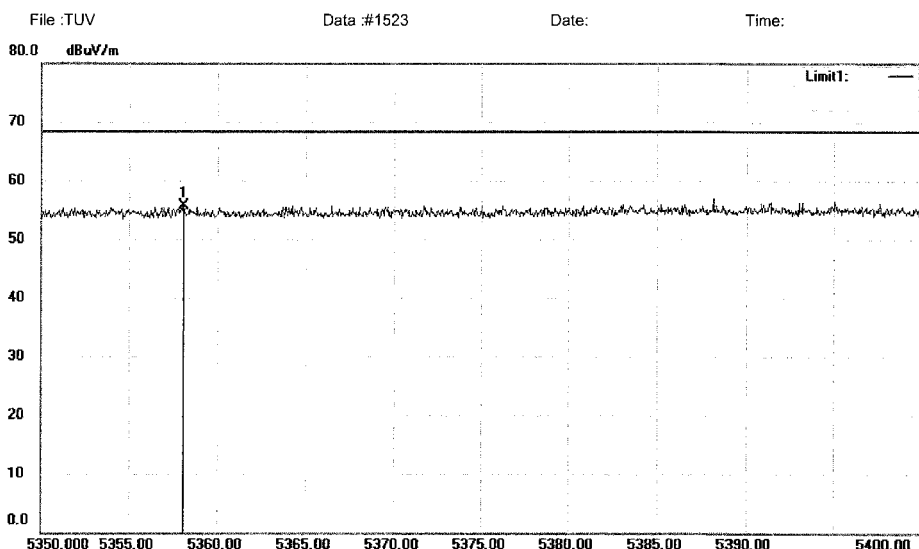
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1521

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5358.100	17.39	38.40	55.79	68.20	-12.41	peak	

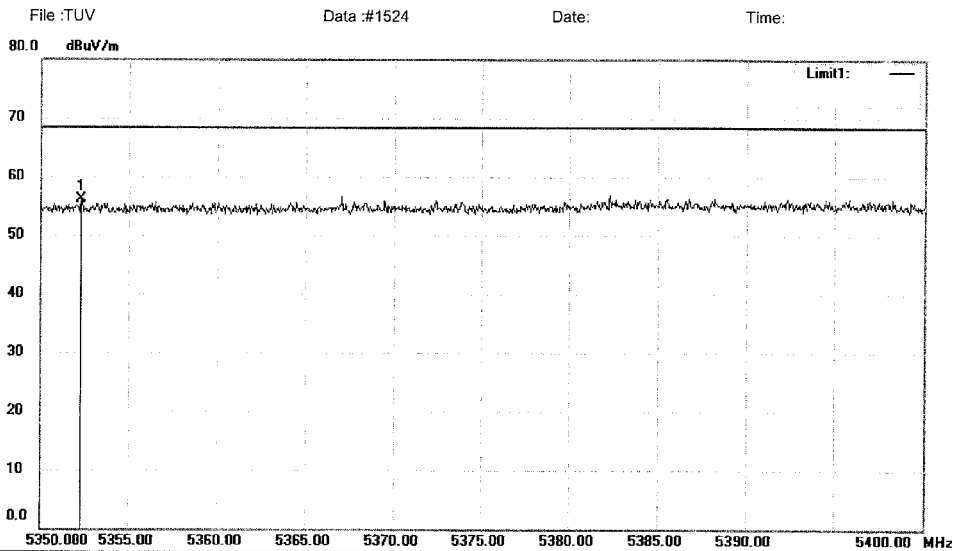
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV\Data : #1523

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5352.300	17.66	38.39	56.05	68.20	-12.15	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

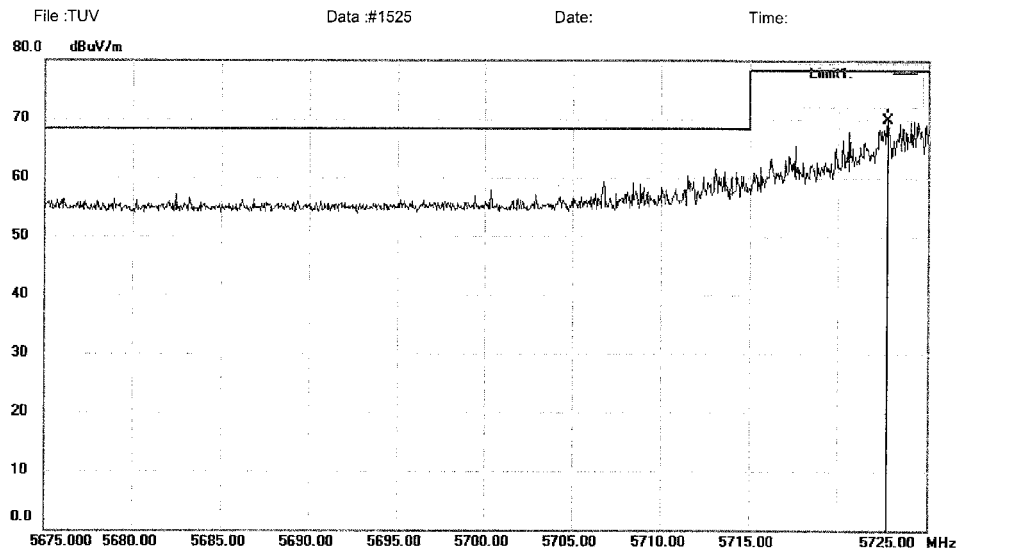
File : TUV\Data : #1524

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5722.750	30.86	39.11	69.97	78.20	-8.23	peak		

*:Maximum data x:Over limit !:over margin

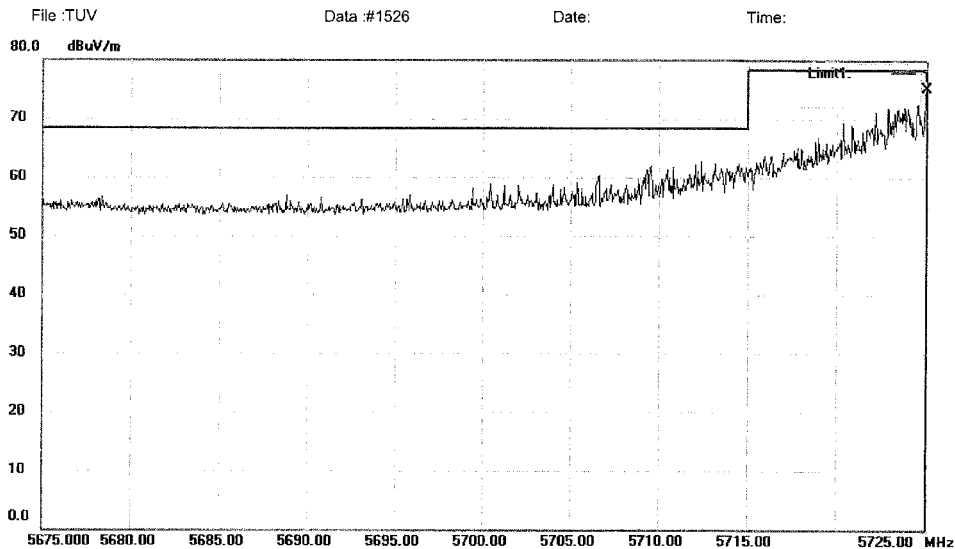
Operator: KK

File: TUV\Data: #1525

Page: 1

Prüfbericht - Nr.: 50055364 003
Test Report No.
Seite 223 von 313
Page 223 of 313

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5725.000	35.99	39.11	75.10	78.20	-3.10	peak		

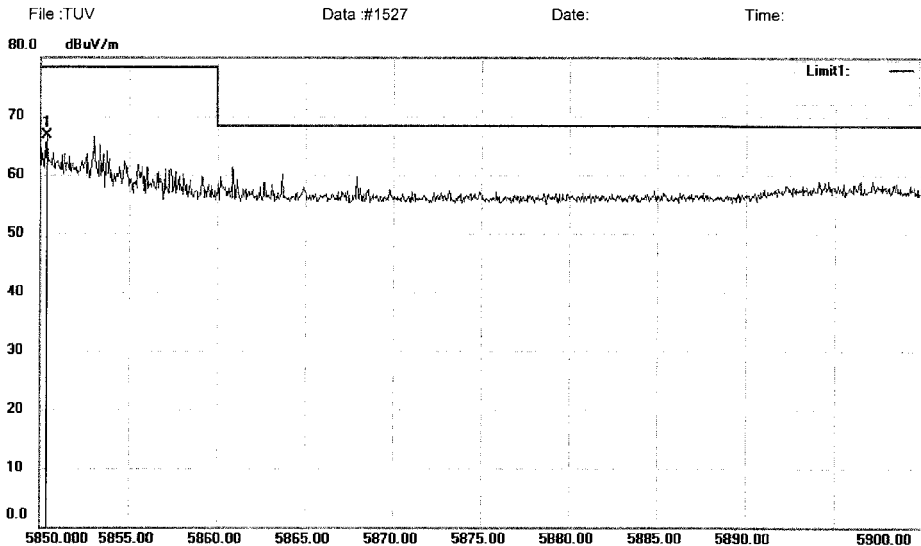
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1526

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5850.350	27.35	39.35	66.70	78.20	-11.50	peak		

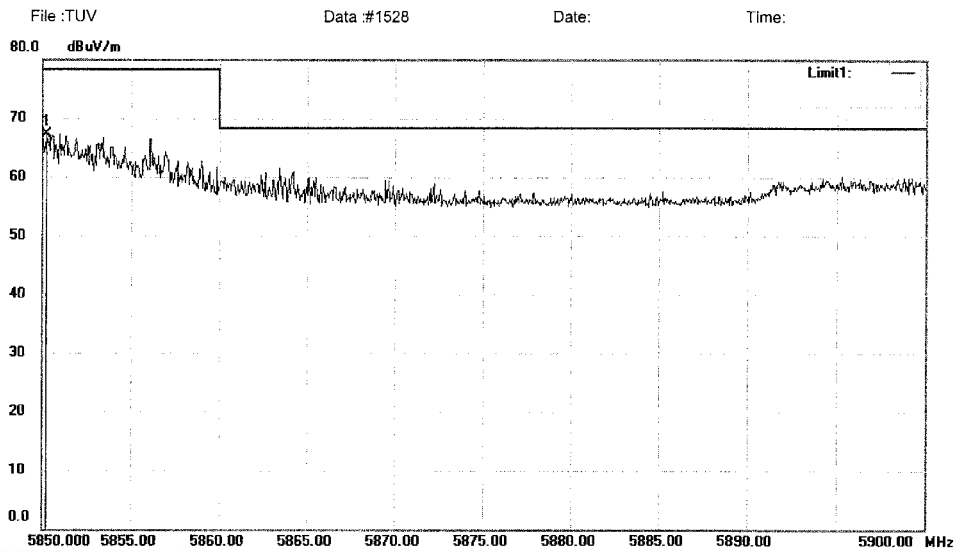
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1527

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5850.250	27.95	39.35	67.30	78.20	-10.90	peak		

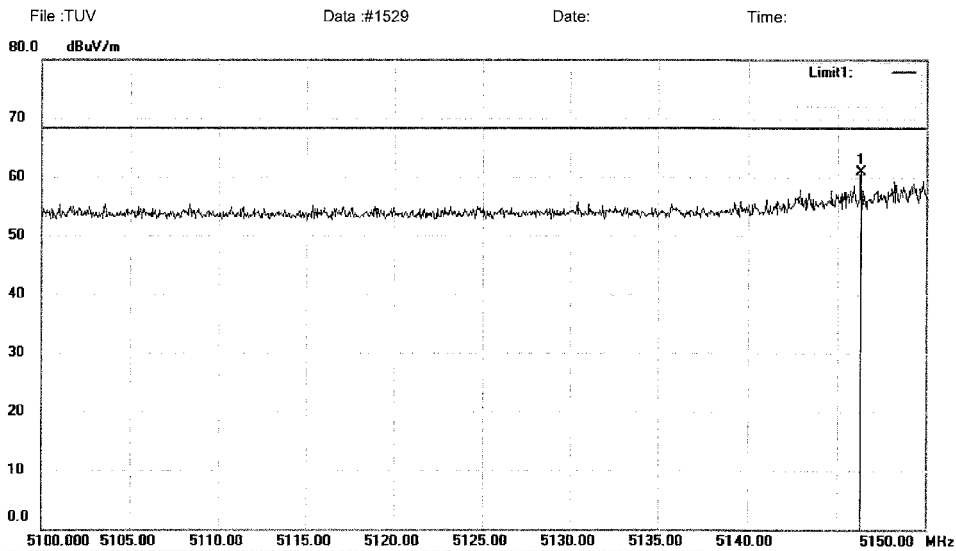
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1528

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5146.300	22.83	38.00	60.83	68.20	-7.37	peak			

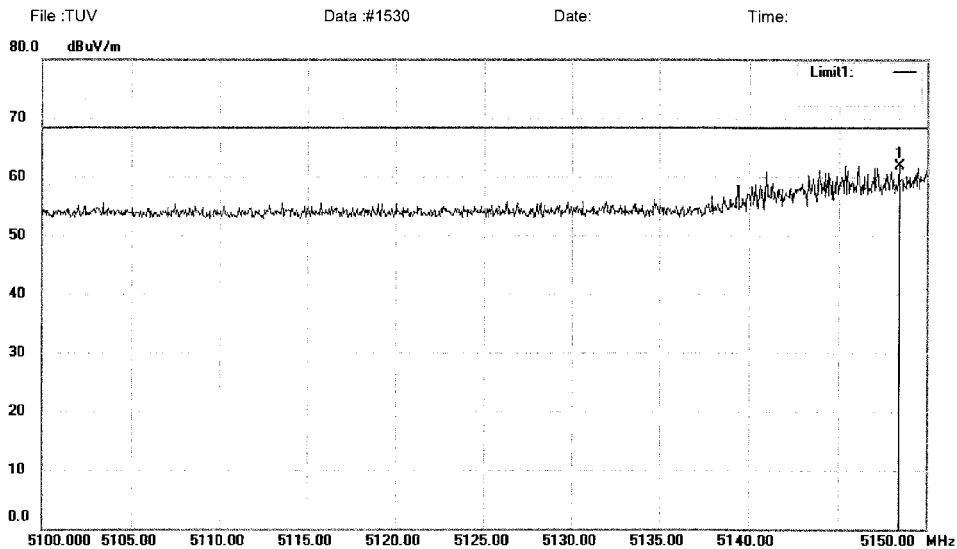
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1529

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm degree
1	*	5148.400	23.98	38.00	61.98	68.20	-6.22	peak	

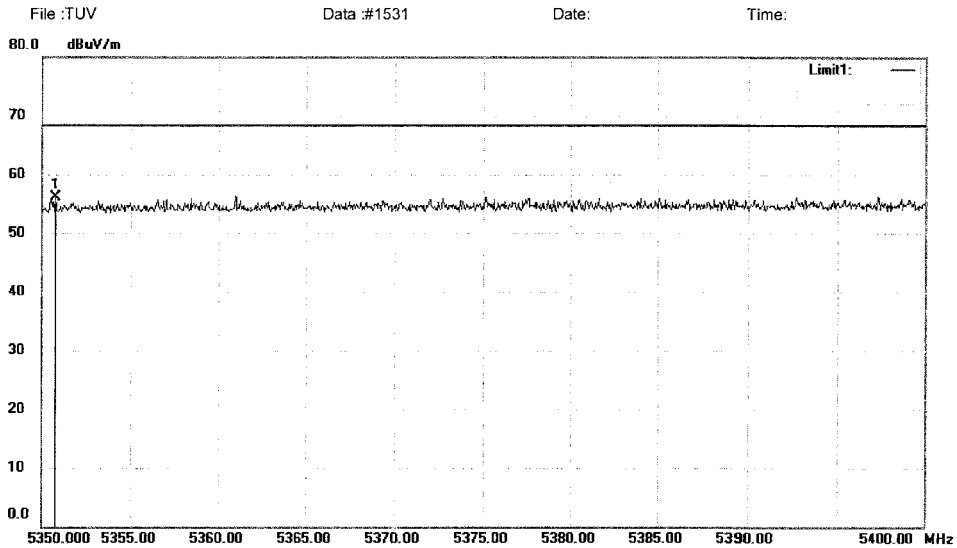
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1530

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5350.750	17.72	38.39	56.11	68.20	-12.09	peak		

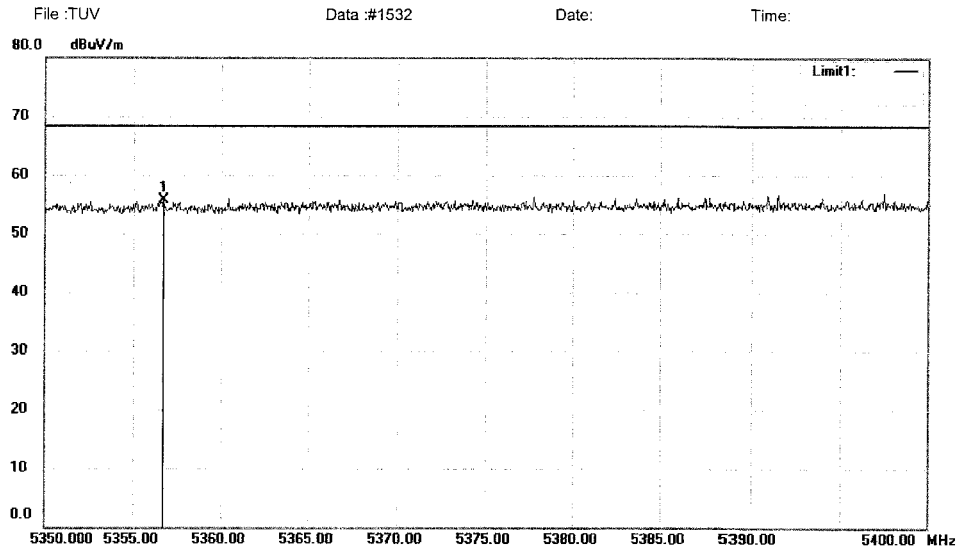
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1531

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5356.700	17.21	38.40	55.61	68.20	-12.59	peak		

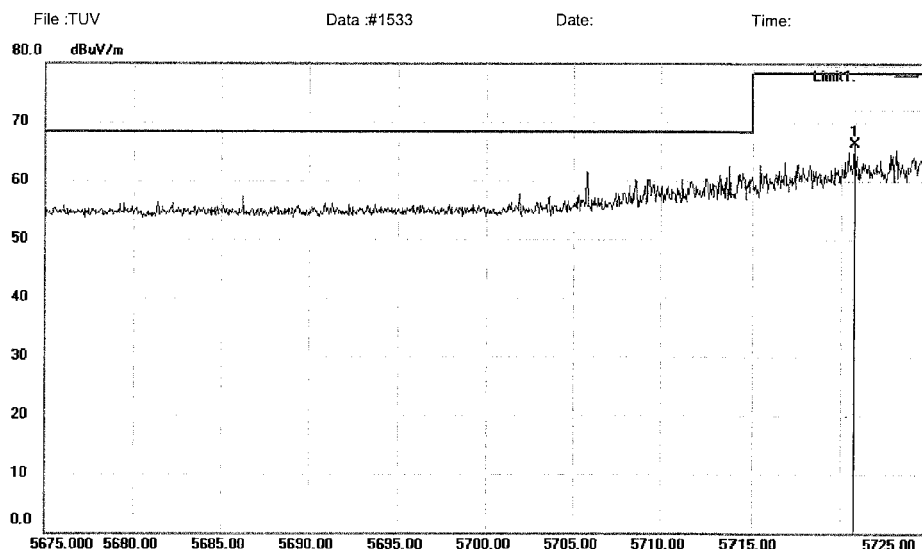
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1532

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5720.750	27.29	39.10	66.39	78.20	-11.81	peak	

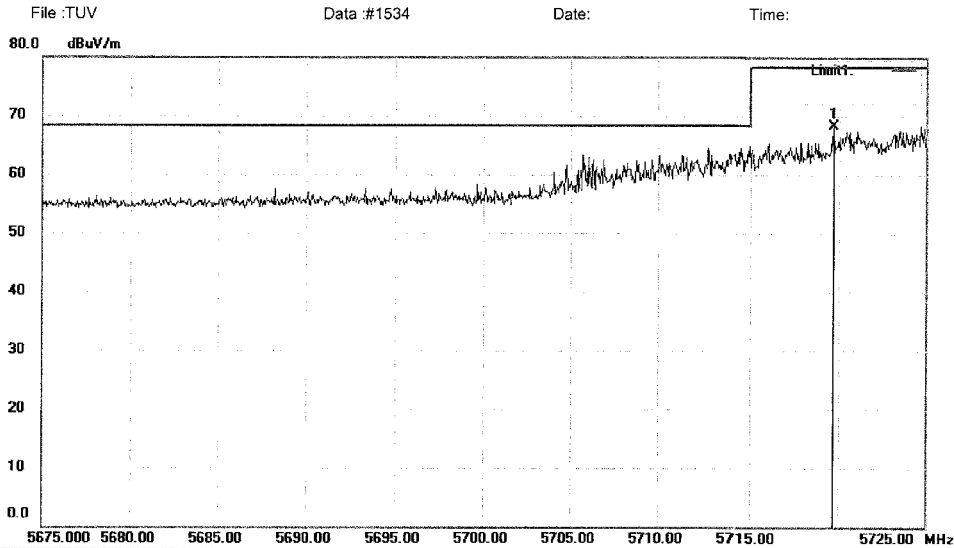
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1533

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5719.700	29.13	39.10	68.23	78.20	-9.97	peak	

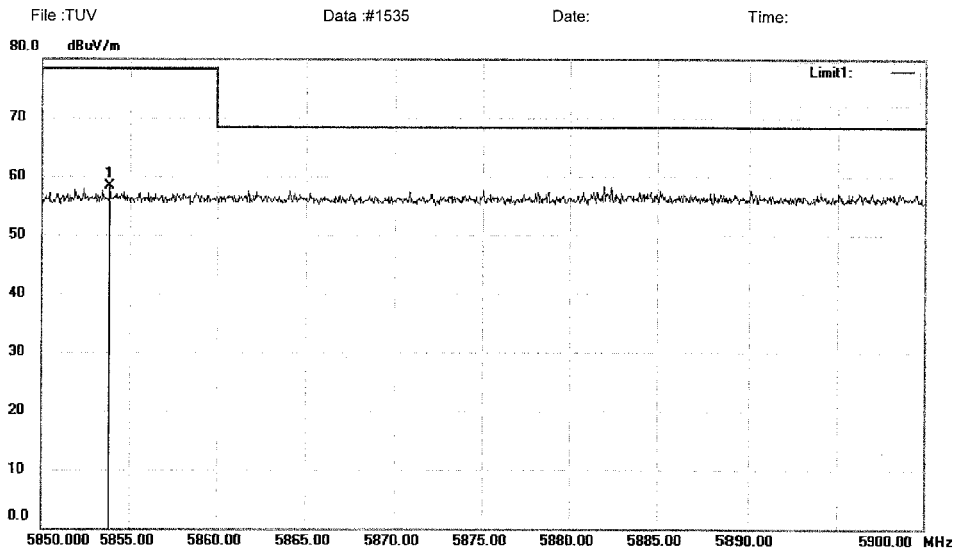
*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUV\Data :#1534

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5853.850	18.98	39.35	58.33	78.20	-19.87	peak			

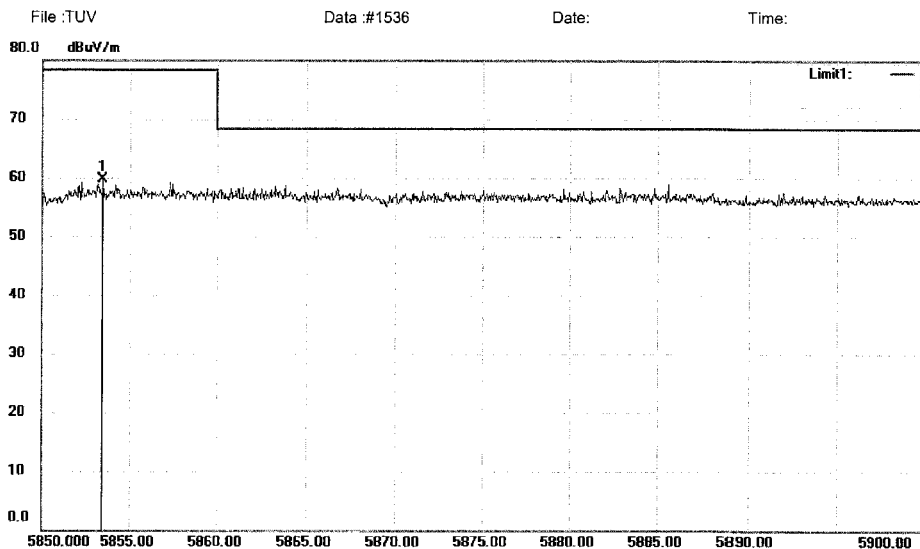
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV\Data : #1535

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5853.450	20.30	39.35	59.65	78.20	-18.55	peak	

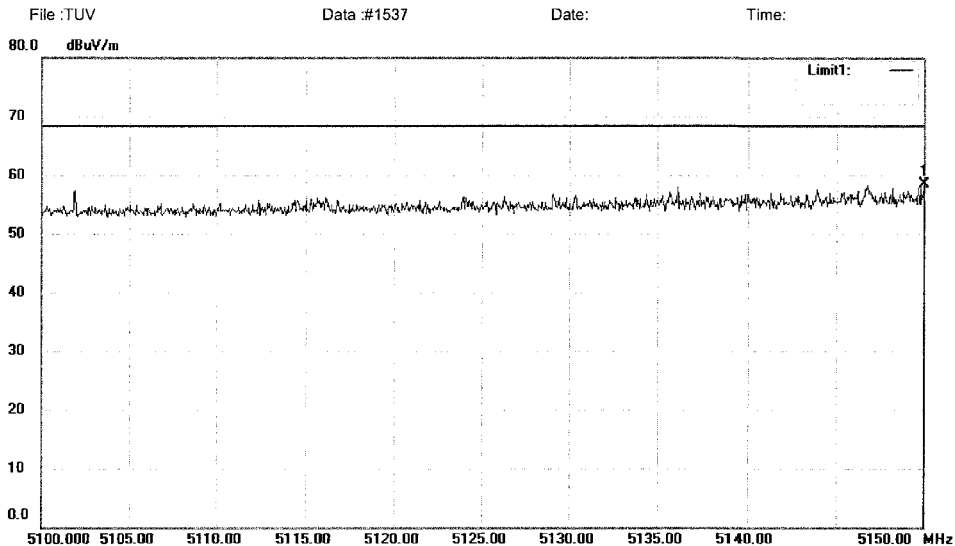
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1536

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5150.000	20.48	38.00	58.48	68.20	-9.72	peak	

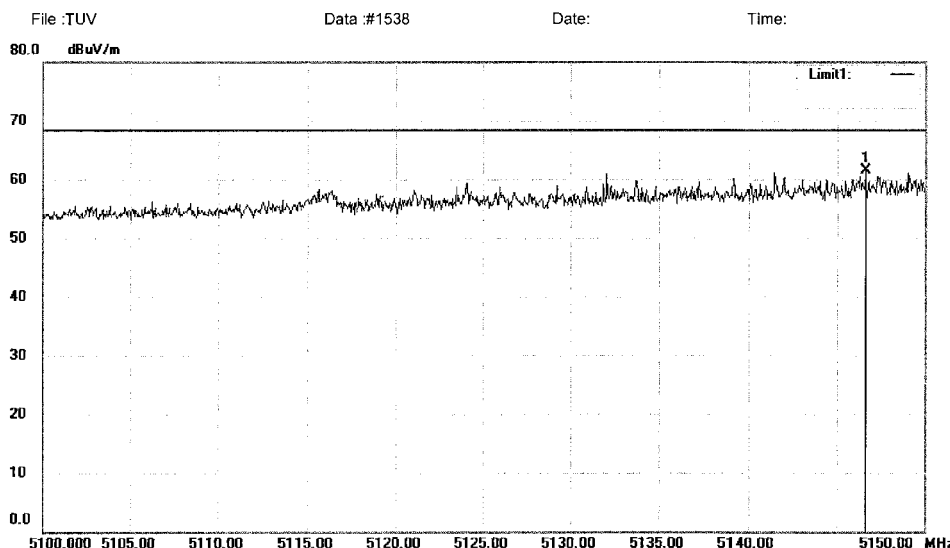
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1537

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5146.600	23.44	38.00	61.44	68.20	-6.76	peak		

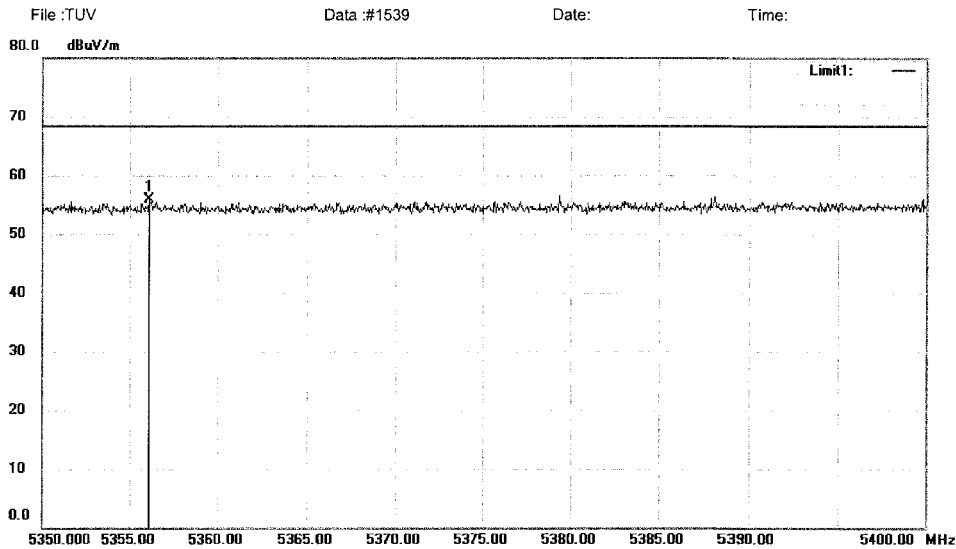
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1538

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5356.100	17.42	38.39	55.81	68.20	-12.39	peak	

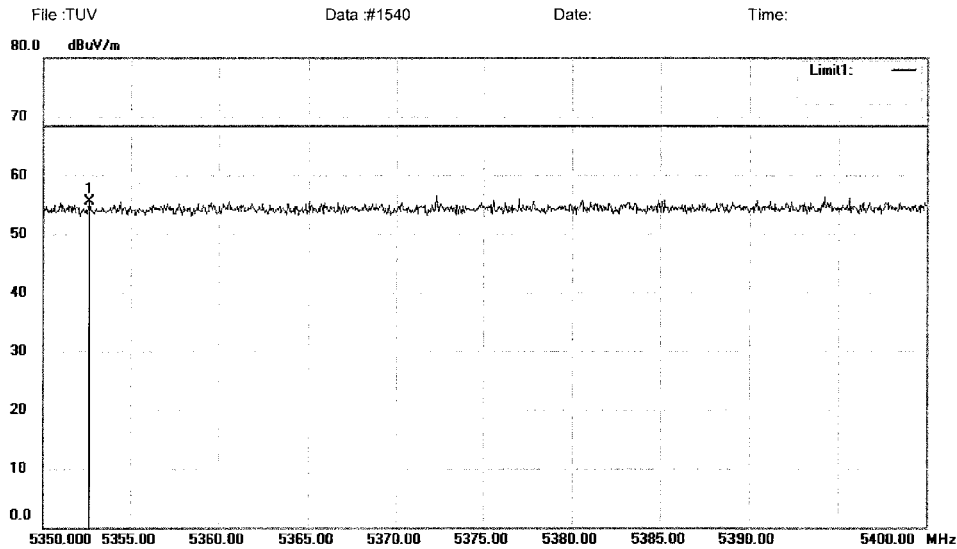
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1539

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5352.650	17.08	38.39	55.47	68.20	-12.73	peak		

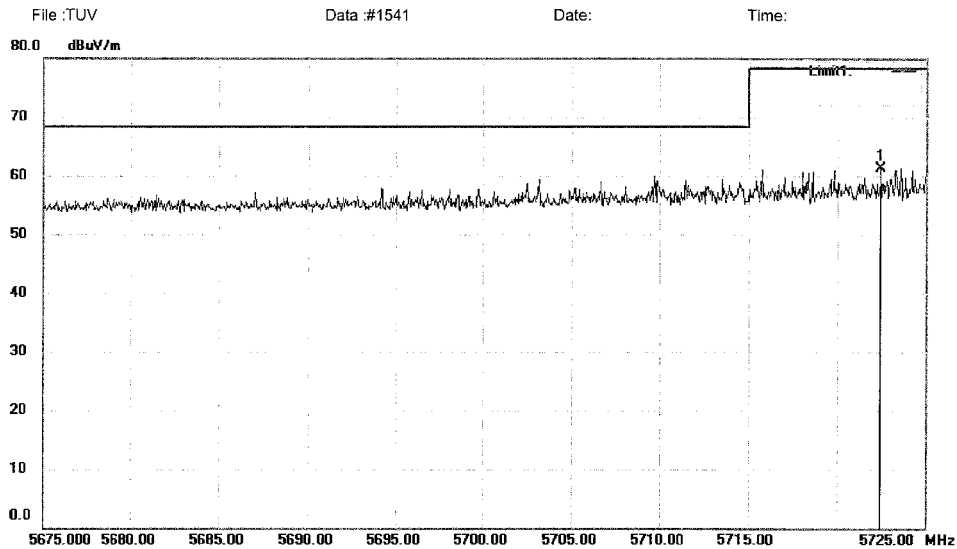
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1540

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5722.450	22.27	39.11	61.38	78.20	-16.82	peak		

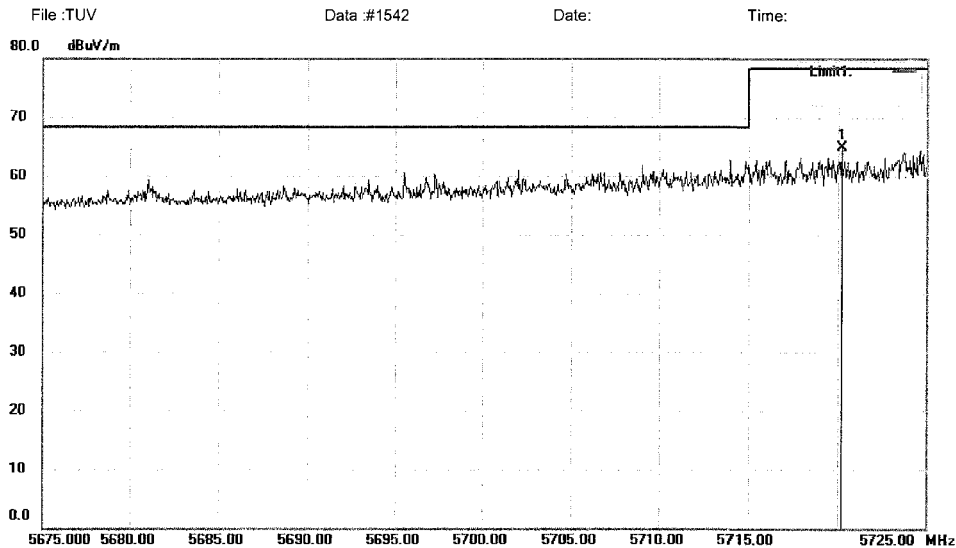
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1541

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5720.200	25.89	39.10	64.99	78.20	-13.21	peak	

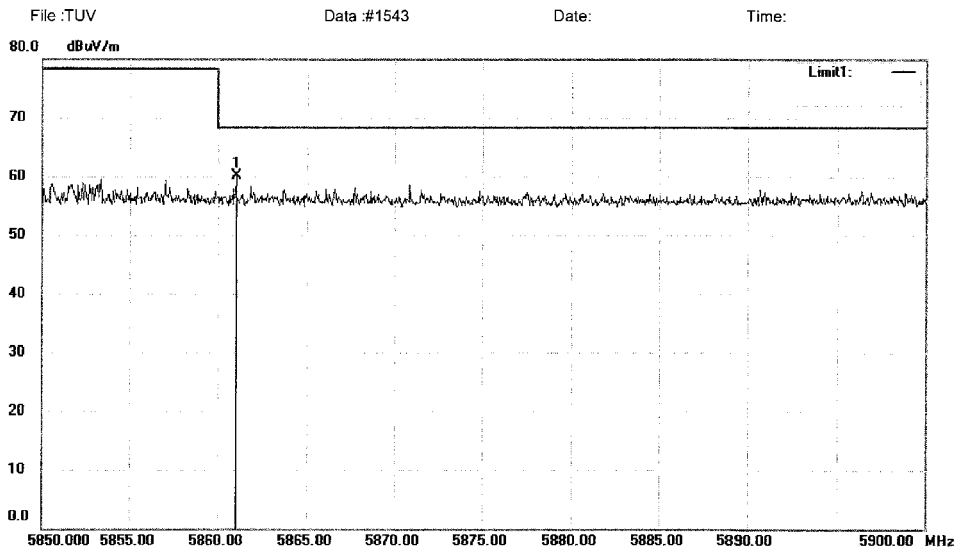
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1542

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm
1	*	5861.000	20.83	39.37	60.20	68.20	-8.00	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

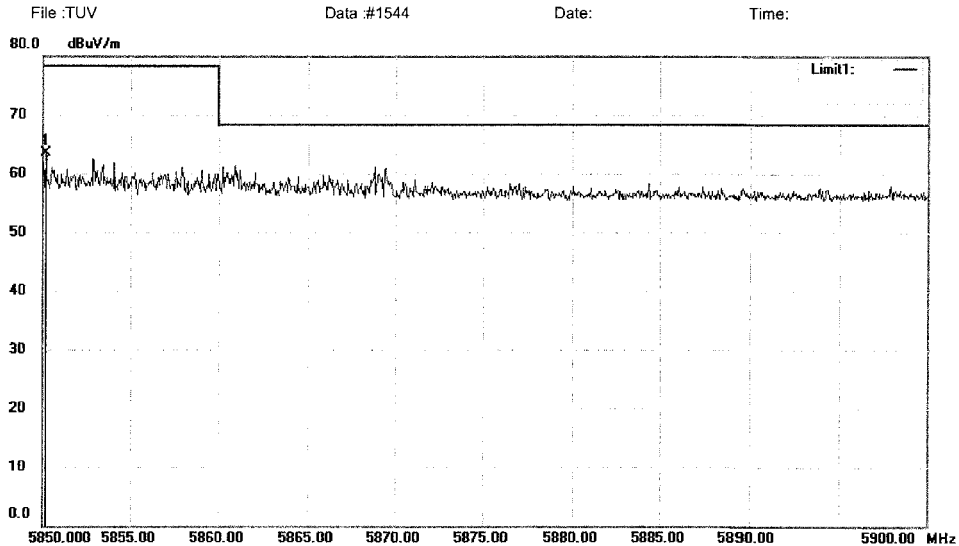
File :TUV\Data :#1543

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11ac(80MHz) 5775
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5850.150	24.14	39.35	63.49	78.20	-14.71	peak		

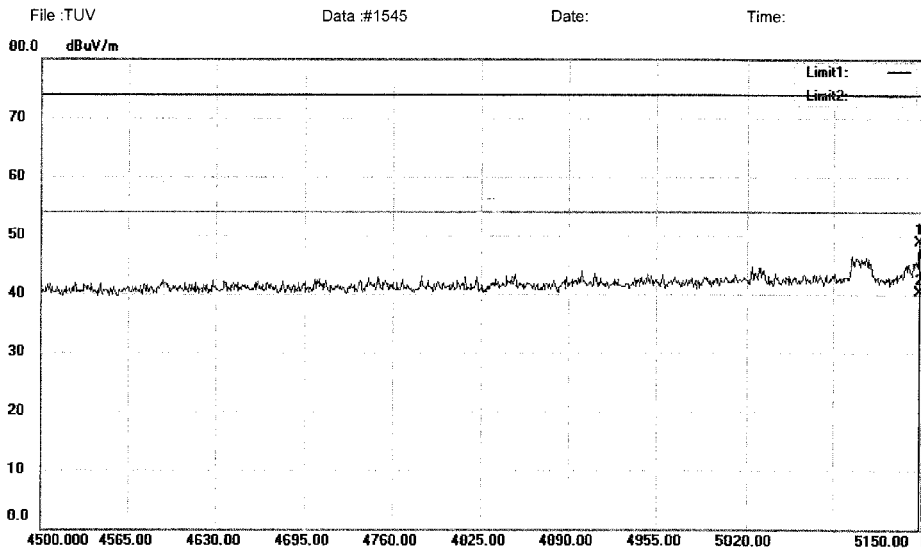
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1544

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5148.700	10.95	38.00	48.95	74.00	-25.05	peak		
2	*	5148.700	2.30	38.00	40.30	54.00	-13.70	AVG		

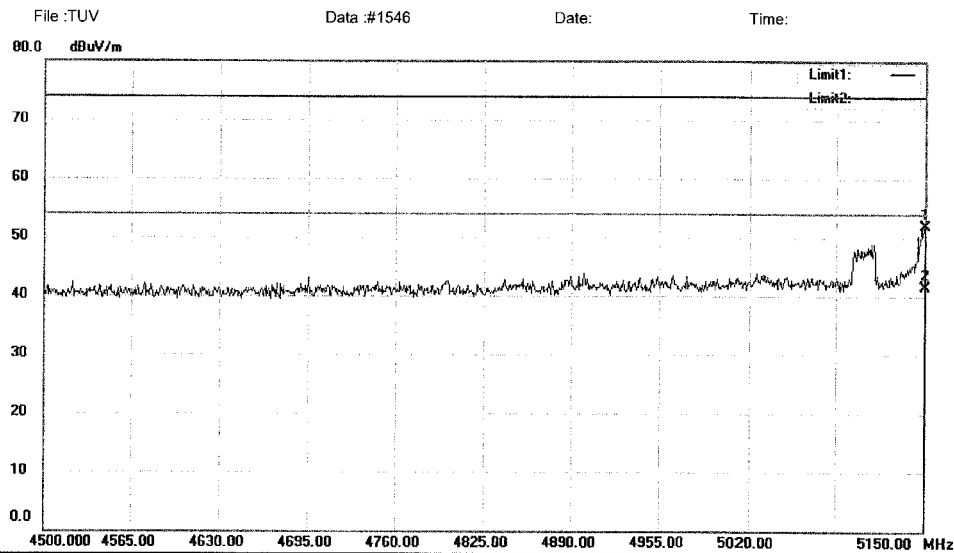
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1545

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)Restricted Band Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11a 5180

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		5150.000	13.90	38.00	51.90	74.00	-22.10			peak	
2	*	5150.000	3.60	38.00	41.60	54.00	-12.40			AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

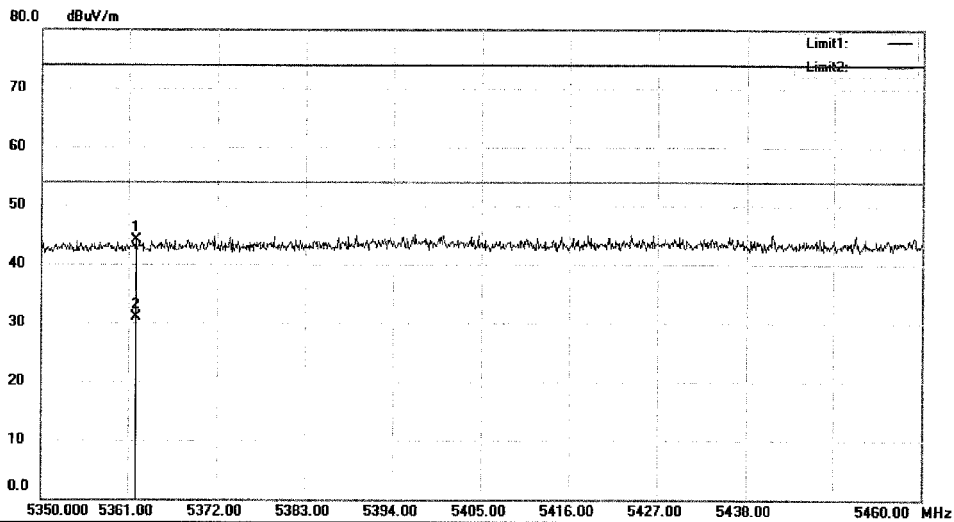
File: TUVData: #1546

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1547 Date: Time:



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5361.880	5.74	38.41	44.15	74.00	-29.85	peak		
2	*	5361.880	-7.51	38.41	30.90	54.00	-23.10	AVG		

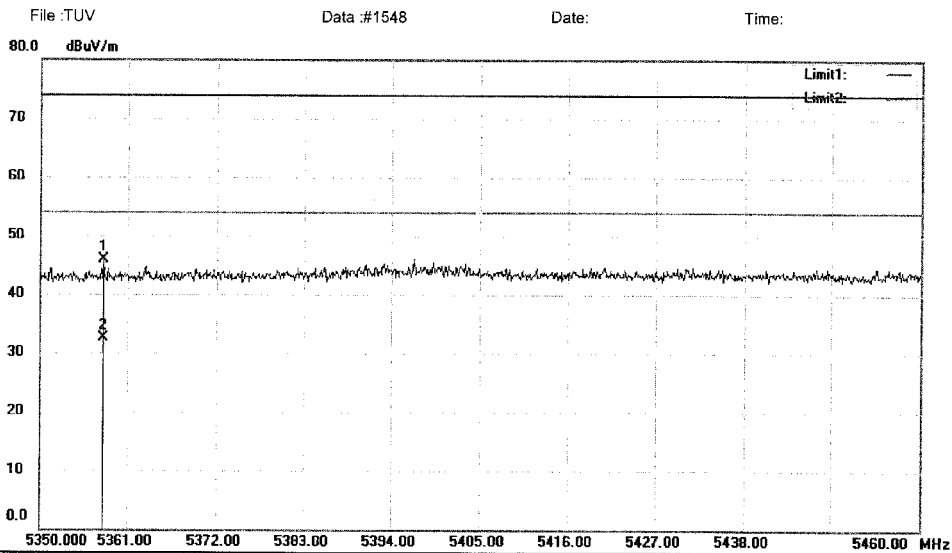
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1547

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		5358.030	7.42	38.40	45.82	74.00	-28.18	peak			
2	*	5358.030	-5.80	38.40	32.60	54.00	-21.40	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK

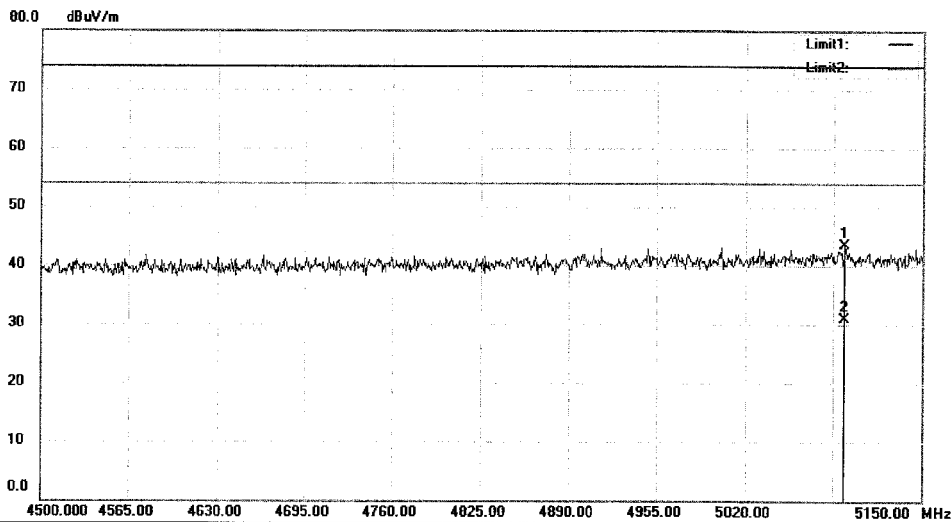
File :TUVData :#1548

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1551 Date: Time:



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		5093.450	5.61	37.89	43.50	74.00	-30.50	peak		
2	*	5093.450	-6.99	37.89	30.90	54.00	-23.10	AVG		

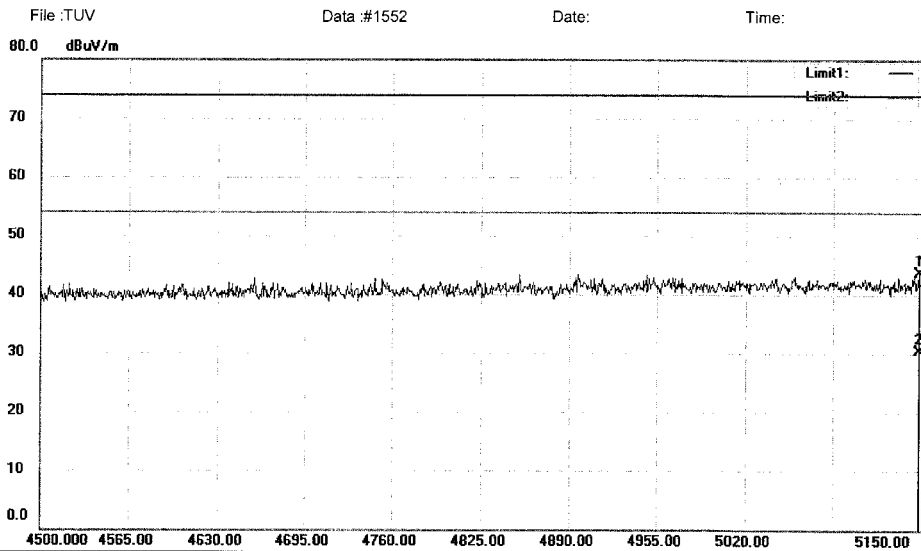
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1551

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5147.400	5.74	38.00	43.74	74.00	-30.26	peak		
2	*	5147.400	-7.60	38.00	30.40	54.00	-23.60	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

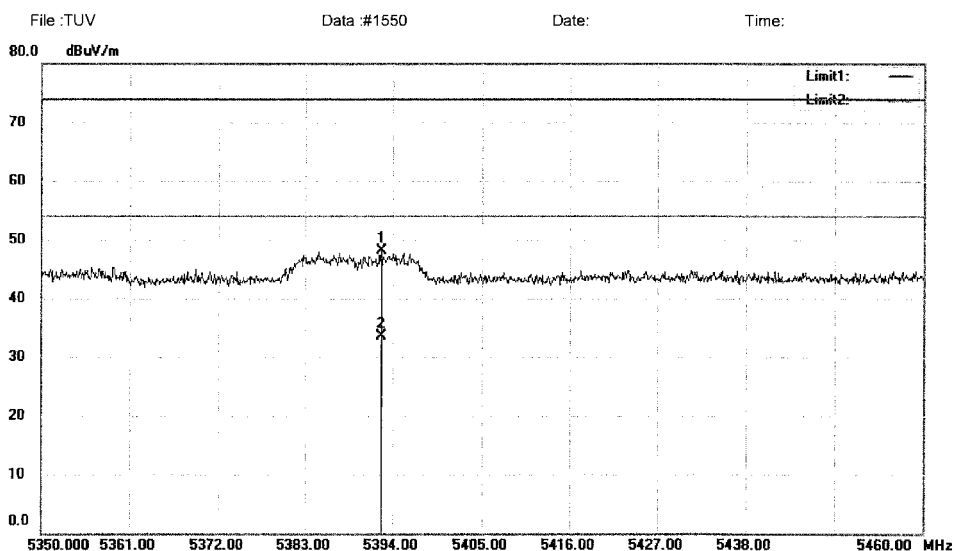
File: TUVData: #1552

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11a 5240
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5392.570	9.73	38.46	48.19	74.00	-25.81	peak		
2	*	5392.570	-4.86	38.46	33.60	54.00	-20.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

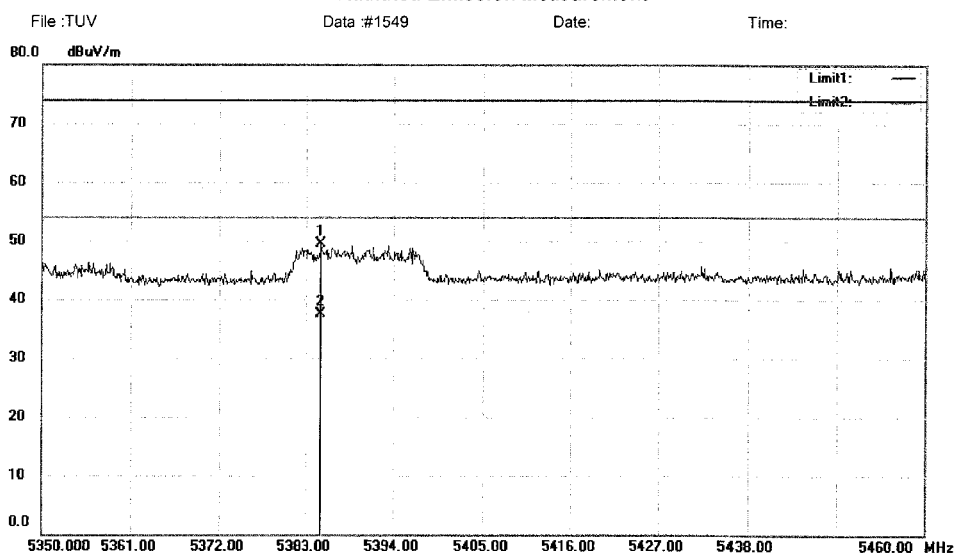
File: TUV\Data: #1550

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11a 5240
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5384.870	11.02	38.45	49.47	74.00	-24.53	peak		
2	*	5384.870	-0.85	38.45	37.60	54.00	-16.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

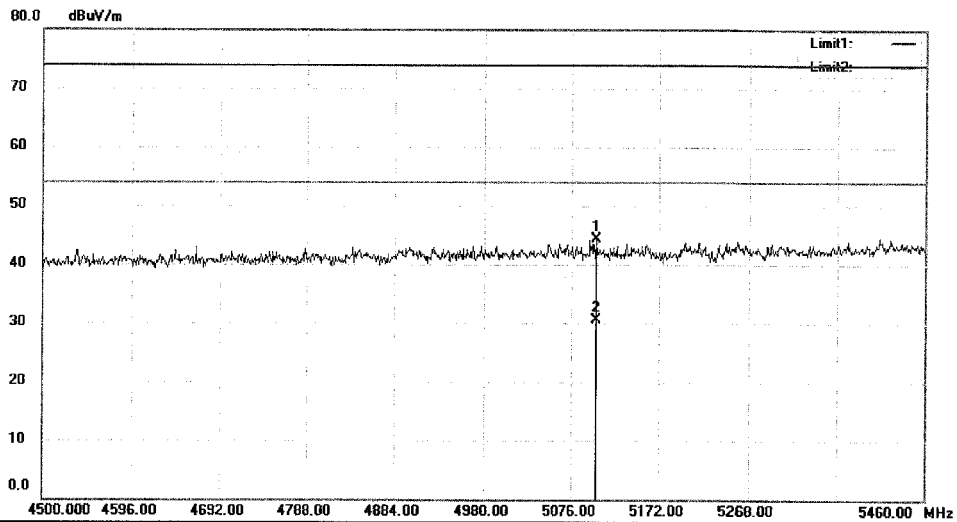
File :TUV\Data :#1549

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1553 Date: Time:



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5103.840	6.30	37.91	44.21	74.00	-29.79	peak		
2	*	5103.840	-7.41	37.91	30.50	54.00	-23.50	AVG		

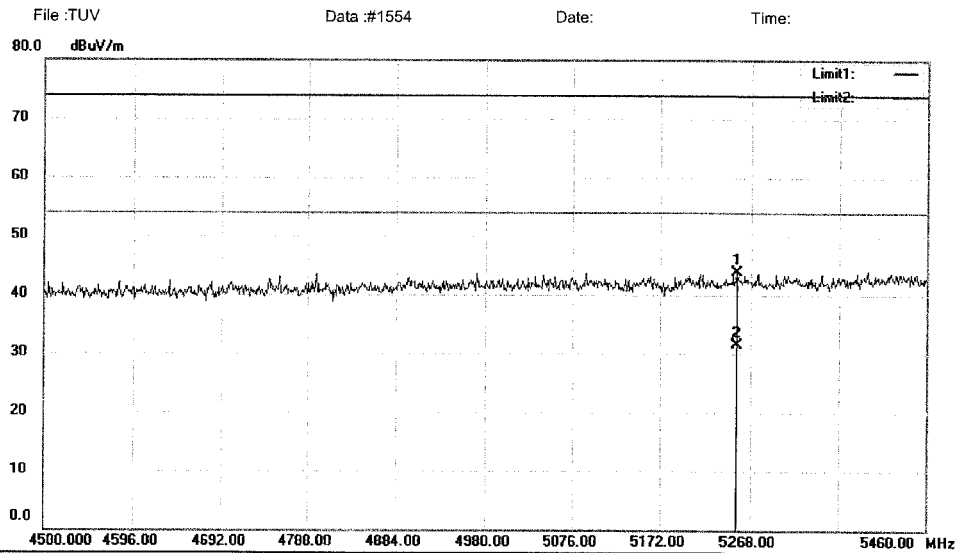
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1553

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5253.600	5.77	38.20	43.97	74.00	-30.03	peak		
2	*	5253.600	-6.60	38.20	31.60	54.00	-22.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

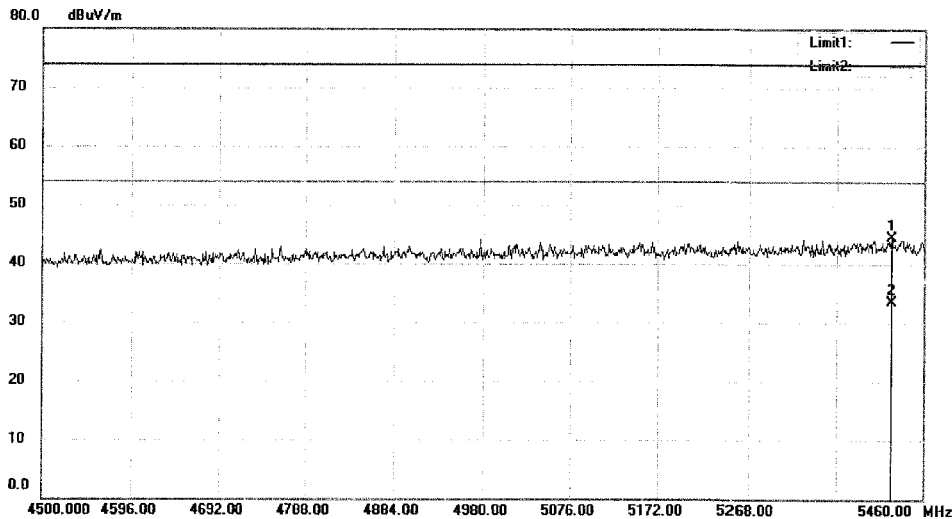
File: TUV\Data: #1554

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File : TUV Data : #1556 Date: Time:


 Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5424.480	5.99	38.53	44.52	74.00	-29.48	peak		
2	*	5424.480	-5.03	38.53	33.50	54.00	-20.50	AVG		

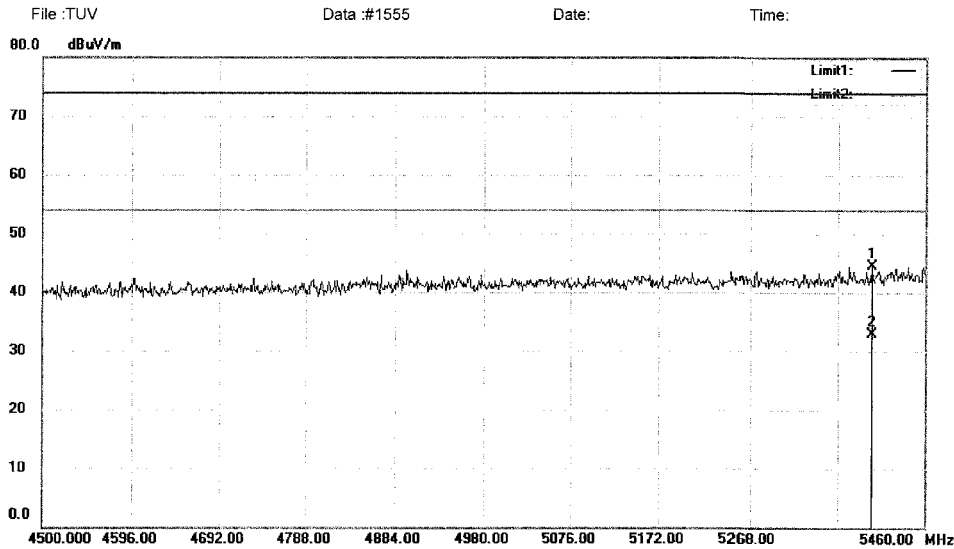
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUVData : #1556

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11a 5825
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5401.440	5.96	38.48	44.44	74.00	-29.56	peak		
2	*	5401.440	-5.48	38.48	33.00	54.00	-21.00	AVG		

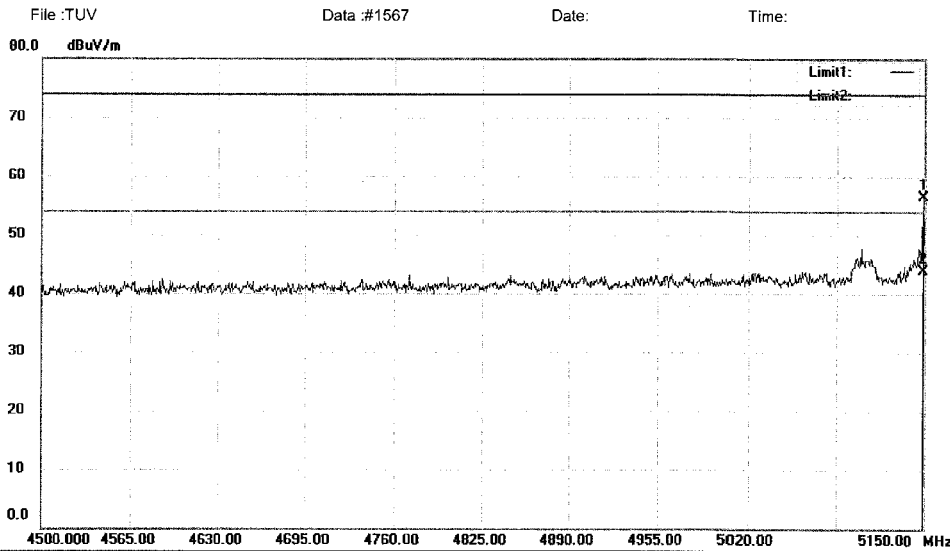
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1555

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5149.350	18.52	38.00	56.52	74.00	-17.48	peak		
2	*	5149.350	5.90	38.00	43.90	54.00	-10.10	AVG		

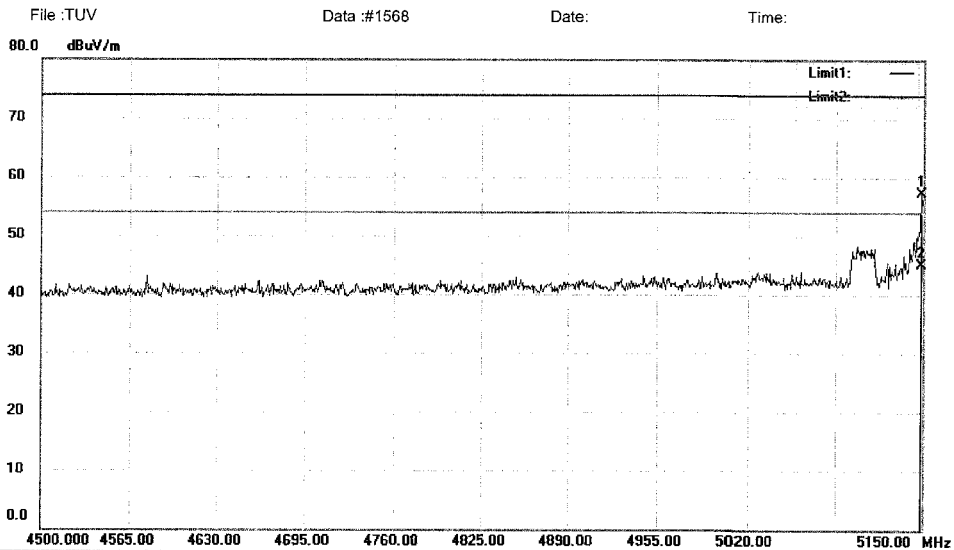
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1567

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5180
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5148.700	19.26	38.00	57.26	74.00	-16.74	peak		
2	*	5148.700	7.20	38.00	45.20	54.00	-8.80	AVG		

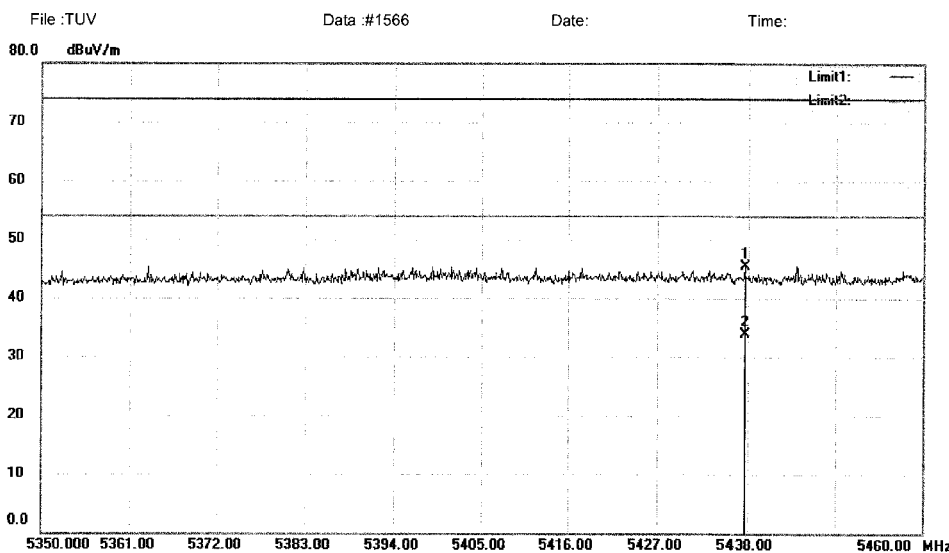
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1568

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5180
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		5437.560	6.99	38.55	45.54	74.00	-28.46			peak	
2	*	5437.560	-4.65	38.55	33.90	54.00	-20.10			AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

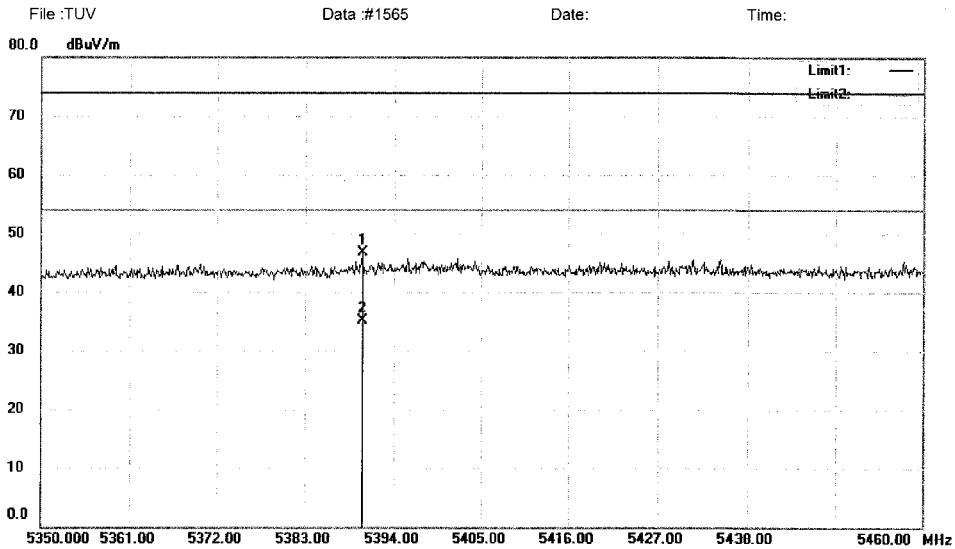
File: TUV\Data: #1566

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11n(20MHz) 5180
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5390.040	8.32	38.46	46.78	74.00	-27.22	peak		
2	*	5390.040	-3.36	38.46	35.10	54.00	-18.90	AVG		

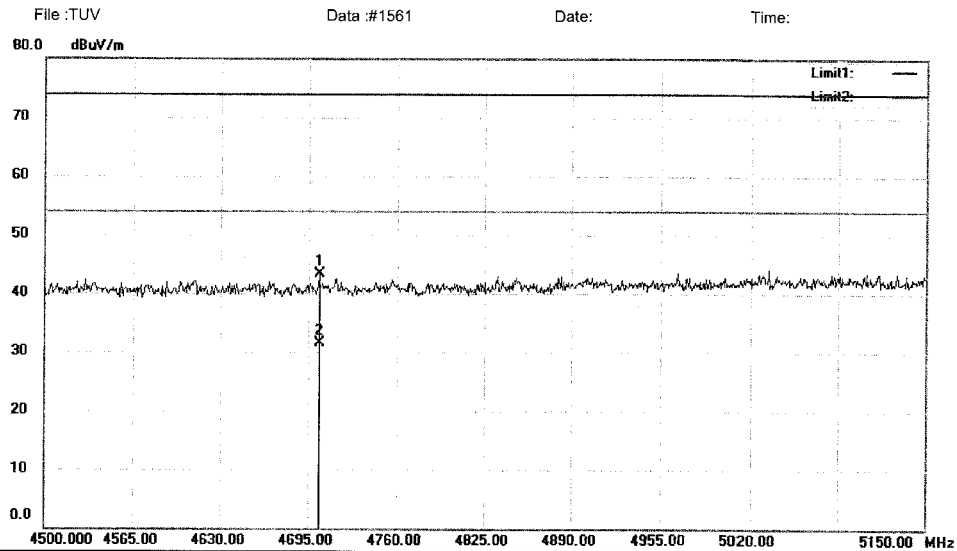
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1565

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)Restricted Band Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode: 11n(20MHz) 5240

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		4702.800	6.66	36.56	43.22	74.00	-30.78			peak	
2	*	4702.800	-4.96	36.56	31.60	54.00	-22.40			AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

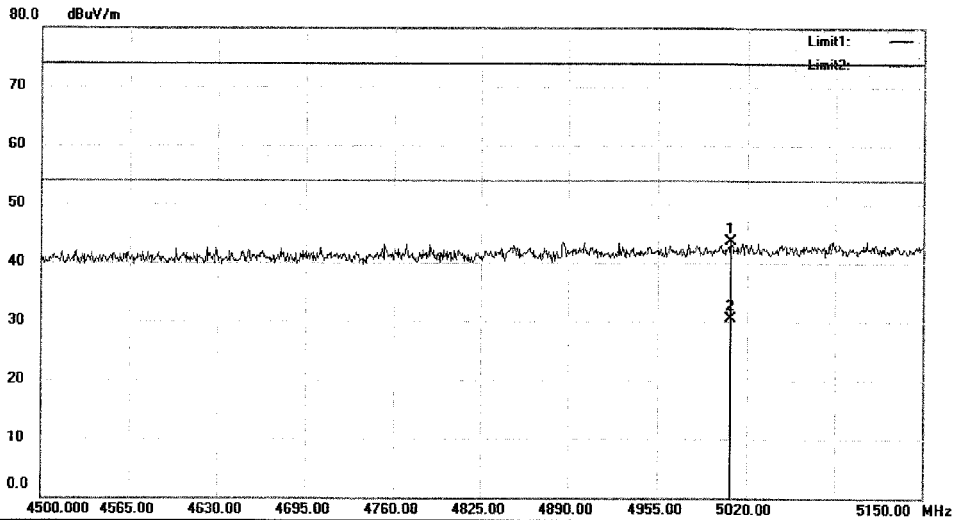
File: TUV\Data: #1561

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File :TUV Data :#1562 Date: Time:


 Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5008.300	6.05	37.73	43.78	74.00	-30.22	peak		
2	*	5008.300	-7.13	37.73	30.60	54.00	-23.40	AVG		

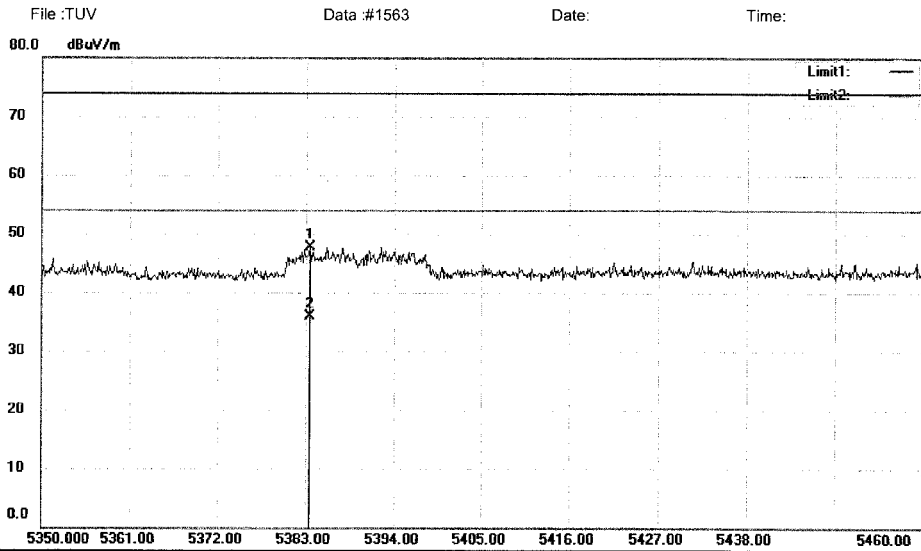
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1562

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5383.550	9.29	38.45	47.74	74.00	-26.26	peak		
2	*	5383.550	-2.55	38.45	35.90	54.00	-18.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

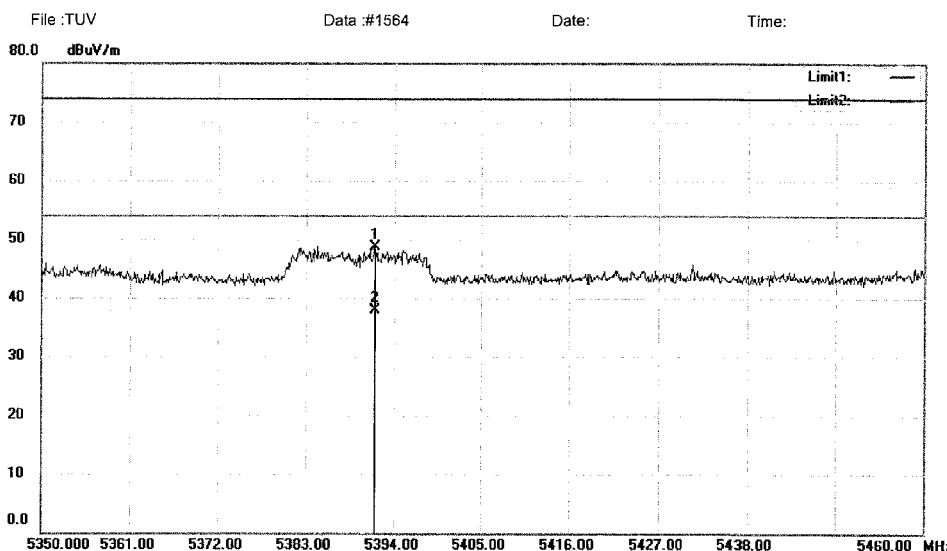
File: TUV\Data: #1563

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11n(20MHz) 5240
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5391.580	10.25	38.46	48.71	74.00	-25.29	peak		
2	*	5391.580	-0.56	38.46	37.90	54.00	-16.10	AVG		

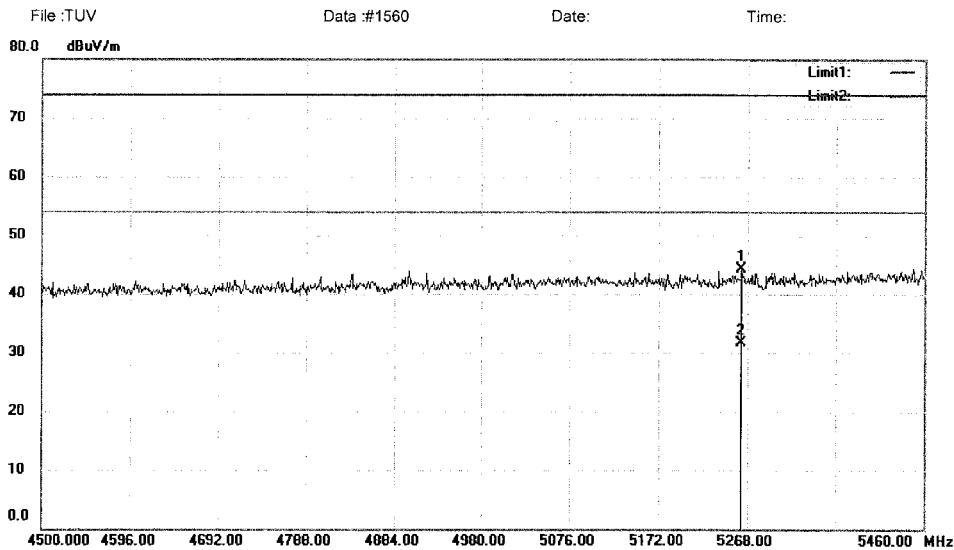
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1564

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11n(20MHz) 5745
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5261.280	6.11	38.22	44.33	74.00	-29.67	peak		
2	*	5261.280	-6.52	38.22	31.70	54.00	-22.30	AVG		

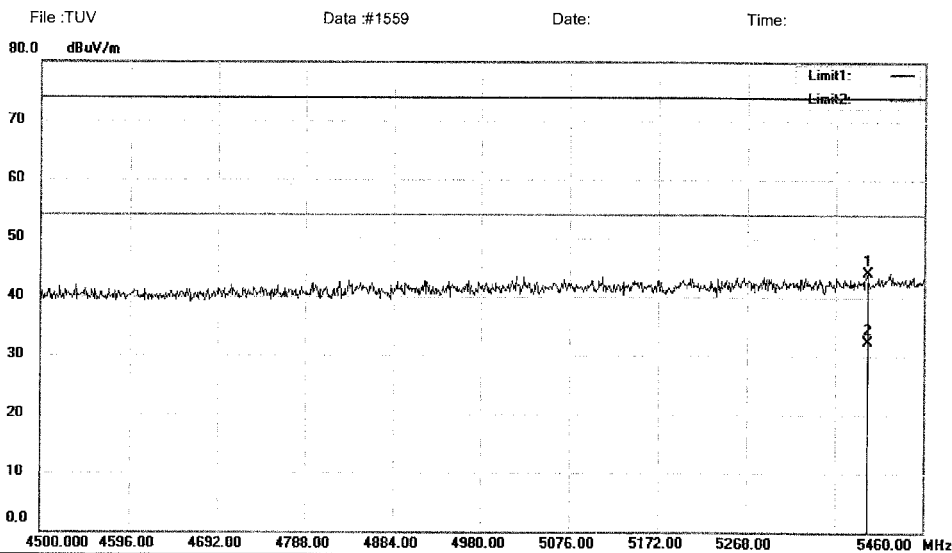
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1560

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5745
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5398.560	5.64	38.48	44.12	74.00	-29.88	peak		
2	*	5398.560	-6.08	38.48	32.40	54.00	-21.60	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1559

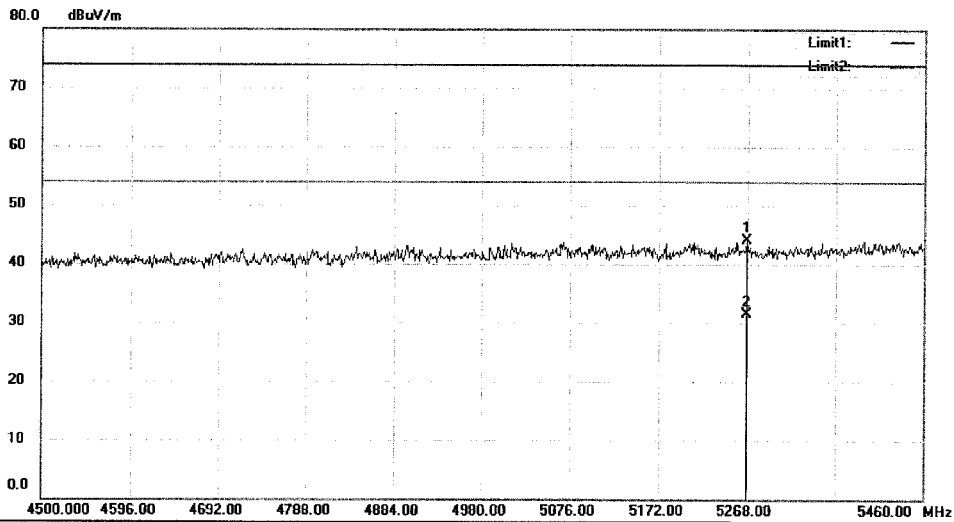
Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV Data :#1557 Date: Time:



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11n(20MHz) 5825
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5267.040	5.79	38.22	44.01	74.00	-29.99	peak		
2	*	5267.040	-6.62	38.22	31.60	54.00	-22.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

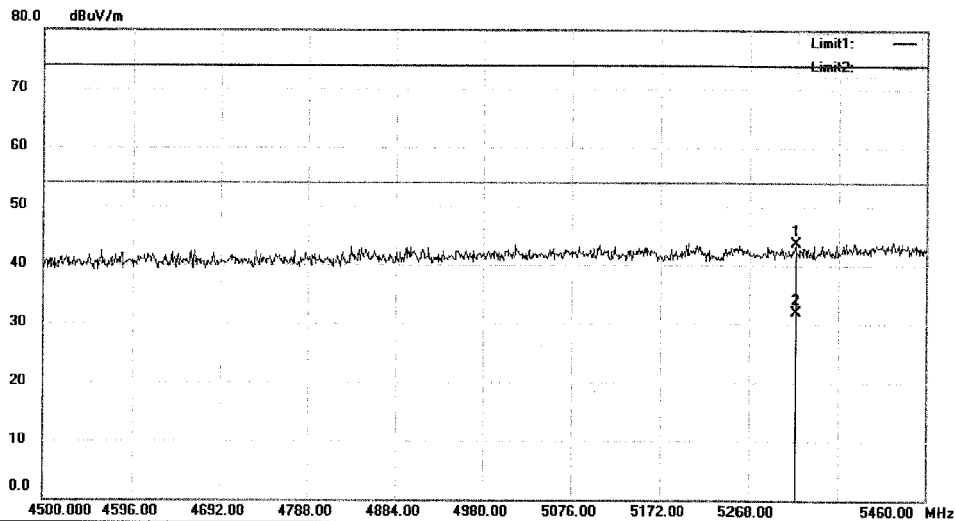
File :TUV\Data :#1557

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data #1558 Date: Time:



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(20MHz) 5825
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		5317.920	5.48	38.32	43.80	74.00	-30.20	peak		
2	*	5317.920	-6.42	38.32	31.90	54.00	-22.10	AVG		

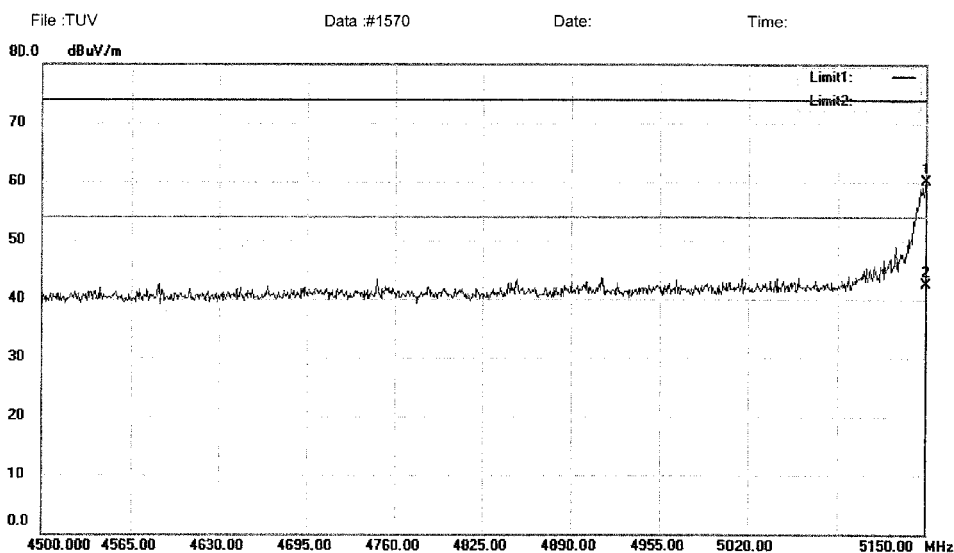
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData #1558

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5150.000	22.20	38.00	60.20	74.00	-13.80	peak		
2	*	5150.000	4.60	38.00	42.60	54.00	-11.40	AVG		

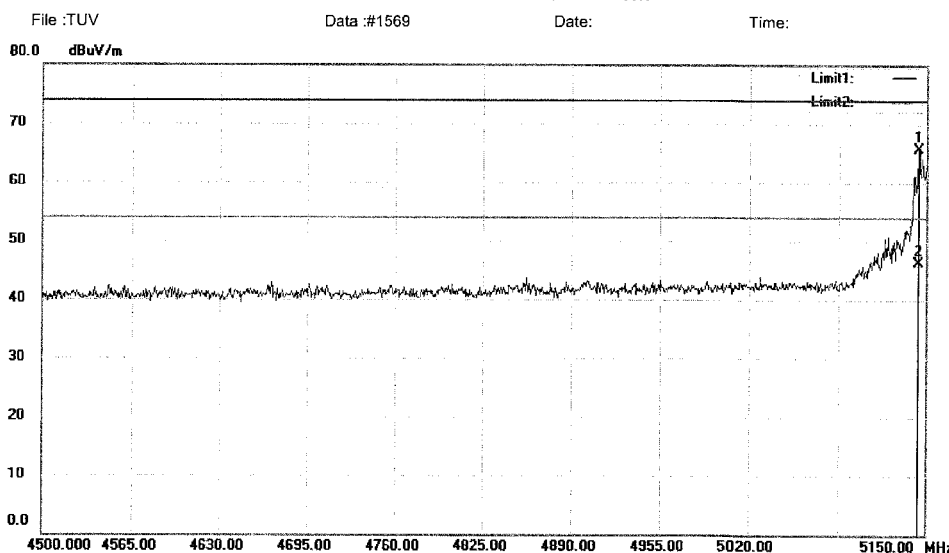
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1570

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5144.150	27.75	37.99	65.74	74.00	-8.26	peak		
2	*	5144.150	8.31	37.99	46.30	54.00	-7.70	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

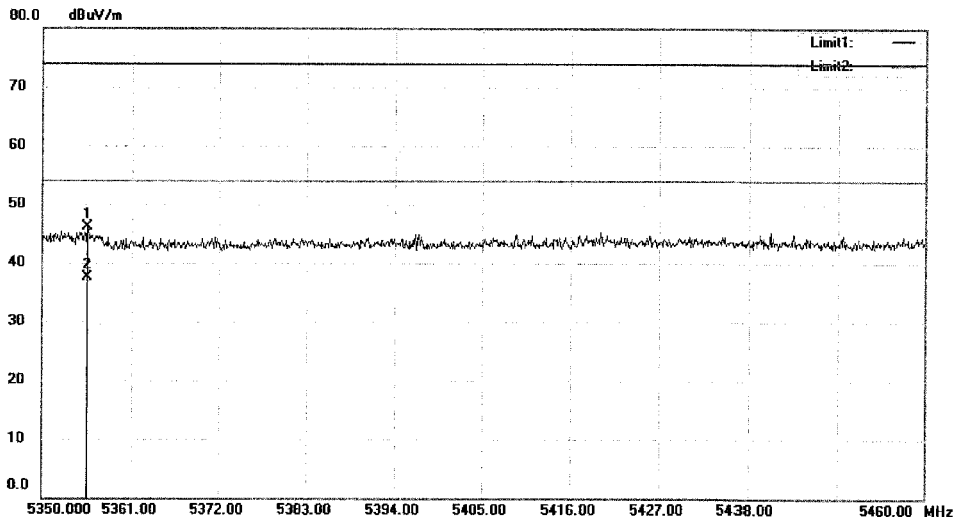
File :TUV\Data :#1569

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data #1571 Date: Time:



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5355.500	7.77	38.39	46.16	74.00	-27.84	peak		
2	*	5355.500	-0.79	38.39	37.60	54.00	-16.40	AVG		

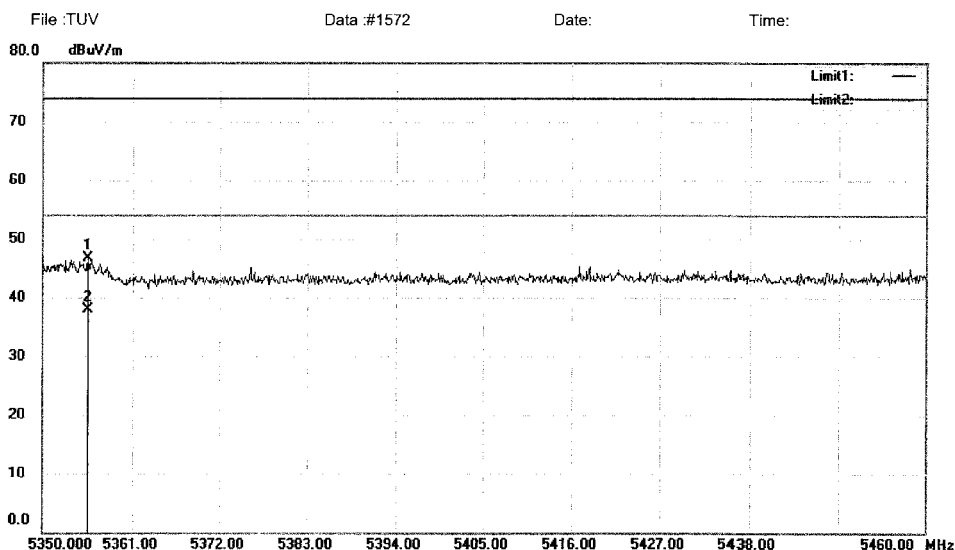
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1571

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5355.500	8.34	38.39	46.73	74.00	-27.27	peak		
2	*	5355.500	-0.49	38.39	37.90	54.00	-16.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

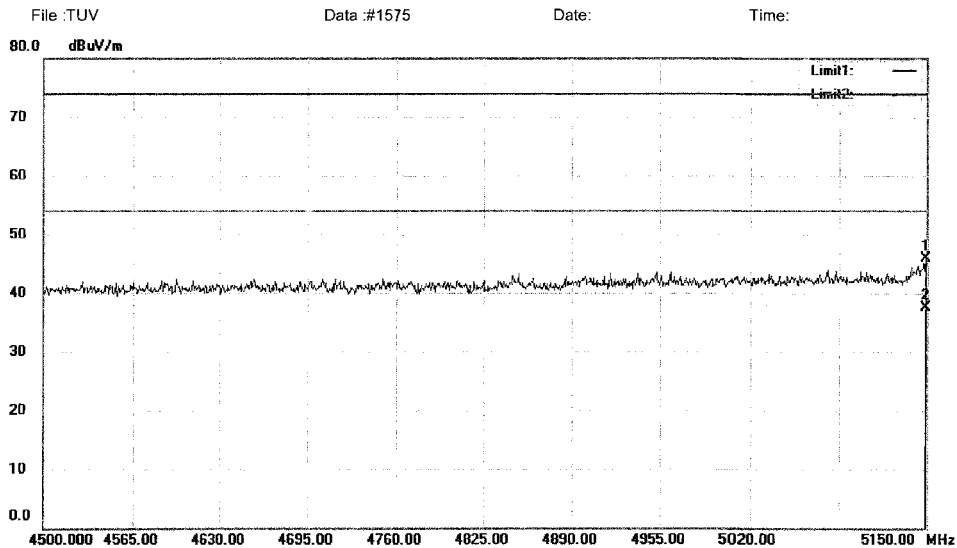
File :TUV\Data :#1572

Page: 1

Shenzhen EMTEK Co., Ltd.
81dg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11n(40MHz) 5230
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5149.350	8.00	38.00	46.00	74.00	-28.00	peak		
2	*	5149.350	-0.50	38.00	37.50	54.00	-16.50	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

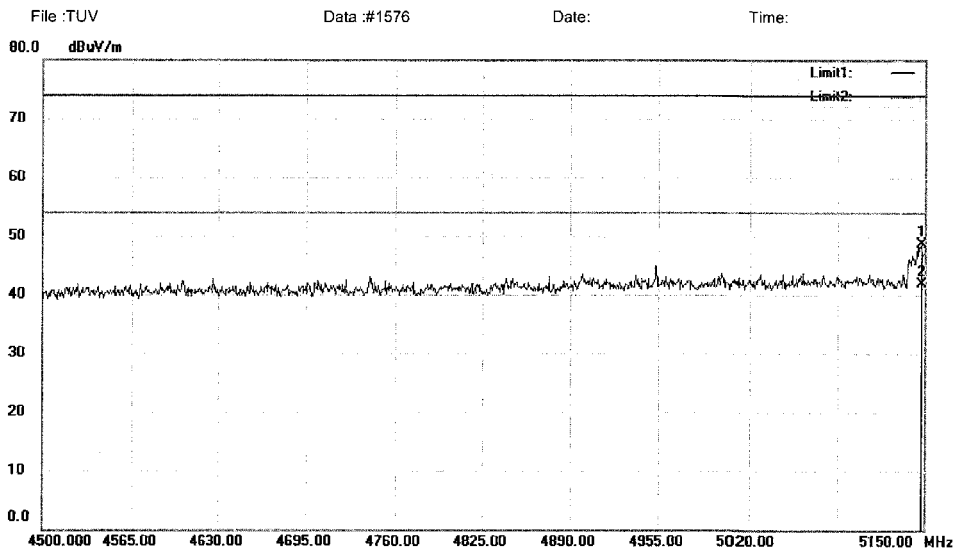
File :TUV\Data :#1575

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11n(40MHz) 5230
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5147.400	10.78	38.00	48.78	74.00	-25.22	peak		
2	*	5147.400	4.00	38.00	42.00	54.00	-12.00	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

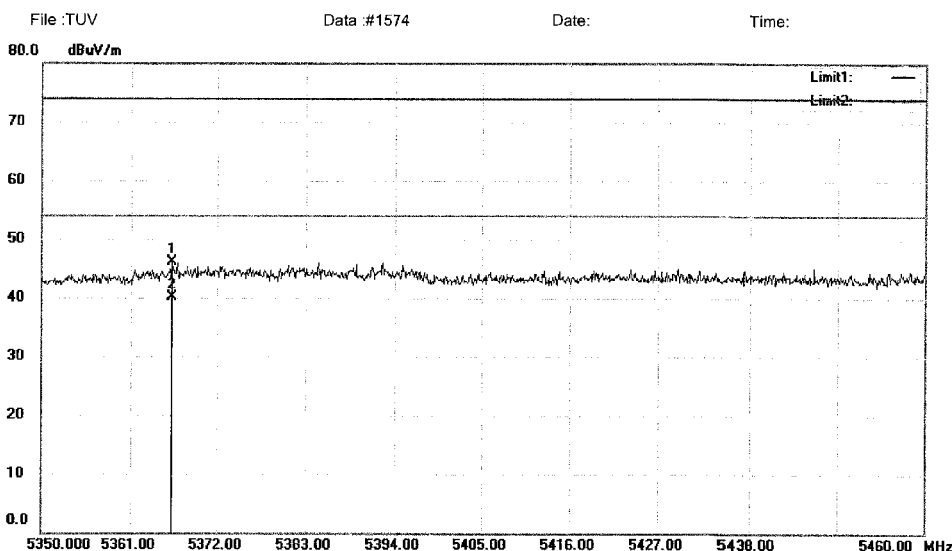
File :TUV\Data :#1576

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11n(40MHz) 5230
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5366.170	7.67	38.41	46.08	74.00	-27.92	peak		
2	*	5366.170	1.69	38.41	40.10	54.00	-13.90	AVG		

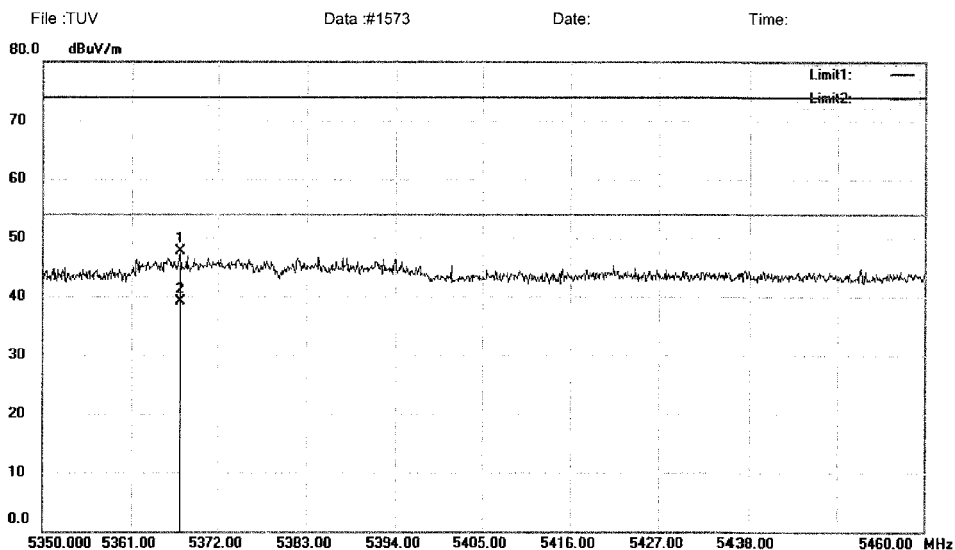
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1574

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5367.160	9.21	38.41	47.62	74.00	-26.38	peak		
2	*	5367.160	0.79	38.41	39.20	54.00	-14.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

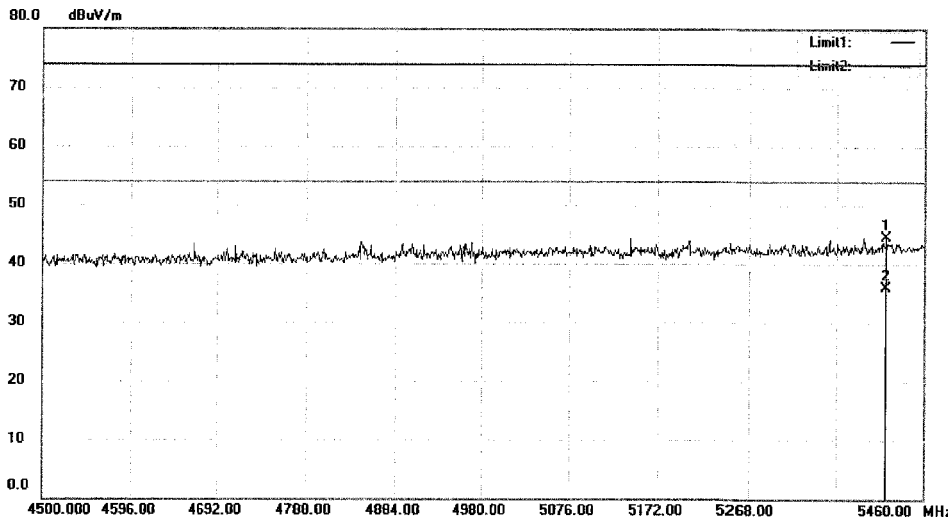
File :TUV\Data :#1573

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1577 Date: Time:



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5418.720	5.96	38.51	44.47	74.00	-29.53	peak		
2	*	5418.720	-2.51	38.51	36.00	54.00	-18.00	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

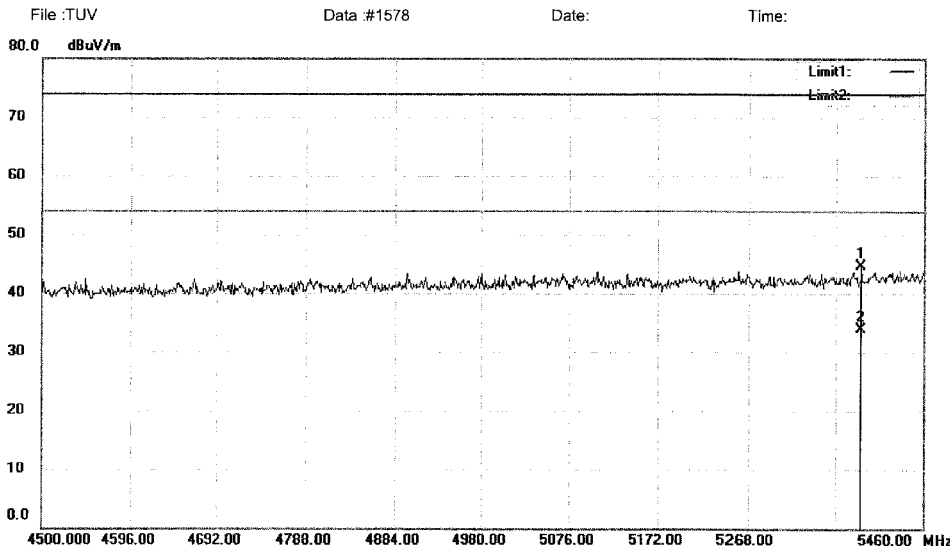
File :TUV\Data :#1577

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11n(40MHz) 5755
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5391.840	6.23	38.46	44.69	74.00	-29.31	peak		
2	*	5391.840	-4.56	38.46	33.90	54.00	-20.10	AVG		

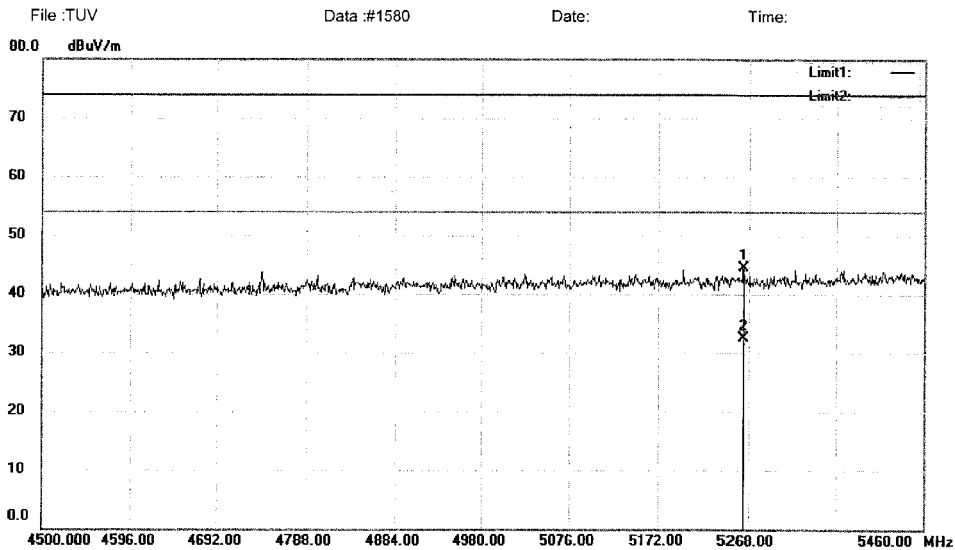
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1578

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5262.240	6.34	38.22	44.56	74.00	-29.44	peak		
2	*	5262.240	-5.72	38.22	32.50	54.00	-21.50	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

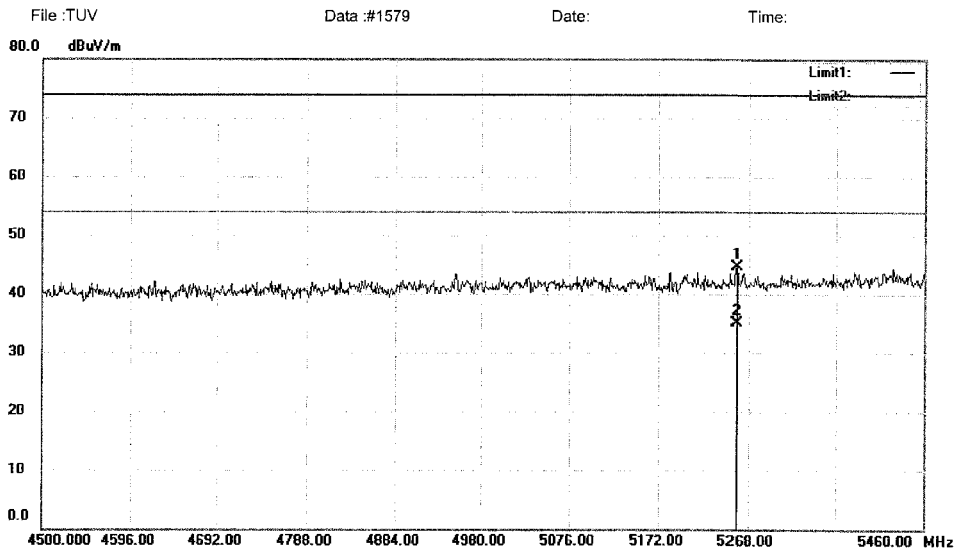
File :TUV\Data :#1580

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11n(40MHz) 5795
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5255.520	6.52	38.20	44.72	74.00	-29.28	peak		
2	*	5255.520	-3.00	38.20	35.20	54.00	-18.80	AVG		

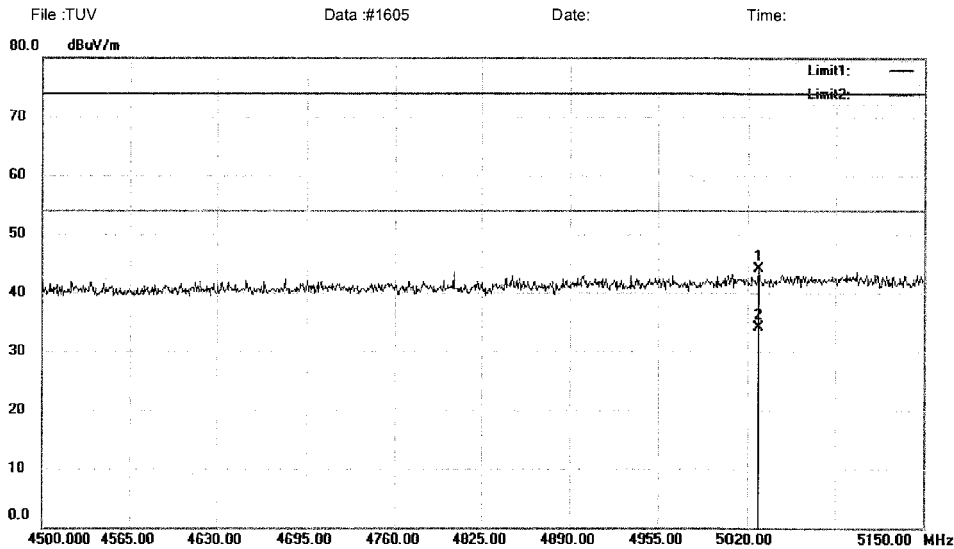
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1579

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5028.450	6.38	37.76	44.14	74.00	-29.86	peak		
2	*	5028.450	-3.66	37.76	34.10	54.00	-19.90	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

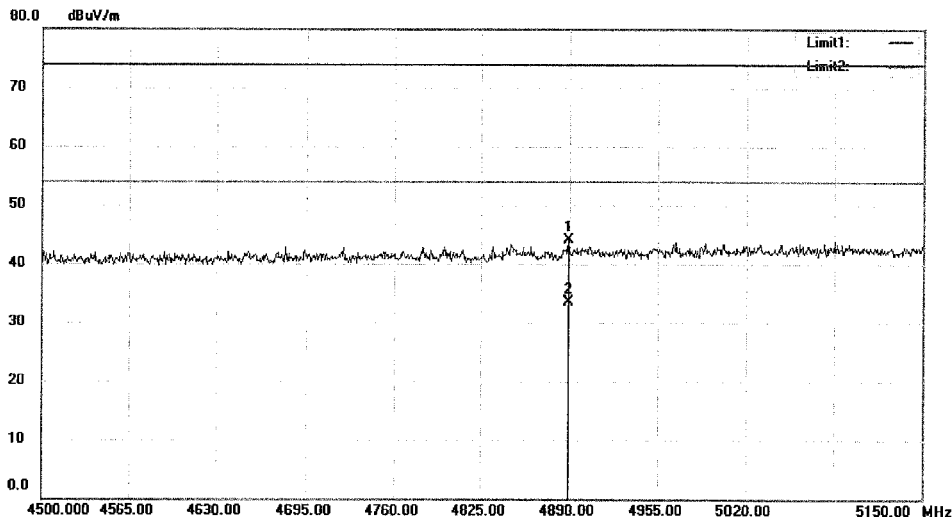
File :TUVData :#1605

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1606 Date: Time:



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		4889.350	7.16	37.03	44.19	74.00	-29.81	peak		
2	*	4889.350	-3.43	37.03	33.60	54.00	-20.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

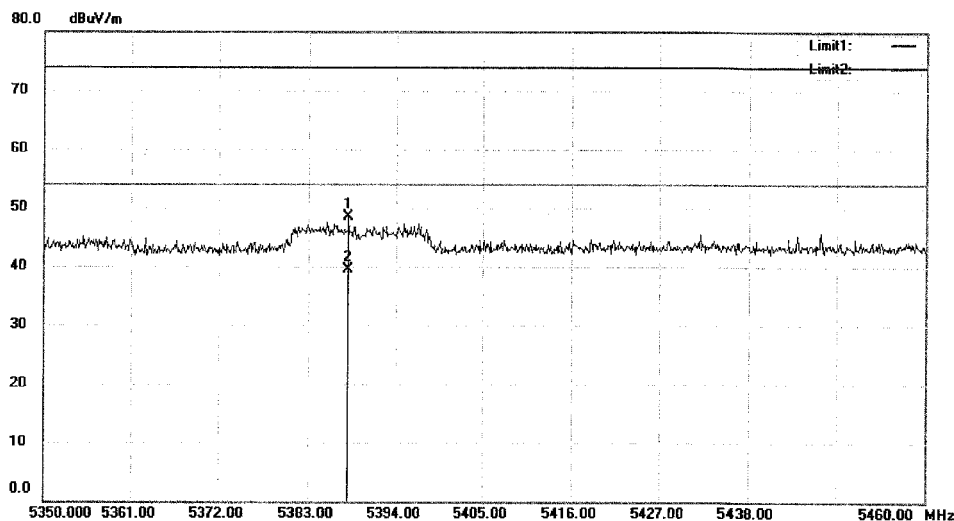
File :TUV\Data :#1606

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1604 Date: Time:



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5387.950	9.98	38.46	48.44	74.00	-25.56	peak		
2	*	5387.950	1.04	38.46	39.50	54.00	-14.50	AVG		

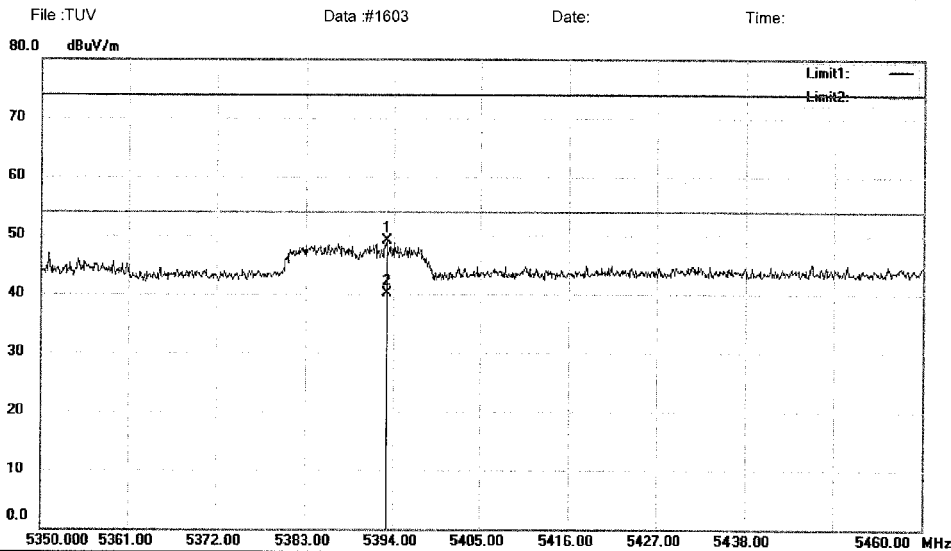
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1604

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5393.120	10.63	38.46	49.09	74.00	-24.91	peak		
2	*	5393.120	1.64	38.46	40.10	54.00	-13.90	AVG		

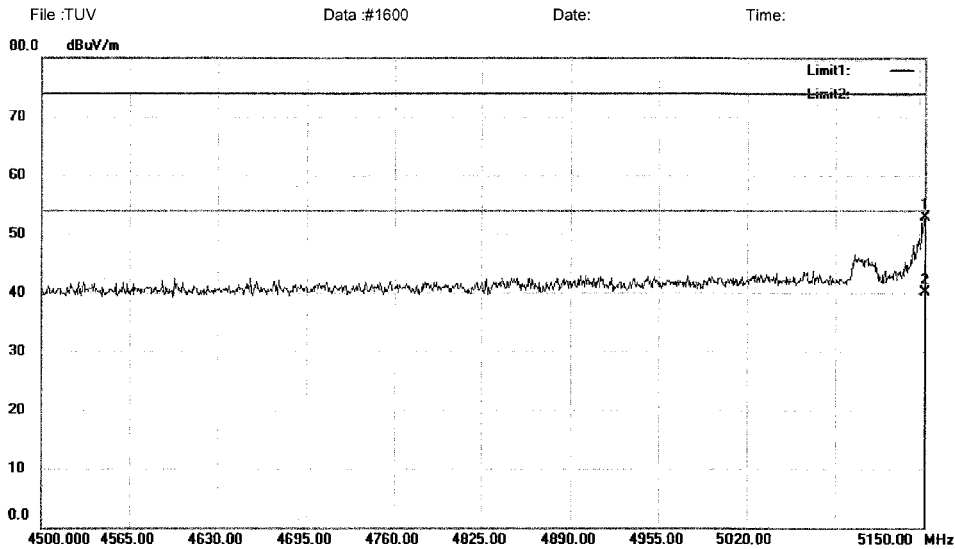
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1603

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5150.000	14.94	38.00	52.94	74.00	-21.06	peak		
2	*	5150.000	2.10	38.00	40.10	54.00	-13.90	AVG		

*:Maximum data x:Over limit l:over margin

Operator: KK

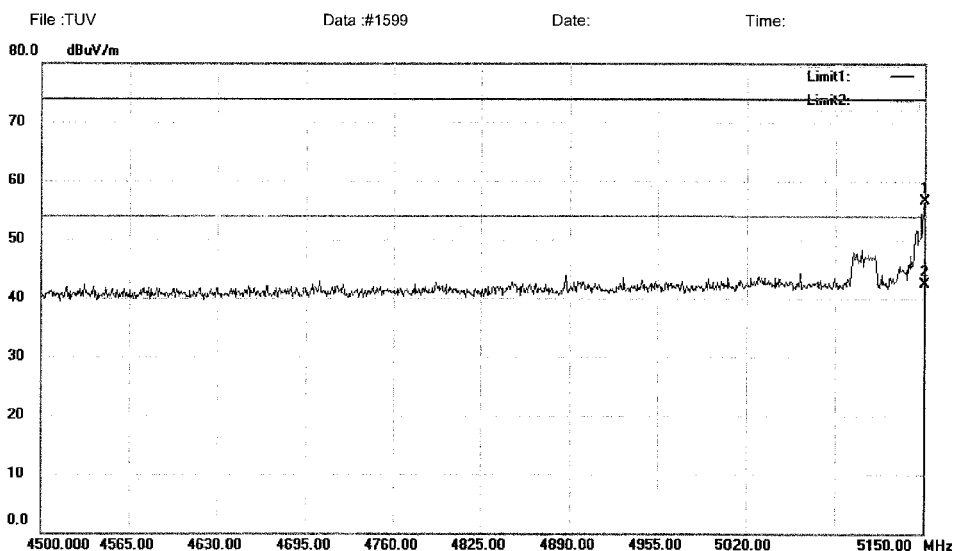
File :TUV\Data :#1600

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11ac(20MHz) 5180
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5150.000	18.66	38.00	56.66	74.00	-17.34	peak		
2	*	5150.000	4.60	38.00	42.60	54.00	-11.40	AVG		

*:Maximum data x:Over limit l:over margin

Operator: KK

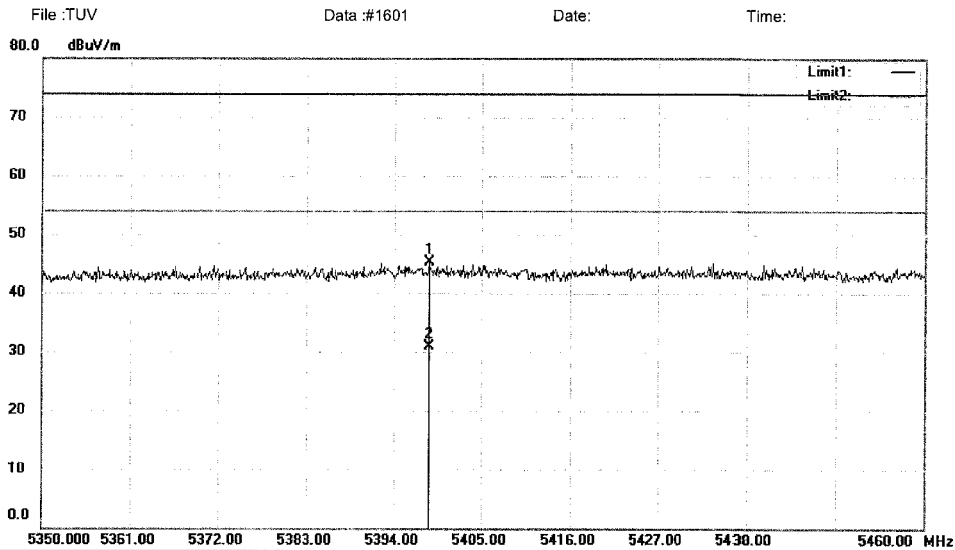
File :TUV\Data :#1599

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11ac(20MHz) 5180
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5398.400	6.91	38.48	45.39	74.00	-28.61	peak		
2	*	5398.400	-7.58	38.48	30.90	54.00	-23.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

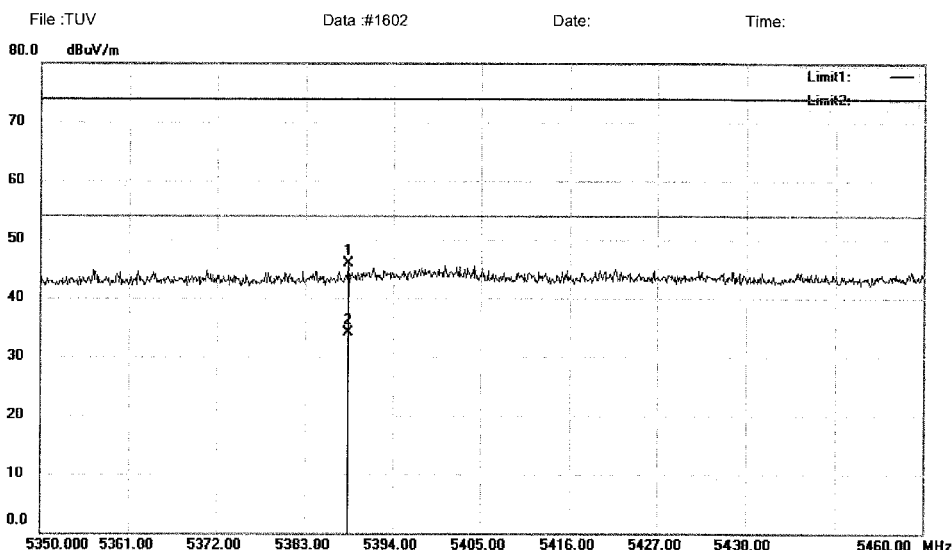
File :TUV\Data :#1601

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11ac(20MHz) 5180
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5388.280	7.38	38.46	45.84	74.00	-28.16	peak		
2	*	5388.280	-4.26	38.46	34.20	54.00	-19.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

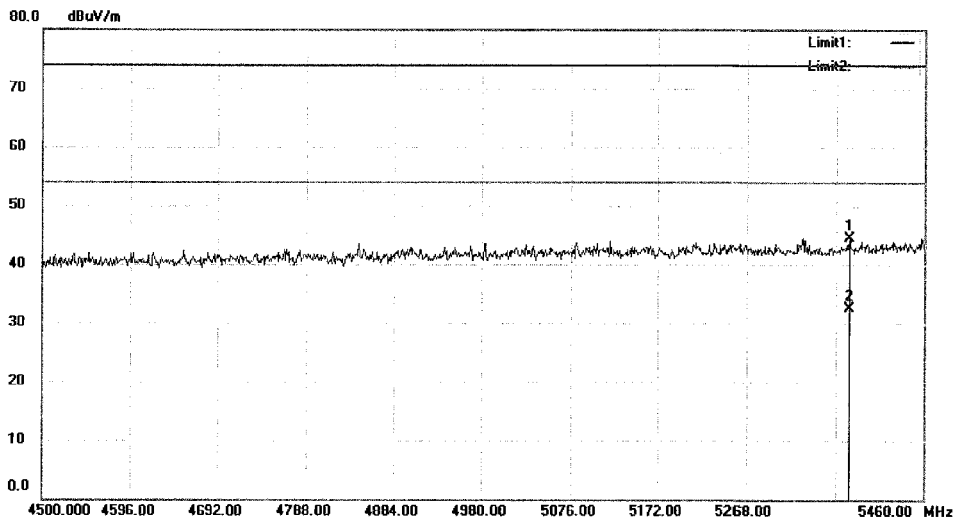
File :TUV\Data :#1602

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV Data : #1607 Date: Time:



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5378.400	6.07	38.44	44.51	74.00	-29.49	peak		
2	*	5378.400	-5.94	38.44	32.50	54.00	-21.50	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

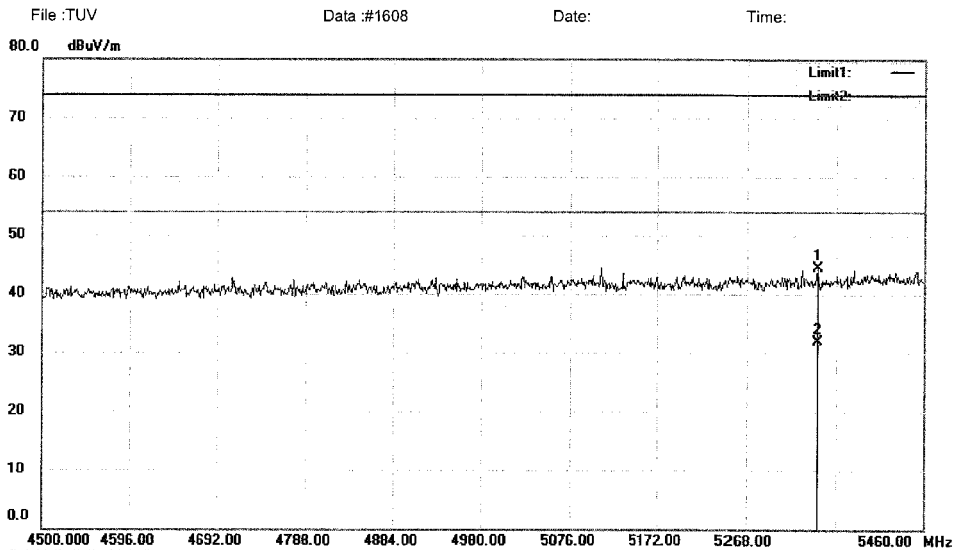
File : TUV\Data : #1607

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11ac(20MHz) 5745
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5343.840	6.19	38.38	44.57	74.00	-29.43	peak		
2	*	5343.840	-6.48	38.38	31.90	54.00	-22.10	AVG		

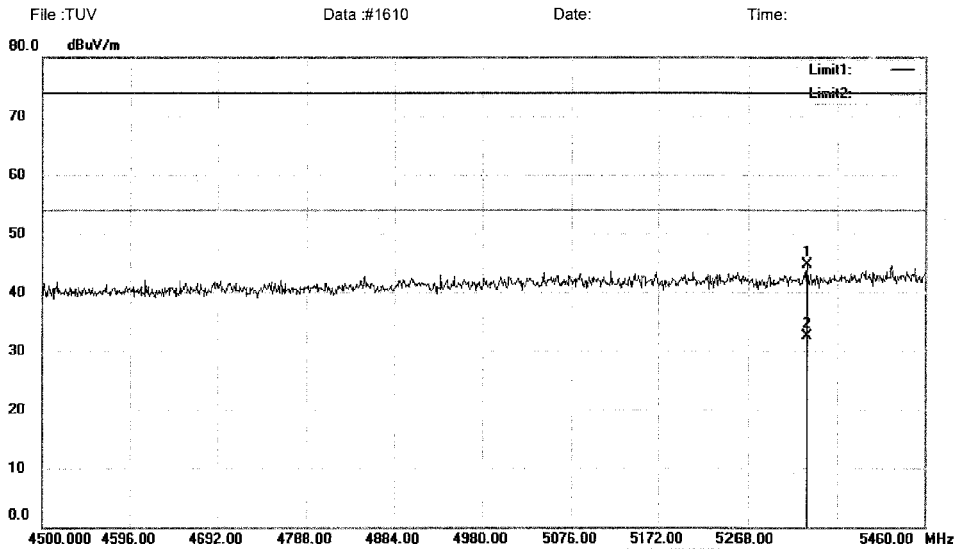
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1608

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5331.360	6.26	38.35	44.61	74.00	-29.39	peak		
2	*	5331.360	-5.85	38.35	32.50	54.00	-21.50	AVG		

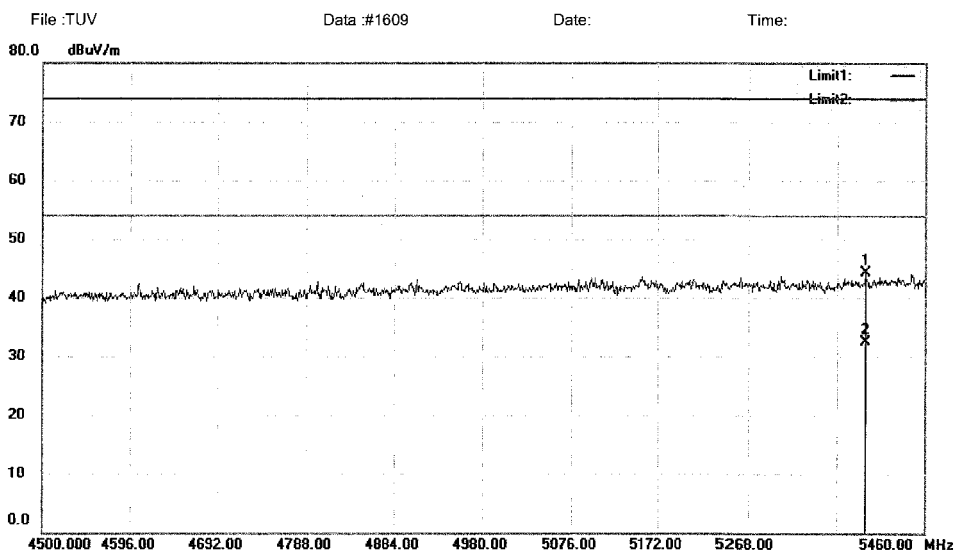
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1610

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(20MHz) 5825
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5394.720	5.74	38.48	44.22	74.00	-29.78	peak		
2	*	5394.720	-5.88	38.48	32.60	54.00	-21.40	AVG		

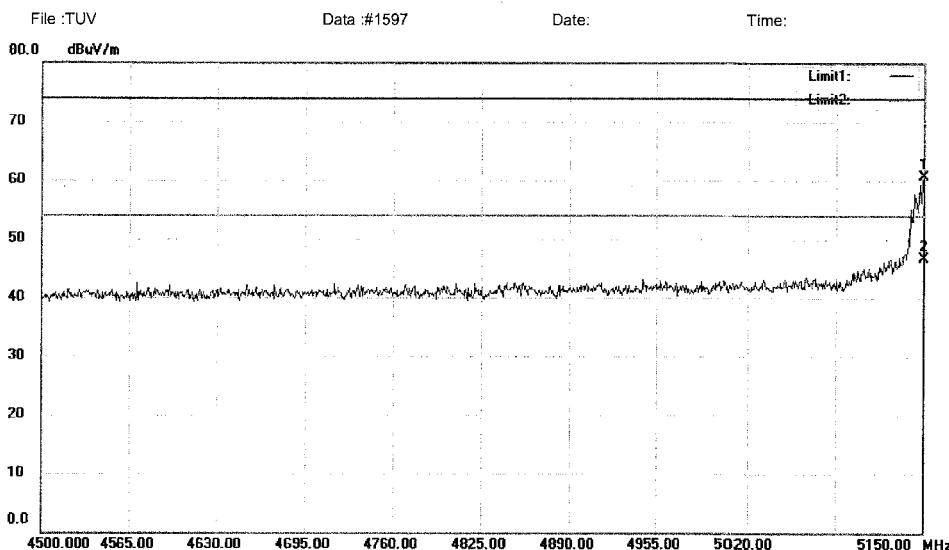
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1609

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wali board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5150.000	22.69	38.00	60.69	74.00	-13.31	peak		
2	*	5150.000	8.70	38.00	46.70	54.00	-7.30	AVG		

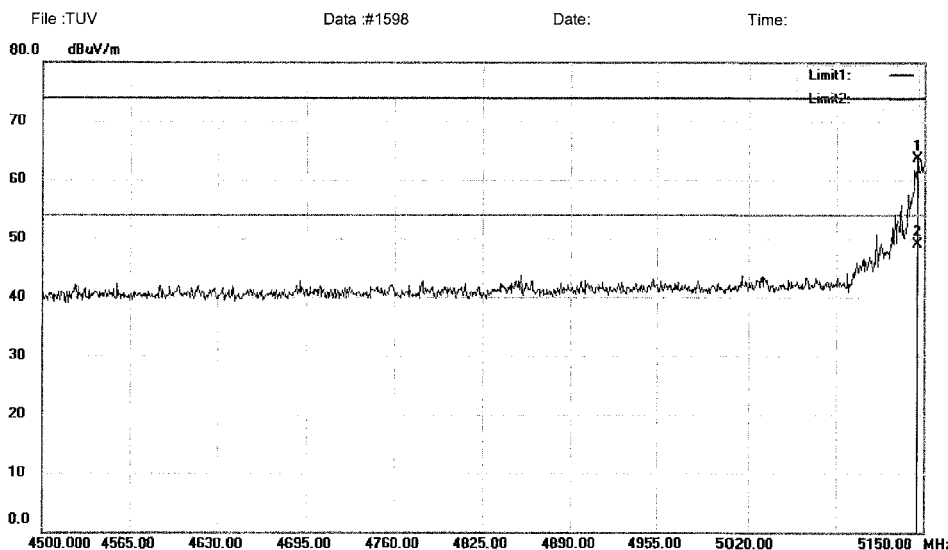
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1597

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5145.450	25.76	37.99	63.75	74.00	-10.25	peak		
2	*	5145.450	11.11	37.99	49.10	54.00	-4.90	AVG		

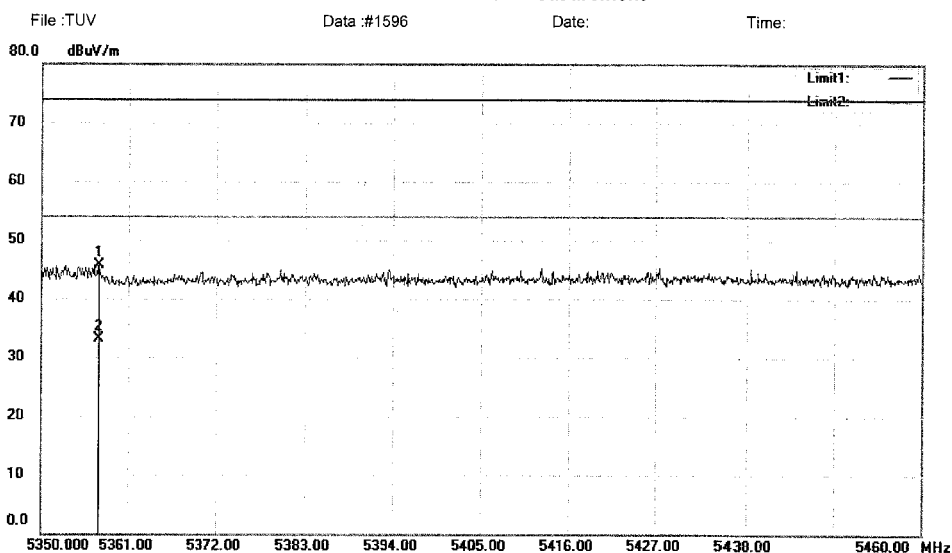
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1598

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5357.260	7.37	38.40	45.77	74.00	-28.23	peak		
2	*	5357.260	-5.20	38.40	33.20	54.00	-20.80	AVG		

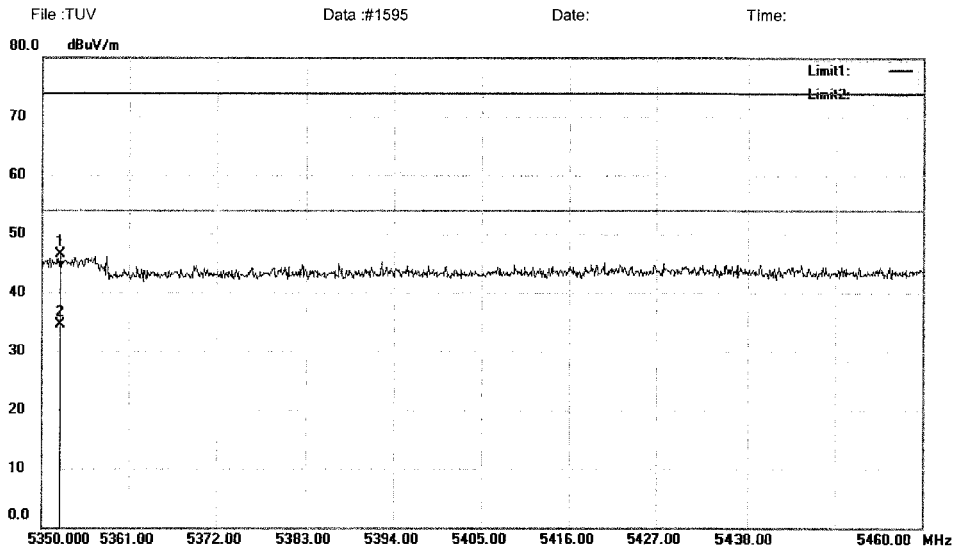
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1596

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5352.310	8.03	38.39	46.42	74.00	-27.58	peak		
2	*	5352.310	-3.79	38.39	34.60	54.00	-19.40	AVG		

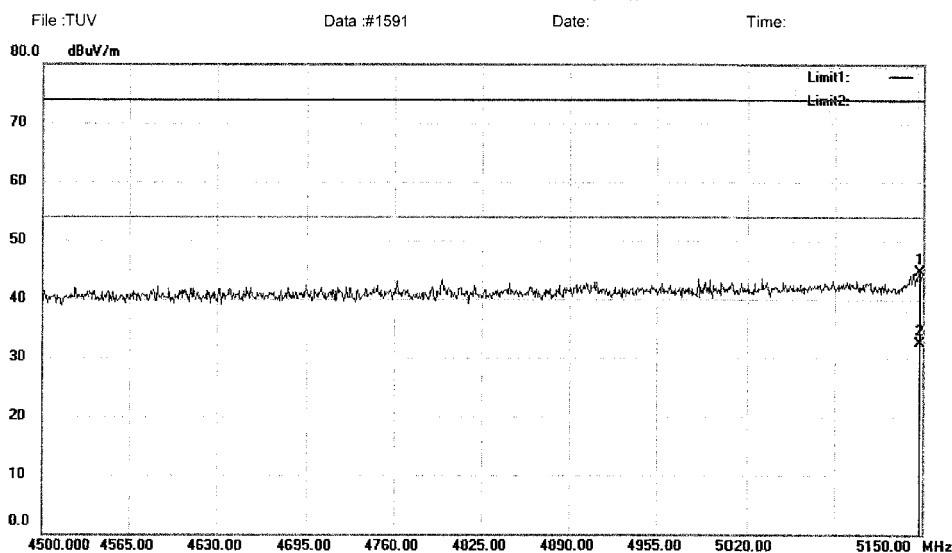
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1595

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)Restricted Band Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Wall board 32" Tablet

M/N: P-WAL-106-YIT-01

Mode:11ac(40MHz) 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5148.050	6.79	38.00	44.79	74.00	-29.21	peak		
2	*	5148.050	-5.40	38.00	32.60	54.00	-21.40	AVG		

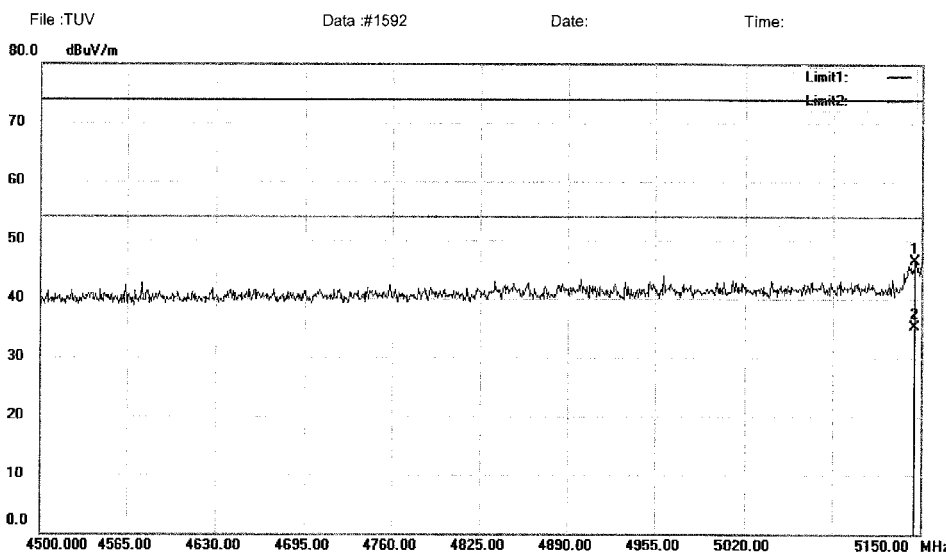
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1591

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5145.450	8.50	37.99	46.49	74.00	-27.51	peak		
2	*	5145.450	-2.59	37.99	35.40	54.00	-18.60	AVG		

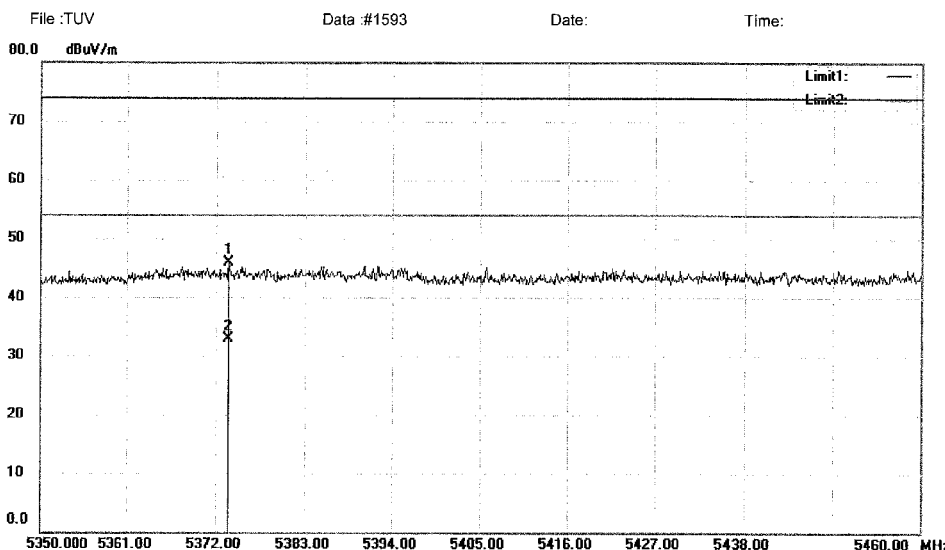
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1592

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5373.540	7.51	38.43	45.94	74.00	-28.06	peak		
2	*	5373.540	-5.53	38.43	32.90	54.00	-21.10	AVG		

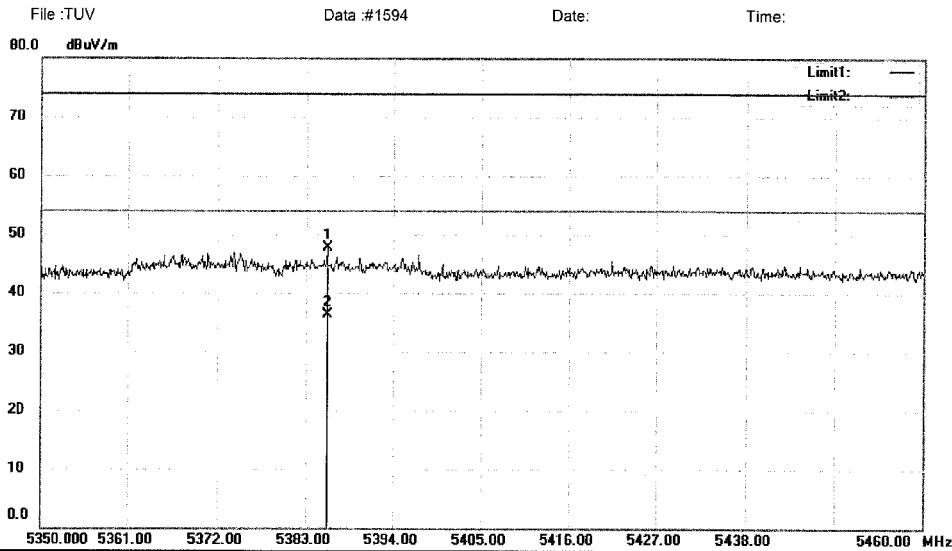
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1593

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5385.640	9.30	38.46	47.76	74.00	-26.24	peak		
2	*	5385.640	-2.06	38.46	36.40	54.00	-17.60	AVG		

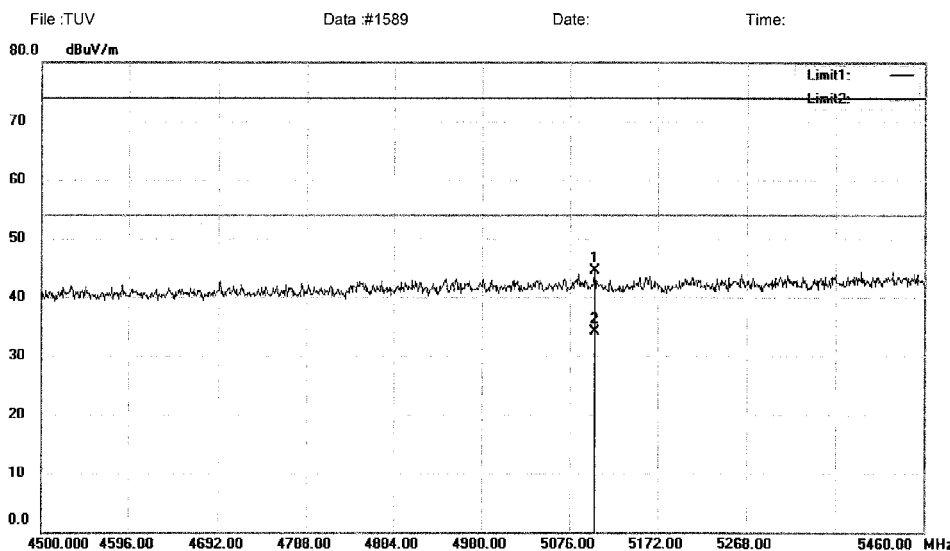
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1594

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5755
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5103.840	6.68	37.91	44.59	74.00	-29.41	peak		
2	*	5103.840	-3.71	37.91	34.20	54.00	-19.80	AVG		

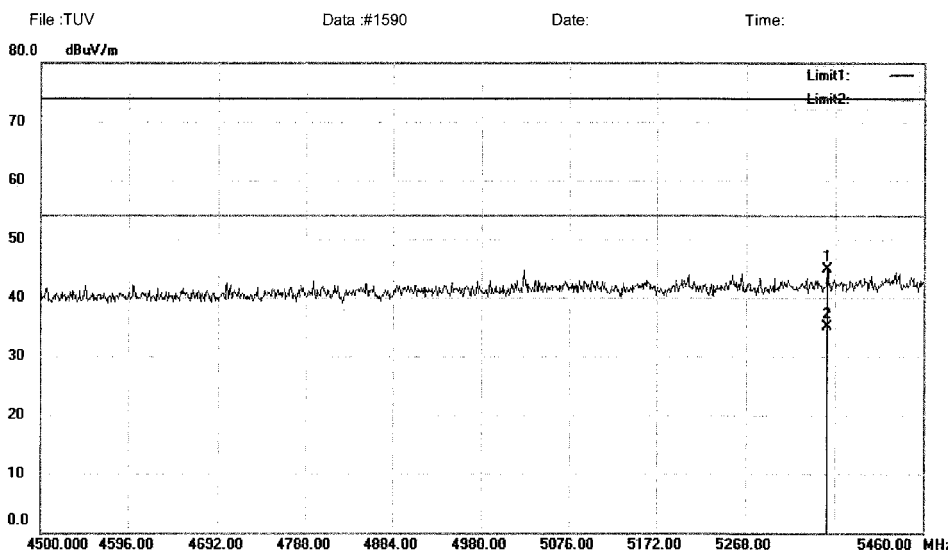
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1589

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5355.360	6.50	38.39	44.89	74.00	-29.11	peak		
2	*	5355.360	-3.19	38.39	35.20	54.00	-18.80	AVG		

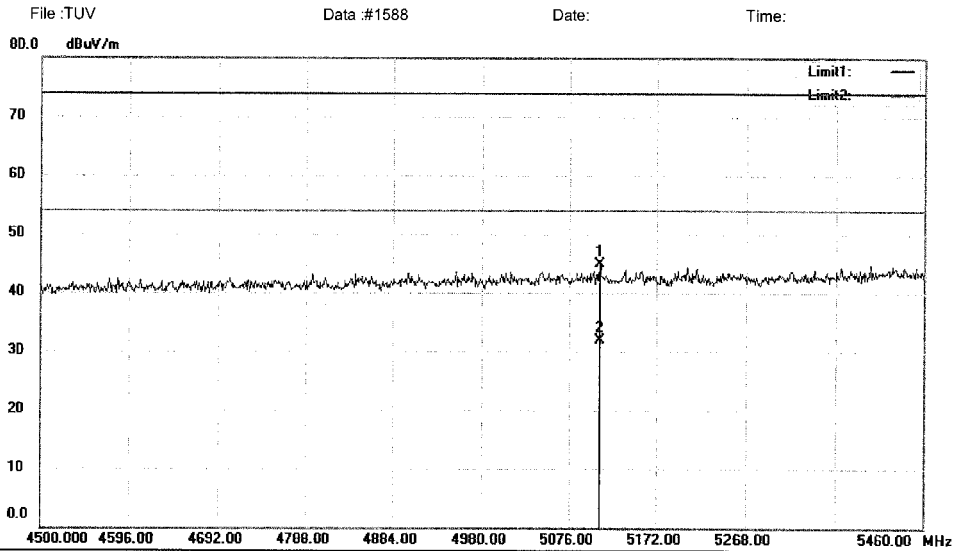
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1590

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5109.600	6.93	37.92	44.85	74.00	-29.15	peak		
2	*	5109.600	-6.02	37.92	31.90	54.00	-22.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

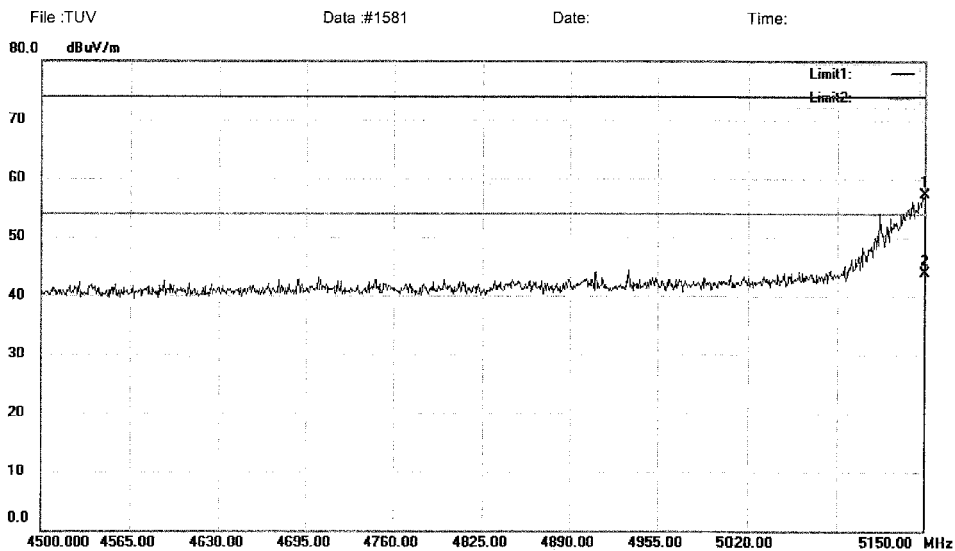
File: TUV\Data: #1588

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11ac(80MHz) 5210
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		5150.000	19.28	38.00	57.28	74.00	-16.72	peak		
2	*	5150.000	5.90	38.00	43.90	54.00	-10.10	AVG		

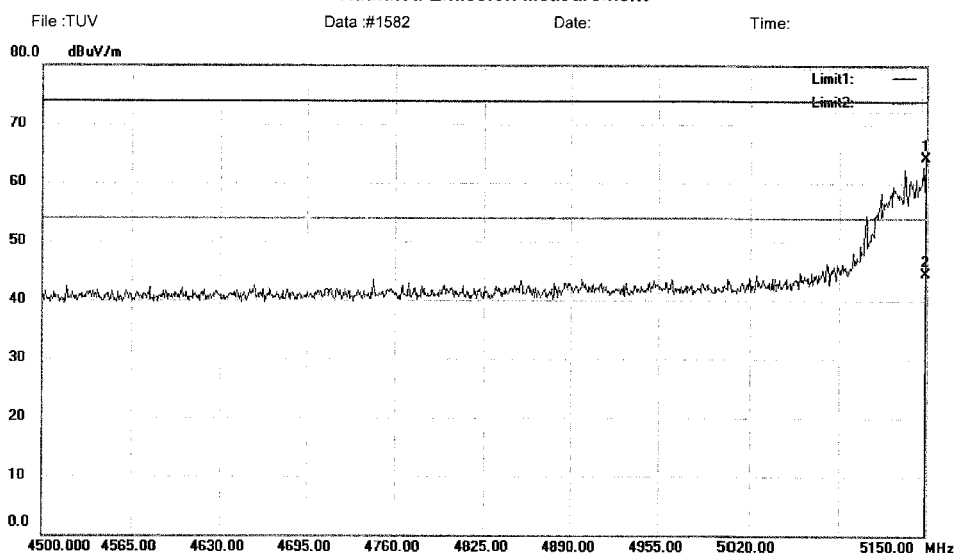
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1581

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5149.350	26.39	38.00	64.39	74.00	-9.61	peak		
2	*	5149.350	6.60	38.00	44.60	54.00	-9.40	AVG		

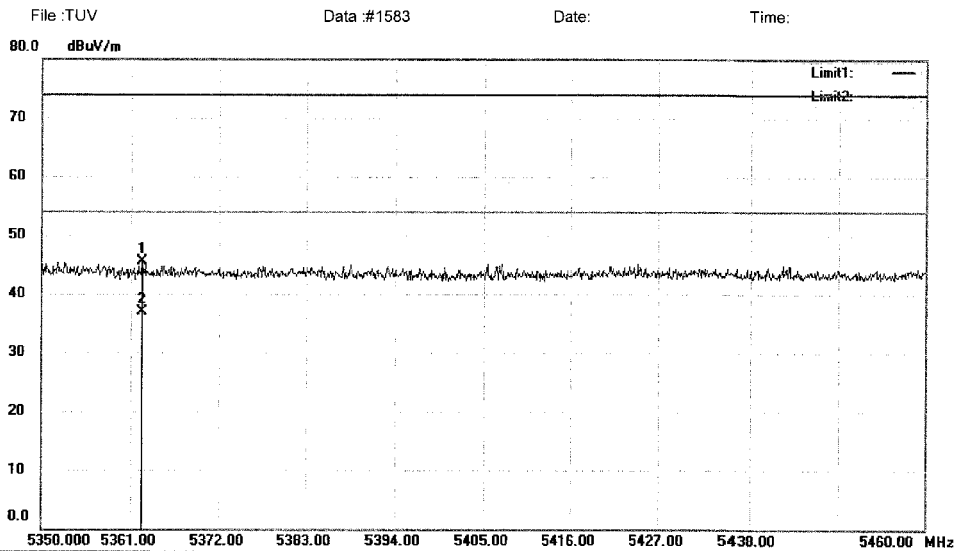
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1582

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5362.430	7.08	38.41	45.49	74.00	-28.51	peak		
2	*	5362.430	-1.51	38.41	36.90	54.00	-17.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

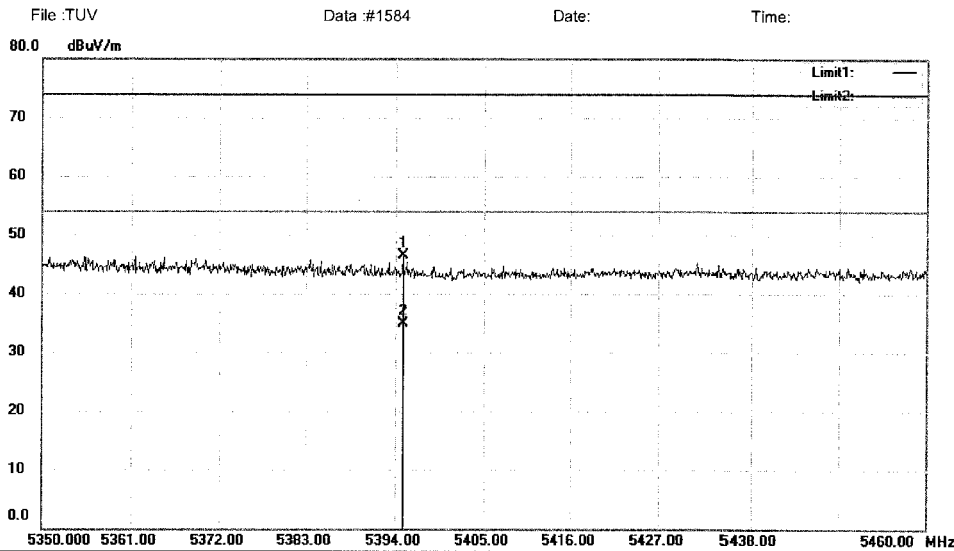
File :TUV\Data :#1583

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode: 11ac(80MHz) 5210
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5394.880	8.06	38.48	46.54	74.00	-27.46	peak		
2	*	5394.880	-3.58	38.48	34.90	54.00	-19.10	AVG		

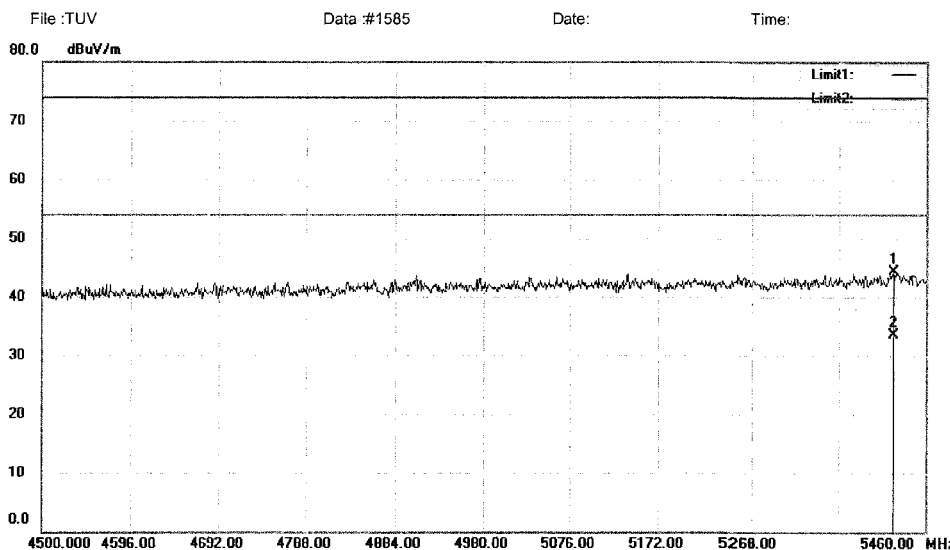
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1584

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Wall board 32" Tablet
 M/N: P-WAL-106-YIT-01
 Mode: 11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		5424.480	5.73	38.53	44.26	74.00	-29.74	peak		
2	*	5424.480	-4.93	38.53	33.60	54.00	-20.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

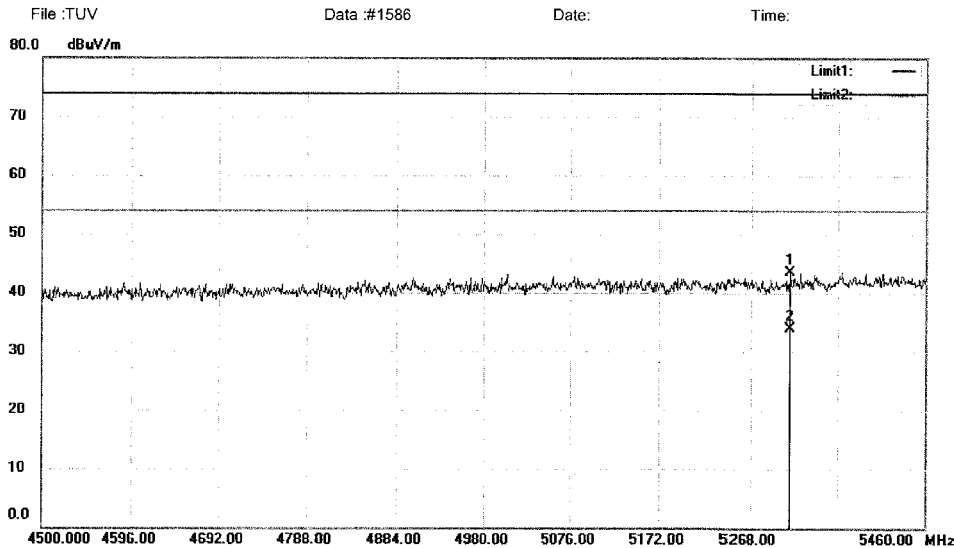
File :TUV\Data :#1585

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: Wall board 32" Tablet
M/N: P-WAL-106-YIT-01
Mode:11ac(80MHz) 5775
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		5311.200	5.25	38.31	43.56	74.00	-30.44	peak		
2	*	5311.200	-4.41	38.31	33.90	54.00	-20.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1586

Page: 1

Prüfbericht - Nr.: 50055364 003

Test Report No.

Seite 308 von 313

Page 308 of 313

5.1.8 Conducted emissions**RESULT:****Pass**

Date of testing	:	2016-08-13
Test standard	:	FCC Part 15.207 FCC part 15.407(b)(6) RSS-Gen Clause 8.8
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207
Kind of test site	:	Shield room

Test setup

Input Voltage	:	AC 120V, 60Hz
Operation Mode	:	A.1
Earthing	:	Not Connected
Ambient temperature	:	22°C
Relative humidity	:	55%
Atmospheric pressure	:	101kPa

For details refer to following test plot.

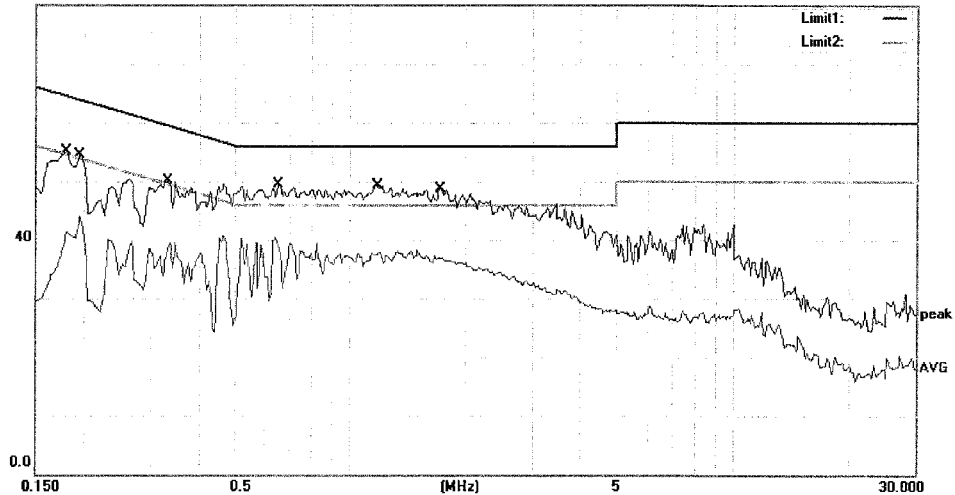
Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Conducted Emission Measurement

 File :TUV-RH
 00.0 dBuV

Data :#292

Date: 16/08/13/



Site Conducted #3

Phase: L1

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 55 %

EUT: WALLBOARD32"TABLET

M/N: P-WAL-106-YIT-01

Mode: WIFI5G Connect

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1800	55.07	0.00	55.07	64.49	-9.42	QP	
2		0.1800	41.33	0.00	41.33	54.49	-13.16	AVG	
3		0.1950	54.51	0.00	54.51	63.82	-9.31	QP	
4		0.1950	44.01	0.00	44.01	53.82	-9.81	AVG	
5		0.3300	50.03	0.00	50.03	59.45	-9.42	QP	
6		0.3300	39.51	0.00	39.51	49.45	-9.94	AVG	
7		0.6500	49.51	0.00	49.51	56.00	-6.49	QP	
8	*	0.6500	40.41	0.00	40.41	46.00	-5.59	AVG	
9		1.1750	49.40	0.00	49.40	56.00	-6.60	QP	
10		1.1750	38.01	0.00	38.01	46.00	-7.99	AVG	
11		1.7253	48.45	0.00	48.45	56.00	-7.55	QP	
12		1.7253	36.98	0.00	36.98	46.00	-9.02	AVG	

*:Maximum data x:Over limit !:over margin

Comment: Factor build in receiver.

Operator: Jason

File :TUV-RHData :#292

Page: 1

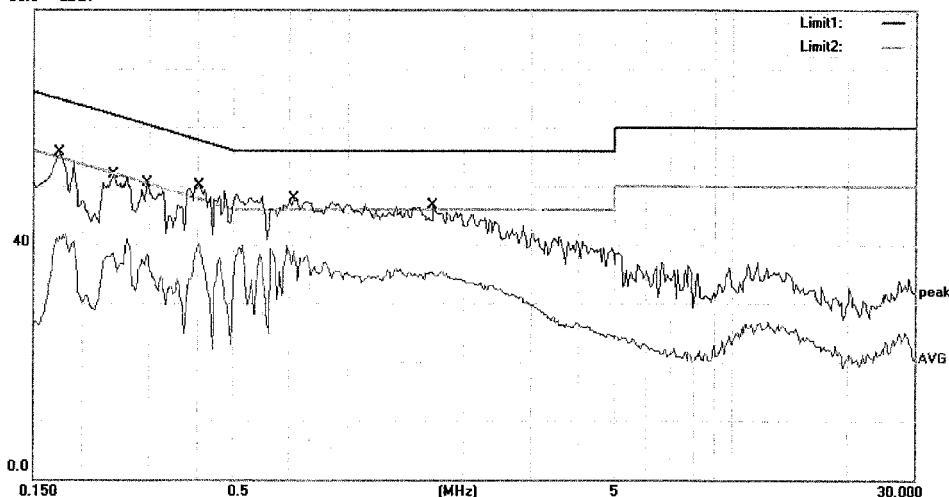
Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Conducted Emission Measurement

 File : TUV-RH
 80.0 dBuV

Data : #293

Date: 16/08/13/



Site Conducted #3

Phase: N

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 55 %

EUT: WALLBOARD32"TABLET

M/N: P-WAL-106-YIT-01

Mode: WIFI5G Connect

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1750	55.73	0.00	55.73	64.72	-8.99	QP	
2		0.1750	41.75	0.00	41.75	54.72	-12.97	AVG	
3		0.2400	51.92	0.00	51.92	62.10	-10.18	QP	
4		0.2400	41.00	0.00	41.00	52.10	-11.10	AVG	
5		0.2950	50.42	0.00	50.42	60.38	-9.96	QP	
6		0.2950	38.37	0.00	38.37	50.38	-12.01	AVG	
7		0.4050	50.04	0.00	50.04	57.75	-7.71	QP	
8		0.4050	40.08	0.00	40.08	47.75	-7.67	AVG	
9		0.7200	47.88	0.00	47.88	56.00	-8.12	QP	
10	*	0.7200	39.81	0.00	39.81	46.00	-6.19	AVG	
11		1.6600	46.73	0.00	46.73	56.00	-9.27	QP	
12		1.6600	35.98	0.00	35.98	46.00	-10.02	AVG	

*:Maximum data x:Over limit !:over margin

Comment: Factor build in receiver.

Operator: Jason

File : TUV-RHData : #293

Page: 1

6. Photographs of the Test Set-Up

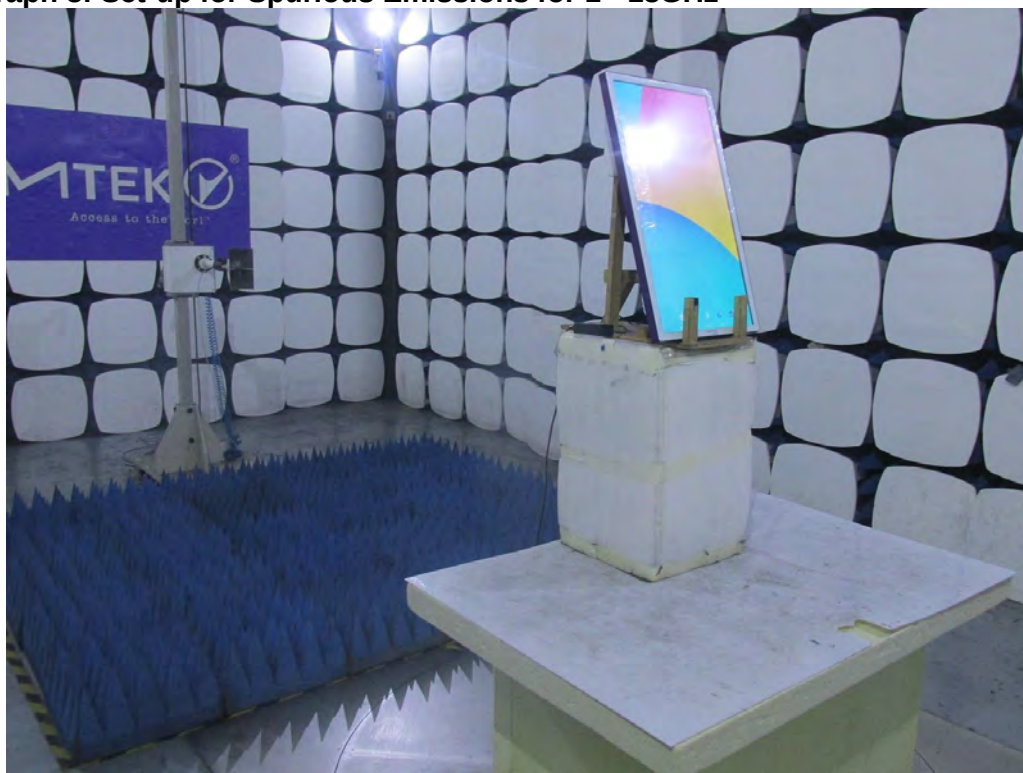
Photograph 1: Set-up for Conducted Emissions



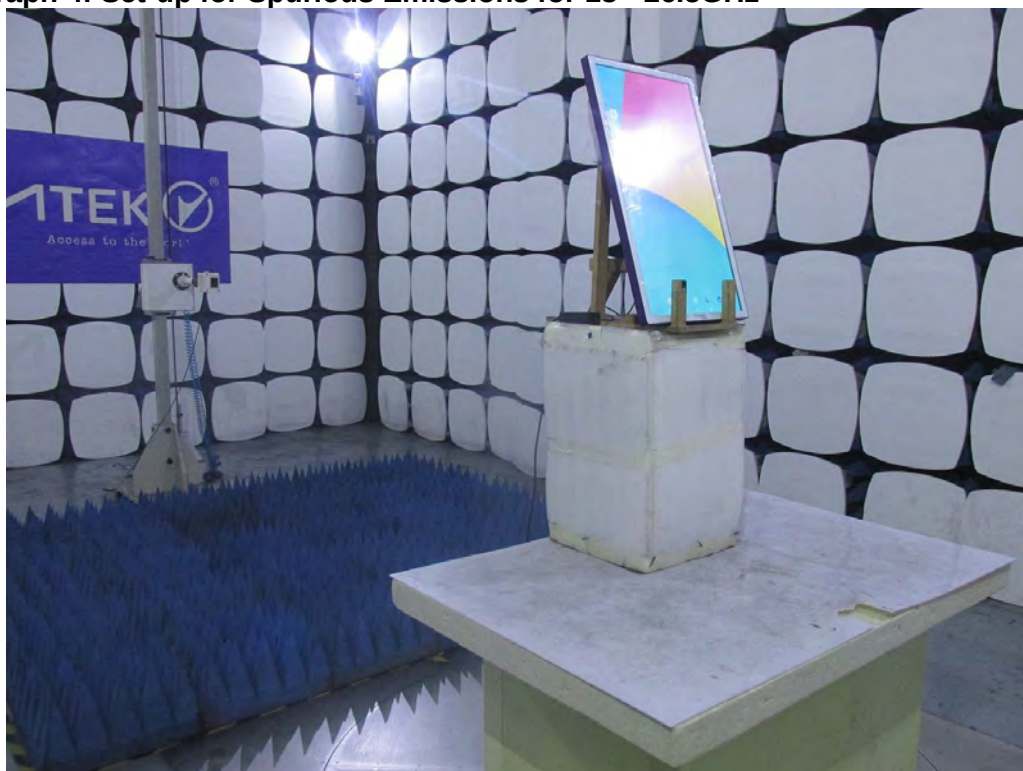
Photograph 2: Set-up for Spurious Emissions for 30 - 1000MHz



Photograph 3: Set-up for Spurious Emissions for 1 - 18GHz



Photograph 4: Set-up for Spurious Emissions for 18 - 26.5GHz



7. List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Measurement Uncertainty	6
Table 3: Technical Specification of EUT	8
Table 4: Technical Specification of 5GHz, 802.11a/n.....	8
Table 5: Technical Specification of 5GHz, 802.11ac.....	9
Table 6: List of WLAN Channel of 5GHz 802.11a/n	9
Table 7: List of WLAN Channel of 5GHz 802.11ac	10
Table 8: Test result of Peak Output Power of Band U-NII-1	15
Table 9: Test result of Peak Output Power of Band U-NII-3	16
Table 10: Test result of 26dB Bandwidth Band U-NII-1	17
Table 11: Test result of 26dB Bandwidth of Band U-NII-3.....	18
Table 12: Test result of 99% Bandwidth Band U-NII-1	19
Table 13: Test result of 99% Bandwidth of Band U-NII-3	20
Table 14: Test result of 6dB Bandwidth Band U-NII-1	21
Table 15: Test result of 6dB Bandwidth of Band U-NII-3.....	22
Table 16: Test result of power spectral density of Band U-NII-1.....	23
Table 17: Test result of power spectral density of Band U-NII-3.....	24

8. List of Photographs

Photograph 1: Set-up for Conducted Emissions	311
Photograph 2: Set-up for Spurious Emissions for 30 - 1000MHz	311
Photograph 3: Set-up for Spurious Emissions for 1 - 18GHz	312
Photograph 4: Set-up for Spurious Emissions for 18 - 26.5GHz.....	312