

# OttLite Technologies, Inc.

## TEST REPORT

**SCOPE OF WORK**

FCC Testing–A13

**REPORT NUMBER**

190411011SZN-002

**ISSUE DATE**

28 April 2019

**[REVISED DATE]**

[-----]

**PAGES**

35

**DOCUMENT CONTROL NUMBER**

FCC ID 209\_b

© 2017 INTERTEK



**OttLite Technologies, Inc.**

Application  
For  
Certification

**FCC ID: 2AI7B-A13**

**Wireless Charger**

**Model: A13**

**Transmitter**

Report No.: 190411011SZN-002

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-17]

**Prepared and Checked by:**

**Approved by:**

---

**Jeff Liang**  
Engineer

---

**Kidd Yang**  
Technical Supervisor  
Date: 28 April 2019

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Services Shenzhen Ltd. Longhua Branch**

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen.

Tel: (86 755) 8601 6288

Fax: (86 755) 8601 6751

## LIST OF EXHIBITS

### *INTRODUCTION*

- EXHIBIT 1: Summary of Tests*
- EXHIBIT 2: General Description*
- EXHIBIT 3: System Test Configuration*
- EXHIBIT 4: Measurement Results*
- EXHIBIT 5: Equipment Photographs*
- EXHIBIT 6: Product Labeling*
- EXHIBIT 7: Technical Specifications*
- EXHIBIT 8: Instruction Manual*
- EXHIBIT 9: Confidentiality Request*
- EXHIBIT 10: Miscellaneous Information*
- EXHIBIT 11: Test Equipment List*

**MEASUREMENT/TECHNICAL REPORT**

**Wireless Charger**

**Model: A13**

**FCC ID: 2AI7B-A13**

This report concerns (check one)      Original Grant       Class II Change

Equipment Type: DCD - Part 15 Low Power Transmitter Below 1705 kHz

---

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes       No

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

---

Transition Rules Request per 15.37?      Yes       No

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-17] Edition] provision.

---

Report prepared by:

**Jeff Liang**  
Intertek Testing Services Shenzhen Ltd. Longhua Branch  
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing  
Community, GuanHu Subdistrict, LongHua District, ShenZhen.  
Tel: (86 755) 8614 0743      Fax: (86 755) 8601 6751

## Table of Contents

<b>1.0</b>	<b>Summary of Test results</b> .....	<b>7</b>
<b>2.0</b>	<b>General Description</b> .....	<b>9</b>
2.1	Product Description .....	9
2.2	Related Submittal(s) Grants .....	9
2.3	Test Methodology .....	9
2.4	Test Facility .....	9
<b>3.0</b>	<b>System Test Configuration</b> .....	<b>11</b>
3.1	Justification .....	11
3.2	EUT Exercising Software .....	11
3.3	Special Accessories .....	11
3.4	Measurement Uncertainty .....	11
3.5	Equipment Modification .....	12
3.6	Support Equipment List and Description .....	12
<b>4.0</b>	<b>Measurement Results</b> .....	<b>14</b>
4.1	Field Strength Calculation .....	14
4.2	Radiated Emission Configuration Photograph .....	15
4.3	Radiated Spurious Emission .....	15
4.4	Conducted Emission Configuration Photograph .....	18
4.5	Conducted Emission .....	18
<b>5.0</b>	<b>Equipment Photographs</b> .....	<b>22</b>
<b>6.0</b>	<b>Product Labelling</b> .....	<b>24</b>
<b>7.0</b>	<b>Technical Specifications</b> .....	<b>26</b>
<b>8.0</b>	<b>Instruction Manual</b> .....	<b>28</b>
<b>9.0</b>	<b>Miscellaneous Information</b> .....	<b>30</b>
9.1	Emissions Test Procedures .....	30
9.2	Emissions Test Procedures (cont'd) .....	31
<b>10.0</b>	<b>Confidentiality Request</b> .....	<b>33</b>
<b>11.0</b>	<b>Test Equipment List</b> .....	<b>35</b>

## List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label / Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

**EXHIBIT 1**

**SUMMARY OF TEST RESULTS**

**1.0 Summary of Test results**

**Wireless Charger**

**Model: A13**

**FCC ID: 2AI7B-A13**

TEST ITEM	REFERENCE	RESULTS
Power Line Conducted Emissions	15.207	Pass
Transmitter Radiated Emissions	15.209	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.



**EXHIBIT 2**

**GENERAL DESCRIPTION**

## 2.0 General Description

### 2.1 Product Description

The Equipment Under Test (EUT) is a Wireless Charger operating at the frequency range 110-205 kHz. The EUT is powered by DC 12V form adapter. For more detailed features description, please refer to the user's manual.

Antenna Type: Integral Antenna(embedded coil antenna)

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 2.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the Wireless Charger which has Wireless charger function, and related report for FCC SDOC is subjected to report number: 190411011SZN-001.

### 2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

### 2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

**EXHIBIT 3**

**SYSTEM TEST CONFIGURATION**

## 3.0 System Test Configuration

### 3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by an adapter with 120V/60Hz input during the test. The test system was pre-scanning tested based on the consideration of following EUT operation mode. Only the worst case data is shown in the report.

Pertest mode	Description
Mode 1	Standby mode
Mode 2	Mobile phone is charging at 1% battery power
Mode 3	Mobile phone is charging at 50% battery power
Mode 4	Mobile phone is charging at 99% battery power

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data report in Exhibit 4.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the styrene turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

### 3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

### 3.3 Special Accessories

There is no special accessories necessary for compliance of this product.

### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

### 3.5 Equipment Modification

Any modifications installed previous to testing by OttLite Technologies, Inc. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

### 3.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Detail
Adapter	HP24G-1202000-AU (Provided by applicant)	Input: AC100-240V, 50/60Hz, 1A Output: DC 12V, 2A
Mobile Phone	Samsung	S7
USB Cable	(Provided by Intertek)	Unshielded, 80cm
Resister	N/A	2.5Ω

**EXHIBIT 4**

**MEASUREMENT RESULTS**

## 4.0 Measurement Results

### 4.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS	=	Field Strength in dB $\mu$ V/m
RA	=	Receiver Amplitude (including preamplifier) in dB $\mu$ V
CF	=	Cable Attenuation Factor in dB
AF	=	Antenna Factor in dB
AG	=	Amplifier Gain in dB
PD	=	Pulse Desensitization in dB
AV	=	Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0dB $\mu$ V is obtained. The antenna factor of 7.4dB and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0dB, and the resultant average factor was -10dB. The net field strength for comparison to the appropriate emission limit is 32dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

RA	=	62.0dB $\mu$ V
AF	=	7.4dB
CF	=	1.6dB
AG	=	29.0dB
PD	=	0dB
AV	=	-10dB

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32\text{dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8\mu\text{V/m}$$

#### 4.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

#### 4.3 Radiated Spurious Emission

Worst Case Radiated Spurious Emission  
at  
46.975MHz

Judgement: Passed by 4.5dB margin

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.



Applicant: OttLite Technologies, Inc.

Date of Test: 25 April 2019

Model: A13

Worst Case Operating Mode: Mode 2

**Radiated Emissions (30MHz – 1000MHz)**

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	115.845000	48.7	20.0	10.2	38.9	43.5	-4.6
Horizontal	260.860000	41.1	20.0	12.5	33.6	46.0	-12.4
Horizontal	517.425000	32.5	20.0	17.0	29.5	46.0	-16.5
Vertical	46.975000	46.0	20.0	9.5	35.5	40.0	-4.5
Vertical	116.815000	45.0	20.0	9.7	34.7	43.5	-8.8
Vertical	559.620000	36.1	20.0	16.9	33.0	46.0	-13.0

NOTES:

1. Quasi-Peak detector is used for frequency below 1GHz.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. All emissions are below the QP limit.

Applicant: OttLite Technologies, Inc.

Date of Test: 25 April 2019

Model: A13

Worst Case Operating Mode: Mode 2

**Fundamental & Spurious Emission Below 30MHz**

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Distance Factor (-dB)	Calculated at 300m (dBμV/m)	Limit at 300m (dBμV/m)	Margin (dB)
Vertical	0.030	63.0	0.0	7.6	70.6	80	-9.4	38.1	-47.5
Vertical	0.181	65.9	0.0	7.3	73.2	80	-6.8	22.5	-29.3
Vertical	0.240	51.5	0.0	6.8	58.3	80	-21.7	20.0	-41.7

Notes:

1. The specified limits of frequency band 9~90 KHz, 110~490 KHz are in average and measurements are made with peak detectors. Quasi-Peak detector is used for other frequency band.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Loop antenna is used for the emission under 30MHz.
5. Horizontal and Vertical polarization were tested and Only the worst Case data is shown.

#### 4.4 Conducted Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

#### 4.5 Conducted Emission

Worst Case Conducted Configuration  
at  
14.438MHz

Judgement: Passed by 10.8dB margin

Applicant: OttLite Technologies, Inc.

Date of Test: 13 April 2019


Worst Case Operating Mode: Mode 2

Model: A13

Phase: Live

## Graphic / Data Table

### Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

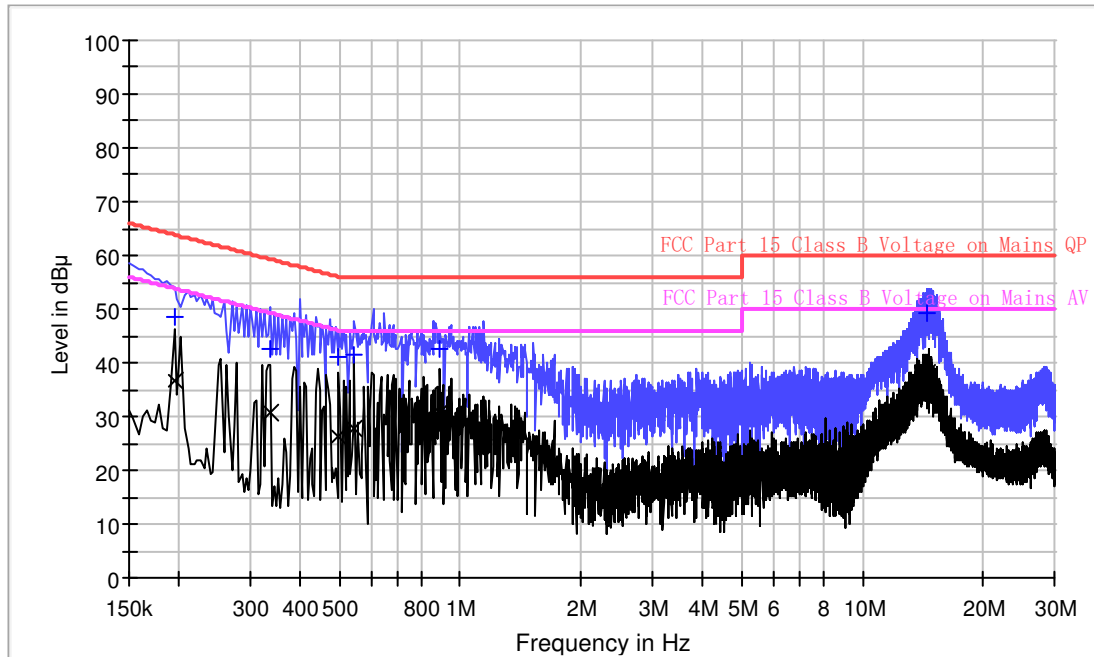

#### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.194000	48.4	9.000	L1	9.6	15.5	63.9
0.338000	42.5	9.000	L1	9.6	16.8	59.3
0.498000	41.3	9.000	L1	9.6	14.7	56.0
0.546000	41.5	9.000	L1	9.6	14.5	56.0
0.890000	42.6	9.000	L1	9.7	13.4	56.0
14.438000	49.2	9.000	L1	10.0	10.8	60.0

#### Limit and Margin AV

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.194000	36.7	9.000	L1	9.6	17.2	53.9
0.338000	30.9	9.000	L1	9.6	18.4	49.3
0.498000	26.4	9.000	L1	9.6	19.6	46.0
0.546000	27.7	9.000	L1	9.6	18.3	46.0
0.890000	30.6	9.000	L1	9.7	15.4	46.0
14.438000	38.3	9.000	L1	10.0	11.7	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dB $\mu$ V) – Level (dB $\mu$ V)

Applicant: OttLite Technologies, Inc.

Date of Test: 13 April 2019


Worst Case Operating Mode: Mode 2

Model: A13

Phase: Neutral

## Graphic / Data Table

### Conducted Emissions Pursuant to FCC 15.107: Emissions Requirement

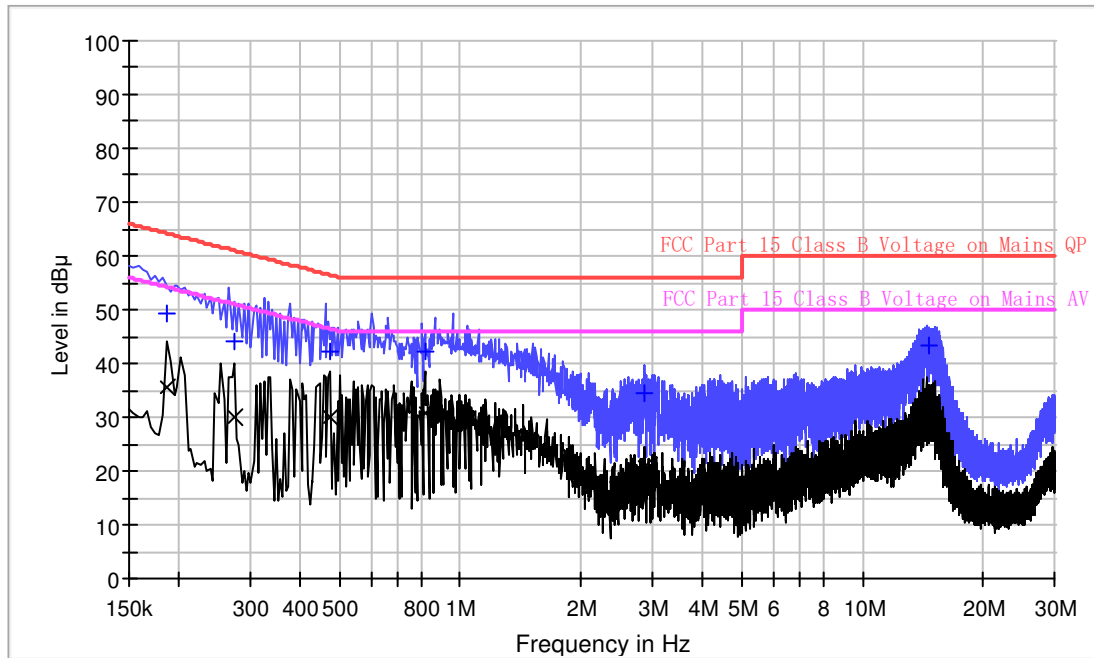

#### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.186000	49.1	9.000	N	9.6	15.1	64.2
0.274000	44.2	9.000	N	9.6	16.8	61.0
0.474000	42.4	9.000	N	9.7	14.0	56.4
0.818000	42.3	9.000	N	9.7	13.7	56.0
2.858000	34.4	9.000	N	9.7	21.6	56.0
14.622000	43.4	9.000	N	10.0	16.6	60.0

#### Limit and Margin AV

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.186000	35.5	9.000	N	9.6	18.7	54.2
0.274000	29.9	9.000	N	9.6	21.1	51.0
0.474000	29.9	9.000	N	9.7	16.5	46.4
0.818000	30.7	9.000	N	9.7	15.3	46.0
2.858000	20.6	9.000	N	9.7	25.4	46.0
14.622000	31.4	9.000	N	10.0	18.6	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dB $\mu$ V) – Level (dB $\mu$ V)

**EXHIBIT 5**

**EQUIPMENT PHOTOGRAPHS**

## 5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

**EXHIBIT 6**

**PRODUCT LABELLING**



## 6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

**EXHIBIT 7**

**TECHNICAL SPECIFICATIONS**

## 7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

**EXHIBIT 8**

**INSTRUCTION MANUAL**

## 8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

**EXHIBIT 9**

**MISCELLANEOUS INFORMATION**

## 9.0 Miscellaneous Information

This miscellaneous information includes emission measuring procedure

### 9.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Average detector is used for 9–90 KHz, 110–490 KHz and Quasi-Peak detector is used for other frequency band. The IF bandwidth used for measurement of radiated signal strength was 10 KHz for emission below 30 MHz and 120 KHz for emission from 30 MHz to 1000 MHz.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz up to the 1GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz.

## 9.2 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 9.1).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.



**EXHIBIT 10**

**CONFIDENTIALITY REQUEST**

## 10.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

**EXHIBIT 11**

**TEST EQUIPMENT LIST**

**11.0 Test Equipment List**

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	14-Sep-2018	14-Sep-2019
SZ185-01	EMI Receiver	R&S	ESCI	100547	4-Jan-2019	4-Jan-2020
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	11-May-2018	11-May-2019
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	05-Jun-2018	05-Jun-2019
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	05-Jun-2018	05-Jun-2019
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	15-Jan-2019	15-Jan-2020
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	15-Dec-2018	15-Dec-2020
SZ062-02	RF Cable	RADIALL	RG 213U	--	02-Jan-2019	02-Jul-2019
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	28-Feb-2019	28-Aug-2019
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	28-Feb-2019	28-Aug-2019
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	26-Oct-2018	26-Oct-2019
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	04-Jul-2018	04-Jul-2019
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2020

\*\*\*\*\*End of Report\*\*\*\*\*