

OttLite Technologies, Inc.

TEST REPORT

SCOPE OF WORK

SAR ASSESSMENT– HZ-X16C

REPORT NUMBER

181126007SZN-012

ISSUE DATE

22 January 2019

[REVISED DATE]

[-----]

PAGES

4

DOCUMENT CONTROL NUMBER

RF Exposure
© 2017 INTERTEK



Test Report

Applicant: OttLite Technologies, Inc. Number: 181126007SZN-012

220 West 7th Avenue STE 100 Tampa, FL 33602 Date: 22 January 2019
United States**Sample Description**

Product : LED Shine Desk Lamp with Wireless Charging

Model No. : HZ-X16C

Brand Name : Electrical Rating : Input: AC100-240V, 50/60Hz, 1A; Output: DC 12V, 2A for adapter
DC5V, 1A output by wireless charger

Date Received : 26 November 2018

Date Test Conducted : 26 November 2018 to 18 January 2019

Test Requested : Test for compliance with CFR 47 part 1

Test Method : Environmental evaluation and exposure limit according to FCC
CFR 47 part 1, 1.1307(c) and (d), 1.1310

Test Result : Pass

Conclusion : When determining of test conclusion, measurement uncertainty of tests have
been considered.

***** End of Page *****

Prepared and Checked By:**Approved By:**

Steven Zhou
Engineer
Date: 22 January 2019

Kidd Yang
Technical Supervisor
Date: 22 January 2019

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.


Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

Test Report

Test Setup Configuration

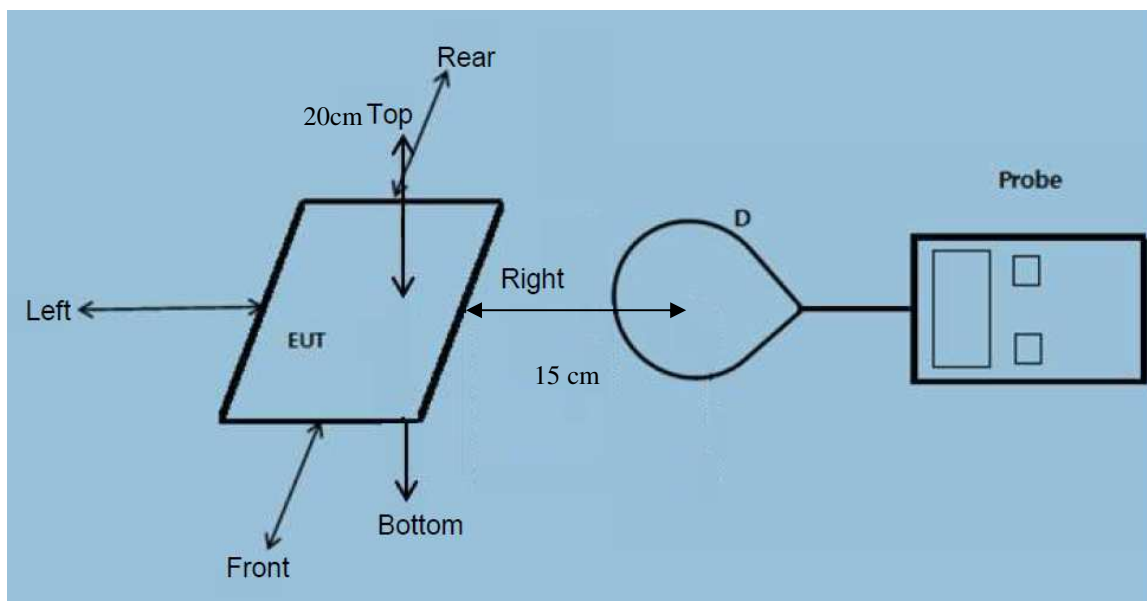

Note

- The RF exposure test is performed in the shield room.
- The test distance is between the edge of the charger and the geometric centre of probe.

Test Equipment List

Name of instrument	Model	Manufacturer	Cal. Date	Due Date
Exposure Level Tester	ELT-4002304/03	Narda	21-Mar-18	21-Mar-19
Field Probe	HI-6105	ETS	21-Mar-18	21-Mar-19
Laser Data Interface	HI-6113	ETS	21-Mar-18	21-Mar-19

TEST REPORT

Reference Limit:

Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(c) and (d), 1.1310

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation.

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100)*	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3 – 1.34	614	1.63	(100)*	30

Note: * = Plane wave equivalent power density

Test Result:

H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT(HZ-X16C)

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (A/m)	Probe Position Rear (A/m)	Probe Position Left (A/m)	Probe Position Right (A/m)	Probe Position Top (A/m)	Limits (A/m)
0.110-0.205	1% Battery Level	0.142	0.135	0.128	0.144	0.157	1.63
0.110-0.205	50% Battery Level	0.128	0.152	0.152	0.132	0.131	1.63
0.110-0.205	90% Battery Level	0.144	0.124	0.138	0.155	0.151	1.63
0.110-0.205	Stand-by	0.112	0.113	0.115	0.138	0.105	1.63

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT(HZ-X16C)

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (V/m)	Probe Position Rear (V/m)	Probe Position Left (V/m)	Probe Position Right (V/m)	Probe Position Top (V/m)	Limits (V/m)
0.110-0.205	1% Battery Level	0.344	0.35	0.358	0.317	0.368	614
0.110-0.205	50% Battery Level	0.331	0.338	0.326	0.361	0.362	614
0.110-0.205	90% Battery Level	0.372	0.361	0.336	0.368	0.338	614
0.110-0.205	Stand-by	0.312	0.308	0.319	0.315	0.326	614

TEST REPORT

Configuration photo of the test:

For electronic filing, the RF exposure configuration photographs are saved with filename: RF exposure photos.pdf.

***** End of Report*****