

NORTHWEST EMC


Parallel Wireless Inc.

CWS-3050-13

FCC 27:2016

Converged Wireless System Base Station

Report # KMWC0075.1

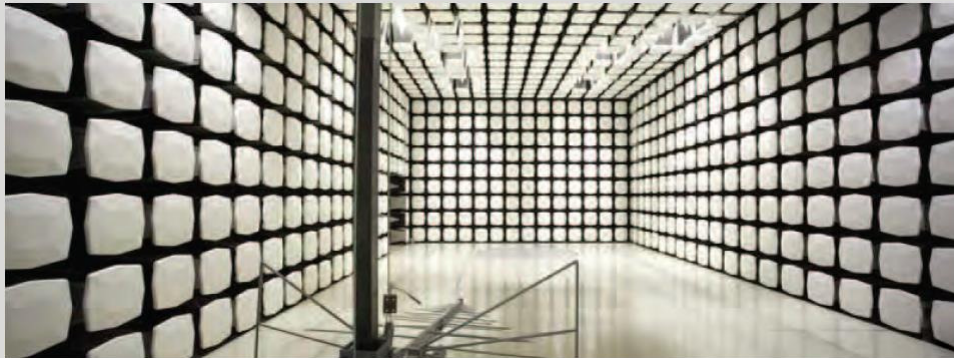

NVLAP Lab Code: 200676-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report may only be duplicated in its entirety

CERTIFICATE OF TEST

Last Date of Test: September 14, 2016
Parallel Wireless Inc.
Model: CWS-3050-13

Radio Equipment Testing

Standards

Specification	Method
FCC 27:2016	ANSI/TIA/EIA-603-D-2010

Results

Method Clause	Test Description	Applied	Results	Comments
2.2.1	Conducted Output Power	Yes	Pass	
2.2.1	Peak to Average Ratio	Yes	Pass	
2.2.2	Frequency Stability	Yes	Pass	
2.2.3	Occupied Bandwidth	Yes	Pass	
2.2.12	Out of Band Emissions - LTE Band 13	Yes	Pass	
2.2.13	Spurious Emissions at the Antenna Terminals	Yes	Pass	
2.2.13	Band Edge Compliance	Yes	Pass	
2.2.13	Intermodulation	No	N/A	Not required for single channel band.

Deviations From Test Standards

None

Approved By:



Victor Ratinoff, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY

Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Validated by the European Commission as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.




The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES



California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

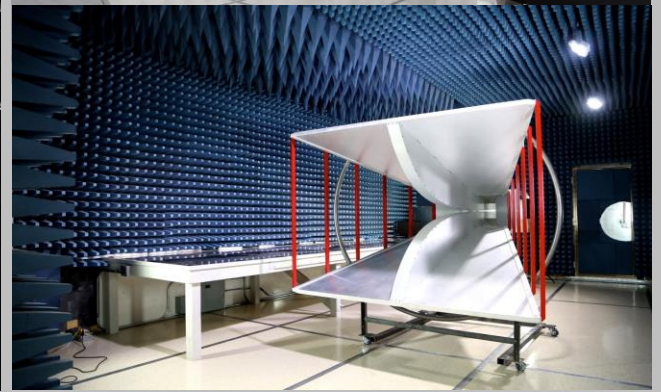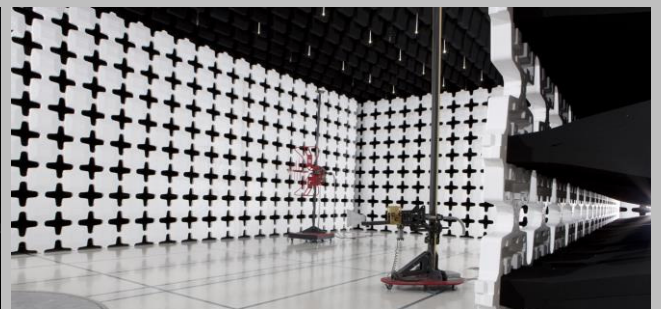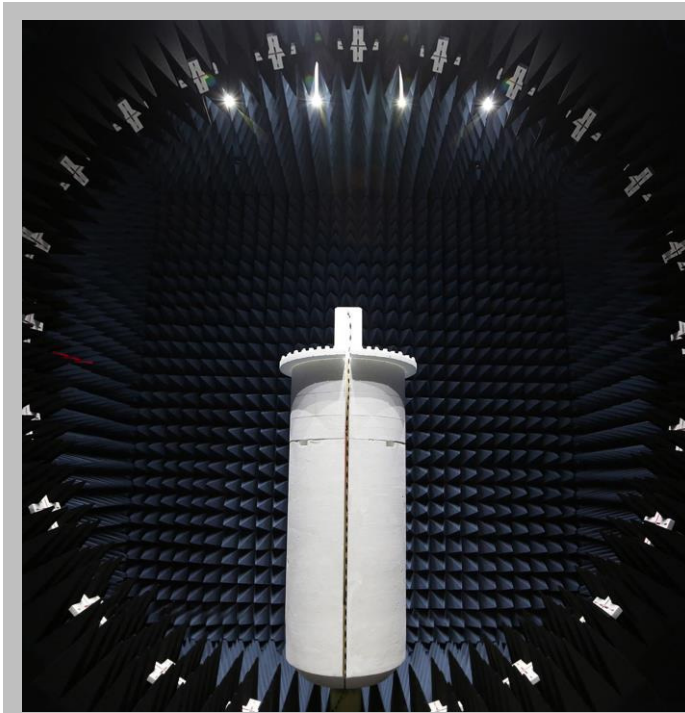

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Parallel Wireless Inc.
Address:	1 Tara Blvd., Suite #404
City, State, Zip:	Nashua, NH 03062
Test Requested By:	Edward Lee
Model:	CWS-3050-13
First Date of Test:	September 12, 2016
Last Date of Test:	September 14, 2016
Receipt Date of Samples:	September 12, 2016
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Tower based Converged Wireless System Base Station operating in LTE Band 13 with single channel capability operating in 5 MHz, 10 MHz channel bandwidths.
Testing Objective:
To demonstrate compliance of the Cellular radio to FCC Part 27 requirements for LTE Band 13.

CONFIGURATIONS

Configuration KMWC0075- 1

Software/Firmware Running during test	
Description	Version
eNB2440_20160729_v0_1_41.pkg	41

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Converged Wireless System Base Station	Parallel Wireless Inc.	CWS-3050-13	K162600005

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
High Power Terminator	Telcon	KTMO400800060	1111-0064
Laptop	Samsung	NP300V5A	HGHS93-JBA00674K
Laptop Power Supply	Delta Electronics, Inc.	SADP-90FH D	CNBA4400215ABZ040C18685

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Cable	No	5.0m	No	CWS-3050-13 Tower	DC Mains
RF Output Cable x2	Yes	5.0m	No	CWS-3050-13 Tower	High Power Terminator
Ethernet Cable	No	2.5m	No	CWS-3050-13 Tower	Laptop
AC Cable	No	1.5m	No	AC Mains	Laptop Power Supply
DC Cable	No	2.0m	Yes	Laptop	Laptop Power Supply

Configuration KMWC0075- 2

Software/Firmware Running during test	
Description	Version
eNB2440_20160729_v0_1_41.pkg	41

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Converged Wireless System Base Station	Parallel Wireless Inc.	CWS-3050-13	K162600005

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
High Power Terminator	Telcon	KTMO400800060	1111-0064
High Power Terminator	Telcon	KTMO400800060	1111-0004

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Cable	No	5.0m	No	CWS-3050-13 Tower	DC Mains
Ethernet Cable	No	2.5m	No	CWS-3050-13 Tower	Unterminated
AISG Cable	Yes	3.0m	No	CWS-3050-13 Tower	Unterminated
AISG (ALM) Cable	Yes	6.1m	No	CWS-3050-13 Tower	Unterminated
RF Output Cable x2	Yes	5.0m	No	CWS-3050-13 Tower	High Power Terminator
Optical Cable	No	10.0m	No	CWS-3050-13 Tower	Unterminated
Ground Braid	No	2.0m	No	CWS-3050-13 Tower	Ground

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	9/12/2016	Conducted Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	9/12/2016	Peak to Average Ratio	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	9/12/2016	Frequency Stability	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	9/12/2016	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	9/12/2016	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	9/12/2016	Spurious Emissions at the Antenna Terminals	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	9/14/2016	Out of Band Emissions – LTE Band 13	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

CONDUCTED OUTPUT POWER

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Power Supply - DC	Hewlett Packard	6574A	TPX	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Meter - Power	ETS Lindgren	7002-006	SRB	12/14/2015	12/14/2016

CLIENT PROVIDED EQUIPMENT

Description	Manufacturer	Model	Last Cal.	Cal. Due
High Power Attenuator - 30dB	Aeroflex/Weinschel	53-30-43	NCR	NCR
Attenuator - 20dB	N/A	N/A	NCR	NCR
Power Divider	Fairview Microwave	MP8748-2	NCR	NCR
50Ohm Terminator	Aeroflex/Weinschel	1455-4	NCR	NCR
High Power Terminator	Telcon	KTMO400800060	NCR	NCR

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The RF output power was measured with the EUT set to the modes called out in the datasheet. The power measurement was made using a direct connection between the RF output of the EUT and an RF Power Sensor which only measures across the high time of the burst of the carrier.

The observed duty cycle was noted but not needed to calculate the ERP.


ERP = Max Measured Power + Antenna gain (dBi)

The measurements from Port 1 and Port 2 were summed to determine the total average power in ERP.

CONDUCTED OUTPUT POWER




XMIT 2016.05.06


EUT: CWS-3050-13		Work Order: KMWC0075					
Serial Number: K162600005		Date: 09/12/16					
Customer: Parallel Wireless Inc.		Temperature: 21.2 °C					
Attendees: Andy Ku		Humidity: 45.5% RH					
Project: None		Barometric Pres.: 1017 mbar					
Tested by: Johnny Candelas		Power: 48VDC					
Job Site: OC01							
TEST SPECIFICATIONS		Test Method					
FCC 27:2016		ANSI/TIA/EIA-603-D-2010					
COMMENTS							
Power Level Setting 40W. Reference Level Offset: DC Block + 30dB Attenuator + 20dB Attenuator + Power Divider + Cable Loss = 55dB total.							
Antenna Gain is assumed to be 0, per specification antenna gain will be re-evaluated during final installation taking height into account.							
MIMO measurements taken separately and a linear summation was performed below.							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	1	Signature 					
		Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results
SISO							
Antenna Port 1							
Low Channel LTE5, 748.5 MHz		45.93	100	0	45.9	60	Pass
High Channel LTE5, 753.5 MHz		45.99	100	0	46.0	60	Pass
Single Channel LTE10, 751 MHz		45.95	100	0	46.0	60	Pass
Antenna Port 2							
Low Channel LTE5, 748.5 MHz		45.93	100	0	45.9	60	Pass
High Channel LTE5, 753.5 MHz		45.93	100	0	45.9	60	Pass
Single Channel LTE10, 751 MHz		45.98	100	0	46.0	60	Pass
MIMO							
Antenna Port 1							
Low Channel LTE5, 748.5 MHz		45.96	100	0	46.0	60	Pass
High Channel LTE5, 753.5 MHz		45.96	100	0	46.0	60	Pass
Single Channel LTE10, 751 MHz		45.97	100	0	46.0	60	Pass
Antenna Port 2							
Low Channel LTE5, 748.5 MHz		45.99	100	0	46.0	60	Pass
High Channel LTE5, 753.5 MHz		45.96	100	0	46.0	60	Pass
Single Channel LTE10, 751 MHz		45.97	100	0	46.0	60	Pass
Linear Sum of the Power							
		Port 1 (mW)	Port 2 (mW)	Sum (mW)	Sum (dBm)		
Low Channel LTE5, 748.5 MHz		39445.7	39719.2	79164.9	48.99	0	49.0
High Channel LTE5, 753.5 MHz		39445.7	39445.7	78891.5	48.97	0	49.0
Single Channel LTE10, 751 MHz		39536.7	39536.7	79073.3	48.98	0	49.0

CONDUCTED OUTPUT POWER

SISO, Antenna Port 1, Low Channel LTE5, 748.5 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.93	100	0	45.9	60	Pass	

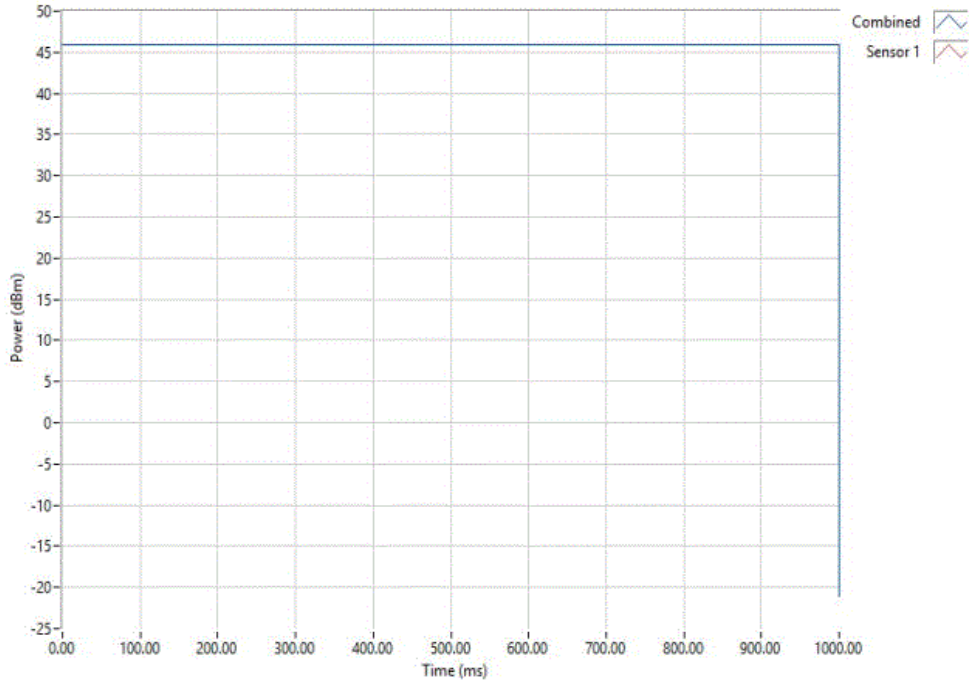


SISO, Antenna Port 1, High Channel LTE5, 753.5 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.99	100	0	46	60	Pass	

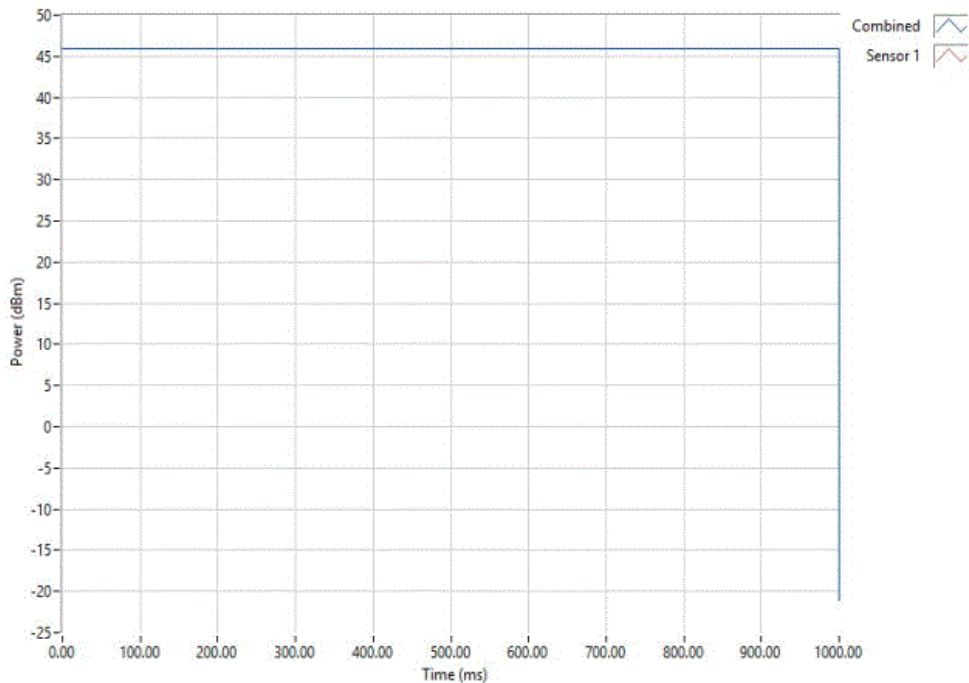


CONDUCTED OUTPUT POWER

SISO, Antenna Port 1, Single Channel LTE10, 751 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.95	100	0	46	60	Pass	

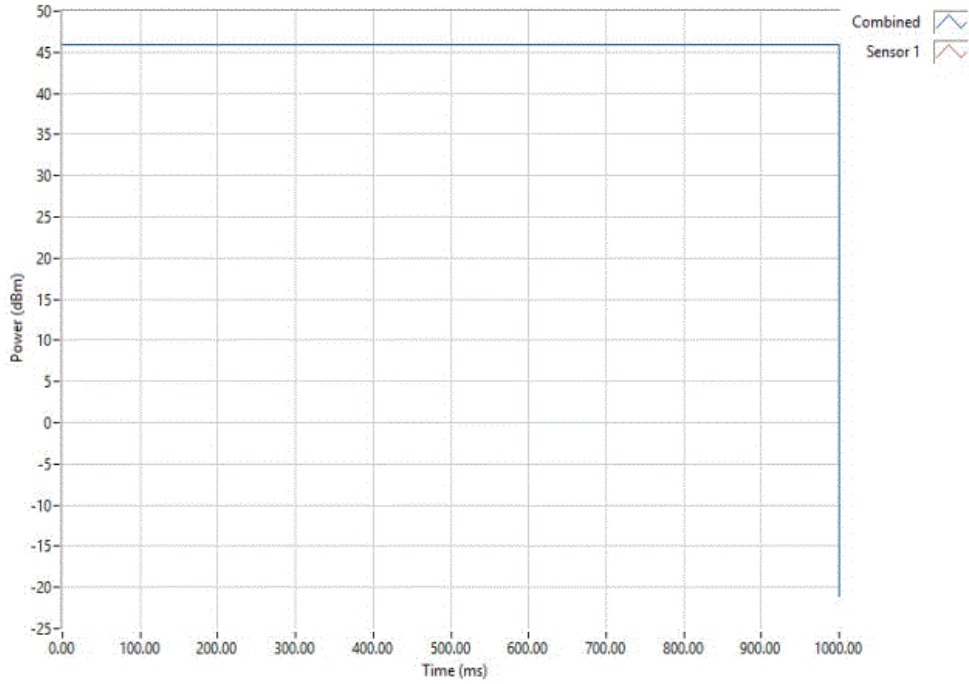


SISO, Antenna Port 2, Low Channel LTE5, 748.5 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.93	100	0	45.9	60	Pass	

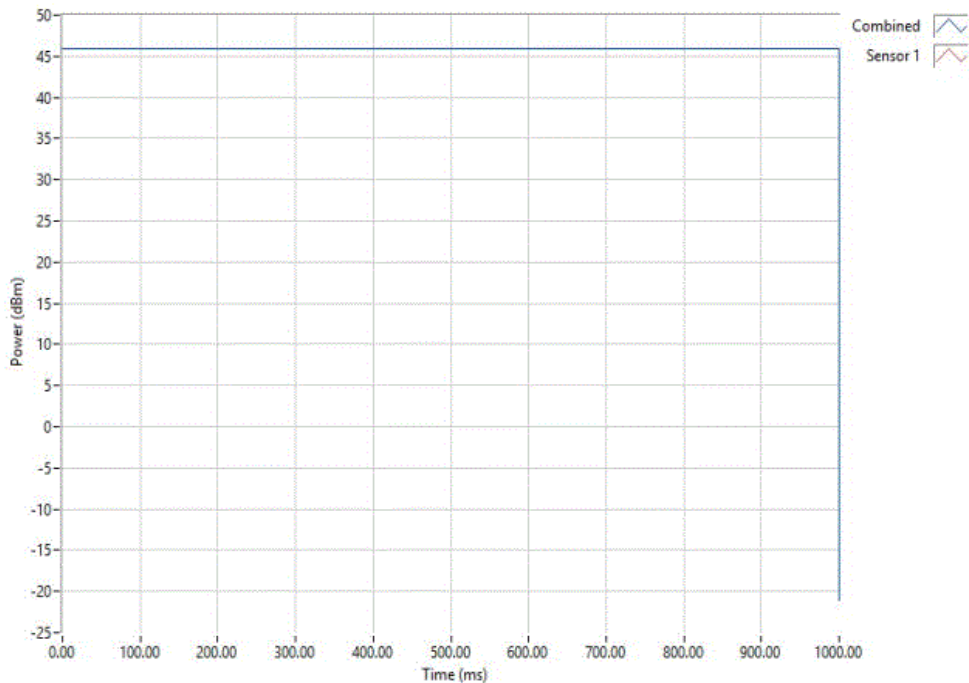


CONDUCTED OUTPUT POWER

SISO, Antenna Port 2, High Channel LTE5, 753.5 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.93	100	0	45.9	60	Pass	

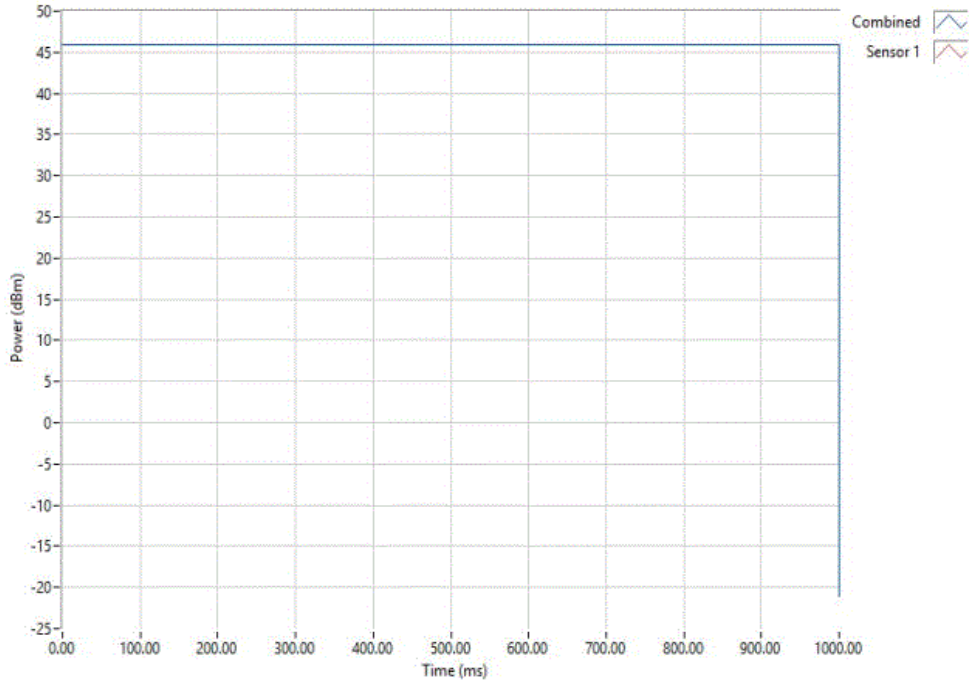


SISO, Antenna Port 2, Single Channel LTE10, 751 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.98	100	0	46	60	Pass	

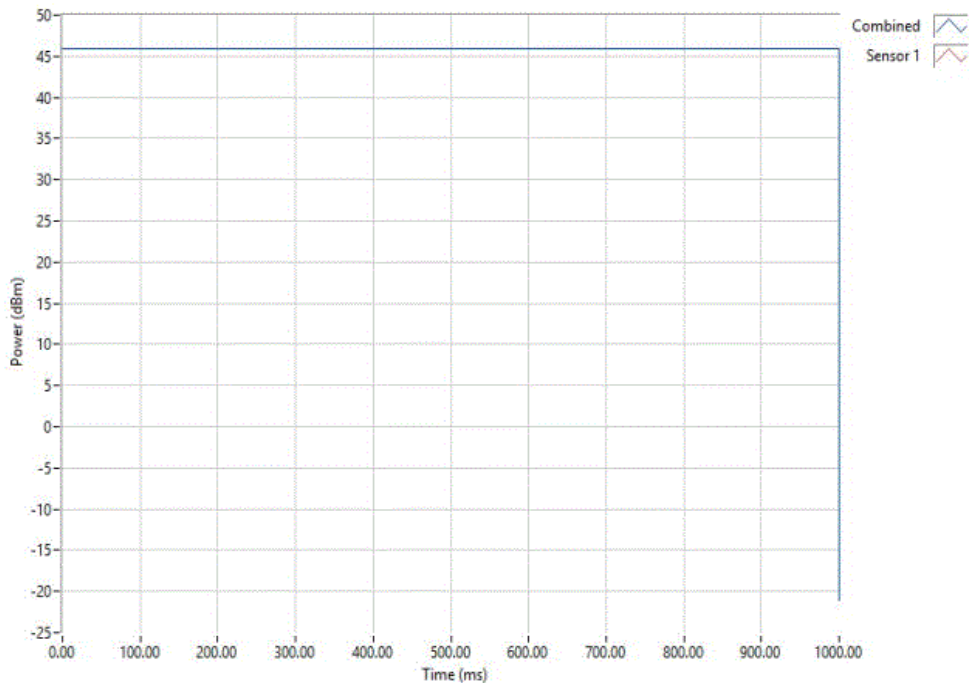


CONDUCTED OUTPUT POWER

MIMO, Antenna Port 1, Low Channel LTE5, 748.5 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.96	100	0	46	60	Pass	

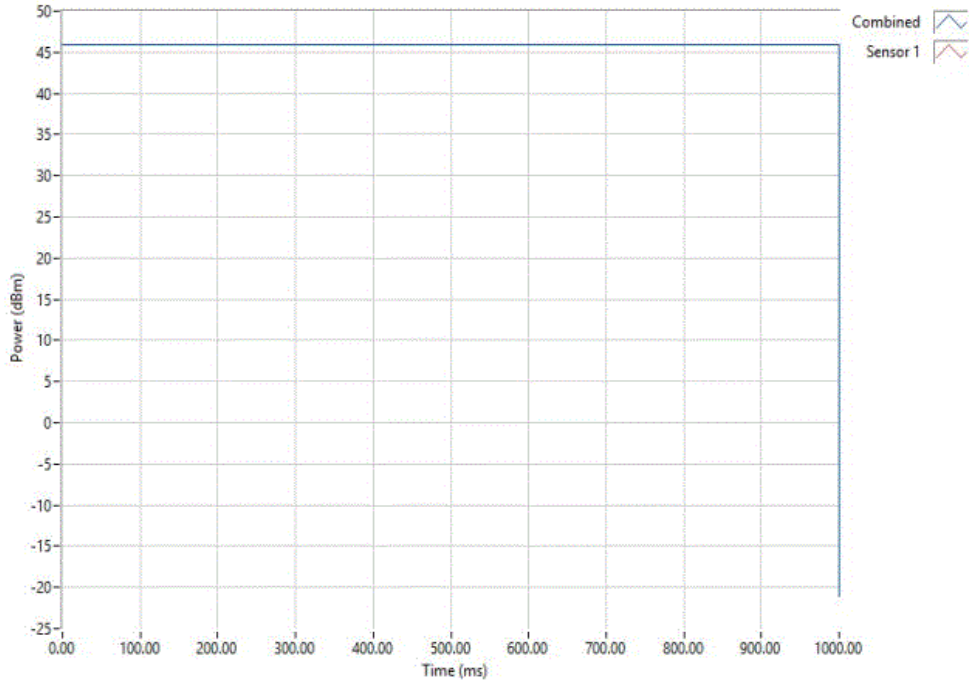


MIMO, Antenna Port 1, High Channel LTE5, 753.5 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.96	100	0	46	60	Pass	

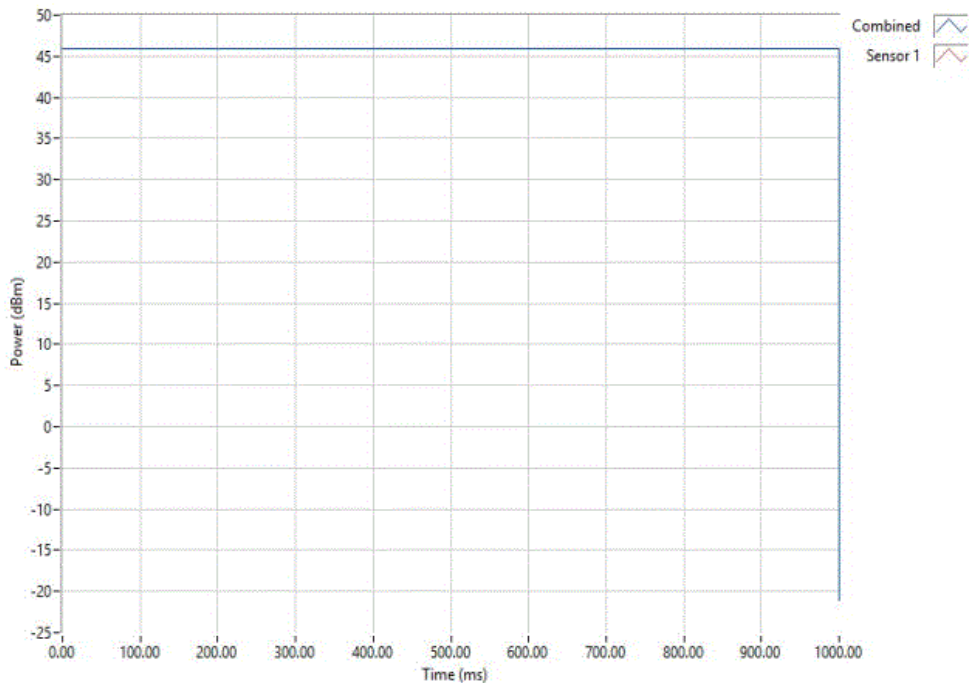


CONDUCTED OUTPUT POWER

MIMO, Antenna Port 1, Single Channel LTE10, 751 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.97	100	0	46	60	Pass	

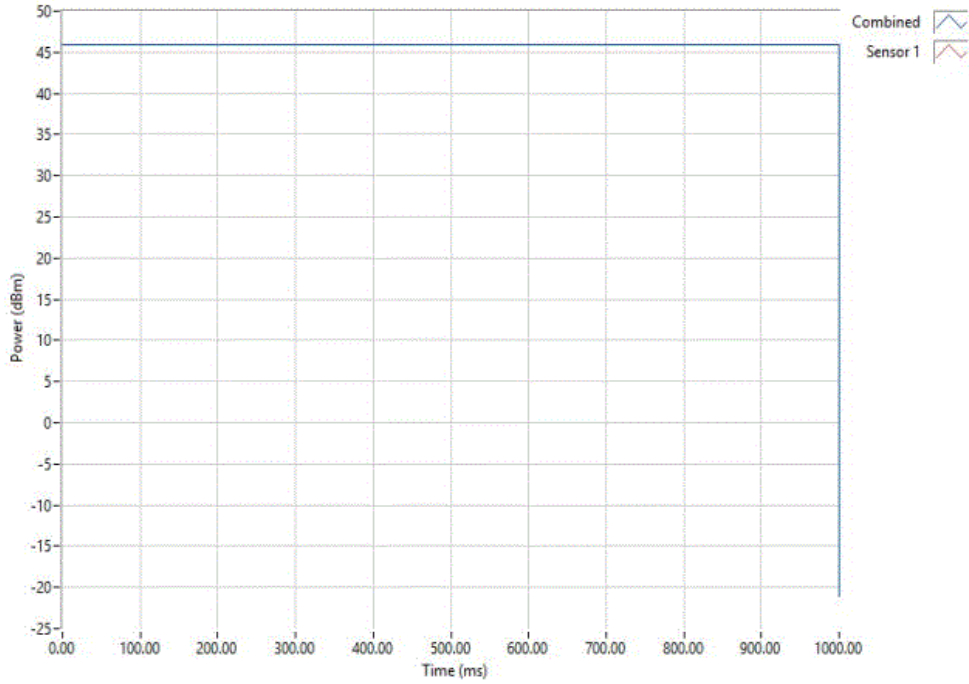


MIMO, Antenna Port 2, Low Channel LTE5, 748.5 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.99	100	0	46	60	Pass	

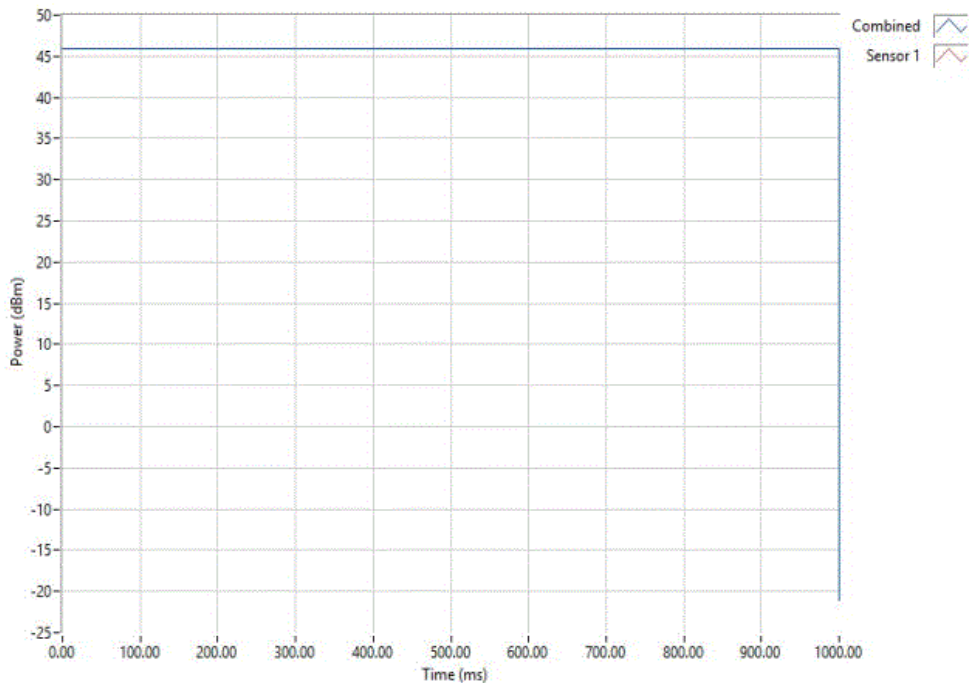


CONDUCTED OUTPUT POWER

MIMO, Antenna Port 2, High Channel LTE5, 753.5 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.96	100	0	46	60	Pass	

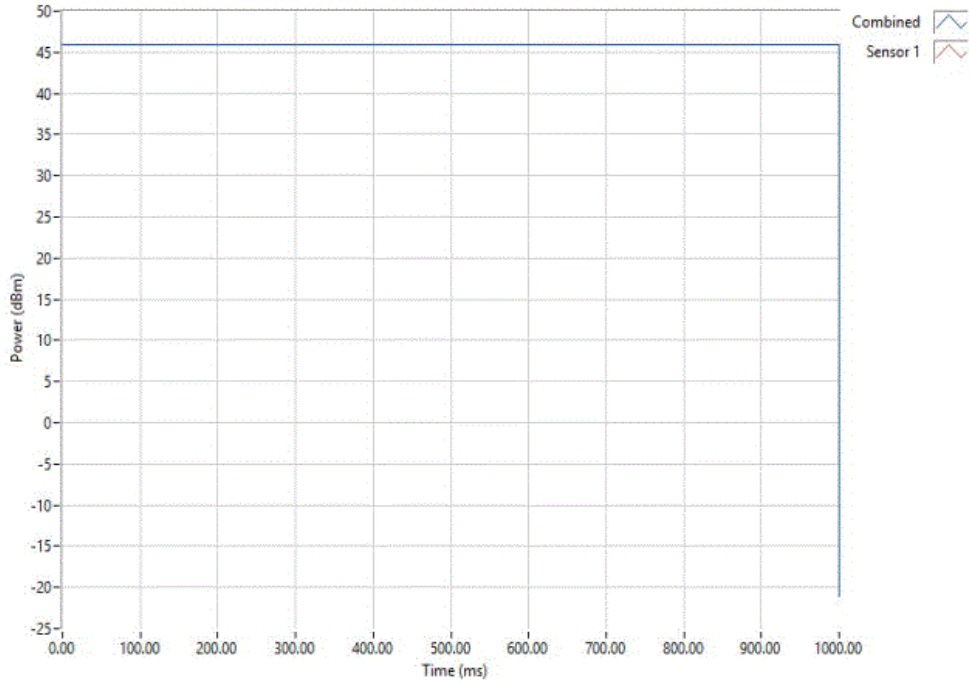

MIMO, Antenna Port 2, Single Channel LTE10, 751 MHz						
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results	
45.97	100	0	46	60	Pass	

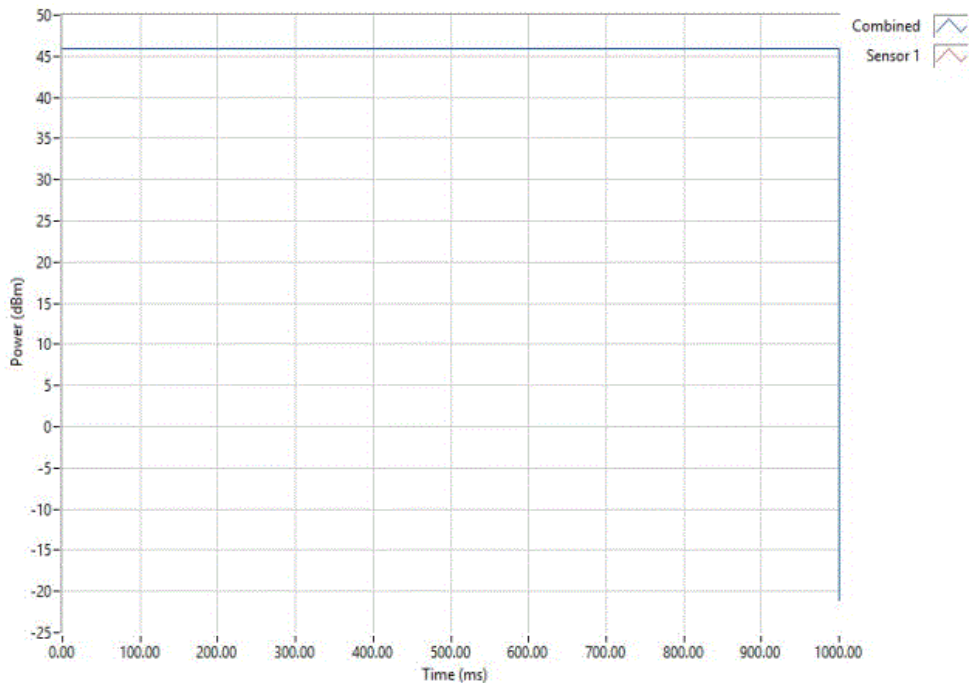

PEAK TO AVERAGE RATIO

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Power Supply - DC	Hewlett Packard	6574A	TPX	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016

CLIENT PROVIDED EQUIPMENT

Description	Manufacturer	Model	Last Cal.	Cal. Due
High Power Attenuator - 30dB	Aeroflex/Weinschel	53-30-43	NCR	NCR
Attenuator - 20dB	N/A	N/A	NCR	NCR
Power Divider	Fairview Microwave	MP8748-2	NCR	NCR
50Ohm Terminator	Aeroflex/Weinschel	1455-4	NCR	NCR
High Power Terminator	Telcon	KTMO400800060	NCR	NCR

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

Because the conducted Output Power was measured using a RMS Average detector, the Peak to Average Ratio was measured to show that the maximum peak-max-hold spectrum to the maximum of the average spectrum does not exceed 13 dB.


The spectrum analyzer settings were as follows:
Span set to encompass the entire emission bandwidth, centered on the transmit channel.

The largest difference between the following two traces was calculated:
➤ 1st Trace: Peak detector and trace max-hold.
➤ 2nd Trace: The same procedure and settings as was used for conducted Output Power.

PEAK TO AVERAGE RATIO




XMIT 2016.05.06


EUT: CWS-3050-13		Work Order: KMWC0075	
Serial Number: K162600005		Date: 09/12/16	
Customer: Parallel Wireless Inc.		Temperature: 21.2 °C	
Attendees: Andy Ku		Humidity: 45.5% RH	
Project: None		Barometric Pres.: 1017 mbar	
Tested by: Johnny Candelas		Power: 48VDC	
		Job Site: OC01	
TEST SPECIFICATIONS			
FCC 27:2016		Test Method	
		ANSI/TIA/EIA-603-D-2010	
COMMENTS			
Power Level Setting 40W. Reference Level Offset: DC Block + 30dB Attenuator + 20dB Attenuator + Power Divider + Cable Loss = 55dB total.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature 	
		Value (dB)	Limit < (dB) Results
Antenna Port 1			
	Low Channel LTE5, 748.5 MHz	7.117	13 Pass
	High Channel LTE5, 753.5 MHz	7.420	13 Pass
	Single Channel LTE10, 751 MHz	9.757	13 Pass
Antenna Port 2			
	Low Channel LTE5, 748.5 MHz	7.078	13 Pass
	High Channel LTE5, 753.5 MHz	7.397	13 Pass
	Single Channel LTE10, 751 MHz	9.699	13 Pass

PEAK TO AVERAGE RATIO

Antenna Port 1, Low Channel LTE5, 748.5 MHz			
	Value (dB)	Limit < (dB)	Results
	7.117	13	Pass

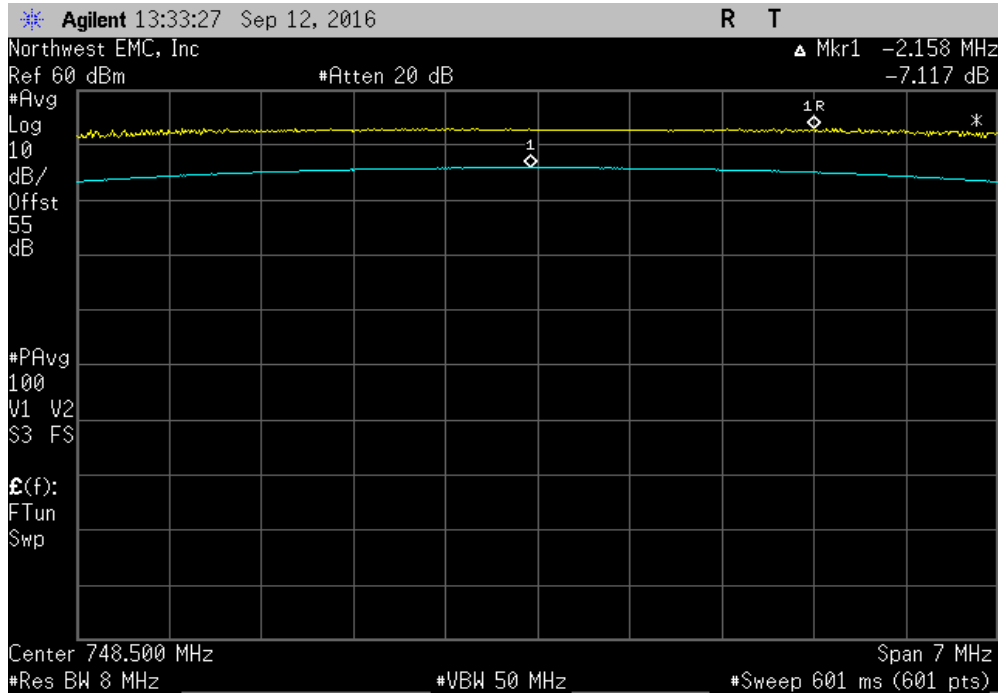


Antenna Port 1, High Channel LTE5, 753.5 MHz			
	Value (dB)	Limit < (dB)	Results
	7.420	13	Pass

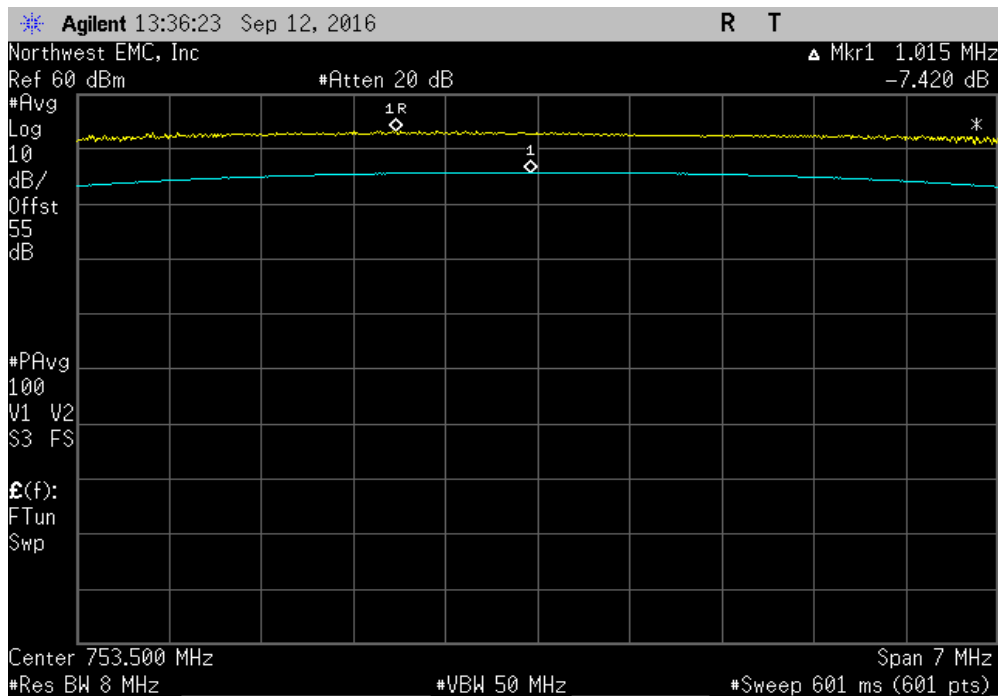


PEAK TO AVERAGE RATIO

Antenna Port 1, Single Channel LTE10, 751 MHz						
				Value (dB)	Limit < (dB)	Results
				9.757	13	Pass

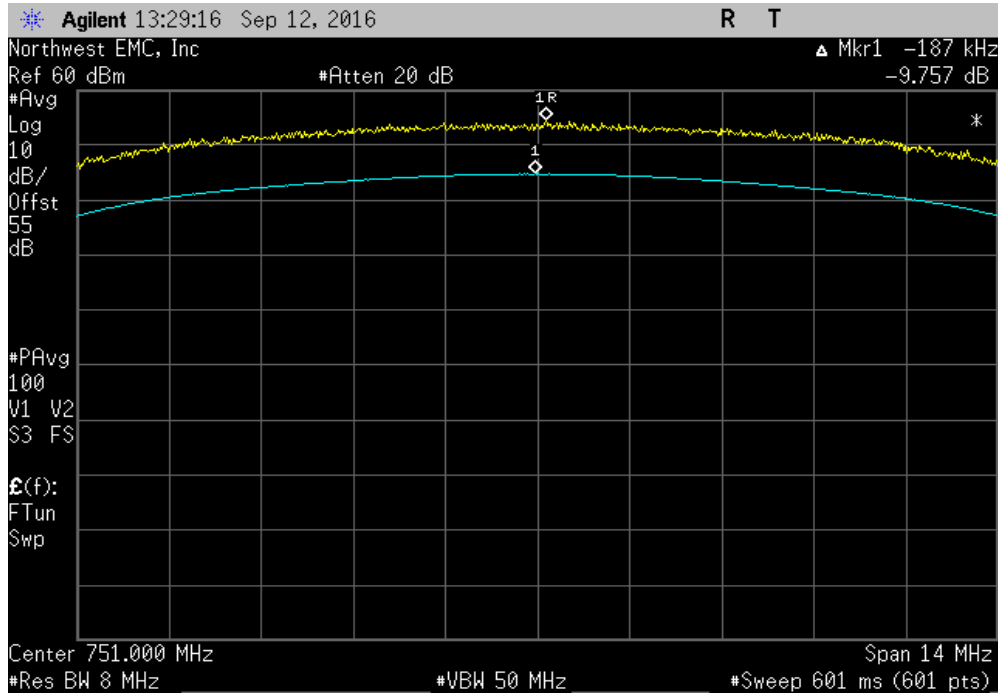


Antenna Port 2, Low Channel LTE5, 748.5 MHz						
				Value (dB)	Limit < (dB)	Results
				7.078	13	Pass

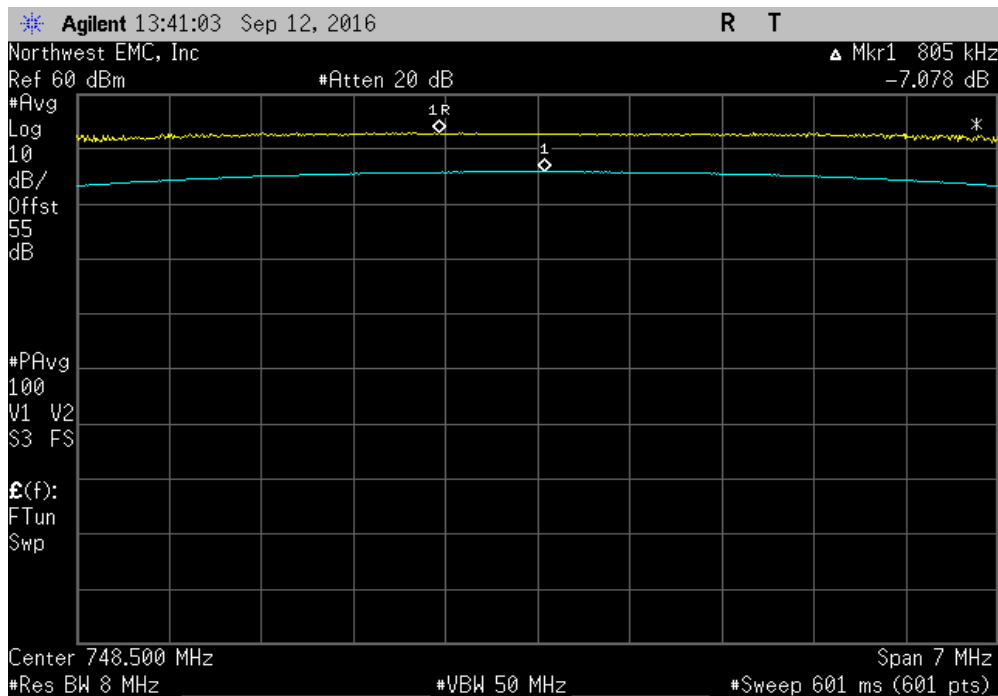


PEAK TO AVERAGE RATIO

Antenna Port 2, High Channel LTE5, 753.5 MHz						
				Value (dB)	Limit < (dB)	Results
				7.397	13	Pass

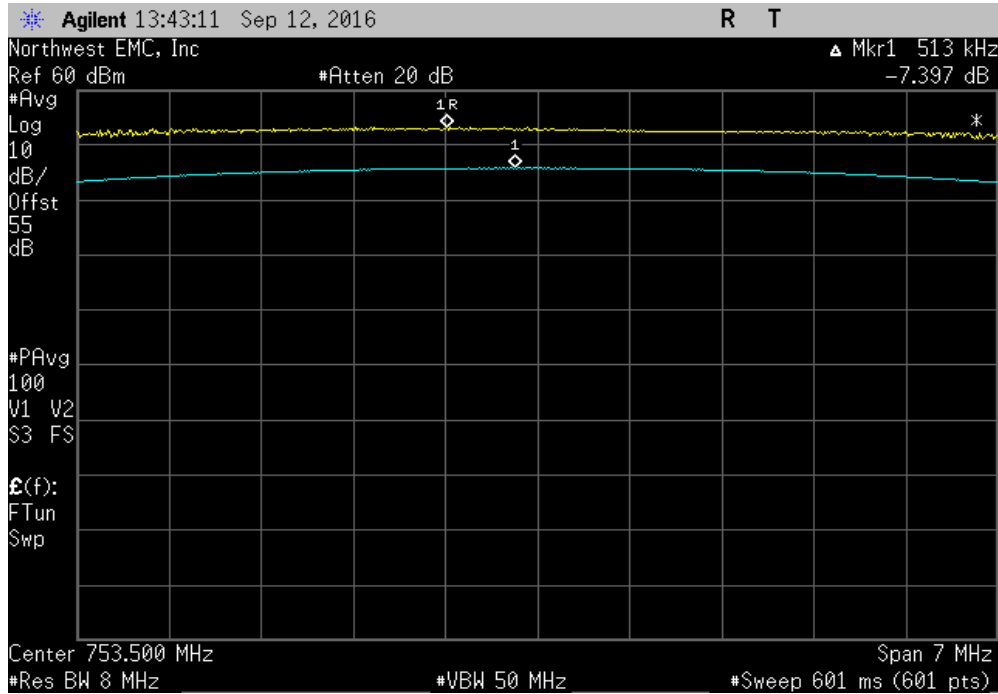

Antenna Port 2, Single Channel LTE10, 751 MHz						
				Value (dB)	Limit < (dB)	Results
				9.699	13	Pass

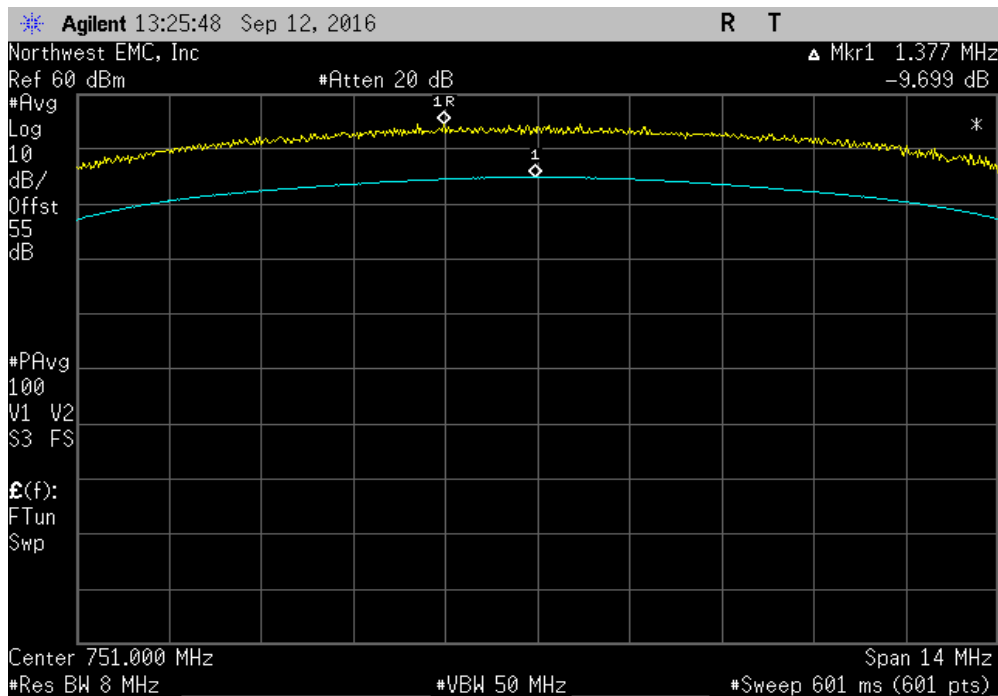

FREQUENCY STABILITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Chamber - Temperature/Humidity	Cincinnati Sub Zero (CSZ)	ZPHS-32-3.5-SCT/AC	TBE	NCR	NCR
Thermometer	Omega Engineering, Inc.	HH311	DUC	10/3/2014	10/3/2017
Power Supply - DC	Hewlett Packard	6574A	TPX	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016

CLIENT PROVIDED EQUIPMENT

Description	Manufacturer	Model	Last Cal.	Cal. Due
High Power Attenuator - 30dB	Aeroflex/Weinschel	53-30-43	NCR	NCR
Attenuator - 20dB	N/A	N/A	NCR	NCR
Power Divider	Fairview Microwave	MP8748-2	NCR	NCR
50Ohm Terminator	Aeroflex/Weinschel	1455-4	NCR	NCR
High Power Terminator	Telcon	KTMO400800060	NCR	NCR

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

Testing was done with an absence of modulation in a CW mode of operation.

The primary supply voltage was varied from 85 % to 115% of the nominal voltage. Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range (-30° to +50° C) at 10°C intervals.

Per the requirements of FCC Part 27.54:


“The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.”

No specific limits are provided in either FCC 27.54, the product specific rule part, or FCC 2.1055, the equipment authorization procedure for testing frequency stability. While there are no limits called out, any results less than 1ppm will still allow the radio to be operating within the band.

FREQUENCY STABILITY




XMIT 2016.05.06

EUT: CWS-3050-13		Work Order: KMWC0075				
Serial Number: K162600005		Date: 09/12/16				
Customer: Parallel Wireless Inc.		Temperature: 21.2 °C				
Attendees: Andy Ku		Humidity: 45.5% RH				
Project: None		Barometric Pres.: 1017 mbar				
Tested by: Johnny Candelas		Power: 48VDC				
TEST SPECIFICATIONS		Test Method				
FCC 27:2016		ANSI/TIA/EIA-603-D-2010				
COMMENTS						
Power Level Setting 40W. Reference Level Offset: DC Block + 30dB Attenuator + 20dB Attenuator + Power Divider + Cable Loss = 55dB total.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	1	Signature 				
		Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
Antenna Port 1						
Normal Temperature and Voltage						
	Low Channel LTE5, 748.5 MHz	748.500059	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500051	753.5	0.1	1	Pass
	Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass
Extreme Voltage, 55.2 VDC						
	Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500051	753.5	0.1	1	Pass
	Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass
Extreme Voltage, 40.8 VDC						
	Low Channel LTE5, 748.5 MHz	748.500059	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500067	753.5	0.1	1	Pass
	Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass
Extreme Temperature, -30°C						
	Low Channel LTE5, 748.5 MHz	748.500192	748.5	0.3	1	Pass
	High Channel LTE5, 753.5 MHz	753.500184	753.5	0.2	1	Pass
	Single Channel LTE10, 751 MHz	751.000183	751	0.2	1	Pass
Extreme Temperature, -20°C						
	Low Channel LTE5, 748.5 MHz	748.500294	748.5	0.4	1	Pass
	High Channel LTE5, 753.5 MHz	753.500301	753.5	0.4	1	Pass
	Single Channel LTE10, 751 MHz	751.000294	751	0.4	1	Pass
Extreme Temperature, -10°C						
	Low Channel LTE5, 748.5 MHz	748.500478	748.5	0.6	1	Pass
	High Channel LTE5, 753.5 MHz	753.500468	753.5	0.6	1	Pass
	Single Channel LTE10, 751 MHz	751.000483	751	0.6	1	Pass
Extreme Temperature, 0°C						
	Low Channel LTE5, 748.5 MHz	748.500045	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500005	753.5	0.1	1	Pass
	Single Channel LTE10, 751 MHz	751.000005	751	0.1	1	Pass
Extreme Temperature, +10°C						
	Low Channel LTE5, 748.5 MHz	748.500512	748.5	0.7	1	Pass
	High Channel LTE5, 753.5 MHz	753.500517	753.5	0.7	1	Pass
	Single Channel LTE10, 751 MHz	751.000045	751	0.1	1	Pass
Extreme Temperature, +20°C						
	Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500501	753.5	0.7	1	Pass
	Single Channel LTE10, 751 MHz	751.000045	751	0.1	1	Pass
Extreme Temperature, +30°C						
	Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500005	753.5	0.1	1	Pass
	Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass
Extreme Temperature, +40°C						
	Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500005	753.5	0.1	1	Pass
	Single Channel LTE10, 751 MHz	751.000066	751	0.1	1	Pass
Extreme Temperature, +50°C						
	Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500051	753.5	0.1	1	Pass
	Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass
Antenna Port 2						
Normal Temperature and Voltage						
	Low Channel LTE5, 748.5 MHz	748.500059	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500067	753.5	0.1	1	Pass
	Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass
Extreme Voltage, 55.2 VDC						
	Low Channel LTE5, 748.5 MHz	748.500059	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500067	753.5	0.1	1	Pass
	Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass
Extreme Voltage, 40.8 VDC						
	Low Channel LTE5, 748.5 MHz	748.500059	748.5	0.1	1	Pass
	High Channel LTE5, 753.5 MHz	753.500005	753.5	0.1	1	Pass
	Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass
Extreme Temperature, -30°C						
	Low Channel LTE5, 748.5 MHz	748.500192	748.5	0.3	1	Pass
	High Channel LTE5, 753.5 MHz	753.500201	753.5	0.3	1	Pass
	Single Channel LTE10, 751 MHz	751.000194	751	0.3	1	Pass
Extreme Temperature, -20°C						
	Low Channel LTE5, 748.5 MHz	748.500292	748.5	0.4	1	Pass
	High Channel LTE5, 753.5 MHz	753.500303	753.5	0.4	1	Pass
	Single Channel LTE10, 751 MHz	751.000311	751	0.4	1	Pass


Extreme Temperature, -10°C						
Low Channel LTE5, 748.5 MHz	748.500475	748.5	0.6	1	Pass	
High Channel LTE5, 753.5 MHz	753.500485	753.5	0.6	1	Pass	
Single Channel LTE10, 751 MHz	751.000478	751	0.6	1	Pass	
Extreme Temperature, 0°C						
Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass	
High Channel LTE5, 753.5 MHz	753.500005	753.5	0.1	1	Pass	
Single Channel LTE10, 751 MHz	751.000045	751	0.1	1	Pass	
Extreme Temperature, +10°C						
Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass	
High Channel LTE5, 753.5 MHz	753.500051	753.5	0.1	1	Pass	
Single Channel LTE10, 751 MHz	751.000045	751	0.1	1	Pass	
Extreme Temperature, +20°C						
Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass	
High Channel LTE5, 753.5 MHz	753.500067	753.5	0.1	1	Pass	
Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass	
Extreme Temperature, +30°C						
Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass	
High Channel LTE5, 753.5 MHz	753.500005	753.5	0.1	1	Pass	
Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass	
Extreme Temperature, +40°C						
Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass	
High Channel LTE5, 753.5 MHz	753.500005	753.5	0.1	1	Pass	
Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass	
Extreme Temperature, +50°C						
Low Channel LTE5, 748.5 MHz	748.500058	748.5	0.1	1	Pass	
High Channel LTE5, 753.5 MHz	753.500067	753.5	0.1	1	Pass	
Single Channel LTE10, 751 MHz	751.000061	751	0.1	1	Pass	

FREQUENCY STABILITY

Antenna Port 1, Normal Temperature and Voltage, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500059	748.5	0.1	1	Pass	

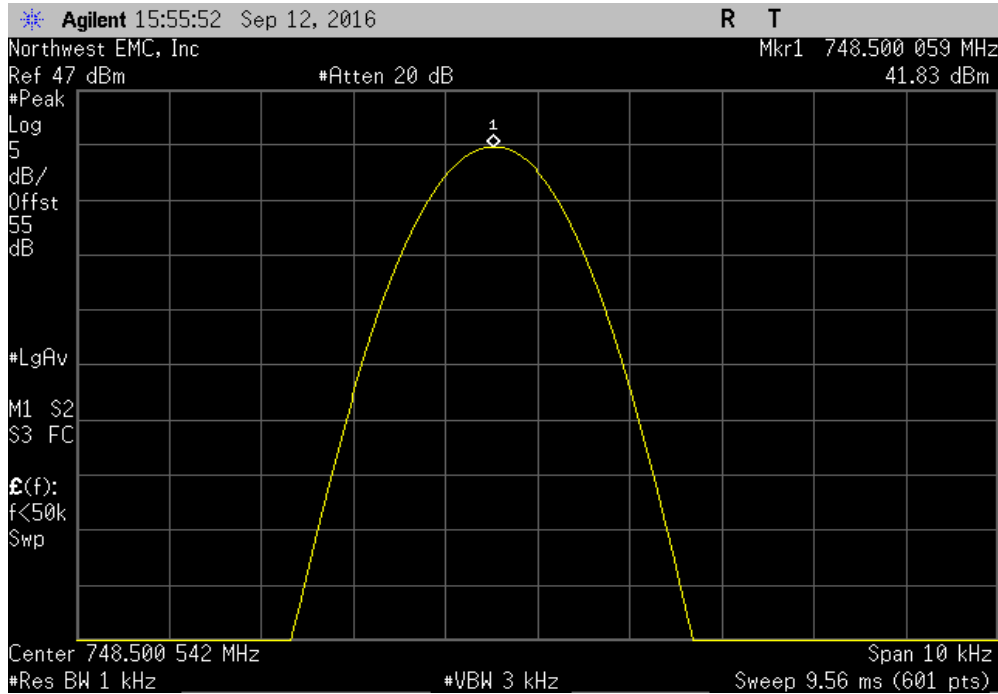


Antenna Port 1, Normal Temperature and Voltage, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500051	753.5	0.1	1	Pass	

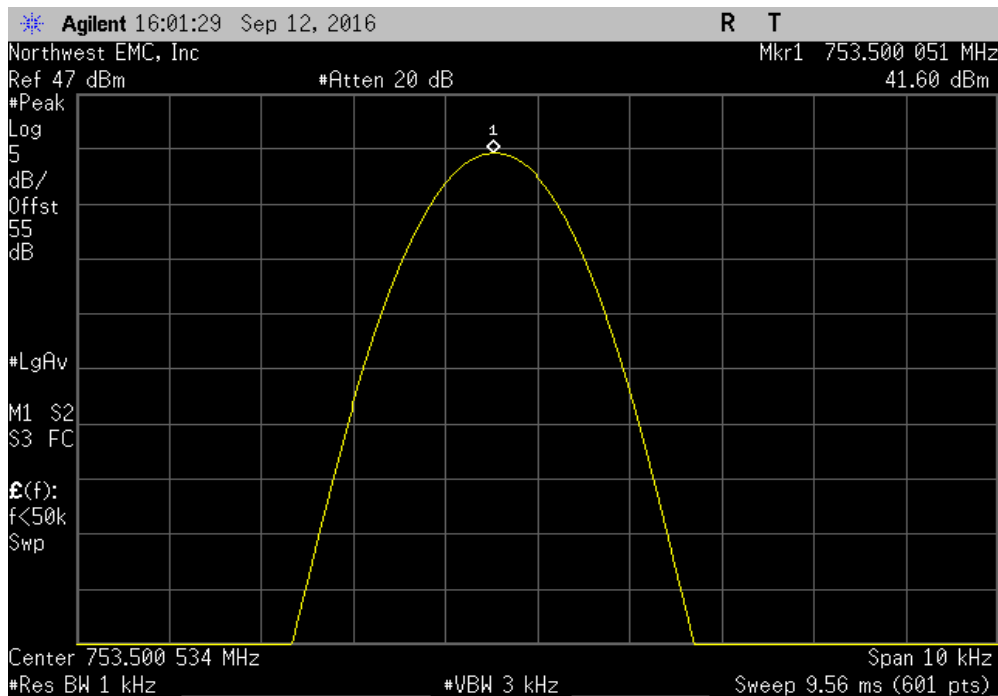


FREQUENCY STABILITY

Antenna Port 1, Normal Temperature and Voltage, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

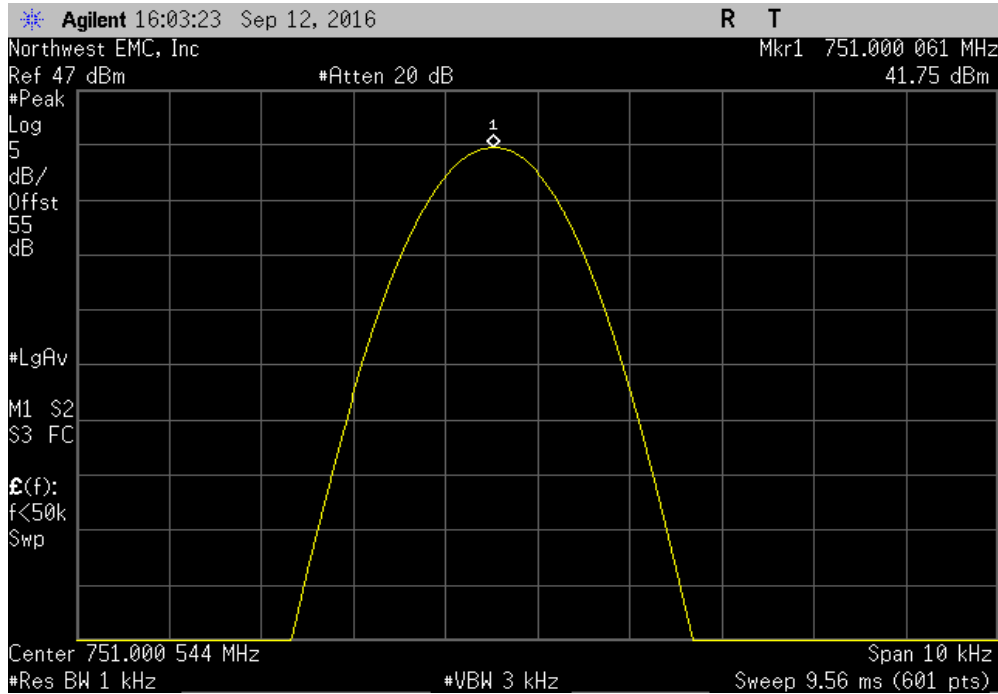


Antenna Port 1, Extreme Voltage, 55.2 VDC, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

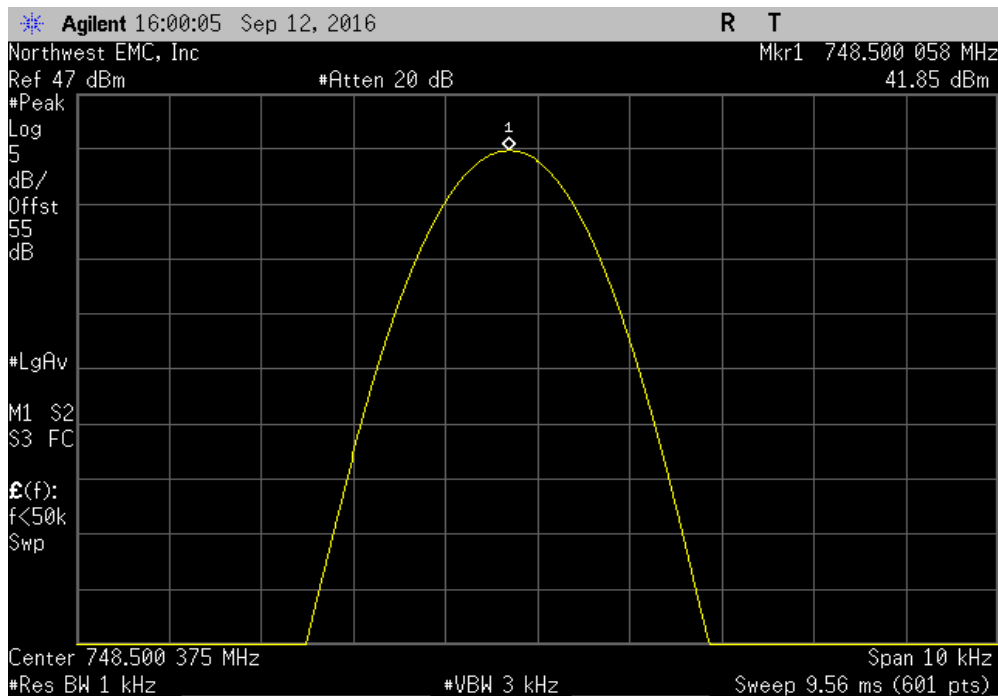


FREQUENCY STABILITY

Antenna Port 1, Extreme Voltage, 55.2 VDC, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500051	753.5	0.1	1	Pass	

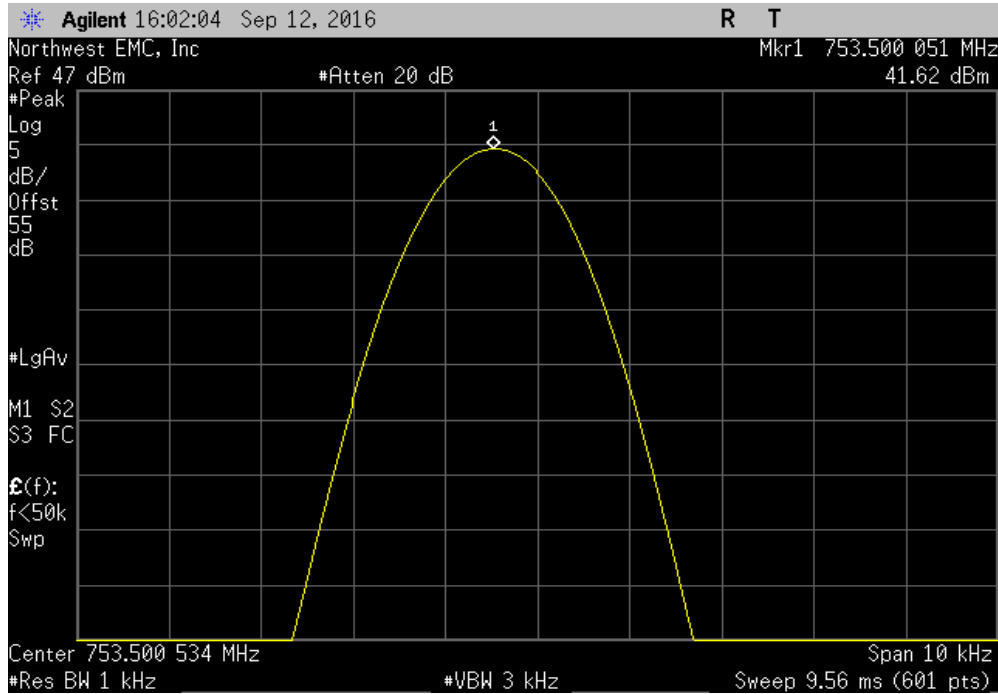


Antenna Port 1, Extreme Voltage, 55.2 VDC, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

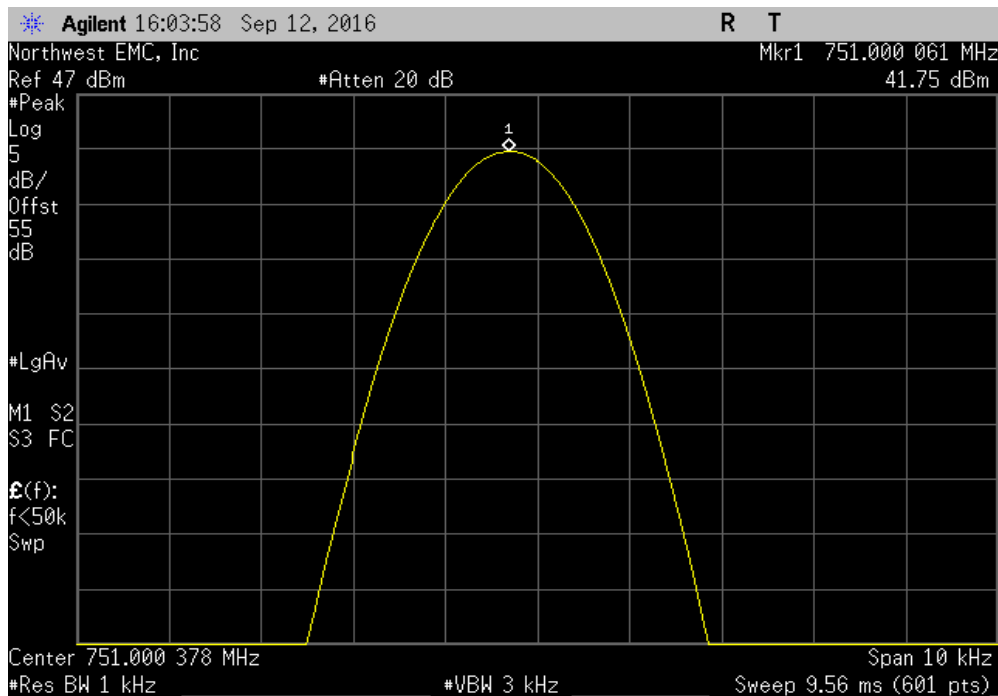


FREQUENCY STABILITY

Antenna Port 1, Extreme Voltage, 40.8 VDC, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500059	748.5	0.1	1	Pass	

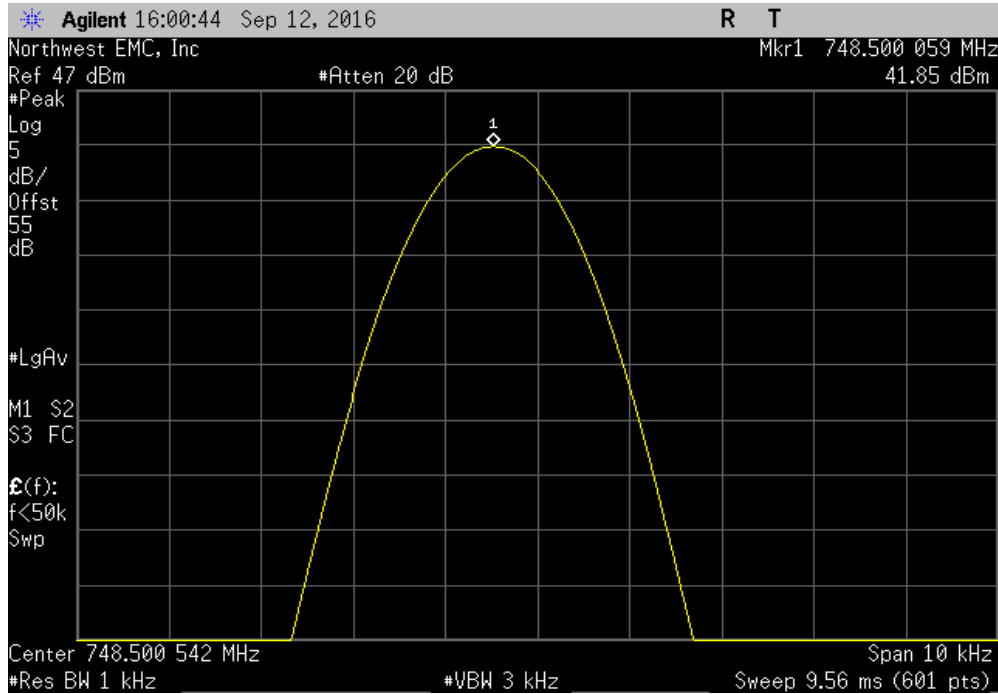


Antenna Port 1, Extreme Voltage, 40.8 VDC, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500067	753.5	0.1	1	Pass	

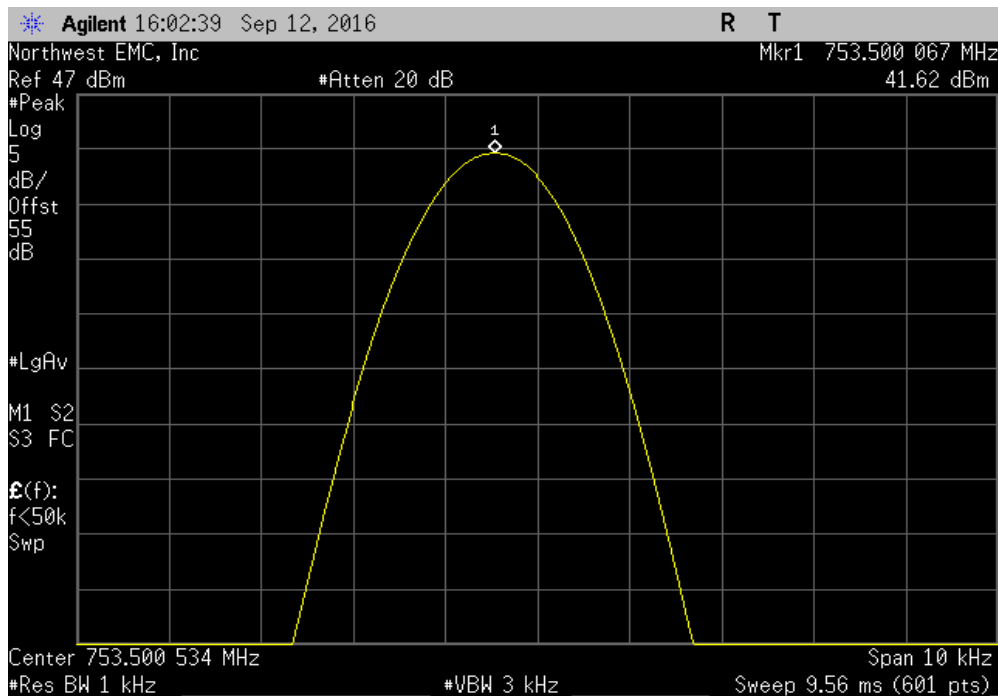


FREQUENCY STABILITY

Antenna Port 1, Extreme Voltage, 40.8 VDC, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

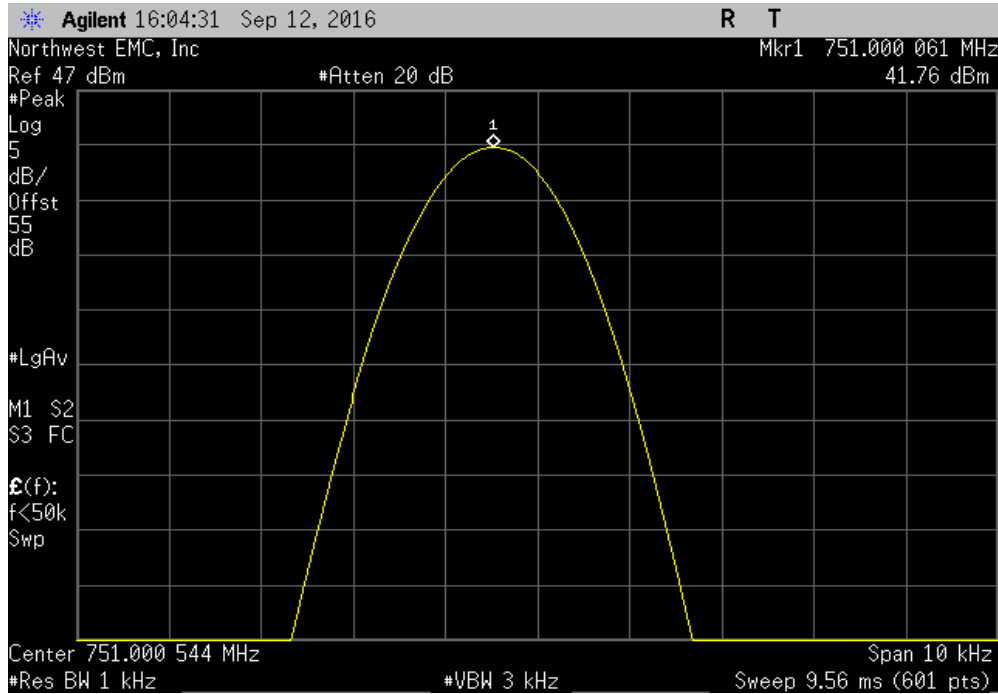


Antenna Port 1, Extreme Temperature, -30°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500192	748.5	0.3	1	Pass	

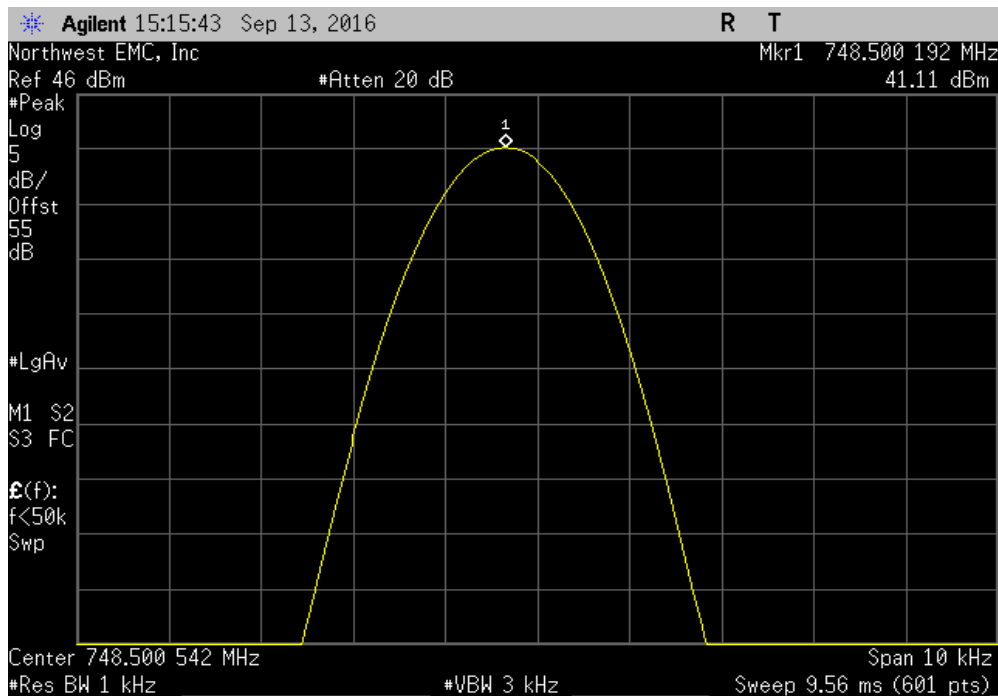


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, -30°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500184	753.5	0.2	1	Pass	

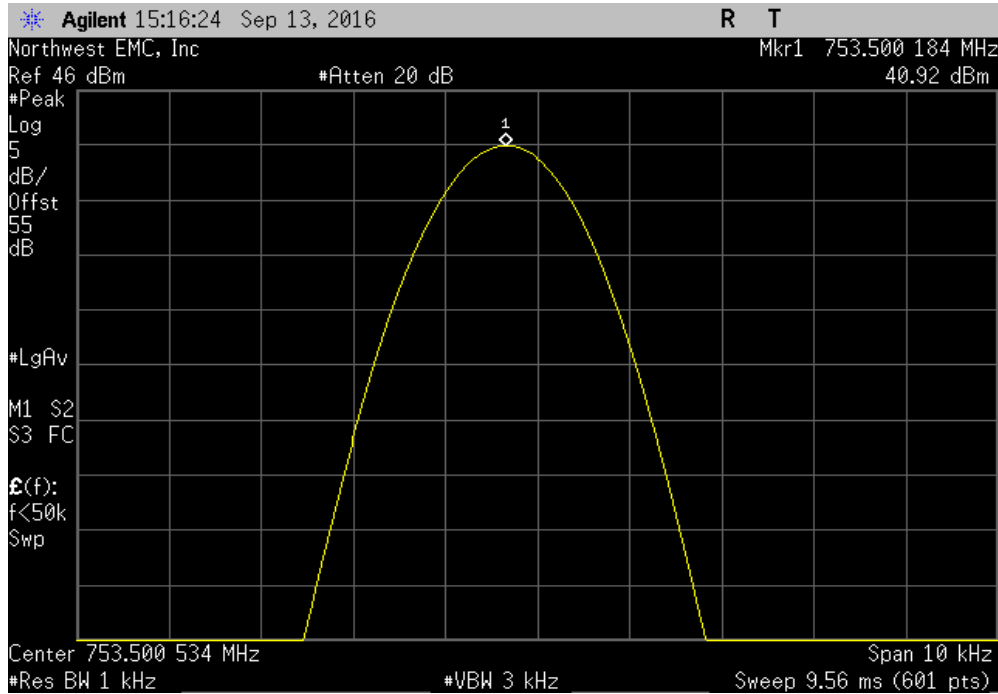


Antenna Port 1, Extreme Temperature, -30°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000183	751	0.2	1	Pass	

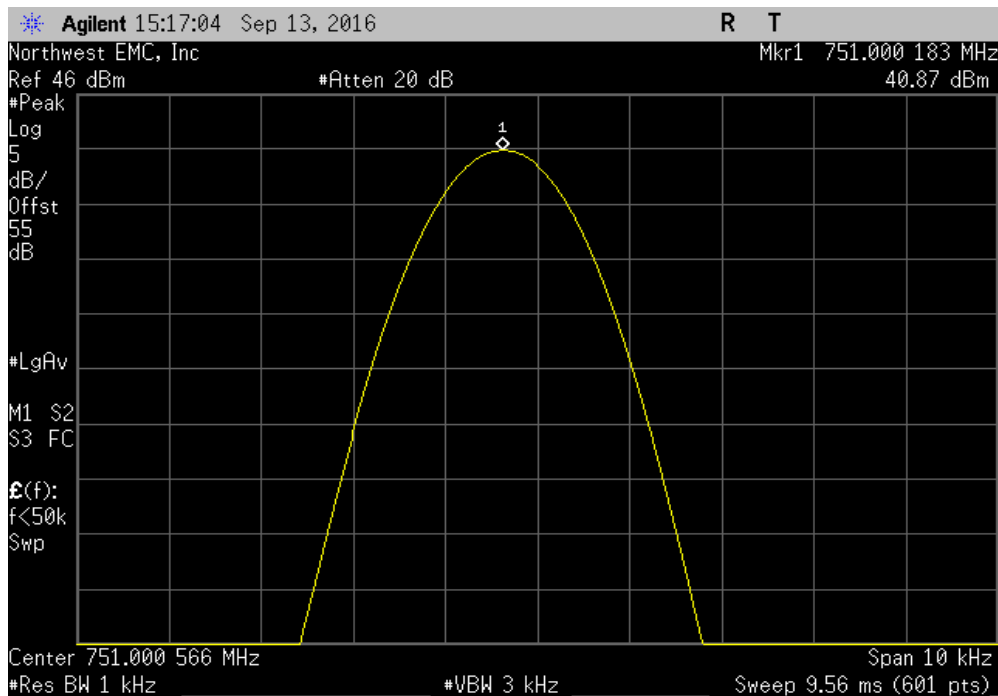


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, -20°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500294	748.5	0.4	1	Pass	

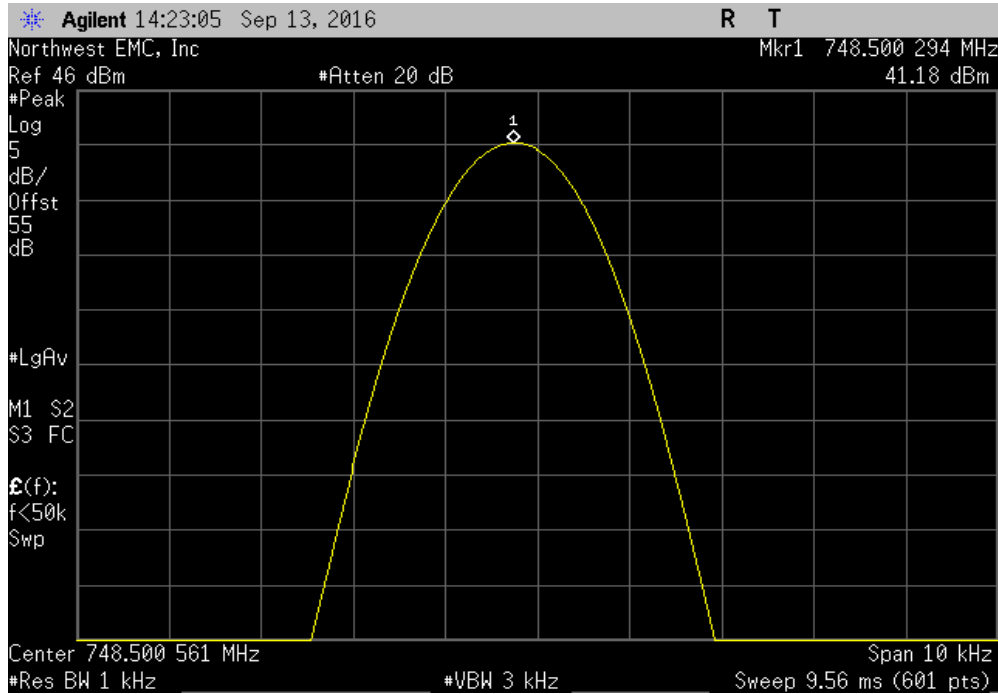


Antenna Port 1, Extreme Temperature, -20°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500301	753.5	0.4	1	Pass	

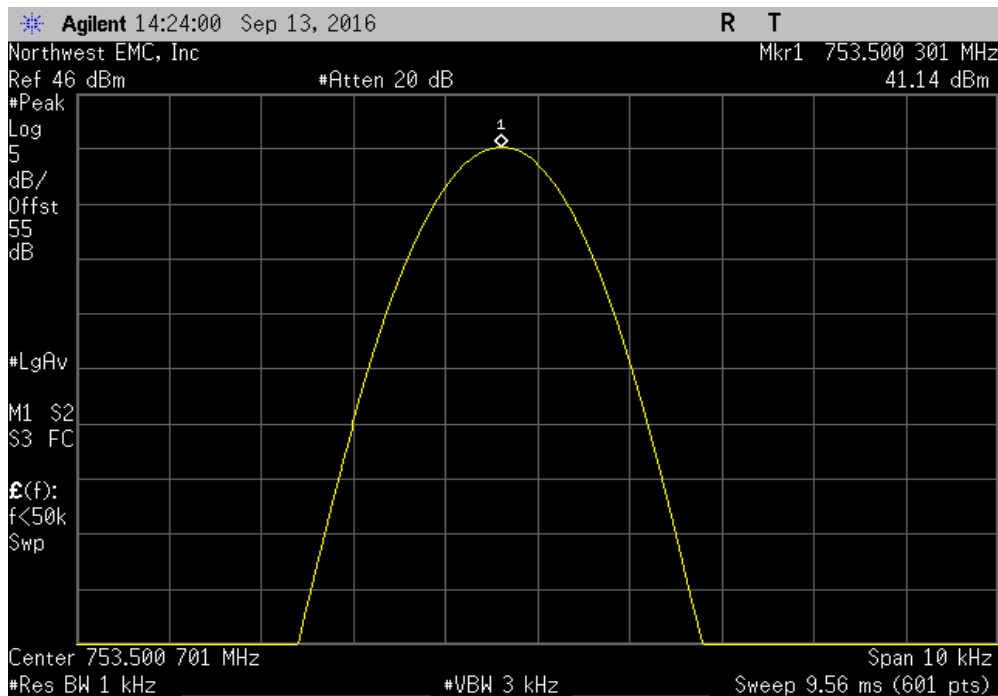


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, -20°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000294	751	0.4	1	Pass	

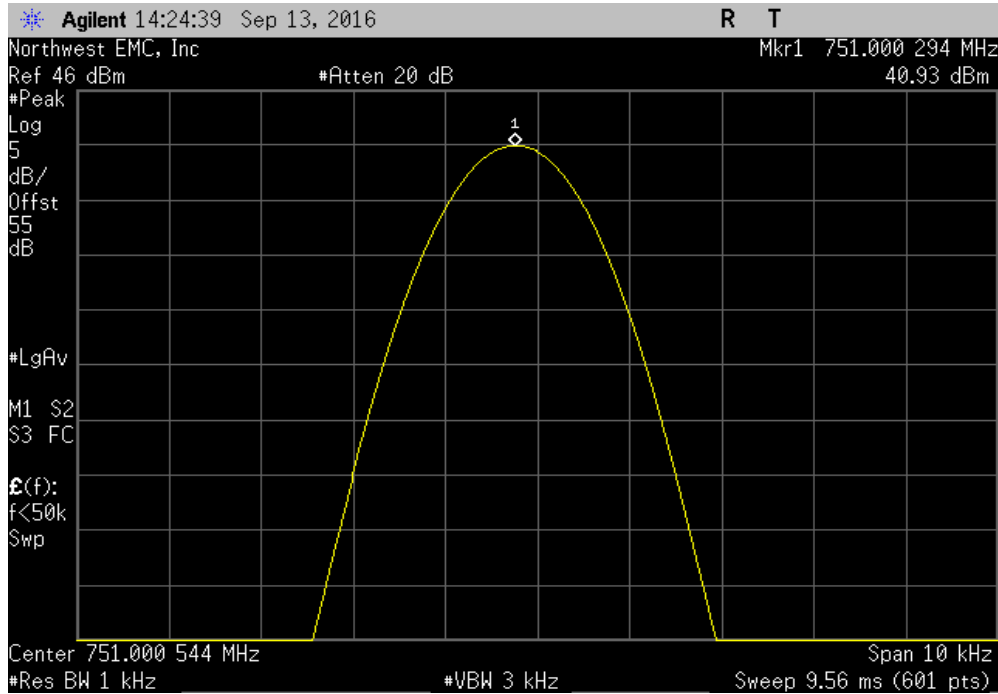


Antenna Port 1, Extreme Temperature, -10°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500478	748.5	0.6	1	Pass	

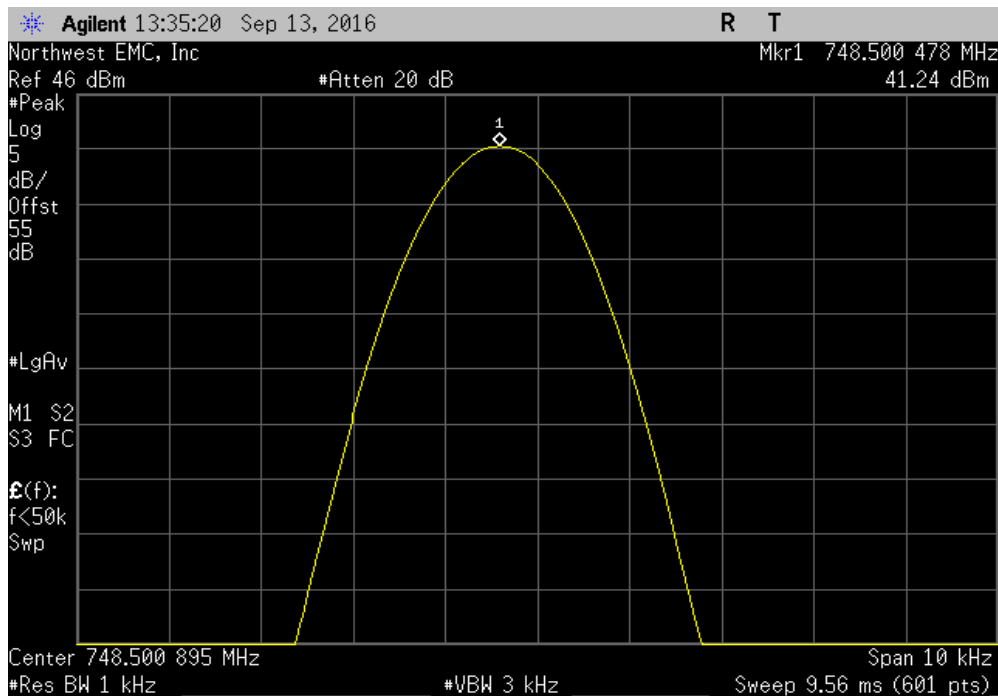


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, -10°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500468	753.5	0.6	1	Pass	

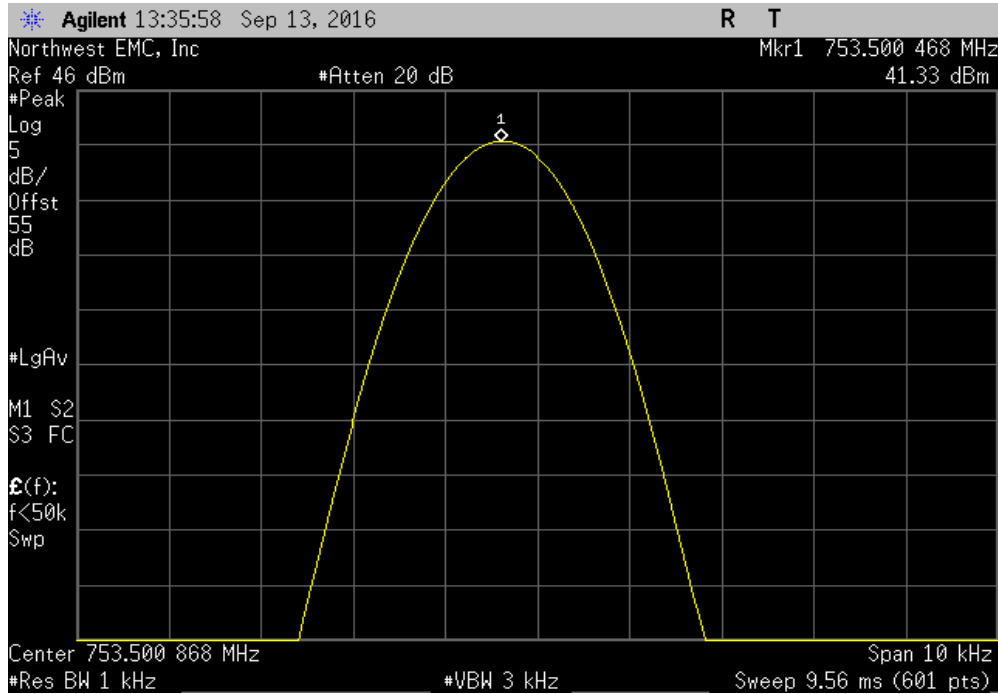


Antenna Port 1, Extreme Temperature, -10°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000483	751	0.6	1	Pass	

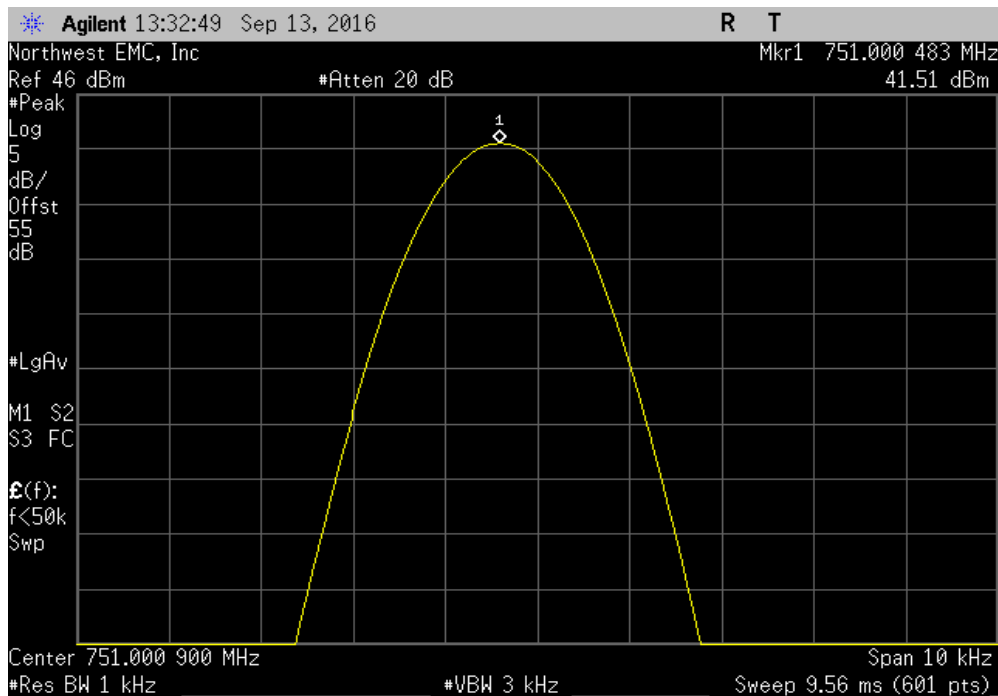


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, 0°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500045	748.5	0.1	1	Pass	

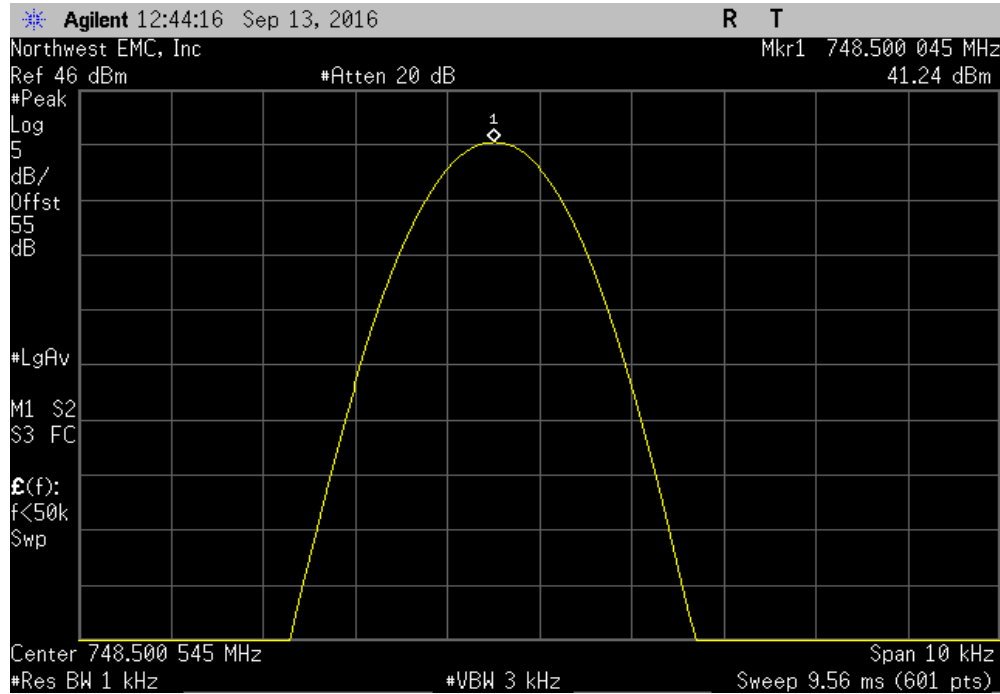


Antenna Port 1, Extreme Temperature, 0°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500005	753.5	0.1	1	Pass	

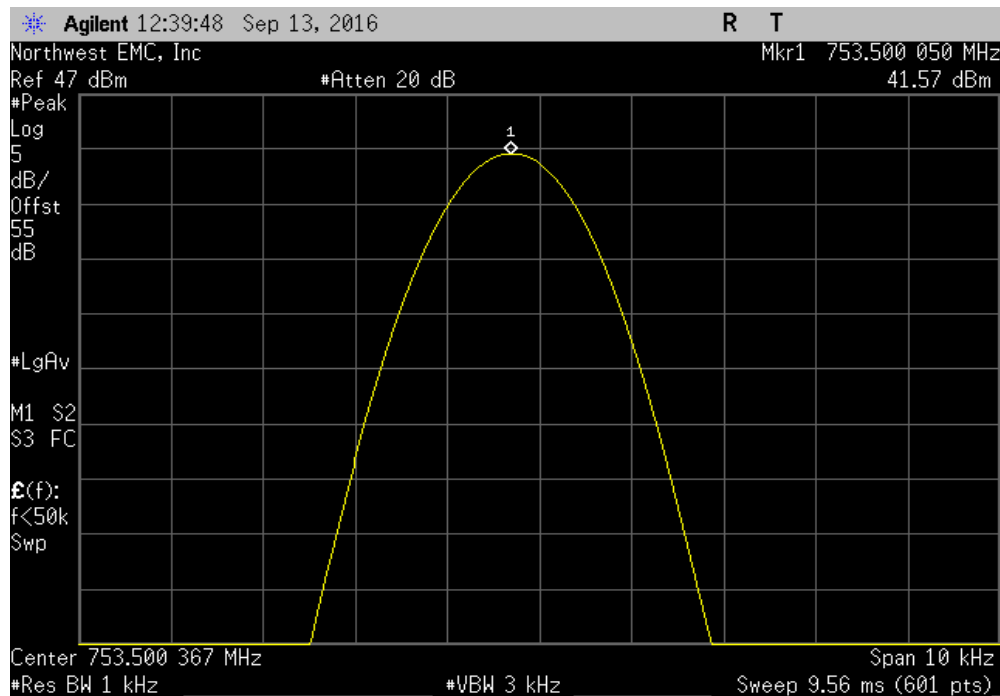


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, 0°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.00005	751	0.1	1	Pass	

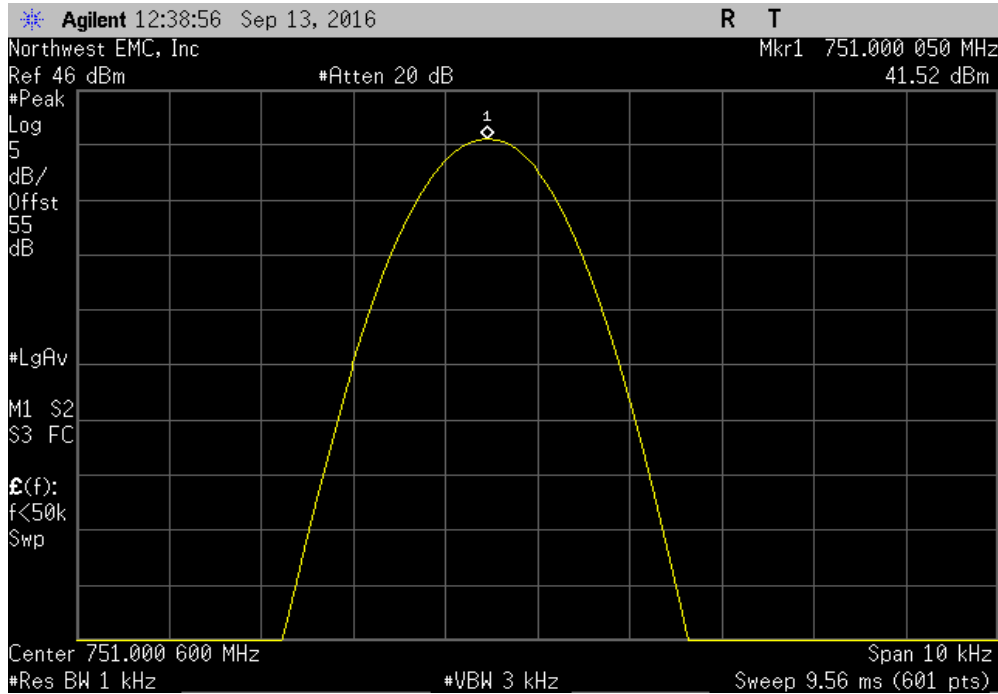


Antenna Port 1, Extreme Temperature, +10°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500512	748.5	0.7	1	Pass	

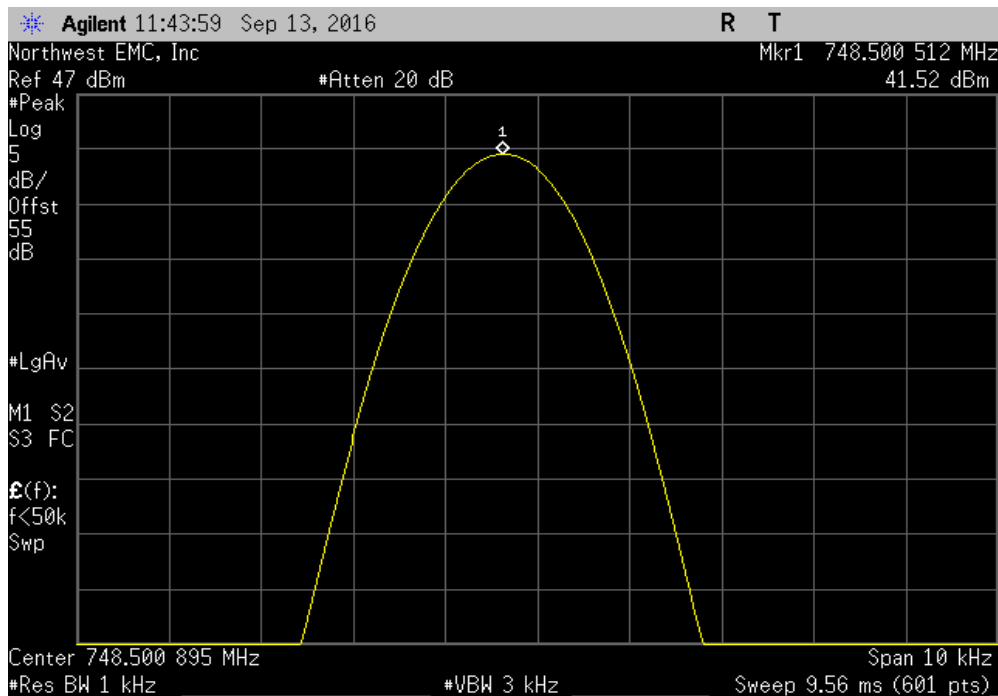


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, +10°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500517	753.5	0.7	1	Pass	

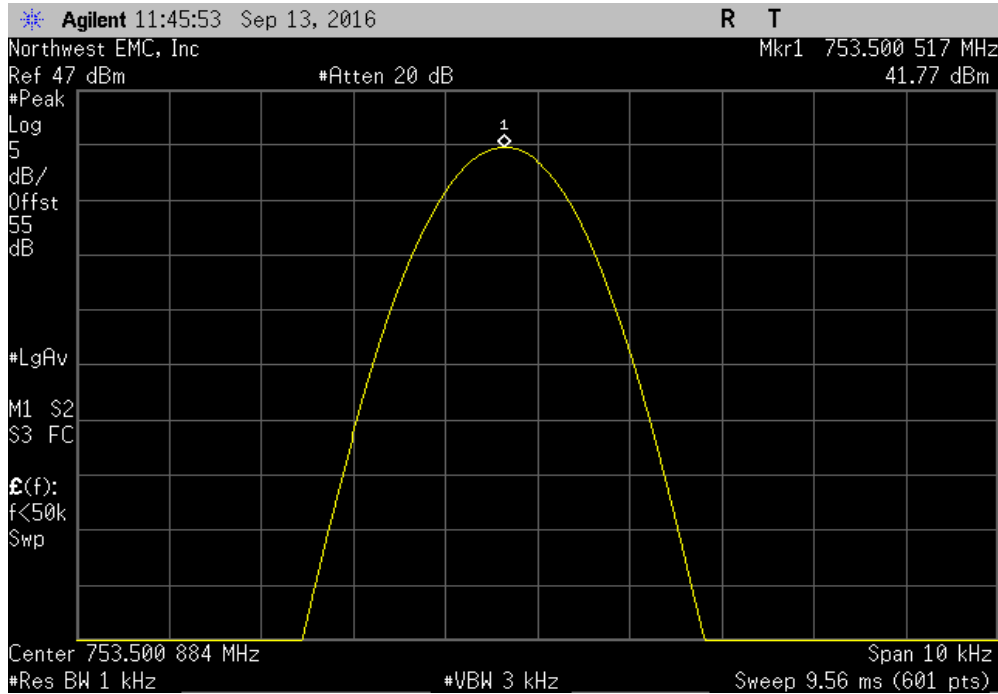


Antenna Port 1, Extreme Temperature, +10°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000045	751	0.1	1	Pass	

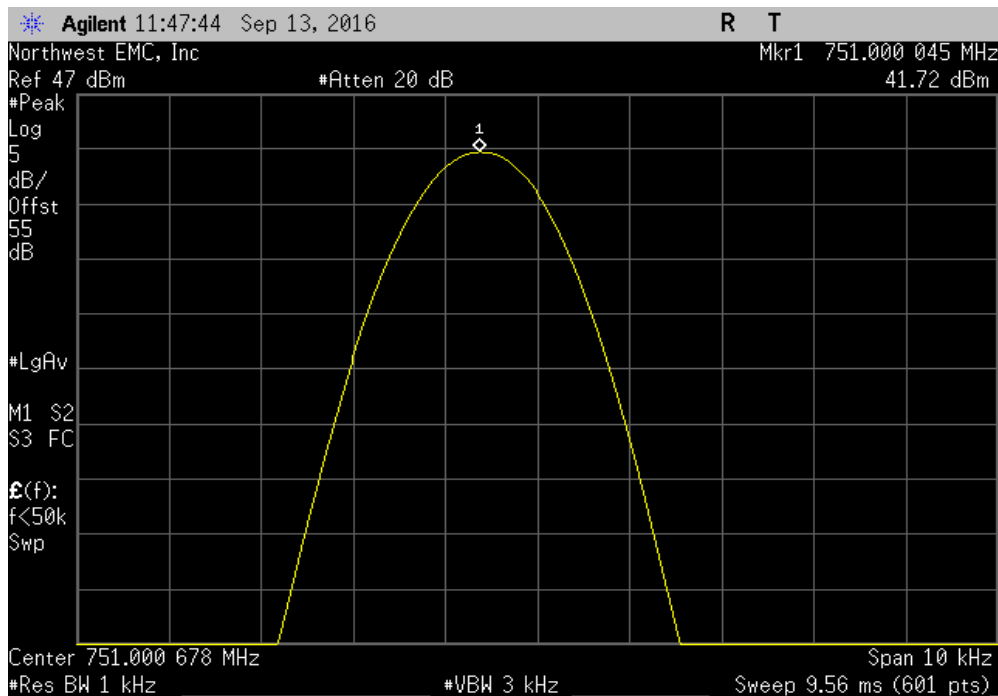


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, +20°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

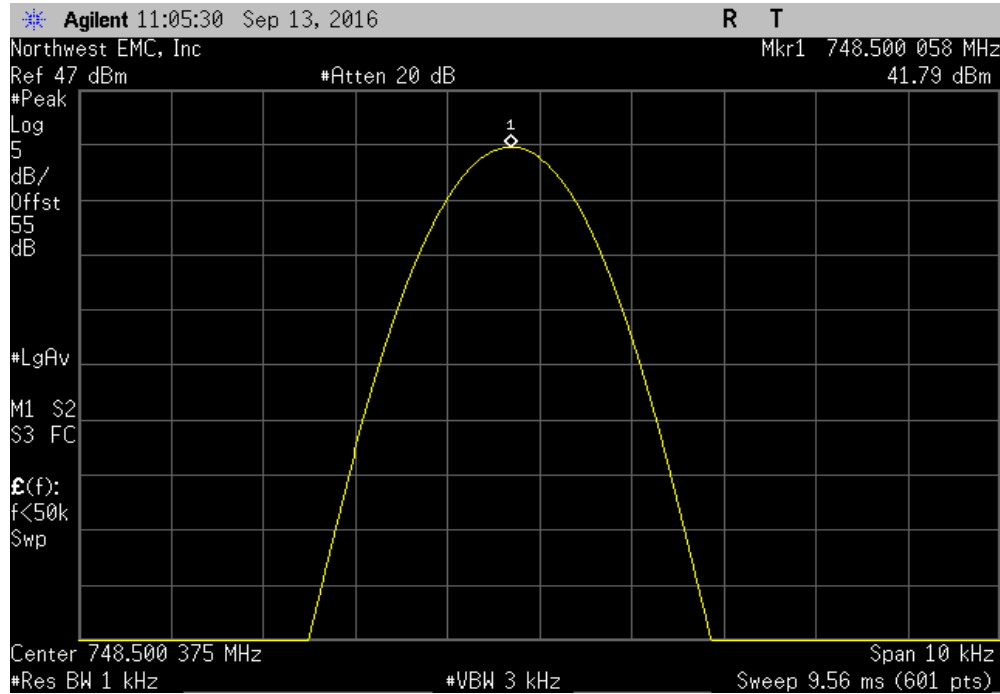


Antenna Port 1, Extreme Temperature, +20°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500501	753.5	0.7	1	Pass	

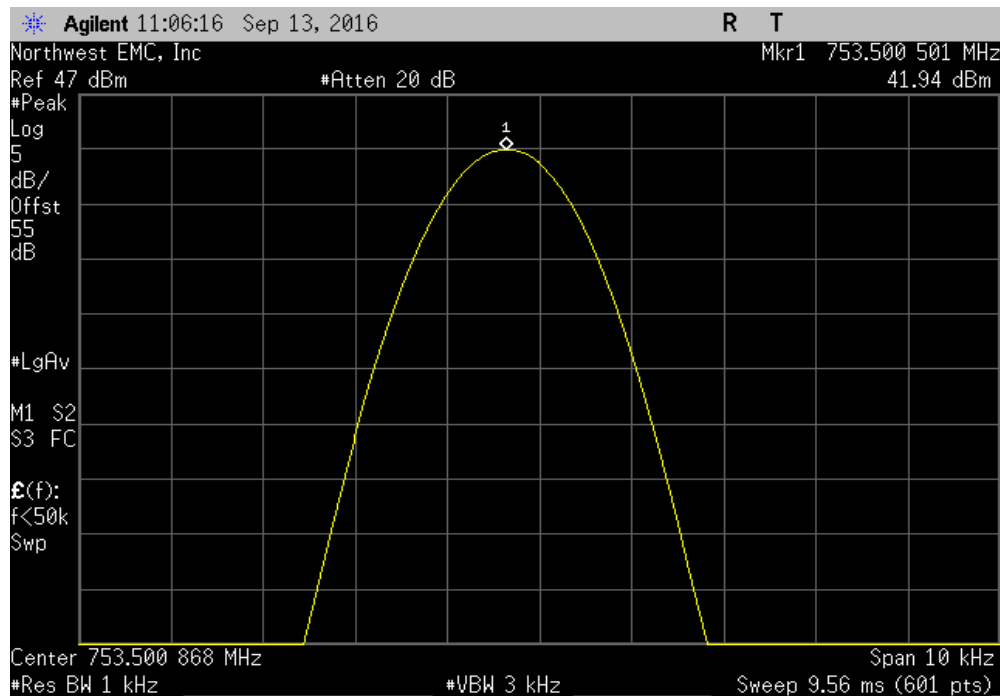


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, +20°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000045	751	0.1	1	Pass	

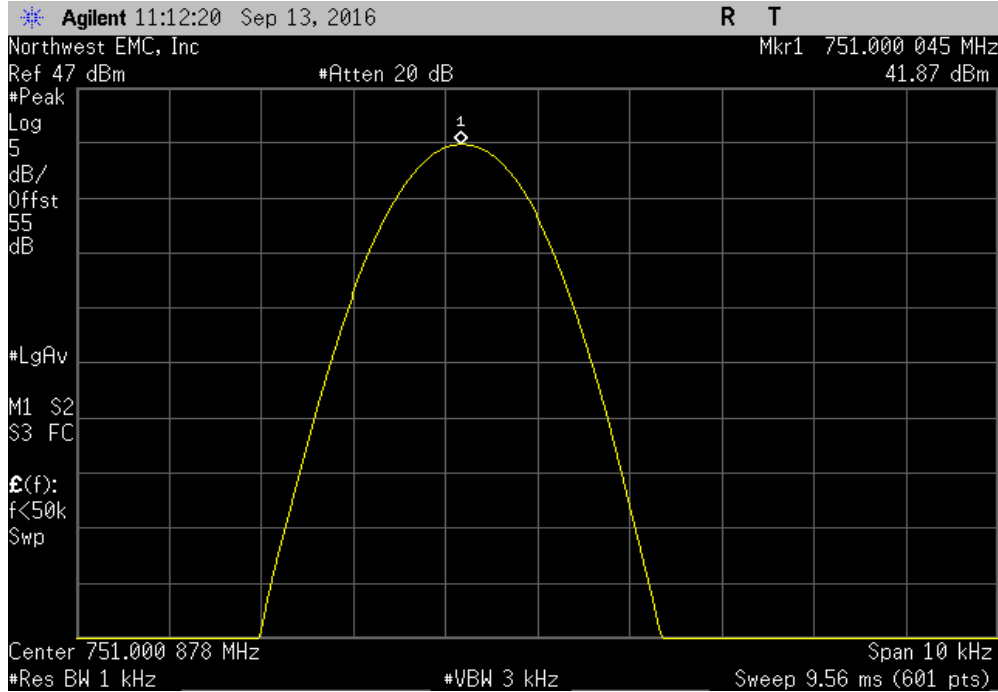


Antenna Port 1, Extreme Temperature, +30°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

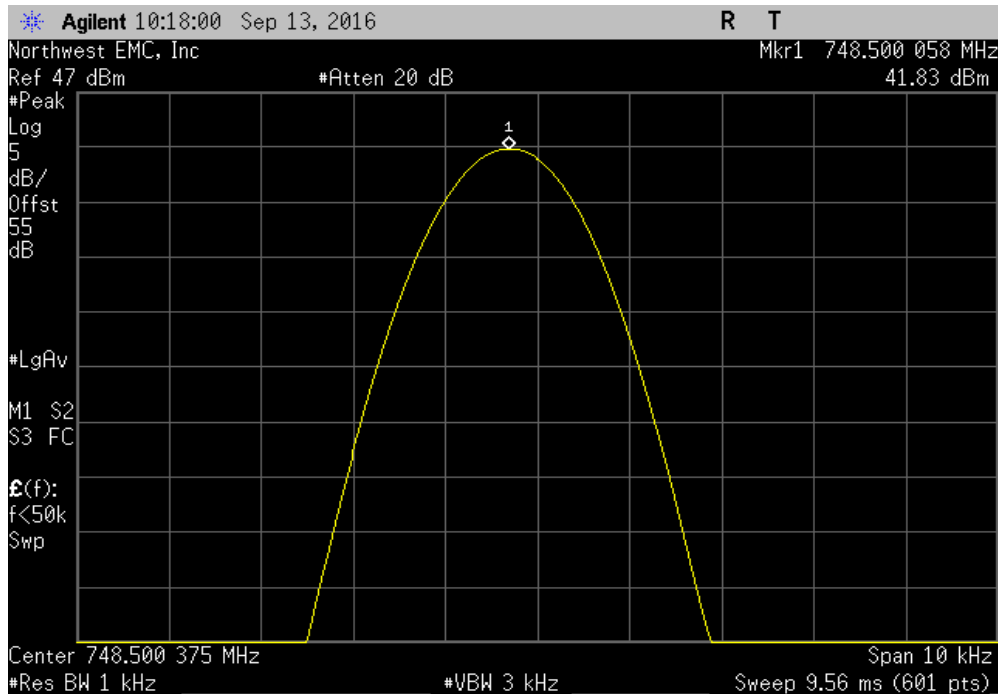


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, +30°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.50005	753.5	0.1	1	Pass	

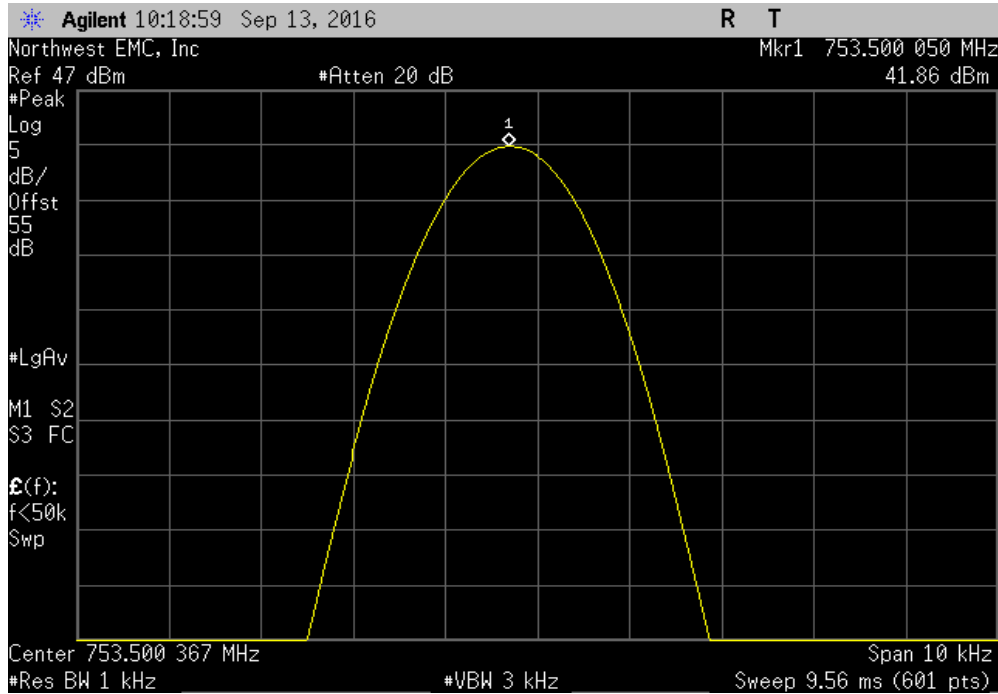


Antenna Port 1, Extreme Temperature, +30°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

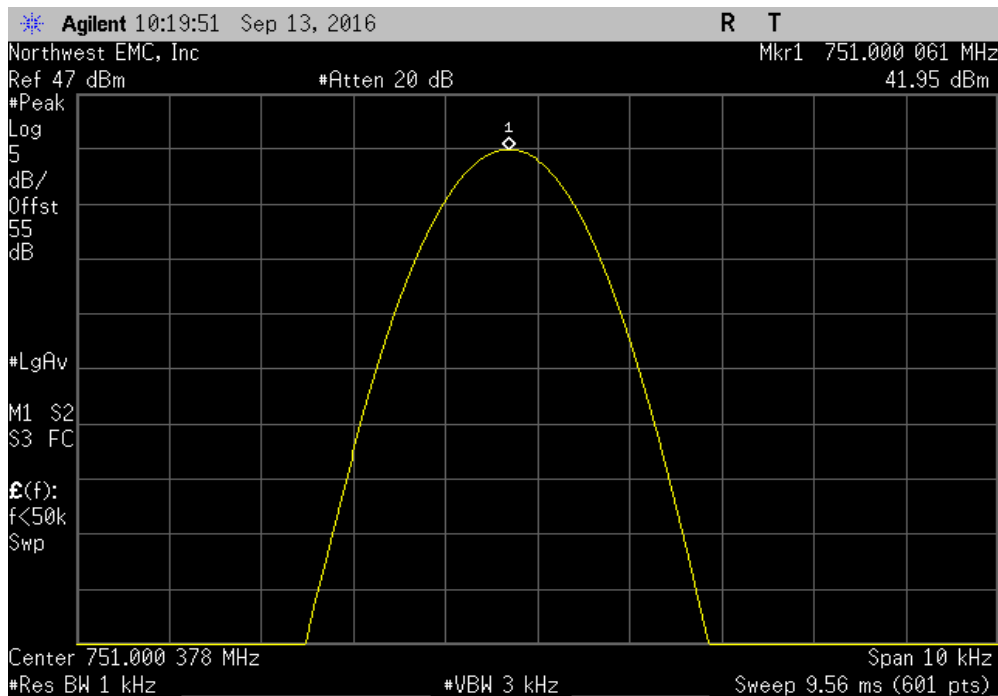


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, +40°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

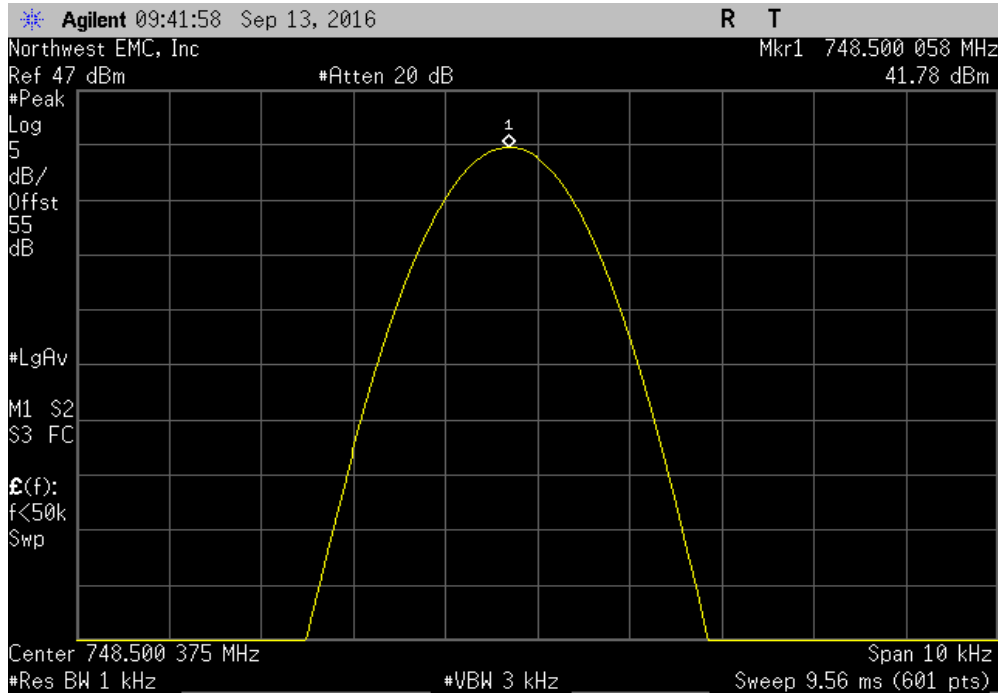


Antenna Port 1, Extreme Temperature, +40°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500005	753.5	0.1	1	Pass	

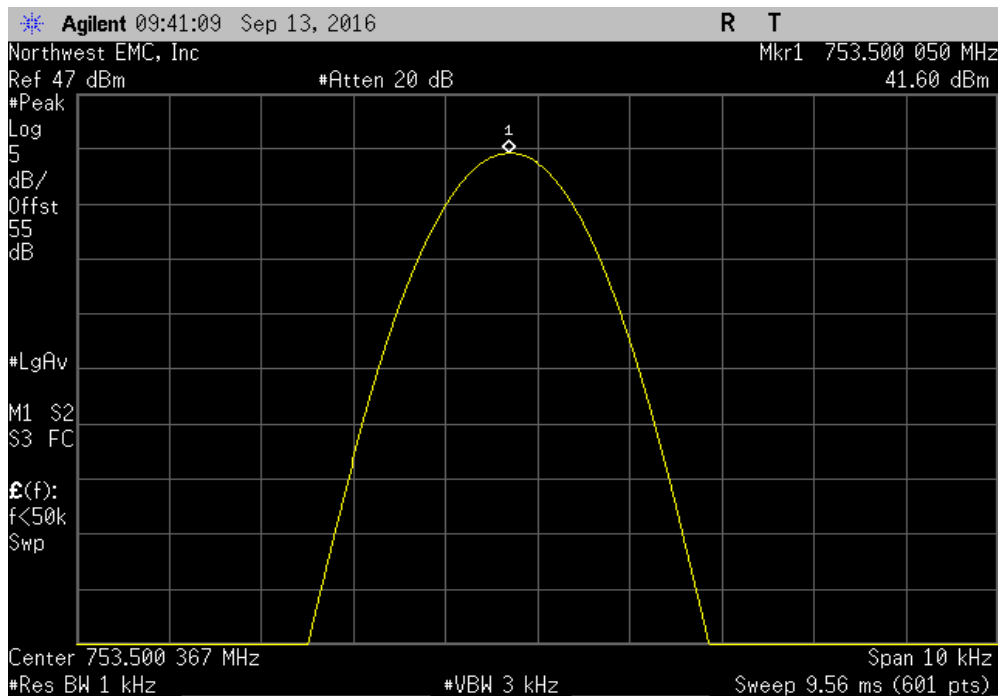


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, +40°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000066	751	0.1	1	Pass	

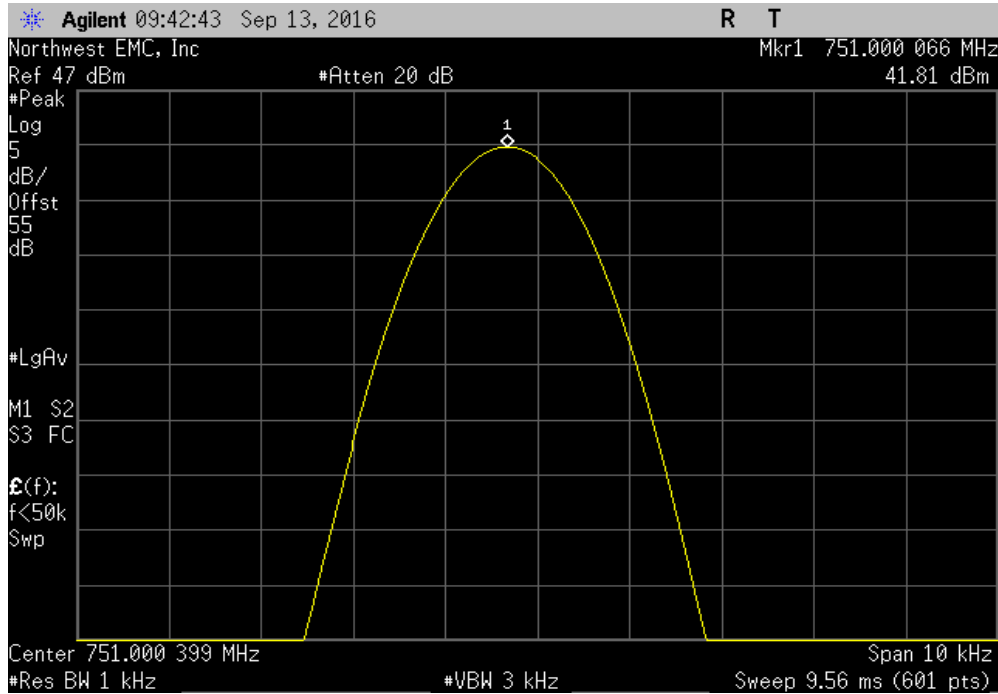


Antenna Port 1, Extreme Temperature, +50°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

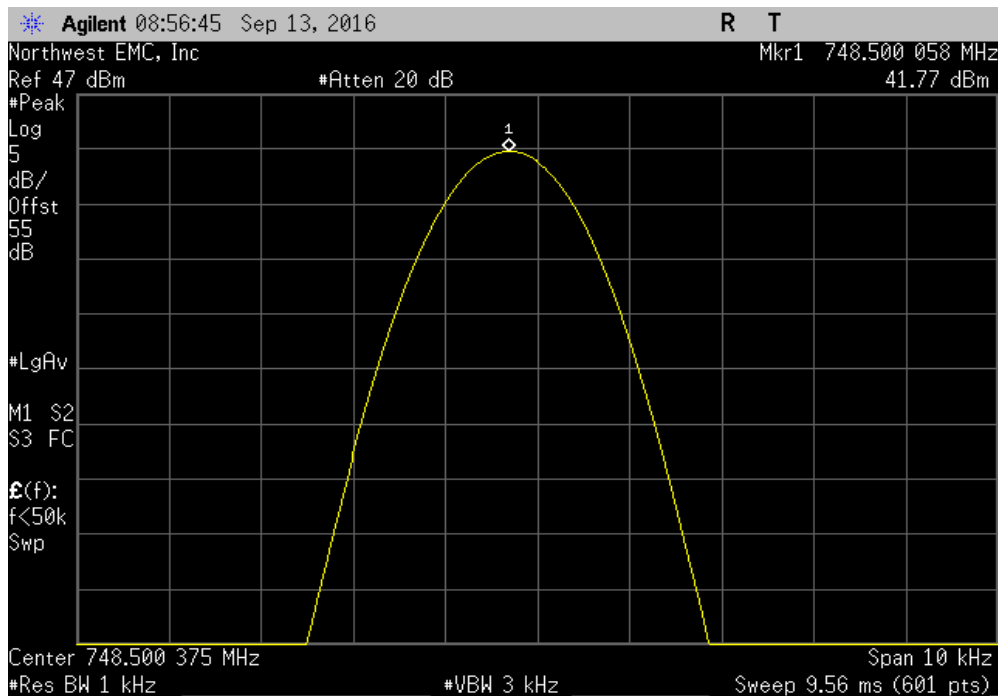


FREQUENCY STABILITY

Antenna Port 1, Extreme Temperature, +50°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500051	753.5	0.1	1	Pass	

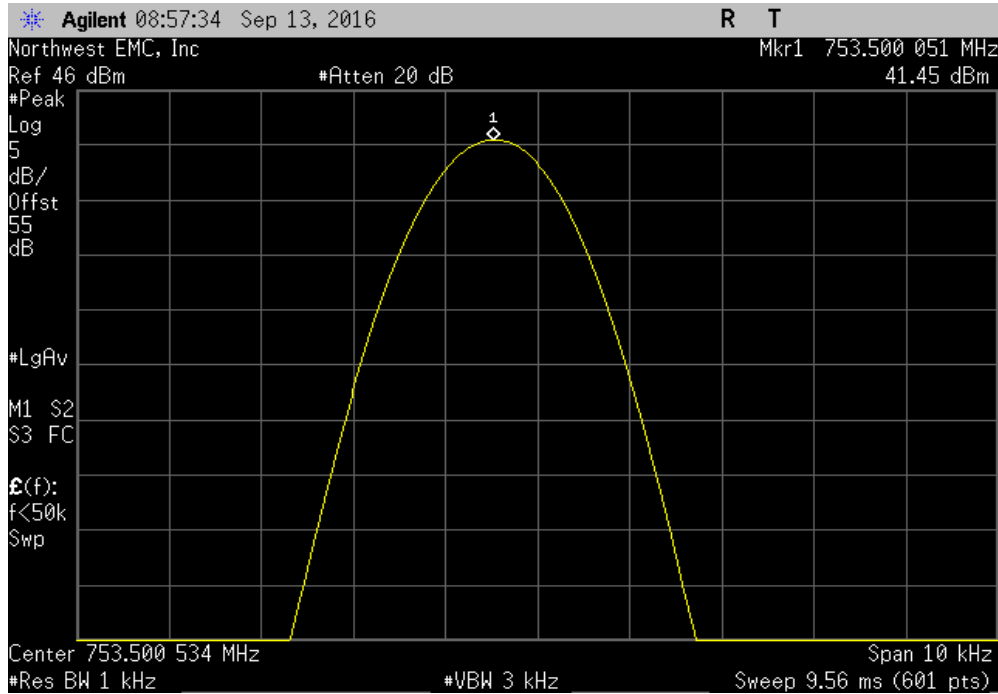


Antenna Port 1, Extreme Temperature, +50°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

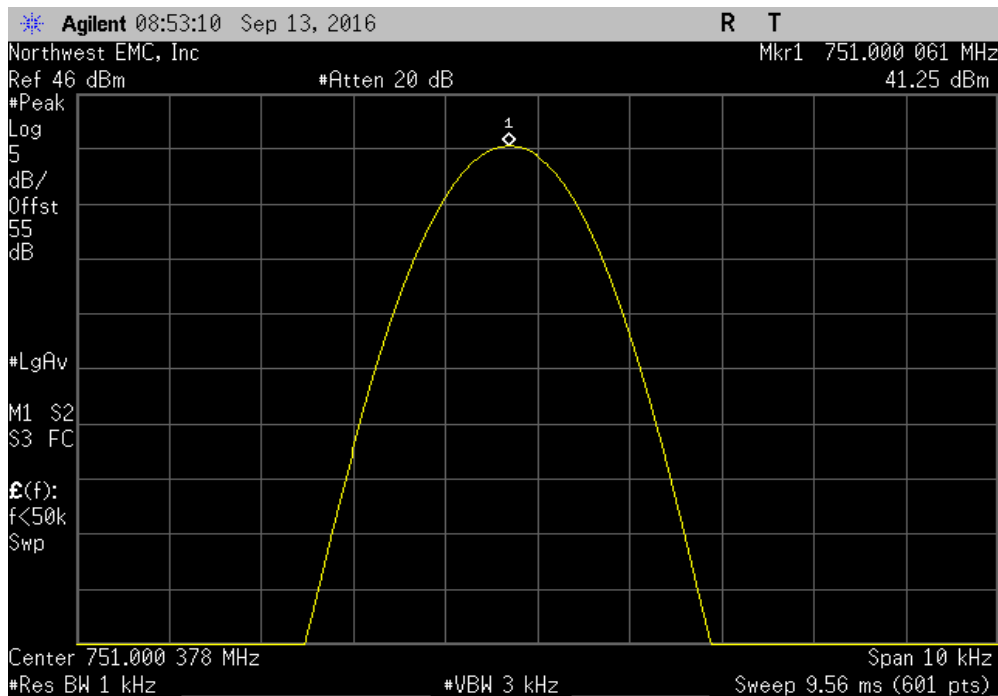


FREQUENCY STABILITY

Antenna Port 2, Normal Temperature and Voltage, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500059	748.5	0.1	1	Pass	

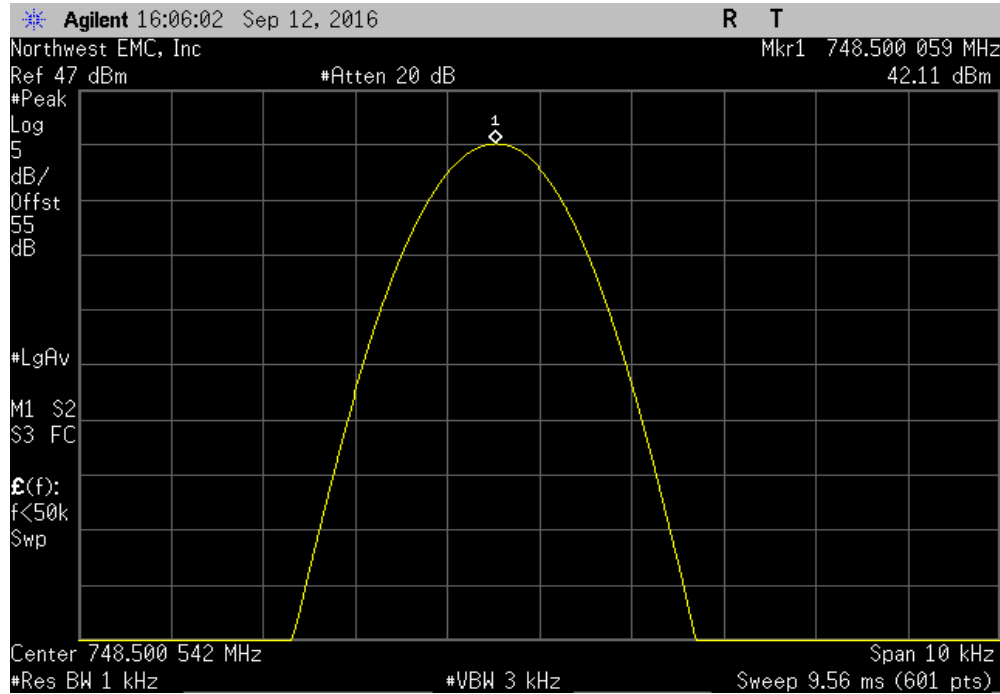


Antenna Port 2, Normal Temperature and Voltage, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500067	753.5	0.1	1	Pass	

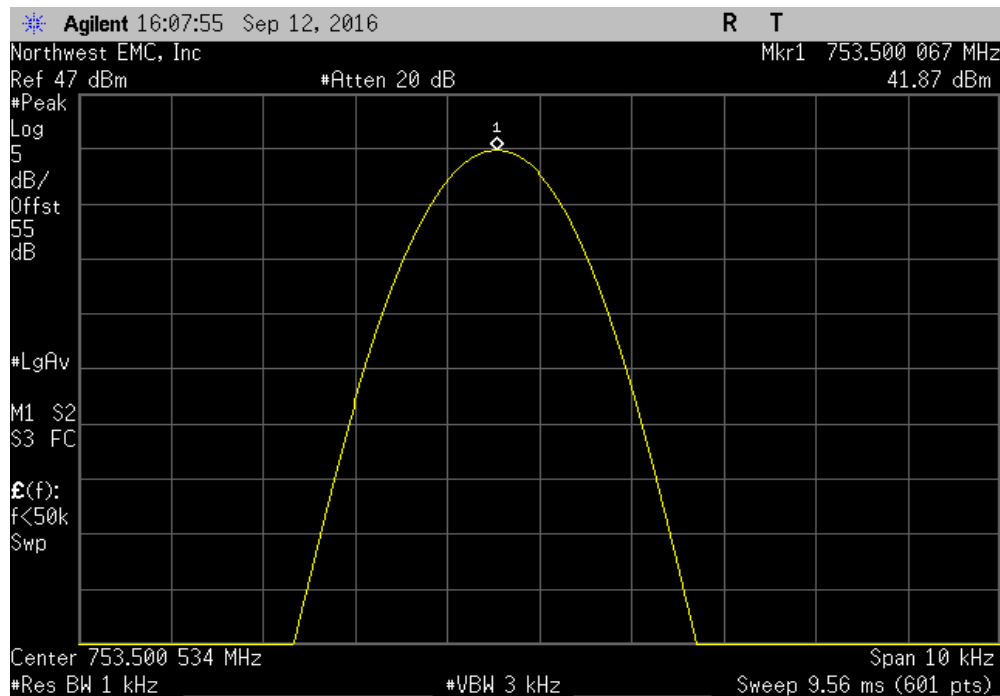


FREQUENCY STABILITY

Antenna Port 2, Normal Temperature and Voltage, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

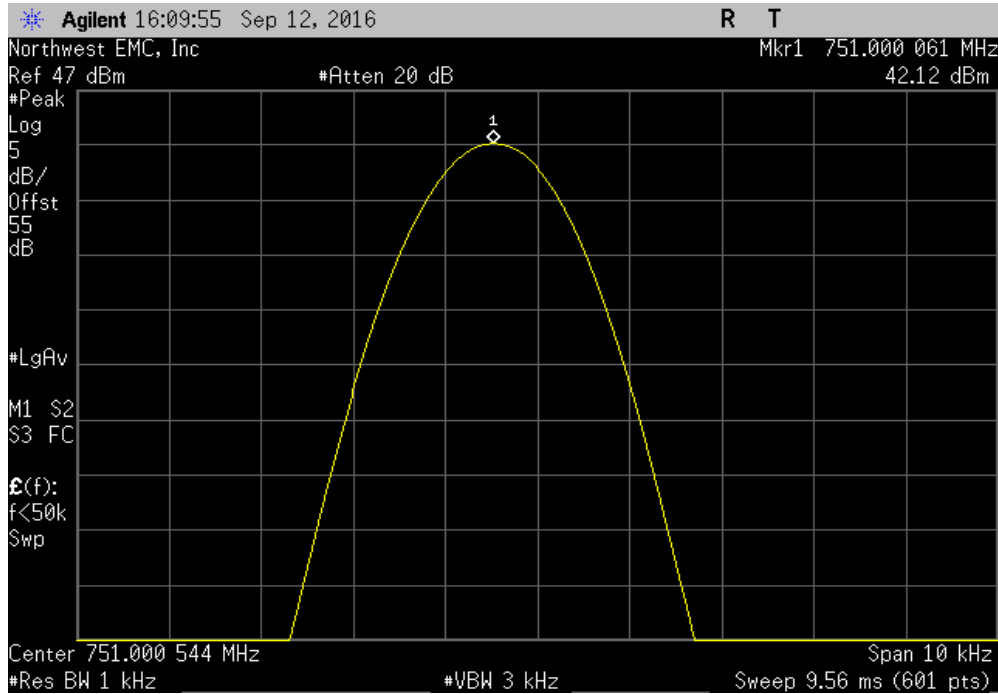


Antenna Port 2, Extreme Voltage, 55.2 VDC, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500059	748.5	0.1	1	Pass	

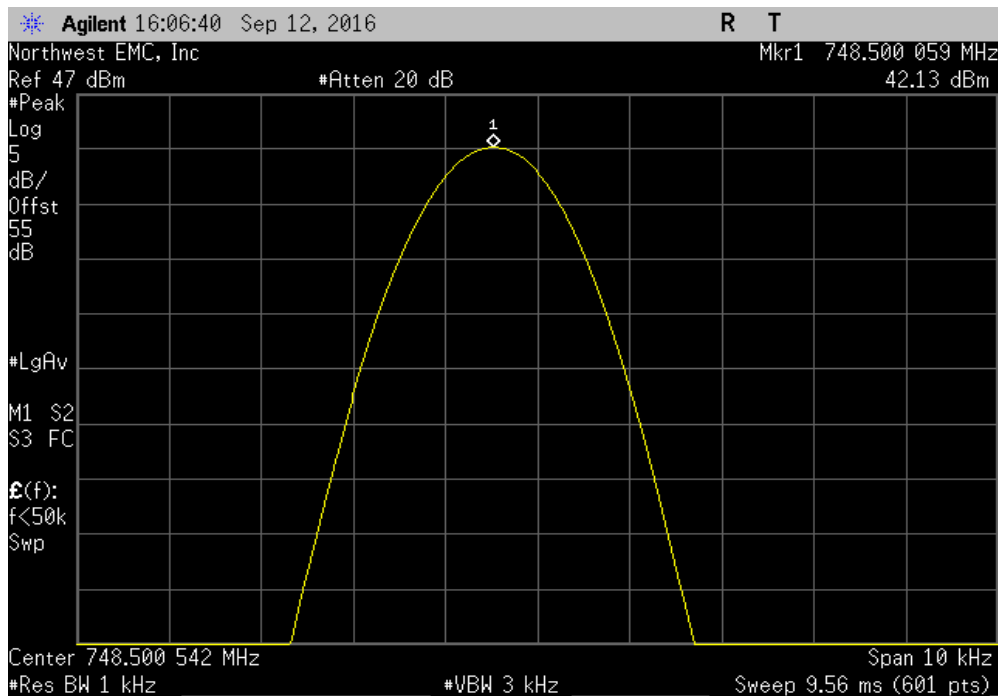


FREQUENCY STABILITY

Antenna Port 2, Extreme Voltage, 55.2 VDC, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500067	753.5	0.1	1	Pass	

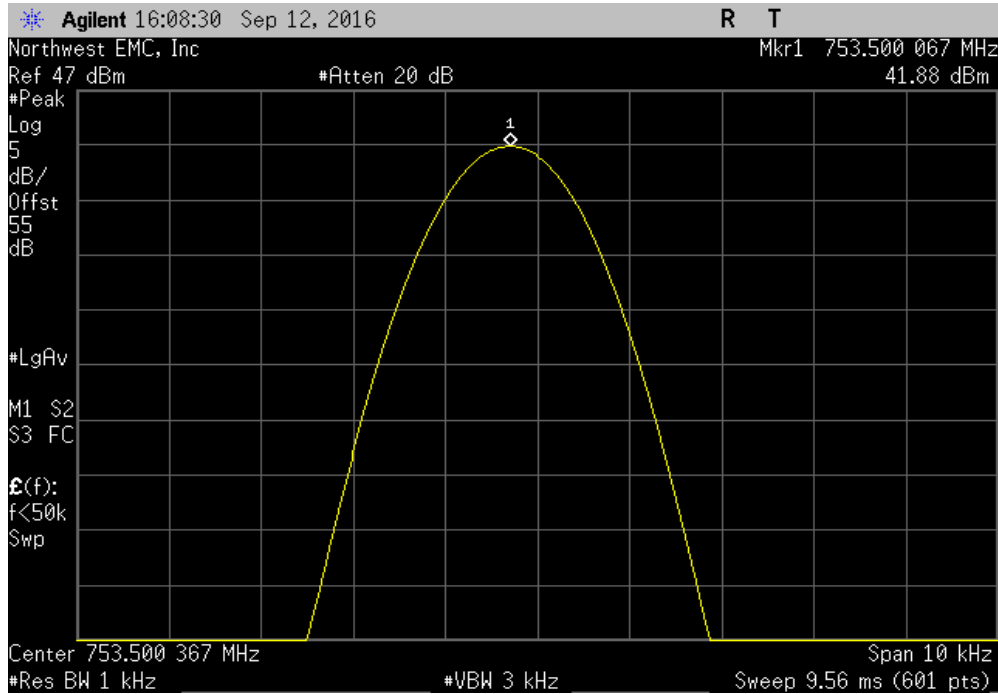


Antenna Port 2, Extreme Voltage, 55.2 VDC, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

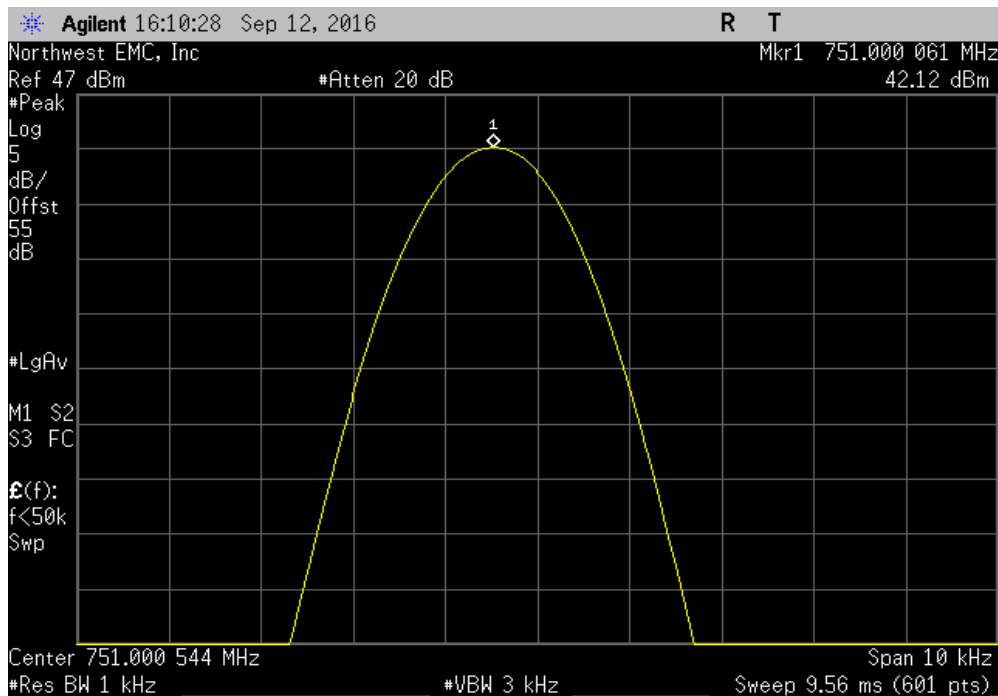


FREQUENCY STABILITY

Antenna Port 2, Extreme Voltage, 40.8 VDC, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500059	748.5	0.1	1	Pass	

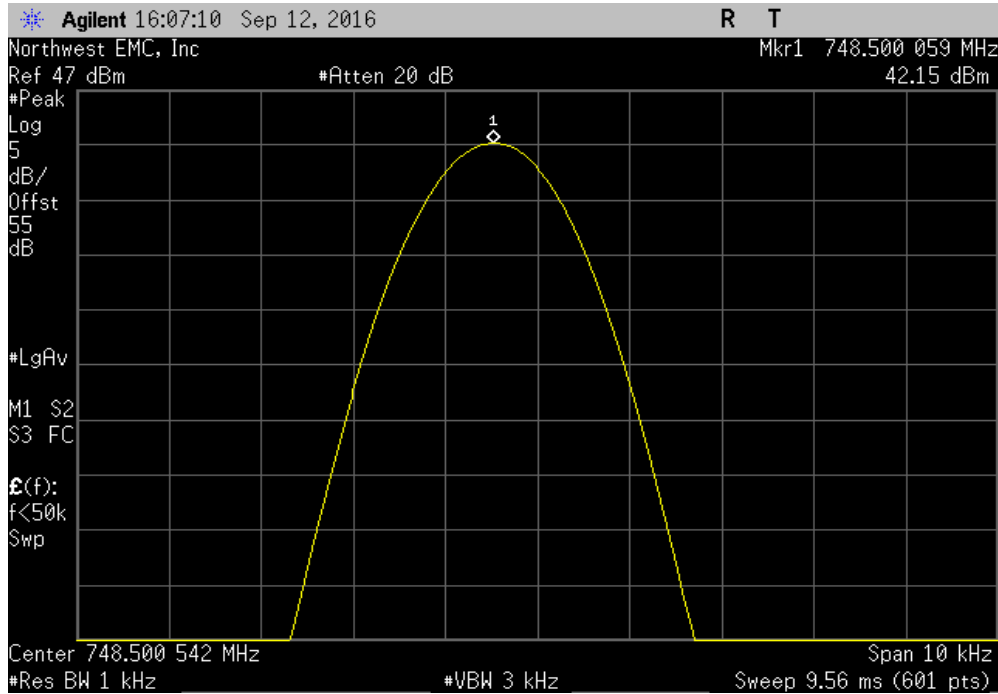


Antenna Port 2, Extreme Voltage, 40.8 VDC, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500005	753.5	0.1	1	Pass	

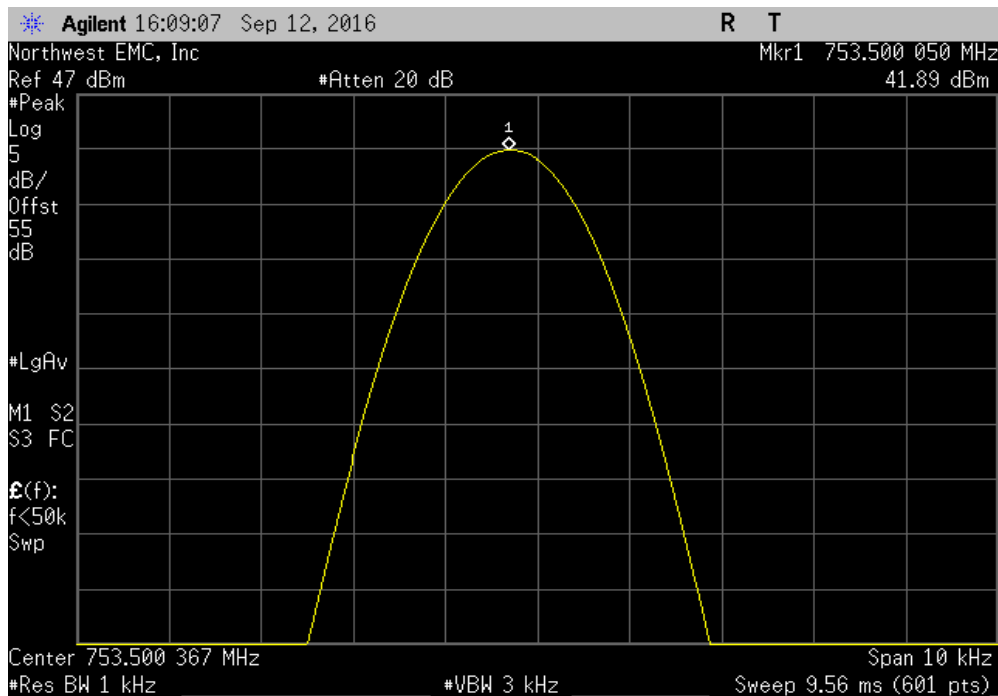


FREQUENCY STABILITY

Antenna Port 2, Extreme Voltage, 40.8 VDC, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

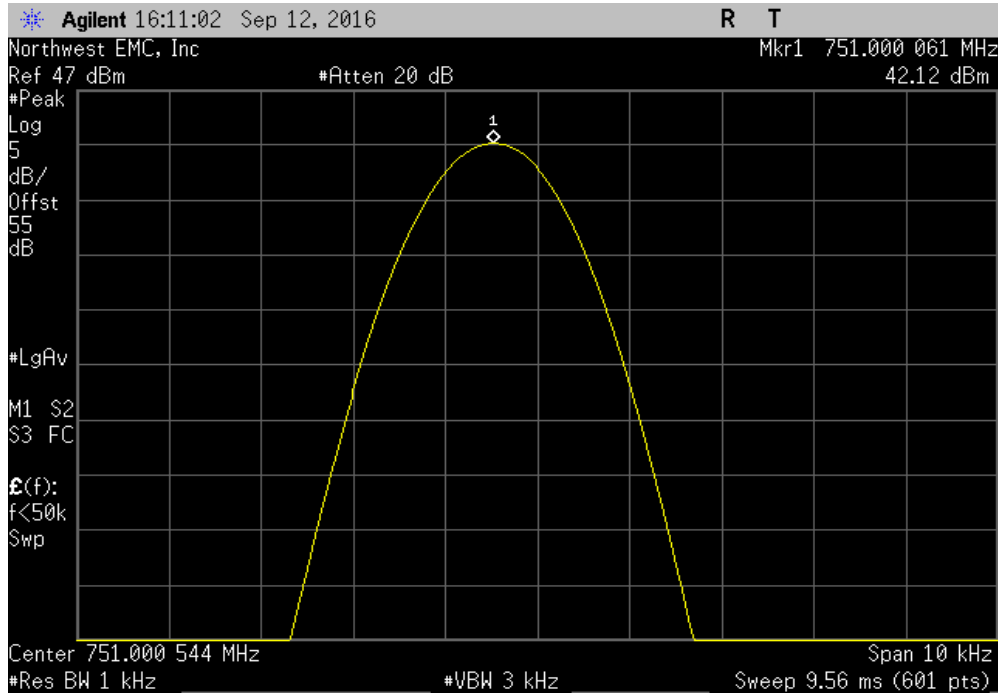


Antenna Port 2, Extreme Temperature, -30°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500192	748.5	0.3	1	Pass	

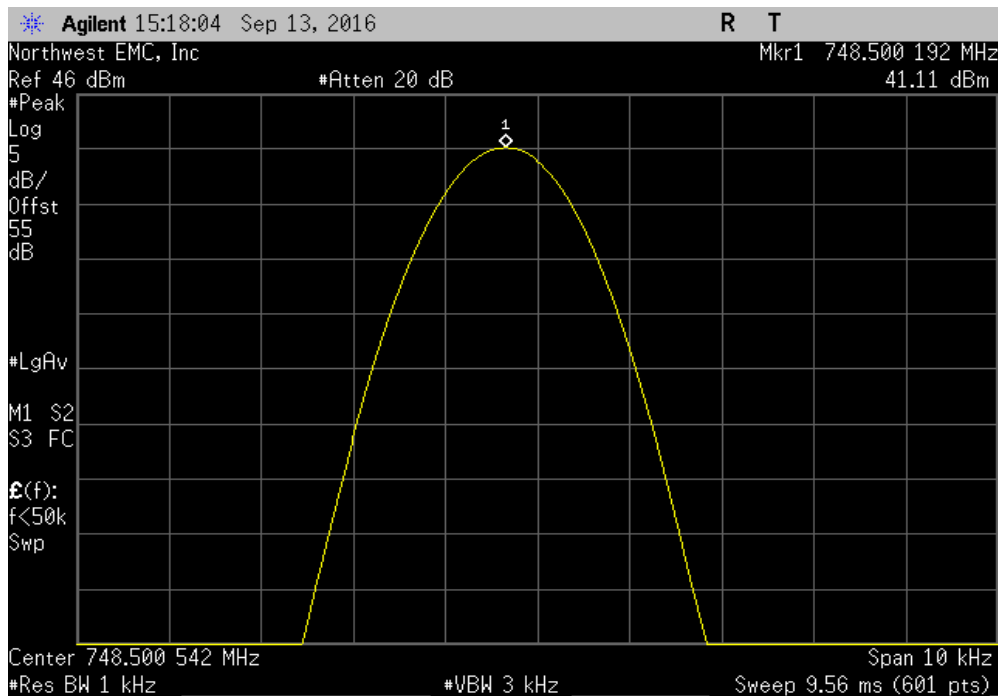


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, -30°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500201	753.5	0.3	1	Pass	

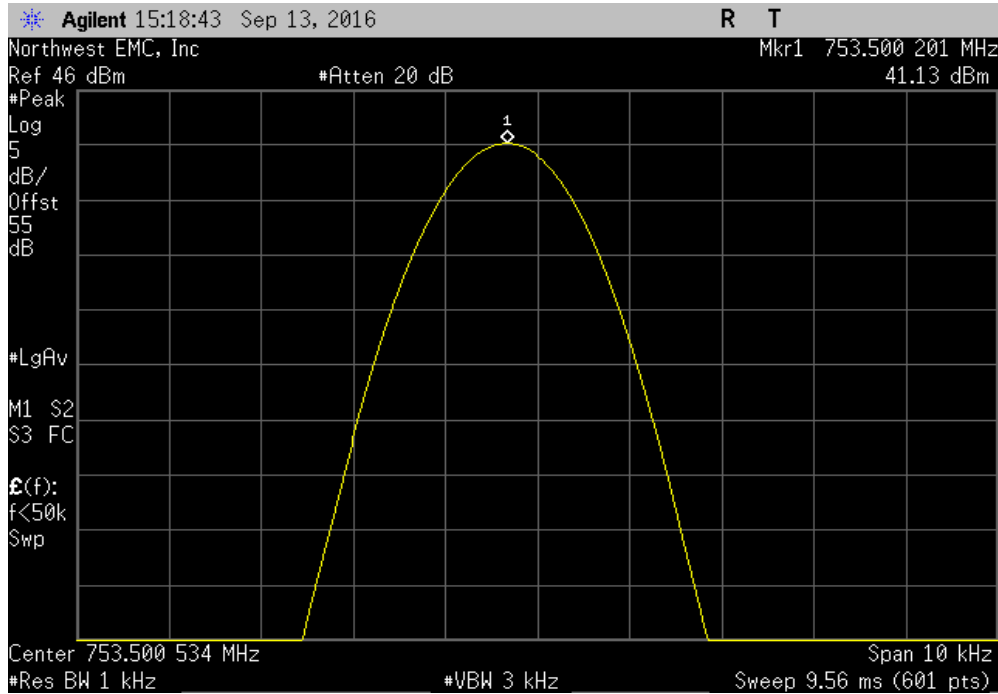


Antenna Port 2, Extreme Temperature, -30°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000194	751	0.3	1	Pass	

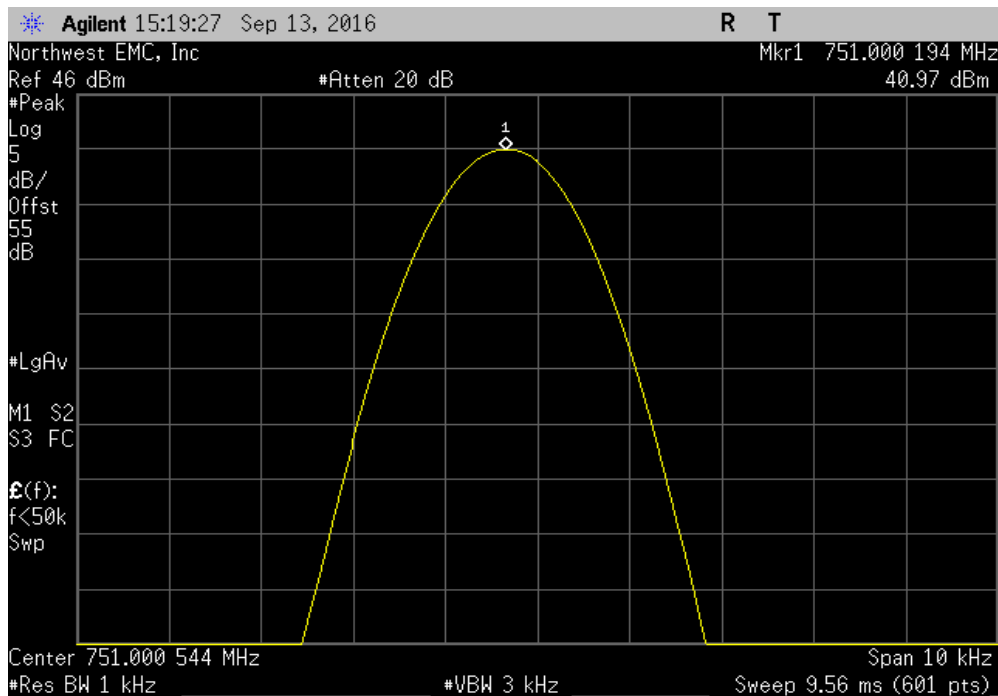


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, -20°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500292	748.5	0.4	1	Pass	

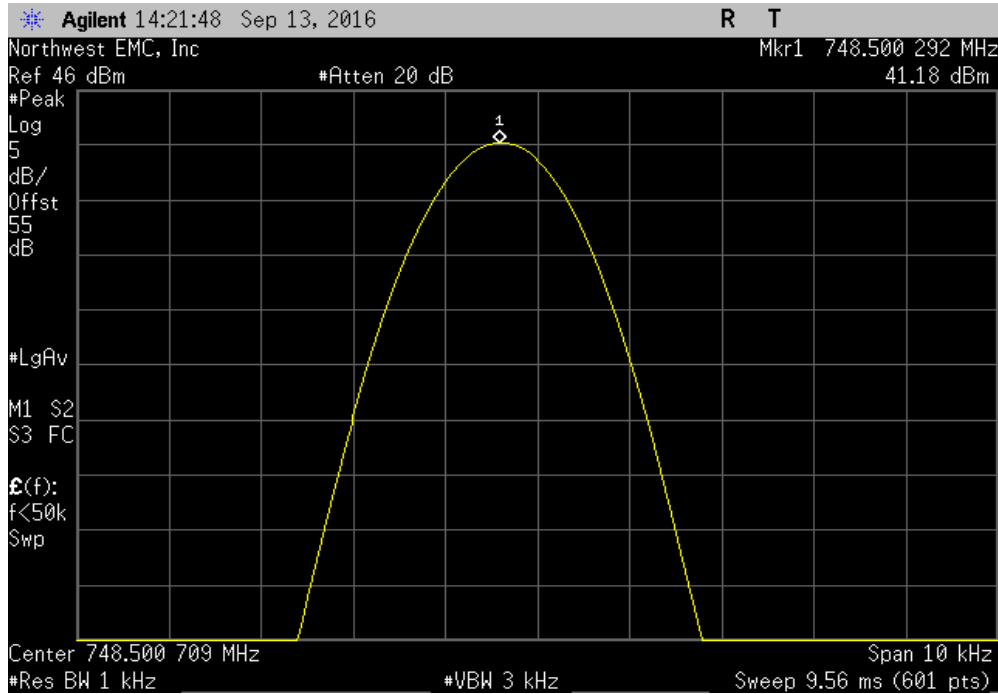


Antenna Port 2, Extreme Temperature, -20°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.5003	753.5	0.4	1	Pass	

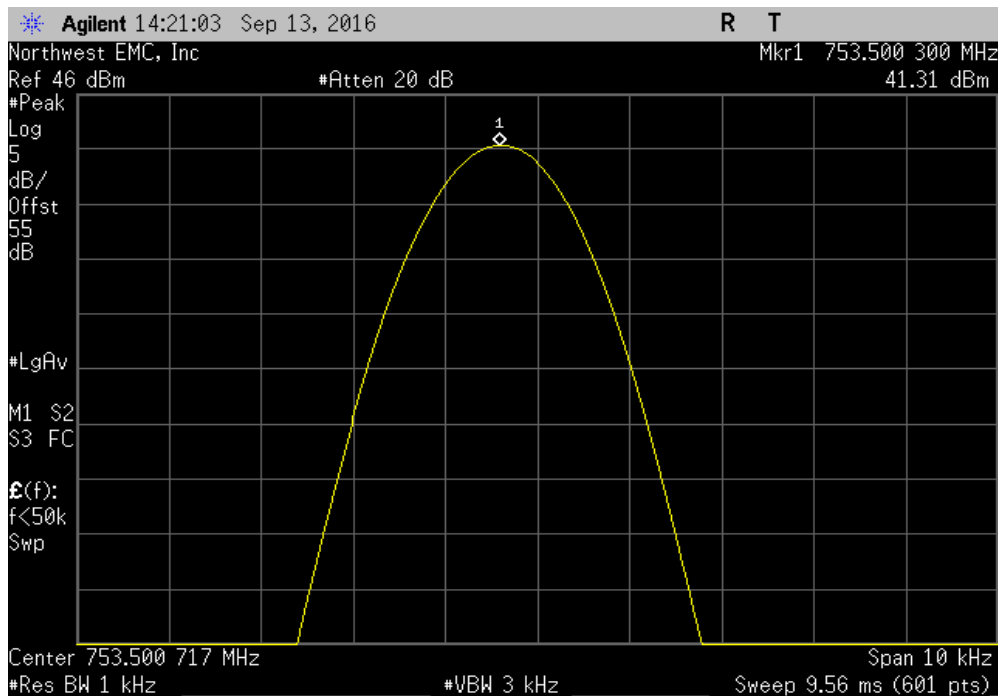


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, -20°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000311	751	0.4	1	Pass	

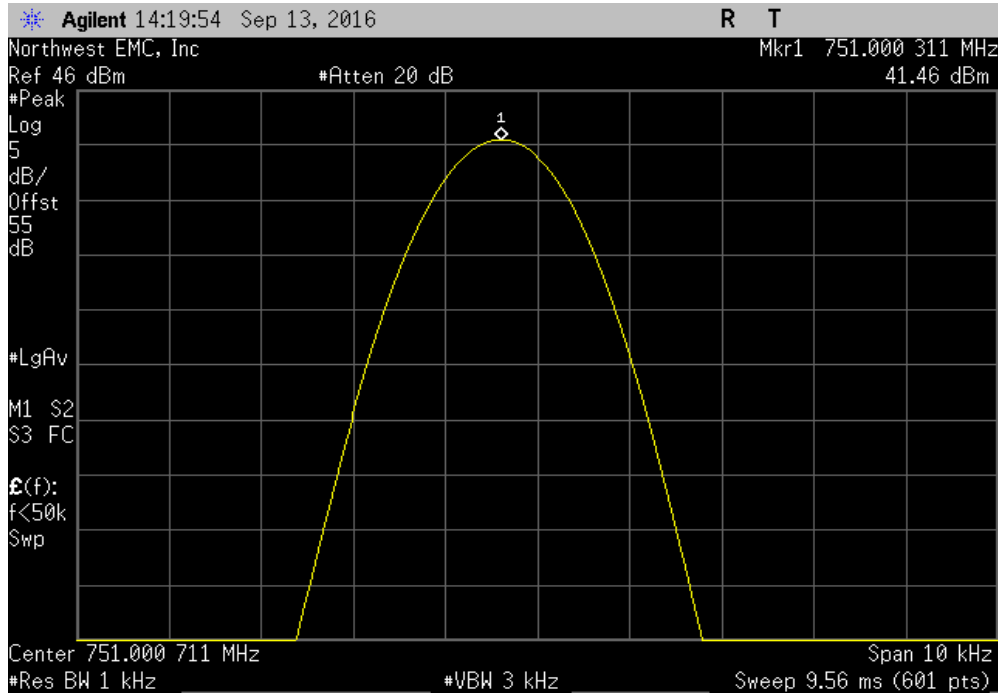


Antenna Port 2, Extreme Temperature, -10°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500475	748.5	0.6	1	Pass	

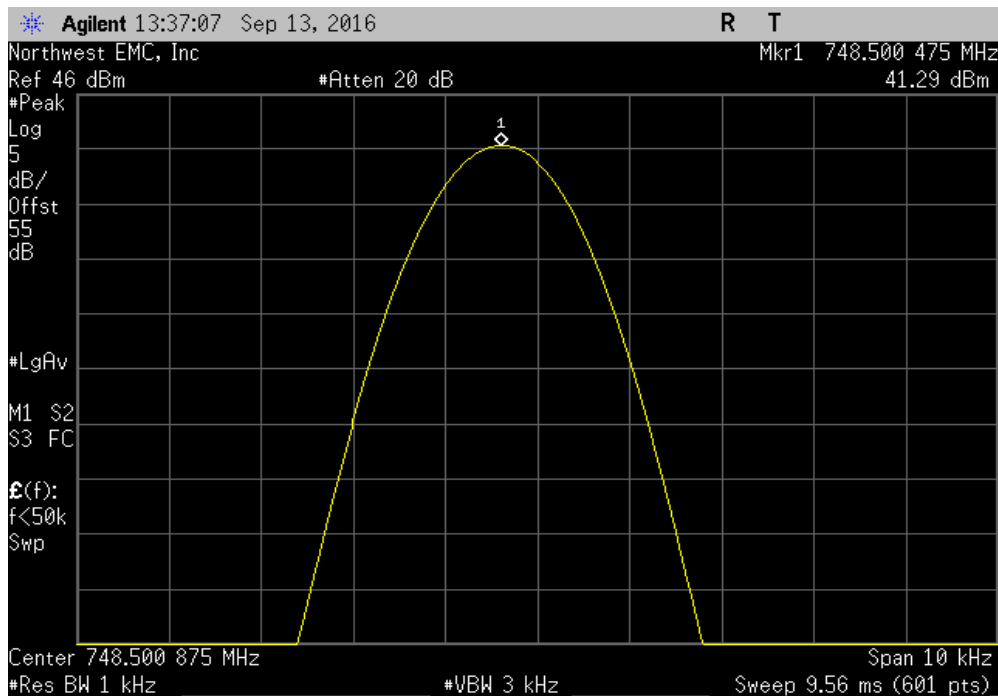


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, -10°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500485	753.5	0.6	1	Pass	

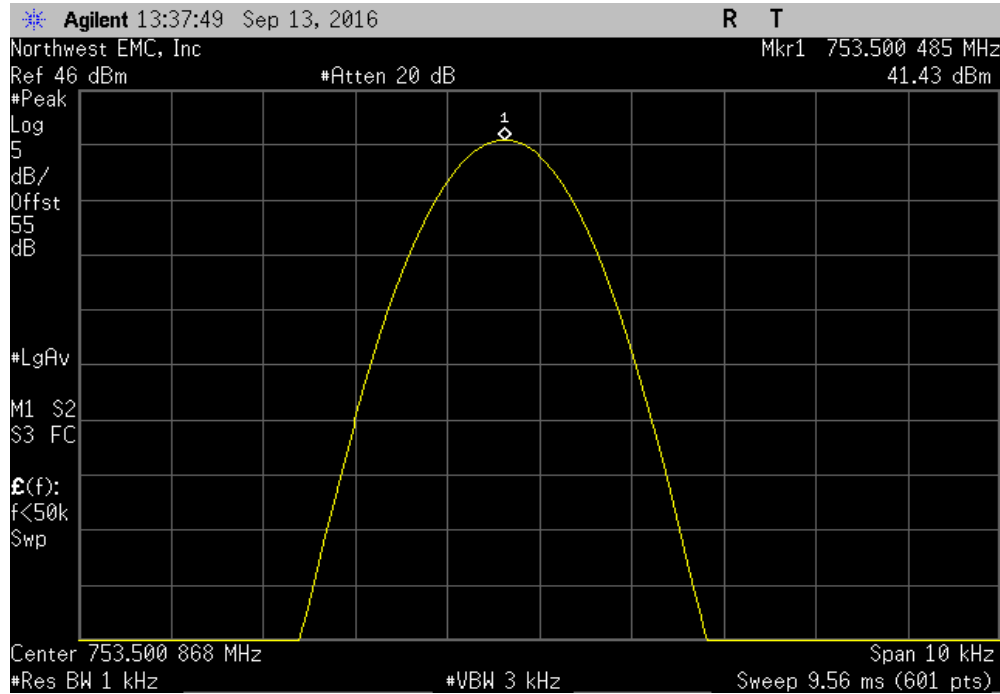


Antenna Port 2, Extreme Temperature, -10°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000478	751	0.6	1	Pass	

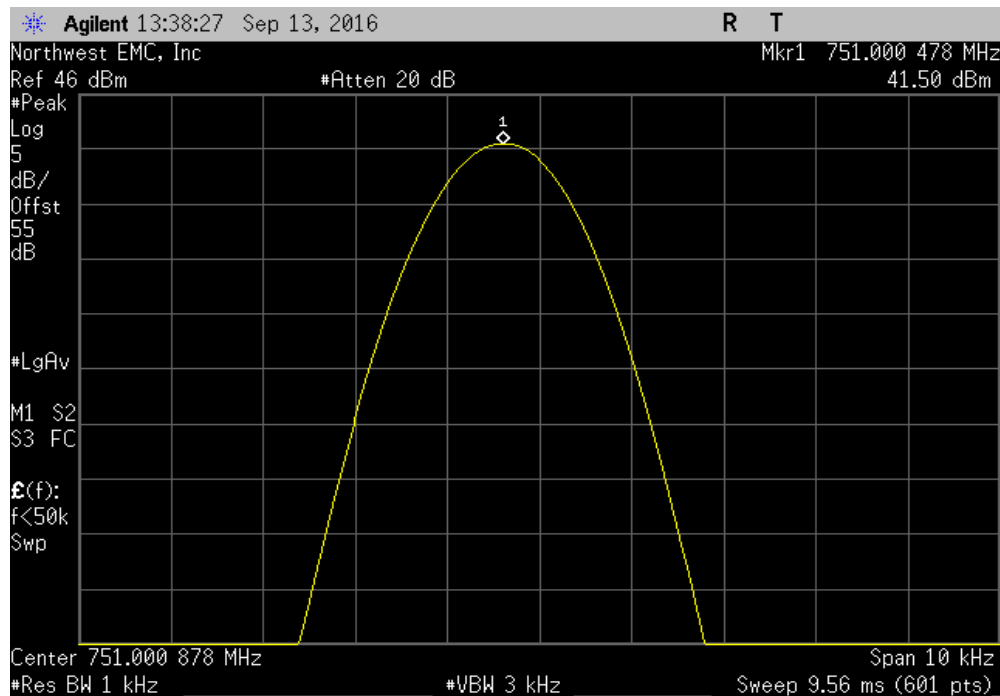


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, 0°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

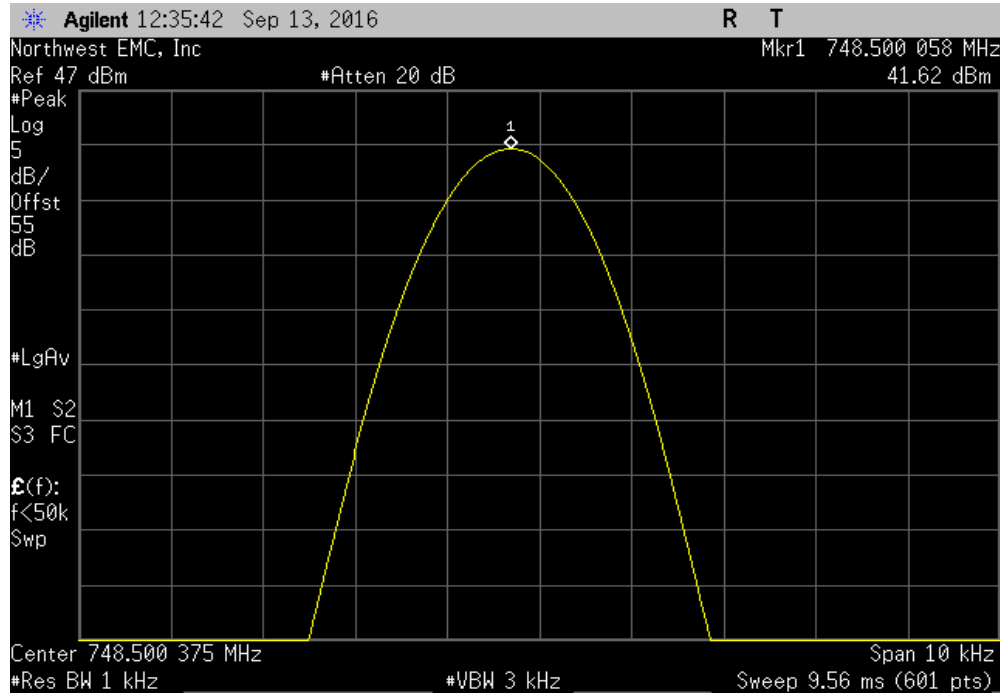


Antenna Port 2, Extreme Temperature, 0°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500005	753.5	0.1	1	Pass	

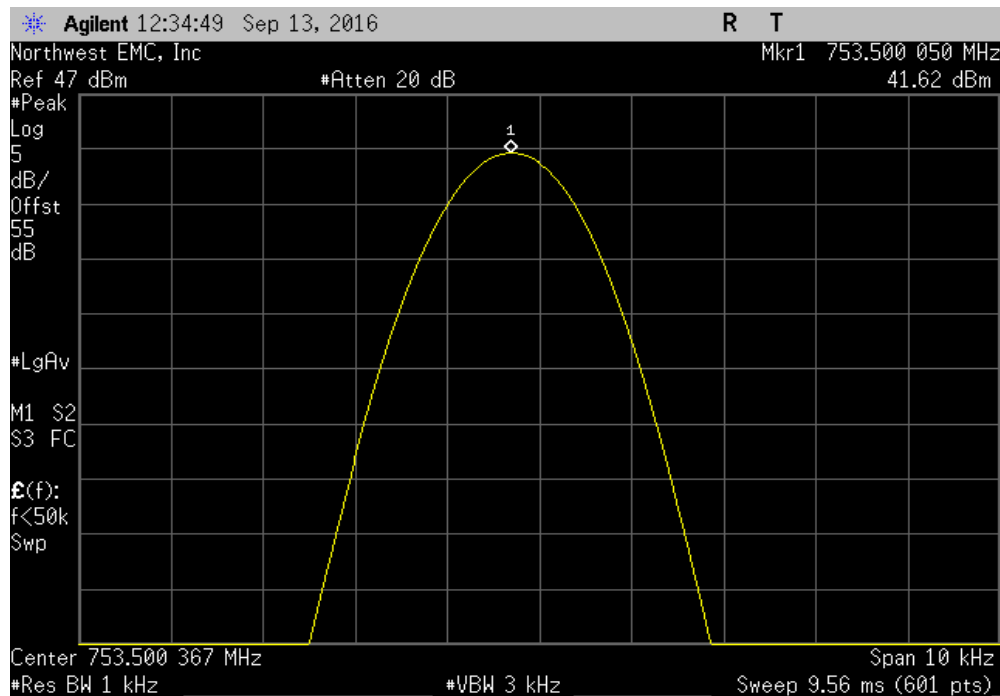


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, 0°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000045	751	0.1	1	Pass	

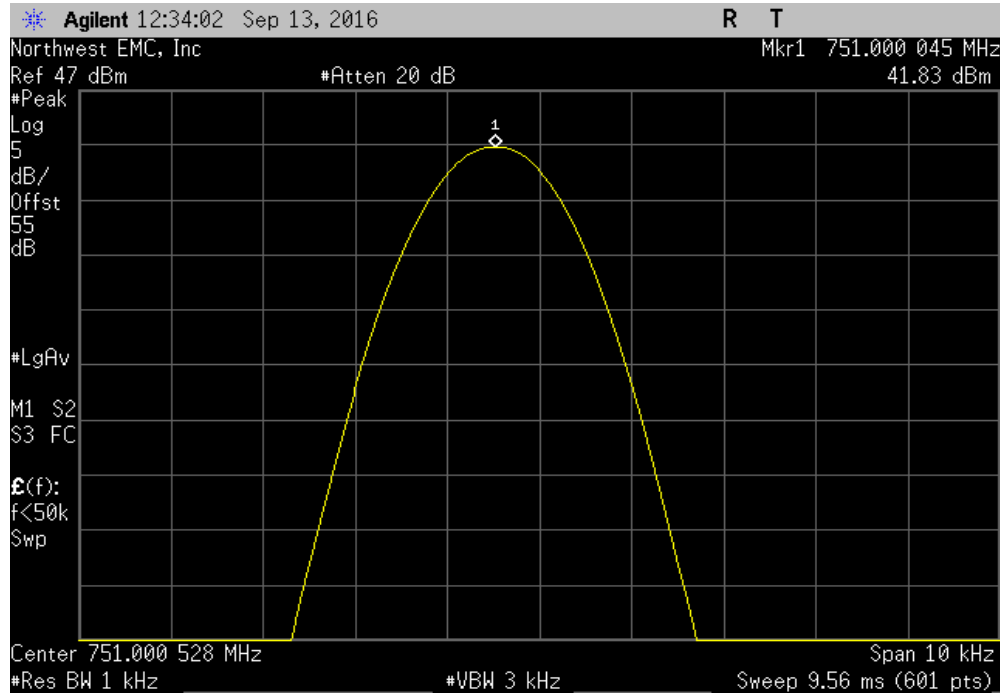


Antenna Port 2, Extreme Temperature, +10°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

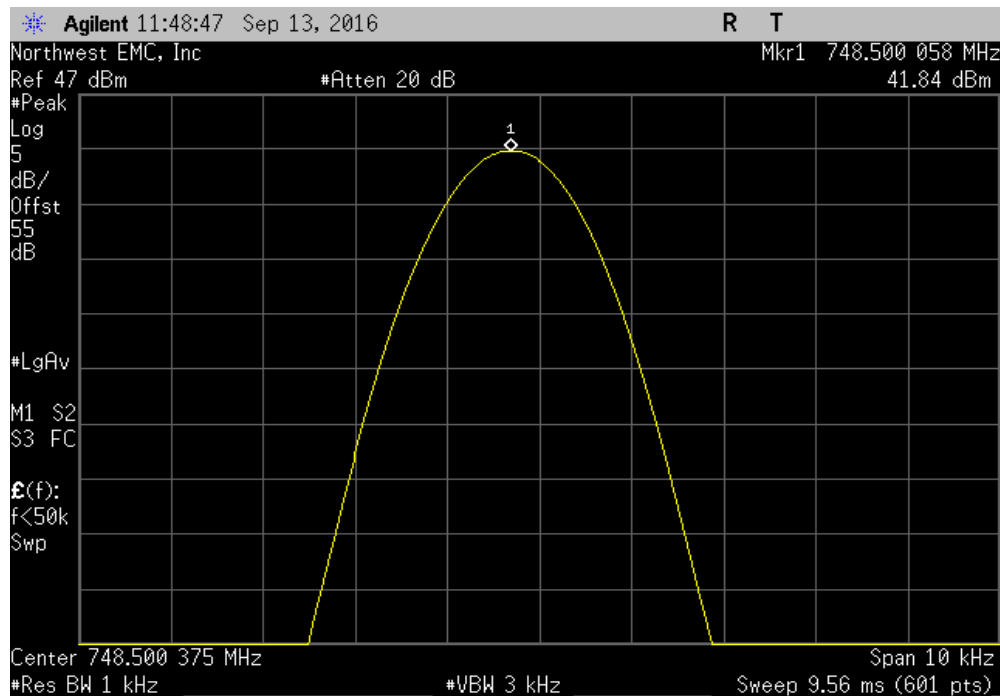


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, +10°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500051	753.5	0.1	1	Pass	

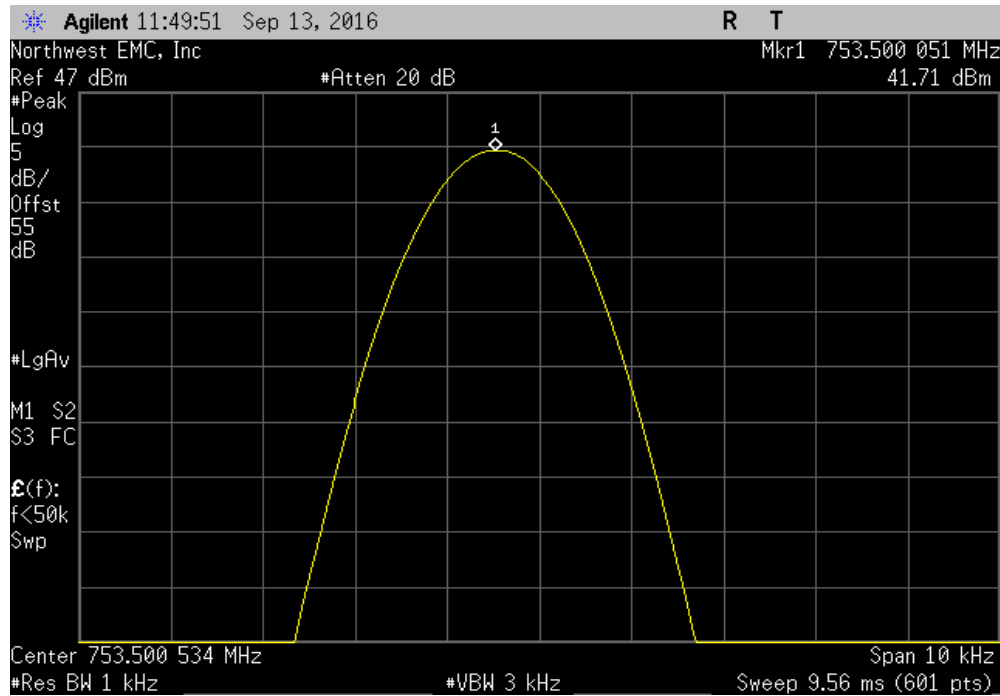


Antenna Port 2, Extreme Temperature, +10°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000045	751	0.1	1	Pass	

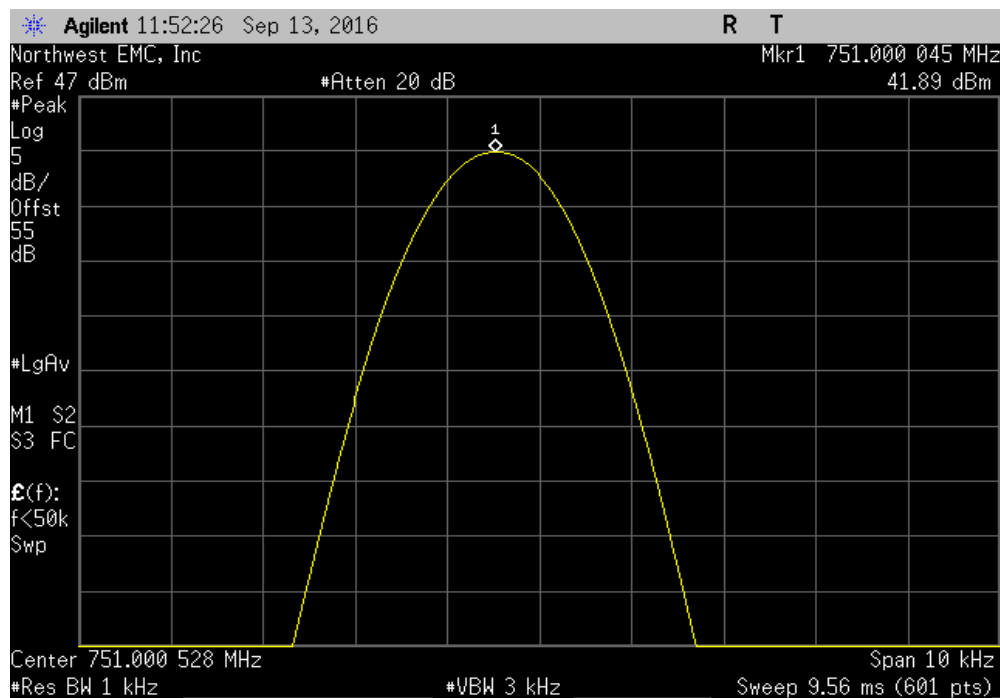


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, +20°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

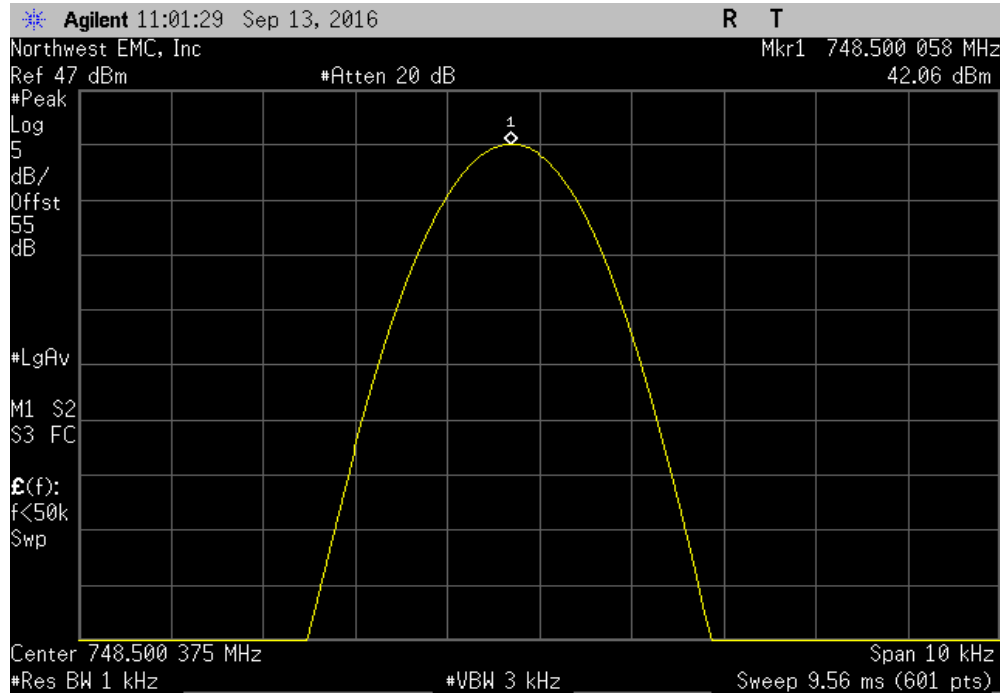


Antenna Port 2, Extreme Temperature, +20°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500067	753.5	0.1	1	Pass	

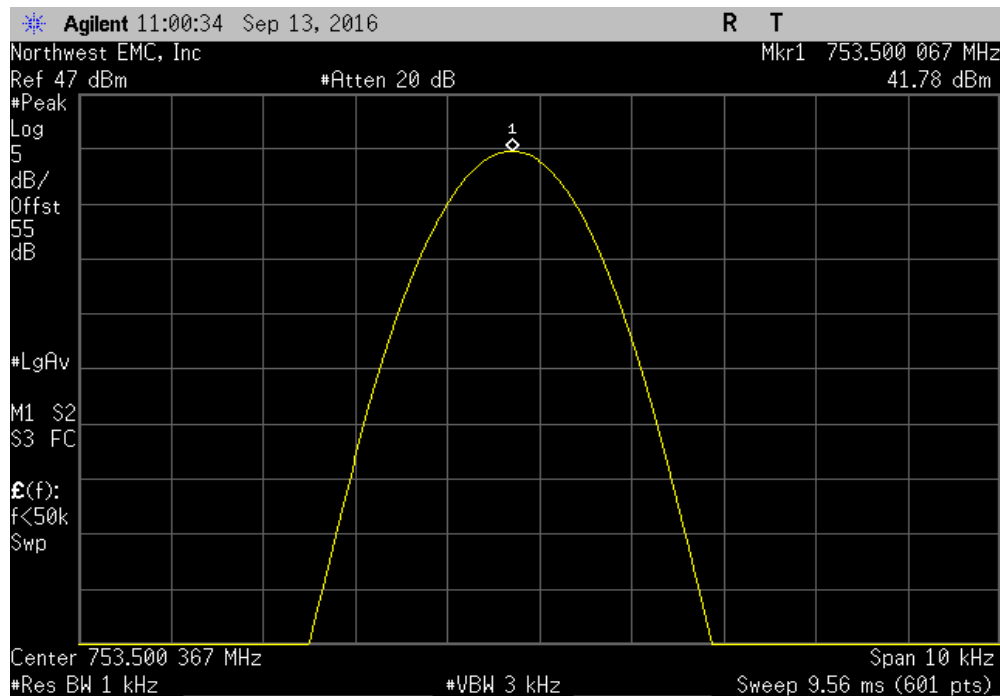


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, +20°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

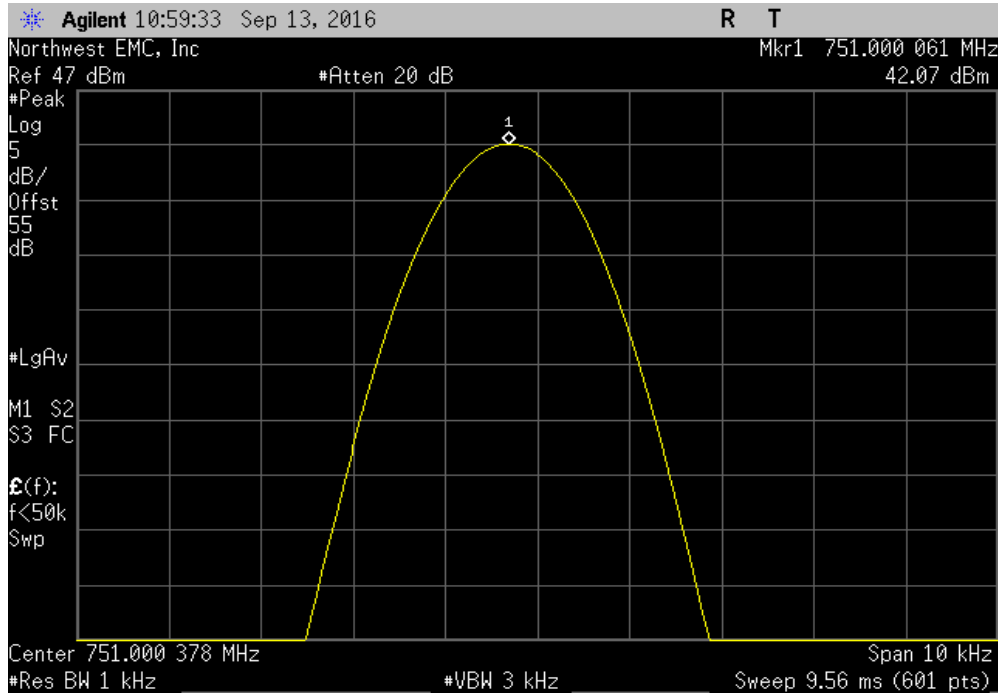


Antenna Port 2, Extreme Temperature, +30°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

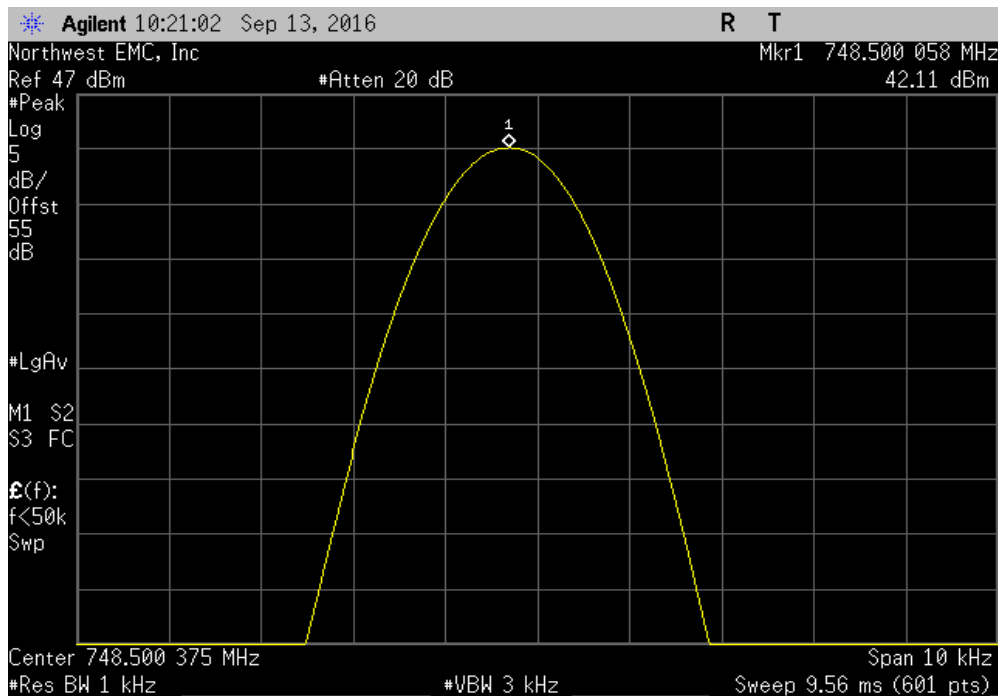


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, +30°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.50005	753.5	0.1	1	Pass	

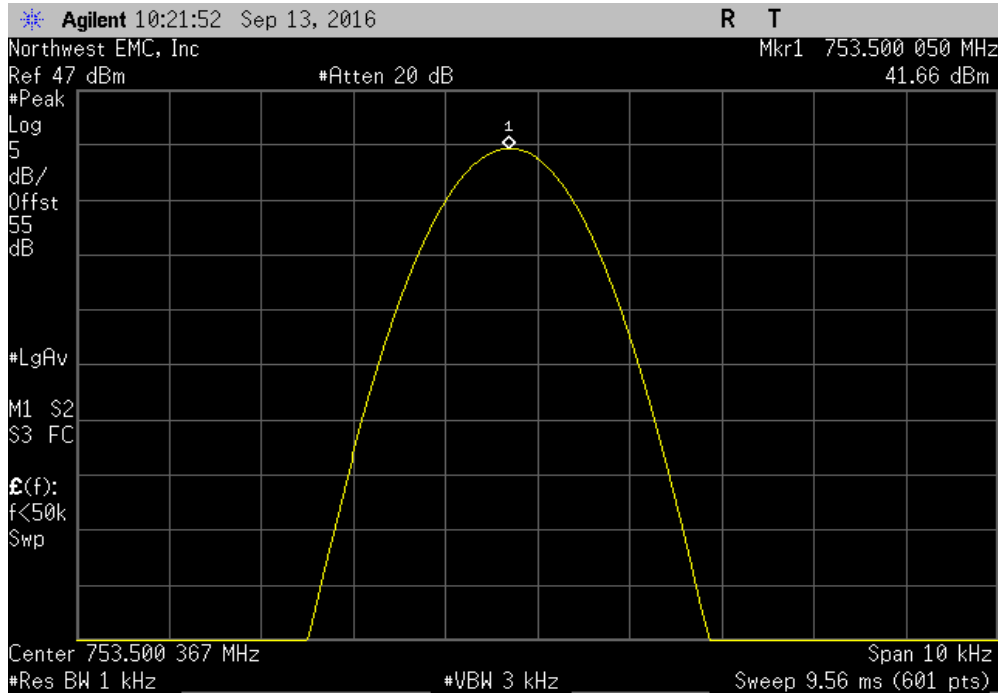


Antenna Port 2, Extreme Temperature, +30°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

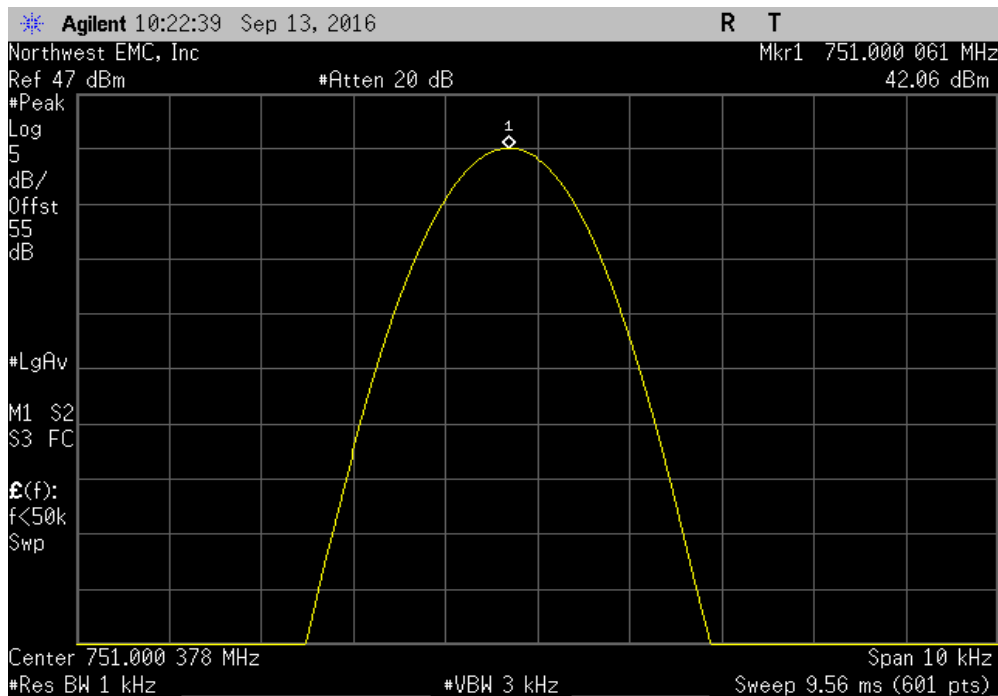


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, +40°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

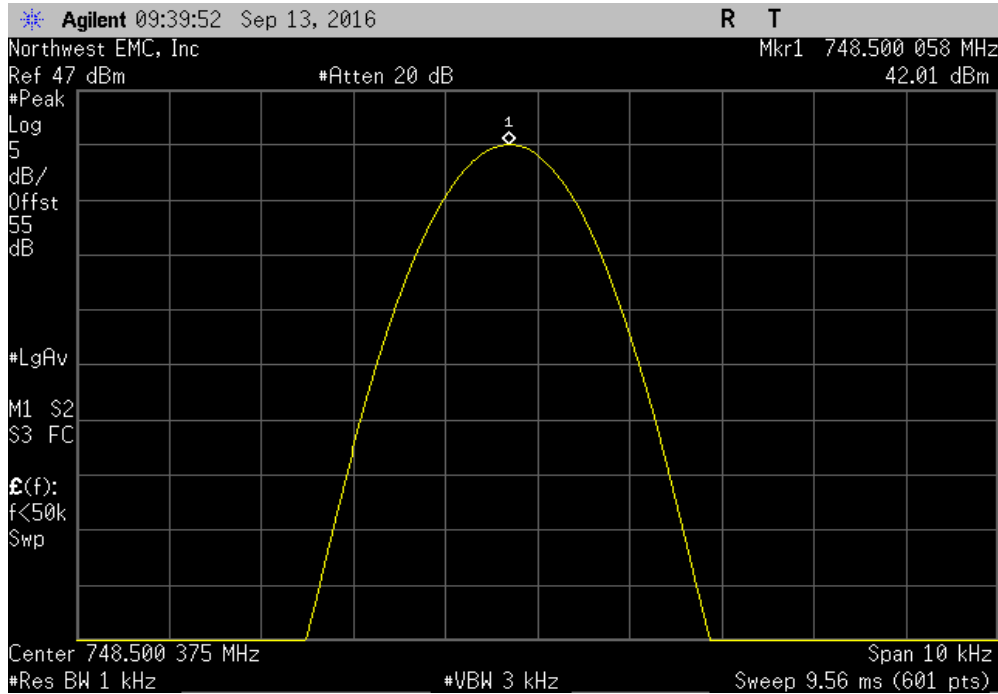


Antenna Port 2, Extreme Temperature, +40°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500005	753.5	0.1	1	Pass	

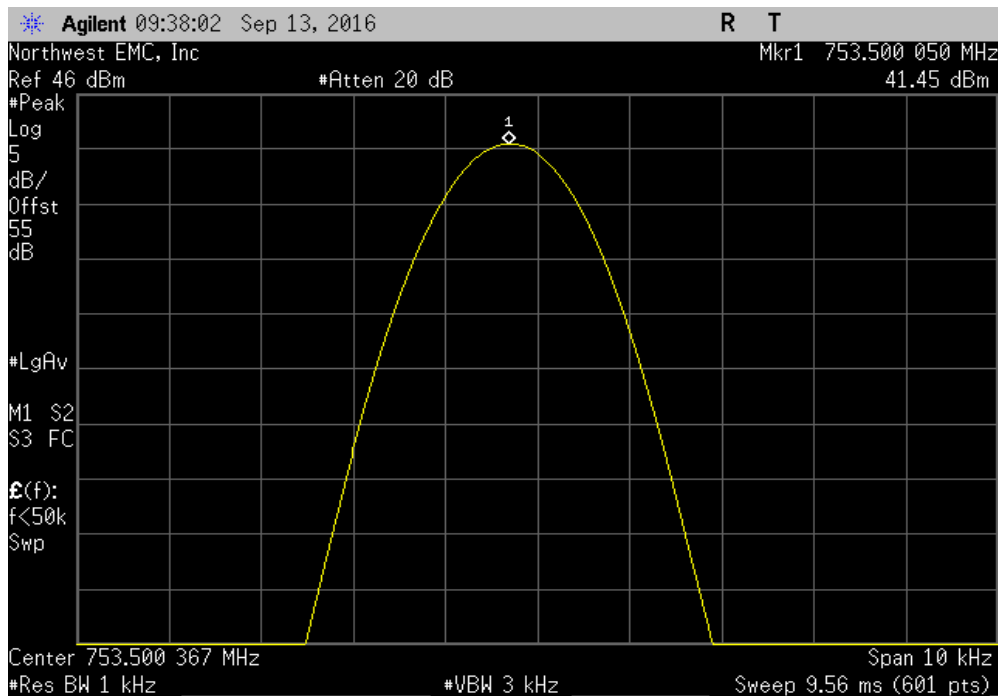


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, +40°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

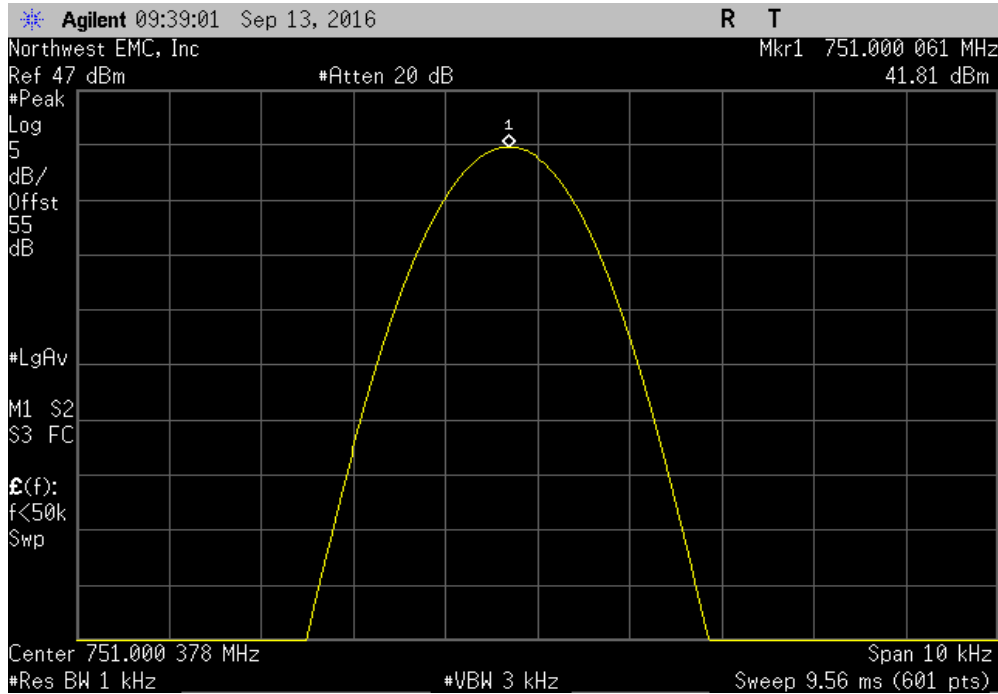


Antenna Port 2, Extreme Temperature, +50°C, Low Channel LTE5, 748.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	748.500058	748.5	0.1	1	Pass	

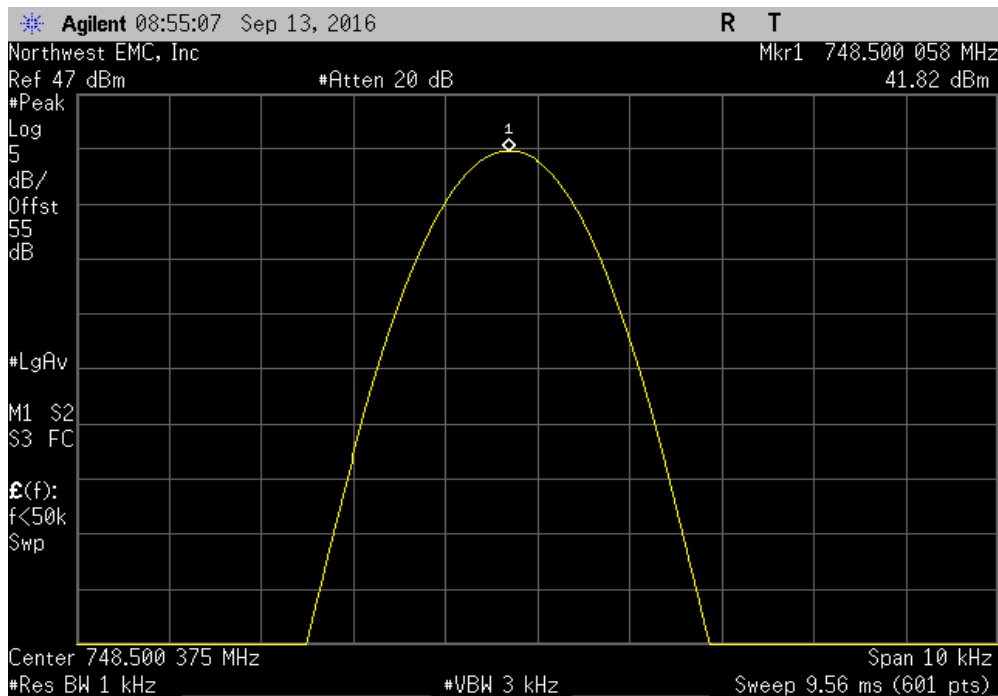


FREQUENCY STABILITY

Antenna Port 2, Extreme Temperature, +50°C, High Channel LTE5, 753.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	753.500067	753.5	0.1	1	Pass	

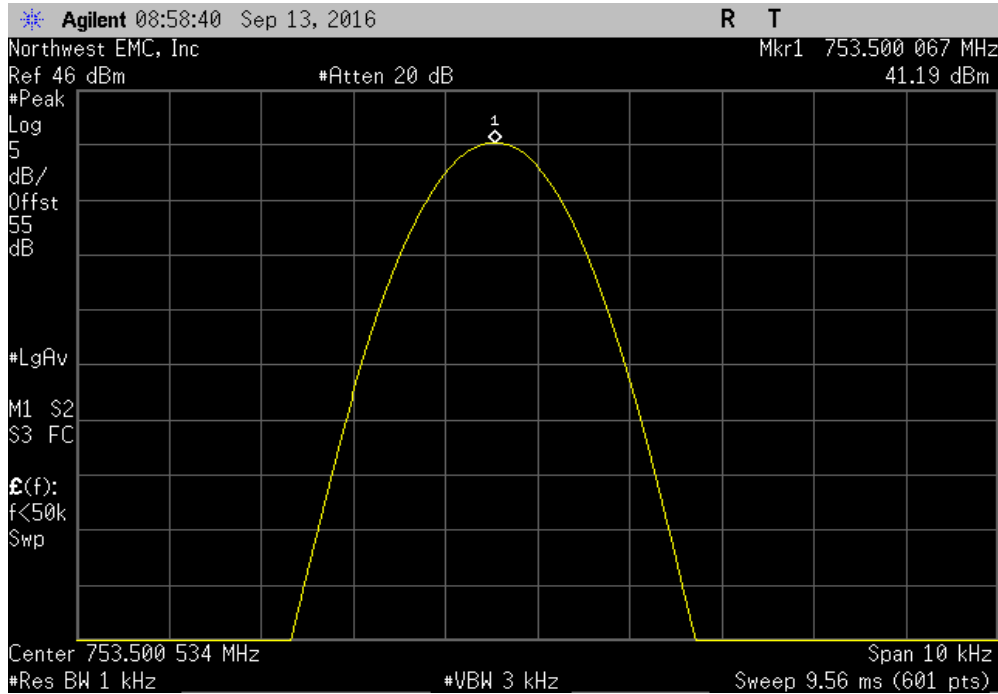

Antenna Port 2, Extreme Temperature, +50°C, Single Channel LTE10, 751 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	751.000061	751	0.1	1	Pass	

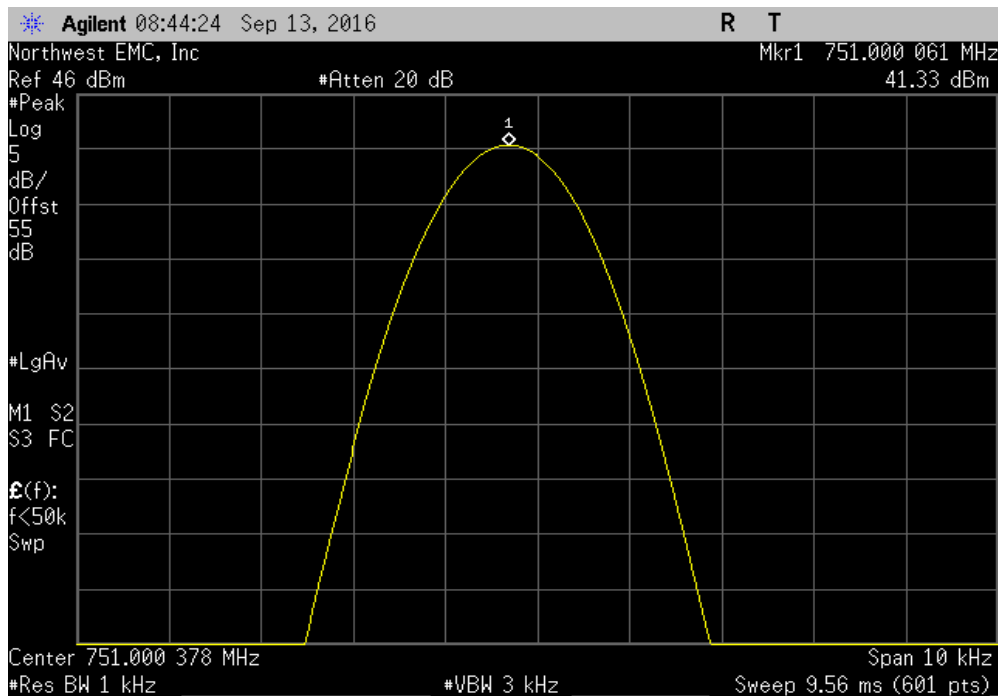

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Power Supply - DC	Hewlett Packard	6574A	TPX	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016

CLIENT PROVIDED EQUIPMENT

Description	Manufacturer	Model	Last Cal.	Cal. Due
High Power Attenuator - 30dB	Aeroflex/Weinschel	53-30-43	NCR	NCR
Attenuator - 20dB	N/A	N/A	NCR	NCR
Power Divider	Fairview Microwave	MP8748-2	NCR	NCR
50Ohm Terminator	Aeroflex/Weinschel	1455-4	NCR	NCR
High Power Terminator	Telcon	KTMO400800060	NCR	NCR

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The spectrum analyzer settings were as follows:

- RBW = Approx. 1% of the emission bandwidth (B). This was an iterative process to determine the RBW based on the emissions bandwidth (B).
- VBW = > RBW
- A peak detector was used
- Trace max hold.


The spectrum analyzer occupied bandwidth measurement function was then used to measure the 26 dB emission bandwidth.

There is no required limit to be met in the rule part for this test. The purpose of the test is to report the results.

OCCUPIED BANDWIDTH




XMIT 2016.05.06


EUT: CWS-3050-13		Work Order: KMWC0075	
Serial Number: K162600005		Date: 09/12/16	
Customer: Parallel Wireless Inc.		Temperature: 21.2 °C	
Attendees: Andy Ku		Humidity: 45.5% RH	
Project: None		Barometric Pres.: 1017 mbar	
Tested by: Johnny Candelas		Power: 48VDC	
		Job Site: OC01	
TEST SPECIFICATIONS			
FCC 27:2016		Test Method	
		ANSI/TIA/EIA-603-D-2010	
COMMENTS			
Power Level Setting 40W. Reference Level Offset: DC Block + 30dB Attenuator + 20dB Attenuator + Power Divider + Cable Loss = 55dB total.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature 	
		Value	Limit
Antenna Port 1			Result
Low Channel LTE5, 748.5 MHz		4.794 MHz	N/A
High Channel LTE5, 753.5 MHz		4.802 MHz	N/A
Single Channel LTE10, 751 MHz		9.549 MHz	N/A
Antenna Port 2			
Low Channel LTE5, 748.5 MHz		4.792 MHz	N/A
High Channel LTE5, 753.5 MHz		4.808 MHz	N/A
Single Channel LTE10, 751 MHz		9.593 MHz	N/A

OCCUPIED BANDWIDTH

Antenna Port 1, Low Channel LTE5, 748.5 MHz						
				Value	Limit	Result
				4.794 MHz	N/A	N/A

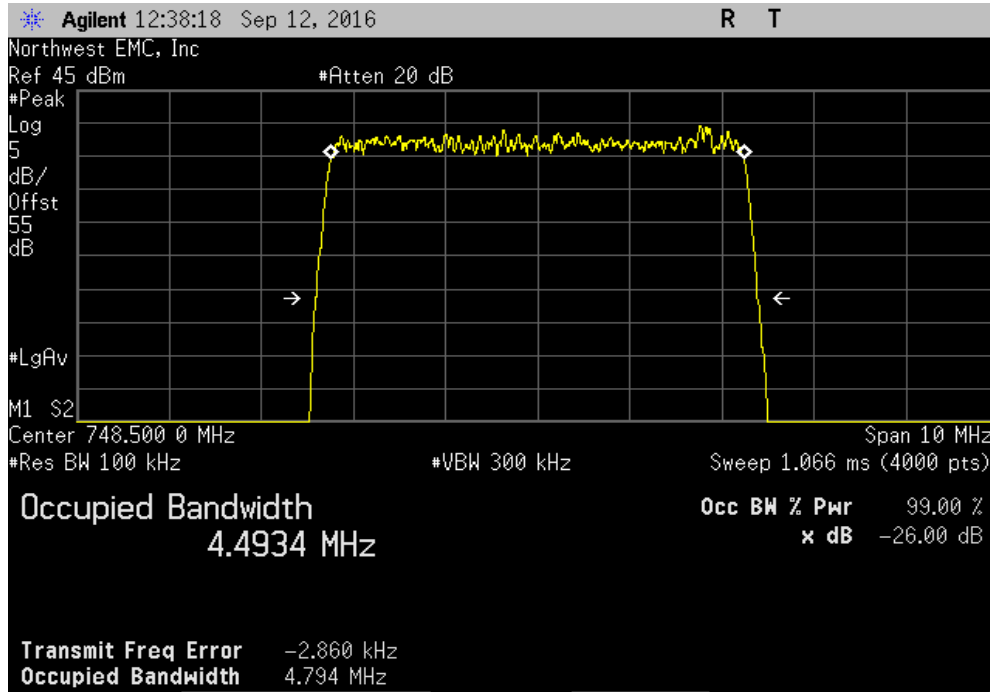


Antenna Port 1, High Channel LTE5, 753.5 MHz						
				Value	Limit	Result
				4.802 MHz	N/A	N/A

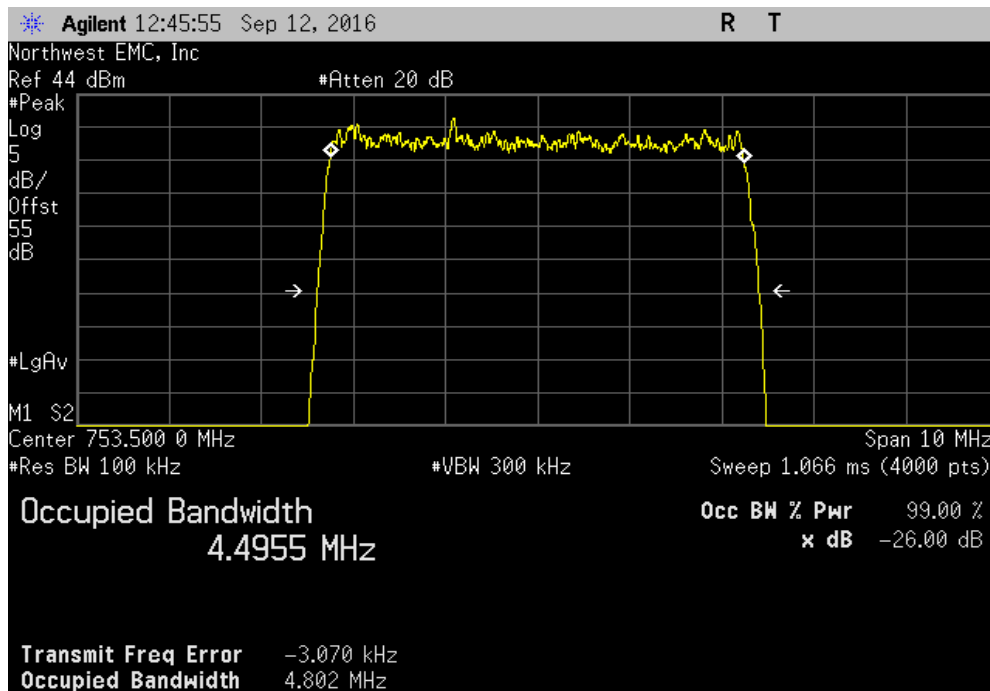


OCCUPIED BANDWIDTH

Antenna Port 1, Single Channel LTE10, 751 MHz						
				Value	Limit	Result
				9.549 MHz	N/A	N/A

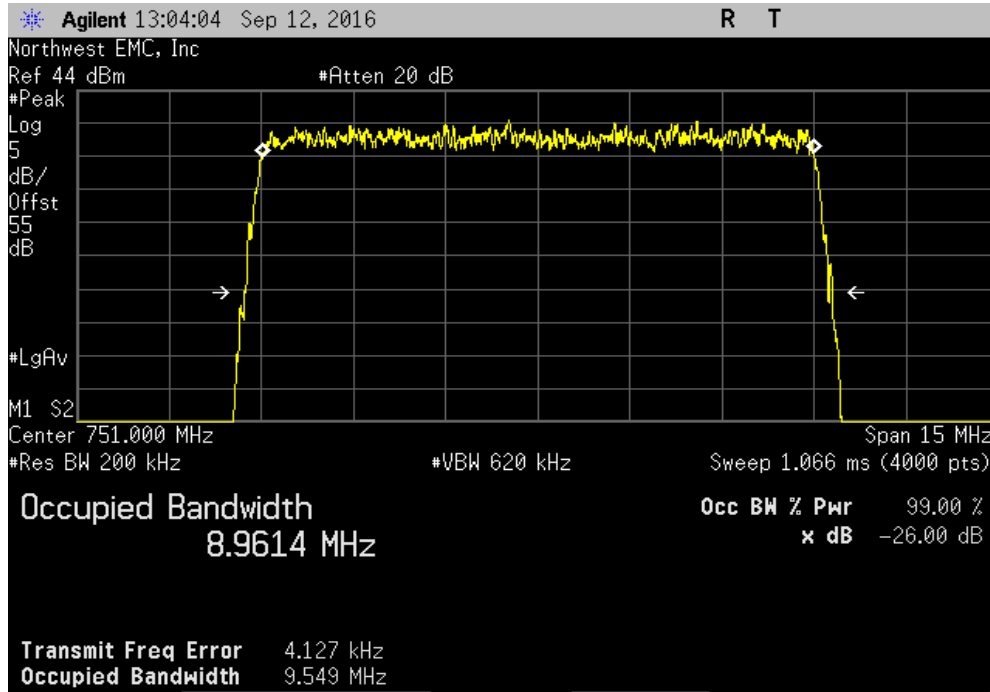


Antenna Port 2, Low Channel LTE5, 748.5 MHz						
				Value	Limit	Result
				4.792 MHz	N/A	N/A

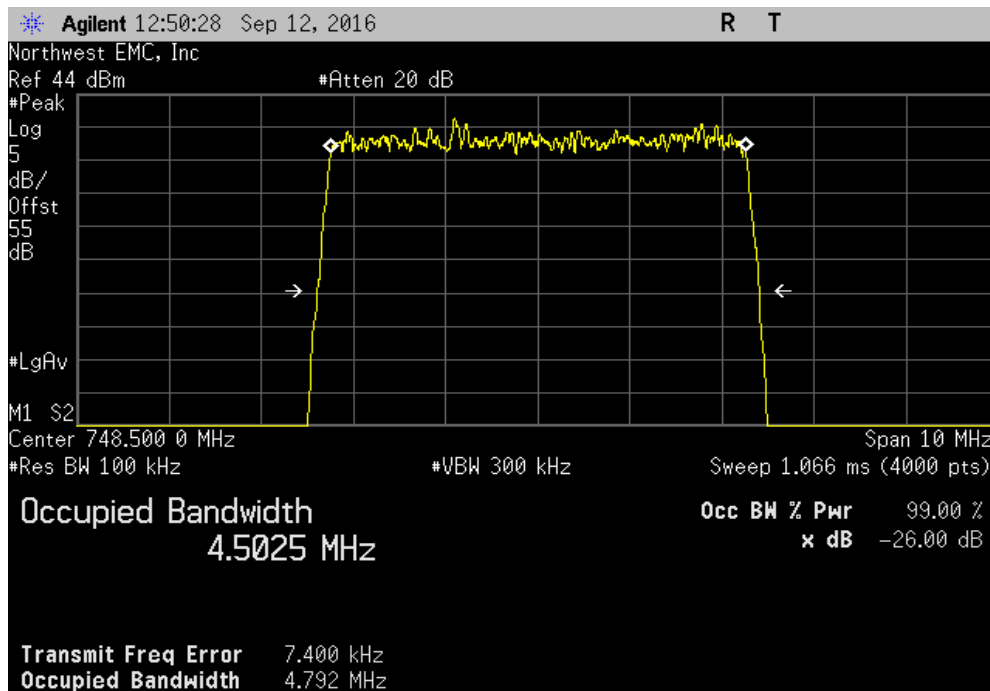


OCCUPIED BANDWIDTH

Antenna Port 2, High Channel LTE5, 753.5 MHz						
				Value	Limit	Result
				4.808 MHz	N/A	N/A

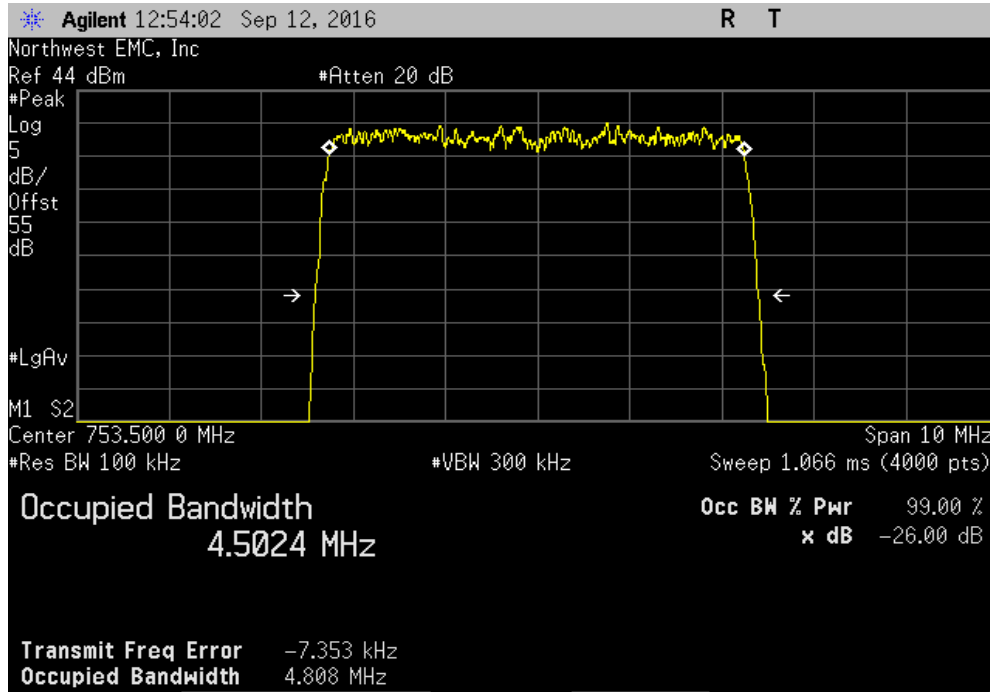

Antenna Port 2, Single Channel LTE10, 751 MHz						
				Value	Limit	Result
				9.593 MHz	N/A	N/A

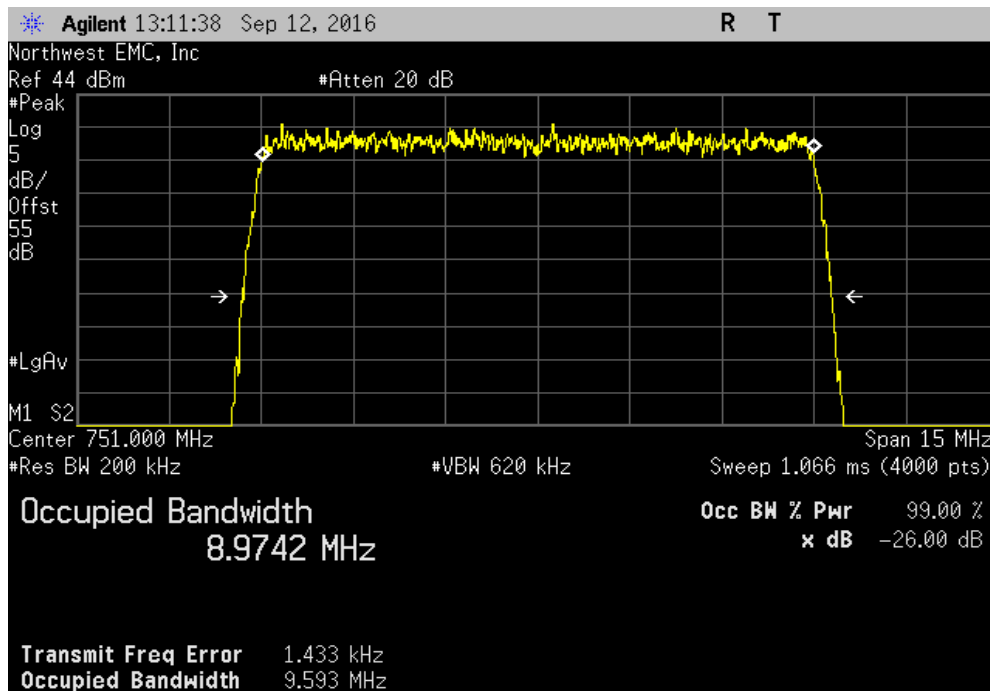

OUT OF BAND EMISSIONS - LTE BAND 13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting LTE5 Low Ch 748.5MHz and High Ch 753.5MHz and LTE10 at 751MHz

POWER SETTINGS INVESTIGATED

48VDC

CONFIGURATIONS INVESTIGATED

KMWC0075 - 2

FREQUENCY RANGE INVESTIGATED

Start Frequency | 30 MHz | Stop Frequency | 8000 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Filter - Band Pass/Notch	K&L Microwave	3TNF-500/1000-N/N	HFR	3/3/2016	12 mo
Attenuator	S.M. Electronics	SA6-20	REO	3/28/2016	12 mo
Attenuator	S.M. Electronics	SA18H-10	REN	3/28/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	PAD	8/15/2016	12 mo
Cable	ESM Cable Corp.	1-8GHz cables	OCX	8/15/2016	12 mo
Cable	ESM Cable Corp.	30-1GHz cables	OCW	8/15/2016	12 mo
Filter - High Pass	Micro-Tronics	HPM50108	HGP	3/28/2016	12 mo
Filter - Low Pass	Micro-Tronics	LPM50003	HGO	3/28/2016	12 mo
Antenna - Biconilog	EMCO	3142	AXB	11/6/2015	24 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVJ	8/15/2016	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AIR	6/23/2016	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAY	11/5/2015	12 mo

TEST DESCRIPTION

The EUT was tested with shielded terminations on the RF output ports instead of antennas..

For licensed transmitters, the FCC references TIA/EIA-603 as the measurement procedure standard. TIA/EIA-603 Section 2.2.12 describes a method for measuring radiated spurious emissions that utilizes an antenna substitution method:

At an approved test site, the transmitter is placed on a remotely controlled turntable, and the measurement antenna is placed 3 meters from the transmitter. The turntable azimuth is varied to maximize the level of spurious emissions. The height of the measurement antenna is also varied from 1 to 4 meters. The amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a ½ wave dipole that is successively tuned to each of the highest spurious emissions for emissions below 1 GHz, and a horn antenna for emissions above 1 GHz. A signal generator is connected to the dipole (horn antenna for frequencies above 1 GHz), and its output is adjusted to match the level previously noted for each frequency. The output of the signal generator is recorded, and by factoring in the cable loss to the antenna and its gain; the power (dBm) into an ideal ½ wave dipole antenna is determined for each radiated spurious emission.


OUT OF BAND EMISSIONS - LTE BAND 13



PSA-ESCI 2016.07.22
EmiR5 2016.07.22.1

Work Order:	KMWC0075	Date:	09/14/16	<i>Andy Ku</i>
Project:	None	Temperature:	20.2 °C	
Job Site:	OC07	Humidity:	46.3% RH	
Serial Number:	K162600005	Barometric Pres.:	1020 mbar	
EUT:	CWS-3050-13			
Configuration:	2			
Customer:	Parallel Wireless Inc.			
Attendees:	Andy Ku			
EUT Power:	48VDC			
Operating Mode:	Transmitting LTE5 Low Ch 748.5MHz and High Ch 753.5MHz and LTE10 at 751MHz			
Deviations:	None			
Comments:	None			

Test Specifications	FCC 27:2016	Test Method	ANSI/TIA/EIA-603-D-2010
Run #	7	Test Distance (m)	3
Antenna Height(s)	1 to 4(m)		Results
			Pass

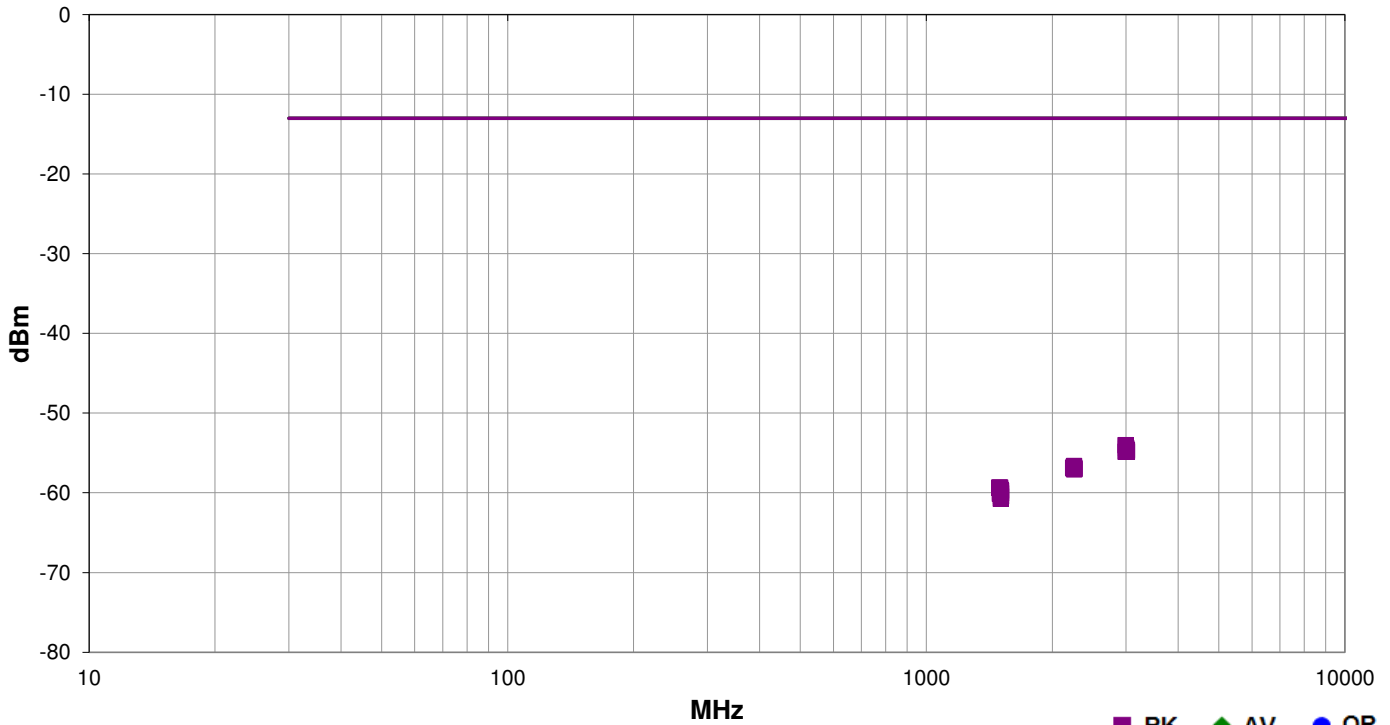

Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
2993.000	1.0	16.0	Horz	PK	3.95E-09	-54.0	-13.0	-41.0	EUT on Side, LTE5, Low Ch
3004.983	1.0	132.0	Horz	PK	3.61E-09	-54.4	-13.0	-41.4	EUT on Side, LTE10
3002.558	3.5	179.0	Vert	PK	3.61E-09	-54.4	-13.0	-41.4	EUT on Side, LTE10
3016.158	1.0	154.0	Vert	PK	3.44E-09	-54.6	-13.0	-41.6	EUT on Side, LTE5, High Ch
3015.917	1.0	89.0	Horz	PK	3.29E-09	-54.8	-13.0	-41.8	EUT on Side, LTE5, High Ch

	Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
	2994.517	2.8	210.0	Vert	PK	3.29E-09	-54.8	-13.0	-41.8	EUT on Side, LTE5, Low Ch
	2253.967	2.9	166.0	Vert	PK	2.17E-09	-56.6	-13.0	-43.6	EUT on Side, LTE10
	2243.667	1.0	241.0	Horz	PK	2.08E-09	-56.8	-13.0	-43.8	EUT on Side, LTE5, Low Ch
	2259.800	1.0	310.0	Horz	PK	2.03E-09	-56.9	-13.0	-43.9	EUT on Side, LTE5, High Ch
	2246.533	1.0	360.0	Vert	PK	2.03E-09	-56.9	-13.0	-43.9	EUT on Side, LTE5, Low Ch
	2259.992	2.8	313.0	Vert	PK	1.98E-09	-57.0	-13.0	-44.0	EUT on Side, LTE5, High Ch
	2255.158	1.0	170.0	Horz	PK	1.98E-09	-57.0	-13.0	-44.0	EUT on Side, LTE10
	1494.633	1.0	224.0	Vert	PK	1.17E-09	-59.3	-13.0	-46.3	EUT on Side, LTE5, Low Ch
	1500.683	1.0	109.0	Horz	PK	1.17E-09	-59.3	-13.0	-46.3	EUT on Side, LTE10
	1505.050	1.0	359.0	Vert	PK	1.09E-09	-59.6	-13.0	-46.6	EUT on Side, LTE5, High Ch
	1508.225	2.1	100.0	Vert	PK	1.06E-09	-59.7	-13.0	-46.7	EUT Horz, LTE5, High Ch
	1501.433	1.0	277.0	Vert	PK	1.02E-09	-59.9	-13.0	-46.9	EUT on Side, LTE10
	1508.492	2.2	36.0	Vert	PK	9.93E-10	-60.0	-13.0	-47.0	EUT Vert, LTE5, High Ch
	1506.383	1.0	271.0	Horz	PK	9.71E-10	-60.1	-13.0	-47.1	EUT on Side, LTE5, High Ch
	1499.400	1.0	184.0	Horz	PK	9.71E-10	-60.1	-13.0	-47.1	EUT on Side, LTE5, Low Ch
	1508.283	1.0	140.0	Horz	PK	9.06E-10	-60.4	-13.0	-47.4	EUT Vert, LTE5, High Ch
	1507.217	2.0	56.0	Horz	PK	8.46E-10	-60.7	-13.0	-47.7	EUT Horz, LTE5, High Ch

SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Filter - High Pass	Micro-Tronics	HPM50108	HGX	7/25/2016	7/25/2017
Power Supply - DC	Hewlett Packard	6574A	TPX	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016

CLIENT PROVIDED EQUIPMENT

Description	Manufacturer	Model	Last Cal.	Cal. Due
High Power Attenuator - 30dB	Aeroflex/Weinschel	53-30-43	NCR	NCR
Attenuator - 20dB	N/A	N/A	NCR	NCR
Power Divider	Fairview Microwave	MP8748-2	NCR	NCR
50Ohm Terminator	Aeroflex/Weinschel	1455-4	NCR	NCR
High Power Terminator	Telcon	KTMO400800060	NCR	NCR

TEST DESCRIPTION


The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. Analyzer plots utilizing a 1 MHz resolution bandwidth and no video filtering were made for each mode listed in the datasheet.

The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to the limit.

SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS




XMIT 2016.05.06


EUT: CWS-3050-13		Work Order: KMWC0075			
Serial Number: K162600005		Date: 09/12/16			
Customer: Parallel Wireless Inc.		Temperature: 21.2 °C			
Attendees: Andy Ku		Humidity: 45.5% RH			
Project: None		Barometric Pres.: 1017 mbar			
Tested by: Johnny Candelas		Power: 48VDC			
		Job Site: OC01			
TEST SPECIFICATIONS					
FCC 27:2016		Test Method			
		ANSI/TIA/EIA-603-D-2010			
COMMENTS					
Power Level Setting 40W. Reference Level Offset: DC Block + 30dB Attenuator + 20dB Attenuator + Power Divider + Cable Loss = 55dB total.					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature 			
		Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result
Antenna Port 1					
	Low Channel LTE5, 748.5 MHz	30 MHz - 1 GHz	-24.94	-13	Pass
	Low Channel LTE5, 748.5 MHz	1 GHz - 8 GHz	-23.64	-13	Pass
	High Channel LTE5, 753.5 MHz	30 MHz - 1 GHz	-29.20	-13	Pass
	High Channel LTE5, 753.5 MHz	1 GHz - 8 GHz	-24.14	-13	Pass
	Single Channel LTE10, 751 MHz	30 MHz - 1 GHz	-30.27	-13	Pass
	Single Channel LTE10, 751 MHz	1 GHz - 8 GHz	-23.94	-13	Pass
Antenna Port 2					
	Low Channel LTE5, 748.5 MHz	30 MHz - 1 GHz	-29.62	-13	Pass
	Low Channel LTE5, 748.5 MHz	1 GHz - 8 GHz	-24.22	-13	Pass
	High Channel LTE5, 753.5 MHz	30 MHz - 1 GHz	-27.52	-13	Pass
	High Channel LTE5, 753.5 MHz	1 GHz - 8 GHz	-23.77	-13	Pass
	Single Channel LTE10, 751 MHz	30 MHz - 1 GHz	-31.56	-13	Pass
	Single Channel LTE10, 751 MHz	1 GHz - 8 GHz	-23.66	-13	Pass

SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS

Antenna Port 1, Low Channel LTE5, 748.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 1 GHz	-24.94	-13	Pass	

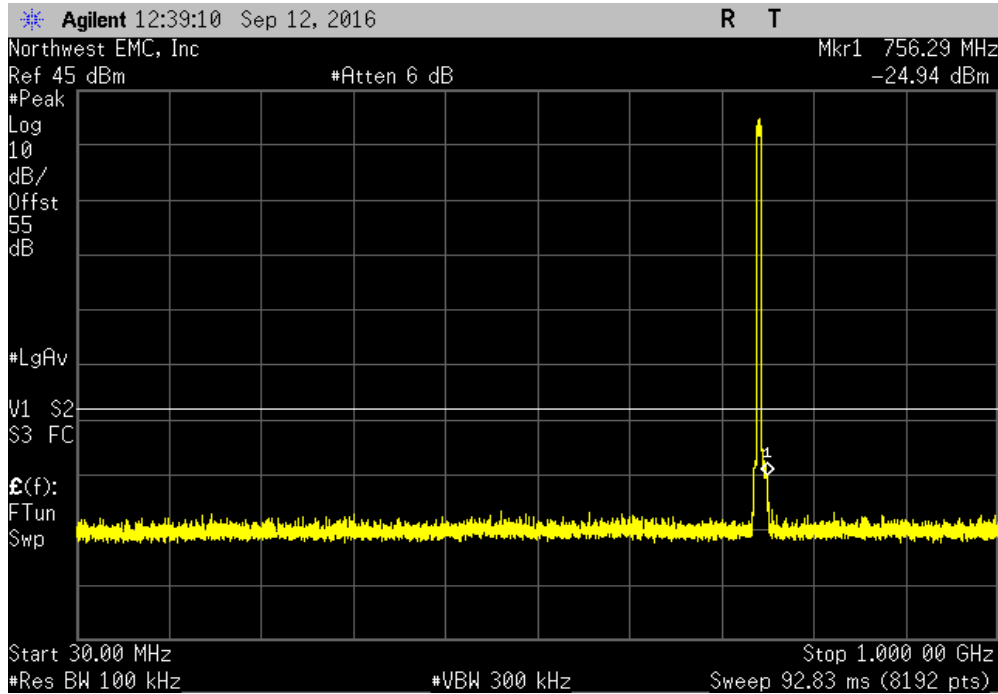


Antenna Port 1, Low Channel LTE5, 748.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 8 GHz	-23.64	-13	Pass	

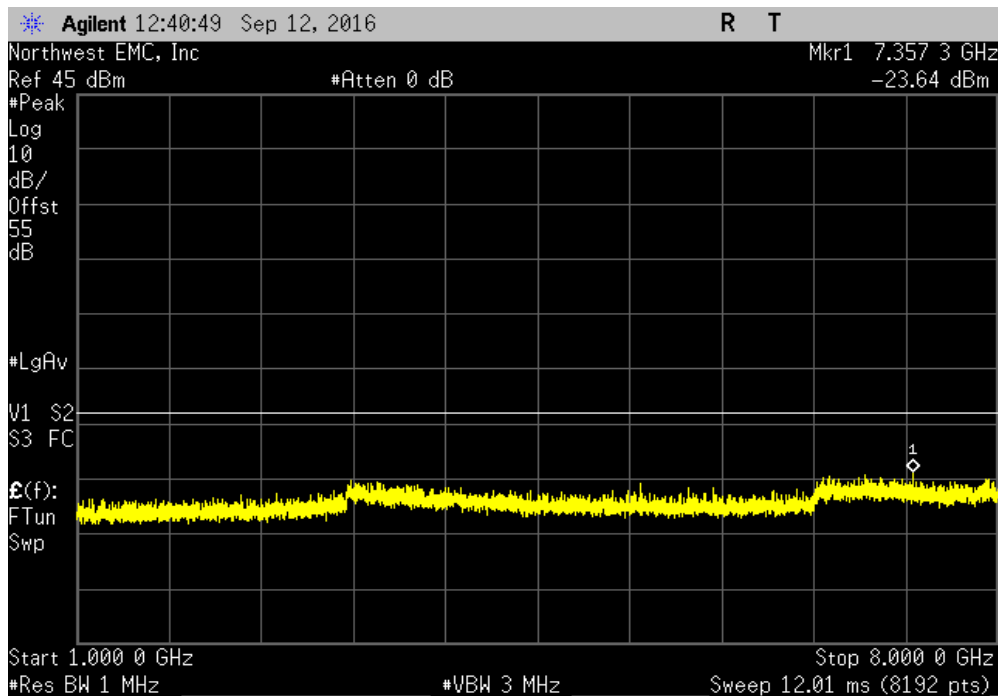


SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS

Antenna Port 1, High Channel LTE5, 753.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 1 GHz	-29.20	-13	Pass	

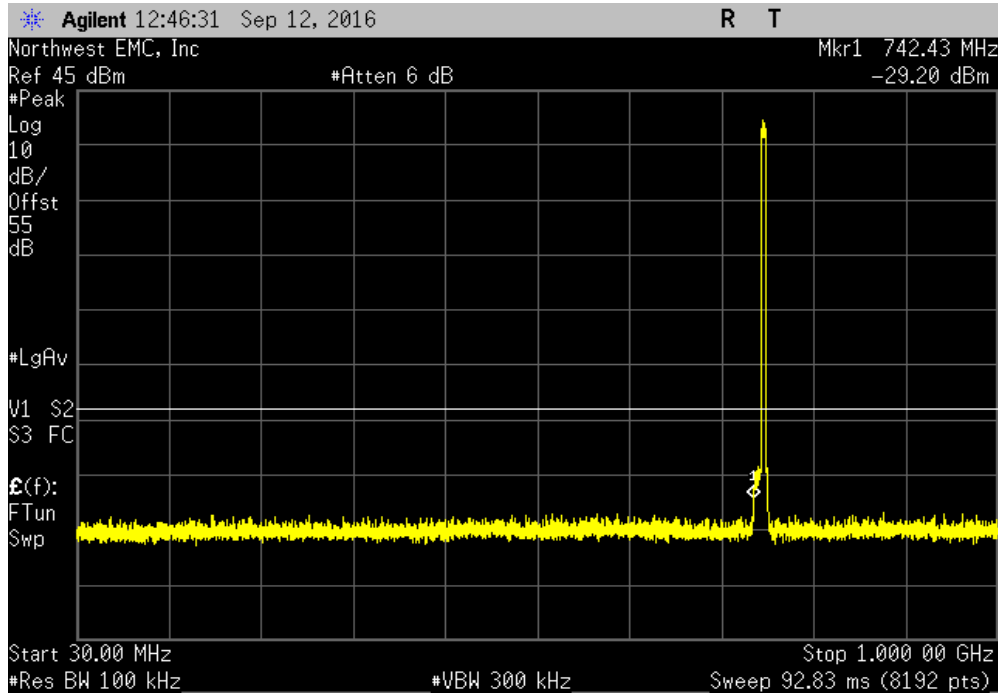


Antenna Port 1, High Channel LTE5, 753.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 8 GHz	-24.14	-13	Pass	

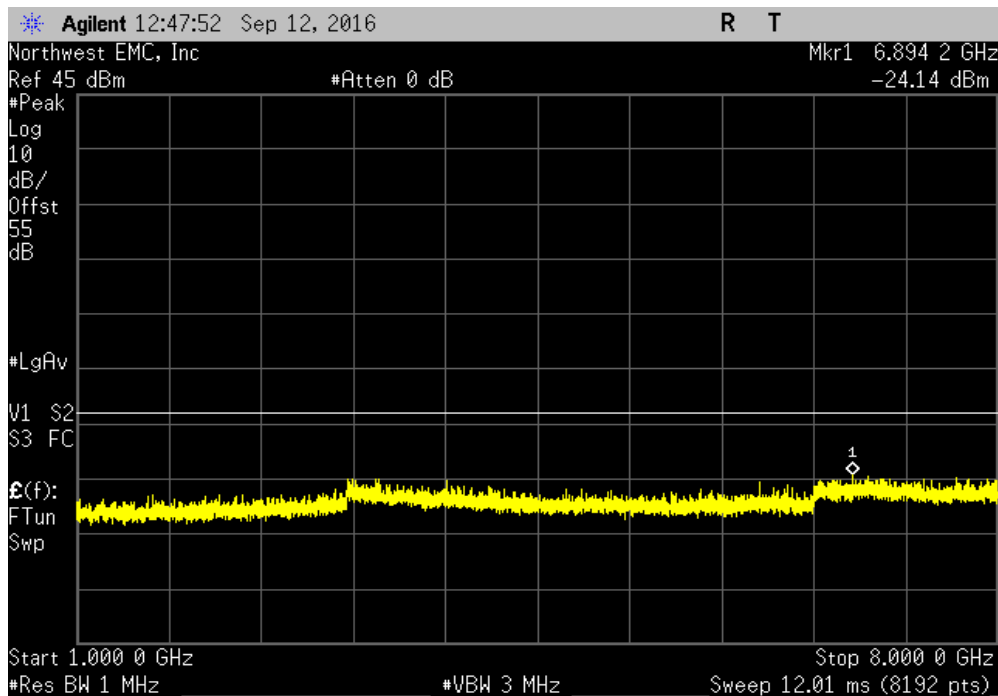


SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS

Antenna Port 1, Single Channel LTE10, 751 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 1 GHz	-30.27	-13	Pass	

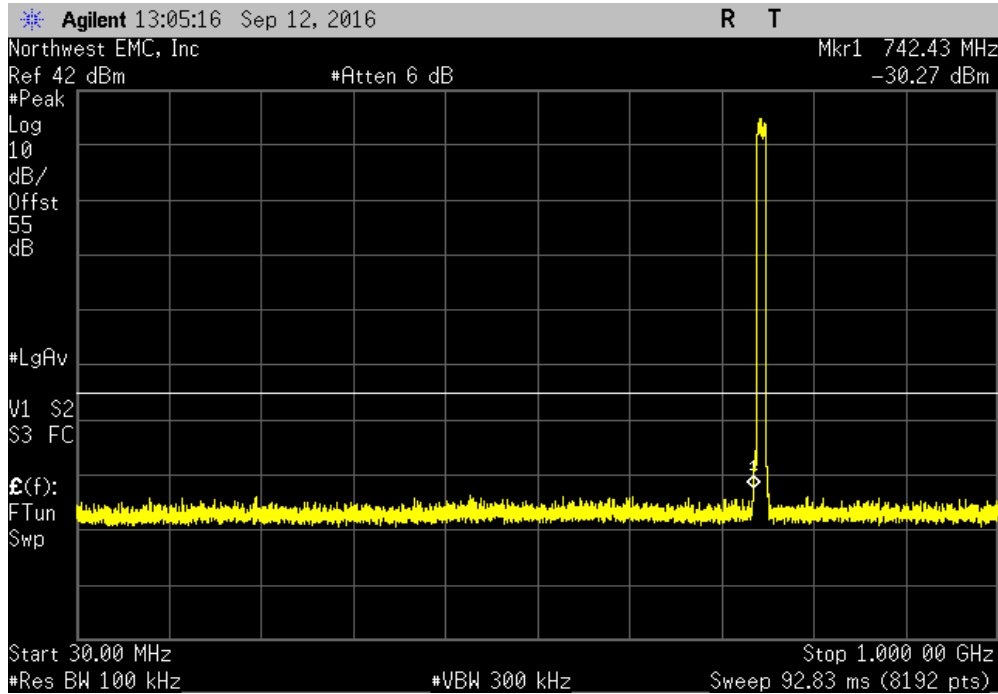


Antenna Port 1, Single Channel LTE10, 751 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 8 GHz	-23.94	-13	Pass	

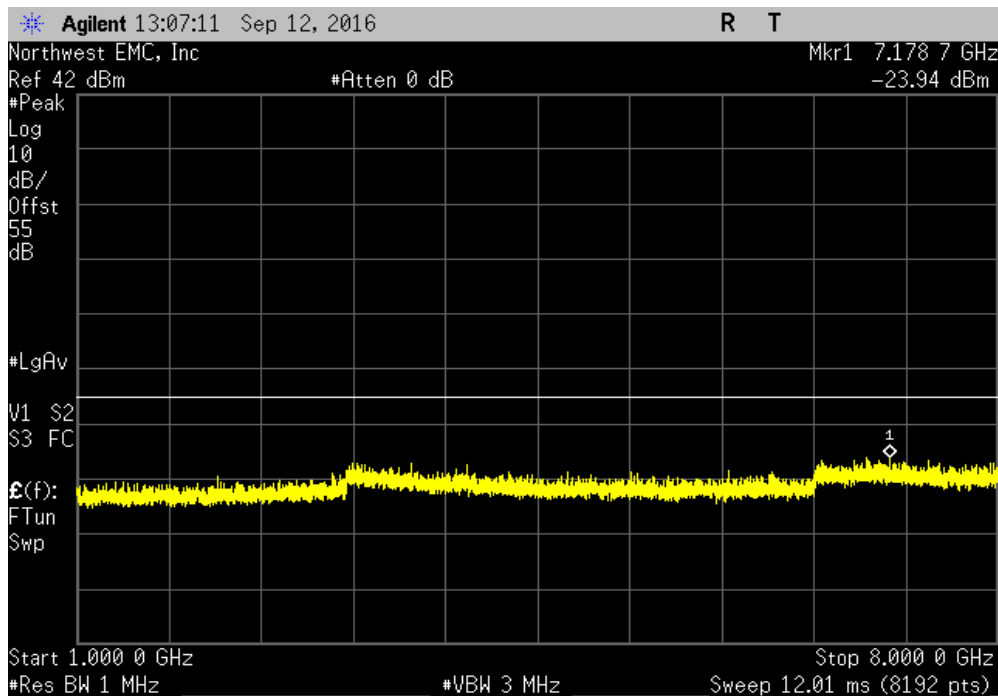


SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS

Antenna Port 2, Low Channel LTE5, 748.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 1 GHz	-29.62	-13	Pass	

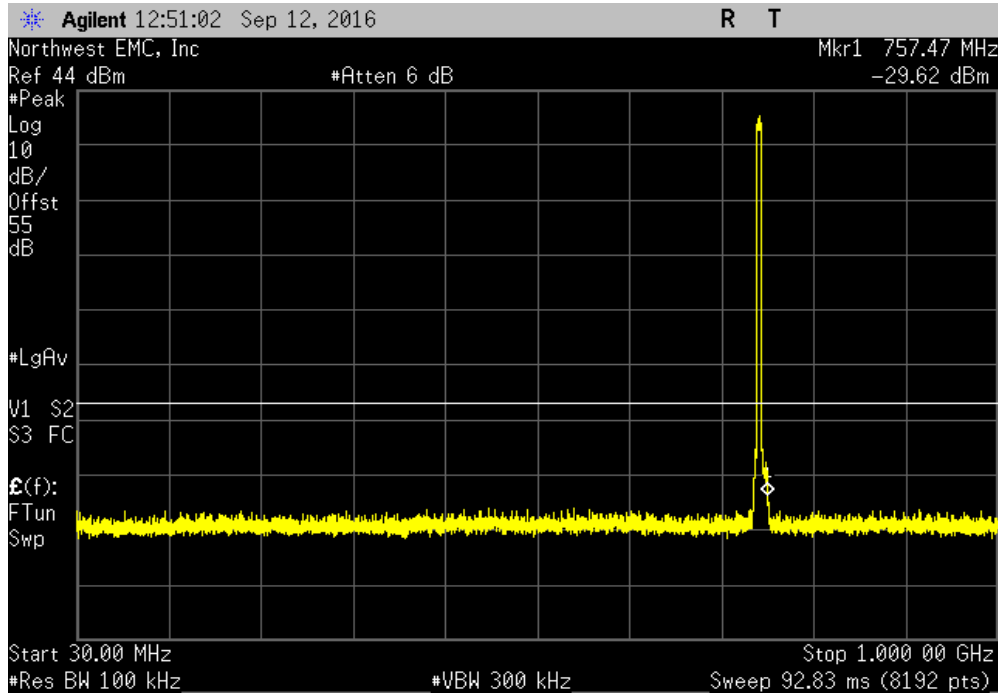


Antenna Port 2, Low Channel LTE5, 748.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 8 GHz	-24.22	-13	Pass	

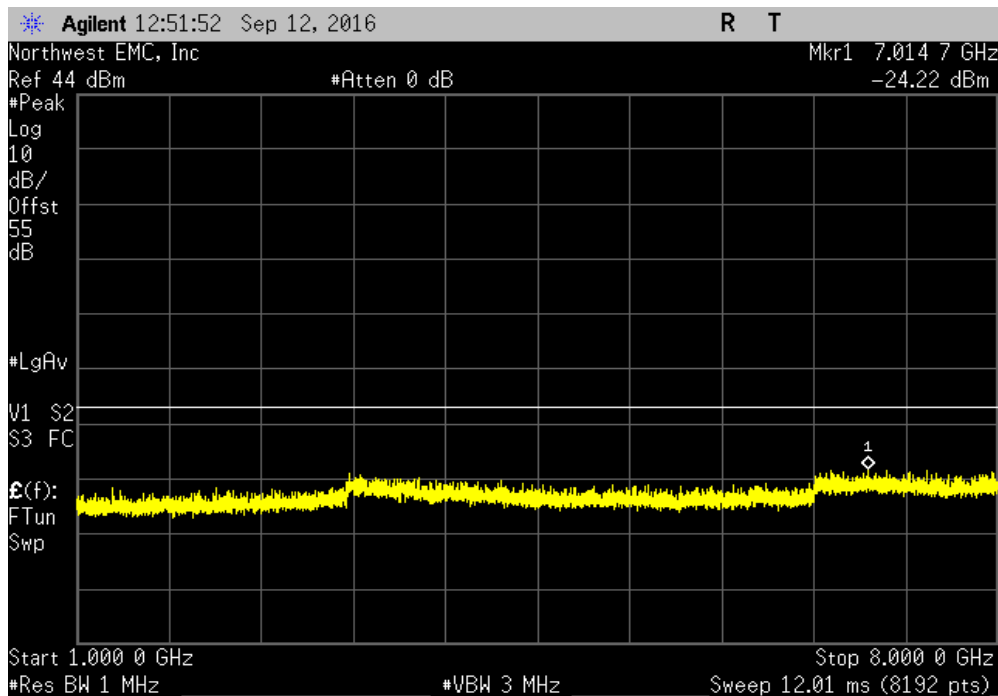


SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS

Antenna Port 2, High Channel LTE5, 753.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 1 GHz	-27.52	-13	Pass	

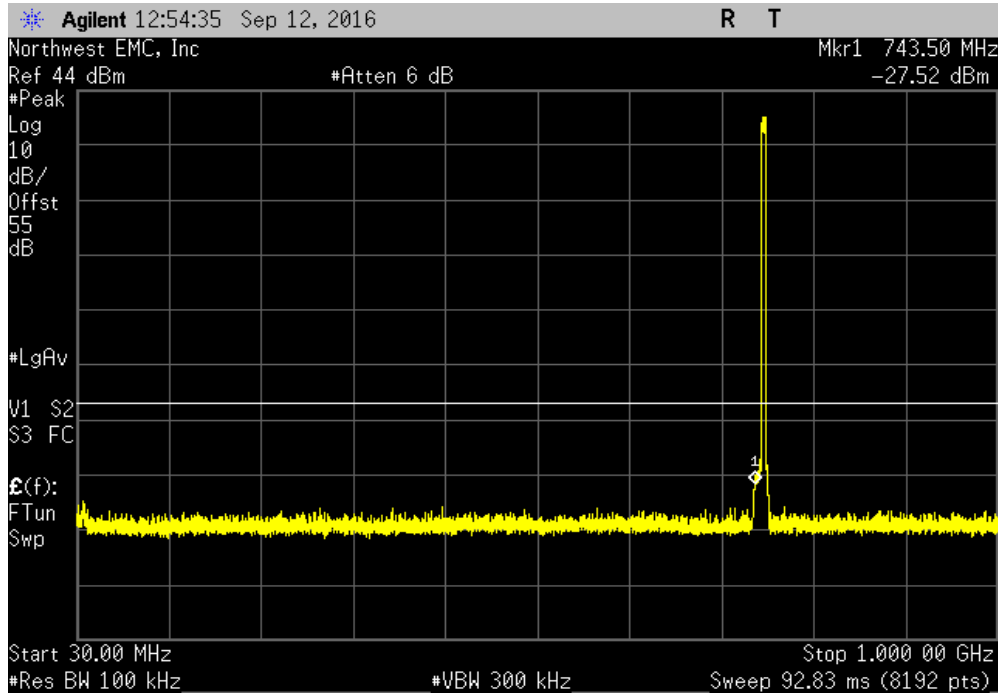


Antenna Port 2, High Channel LTE5, 753.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 8 GHz	-23.77	-13	Pass	

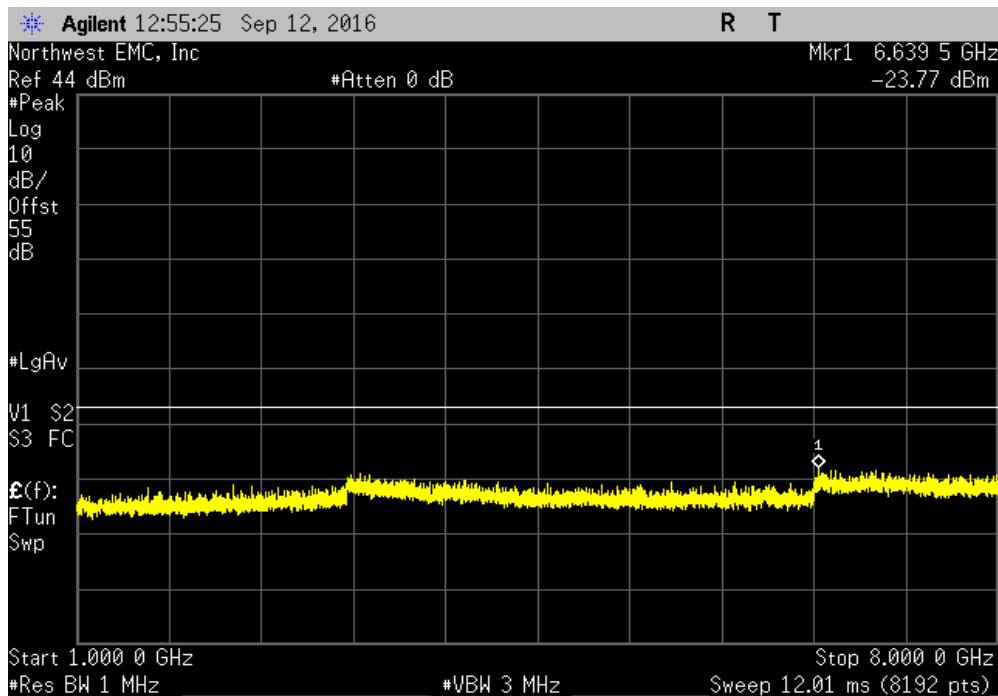


SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS

Antenna Port 2, Single Channel LTE10, 751 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 1 GHz	-31.56	-13	Pass	

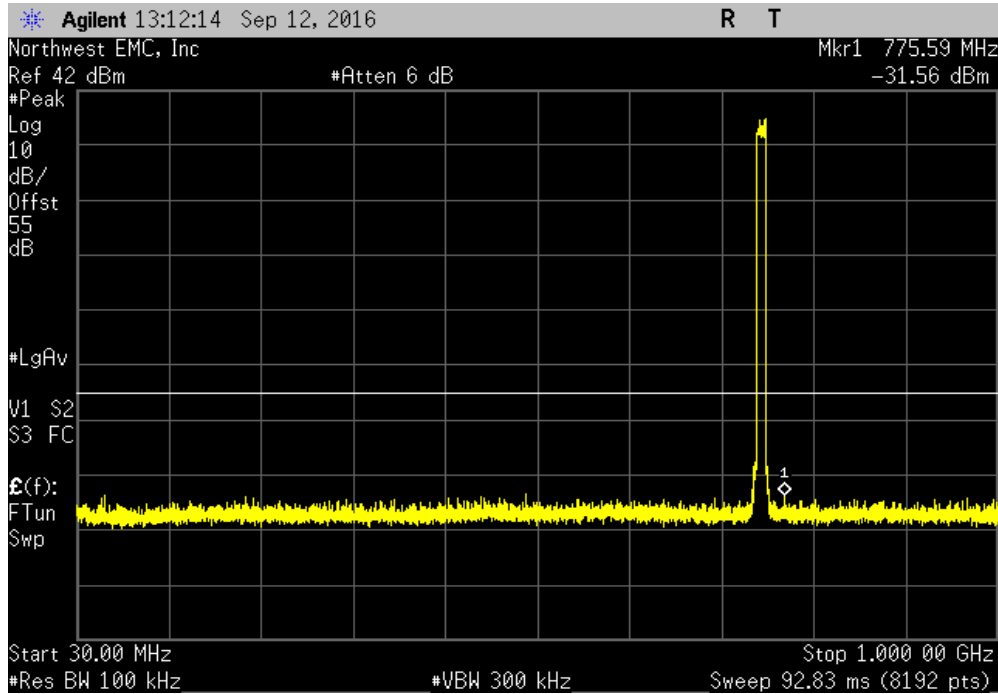

Antenna Port 2, Single Channel LTE10, 751 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 8 GHz	-23.66	-13	Pass	

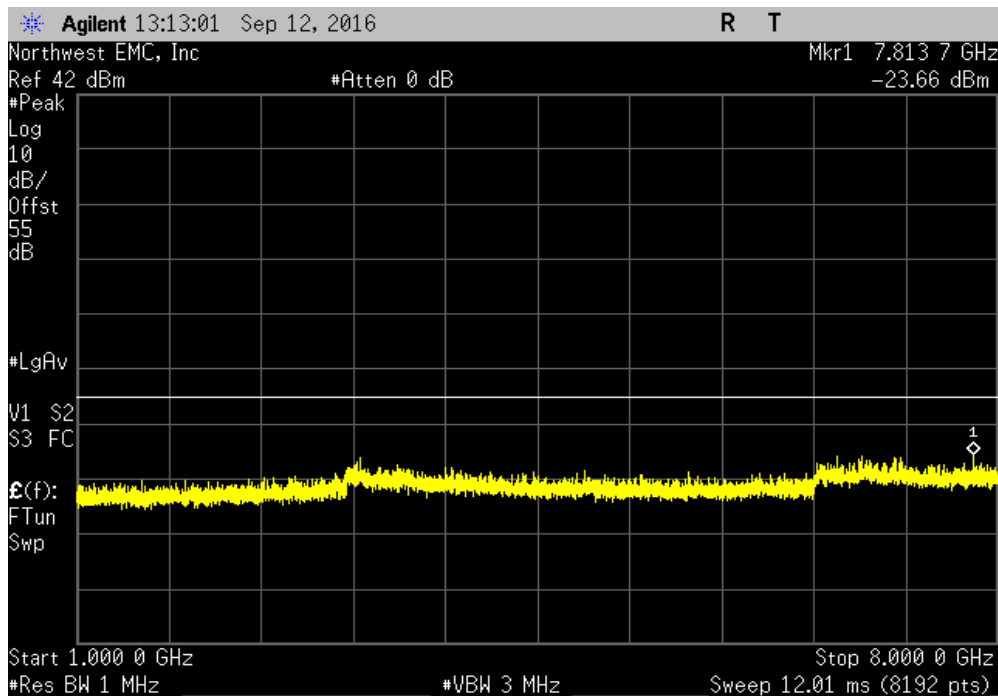

BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Power Supply - DC	Hewlett Packard	6574A	TPX	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	2/5/2015	2/5/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016

CLIENT PROVIDED EQUIPMENT

Description	Manufacturer	Model	Last Cal.	Cal. Due
High Power Attenuator - 30dB	Aeroflex/Weinschel	53-30-43	NCR	NCR
Attenuator - 20dB	N/A	N/A	NCR	NCR
Power Divider	Fairview Microwave	MP8748-2	NCR	NCR
50Ohm Terminator	Aeroflex/Weinschel	1455-4	NCR	NCR
High Power Terminator	Telcon	KTMO400800060	NCR	NCR

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.


The spurious RF conducted emissions at the authorized bands per FCC 27.53(c)(3) were measured with the EUT transmitting at the data rate(s) listed in the datasheet.

An average RMS detector was used to match the method used during Output Power. The screen capture shows the margin between the measured value and the limit at the band edge.

BAND EDGE COMPLIANCE




XMIT 2016.05.06


EUT: CWS-3050-13		Work Order: KMWC0075				
Serial Number: K162600005		Date: 09/12/16				
Customer: Parallel Wireless Inc.		Temperature: 21.2 °C				
Attendees: Andy Ku		Humidity: 45.5% RH				
Project: None		Barometric Pres.: 1017 mbar				
Tested by: Johnny Candelas		Power: 48VDC				
Job Site: OC01		Test Method				
FCC 27:2016		ANSI/TIA/EIA-603-D-2010				
COMMENTS						
Power Level Setting 40W. Reference Level Offset: DC Block + 30dB Attenuator + 20dB Attenuator + Power Divider + Cable Loss = 55dB total.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	1	Signature 				
		Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
SISO						
Antenna Port 1						
		Low Channel LTE5, 748.5 MHz	763 MHz - 775 MHz	-51.91	-46	Pass
		Low Channel LTE5, 748.5 MHz	775 MHz - 793 MHz	-52.09	-46	Pass
		Low Channel LTE5, 748.5 MHz	793 MHz - 805 MHz	-52.36	-46	Pass
		High Channel LTE5, 753.5 MHz	763 MHz - 775 MHz	-51.83	-46	Pass
		High Channel LTE5, 753.5 MHz	775 MHz - 793 MHz	-52.42	-46	Pass
		High Channel LTE5, 753.5 MHz	793 MHz - 805 MHz	-52.70	-46	Pass
		Single Channel LTE10, 751 MHz	763 MHz - 775 MHz	-52.32	-46	Pass
		Single Channel LTE10, 751 MHz	775 MHz - 793 MHz	-52.34	-46	Pass
		Single Channel LTE10, 751 MHz	793 MHz - 805 MHz	-52.20	-46	Pass
Antenna Port 2						
		Low Channel LTE5, 748.5 MHz	763 MHz - 775 MHz	-51.95	-46	Pass
		Low Channel LTE5, 748.5 MHz	775 MHz - 793 MHz	-52.37	-46	Pass
		Low Channel LTE5, 748.5 MHz	793 MHz - 805 MHz	-52.60	-46	Pass
		High Channel LTE5, 753.5 MHz	763 MHz - 775 MHz	-52.69	-46	Pass
		High Channel LTE5, 753.5 MHz	775 MHz - 793 MHz	-52.08	-46	Pass
		High Channel LTE5, 753.5 MHz	793 MHz - 805 MHz	-52.54	-46	Pass
		Single Channel LTE10, 751 MHz	763 MHz - 775 MHz	-52.05	-46	Pass
		Single Channel LTE10, 751 MHz	775 MHz - 793 MHz	-52.20	-46	Pass
		Single Channel LTE10, 751 MHz	793 MHz - 805 MHz	-52.37	-46	Pass

BAND EDGE COMPLIANCE

SISO, Antenna Port 1, Low Channel LTE5, 748.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
763 MHz - 775 MHz	-51.91	-46	Pass	

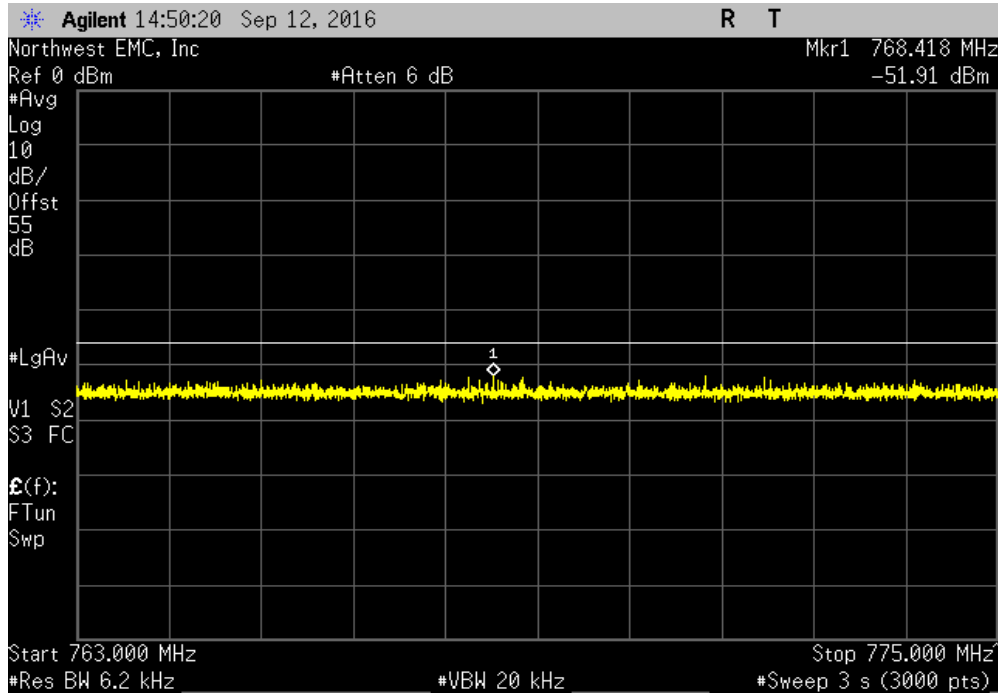


SISO, Antenna Port 1, Low Channel LTE5, 748.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
775 MHz - 793 MHz	-52.09	-46	Pass	

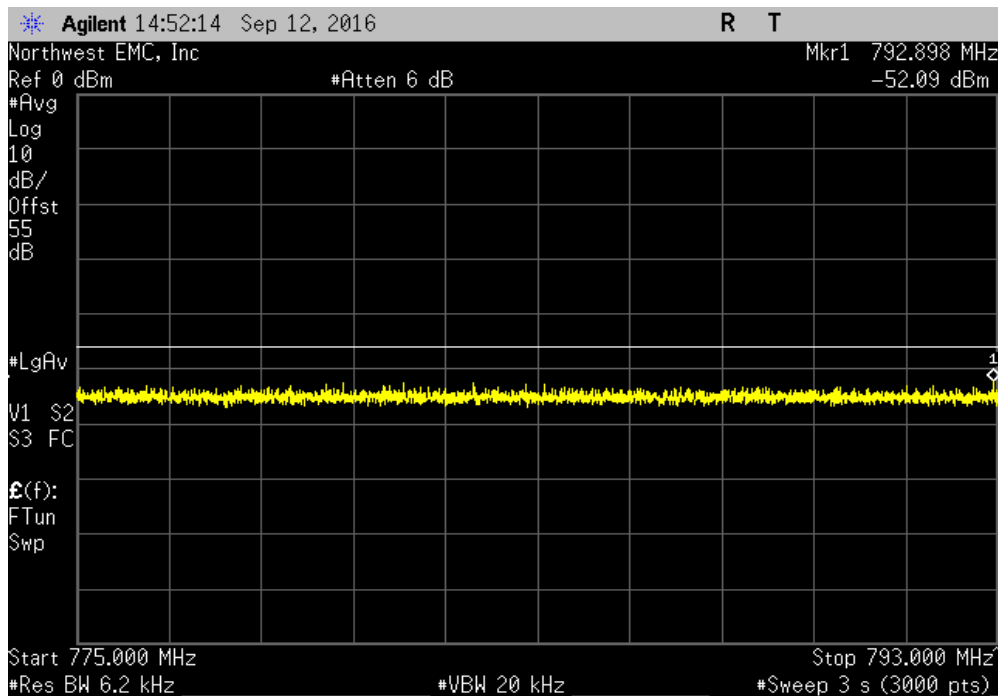


BAND EDGE COMPLIANCE

SISO, Antenna Port 1, Low Channel LTE5, 748.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
793 MHz - 805 MHz	-52.36	-46	Pass	

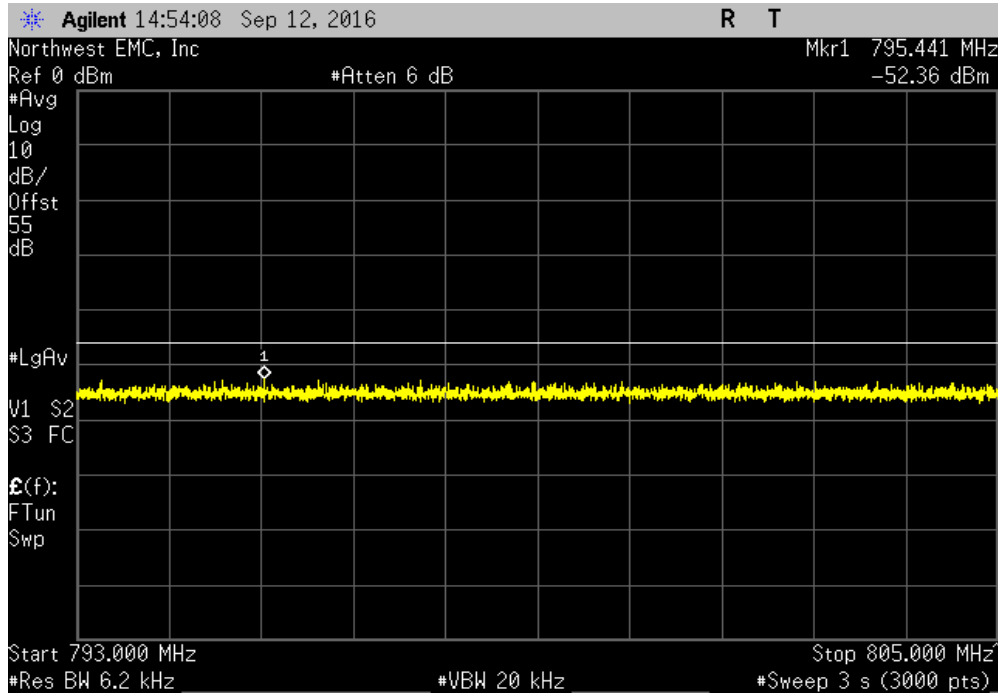


SISO, Antenna Port 1, High Channel LTE5, 753.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
763 MHz - 775 MHz	-51.83	-46	Pass	

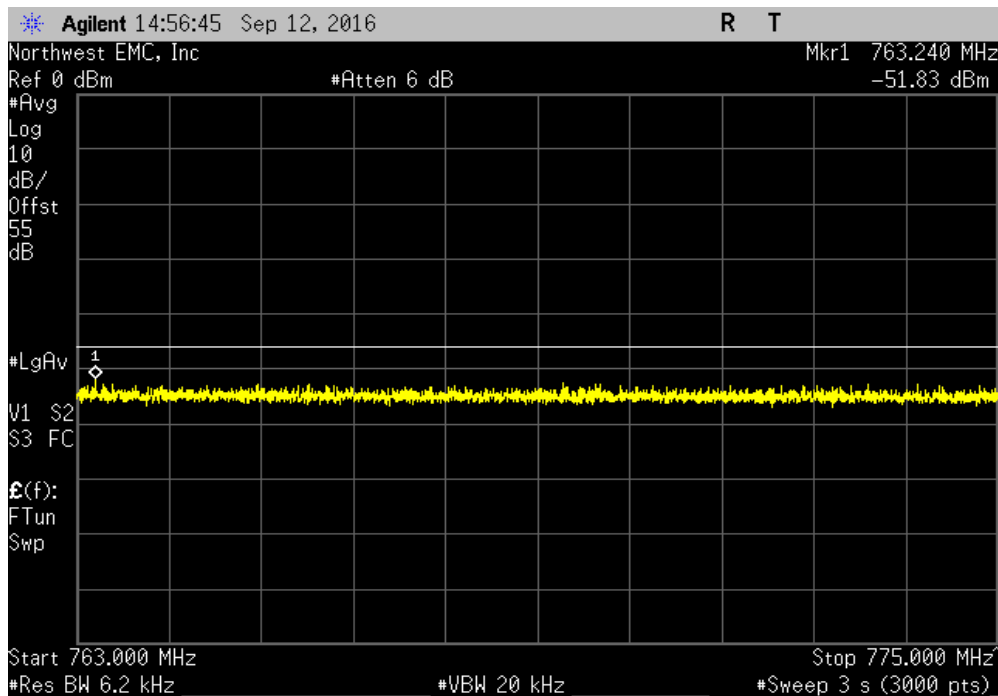


BAND EDGE COMPLIANCE

SISO, Antenna Port 1, High Channel LTE5, 753.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
775 MHz - 793 MHz	-52.42	-46	Pass	

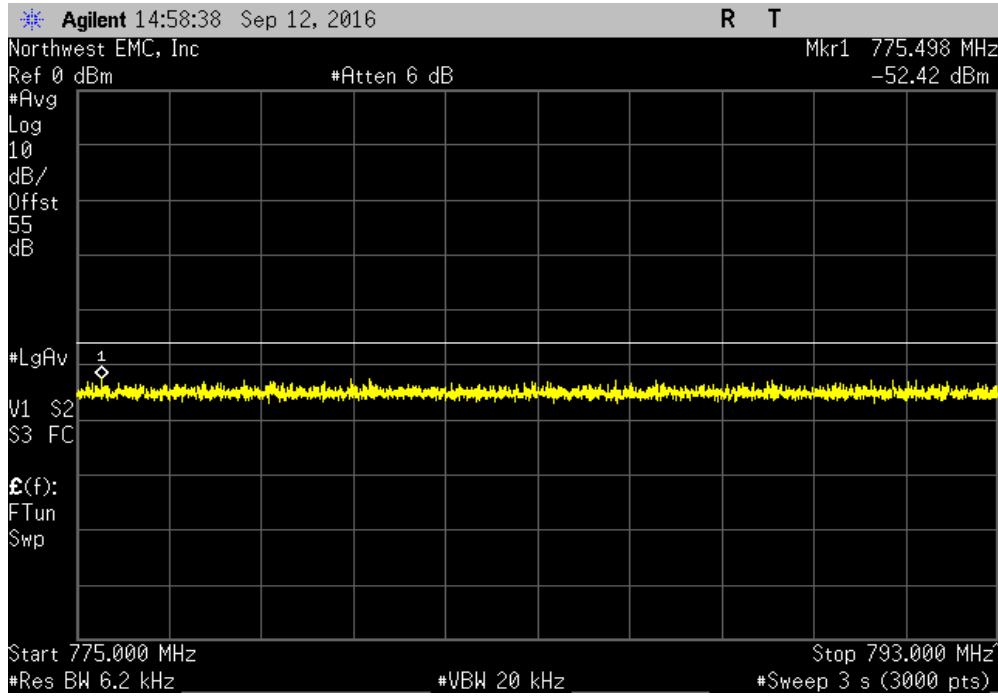


SISO, Antenna Port 1, High Channel LTE5, 753.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
793 MHz - 805 MHz	-52.70	-46	Pass	

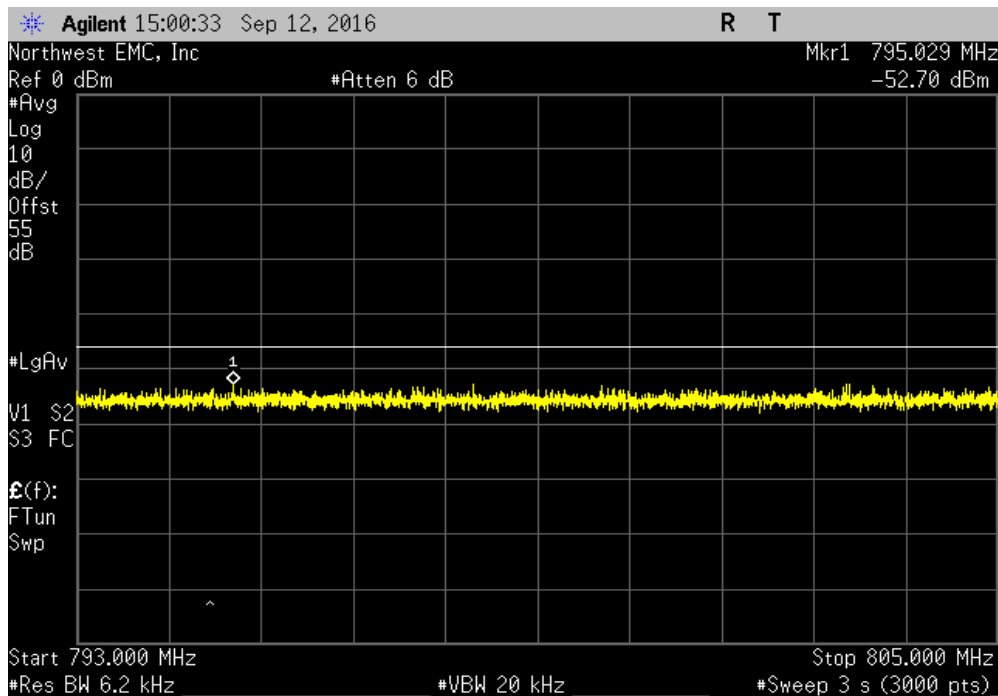


BAND EDGE COMPLIANCE

SISO, Antenna Port 1, Single Channel LTE10, 751 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
763 MHz - 775 MHz	-52.32	-46	Pass	

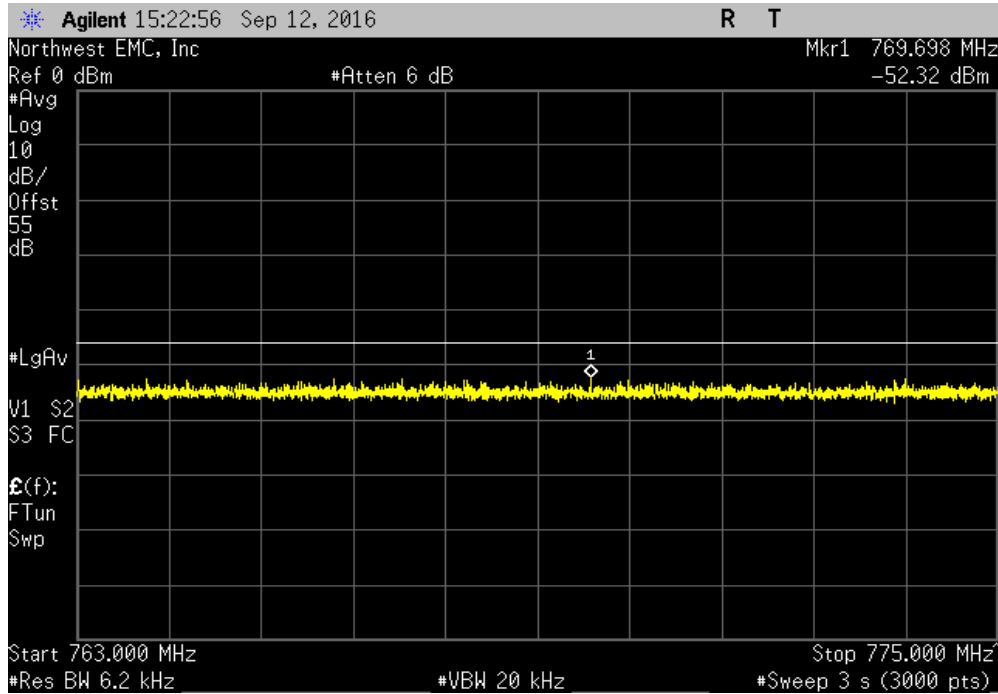


SISO, Antenna Port 1, Single Channel LTE10, 751 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
775 MHz - 793 MHz	-52.34	-46	Pass	

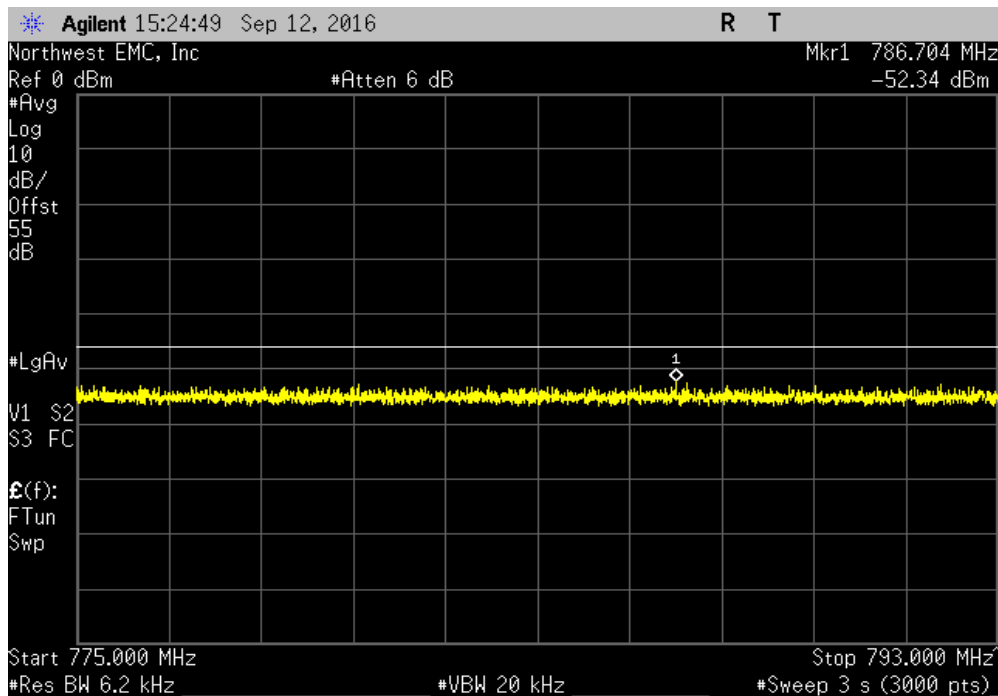


BAND EDGE COMPLIANCE

SISO, Antenna Port 1, Single Channel LTE10, 751 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
793 MHz - 805 MHz	-52.20	-46	Pass	

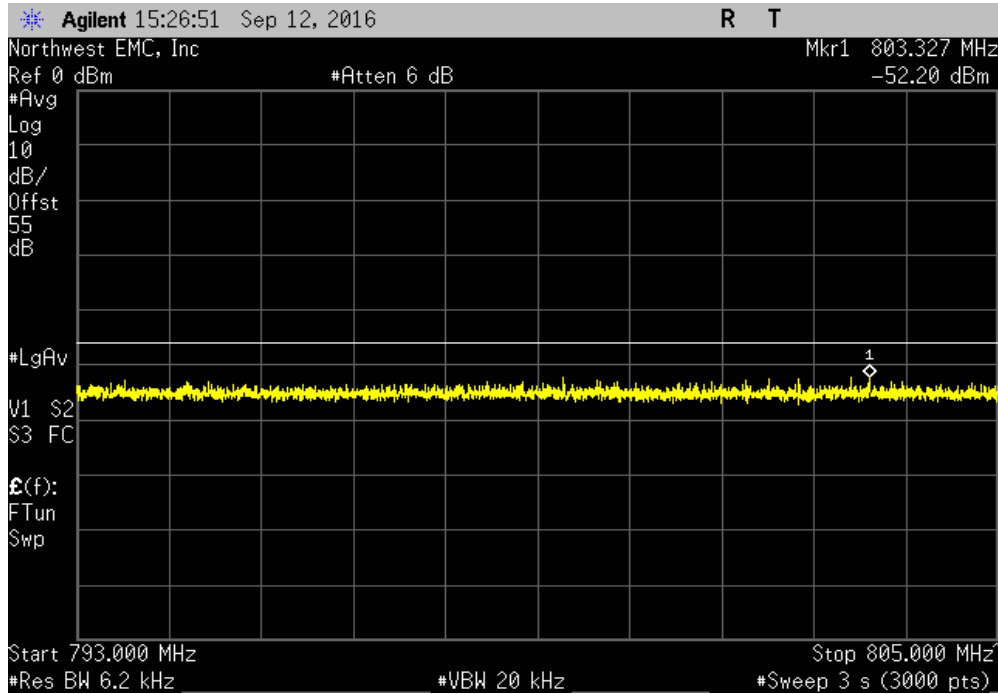


SISO, Antenna Port 2, Low Channel LTE5, 748.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
763 MHz - 775 MHz	-51.95	-46	Pass	

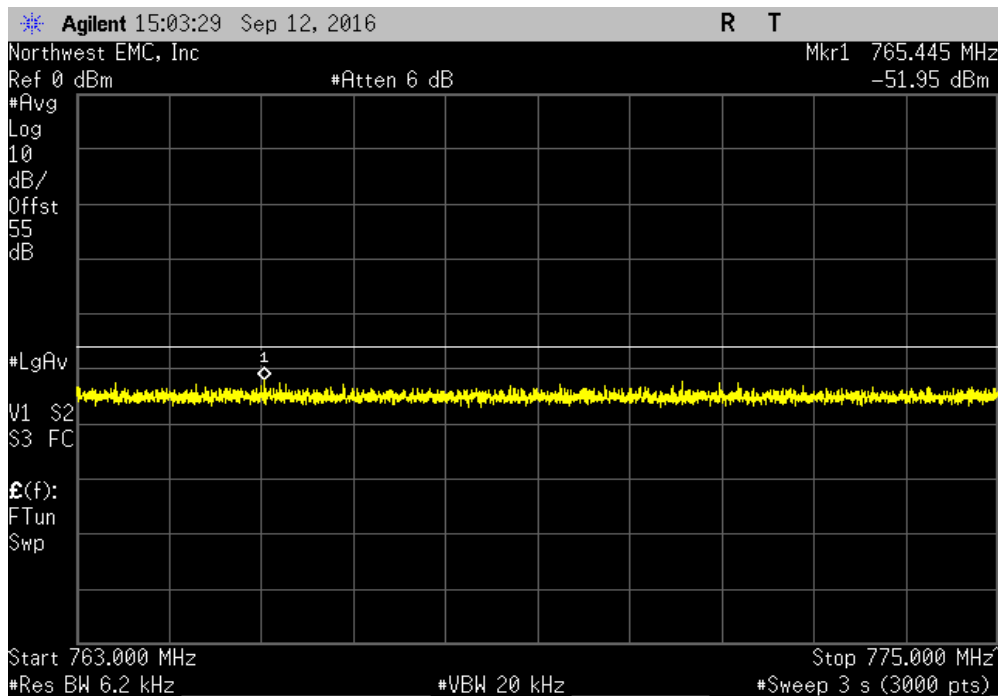


BAND EDGE COMPLIANCE

SISO, Antenna Port 2, Low Channel LTE5, 748.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
775 MHz - 793 MHz	-52.37	-46	Pass	

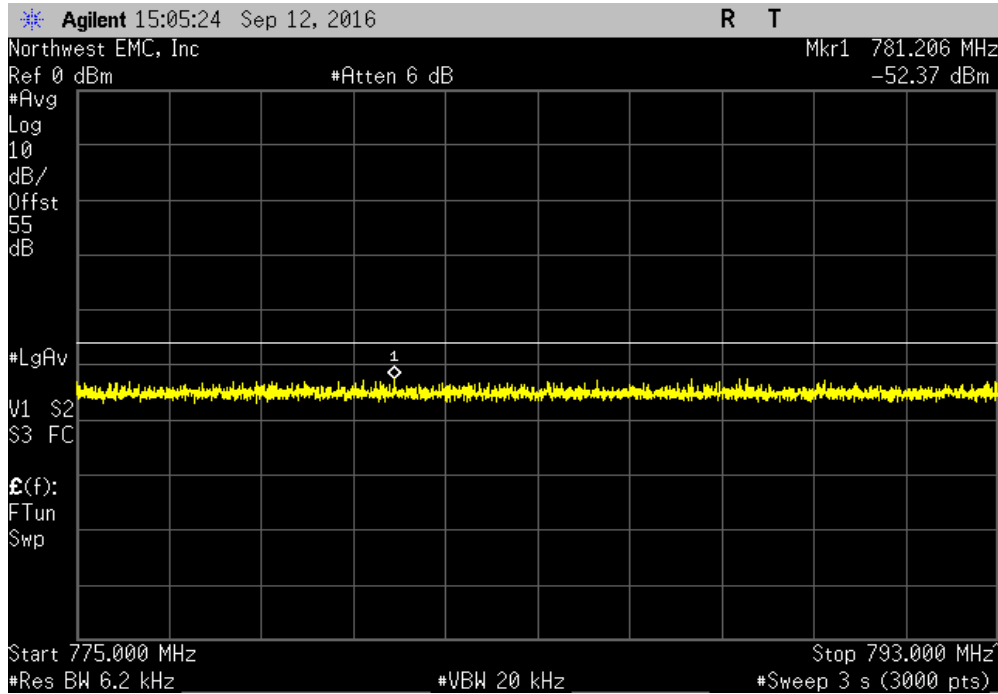


SISO, Antenna Port 2, Low Channel LTE5, 748.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
793 MHz - 805 MHz	-52.60	-46	Pass	

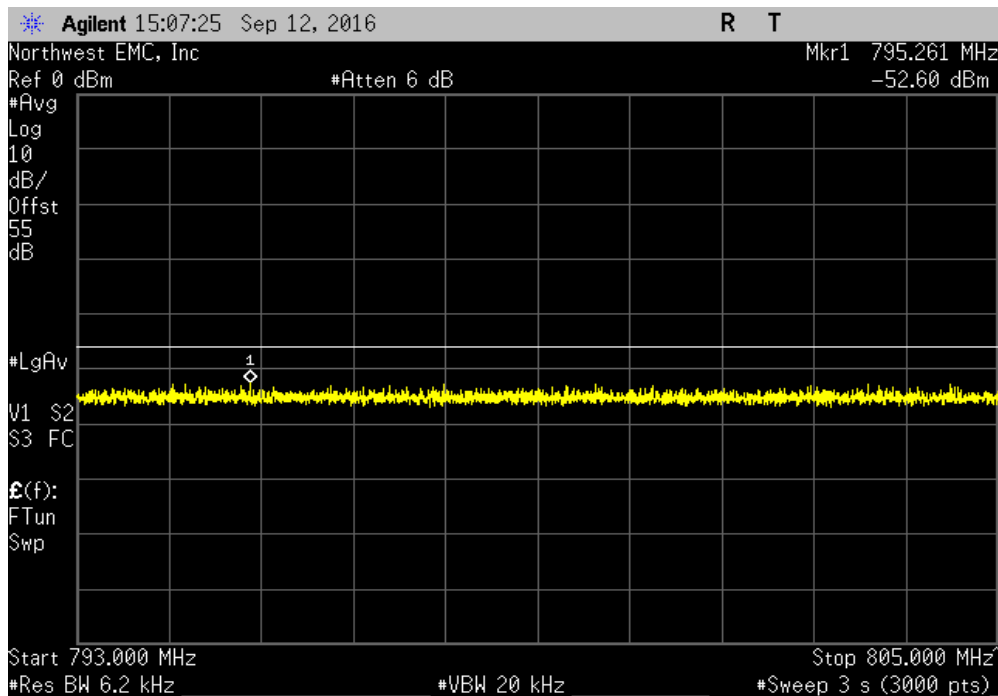


BAND EDGE COMPLIANCE

SISO, Antenna Port 2, High Channel LTE5, 753.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
763 MHz - 775 MHz	-52.69	-46	Pass	

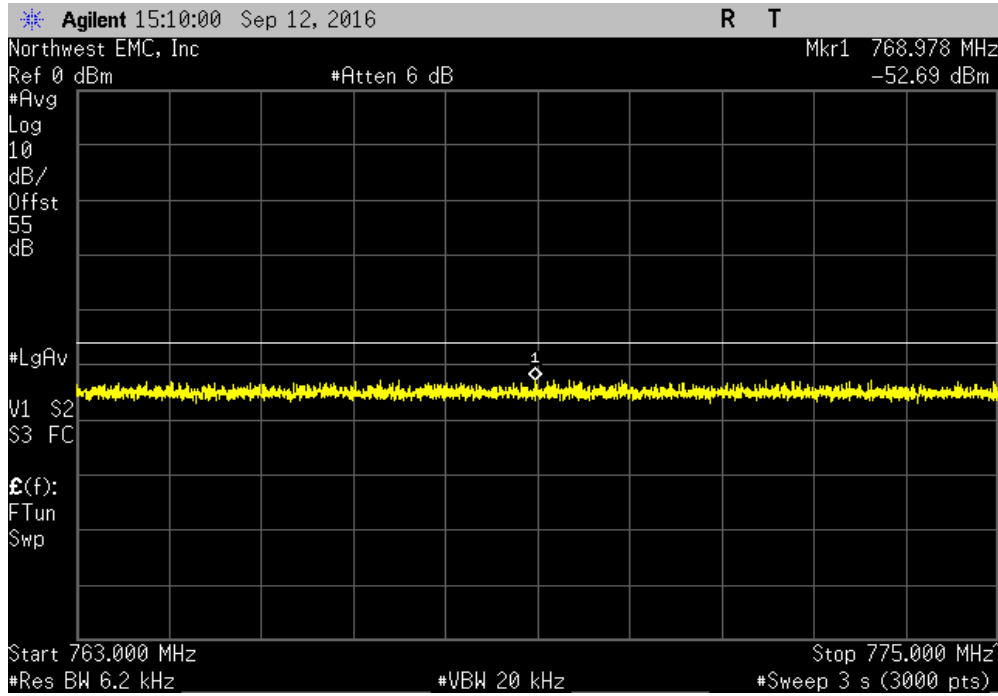


SISO, Antenna Port 2, High Channel LTE5, 753.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
775 MHz - 793 MHz	-52.08	-46	Pass	

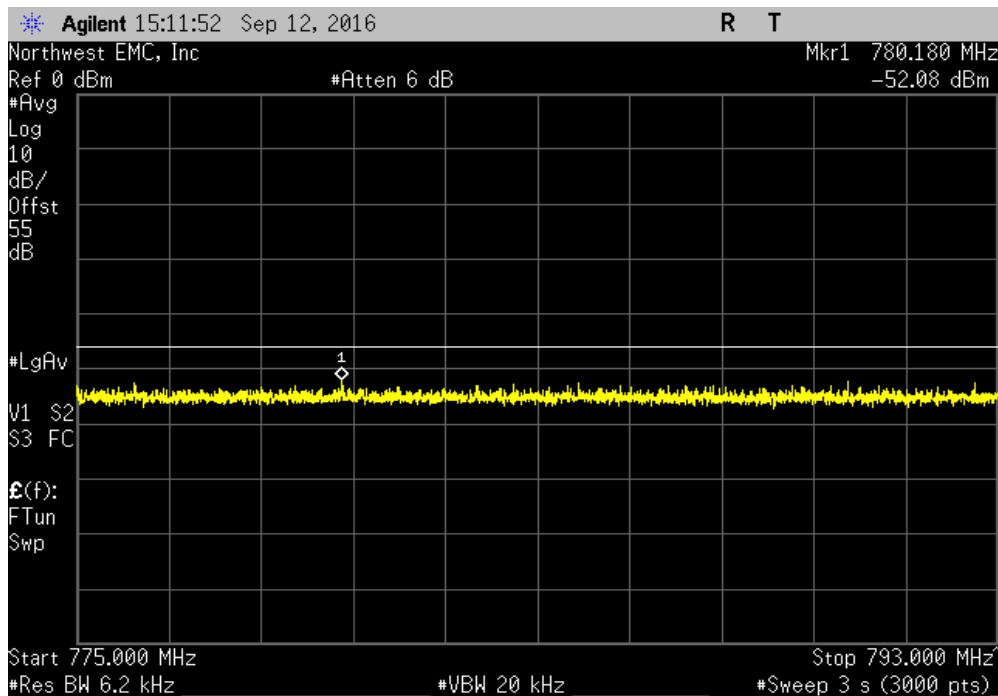


BAND EDGE COMPLIANCE

SISO, Antenna Port 2, High Channel LTE5, 753.5 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
793 MHz - 805 MHz	-52.54	-46	Pass	

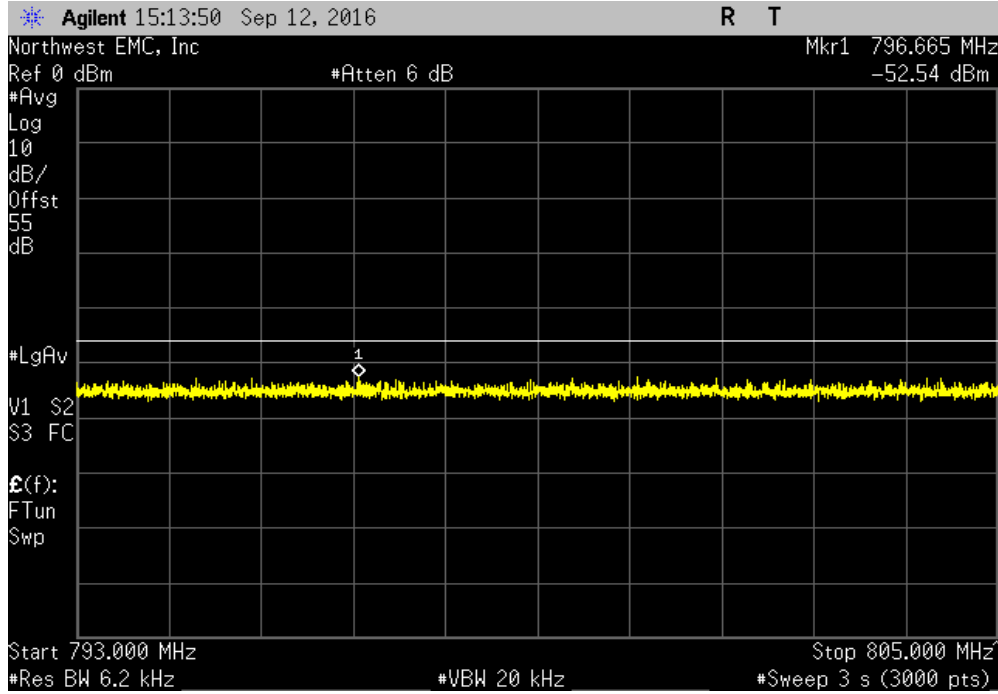


SISO, Antenna Port 2, Single Channel LTE10, 751 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
763 MHz - 775 MHz	-52.05	-46	Pass	

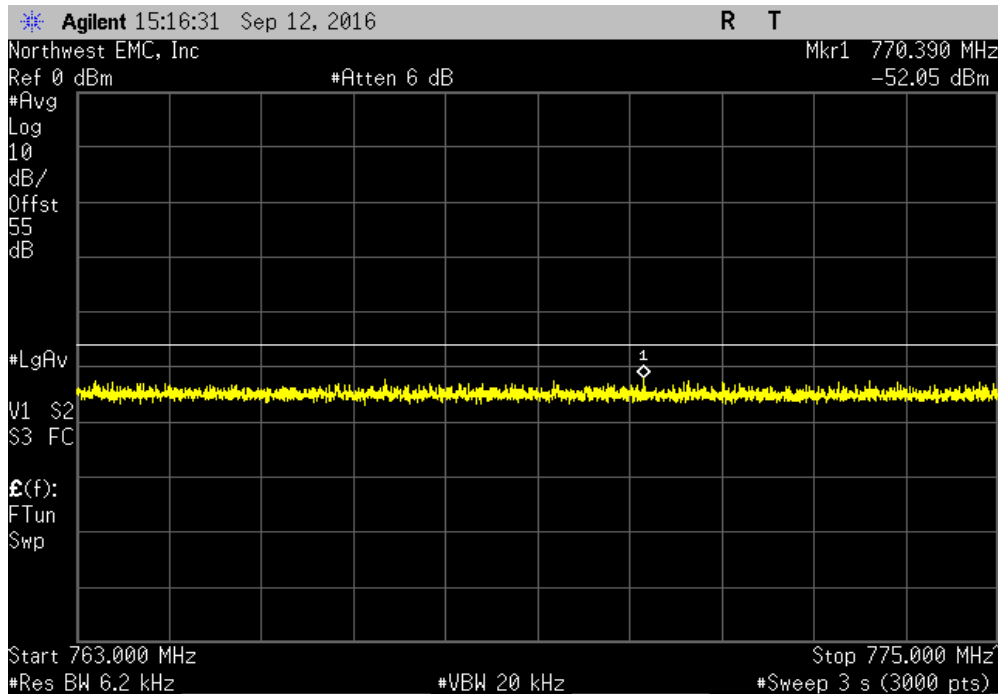

BAND EDGE COMPLIANCE

SISO, Antenna Port 2, Single Channel LTE10, 751 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
775 MHz - 793 MHz	-52.20	-46	Pass	

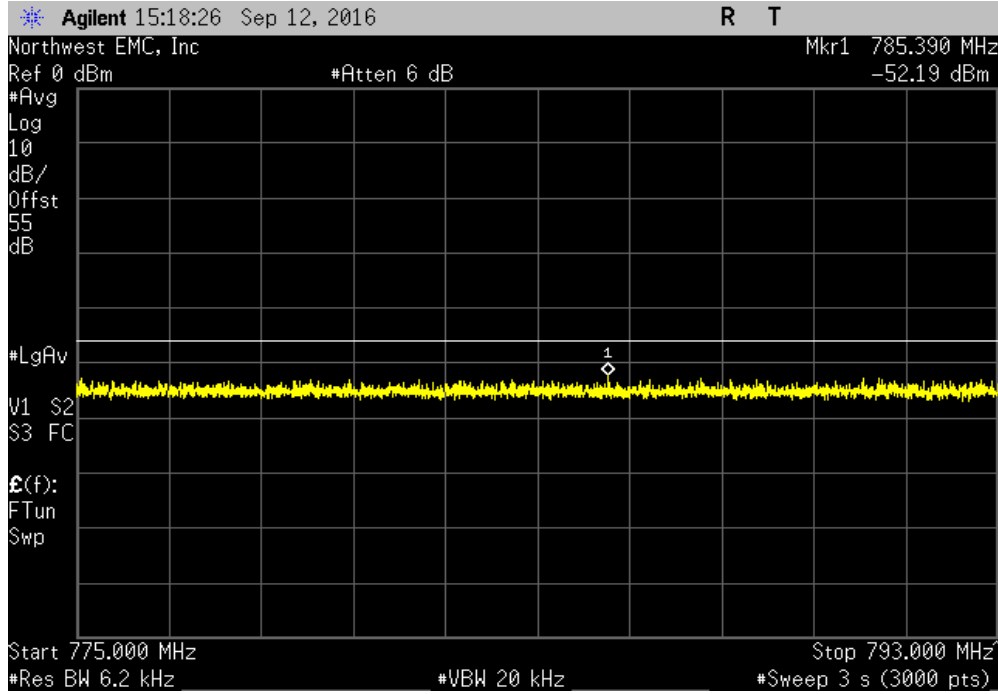

SISO, Antenna Port 2, Single Channel LTE10, 751 MHz				
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
793 MHz - 805 MHz	-52.37	-46	Pass	

